TECHNICAL MANUAL

ILLUSTRATED PARTS BREAKDOWN

AIRCRAFT ENGINE
USAF MODEL
F100-PW-229

PRATT & WHITNEY
LARGE MILITARY ENGINES
UNITED TECHNOLOGIES CORPORATION
F33657-84-C-2014
F41608-94-D-0816

THIS PUBLICATION SUPERSEDES INTERIM OPERATIONAL SUPPLEMENT T.O. 2J-F100-54S-20, DATED 9 JUNE 1999.

PUBLISHED UNDER AUTHORITY OF THE SECRETARY OF THE AIR FORCE

15 JANUARY 1993
CHANGE 26 — 15 JULY 1999

LIST OF EFFECTIVE PAGES

Insert latest changed pages; dispose of superseded pages in accordance with applicable regulations.

NOTE: On a changed page, the portion of the text affected by the latest change is indicated by a vertical line, or other change symbol, in outer margin of the page. Changes to illustrations are indicated by miniature pointing hands.

RECORD OF CHANGES

Original 0 ....15 Jan 93
Change 1 ....15 Apr 93
Change 2 ....15 Jul 93
Change 3 ....15 Oct 93
Change 4 ....15 Jan 94
Change 5 ....15 Apr 94
Change 6 ....15 Jul 94
Change 7 ....15 Oct 94
Change 8 ....15 Jan 95
Change 9 ....15 Apr 95
Change 10 ....15 Jul 95
Change 11 ....15 Oct 95
Change 12 ....15 Jan 96
Change 13 ....15 Apr 96
Change 14 ....15 Jul 96
Change 15 ....15 Oct 96
Change 16 ....15 Jan 97
Change 17 ....15 Apr 97
Change 18 ....15 Jul 97
Change 19 ....15 Oct 97
Change 20 ....15 Jan 98
Change 21 ....15 Apr 98
Change 22 ....15 Jul 98
Change 23 ....15 Oct 98
Change 24 ....15 Jan 99
Change 25 ....15 Apr 99
Change 26 ....15 Jul 99

Total number of pages in this manual is 804 consisting of the following:

PAGE NO.	CHANGE NO.
Title	26
A – D	26
E Blank	26
a – b	24
c – d	25
e – f	24
i	3
ii	15
iii	26
iv	23
v	16
vi – viii	26
1-1	9
1-2 – 1-3	0
1-4	4
1-4.1	19
1-4.2 Blank	19
1-5 – 1-9	26
1-10 – 1-10.1	24
1-10.2 Blank	14
1-11	22
1-12 – 1-13	11
1-14	0
1-15	20
1-16	24
1-17 – 1-20	0
1-21	3
1-22	2
1-23 – 1-24	25
1-25	15
1-26	16
1-27 – 1-28	0
1-29 – 1-37	24
1-38 – 1-66	26
1-67	24
1-68 Blank	24
2-1 – 2-2	0
2-3	26
2-4 – 2-6	25
2-6.1 – 2-6.2	24
2-7 – 2-9	26
2-10	11
2-11	0
2-12	19
2-13	16
2-14	13
2-14.1	7
2-14.2 Blank	6
2-15	16
2-16	19
2-17	6
2-18	19
2-19	7
2-20	23
2-21 Blank	0
2-22 – 2-25	19
2-26	13
2-27	11
2-28 – 2-29	19
2-30 – 2-32	8
2-33 Blank	0
2-34	19
2-35	13
2-36	19
2-37	6
2-38	19
2-39	6
2-40	19
2-41	0
2-42	23
2-43	11
2-44	0
2-45	3
2-46 – 2-47	24
2-48	19
2-49	20
2-50	19
2-51	8
2-52	19
2-53	20
2-54	8
2-55	20
2-56	19
2-57	20
2-58	19
2-59	0
2-60	19
2-61	20

LIST OF EFFECTIVE PAGES (continued)

PAGE NO.	CHANGE NO.	PAGE NO.	CHANGE NO.	PAGE NO.	CHANGE NO.
2-62	19	2-115	13	2-168.6 Blank	6
2-63	20	2-116 – 2-117	24	2-169 Blank	0
2-64	19	2-118	19	2-170	11
2-65 – 2-66	8	2-119	16	2-171	6
2-67	21	2-120	19	2-172	0
2-68	20	2-121 – 2-122	8	2-173	9
2-69 Blank	0	2-123	20	2-174	19
2-70	19	2-124	24	2-175	20
2-71	3	2-125	19	2-176 – 2-177	13
2-72	20	2-126	0	2-178	24
2-73 Blank	0	2-127 – 2-129	24	2-179	13
2-74	19	2-130 – 2-131	0	2-180 – 2-181	3
2-75 – 2-76	13	2-132	4	2-182	0
2-77	20	2-133	24	2-183	15
2-78	19	2-134	25	2-184	22
2-79	20	2-135	11	2-184.1 Blank	22
2-80 – 2-83	24	2-136 – 2-138	0	2-184.2	22
2-84	1	2-139	26	2-185 – 2-186	22
2-85	0	2-140	11	2-187 – 2-189	0
2-86	19	2-141 Blank	0	2-190 – 2-191	24
2-87	3	2-142 – 2-145	0	2-192	13
2-88	19	2-146	23	2-193 Blank	0
2-89	15	2-147	24	2-194 – 2-194.1	7
2-90 – 2-90.1	19	2-148 – 2-149	9	2-194.2 Blank	1
2-90.2	15	2-150 – 2-151	13	2-195	1
2-91	20	2-152 – 2-152.2	1	2-196	0
2-92 Blank	15	2-153	1	2-197	11
2-93 Blank	0	2-154	21	2-198	23
2-94	19	2-154.1 – 2-154.2	15	2-199 – 2-200	7
2-95	16	2-155 – 2-156	5	2-201 – 2-202.2	26
2-96	24	2-157 Blank	0	2-203	26
2-97	10	2-158	19	2-204	0
2-98	24	2-159	20	2-205	6
2-99	10	2-160	0	2-206	0
2-100	24	2-161	1	2-207	18
2-101 Blank	0	2-162	19	2-208	26
2-102 – 2-103	19	2-163	12	2-209	24
2-104	13	2-164	20	2-210 Blank	21
2-105	24	2-165	15	2-211	24
2-106 – 2-107	19	2-166	6	2-212	8
2-108	24	2-167	0	2-213 – 2-215	5
2-109	11	2-168	15	2-216	1
2-110 – 2-111	0	2-168.1 Blank Deleted	15	2-217 Blank	0
2-112 – 2-113	19	2-168.2 Deleted	15	2-218 – 2-219	0
2-114	26	2-168.3 Blank	15	2-220	13
2-114.1	24	2-168.4	15	2-221 Blank	0
2-114.2 Blank	5	2-168.5	13		

LIST OF EFFECTIVE PAGES (continued)

PAGE NO.	CHANGE NO.
2-222 – 2-226.2	26
2-226.3 Added	26
2-226.4 Blank Added	26
2-227	26
2-228	0
2-229	15
2-230	24
2-231 – 2-232	0
2-233	24
2-234	1
2-235	25
2-236	22
2-237 – 2-238	24
2-239 Blank	0
2-240	0
2-241	1
2-242 – 2-244	0
2-245	24
2-246 – 2-246.1	25
2-246.2	24
2-247 Blank	24
2-248	24
2-249 – 2-254	23
2-254.1 – 2-254.2	25
2-255 – 2-257	25
2-258	5
2-258.1	22
2-258.2	5
2-259	22
2-260 – 2-260.1	25
2-260.2 Blank	12
2-261	24
2-262	4
2-263	13
2-264	16
2-265	4
2-266 – 2-267	24
2-268	15
2-268.1	24
2-268.2	16
2-269	16
2-270 – 2-273	24
2-274	20
2-274.1	24
2-274.2	20
2-275 Blank	20
2-276 – 2-277	24
2-278	0
2-279	22
2-280	0
2-281	17
2-282 – 2-283	16
2-284	23
2-285	5
2-286	11
2-287 Blank	0
2-288	7
2-289	15
2-290	21
2-291 – 2-292.2	24
2-292.3 – 2-292.4	21
2-293	5
2-294 – 2-295	8
2-296	21
2-297	8
2-298 – 2-298.4	21
2-299 Blank	0
2-300 – 2-301	14
2-302	16
2-303	26
2-304	16
2-305	5
2-306 – 2-307	8
2-308 – 2-309	21
2-310 Blank	21
2-311	21
2-312 – 2-312.1	7
2-312.2	21
2-312.3	16
2-312.4 – 2-312.5	21
2-312.6	26
2-312.7	21
2-312.8	26
2-313 – 2-314	16
2-314.1 Blank	16
2-314.2	16
2-315	0
2-316	26
2-317 – 2-319	0
2-320	26
2-321	0
2-322	8
2-323	26
2-324	24
2-325 – 2-326	10
2-327 – 2-328	0
2-329	10
2-330	16
2-331 – 2-332	10
2-333	24
2-334	10
2-335	18
2-336 – 2-338	19
2-339 – 2-340	11
2-341	2
2-342 – 2-343	8
2-344	24
2-345 Blank	0
2-346	0
2-347	2
2-348 – 2-350	24
2-351 Blank	0
2-352 – 2-354	20
2-355 – 2-357	26
2-358 – 2-359	0
2-360 – 2-362	26
2-363 Blank	0
2-364	0
2-365	14
2-366	0
2-367 – 2-368	16
2-369 Blank	0
2-370	0
2-371	20
2-372 – 2-374	16
2-374.1 Blank	16
2-374.2	25
2-375	19
2-376	25
2-376.1	26
2-376.2 Blank	16
2-377 – 2-379	26
2-380	5
2-381 – 2-386	25
2-387 Blank	0
2-388 – 2-388.1	16
2-388.2 Blank	16
2-389	16
2-390	9
2-391	20

LIST OF EFFECTIVE PAGES (continued)

PAGE NO.	CHANGE NO.	PAGE NO.	CHANGE NO.	PAGE NO.	CHANGE NO.
2-392 – 2-394	17	2-441	18	2-474 – 2-476	0
2-395	11	2-442	23	2-477	4
2-396 – 2-400	0	2-443	24	2-478 – 2-483	0
2-401	11	2-444	23	2-484	10
2-402	20	2-444.1	25	2-485	4
2-403 Blank	0	2-444.2	24	2-486 – 2-486.1	19
2-404	5	2-445 – 2-446	24	2-486.2	22
2-405	0	2-447	10	2-486.3 – 2-486.4	19
2-406 – 2-407	16	2-448	0	2-487 – 2-490.2	19
2-408	0	2-449 – 2-450.1	19	2-491	19
2-409	2	2-450.2 Blank	19	2-492 – 2-493	0
2-410 – 2-412	0	2-451	19	2-494 – 2-495	21
2-413	2	2-452	0	2-496	1
2-414	26	2-453	11	2-497	0
2-415 – 2-417	24	2-454	0	2-498	10
2-418	2	2-455	11	2-499	4
2-419	26	2-456 – 2-456.2	16	2-500	19
2-420 Blank	2	2-456.3	17	2-501	22
2-421 Blank	0	2-456.4 Blank	16	2-502 – 2-502.2	19
2-422 – 2-424	19	2-457	16	2-503 – 2-504.2	19
2-425	23	2-458 – 2-459	0	2-505 – 2-507	19
2-426 – 2-427	19	2-460	12	2-508 – 2-511	0
2-428	26	2-461 – 2-462	15	2-512	10
2-428.1	23	2-462.1 – 2-462.2	23	2-513 Blank Added	26
2-428.2	19	2-463 – 2-466.2	23	2-514 – 2-515 Added	26
2-429 – 2-433	24	2-467	23	2-516 Blank Added	26
2-434	26	2-468 – 2-470	26	3-1 – 3-82	26
2-435 – 2-436	23	2-470.1 Blank Added	26	3-83 – 3-84 Added	26
2-436.1 – 2-436.2	26	2-470.2 Added	26	4-1 – 4-12	26
2-437	0	2-471 – 2-472	26	5-1 – 5-4	26
2-438	2	2-472.1 – 2-472.4 Added	26	5-5 Added	26
2-439 – 2-440	0	2-473 Blank	0	5-6 Blank Added	26

RECORD OF APPLICABLE TIME COMPLIANCE TECHNICAL ORDERS

T.O. Number	Date	Title	Chg./Rev. Supp. Date
2J-F100(II)-603	28-FEB-92	RETROFIT OF COMBUSTION CHAMBER NO. 2 ID. LINER SEGMENTS TO IMPROVE COMBUSTION EXIT TEMPERATURE PROFILE, F100-PW-229 ENGINES, F-15 AND F-16 AIRCRAFT (EC 90QA280)	15-JAN-92
2J-F100(III)-538	15-FEB-92	REMOVE AND REPLACE SECOND STAGE TURBINE DUCT SUPPORT AND SEGMENT, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 90QA218)	15-JAN-92
2J-F100229(I)-513	15-FEB-95	INCORPORATION OF INLET FAN MODULE BASELINE IDENTIFICATION FOR THE FALCON 229 PROGRAM, FEATURING INCORPORATION OF SELECTED INLET FAN MODULE CHANGES, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 94QA063R1)	15-APR-95
2J-F100229(I)-514	30-NOV-95	REPLACEMENT OF COMPRESSOR INLET VARIABLE VANE (CIVV) ACTUATOR ROD CLEVISES PN 4075565 AND PN 4075566, F100-PW-229 ENGINES, F-16 AIRCRAFT (EC 95QA027)	15-JAN-96
2J-F100229(I)-515	15-OCT-96	RETROFIT OF PN 4081566 FIRST STAGE FAN SHROUD FEATURING A TIGHTER FIT, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 93QA034)	15-OCT-96
2J-F100229(I)-516	30-NOV-96	REPLACEMENT OF PN 4075565 AND PN 4075566 COMPRESSOR INLET VARIABLE VANE (CIVV) ACTUATOR ROD CLEVISES, F100-PW-229 ENGINES, F-15 AIRCRAFT (EC 95QA027)	15-JAN-97
2J-F100229(II)-505	30-AUG-93	INCORPORATION OF 4TH TO 5TH STAGE REAR COMPRESSOR DRUM ROTOR ASSEMBLY FEATURING OIL DRAIN PASSAGES, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 90QA350)	15-JUL-93
2J-F100229(II)-509	15-APR-92	RETROFIT OF 4TH THROUGH 9TH STAGE COMPRESSOR STATOR ASSEMBLY FEATURING PROPORTIONALLY SCHEDULED 5TH STAGE VARIABLE VANES AND NON-VARIABLE 6TH STAGE VANES, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 90QA096)	15-APR-92
2J-F100229(II)-510	30-AUG-93	REOPERATION OF HARDWARE FOR PROPORTIONALLY SCHEDULED 5TH STAGE VARIABLE VANES AND NON-VARIABLE 6TH STAGE VANES, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 90QA096)	15-JUL-93
2J-F100229(II)-514	15-JUN-98	RETROFIT OF PN 4077913 REAR COMPRESSOR EXIT STATOR ASSEMBLY FEATURING PN 4077422 COMPRESSOR DAMPER, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 89QA728)	15-JUL-98
2J-F100229(II)-515	30-JUL-93	RETROFIT OF 9TH STAGE COMPRESSOR STATORS AND DAMPERS WITH IMPROVED WEAR MODE CONTROL FEATURES, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 89QA654)	15-JUL-93
2J-F100229(II)-518	30-AUG-94	RETROFIT OF RCVV ARM PINS FEATURING IMPROVED CORROSION RESISTANCE MATERIAL, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 92QA077C1)	15-OCT-94

RECORD OF APPLICABLE TIME COMPLIANCE TECHNICAL ORDERS (con't.)

T.O. Number	Date	Title	Chg./Rev. Supp. Date
2J-F100229(II)-519	31-DEC-93	RETROFIT OF IMPROVED 4TH AND 5TH STAGE BUSHINGS TO ELIMINATE BACK-OUT, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 92QA105)	15-JAN-94
2J-F100229(II)-523	30-NOV-93	REMOVE AND REPLACE NO. 4 BEARING AIR SEAL ASSEMBLY P/N 4074849 WITH NEW ASSEMBLY FEATURING INCREASED FORWARD SNAP DIAMETER, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 90QA181)	15-OCT-93
2J-F100229(II)-526	01-JAN-95	REIDENTIFICATION OF CORE MODULES INCORPORATING PWA 279 ABRADABLE, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 89QA698)	15-JAN-95
2J-F100229(II)-531	15-FEB-95	INCORPORATION OF CORE MODULE BASELINE IDENTIFICATION FOR THE FALCON 229 PROGRAM, FEATURING INCORPORATION OF SELECTED CORE MODULE CHANGES, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 94QA063)	15-JAN-95
2J-F100229(II)-532	30-NOV-95	REMOVE AND REPLACE NO. 4 BEARING OIL PRESSURE TRANSFER TUBE, B-NUT, AND INSTALL CONICAL SEAL, F100-PW-229 ENGINE, F-15 AND F-16 AIRCRAFT (EC 91QA245)	15-JAN-96
2J-F100229(II)-535	30-APR-95	INSTALLATION OF IMPROVED NO. 3 BEARING HEAT SHIELD PN 4082826, F100-PW-229 ENGINES, F-15 SERIES AIRCRAFT (EC 94QA170R1)	15-APR-95
2J-F100229(II)-536	30-JUL-95	INSTALLATION OF NO.3 BEARING REAR SEAL ASSY PN 4068215 INCORPORATING NO.3 BEARING SUPPORT PN 4068182 OR 4080875-01, NO.3 BEARING SUPPORT PN 4080874 AND INSTALLATION OF NO.3 BEARING AIR SEAL PN 4080811, F100-PW-229 ENGINES, F-16 AIRCRAFT (EC 91QA186)	15-JUL-95
2J-F100229(II)-538	15-MAR-96	RETROFIT OF NO. 2/3 BEARING CROSSOVER HOUSING AFT FLANGE BOLTS PN ST5001-12 FEATURING INCREASED STRENGTH AND TORQUE, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 92QA295C1)	15-APR-96
2J-F100229(II)-547	30-MAY-97	REOPERATION OF DIFFUSER CASE ASSEMBLY FORWARD AND AFT RAILS TO PERMIT USE OF THE CASE FOR A SECOND 4300 TAC INTERVAL, F100-PW-229, F-15/F-16 AIRCRAFT (EC 95QA337)	15-JUL-97
2J-F100229(II)-548	30-MAY-97	REOPERATION OF DIFFUSER CASE ASSEMBLY OD REAR FLANGE TO INCORPORATE A NEW SHORT SKIRT CONFIGURATION, F100-PW-229, F-15/F-16 AIRCRAFT (EC 96QA053)	15-JUL-97
2J-F100229(II)-549	30-JUN-97	REOPERATION OF PN 4070004-01 AND PN 4080430-01 FIRST STAGE TURBINE AIR SEALING RING TO INCORPORATE LARGER DIAMETER FASTENERS, F100-PW-229, F-15/F-16 AIRCRAFT (EC 96QA053)	15-JUL-97
2J-F100229(II)-550	15-MAY-98	FINAL ASSEMBLY OF CORE MODULE FEATURING '97 ENHANCEMENT PACKAGE, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 96QA053)	15-JUL-98

RECORD OF APPLICABLE TIME COMPLIANCE TECHNICAL ORDERS (con't.)

T.O. Number	Date	Title	Chg./Rev. Supp. Date
2J-F100229(II)-551	31-OCT-97	REOPERATION OF PN 4077398, 4078357 AND 4080080 FIRST STAGE TURBINE STATOR SUPPORT (TOBI) ASSEMBLIES FOR INCREASED AIRFLOW AND NEW LARGER DIAMETER FASTENERS, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 96QA053)	15-JAN-98
2J-F100229(II)-552	31-OCT-97	REOPERATION OF COMBUSTION CHAMBER ASSEMBLY TO INCORPORATE INNER AND OUTER BRUSH SEALS, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 96QA053)	15-JAN-98
2J-F100229(II)-555	15-JUN-98	SHOTPEEN OF INTERMEDIATE CASE TOP STRUT TO ASSURE TWO INTERVAL SERVICE LIFE, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 96QA139)	15-JUL-98
2J-F100229(II)-557	15-NOV-97	RETROFIT OF COKE FREE/CRACK FREE UNSTAGED FUEL NOZZLES, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 96QA110)	15-JAN-98
2J-F100229(II)-558	08-SEP-97	RETROFIT OF SIXTH STAGE COMPRESSOR STATOR VANE LOCK FEATURING 3.5 DEGREE CAMBER INCREASE, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 96QA115)	15-OCT-97
2J-F100229(II)-559	15-OCT-98	RETROFIT OF NEW RIGHT AND LEFT FUEL SUPPLY TUBE ASSEMBLIES AND ATTACHING HARDWARE, F100-PW-229 ENGINES, F-15 AIRCRAFT (EC 96QA179)	15-OCT-98
2J-F100229(II)-560	01-MAY-98	RETROFIT OF NEW RIGHT AND LEFT FUEL SUPPLY TUBE ASSEMBLIES AND ATTACHING HARDWARE, F100-PW-229 ENGINES, F-16 AIRCRAFT (EC 96QA179)	15-JUL-98
2J-F100229(II)-561	15-OCT-98	INSTALLATION OF PN 4086314-01 GEARBOX BAFFLE ASSEMBLY, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 97QA134)	15-JAN-99
2J-F100229(III)-503	15-MAR-98	REWORK OF REAR TURBINE HUB TO EASE ASSEMBLY, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 90QA132)	15-APR-98
2J-F100229(III)-508	01-MAR-94	INSTALL IMPROVED DURABILITY FOURTH BLADE OUTER AIR SEAL, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 91QA300)	15-APR-94
2J-F100229(III)-510	15-JUN-98	MODIFICATION OF PN 4081129 NO. 5 BEARING INNER SUPPORT TO PROVIDE OPTIMIZED NO. 5 BEARING FIT, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 92QA031)	15-JUL-98
2J-F100229(III)-512	01-NOV-94	INSTALLATION OF IMPROVED MAINTAINABILITY NO. 5 BEARING ROLLER GUIDE P/N 4082488 FOR POSITIVE BEARING RETENTION, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 93QA340)	15-OCT-94
2J-F100229(III)-513	01-NOV-94	INSTALLATION OF IMPROVED DURABILITY NO. 5 BEARING DAMPER CHECK VALVE P/N 4082316, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 93QA258)	15-OCT-94

RECORD OF APPLICABLE TIME COMPLIANCE TECHNICAL ORDERS (con't.)

T.O. Number	Date	Title	Chg./Rev. Supp. Date
2J-F100229(III)-516	15-FEB-95	REMOVE AND REPLACE SECOND STAGE TURBINE DUCT SUPPORT AND SEGMENT, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 90QA218)	15-JAN-95
2J-F100229(III)-517	15-FEB-95	INSTALLATION OF IMPROVED DURABILITY 4TH STAGE TURBINE BLADE PN 4082504, DISK PN 4082604, AND AIR SEAL PN 4082297, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 93QA253)	15-JAN-95
2J-F100229(III)-519	15-FEB-95	INCORPORATION OF FAN DRIVE TURBINE BASELINE IDENTIFICATION FOR THE FALCON 229 PROGRAM, FEATURING INCORPORATION OF SELECTED FAN DRIVE TURBINE MODULE CHANGES, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 94QA063R1)	15-JAN-95
2J-F100229(III)-525	15-FEB-97	REWORK OF TURBINE EXHAUST CASE AND FOURTH TURBINE DISK; AND INSTALLATION OF NEW PN 4082239 FOURTH STAGE TURBINE BRUSH SEAL AND SUPPORT ASSEMBLY, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 93QA347)	15-JAN-97
2J-F100229(III)-527	15-JAN-98	INSTALLATION OF IMPROVED MARGIN FAN DRIVE TURBINE FASTENERS, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 95QA087)	15-JAN-98
2J-F100229(III)-528	15-JAN-98	REOPERATION OF PN 4073403, 4080503 AND 4080603 THIRD STAGE TURBINE DISKS, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 95QA087)	15-JAN-98
2J-F100229(III)-529	15-JAN-98	REOPERATION OF PN 4071396 THIRD STAGE TURBINE AIR SEAL, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 95QA087)	15-JAN-98
2J-F100229(III)-530	15-JAN-98	REOPERATION OF PN 4064232 THIRD STAGE TURBINE AIR SEALING RING, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 95QA087)	15-JAN-98
2J-F100229(IV)-502	15-SEP-94	INSTALLATION OF IMPROVED CLEARANCE NOZZLE SYNCHRONIZING SHOULDER BOLT P/N 4081773, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 94QA015)	15-OCT-94
2J-F100229(IV)-503	15-JUN-96	REWORK OF PN 4060885 AUGMENTOR COMBUSTION CHAMBER DUCT SEAL ASSEMBLY (FINGER SEAL), F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT	15-JAN-99
2J-F100229(IV)-505	15-APR-99	INSTALLATION OF PN 4084447 SPACERS ON AUGMENTOR LINER ASSEMBLY, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 98QA190B)	15-APR-99
2J-F100229(IV)-506	28-SEP-98	INSPECTION OF AUGMENTOR MODULES TO INCREASE LIFE LIMIT, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 97NA060)	15-APR-99
2J-F100229(V)-501	01-JAN-95	INCORPORATION OF 30 MICRON OIL FILTER WITH FULL-FLOW BYPASS VALVE, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 90QA168)	15-JAN-95
2J-F100229(V)-504	15-SEP-94	INSTALLATION OF INCREASED LIFE POWER TAKEOFF (PTO) DUPLEX BEARING P/N 4080062-01, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 92QA151D)	15-OCT-94

RECORD OF APPLICABLE TIME COMPLIANCE TECHNICAL ORDERS (con't.)

T.O. Number	Date	Title	Chg./Rev. Supp. Date
2J-F100229(VI)-507	27-FEB-95	REMOVE AND REPLACE FIRST TURBINE DUCT AND SUPPORT SET TO PROVIDE INCREASED COOLING AND HIGHER MARGIN MATERIAL FIRST DUCT SEGMENTS, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 94QA197)	15-APR-95
2J-F100229(VI)-508	15-MAY-95	REOPERATION OF F100-PW-229 HIGH PRESSURE TURBINE CONTAINER PN P4070548 (EC 90QA009)	15-JUL-95
2J-F100229(VI)-510	15-JUN-96	REWORK OF PN 4069902 2ND STAGE TURBINE DISK FOR INCREASED AXIAL FIT, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 88QA582)	15-JUL-96
2J-F100229(VI)-516	15-MAY-98	FINAL ASSEMBLY OF F100-PW-229 HIGH PRESSURE TURBINE ROTOR AND STATOR ASSEMBLY FEATURING '97 ENHANCEMENT PACKAGE, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 96QA053)	15-JUL-98
2J-F100229(VI)-517	15-SEP-97	REOPERATION OF PN 4069901 OR PN 4080301 FIRST STAGE TURBINE DISK TO INCORPORATE LARGER DIAMETER FASTENERS, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 96QA053)	15-OCT-97
2J-F100229(VI)-518	30-JUN-97	REOPERATION OF PN 4069949 AND PN 4080429 FIRST STAGE TURBINE AIR SEAL TO INCORPORATE LARGER DIAMETER FASTENERS, F100-PW-229, F-15/F-16 AIRCRAFT (EC 96QA053)	15-JUL-97
2J-F100229-545	15-SEP-94	REMOVE AND REPLACE VARIOUS EXTERNAL TUBES AND MANIFOLDS WITH NICKEL BASE AND TITANIUM BASE ALLOY IN PLACE OF STAINLESS STEEL MATERIAL, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 92QA097)	15-OCT-94
2J-F100229-548	01-NOV-94	INSTALLATION OF 60 SECOND SECONDARY MODE START BLEED TIMER IN THE MAIN FUEL CONTROL P/N 4070897 (BENDIX P/N 441579), F100-PW-229 ENGINES, F-15 AND F16 SERIES AIRCRAFT (EC 90QA288)	15-APR-95
2J-F100229-549	01-JAN-95	INSTALLATION OF IMPROVED MAINTAINABILITY NO. 5 BEARING COMPARTMENT OUTER INTERNAL PRESSURE TUBE P/N 4081736 AND INTERNAL SCAVENGE TUBE ASSEMBLY P/N 4082679 FEATURING HEATSHIELDS, F100-PW-229 ENGINES, F15/16 AIRCRAFT (EC 94QA042)	15-JAN-95
2J-F100229-550	01-NOV-94	INSTALLATION OF INCREASED LENGTH FAN TIEBOLT ASSEMBLY P/N 4081427 FOR IMPROVED AXIAL RESTRAINT, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 92QA371)	15-JAN-94
2J-F100229-551	01-NOV-94	INSTALLATION OF INCREASED CLEARANCE CIVV TUBE P/N 4081545-01 TO MAXIMUM CLEARANCE WITH THE RCVV FEEDBACK CABLE, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 93QA175)	15-OCT-94
2J-F100229-552	01-NOV-94	INSTALLATION OF NEW LOOP CLAMP BRACKET ASSEMBLY P/N 4082284-01 AND ATTACHING HARDWARE AT THE FTIT HARNESS AND NO. 5 OIL SUPPLY TUBE ASSEMBLY, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 93QA205)	15-OCT-94

RECORD OF APPLICABLE TIME COMPLIANCE TECHNICAL ORDERS (con't.)

T.O. Number	Date	Title	Chg./Rev. Supp. Date
2J-F100229-562	30-SEP-95	RETROFIT OF GENERATOR CABLE CONNECTOR CLAMP PN 4082678-01 AND ATTACHING HARDWARE, F100-PW-229 ENGINE, F-15 AND F-16 SERIES AIRCRAFT (EC 94QA072)	15-OCT-95
2J-F100229-565	01-MAR-96	RETROFIT OF GEARBOX OIL SUPPLY TUBES AND MANIFOLDS FOR IMPROVED GEARBOX OIL FLOW, F100-PW-229 ENGINES, F-16 AIRCRAFT (EC 94QA075)	15-APR-96
2J-F100229-571	06-DEC-96	IMPROVED MAINTAINABILITY OF NO. 5 BEARING COMPARTMENT TO PREVENT POST SHUTDOWN OIL LEAKS, F100-PW-229 ENGINE, F-15/-16 AIRCRAFT (EC 95QA066)	15-JAN-97
2J-F100229-576	06-DEC-96	INSTALLATION OF PN 4084415-01, BRACKET ASSEMBLY, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 96QA080)	15-JAN-97
5E1-2-15-507	15-JUN-96	UPGRADE OF ENGINE DIAGNOSTIC UNIT (EDU) TO 3.1.0 LOGIC, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 95QA001C1)	15-JUL-96
5E1-2-15-509	12-SEP-97	UPGRADE OF ENGINE DIAGNOSTIC UNIT (EDU) TO 3.2.0 LOGIC, F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT (EC 96QA392C1)	15-OCT-97
6J3-4-117-506	15-MAR-92	REMOVAL OF 796521H02D02 TO PROVIDE REVISED DEEC DIODE BONDING REQUIREMENTS, F100-PW-229 ENGINES, F-15 AND F-16 SERIES AIRCRAFT (EC 91QA223)	15-APR-92
6J3-4-117-517	15-JUN-96	UPGRADE OF DIGITAL ELECTRONIC ENGINE CONTROL (DEEC) TO 2.7.0 LOGIC, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 94QA256R2)	15-JUL-96
6J3-4-117-520	12-SEP-97	UPGRADE OF DIGITAL ELECTRONIC ENGINE CONTROL (DEEC) TO 2.8.0 LOGIC, F100-PW-229 ENGINE, F-15/F-16 AIRCRAFT (EC 96QA183)	15-OCT-97
6J3-8-21-504	15-JAN-98	ENHANCED TEMPERATURE CAPABILITY FOR PN 441612 CONVERGENT EXHAUST NOZZLE CONTROL (CENC), F100-PW-229 ENGINES, F-15/F-16 AIRCRAFT	15-JAN-99

TABLE OF CONTENTS AND LIST OF ILLUSTRATIONS

TABLE OF CONTENTS AND LIST OF ILLUSTRATIONS (continued)

TABLE OF CONTENTS AND LIST OF ILLUSTRATIONS (continued)

TABLE OF CONTENTS AND LIST OF ILLUSTRATIONS (continued)

TABLE OF CONTENTS AND LIST OF ILLUSTRATIONS (continued)

TABLE OF CONTENTS AND LIST OF ILLUSTRATIONS (continued)

TABLE OF CONTENTS AND LIST OF ILLUSTRATIONS (continued)

TABLE OF CONTENTS AND LIST OF ILLUSTRATIONS (continued)

SECTION I
INTRODUCTION

1. PURPOSE. This manual lists and describes the parts for the model F100–PW-229 engine manufactured by United Technologies Corporation, Pratt & Whitney, Government Engines & Space Propulsion, P.O. Box 109600, West Palm Beach, Florida 33410–9600, U.S.A. The illustrations in this manual are intended primarily to facilitate identification of parts. This manual is intended as a supplement to, not a substitute for, the associated maintenance manuals which shall be considered the final authority on assembly and repair procedures.

2. CHANGE REQUESTS. Recommendations for specific changes to this technical order (T.O.) shall be submitted on an AFTO Form 22 in accordance with the Technical Order Improvement Reporting System outlined in T.O. 00-5-1. Since management of this T.O. has not been transferred to the prime ALC, Block 2 of the AFTO Form 22 shall be addressed to: ASC/LPPH(TO) TOMA, Wright-Patterson AFB, OH 45433-6503.

3. TABLE OF CONTENTS AND LIST OF ILLUSTRATIONS. The Table of Contents and List of Illustrations at the front of the manual outlines the five sections and lists the illustration titles contained herein.

4. MAINTENANCE PARTS LIST. The Maintenance Parts List (Section II) consists of the complete engine divided into main groups as shown in the Table of Contents. Each assembly listed has its component parts indented thereunder, to show their relationship to the assembly.

5. UNITS PER ASSEMBLY. The quantities listed in the Units per Assy column of the Maintenance Parts List are, in the case of assemblies, the total quantity used per engine at the location indicated, while the component parts indented under the assemblies are quantity used per assembly. The quantities specified, therefore, are not necessarily the total used per engine.

6. PART NUMBERS. Part Numbers are used exclusively to identify parts.

7. INDEX NUMBERS. The index numbers appearing on the illustrations are sequentially listed within figures in the Maintenance Parts List and are used to assist in locating a part in the Maintenance Parts List after it has been found on an illustration.

8. NUMERICAL INDEX. The Numerical Index (Section III) and all other lists and tables containing alpha/numeric values are compiled in accordance with the computer collating sequence called ASCII (American Standard Code for Information Interchange). The following describes the ASCII collating sequence:

a Part number sequencing starts in the left-hand column and continues from left to right, one column at a time, until part number numerical arrangement is determined.

b. The order of precedence in part number arrangement is as follows:

Space (blank column)

Dash (–)

Slash (/)

Numbers zero through 9

Letters A through Z

Examples:

1	A 1253
14-27599	A-28300
157545	AAF356-524
29-623	AN360-6
370-960	MS9906
370/821	NAS1390
77818	ST1381-05

9. ALPHABETICAL INDEX. The Alphabetical Index (Section IV) is a list of engine parts by their noun names with reference to their location in the manual.

10. TIME REPLACEMENT SCHEDULE. The Time Replacement Schedule (Section V) is a list of time tracked engine components by their noun names defining their maximum operating limits. Also included are their Configuration Item Identification (CII), Work Unit Code (WUC), and part numbers.

11. ATTACHING PARTS. Attaching parts are listed immediately beneath the item to be attached and preceding any detail parts of the item. They are listed at the same indentation as the part they attach and are identified as (AP).

12. SUPERSEDED AND REPLACES PARTS. Supersedes indicates that the old and the new parts are interchangeable. Replaces indicates that the old and the new parts are not interchangeable. The disposition of parts subject to the terms Supersedes and Replaces as identified in this manual shall further be governed by any applicable specific instructions, such as Time Compliance Technical Orders.

13. DIMENSIONS. All dimensions shown herein are nominal. They are inserted to facilitate identification for ordering and are not to be construed as restrictive in inspection.

14. VENDOR PART NUMBERS. Various items of equipment such as fuel pumps, fuel controls, pressurizing and shutoff valves, etc., are listed under the vendor's part number with the Pratt & Whitney part number following the description in the Maintenance Parts List (Section II).

15. PARTIAL BREAKDOWN FOLLOWS. The words PARTIAL BREAKDOWN FOLLOWS shall precede the breakdown listing to indicate these are not complete listings of all the detail parts of an assembly.

16. REPLACEMENT STUDS. Where oversize studs (e.g. 0.004 inch oversize) are listed in the Maintenance Parts List (Section II), they are used as the first replacement of the standard size studs originally installed in the engine.

17. DIRECTIONAL REFERENCES. Right and left, clockwise and counterclockwise, upper and lower, and similar directional references apply to the engine as viewed from the rear (exhaust duct) with the engine in a horizontal position and with the accessory section at the bottom of the engine.

18. REFERENCE HANDBOOKS. Intermediate maintenance instructions are covered by T.O. 2J-F100–56–1 through T.O. 2J-F100–56–11. Support equipment is covered by T.O. 2J-F100–94.

19. SOURCE, MAINTENANCE, AND RECOVERABILITY (SMR) CODES. This manual contains Joint Military Services Uniform SMR codes only. Definitions of these SMR codes are set forth in T.O. 00–25–195.

20. ABBREVIATIONS. The abbreviations used throughout this manual are in accordance with MIL-STD-12. The following is a list of abbreviations used that do not appear in MIL-STD-12:

Abbreviation	Full Name
(AP)	Attaching Parts
CAGE	Commercial and Government Entity
CENC	Convergent Exhaust Nozzle Control
CII	Configuration Item Identification
CIVV	Compressor Inlet Variable Vane
DEEC	Digital Electronic Engine Control
EDU	Electronic Diagnostic Unit
FTIT	Fan Turbine Inlet Temperature
HPC	High Pressure Compressor
LOD	Light Off Detector
MOH	Maximum Operating Hours
N1	Fan Rotor Speed
NM	Nominal
P&WA	Pratt & Whitney
PB	Burner Pressure
PFAP	Augmentor Permission Signal Pressure
PFMO	Secondary Mode Transfer Signal Pressure
PF1	Main Fuel Pump Interstage Pressure
PF1AW	Augmentor Pump Discharge Wash Pressure
PF3AR	Augmentor Fuel Pump Reference Pressure
PLA	Power Lever Angle
PS2	Engine Inlet Static Pressure
PT6	Total Pressure at Turbine Discharge
RCVV	Rear Compressor Variable Vane
REOP AND REID	Reoperation and Reidentification
SPE	Special
TAC	Total Accumulated Cycles
TT2	Total Temperature at Fan Inlet
UNJ	Unified National (j thread)
UNJC	Unified National Coarse (J thread)
UNJEF	Unified National Extra Fine (J thread)
UNJF	Unified National Fine (J thread)
UNJS	Unified National Special (J thread)
UOC	Usable On Code
UPA	Units Per Assembly
WUC	Work Unit Code

21. SYMBOLS. The symbols used throughout this manual and their explanations are as follows:

OP - This symbol preceding a part number in the Numerical Index indicates that the part number is a detail or the vendor part number of an optional part from the Option Table. Reference paragraph number 24. The figure and index number referenced in the Numerical Index is the location of the optional part.

PW - This symbol preceding a part number in the Numerical Index identifies the Pratt & Whitney part number for a vendor furnished part.

S - A part number in the Numerical Index preceded by an S indicates that the part number at the location so identified has been superseded or replaced. Whether the part has been superseded or replaced will be clarified by reference to the Maintenance Parts List.

* - An asterisk (*) following a part number indicates these parts, such as markings, decalcomanias, metalcals, and vinyl film markings, must be requisitioned in accordance with the requirements of AFR 6-1.

% - Indicates a classified part or a part available in oversize and/or undersize.

< - Certain parts which are not illustrated and cannot be assigned the letter F are identified by the symbol < preceding the part number.

R - An R in the margin of a Maintenance Parts List page indicates a change to the adjacent line. The R symbol will identify only those items changed since the prior issue (Revision or Change) and will be deleted when the page is subsequently revised or changed.

F - The letter F means follows. The letter F preceding a figure and index number in the Numerical Index is used to identify an assembly or part that has not been assigned an index number. The figure and index number of the preceding illustrated part or assembly in the Maintenance Parts List is assigned to facilitate locating those parts in the Maintenance Parts List.

- A number sign (#) following a part number identifies a Government Furnished Equipment (GFE)/Contractor Furnished Equipment (CFE) item that has its detail parts listed in a separate manual. Refer to paragraph number 23 (List of Accessories) for the publication number.

= - An equal sign (=) preceding a part number indicates alternate items installed during manufacturing or modification.

& - An ampersand (&) following a CII in the Time Replacement Schedule (Section 5) denotes that the source of the part number is the combination of the data from the part number block plus a dash and the data from the parts list issue block.

+ - A plus sign (+) preceding a part number indicates that part substitution is permissible from the following table.

ST2439 or ST1540	
REF DASH NO.	SUBSTITUTION DASH NO.
06	04, 05, 07, 08
07	05, 06, 08, 09
08	06, 07, 09, 10
10	08, 09, 11, 12

21A. TUBE, MANIFOLD AND ELECTRICAL CABLE COLORIZATION.

NOTE: COLOR CHARTS APPLICABLE TO ELECTRONIC TECHNICAL MANUALS ONLY.

a. Color coding for tubes and manifolds is based upon function. See below:

FUNCTION	COLOR
AIR	
FUEL	
OIL	
DRAIN	

94197 (12X1)

b. In addition, all drain tubes and manifolds are identified by a letter enclosed in a triangle. The letter designates whether the drain tube is fuel or oil. See below:

FUNCTION	DRAIN SYMBOL
FUEL	F
OIL	O

94198 (12X1)

c. Color coding for electrical cables is identified as follows:

FUNCTION	CABLE COLOR
TEMPERATURE CABLE	
ACCESSORY CABLE	
IGNITION CABLE	
GAS GENERATOR CONTROL CABLE	
AUGMENTOR CONTROL CABLE	
ACTUATOR CABLE	
EDU GROUND INTERFACE CABLE	
POWER AND SPEED CABLE	
EXCITER CABLES • EXCITER TO AUGMENTOR IGNITER (LEFT) • EXCITER TO AUGMENTOR IGNITER (RIGHT) • EXCITER TO MAIN IGNITER (LEFT) • EXCITER TO MAIN IGNITER (RIGHT)	
DATA BUS CABLE	

98119 (36X2)

22. CAGE CROSS REFERENCES. Cross references to the manufacturer's code used throughout this manual are in accordance with DoD Cataloging Handbook H-4/H-8, Commercial and Government Entity (CAGE) Codes.

00624	Aeroquip Corp. Aerospace Group 300 S. East Ave. Jackson, MI 49203-1972
01556	Emhart Fastening Systems Group Heli-Coil Div. 510 River Rd. Shelton, CT 06484
01673	Airdrome Parts Co. 3251 Airport Way P.O. Box 1867 Long Beach, CA 90801
01943	Moeller Mfg. Co. Inc. Pickett St. P.O. Box 1736 Greenville, MS 38702-1318
02697	Parker-Hannifin Corp. Seal Group 2360 Palumbo Dr. P.O. Box 11751 Lexington, KY 40512-1751
04319	Advanced Products Co. 33 Defco Park Rd. North Haven, CT 06473-1129
05228	PTI Technologies Inc. Sub. of ESCO Electronics Corp. 950 Rancho Conejo Blvd P.O. Box 2000 Newbury Park, CA 91320-1715
05693	Cherry/Textron Inc. Cherry Commercial Fasteners Products 1224 E. Warner St. P.O. Box 2157 Santa Ana, CA 92705-2157
05906	Society of British Aerospace Co. Ltd. Replaced by U1653
05939	Furon Co. Engineered Seals/Components 3340 E. La Palma Ave. Anaheim, CA 92806
06092	Barnes Group Inc. Associated Spring Div. 1825 E. 1st St. Dayton, OH 45403-1129
06383	Panduit Corp. 17301 Ridgeland Tinley Park, IL 60477-3048
06848	AlliedSignal Inc. Aerospace Equipment Systems 717 N. Bendix Dr. South Bend, IN 46620-1000
06950	Fairchild Industries Inc. Fairchild Aerospace Fastener Div. 13001 E. Temple Ave. LaPuente, CA 91746-1417
06GU9	Hercules Hydraulics 2650 Enterprise Dr. Clearwater, FL 34623
08992	AGM Container Controls Inc. 3526 E. Ft. Lowell Rd. P.O. Box 40020 Tucson, AZ 85717
09455	RBC Transport Dynamics Corp. 3131 Segerstrom Ave. P.O. Box 1953 Santa Ana, CA 92702-1953
09523	Parker-Hannifin Corp. Aerospace Group 101 Parker Dr. P.O. Box 610 Andover, OH 44003-0610
0AFL4	Champion Spark Plug Co. Aviation Products Div. 1230 Old Norris Rd. P.O. Box 686 Liberty, SC 29657-0686
0BND2	Ancra East 248 Branford Rd. P.O. Box 506 North Branford, CT 06471
0C7D5	BFM Transport Dynamics Corp. Replaced by 09455
0EMN7	Whittaker Controls Inc. Replaced by 79318
0HDW7	Huck International Mfg. Co. Aerospace Fastener Div. 3724 E. Columbia St. Tucson, AZ 85714
0ZZV1	Air Industries Inc. 1325 Whitlock Ln. No. 105 Carrollton, TX 75006
10825	Serck Aviation North American Office Replaced by U1841
12989	Textron Filtration Systems Inc. Replaced by 05228

15284 Pressure Science Inc.
11642 Old Baltimore Pike
Beltsville, MD 20705-1210

15653 Kaynar Technologies Inc.
Kaynar Div.
800 S. State College Blvd.
Fullerton, CA 92634-3001

15860 New Hampshire Ball Bearings Inc.
Astro Div.
155 Lexington Ave.
Laconia, NH 03246-2937

18350 Pall Aeropower Corp.
Sub. of Pall Corp.
6301 49th St. N.
Pinellas Park, FL 34665-5798

1P767 The Bendix Corp.
Guidance Systems Div.
Replaced by 55973

1X498 Argo-Tech Corp.
Aircraft Pump and Ordance Groups
Replaced by 59875

23540 Niagara Plastics
7090 Edinboro Rd.
Erie, PA 16509-4447

24984 Hydraflow
13259 E. 166th St.
Cerritos, CA 90703-2269

25795 W.W. Grainger Inc.
333 Knightsbridge Pky K206
Lincolnshire, IL 60069

27238 Bristol Industries
630 E. Lambert Rd.
P.O. Box 630
Brea, CA 92621-4119

29372 Fairchild Industries Inc.
Fairchild Aerospace Fastener Div.
3000 W. Lomita Blvd.
Torrance, CA 90505-5103

29666 Huck Mfg. Co.
Sub. of Federal-Mogul Corp.
Irvine, CA 92619

2F919 Aircraft Porous Media Inc.
Replaced by 18350

2K288 Avibank Mfg. Inc.
Replaced by 84256

2M195 Society of Automotive Engineers
SAE Dept. 195
Replaced by 81343

30728 Val Industries Inc.
Indianapolis, IN 46200

33447 Seco Seals Co.
1366 Logan Ave.
Bldg. I
P.O. Box 1461
Costa Mesa, CA 92626-4007

34662 Robroy Industries Inc.
Robroy Plastics Div.
Morrisville, PA 19067

36069 FAG Bearings Ltd.
801 Ontario St.
P.O. Box 640
Stratford ON N5A 6T2
CANADA

36536 Simmonds Precision Products Inc.
Instruments System Div.
Replaced by 89305

38443 MRC Bearings
402 Chandler St.
P.O. Box 280
Jamestown, NY 14701

39428 McMaster-Carr Supply Co.
600 County Line Rd.
Elmhurst, IL 60126

3A420 Ramsey Corp.
Ring Div.
Replaced by 80756

3H541 Textron Inc.
Fafnir Bearing Div.
Replaced by 5F326

3L184 United Technologies Corp.
Hamilton Standard Div.
155 Schoephoester Rd.
Windsor Locks, CT 06096

3P758 ESNA Div.
Amerace Corp.
Replaced by 72962

45722 USM Corp.
Sub. of Emhart Industries Inc.
Campbellsville, KY 42718

49367 Amphenol Corp.
Amphenol Aerospace
40-60 Delaware Ave.
Sidney, NY 13838-1395

4U931 Aeroflex Intl. Inc.
Cable and Shock Div.
35 S. Service Rd.
Plainview, NY 11803

50632 Kamatics Corp.
Sub. of Kaman Corp.
1330 Blue Hills Ave.
P.O. Box 3
Bloomfield, CT 06002-1304

52661 United Technologies Corp.
Pratt & Whitney
Large Military Engines
Beeline Hwy
P.O. Box 109600
West Palm Beach, FL 33410-9600

55231 DuPont Tribon Composities Inc.
5581 W. 164th St.
Brookpark, OH 44142-1581

55972 Allied-Signal Inc.
DBA Allied-Signal Aerospace Co.
43 Williams Ave.
Teterboro, NJ 07608

55973 Allied-Signal Inc.
DBA Allied-Signal Aerospace Co.
43 Williams Ave.
Teterboro, NJ 07608

56501 Thomas & Betts Corp.
1555 Lynnfield Rd.
Memphis, TN 38119

56878 SPS Technologies Inc.
Aerospace and Industrial Products
Highland Ave.
Jenkintown, PA 19046-2299

58880 Meggit Avonics Inc.
10 Ammon Dr.
Manchester, NH 03103-7406

59088 Corru-Seals Inc.
24 Capital Dr.
Wallingford, CT 06492-2318

59501 Unison Industries Inc.
7575 Baymeadows Way
Jacksonville, FL 32256-8514

59875 Argo-Tech Corp.
Aircraft Accessories Div.
23555 Euclid Ave.
Cleveland, OH 44117-1703

59885 Rosemount Aerospace Inc.
14300 Judicial Rd.
Brunsville, MN 55306-4898

5F326 Textron Inc.
Fafnir Bearing Div.
Willard Ave.
Newington, CT 06111

5S190 Hi-Shear Corp.
Replaced by 73197

5Y157 Cherry Textron Inc.
Div. of Cherry Commercial Fasteners
Replaced by 05693

60119 The Monadnock Co.
18301 E. Arenth Ave.
Rowland Heights, CA 91748

60678 Rosemount Aerospace Inc.
1256 Trapp Rd.
St. Paul, MN 55121

65065 Fuel Systems Textron Inc.
Sub. of Textron Inc.
700 N. Centennial St.
Zeeland, MI 49464-1320

6M880 Carr Lane Mfg. Co.
Replaced by 99862

71286 Fairchild Corp.
Camloc Products Div.
3012 W. Lomita Blvd.
Torrance, CA 90505

71826 Clawson and Bals Inc.
Replaced by 99267

71985 Dow-Elco Inc.
1313 W. Olympic Blvd.
P.O. Box 669
Montebello, CA 90640-5010

72962 Harvard Industries Inc.
2502 N. Rocky Point Dr.
Suite 960
Tampa, FL 33607

73030 United Technologies Corp.
Hamilton Standard Div.
1 Hamilton Rd.
Windsor Locks, CT 06096-1010

73197 Hi-Shear Corp.
2600 Skypark Dr.
Torrance, CA 90505

74197 Associated Spring
Raymond Barnes Group Inc.
1705 Indian Wood Cir.
Suite 210
Maumee, OH 43537

75237 Kaynor Technologies Inc.
Microdot Div.
190 W. Crowther Ave.
Placentia, CA 92670

Code	Manufacturer
75535	The Crosby Group Inc. 2801 Dawson Rd. P.O. Box 3128 Tulsa, OK 74101
76005	Lord Corp. Mechanical Products Div. 1635 W. 12th St. P.O. Box 10039 Erie, PA 16514
77820	Amphenol Corp. Amphenol Aerospace 40-60 Delaware St. Sidney, NY 13838-1395
77842	E G and G Sealol Engineered Products Div. 15 Pioneer Ave. Warwick, RI 02888-1509
78118	MPB Corp. Split Ball Bearing Div. 336 Mechanic St. Lebanon, NH 03766-2627
78570	Titeflex Corp. Sub. of Bundy Corp. 603 Hendee St. P.O. Box 90054 Springfield, MA 01139
78943	Parker-Hannifin Corp. United Aircraft Products Div. 200 Railroad St. P.O. Box 37 Forest, OH 45843-0037
79318	Whittaker Corp. Whittaker Controls Div. P.O. Box 3951 12838 Saticoy St. North Hollywood, CA 91605
79326	Transdigm Inc. Wiggins Connectors Div. 5000 Triggs St. Los Angeles, CA 90022
7G949	GTI Corp. Tonawanda, NY 14150
80205	National Aerospace Standards Committee Aerospace Industries 1250 Eye St. N.W. Washington, DC 20005
80539	SPS Technologies Inc. Aerospace and Industrial Products 2701 S. Harbor Blvd. P.O. Box 1259 Santa Ana, CA 92702-1259
80756	Spirlox, Div. of Kaydon Corp. 29 Cassens St. Fenton, MO 63026-2542
81343	Society of Automotive Engineers Inc. SAE Dept. 195 400 Commonwealth Dr. Warrendale, PA 15096-0001
81349	Military Specifications Promulgated by Military Depts./Agencies Under Authority of Defense Standardization Manual 4120 3-M
82458	Mite Corp. Gripco Fastener Div. South Whitley, IN 46787
83259	Parker-Hannifin Corp. O-Seal Div. 7664 Panasonic Way San Ysidro, CA 92173-4206
83311	Unison Industries Inc. 5345 State Hwy 12 P.O. Box 310 Norwich, NY 13815
83324	Fairchild Industries Inc. Rosan/Aerospace Fastener Div. 3130 W. Harvard St. P.O. Box 25225 Santa Ana, CA 92799
83930	Transdigm Inc. Adel Fasteners Div. 5000 Triggs St. Los Angeles, CA 90022
84256	Avibank Mfg. Inc. 210 S. Victory Blvd. P.O. Box 391 Burbank, CA 91503
84971	TA Mfg. Inc. Sub. of Criton Technologies 375 W. Arden Ave. P.O. Box 2500 Glendale, CA 91209-2500
86831	Kaiser Aerospace and Electronics Corp. 17000 S. Red Hill Ave. Irvine, CA 92614
86928	Seastrom Mfg. Co. Inc. 456 Seastrom St. Twin Falls, ID 83301
88044	Aeronautical Standards Group Dept. of Navy and Air Force

89305	Simmonds Precision Products Inc. DBA BFGoodrich Aircraft Integrated 100 Panton Rd. Vergennes, VT 05491-1099
8B707	Aeroquip Corp. Replaced by 00624
8P613	Corru-Seals Inc. Replaced by 59088
8R768	Kaiser Electro Precision Replaced by 86831
92215	Fairchild Industries Inc. Fairchild Aerospace Fastener Div. 3000 W. Lomita Blvd. Torrance, CA 90505-5102
95955	Titeflex Inc. Replaced by 78570
96906	Military Standards Promulgated by Military Depts., Under Authority of Defense Standardization Manual 4120 3-M
97393	Shur-Lok Corp. 2541 White Rd. P.O. Box 19584 Irvine, CA 92713
97484	Vickers Inc. System Monitoring Div. 24 E. Glenolden Ave. Glenolden, PA 19036-2107
97613	Sargent Controls and Aerospace Kahr Bearing Div. 5675 W. Burlingame Rd. P.O. Box 730 Cortaro, AZ 85652-0730
98441	Parker-Hannifin Corp. Stratoflex Div. 220 Roberts Cut-Off Rd. P.O. Box 10398 Ft. Worth, TX 76114-0398
98809	Protex Products Corp. Div. of Clopay Corp. Kearny, NJ 07032
99017	Protective Closures Co. Inc. Caplugs Div. 2150 Elmwood Ave. Buffalo, NY 14207-1910
99267	Bohn Aluminum and Brass Co. Div. of Gulf and Western Mfg. Co. 1607 E. Maumee St. Adrian, MI 49221-3558
99321	Shaw Aero Devices Inc. 12291 Towne Lake Dr. Ft. Myers, FL 33913
99643	Vickers Inc. Fluid Control and Actuation Div. 4690 Colorado Blvd. P.O. Box 39787 Los Angeles, CA 90039-1106
99862	Carr Lane Mfg. Co. 4200 Carr Lane Ct. St. Louis, MO 63119-2129
99877	Bendix Corp. Energy Controls Div. Replaced by 06848
9D669	Bendix Corp. Flight And Engine Instrument Div. Replaced by 55972
9E180	United Technologies Corp. Pratt & Whitney Large Military Engines Replaced by 52661
9G112	Dow-Elco Replaced by 71985
9H901	Screw Corp Div. VSI Corp. Replaced by 06950
K1012	Armstrong Fastenings Ltd. Clough Road Hull North Humberside HU6 7PR UNITED KINGDOM
NONE1	E.I. DuPont Denemour Co. Pencader Plant Newark, DE
NONE4	GTI Corp. Clover Div. Replaced by 7G949
NONE6	Armstrong Fastenings Ltd. Replaced by K1012
U1653	Society of British Aerospace Co. Ltd. 29 King St. London SW1Y 6RD UNITED KINGDOM
U1841	Serck Heat Transfer Warwick Rd. Birmingham B11 2QY United Kingdom

23. LIST OF ACCESSORIES.

Part No.	Nomenclature	Publication No.
18-1937	TRANSMITTER-POSITION, NOZZLE	T.O. 5E12-26-3
327455	VALVE-ANTI-ICING, ENGINE INLET	T.O. 15E2-4-20-3
329205	VALVE-ANTI-ICING, ENGINE INLET	T.O. 15E2-4-20-3
4047890	PUMP ASSY-SCAVENGE, NO. 2 AND 3 BEARING	T.O. 7J4-2-50-3
4057681	VALVE ASSY-BREATHER PRESSURIZING	T.O. 6J15-14-17-3
4066724-700	TANK ASSY-LUBRICATING OIL	T.O. 7J10-18-3
4075220	NOZZLE-FUEL, STAGED	T.O. 6J8-40-3
4075541-01	MANIFOLD-SPRAY, AUGMENTOR, ASSY OF	T.O. 6J28-5-3
4075542-01	MANIFOLD-SPRAY, AUGMENTOR, ASSY OF	T.O. 6J28-5-3
4075726-01	MANIFOLD-SPRAY, AUGMENTOR, ASSY OF	T.O. 6J28-5-3
4076778	NOZZLE-FUEL, UNSTAGED	T.O. 6J8-41-3
4080670-01	MANIFOLD-SPRAY, AUGMENTOR, ASSY OF	T.O. 6J28-5-3
4080672-01	MANIFOLD-SPRAY, AUGMENTOR, ASSY OF	T.O. 6J28-5-3
4081276	NOZZLE-FUEL, UNSTAGED	T.O. 6J8-41-3
4082793-01	MANIFOLD-SPRAY, AUGMENTOR, ASSY OF	T.O. 6J28-5-3
4083223-01	MANIFOLD-SPRAY, AUGMENTOR, ASSY OF	T.O. 6J28-5-3
4083569	NOZZLE-FUEL, UNSTAGED	T.O. 6J8-41-3
4083997	PUMP ASSY-MAIN OIL	T.O. 7J4-2-51-3
420068	CABLE-SPECIAL PURPOSE, ELECTRICAL, BRANCHED, DEEC	T.O. 8E1-6-1-113
420133	CABLE-SPECIAL PURPOSE, BRANCHED, ENGINE ACCESSORIES	T.O. 8E1-6-1-113
420434	CABLE-SPECIAL PURPOSE, ELECTRICAL, BRANCHED, ENGINE ACTUATOR	T.O. 8E1-6-1-113
441293	CYLINDER-ACTUATING, LINEAR, VARIABLE VANE, REAR COMPRESSOR	T.O. 6J27-8-3
441435	CONTROL AND CYLINDER-VARIABLE VANE, COMPRESSOR INLET	T.O. 6J27-7-3
441436	CYLINDER-ACTUATING, LINEAR, VARIABLE VANE, COMPRESSOR INLET	T.O. 6J27-6-3
441441	CONTROLLER-FUEL PUMP, AUGMENTOR	T.O. 6J3-4-99-4
441579	FUEL CONTROL-MAIN	T.O. 6J3-4-118-4
441612	CONTROL-EXHAUST NOZZLE, CONVERGENT	T.O. 6J3-8-21-4
441614	ACTUATOR-BALL SCREW, SECONDARY, CONVERGENT NOZZLE	T.O. 16A1-14-43-3
441615	ACTUATOR-BALL SCREW, PRIMARY, CONVERGENT NOZZLE	T.O. 16A1-14-43-3
441720	CYLINDER-ACTUATING, LINEAR, VARIABLE VANE, REAR COMPRESSOR	T.O. 6J27-8-3
441721	FUEL CONTROL-MAIN	T.O. 6J3-4-118-4
441944	CONTROL-EXHAUST NOZZLE, CONVERGENT	T.O. 6J3-8-21-4
442020	ACTUATOR-BALL SCREW, SECONDARY, CONVERGENT NOZZLE	T.O. 16A1-14-43-3
442021	ACTUATOR-BALL SCREW, PRIMARY, CONVERGENT NOZZLE	T.O. 16A1-14-43-3
44838	STATOR-GENERATOR	T.O. 8E1-11-3-3
45689	CABLE-POWER, ELECTRICAL, EXCITER TO MAIN IGNITER, LH	T.O. 8E1-7-1-133
45731-1341	COOLER ASSY-OIL	T.O. 7J1-94-3
46194	CABLE-SPECIAL PURPOSE, ELECTRICAL, BRANCHED, AUGMENTOR FUEL MANAGEMENT	T.O. 8E1-6-1-113
46195	CABLE-SPECIAL PURPOSE, ELECTRICAL, BRANCHED, GAS GENERATOR	T.O. 8E1-6-1-113
46196	CABLE-SPECIAL PURPOSE, ELECTRICAL, BRANCHED, IGNITION	T.O. 8E1-6-1-113
46197	CABLE-SPECIAL PURPOSE, ELECTRICAL, EDU	T.O. 8E1-6-1-113
46198	CABLE-SPECIAL PURPOSE, ELECTRICAL, BRANCHED, DEEC	T.O. 8E1-6-1-113
46215	CABLE-POWER, ELECTRICAL, EXCITER TO MAIN IGNITER, RH	T.O. 8E1-7-1-133
46216	CABLE-POWER, ELECTRICAL, EXCITER TO AUGMENTOR IGNITER, LH	T.O. 8E1-7-1-133
46300	CABLE-SPECIAL PURPOSE, ELECTRICAL, BRANCHED, ENGINE ELECTRONIC CONTROL SIGNALS	T.O. 8E1-6-1-113
46301	CABLE-SPECIAL PURPOSE, ELECTRICAL, BRANCHED, POWER AND SPEED	T.O. 8E1-6-1-113
46387	CABLE-POWER, ELECTRICAL, EXCITER TO AUGMENTOR IGNITER, RH	T.O. 8E1-7-1-133

Part No.	Nomenclature	Publication No.
46470	EXCITER-IGNITION, DUAL	T.O. 8E1-8-25-4
47418	EXCITER-IGNITION, DUAL	T.O. 8E1-8-25-4
5302	THERMOCOUPLE-IMMERSION, FTIT SENSING	T.O. 8E1-12-2-3
70035	VALVE-FUEL PRESSURIZING AND DUMP	T.O. 6J15-14-16-3
708500	PUMP-GEAR, MAIN FUEL	T.O. 6J10-4-93-4
789940H04D06	DIAGNOSTIC UNIT-ENGINE	T.O. 5E1-2-15-4
789940H05D07	DIAGNOSTIC UNIT-ENGINE	T.O. 5E1-2-15-4
789940H06D08	DIAGNOSTIC UNIT-ENGINE	T.O. 5E1-2-15-4
790100	FUEL CONTROL-AUGMENTOR	T.O. 6J3-2-36-4
792840	PUMP-FUEL, AUGMENTOR	T.O. 6J10-4-80-4
796521H06D05	CONTROL-ENGINE, DIGITAL ELECTRONIC	T.O. 6J3-4-117-14
796521H07D06	CONTROL-ENGINE, DIGITAL ELECTRONIC	T.O. 6J3-4-117-14
796521H08D07	CONTROL-ENGINE, DIGITAL ELECTRONIC	T.0.6J3-4-117-14
AA124S-2	IGNITER-SPARK, GAS TURBINE ENGINE MAIN	T.O. 8E1-3-4-3
AA125S-5	IGNITER-SPARK, GAS TURBINE ENGINE, AUGMENTOR	T.O. 8E1-3-4-3
AD-9348-1657	FILTER-OIL	T.O. 7J2-27-3
AD-9348-1657Y1	FILTER-LUBE OIL	T.O. 7J2-27-3
PWA 56682	RETAINER-FRONT, FAN DRIVE TURBINE MODULE	T.O. 2J-F100-94
PWA 56731	RETAINER-FRONT, CORE ENGINE MODULE	T.O. 2J-F100-94
PWA 56732	RETAINER-REAR, CORE ENGINE MODULE	T.O. 2J-F100-94
UA539800-2	COOLER ASSY-OIL	T.O. 7J1-93-3

24. OPTION TABLE. The following table lists option parts and their detail options with vendor part numbers, manufacturers' codes, abbreviated description and dimensions.

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
2161929	2060110		52661	TAPE	
	2161910		52661	TAPE	
	2161928		52661	TAPE	
379530	368984	53714-440-H19	56878	NUT	0.112-40UNJF-3B X 0.143 IN. THK
	379529	Z3943-40	72952	NUT	0.112-40UNJF-3B X 0.1455 IN. THK
4018381	4012468		52661	SEAL ASSY	
	4012501		52661	SEAL ASSY	
4018382	4014756		52661	SEAL ASSY	
	4014757		52661	SEAL ASSY	
4021812	4004904	72785-1032	56878	NUT	0.190-32UNJF-3B X 0.245 IN. THK
	4005199	E10516-3	72952	NUT	0.190-32UNJF-3B X 0.245 IN. THK
	4054412	H49508-3	15653	NUT	0.190-32UNJF-3B X 0.245 IN. THK
4022709	4010647	58729M-428	56878	NUT	0.250-28UNJF-3B X 0.281 IN. THK
	4010648	E10787-4	72952	NUT	0.250-28UNJF-3B X 0.281 IN. THK
4023115	ST1334-09	VN4718DF02	92215	NUT	0.190-32UNJF-3B X 0.240 IN. THK
	ST2113-09	73916-1032	56878	NUT	0.190-32UNJF-3B X 0.252 IN. THK
	ST2118-09	LH11189-3	56878	NUT	0.190-32UNJF-3B X 0.250 IN. THK
	ST2119-09	H49513-3	15653	NUT	0.190-32UNJF-3B X 0.240 IN. THK
4023116	ST1334-10	VN4718DF048	92215	NUT	0.250-28UNJF-3B X 0.280 IN. THK
	ST2113-10	73916-428	56878	NUT	0.250-28UNJF-3B X 0.285 IN. THK
	ST2118-10	LH11189-4	56878	NUT	0.250-28UNJF-3B X 0.290 IN. THK
	ST2119-10	H49513-4	15653	NUT	0.250-28UNJF-3B X 0.280 IN. THK
4023117	ST1334-11	VN4718DF054	92215	NUT	0.3125-24UNJF-3B X 0.326 IN. THK
	ST2113-11	73916-524	56878	NUT	0.3125-24UNJF-3B X 0.330 IN. THK
	ST2118-11	LH11189-5	56878	NUT	0.3125-24UNJF-3B X 0.335 IN. THK
	ST2119-11	H49513-5	15653	NUT	0.3125-24UNJF-3B X 0.326 IN. THK
4023466	ST2115-10	73182-428	56878	NUT	0.250-28UNJF-3B X 0.411 IN. THK
	ST2116-10	LH10863-4	56878	NUT	0.250-28UNJF-3B X 0.401 IN. THK
	ST2117-10	H29011-4	15653	NUT	0.250-28UNJF-3B X 0.416 IN. THK
4026550	4026547	74252-428	56878	NUT	0.250-28UNJF-3B X 0.305 IN. THK
	4026548	E10516-4	72952	NUT	0.250-28UNJF-3B X 0.305 IN. THK
	4026549	H49478-4	15653	NUT	0.250-28UNJF-3B X 0.295 IN. THK
4030963	4000606		52661	BEARING	
	4057330		52661	BEARING	
	4057425		52661	BEARING	

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4030964	4000609		52661	BEARING	
	4000610		52661	BEARING	
	4056149		52661	BEARING	
	4061870		52661	BEARING	
4032002	4001273		52661	BEARING	
	4001274		52661	BEARING	
	4001275		52661	BEARING	
	4056321		52661	BEARING	
4032003	4001276		52661	BEARING	
	4001277		52661	BEARING	
	4001278		52661	BEARING	
	4044745		52661	BEARING	
4032004	4001282		52661	BEARING	
	4045089		52661	BEARING	
	4056259		52661	BEARING	
4032005	4001285		52661	BEARING	
	4001286		52661	BEARING	
	4056934		52661	BEARING	
4032006	4001294		52661	BEARING	
	4001296		52661	BEARING	
	4058670		52661	BEARING	
	4066036		52661	BEARING	
	4073646		52661	BEARING	
4032007	4001297		52661	BEARING	
	4001299		52661	BEARING	
	4058058		52661	BEARING	
	4065092		52661	BEARING	
4033286	4033283		52661	SEAL ASSY	
	4033284		52661	SEAL ASSY	
4034529	4015853	F10986-4	72952	NUT	0.250-28UNJF-3B X 0.281 IN. THK
	4016835	NS103594-048	56878	NUT	0.250-28UNJF-3B X 0.256 IN. THK
4035597	4018466		52661	BEARING	
	4018467		52661	BEARING	
	4060870		52661	BEARING	
	4061549		52661	BEARING	
	4082584		52661	BEARING	

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4035886	4035882		52661	SEAL ASSY	
	4035883		52661	SEAL ASSY	
4036995	4036993		52661	SEAL ASSY	
	4036994		52661	SEAL ASSY	
4039946	4016562		52661	COUPLING ASSY	
	4039153		52661	COUPLING ASSY	
4039949	4016565		52661	COUPLING ASSY	
	4039156		52661	COUPLING ASSY	
4039976	4001290		52661	BEARING	
	4004200		52661	BEARING	
	4045021		52661	BEARING	
	4061871		52661	BEARING	
4042344	ST2156-10	74483-428	56878	NUT	0.250-28UNJF-3B X 0.411 IN. THK
	ST2173-10	H49500-4	15653	NUT	0.250-28UNJF-3B X 0.381 IN. THK
	ST2183-10	LH11588-4	56878	NUT	0.250-28UNJF-3B X 0.401 IN. THK
4042812	4042813	L10606-5-3	72952	NUT	0.190-32UNJF-3B X 0.082 IN. THK
	4042814	75796	56878	NUT	0.190-32UNJF-3B X 0.082 IN. THK
	4042815	K50023-3	15653	NUT	0.190-32UNJF-3B X 0.082 IN. THK
4045695	4005227		52661	BEARING	
	4011139		52661	BEARING	
	4048593		52661	BEARING	
	4082610		52661	BEARING	
	4083117		52661	BEARING	
4046362	4024591	RMLHTA51-2860-02	72952	NUT	0.190-32UNJF-3B X 0.047 IN. THK
	4024592	NS103714-02	56878	NUT	0.190-32UNJF-3B X 0.036 IN. THK
	4024593	K49587-3	15653	NUT	0.190-32UNJF-3B X 0.051 IN. THK
4046363	4016855	LH10969-3	72952	NUT	0.190-32UNJF-3B X 0.3475 IN. THK
	4018595	73589-1032	56878	NUT	0.190-32UNJF-3B X 0.3475 IN. THK
	4058667	VN4710WD02	92215	NUT	0.190-32UNJF-3B X 0.3475 IN. THK
4046367	4012022	F10883-3	72952	NUT	0.190-32UNJF-3B X 0.215 IN. THK
	4046326	NS103809-002	56878	NUT	0.190-32UNJF-3B X 0.290 IN. THK

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4047343	4009751		52661	SEAL ASSY	
	4040236		52661	SEAL ASSY	
	4040242		52661	SEAL ASSY	
4047344	4009752		52661	SEAL ASSY	
	4040237		52661	SEAL ASSY	
	4040245		52661	SEAL ASSY	
4047849	4010222	73332-1032	56878	NUT	0.190-32UNJF-3B X 0.067 IN. THK
	4010223	L10860-4-3	72952	NUT	0.190-32UNJF-3B X 0.067 IN. THK
	4054411	K50698-3	15653	NUT	0.190-32UNJF-3B X 0.067 IN. THK
	4058666	VN4805DF02	92215	NUT	0.190-32UNJF-3B X 0.067 IN. THK
4048929	4009752		52661	SEAL	1.050 X 1.627 X 0.656 IN. THK
	4040237		52661	SEAL	1.050 X 1.627 X 0.656 IN. THK
	4040245		52661	SEAL	1.050 X 1.627 X 0.656 IN. THK
	611489		52661	SEAL	1.050 X 1.627 X 0.656 IN. THK
4053840	4032933		52661	BEARING	
	4053883		52661	BEARING	
4054021	4020642	C2320-275	15284	COUPLING	2.750 TUBE OD
	4054022	D-2320-275	15284	COUPLING	
4054537	4040649		52661	BEARING	
	4046808		52661	BEARING	
	4056098		52661	BEARING	
	4062009		52661	BEARING	
4057828	4057795	E12912-4	72952	NUT	0.250-28UNJF-3B X 0.290 IN. THK
	4057831	80800-428	56878	NUT	0.250-28UNJF-3B X 0.290 IN. THK
	4057832	51692-4	15653	NUT	0.250-28UNJF-3B X 0.290 IN. THK
4058231	4058229	80923-624	56878	NUT	0.375-24UNJF-3B X 0.2745 IN. THK
	4058230	51744-6	15653	NUT	0.375-24UNJF-3B X 0.2745 IN. THK
4059195	4059193	3567762-3002	9D669	TRANSMITTER	
	4059194	18-1935	1P767	TRANSMITTER	
4059349	4059297		52661	BEARING	
	4059298		52661	BEARING	
	4059299		52661	BEARING	
	4061007		52661	BEARING	

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4061173	4057774		52661	BEARING	
	4059417		52661	BEARING	
4061214	4001280		52661	BEARING	
	4003686		52661	BEARING	
	4057332		52661	BEARING	
4062289	4062287	82158-428	56878	NUT	0.250-28UNJF-3B X 0.400 IN. THK
	4062288	VN1320DF048	92215	NUT	0.250-28UNJF-3B X 0.400 IN. THK
4062489	4062487	82158-1032	56878	NUT	0.190-32UNJF-3B X 0.380 IN. THK
	4062488	VN1320DF02	92215	NUT	0.190-32UNJF-3B X 0.380 IN. THK
4062497	4062338		52661	BEARING	
	4062339		52661	BEARING	
	4065580		52661	BEARING	
4062498	4062531		52661	BEARING	
	4062533		52661	BEARING	
	4065578		52661	BEARING	
4062707	4061112		52661	BEARING	
	4061139		52661	BEARING	
	4061157		52661	BEARING	
	4061159		52661	BEARING	
4062708	4061140		52661	BEARING	
	4069671		52661	BEARING	
4063522	4054599	F12691-5	72952	NUT	0.3125-24UNJF-3B
	4055622	NS202372-5	80539	NUT	0.3125-24UNJF-3B
	4055623	F51308-5	15653	NUT	0.3125-24UNJF-3B
4063876	4063875		52661	BEARING	
	4077345		52661	BEARING	
4064470	4050904	0003-0017	86831	ADAPTER	
	4064468	VC82-2682	99321	ADAPTER	

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4064471	4050905	0003-0018	86831	ADAPTER	
	4064469	VC82-2683	99321	ADAPTER	
4065386	4061088		52661	SEAL	
	4065385		52661	SEAL	
	4065596		52661	SEAL	
4066226	ST2160-10	74735-1032	56878	NUT	0.190-32UNJF-3B X 0.178 IN. THK
	ST2161-10	E11520-3	56878	NUT	0.190-32UNJF-3B X 0.182 IN. THK
	ST2162-09	H29164-3	15653	NUT	0.190-32UNJF-3B X 0.188 IN. THK
4066808	4066832		52661	BEARING	
	4066833		52661	BEARING	
4067896	4067893	R116KC900	38443	BEARING	
	4067894	AAV9116RIW7-MSRA3826	5F326	BEARING	
	4067895	5RNH116-29	78118	BEARING	
	4082552	592794	36069	BEARING	
4069178	4059492		52661	SUPPORT ASSY	
	4060815		52661	SUPPORT ASSY	
4069338	ST2475-11	83890-524	56878	NUT	0.3125-24UNJF-3B X 0.473 IN. THK
	ST2476-11	WLLH11618-5	72962	NUT	0.3125-24UNJF-3B X 0.473 IN. THK
	ST2477-11	VN4738WP054	92215	NUT	0.3125-24UNJF-3B X 0.473 IN. THK
	ST2478-11	H52847-5	15653	NUT	0.3125-24UNJF-3B X 0.473 IN. THK
4069473	4069474		52661	BEARING	
	4069475		52661	BEARING	
4069778	4069775	W9LL9120/6-3	72962	NUT	0.190-32UNJF-3B X 0.090 IN. THK
	4069776	83748-1032	56878	NUT	0.190-32UNJF-3B X 0.090 IN. THK
	4069777	K52852-3	15653	NUT	0.190-32UNJF-3B X 0.090 IN. THK
4070347	ST2447-10	NS202846-4	80539	NUT	0.250-28UNJF-3B X 0.032 IN. THK
	ST2448-10	F52804-4	15653	NUT	0.250-28UNJF-3B X 0.032 IN. THK

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4071146	4071202		52661	BEARING	
	4071259		52661	BEARING	
	4071761		52661	BEARING	
4071383	4071286		52661	BEARING	
	4071287		52661	BEARING	
	4071288		52661	BEARING	
	4077085		52661	BEARING	
	4079535		52661	BEARING	
4071400	4071330		52661	BEARING	
	4071401		52661	BEARING	
4071724	ST2267-09	81382-1032	56878	NUT	0.190-32UNJF-3B X 0.355 IN. THK
	ST2268-09	SMLH10863-3	72952	NUT	0.190-32UNJF-3B X 0.355 IN. THK
	ST2269-09	H51907-3	15653	NUT	0.190-32UNJF-3B X 0.355 IN. THK
4071755	4071756		52661	LINK	
	4071757		52661	LINK	
	4071759		52661	LINK	
4071804	4056270		52661	SEAT	
	4069918		52661	SEAT	
4072100	4069498	100553-498	78570	HOSE ASSY	
	4069499	AE707545-1	8B707	HOSE ASSY	
	4077554	1242014-1	98441	HOSE ASSY	
4072101	4069500	110553-500	78570	HOSE ASSY	
	4069501	AE707546-1	8B707	HOSE ASSY	
	4077555	1242014-2	98441	HOSE ASSY	
4072103	4069504	110553-504	78570	HOSE ASSY	
	4069505	AE707548-1	8B707	HOSE ASSY	
4072104	4069506	110553-506	78570	HOSE ASSY	
	4069507	AE707549-1	8B707	HOSE ASSY	
	4077557	1242002-1	98441	HOSE ASSY	
4072105	4069508	110553-508	78570	HOSE ASSY	
	4069509	AE707550-1	8B707	HOSE ASSY	
	4077558	1242003-1	98441	HOSE ASSY	

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4072107	4069512	110553-512	78570	HOSE ASSY	
	4069513	AE707552-1	8B707	HOSE ASSY	
	4077559	1242014-3	98441	HOSE ASSY	
4072109	4069516	110553-516	78570	HOSE ASSY	
	4069517	AE707554-1	8B707	HOSE ASSY	
	4077560	1242004-1	98441	HOSE ASSY	
4072112	4069522	110553-522	78570	HOSE ASSY	
	4069523	AE707557-1	8B707	HOSE ASSY	
	4077563	1242006-1	98441	HOSE ASSY	
4072113	4069524	110553-524	78570	HOSE ASSY	
	4069525	AE707558-1	8B707	HOSE ASSY	
	4077564	1242014-4	98441	HOSE ASSY	
4072115	4069528	110553-528	78570	HOSE ASSY	
	4069529	AE707560-1	8B707	HOSE ASSY	
4072120	4069540	110553-540	78570	HOSE ASSY	
	4069541	AE707565-1	8B707	HOSE ASSY	
	4077568	1242009-1	98441	HOSE ASSY	
4072297	4065513		52661	BEARING	
	4071318		52661	BEARING	
4072298	4065512		52661	BEARING	
	4071319		52661	BEARING	
4072398	ST2470-09	NS202900-3	56878	NUT	0.190-32UNJF-3B
	ST2471-09	F52938-3	15653	NUT	0.190-32UNJF-3B
	ST2472-09	WSLAF11420-3	72952	NUT	0.190-32UNJF-3B
4072405	ST2456-10	AULA196-4	72952	NUT	
	ST2457-10	NS202796-4	80539	NUT	
	ST2458-10	MK52915-4	15653	NUT	
	ST2459-10	VN4815DF048	92215	NUT	
4072583	4072585	14J02-40A	24984	COUPLING	
	4078399	W991-40DE	79326	COUPLING	
4072623	4067921		52661	BEARING	
	4067922		52661	BEARING	

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4072848	4065916		52661	BUMPER	
	4071405		52661	BUMPER	
4073026	ST2522-09	AULG13123-3	72952	NUT	0.190-32UNJF-3B X 0.2475 IN. THK
	ST2523-09	CN52991-3	15653	NUT	0.190-32UNJF-3B X 0.255 IN. THK
	ST2524-09	NS202913-3	56878	NUT	0.190-32UNJF-3B X 0.255 IN. THK
4073030	4073031	110553-031	78570	HOSE ASSY	
	4073032	AE707560-2	8B707	HOSE ASSY	
	4080280	1242018-1	98441	HOSE ASSY	
4073605	4010482		52661	COVER	
	4073602		52661	COVER	
4073606	4010487	9383	8R768	CAP	
	4073603	87-5000	99321	CAP	
4073607	4010491	9359	8R768	CAP	
	4073604	87-5001	99321	CAP	
4074010	4072837		52661	SEAL	
	4072839		52661	SEAL	
4074224	4062670	ATB5V9HTL	15860	BEARING	
	4062674	03413-05E010	0C7D5	BEARING	
4074428	4074429		52661	BEARING	
	4074430		52661	BEARING	
	4074431		52661	BEARING	
	4077086		52661	BEARING	
	4079536		52661	BEARING	
4074432	4074433		52661	BEARING	
	4074434		52661	BEARING	
	4074435		52661	BEARING	
	4074436		52661	BEARING	
	4074437		52661	BEARING	
4074448	4066810		52661	BEARING	
	4066811		52661	BEARING	
	4066812		52661	BEARING	
	4077084		52661	BEARING	
	4079534		52661	BEARING	

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4074709	4071760		52661	LINK	
	4074710		52661	LINK	
	4074711		52661	LINK	
4075146	ST2267-10	81382-428	56878	NUT	0.250-28UNJF-3B X 0.411 IN. THK
	ST2268-10	SMLH10863-4	72952	NUT	0.250-28UNJF-3B X 0.411 IN. THK
4075314	4075315	AAMMF9131-8	3H541	BEARING	
	4075317	9131UK900	38443	BEARING	
	4078319	590803	36069	BEARING	
4075349	4075346	590318	36069	BEARING	
	4075347	9122UK900	38443	BEARING	
	4075348	AAMMF9122-53MSR-A-1613D	3H541	BEARING	
4075400	4075117	SL7271	97393	NUT	
	4075121	VRB13156-9616LH	72952	NUT	
	4075397	84568-9616	56878	NUT	
4075401	4075118	SL7272	97393	NUT	
	4075122	VRB13159-6216	72952	NUT	
	4075398	84569-6216	56878	NUT	
4075402	4075119	SL7273	97393	NUT	
	4075123	VRB13161-5616	72952	NUT	
	4075399	84570-5616	56878	NUT	
4075433	4075430	69082	04319	GASKET	
	4075431	11156-I	15284	GASKET	
4075458	4075850	110553-544	78570	HOSE ASSY	
	4075851	AE708014-1	8B707	HOSE ASSY	
	4077561	1242005-1	98441	HOSE ASSY	
4075459	4075852	110553-542	78570	HOSE ASSY	
	4075853	AE708004-1	8B707	HOSE ASSY	
	4077565	1242007-1	98441	HOSE ASSY	
4075460	4066860		52661	BEARING	
	4066861		52661	BEARING	

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4075466	ST2539-10	L13244-7-4	72952	NUT	0.250-28UNJF-3B X 0.108 IN. THK
	ST2540-10	K53264-4	15653	NUT	0.250-28UNJF-3B X 0.108 IN. THK
	ST2541-10	84829-428	56878	NUT	0.250-28UNJF-3B X 0.108 IN. THK
	ST2542-10	VN4829WNP04 8	92215	NUT	0.250-28UNJF-3B X 0.108 IN. THK
4075473	4066857		52661	ARM	
	4066899		52661	ARM	
4075616	4075617	AE708220-1	8B707	HOSE ASSY	
	4075618	110553-618	78570	HOSE ASSY	
	4077569	1242012-1	98441	HOSE ASSY	
4075619	4075620	110553-620	78570	HOSE ASSY	
	4075621	AE708210-1	8B707	HOSE ASSY	
	4077570	1242010-1	98441	HOSE ASSY	
4075658	4075659	VS3489	9H901	BUSHING	
	4075667	124512	80539	BUSHING	
4075672	4075666	VS3488	9H901	BUSHING	
	4075673	124511	56878	BUSHING	
4075680	4075685		52661	BUMPER	
	4075686		52661	BUMPER	
	4075687		52661	BUMPER	
	4075819		52661	BUMPER	
4075681	4075688		52661	BUMPER	
	4075689		52661	BUMPER	
	4075690		52661	BUMPER	
	4075820		52661	BUMPER	
4075682	4075691		52661	BUMPER	
	4075692		52661	BUMPER	
	4075693		52661	BUMPER	
	4075821		52661	BUMPER	
4075729	ST2610-09	84780-1032	56878	NUT	0.190-32UNJF-3B X 0.090 IN. THK
	ST2611-09	K53256-3	15653	NUT	0.190-32UNJF-3B X 0.090 IN. THK
	ST2612-09	L13247-6-3	72952	NUT	0.190-32UNJF-3B X 0.090 IN. THK
	ST2613-09	VN4828BB02	92215	NUT	0.190-32UNJF-3B X 0.090 IN. THK

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4075770	4069880		52661	GASKET	
	4069922		52661	GASKET	
4075771	4071716		52661	BRACKET	
	4071719		52661	BRACKET	
4075972	4075970	110553-662	78570	HOSE ASSY	
	4075971	AE708161-1	8B707	HOSE ASSY	
	4077562	A7070-1	98441	HOSE ASSY	
4075974	4075854		52661	VANE	
	4075984		52661	VANE	
4075975	4075855		52661	VANE	
	4075985		52661	VANE	
	4076395		52661	VANE	
4075976	4076056		52661	VANE	
	4076156		52661	VANE	
	4076396		52661	VANE	
4076049	4070354		52661	DIFFUSER CASE	
	4076048		52661	DIFFUSER CASE	
4076383	4076381	11356-00	55231	BEARING	
	4076382	11357-00	55231	BEARING	
	4077951	KJB816110	50632	BEARING	
4076474	4069429	UA539800-2	78943	COOLER ASSY	
	4069430	45731-1341	U1841	COOLER ASSY	
4076700	ST2625-07	PLT4H-76	06383	TIE	
	ST2669-07	TYZ27M	56501	TIE	
4076706	4076704	67864	8P613	GASKET	
	4076705	P0088001	83259	GASKET	
4076830	4076398		52661	BUMPER ASSY	
	4076425		52661	BUMPER ASSY	
	4076428		52661	BUMPER ASSY	


OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4076924	4076814	KJBB18106	50632	BEARING	
	4076815	11511-00LOW	55231	BEARING	
	4076816	6011400	NONE1	BEARING	
4077027	ST2602-014	124514-014	56878	BOLT	
	ST2603-014	VS3486-014	92215	BOLT	
4077307	4077308	110553-308	78570	HOSE ASSY	
	4077309	AE708359-1	00624	HOSE ASSY	
	4077567	1242014-5	98441	HOSE ASSY	
4078173	4072231-01		52661	RING ASSY	
	4077968-01		52661	RING ASSY	
4078299	4042814	75796	56878	NUT	0.190-32UNJF-3B X 0.082 IN. THK
	4076416	VN4817BA02-3	92215	NUT	0.190-32UNJF-3B X 0.082 IN. THK
4078475	4077556	1242001-1	98441	HOSE ASSY	
	4078476	110553-476	78570	HOSE ASSY	
	4078477	AE707548-2	00624	HOSE ASSY	
4079286	4079356		52661	VANE	
	4079456		52661	VANE	
	4079556		52661	VANE	
4079445	4079446		52661	BUMPER ASSY	
	4079525		52661	BUMPER ASSY	
	4079526		52661	BUMPER ASSY	
	4079527		52661	BUMPER ASSY	
4079528	4079502		52661	ARM ASSY	
	4079506		52661	ARM ASSY	
4079696	4080156		52661	VANE	
	4080256		52661	VANE	
4079745	4078407		52661	BRACKET	
	4078474		52661	BRACKET	
4079798	4079794	VN4837WAX02	92215	NUT	
	4079795	L13656-6-3	72962	NUT	
	4079796	K53845-3	15653	NUT	
	4079797	92801-1032	56878	NUT	
4079926	ST2470-10	NS202900-4	80539	NUT	
	ST2471-10	F52938-4	15653	NUT	
	ST2472-10	WSLAF11420-4	72962	NUT	
4080111	4079029		52661	BUSHING	
	4080018		52661	BUSHING	
	4080019		52661	BUSHING	


OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
4080325	4080335		52661	VANE	
	4080355		52661	VANE	
4080377	4080374		52661	NUT	
	4080375		52661	NUT	
	4080376		52661	NUT	
4080378	4061088	69079	77842	SEAL	
	4065596		52661	SEAL	
	4080379		52661	SEAL	
4080732	4070115-01		52661	LINK	
	4080711-01		52661	LINK	
4080898	4080899	11891-00	55231	BEARING	
	4080900	KJB822707	50632	BEARING	
4080903	4080905	11892-00	55231	BEARING	
	4080906	KJB822806	50632	BEARING	
4081024	4081019	5903188	36069	BEARING	
	4081020	9122UK901	38443	BEARING	
	4081023	AAMMF9122-54	5F326	BEARING	
4081473	4001290		52661	BEARING	
	4004200		52661	BEARING	
	4045021		52661	BEARING	
4081574	4078195-01		52661	MANIFOLD	
	4081572-01		52661	MANIFOLD	
4081575	4078196-01		52661	MANIFOLD	
	4081573-01		52661	MANIFOLD	
4084871	4084872		52661	BEARING	
	4084873		52661	BEARING	
4086489	4079186		52661	BEARING	
	4086488		52661	BEARING	
4301682	ST2325-11	H52569-5	15653	NUT	
	ST2326-11	83459-524	56878	NUT	
	ST2327-11	WSLH10863-5-1	72962	NUT	
	ST2328-11	VN4734WAXD5 4	92215	NUT	
4302197	ST2325-09	H52569-3	15653	NUT	
	ST2326-09	83459-1032	56878	NUT	
	ST2327-09	WSLH10863-3-1	72962	NUT	
	ST2328-09	VN4734WAXD2	92215	NUT	

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
494677	494676	61149-428	56878	NUT	
	618106	KX-29110-4	15653	NUT	
	639338	LHL9126-7-4	72952	NUT	
	ST1188-10	B00111-4	27238	NUT	
	ST1330-10	VN4803WA048	92215	NUT	
704342	704343	RM-LH3858-048	72952	NUT	0.250-28UNJF-3B X 0.212 IN. THK
	704344	FN1014M-428	56878	NUT	0.250-28UNJF-3B X 0.219 IN. THK
	704345	H42-4	15653	NUT	0.250-28UNJF-3B X 0.219 IN. THK
782451	ST1070-23		52661	INSERT	
	ST1076-23		52661	INSERT	
ST1322-43	ST1070-43		52661	INSERT	
	ST1076-43	3591-3TN-0380	01556	INSERT	
ST1569-04	ST1570-04	NS203068-3	56878	NUT	
	ST1571-04	F13480-3	72962	NUT	
	ST1572-04	F53816-3	15653	NUT	
ST2169-02	ST2156-11	74483-524	56878	NUT	0.3125-24UNJF-3B X 0.473 IN. THK
	ST2173-11	H49500-5	15653	NUT	0.3125-24UNJF-3B X 0.478 IN. THK
	ST2183-11	LH11588-5	56878	NUT	0.3125-24UNJF-3B X 0.463 IN. THK
ST2284-04	AS3075-04	VSF1015N4B	92215	GASKET	
	ST2285-04	AP100N-04	01673	GASKET	0.250 IN. TUBE OD
	ST2286-04	SEC027N-04	33447	GASKET	0.250 IN. TUBE OD
ST2284-06	AS3075-06	VSF1015N6B	92215	GASKET	
	ST2285-06	AP100N-06	01673	GASKET	0.375 IN. TUBE OD
	ST2286-06	SEC027N-06	33447	GASKET	0.375 IN. TUBE OD
ST2284-07	AS3075-07	VSF1015N7B	92215	GASKET	
	ST2285-07	AP100N-07	01673	GASKET	0.438 IN. TUBE OD
	ST2286-07	SEC027N-07	33447	GASKET	0.438 IN. TUBE OD
ST2284-09	AS3075-09	VSF1015N9B	92215	GASKET	0.562 IN. TUBE OD
	ST2285-09	AP100N-09	01673	GASKET	0.562 IN. TUBE OD
	ST2286-09	SEC027N-09	33447	GASKET	0.562 IN. TUBE OD
ST2284-12	AS3075-12	VSF1015N12B	92215	GASKET	0.750 IN. TUBE OD
	ST2285-12	AP100N-12	01673	GASKET	0.750 IN. TUBE OD
	ST2286-12	SEC027N-12	33447	GASKET	0.750 IN. TUBE OD
ST2284-14	AS3075-14	VSF1015N14B	92215	GASKET	
	ST2285-14	AP100N-14	01673	GASKET	0.875 IN. TUBE OD
	ST2286-14	SEC027N-14	33447	GASKET	0.875 IN. TUBE OD
ST2284-16	AS3075-16		81343	GASKET	1.000 IN. TUBE OD
	ST2285-16	AP100N-16	01673	GASKET	1.000 IN. TUBE OD
	ST2286-16	SEC027N-16	33447	GASKET	1.000 IN. TUBE OD
ST2311-36	ST2309-36	66725-36	04319	GASKET	0.093 X 1.738 IN. DIA
	ST2310-36	P13U5N-0025-2	15284	GASKET	0.093 X 1.738 IN. DIA

OPTION PN	DETAIL PN	VENDOR PN	CAGE	NOMENCLATURE	DIMENSIONS
ST2586-08	ST2587-08	TA025093-08	84971	CLAMP	
	ST2588-08	11409	83930	CLAMP	
ST2590-10	ST2591-10	VN4762WAX04 8	92215	NUT	
	ST2592-10	LH13291A-4	72952	NUT	
	ST2593-10	H53831-4	15653	NUT	
	ST2594-10	92752-428	56878	NUT	
	ST2595-10	BH00470-4	27238	NUT	
ST2596-04	ST2597-04	NS203137-4	80539	NUT	
	ST2598-04	F53881-4	15653	NUT	
ST2737-09	ST2735-09	F53513-3BC	15653	NUT	
	ST2736-09	F13433-3	72952	NUT	
ST2745-10	ST2621-10	VN4758WP048	92215	NUT	0.250-28UNJF-3B X 0.318 IN. THK
	ST2622-10	LH13291-4	72952	NUT	0.250-28UNJF-3B X 0.318 IN. THK
	ST2623-10	H53308-4	15653	NUT	0.250-28UNJF-3B X 0.318 IN. THK
	ST2624-10	84892-428	56878	NUT	0.250-28UNJF-3B X 0.318 IN. THK
ST2785-10	ST2780-10	H53777-4	15653	NUT	0.250-28UNJF-3B X 0.3125 IN. THK
	ST2781-10	LH13587-4	72962	NUT	0.250-28UNJF-3B X 0.3125 IN. THK
	ST2782-10	92617-428	56878	NUT	0.250-28UNJF-3B X 0.3125 IN. THK
	ST2783-10	VN4761BB048	06950	NUT	0.250-28UNJF-3B X 0.3125 IN. THK
ST2785-11	ST2780-11	H53777-5	15653	NUT	0.3125-24UNJF-3B X 0.350 IN. THK
	ST2781-11	LH13587-5	72962	NUT	0.3125-24UNJF-3B X 0.350 IN. THK
	ST2782-11	92617-524	56878	NUT	0.3125-24UNJF-3B X 0.350 IN. THK
	ST2783-11	VN4761BB054	06950	NUT	0.3125-24UNJF-3B X 0.350 IN. THK
ST2786-01	ST2609-01	TR26036N-1032SBVX	29372	INSERT	
	ST2787-01	K10001-03	75237	INSERT	
ST2786-02	ST2609-02	TR26036N-428SBVX	29372	INSERT	
	ST2787-02	K10001-04	75237	INSERT	
ST2786-06	ST2609-06	TR26036N-1216SBVX	29372	INSERT	
	ST2787-06	K10001-08	75237	INSERT	
ST5030-09	ST5032-09	MF54343-3	15653	NUT	0.190-32UNJF-3B X 0.250 IN. THK
	ST5033-09	NS203217-3	80539	NUT	0.190-32UNJF-3B X 0.250 IN. THK

25. HOW TO LOCATE A PART. The following procedures describe the operations used to locate a part in the Maintenance Parts List if the part number is known or is not known.

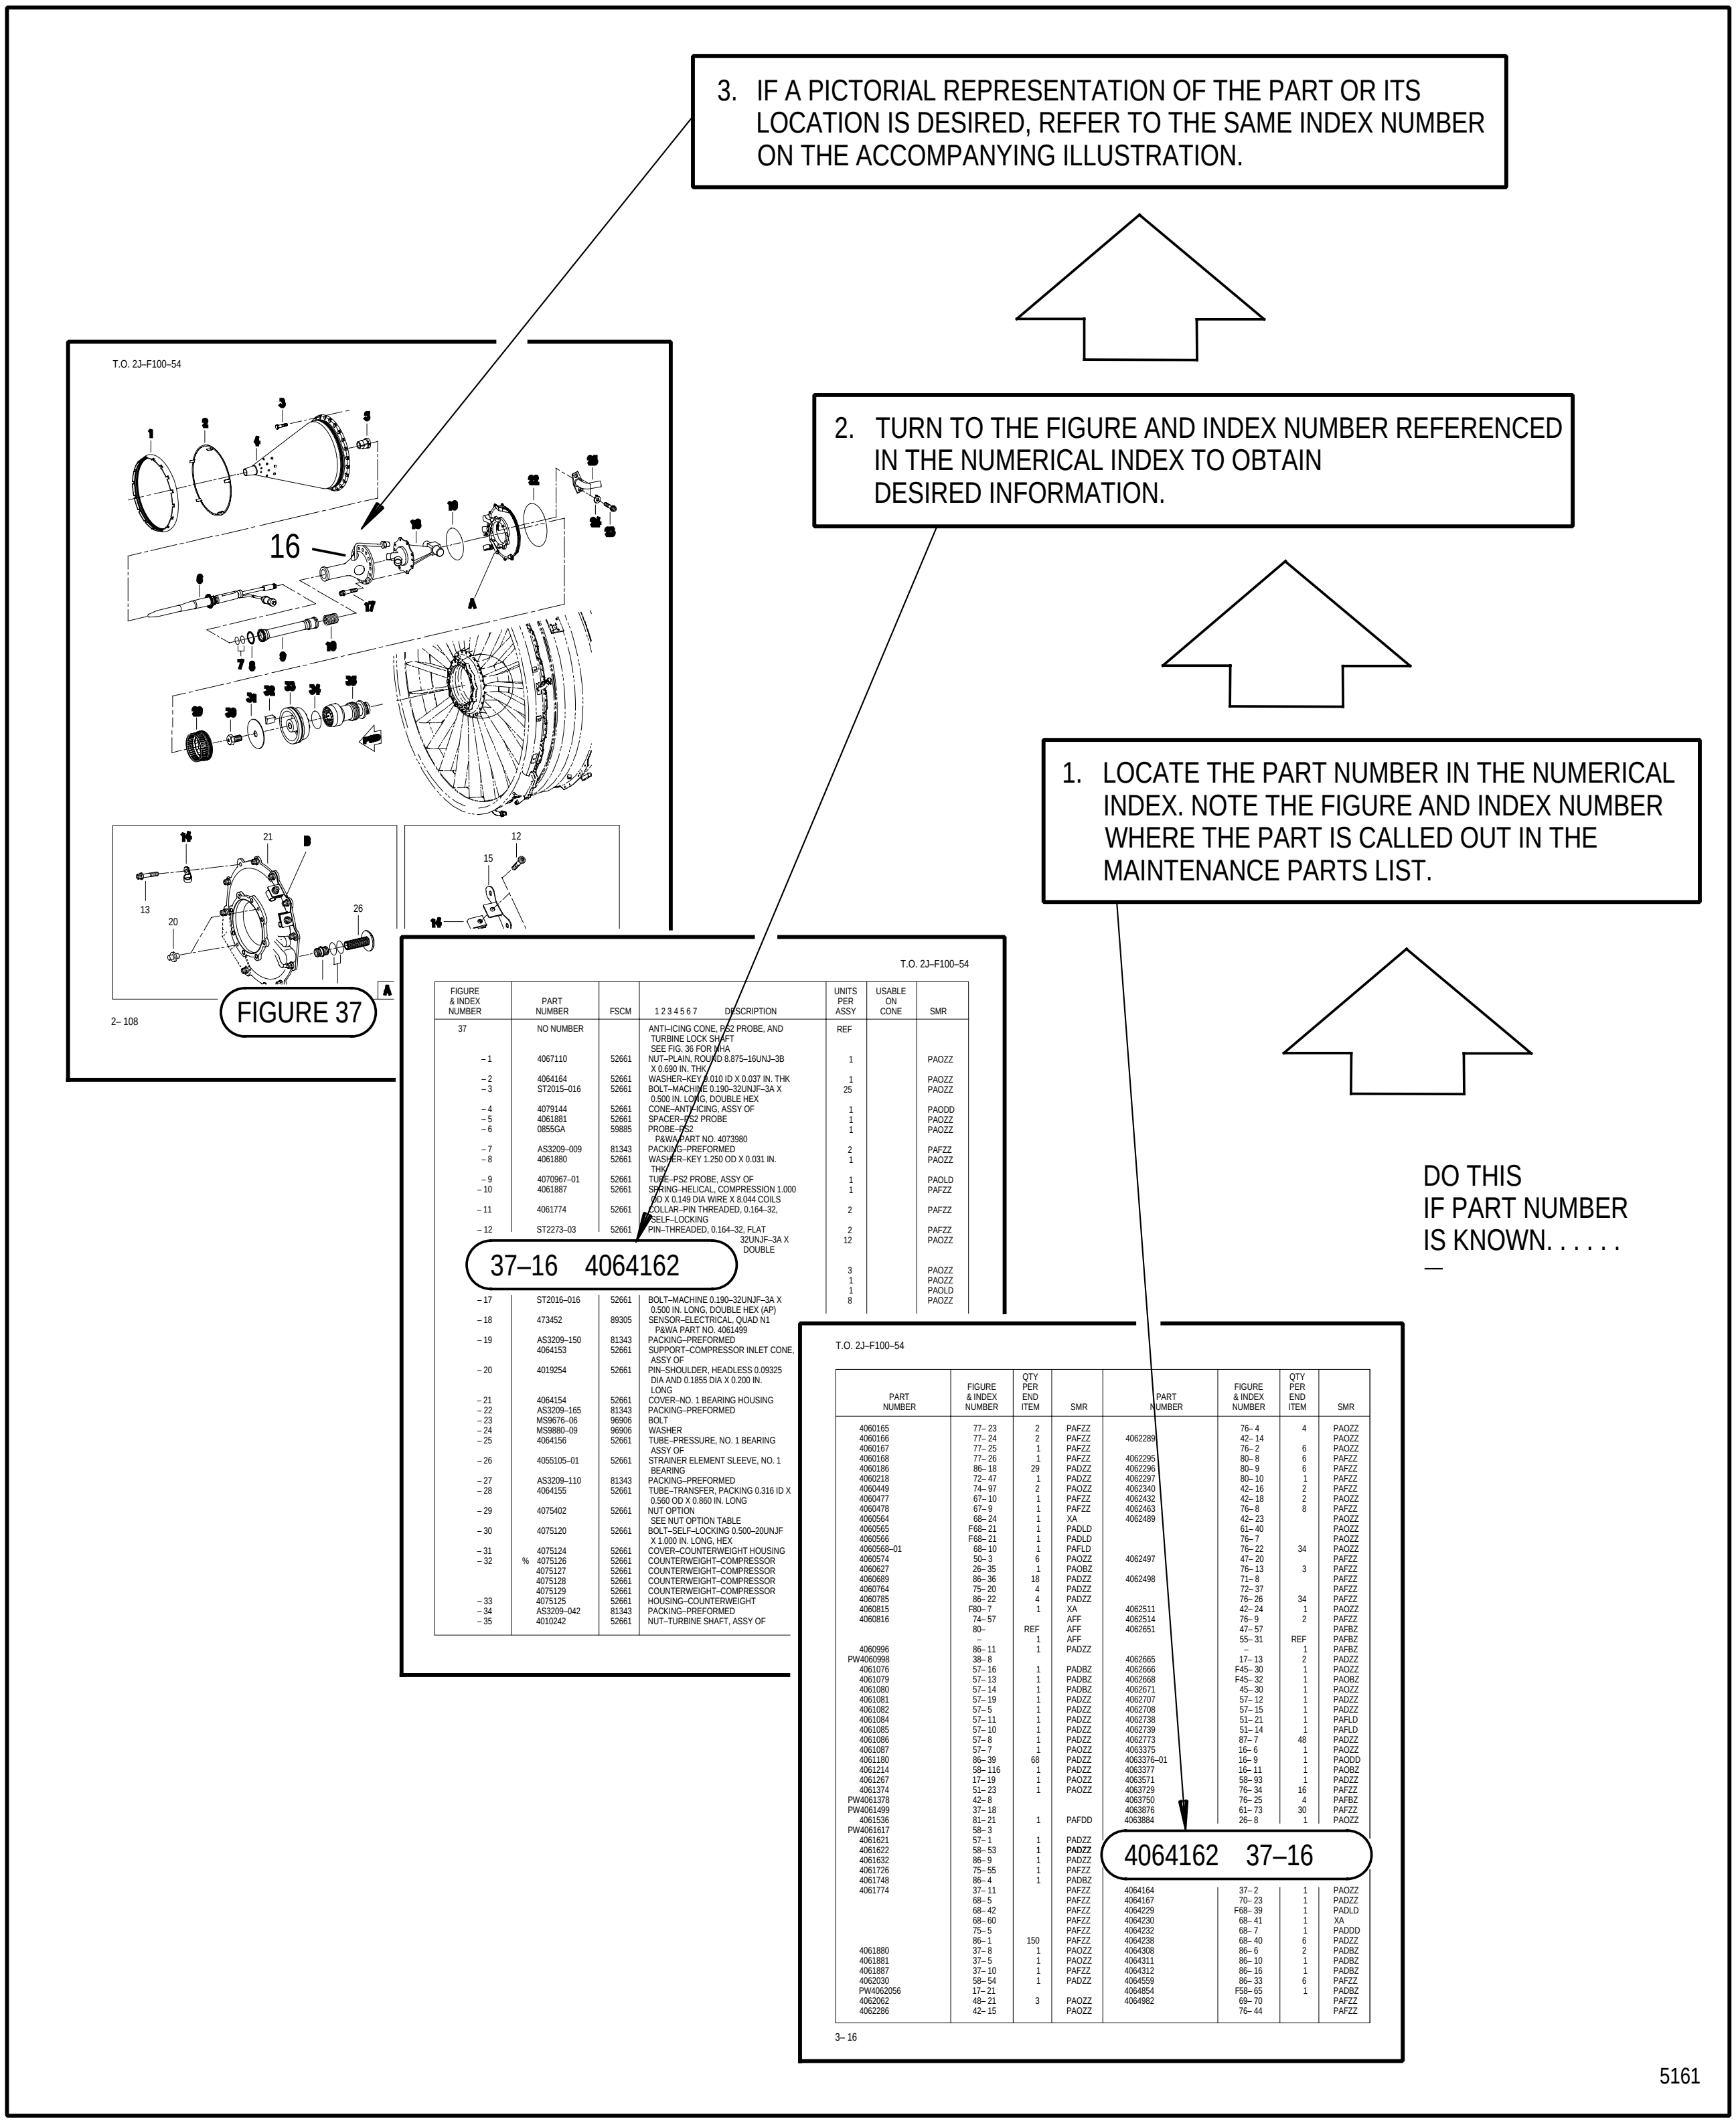

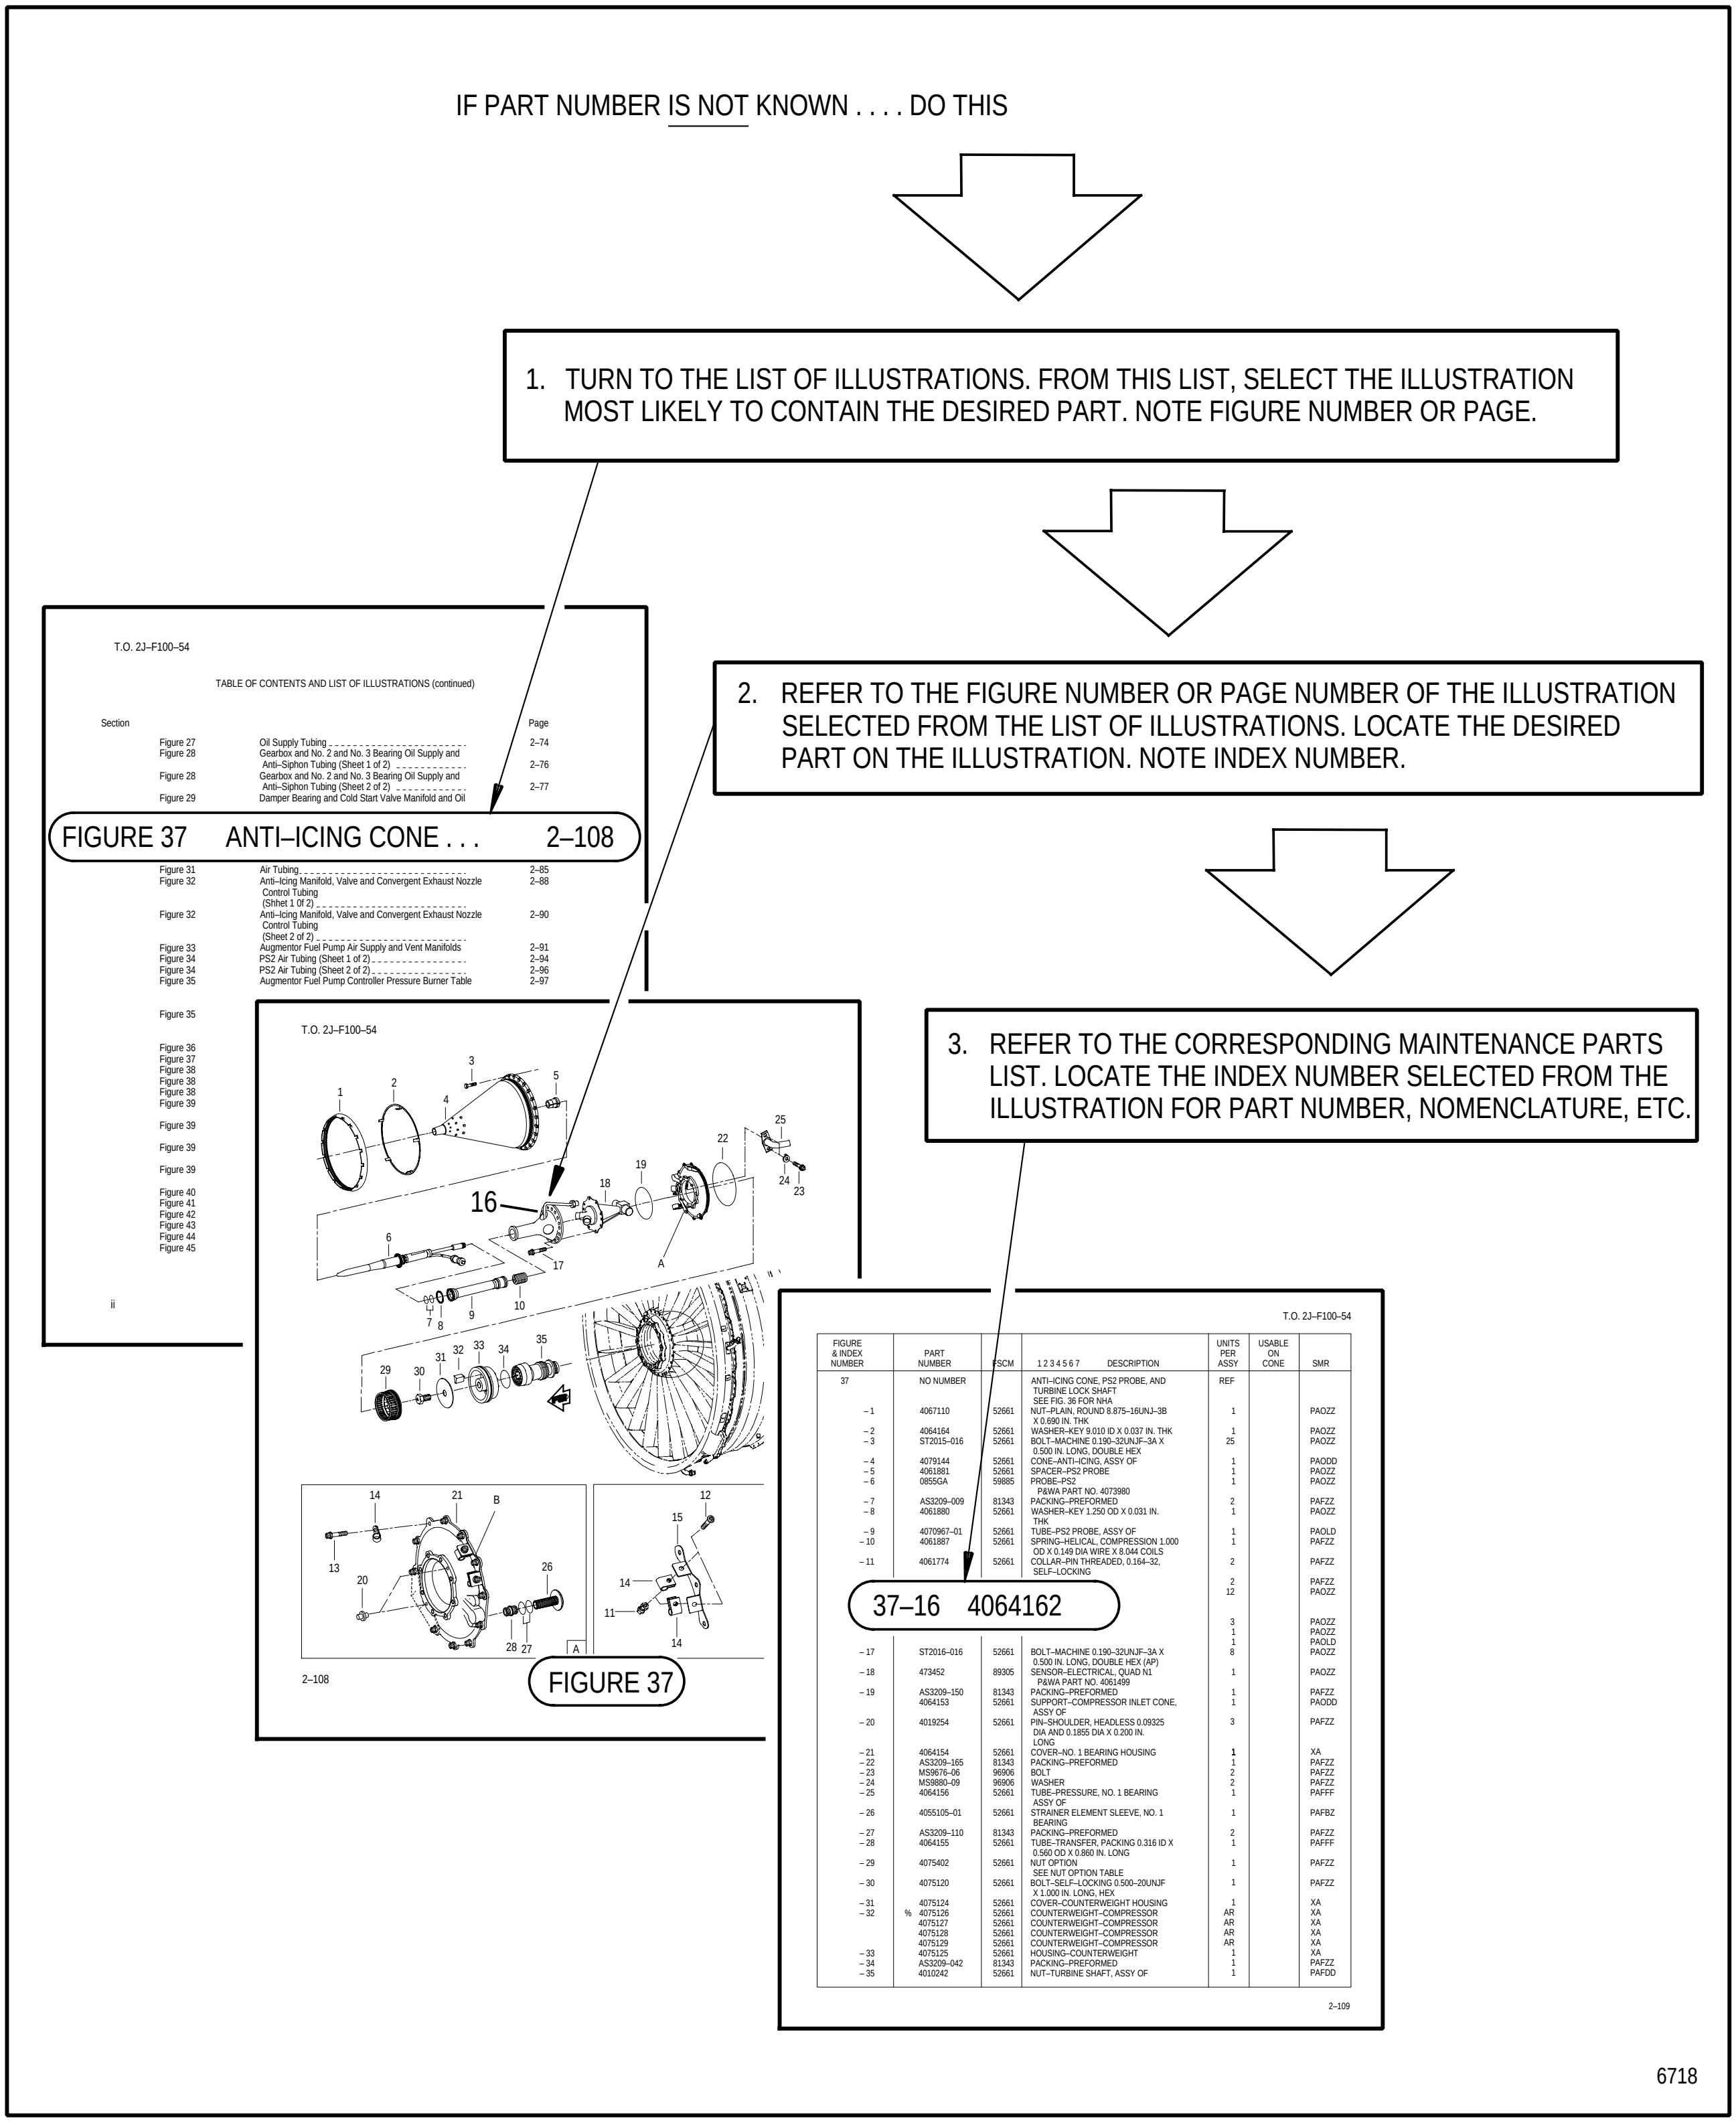
IF PART NUMBER IS NOT KNOWN . . . . DO THIS
1. TURN TO THE LIST OF ILLUSTRATIONS. FROM THIS LIST, SELECT THE ILLUSTRATION MOST LIKELY TO CONTAIN THE DESIRED PART. NOTE FIGURE NUMBER OR PAGE.
2. REFER TO THE FIGURE NUMBER OR PAGE NUMBER OF THE ILLUSTRATION SELECTED FROM THE LIST OF ILLUSTRATIONS. LOCATE THE DESIRED PART ON THE ILLUSTRATION. NOTE INDEX NUMBER.
3. REFER TO THE CORRESPONDING MAINTENANCE PARTS LIST. LOCATE THE INDEX NUMBER SELECTED FROM THE ILLUSTRATION FOR PART NUMBER, NOMENCLATURE, ETC.
FIGURE 37 ANTI–ICING CONE . . . 2–108
16
FIGURE 37
37–16 4064162
6718

26. USABLE ON CODE INDEX. Usable On Codes are assigned to prevent incorrect mixing or use of parts. Codes which appear on the Usable On Code columns in Section II identify parts which are restricted to specific model or engine serial number application or have interchangeability restrictions. If no Usable On Code is assigned, there are no restrictions.

The Usable On Code Index lists all figure and index locations of the various parts required to satisfy a specific interchangeability requirement.

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER	USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
A	F100-PW-229	PARTS CODED A ARE	1 -	B			63 - 51
A	(F-15 ONLY)	USED ONLY ON MODEL	1 - 11	B			63 - 55
A		F-15 A/C	57 - 13	B			63 - 56
A			57 - 14	B			63 - 57
A			57 - 15	B			63 - 95
A			57 - 16	B			67 - 104
A			57 - 17	B			71 - 44F
A			57 - 18	B			74 - 82
A			57 - 19	B			75 - 67
A			57 - 20	B			99 - 42
A			58 - 87				
A			62 -				
A			62 - 9	C	F100-PW-229	PARTS CODED C ARE	96 - 28
A			62 - 41	C		REPLACED BY PARTS	96 - 48
A			63 -	C		CODED D IN COMPLETE	
A			67 - 104	C		SETS ONLY AFTER	
A			71 - 44F	C		ACCOMPLISHMENT OF	
A			74 - 82	C		T.O. 2J-F100229(II)-519	
A			75 - 67				
A			99 - 42				
				D	F100-PW-229	PARTS CODED D REPLACE	96 - 28
				D		PARTS CODED C IN	96 - 48
B	F100-PW-229	PARTS CODED B ARE	1 -	D		COMPLETE SETS ONLY	
B	(F-16 ONLY)	USED ONLY ON MODEL	1 - 11	D		AFTER ACCOMPLISHMENT	
B		F-16 A/C	57 - 1	D		OF T.O. 2J-F100229(II)-519	
B			57 - 2				
B			57 - 3				
B			57 - 4	E		Not Used	
B			57 - 5				
B			57 - 6				
B			57 - 7	F		Not Used	
B			57 - 8				
B			57 - 9				
B			57 - 10	G		Not Used	
B			57 - 11				
B			57 - 12				
B			57 - 13	H		Not Used	
B			58 - 87				
B			62 -				
B			62 - 9	J	F100-PW-229	PARTS CODED J ARE	70 - 11
B			62 - 41	J		INTERCHANGEABLE WITH	70 - 12
B			63 -	J		PARTS CODED K IN	
B			63 - 48	J		COMPLETE SETS ONLY	
B			63 - 49				
B			63 - 50				

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
K	F100-PW-229	PARTS CODED K ARE	70 - 11
K		INTERCHANGEABLE WITH	70 - 12
K		PARTS CODED J IN	
K		COMPLETE SETS ONLY	
L	F100-PW-229	PARTS CODED L ARE	29 - 25
L		REPLACED BY PARTS	29 - 26
L		CODED M	86 - 14
M	F100-PW-229	PARTS CODED M REPLACE	86 - 14
M		PARTS CODED L	
N	F100-PW-229	PARTS CODED N ARE	86 - 1
N		INTERCHANGEABLE WITH	99 -
N		PARTS CODED P	
P	F100-PW-229	PARTS CODED P ARE	86 - 1
P		INTERCHANGEABLE WITH	99 -
P		PARTS CODED N	
Q	F100-PW-229	PARTS CODED Q ARE	89 - 69
Q		INTERCHANGEABLE WITH	103 - 1
Q		PARTS CODED R	
R	F100-PW-229	PARTS CODED R ARE	89 - 69
R		INTERCHANGEABLE WITH	103 - 1
R		PARTS CODED Q	
S	F100-PW-229	PARTS CODED S ARE	6 - 13
S		REPLACED BY PARTS	6 - 14
S		CODED T IN COMPLETE	6 - 24
S		SETS ONLY AFTER	21 - 9
S		ACCOMPLISHMENT OF	
S		T.O. 2J-F100229-545	
T	F100-PW-229	PARTS CODED T REPLACE	6 - 15
T		PARTS CODED S IN	6 - 16
T		COMPLETE SETS ONLY	6 - 17
T		AFTER ACCOMPLISHMENT	6 - 26
T		OF T.O. 2J-F100229-545	21 - 7A
T			21 - 7B
T			21 - 7C
T			21 - 7D
T			21 - 7E
T			21 - 7F
T			21 - 7G
T			21 - 9
U	F100-PW-229	PARTS CODED U ARE	88 - 1
U		REPLACED BY PARTS	89 - 26
U		CODED V IN COMPLETE	
U		SETS ONLY AFTER	
U		ACCOMPLISHMENT OF	
U		T.O. 2J-F100229(II)-514	
V	F100-PW-229	PARTS CODED V REPLACE	88 - 5
V		PARTS CODED U IN	89 - 27
V		COMPLETE SETS ONLY	
V		AFTER ACCOMPLISHMENT	
V		OF T.O. 2J-F100229(II)-514	
W	F100-PW-229	PARTS CODED W ARE	39 - 38
W		INTERCHANGEABLE WITH	
W		PARTS CODED X IN	
W		COMPLETE SETS ONLY	
X	F100-PW-229	PARTS CODED X ARE	39 - 39
X		INTERCHANGEABLE WITH	39 - 40
X		PARTS CODED W IN	39 - 41
X		COMPLETE SETS ONLY	39 - 42
Y		Not Used	
Z		Not Used	
AA	F100-PW-229	PARTS CODED AA ARE	3 - 28
AA		INTERCHANGEABLE WITH	58 - 95
AA		PARTS CODED AB IN	
AA		COMPLETE SETS ONLY	
AB	F100-PW-229	PARTS CODED AB ARE	3 - 28
AB		INTERCHANGEABLE WITH	58 - 95
AB		PARTS CODED AA IN	
AB		COMPLETE SETS ONLY	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
AC	F100-PW-229	PARTS CODED AC ARE	1 - 10
AC		REPLACED BY PARTS	58 -
AC		CODED AD AFTER	60 - 62
AC		ACCOMPLISHMENT OF	
AC		T.O. 2J-F100229(V)-504	
AD	F100-PW-229	PARTS CODED AD	1 - 10
AD		REPLACE PARTS CODED	58 -
AD		AC AFTER	60 - 62
AD		ACCOMPLISHMENT OF	
AD		T.O. 2J-F100229(V)-504	
AE	F100-PW-229	PARTS CODED AE ARE	49 - 30
AE		REPLACED BY PARTS	49 - 102
AE		CODED AF IN COMPLETE	50 - 24
AE		SETS ONLY	
AF	F100-PW-229	PARTS CODED AF	49 - 30
AF		REPLACE PARTS CODED	49 - 103
AF		AE IN COMPLETE SETS	50 - 24
AF		ONLY	
AG	F100-PW-229	RETURN PARTS CODED	73 - 69
AG		AG AS 4083858 FOR	73 - 70
AG		REPLACEMENT BY PARTS	
AG		CODED AH IN COMPLETE	
AG		SETS ONLY	
AH	F100-PW-229	PARTS CODED AH	73 - 79B
AH		REPLACE PARTS CODED	
AH		AG WHEN RETURNED AS	
AH		4083858 IN COMPLETE	
AH		SETS ONLY	
AJ	F100-PW-229	PARTS CODED AJ ARE	7 - 8
AJ		REPLACED BY PARTS	7 - 9
AJ		CODED AK IN COMPLETE	22 - 9
AJ		SETS ONLY AFTER	22 - 10
AJ		ACCOMPLISHMENT OF	22 - 31
AJ		T.O. 2J-F100229-545	50 - 3A
AK	F100-PW-229	PARTS CODED AK	7 - 9A
AK		REPLACE PARTS CODED	7 - 9B
AK		AJ IN COMPLETE SETS	22 - 10A
AK		ONLY AFTER	22 - 10B
AK		ACCOMPLISHMENT OF	22 - 31
AK		T.O. 2J-F100229-545	50 - 3A
AL	F100-PW-229	PARTS CODED AL ARE	88 - 1
AL		REPLACED BY PARTS	88 - 5
AL		CODED AM IN COMPLETE	
AL		SETS ONLY	
AM	F100-PW-229	PARTS CODED AM	88 - 1
AM		REPLACE PARTS CODED	88 - 5
AM		AL IN COMPLETE SETS	
AM		ONLY	
AN	F100-PW-229	PARTS CODED AN ARE	1 - 16
AN		USED IN THE VARIABLE	76 -
AN		6TH STAGE VANE	76 - 22
AN		CONFIGURATION ONLY	76 - 23
AN			76 - 25
AN			76 - 33
AN			77 -
AN			85 - 18
AN			95 -
AN			99 - 42
AP	F100-PW-229	PARTS CODED AP ARE	1 - 16
AP		USED IN THE FIXED 6TH	76 -
AP		STAGE VANE	76 - 22
AP		CONFIGURATION ONLY	76 - 23
AP			76 - 25
AP			76 - 28
AP			76 - 29
AP			76 - 30
AP			76 - 33
AP			78 -
AP			85 - 19
AP			96 -
AP			99 - 42

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
AQ	F100-PW-229	PARTS CODED AQ ARE	85 - 19
AQ		REPLACED BY PARTS	96 -
AQ		CODED AR AFTER	
AQ		ACCOMPLISHMENT OF	
AQ		T.O. 2J-F100229(II)-515	
AR	F100-PW-229	PARTS CODED AR	85 - 19
AR		REPLACE PARTS CODED	96 -
AR		AQ AFTER	
AR		ACCOMPLISHMENT OF	
AR		T.O. 2J-F100229(II)-515	
AS		Not Used	
AT		Not Used	
AU	F100-PW-229	PARTS CODED AU ARE	85 - 1
AU		INTERCHANGEABLE WITH	85 - 2
AU		PARTS CODED AV IN	85 - 3
AU		COMPLETE SETS ONLY	85 - 4
AU			88 - 35
AU			98 -
AU			98 - 5
AV	F100-PW-229	PARTS CODED AV ARE	85 - 1
AV		INTERCHANGEABLE WITH	85 - 2
AV		PARTS CODED AU IN	85 - 3
AV		COMPLETE SETS ONLY	85 - 4
AV			88 - 35
AV			98 -
AV			98 - 5
AW		Not Used	
AX		Not Used	
AY		Not Used	
AZ		Not Used	
BA		Not Used	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
BB		Not Used	
BC		Not Used	
BD		Not Used	
BE		Not Used	
BF		Not Used	
BG		Not Used	
BH		Not Used	
BJ		Not Used	
BK		Not Used	
BL	F100-PW-229	PARTS CODED BL ARE	1 - 16
BL		REPLACED BY PARTS	3 - 19
BL		CODED BM IN COMPLETE	3 - 20
BL		SETS ONLY	3 - 21
BL			7 - 13
BL			7 - 14
BL			28 - 17
BL			28 - 28
BL			76 -
BL			84 - 8
BL			94 -
BL			99 - 42
BM	F100-PW-229	PARTS CODED BM	1 - 16
BM		REPLACE PARTS CODED	3 - 22
BM		BL IN COMPLETE SETS	3 - 23
BM		ONLY	3 - 24
BM			28 - 14
BM			28 - 15

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
BM			28 - 16
BM			28 - 17
BM			28 - 28
BM			76 -
BM			84 - 8
BM			94 -
BM			99 - 42
BN	F100-PW-229	PARTS CODED BN ARE	11 - 17
BN		REPLACED BY PARTS	11 - 18
BN		CODED BP IN COMPLETE	11 - 19
BN		SETS ONLY	11 - 20
BN			27 - 24
BN			27 - 25
BN			27 - 28
BN			37 - 32
BN			37 - 33
BN			40 - 23
BP	F100-PW-229	PARTS CODED BP	11 - 7
BP		REPLACE PARTS CODED	11 - 8
BP		BN IN COMPLETE SETS	27 - 29
BP		ONLY	37 - 36
BP			37 - 37
BP			37 - 38
BP			40 - 23
BP			40 - 26
BQ	F100-PW-229	PARTS CODED BQ MUST	85 - 19
BQ		BE USED WITH PARTS	96 -
BQ		CODED BR	
BR	F100-PW-229	PARTS CODED BR MUST	88 - 36
BR		BE USED WITH PARTS	104 -
BR		CODED BQ	
BS	F100-PW-229	PARTS CODED BS ARE	42 - 44
BS		INTERCHANGEABLE WITH	42 - 46
BS		PARTS CODED BT IN	
BS		COMPLETE SETS ONLY	
BT	F100-PW-229	PARTS CODED BT ARE	42 - 44
BT		INTERCHANGEABLE WITH	42 - 46
BT		PARTS CODED BS IN	
BT		COMPLETE SETS ONLY	
BU		Not Used	
BV		Not Used	
BW		Not Used	
BX		Not Used	
BY		Not Used	
BZ		Not Used	
CA	F100-PW-229	PARTS CODED CA ARE	70 - 43
CA		REPLACED BY PARTS	
CA		CODED CB	
CB	F100-PW-229	PARTS CODED CB	70 - 43
CB		REPLACE PARTS CODED	
CB		CA	
CC	F100-PW-229	PARTS CODED CC ARE	70 - 43
CC		REPLACED BY PARTS	
CC		CODED CD	
CD	F100-PW-229	PARTS CODED CD	70 - 43
CD		REPLACE PARTS CODED	
CD		CC	
CE		Not Used	
CF		Not Used	
CG		Not Used	
CH		Not Used	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
CJ	F100-PW-229	PARTS CODED CJ ARE	55 - 30
CJ		REPLACED BY PARTS	55 - 37
CJ		CODED CK AFTER	
CJ		ACCOMPLISHMENT OF	
CJ		T.O. 2J-F100229-549	
CK	F100-PW-229	PARTS CODED CK	55 - 30
CK		REPLACE PARTS CODED	55 - 37
CK		CJ AFTER	
CK		ACCOMPLISHMENT OF	
CK		T.O. 2J-F100229-549	
CL	F100-PW-229	PARTS CODED CL ARE	79 - 12
CL		REPLACED BY PARTS	79 - 13
CL		CODED CM IN COMPLETE	
CL		SETS ONLY	
CM	F100-PW-229	PARTS CODED CM	79 - 14
CM		REPLACE PARTS CODED	
CM		CL IN COMPLETE SETS	
CM		ONLY	
CN	F100-PW-229	PARTS CODED CN ARE	96 - 3
CN		REPLACED BY PARTS	96 - 4
CN		CODED CP IN COMPLETE	
CN		SETS ONLY	
CP	F100-PW-229	PARTS CODED CP	96 - 3
CP		REPLACE PARTS CODED	96 - 4
CP		CN IN COMPLETE SETS	
CP		ONLY	
CQ	F100-PW-229	PARTS CODED CQ ARE	95 - 5
CQ		REPLACED BY PARTS	95 - 6
CQ		CODED CR IN COMPLETE	
CQ		SETS ONLY	
CR	F100-PW-229	PARTS CODED CR	95 - 5
CR		REPLACE PARTS CODED	95 - 6
CR		CQ IN COMPLETE SETS	
CR		ONLY	
CS	F100-PW-229	PARTS CODED CS ARE	89 - 61
CS		REPLACED BY PARTS	89 - 62
CS		CODED CT IN COMPLETE	
CS		SETS AFTER	
CS		ACCOMPLISHMENT OF	
CS		T.O. 2J-F100229(II)-532	
CT	F100-PW-229	PARTS CODED CT	89 - 61
CT		REPLACE PARTS CODED	89 - 62
CT		CS IN COMPLETE SETS	89 - 63
CT		AFTER ACCOMPLISHMENT	
CT		OF T.O. 2J-F100229(II)-532	
CU	F100-PW-229	PARTS CODED CU ARE	81 - 10
CU		INTERCHANGEABLE WITH	
CU		PARTS CODED CV	
CV	F100-PW-229	PARTS CODED CV ARE	81 - 13
CV		INTERCHANGEABLE WITH	
CV		PARTS CODED CU	
CW	F100-PW-229	PARTS CODED CW MUST	84 - 16
CW		BE USED WITH PARTS	84 - 17
CW		CODED CX	
CX	F100-PW-229	PARTS CODED CX MUST	85 - 18
CX		BE USED WITH PARTS	85 - 19
CX		CODED CW	95 -
CX			96 -
CY	F100-PW-229	PARTS CODED CY ARE	86 - 8
CY		REPLACED BY PARTS	89 - 69
CY		CODED CZ IN COMPLETE	103 - 1
CY		SETS ONLY	103 - 30
CZ	F100-PW-229	PARTS CODED CZ	86 - 8
CZ		REPLACE PARTS CODED	89 - 69
CZ		CY IN COMPLETE SETS	103 - 1
CZ		ONLY	103 - 30
DA	F100-PW-229	PARTS CODED DA ARE	1 - 16
DA		REPLACED BY PARTS	3 - 19
DA		CODED DB IN COMPLETE	3 - 20
DA		SETS ONLY	3 - 21

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
DA			7 - 13
DA			7 - 14
DA			28 - 17
DA			28 - 28
DA			76 -
DA			84 - 8
DA			94 -
DA			99 - 42
DB	F100-PW-229	PARTS CODED DB	1 - 16
DB		REPLACE PARTS CODED	3 - 22
DB		DA IN COMPLETE SETS	3 - 23
DB		ONLY	3 - 24
DB			28 - 14
DB			28 - 15
DB			28 - 16
DB			28 - 17
DB			28 - 28
DB			76 -
DB			84 - 8
DB			94 -
DB			99 - 42
DC	F100-PW-229	PARTS CODED DC ARE	86 - 22
DC		INTERCHANGEABLE WITH	100 -
DC		PARTS CODED DD	
DD	F100-PW-229	PARTS CODED DD ARE	86 - 22
DD		INTERCHANGEABLE WITH	100 -
DD		PARTS CODED DC	
DE	F100-PW-229	PARTS CODED DE ARE	86 - 22
DE		REPLACED BY PARTS	100 -
DE		CODED DF AFTER	
DE		ACCOMPLISHMENT OF	
DE		T.O. 2J-F100(II)-603	
DF	F100-PW-229	PARTS CODED DF	86 - 22
DF		REPLACE PARTS CODED	100 -
DF		DE AFTER	
DF		ACCOMPLISHMENT OF	
DF		T.O. 2J-F100(II)-603	
DG	F100-PW-229	PARTS CODED DG ARE	86 - 22
DG		REPLACED BY PARTS	100 -
DG		CODED DH AFTER	
DG		ACCOMPLISHMENT OF	
DG		T.O. 2J-F100(II)-603	
DH	F100-PW-229	PARTS CODED DH	86 - 22
DH		REPLACE PARTS CODED	100 -
DH		DG AFTER	
DH		ACCOMPLISHMENT OF	
DH		T.O. 2J-F100(II)-603	
DJ	F100-PW-229	PARTS CODED DJ ARE	86 - 22
DJ		REPLACED BY PARTS	100 -
DJ		CODED DK AFTER	
DJ		ACCOMPLISHMENT OF	
DJ		T.O. 2J-F100(II)-603	
DK	F100-PW-229	PARTS CODED DK	86 - 22
DK		REPLACE PARTS CODED	100 -
DK		DJ AFTER	
DK		ACCOMPLISHMENT OF	
DK		T.O. 2J-F100(II)-603	
DL	F100-PW-229	PARTS CODED DL ARE	86 - 22
DL		REPLACED BY PARTS	100 -
DL		CODED DM AFTER	
DL		ACCOMPLISHMENT OF	
DL		T.O. 2J-F100(II)-603	
DM	F100-PW-229	PARTS CODED DM	86 - 22
DM		REPLACE PARTS CODED	100 -
DM		DL AFTER	
DM		ACCOMPLISHMENT OF	
DM		T.O. 2J-F100(II)-603	
DN	F100-PW-229	PARTS CODED DN ARE	88 - 36
DN		REPLACED BY PARTS	104 -
DN		CODED DP	
DP	F100-PW-229	PARTS CODED DP	88 - 36
DP		REPLACE PARTS CODED	104 -
DP		DN	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
DQ	F100-PW-229	PARTS CODED DQ ARE	55 - 17
DQ		REPLACED BY PARTS	55 - 21
DQ		CODED DR IN COMPLETE	
DQ		SETS ONLY	
DR	F100-PW-229	PARTS CODED DR	55 - 17
DR		REPLACE PARTS CODED	55 - 21
DR		DQ IN COMPLETE SETS	
DR		ONLY	
DS		Not Used	
DT		Not Used	
DU		Not Used	
DV		Not Used	
DW		Not Used	
DX		Not Used	
DY		Not Used	
DZ		Not Used	
EA		Not Used	
EB		Not Used	
EC		Not Used	
ED		Not Used	
EE		Not Used	
EF		Not Used	
EG		Not Used	
EH		Not Used	
EJ		Not Used	
EK		Not Used	
EL		Not Used	
EM		Not Used	
EN		Not Used	
EP		Not Used	
EQ		Not Used	
ER		Not Used	
ES	F100-PW-229	PARTS CODED ES ARE	44 - 1
ES		REPLACED BY PARTS	44 - 2
ES		CODED ET IN COMPLETE	44 - 10
ES		SETS ONLY	
ET	F100-PW-229	PARTS CODED ET	44 - 1
ET		REPLACE PARTS CODED	44 - 2
ET		ES IN COMPLETE SETS	44 - 10
ET		ONLY	
EU	F100-PW-229	PARTS CODED EU ARE	39 - 27
EU		INTERCHANGEABLE WITH	39 - 31
EU		PARTS CODED EV IN	
EU		COMPLETE SETS ONLY	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
EV	F100-PW-229	PARTS CODED EV ARE INTERCHANGEABLE WITH PARTS CODED EU IN COMPLETE SETS ONLY	39 - 27 39 - 31
EW	F100-PW-229	PARTS CODED EW MUST BE USED WITH PARTS CODED EX	84 - 16 84 - 17
EX	F100-PW-229	PARTS CODED EX MUST BE USED WITH PARTS CODED EW	85 - 18 85 - 19 95 - 96 -
EY	F100-PW-229	PARTS CODED EY ARE REPLACED BY PARTS CODED EZ AFTER ACCOMPLISHMENT OF T.O. 2J-F100229(II)-515	85 - 19 96 -
EZ	F100-PW-229	PARTS CODED EZ REPLACE PARTS CODED EY AFTER ACCOMPLISHMENT OF T.O. 2J-F100229(II)-515	85 - 19 96 -
FA		Not Used	
FB		Not Used	
FC	F100-PW-229	PARTS CODED FC ARE REPLACED BY PARTS CODED FD IN COMPLETE SETS ONLY	11 - 9 11 - 11
FD	F100-PW-229	PARTS CODED FD REPLACE PARTS CODED FC IN COMPLETE SETS ONLY	11 - 9 11 - 11
FE	F100-PW-229	PARTS CODED FE ARE REPLACED BY PARTS CODED FF	104 -
FF	F100-PW-229	PARTS CODED FF REPLACE PARTS CODED FE	104 -
FG	F100-PW-229	PARTS CODED FG ARE REPLACED BY PARTS CODED FH IN COMPLETE SETS ONLY	22 - 32 22 - 34
FH	F100-PW-229	PARTS CODED FH REPLACE PARTS CODED FG IN COMPLETE SETS ONLY	22 - 32 22 - 34
FJ	F100-PW-229	PARTS CODED FJ ARE REPLACED BY PARTS CODED FK IN COMPLETE SETS ONLY	28 - 11 28 - 13
FK	F100-PW-229	PARTS CODED FK REPLACE PARTS CODED FJ IN COMPLETE SETS ONLY	28 - 11 28 - 13
FL	F100-PW-229	PARTS CODED FL ARE REPLACED BY PARTS CODED FM AFTER ACCOMPLISHMENT OF T.O. 2J-F100229(I)-515	70 - 8
FM	F100-PW-229	PARTS CODED FM REPLACE PARTS CODED FL AFTER ACCOMPLISHMENT OF T.O. 2J-F100229(I)-515	70 - 8
FN	F100-PW-229	PARTS CODED FN ARE REPLACED BY PARTS CODED FP IN COMPLETE SETS ONLY	37 - 36 37 - 38

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER	USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
FP	F100-PW-229	PARTS CODED FP	37 - 36	GF		Not Used	
FP		REPLACE PARTS CODED	37 - 38				
FP		FN IN COMPLETE SETS					
FP		ONLY		GG		Not Used	
FQ		Not Used		GH		Not Used	
FR		Not Used		GJ		Not Used	
FS		Not Used		GK		Not Used	
FT		Not Used		GL		Not Used	
FU		Not Used		GM		Not Used	
FV		Not Used		GN		Not Used	
FW		Not Used		GP		Not Used	
FX		Not Used		GQ		Not Used	
FY		Not Used		GR		Not Used	
FZ		Not Used		GS		Not Used	
GA		Not Used		GT		Not Used	
GB		Not Used		GU		Not Used	
GC		Not Used		GV		Not Used	
GD		Not Used		GW		Not Used	
GE		Not Used		GX		Not Used	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
GY		Not Used	
GZ		Not Used	
HA		Not Used	
HB		Not Used	
HC		Not Used	
HD		Not Used	
HE	F100-PW-229	PARTS CODED HE ARE	71 - 25
HE		REPLACED BY PARTS	73 -
HE		CODED HF AFTER	
HE		ACCOMPLISHMENT OF	
HE		T.O. 2J-F100229(III)-508	
HF	F100-PW-229	PARTS CODED HF	71 - 25
HF		REPLACE PARTS CODED	73 -
HF		HE AFTER	
HF		ACCOMPLISHMENT OF	
HF		T.O. 2J-F100229(III)-508	
HG	F100-PW-229	PARTS CODED HG ARE	71 - 25
HG		REPLACED BY PARTS	73 -
HG		CODED HH AFTER	
HG		ACCOMPLISHMENT OF	
HG		T.O. 2J-F100229(III)-508	
HH	F100-PW-229	PARTS CODED HH	71 - 25
HH		REPLACE PARTS CODED	73 -
HH		HG AFTER	
HH		ACCOMPLISHMENT OF	
HH		T.O. 2J-F100229(III)-508	
HJ	F100-PW-229	PARTS CODED HJ ARE	71 - 25
HJ		REPLACED BY PARTS	73 -
HJ		CODED HK AFTER	
HJ		ACCOMPLISHMENT OF	
HJ		T.O. 2J-F100229(III)-508	
HK	F100-PW-229	PARTS CODED HK	71 - 25
HK		REPLACE PARTS CODED	73 -
HK		HJ AFTER	
HK		ACCOMPLISHMENT OF	
HK		T.O. 2J-F100229(III)-508	
HL	F100-PW-229	PARTS CODED HL ARE	71 - 25
HL		REPLACED BY PARTS	73 -
HL		CODED HM AFTER	
HL		ACCOMPLISHMENT OF	
HL		T.O. 2J-F100229(III)-508	
HM	F100-PW-229	PARTS CODED HM	71 - 25
HM		REPLACE PARTS CODED	73 -
HM		HL AFTER	
HM		ACCOMPLISHMENT OF	
HM		T.O. 2J-F100229(III)-508	
HN	F100-PW-229	PARTS CODED HN ARE	71 - 25
HN		REPLACED BY PARTS	73 -
HN		CODED HP AFTER	
HN		ACCOMPLISHMENT OF	
HN		T.O. 2J-F100229(III)-508	
HP	F100-PW-229	PARTS CODED HP	71 - 25
HP		REPLACE PARTS CODED	73 -
HP		HN AFTER	
HP		ACCOMPLISHMENT OF	
HP		T.O. 2J-F100229(III)-508	
HQ	F100-PW-229	PARTS CODED HQ ARE	71 - 25
HQ		REPLACED BY PARTS	73 -
HQ		CODED HR AFTER	
HQ		ACCOMPLISHMENT OF	
HQ		T.O. 2J-F100229(III)-508	
HR	F100-PW-229	PARTS CODED HR	71 - 25
HR		REPLACE PARTS CODED	73 -
HR		HQ AFTER	
HR		ACCOMPLISHMENT OF	
HR		T.O. 2J-F100229(III)-508	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
HS	F100-PW-229	PARTS CODED HS ARE	71 - 25
HS		REPLACED BY PARTS	73 -
HS		CODED HT AFTER	
HS		ACCOMPLISHMENT OF	
HS		T.O. 2J-F100229(III)-508	
HT	F100-PW-229	PARTS CODED HT	71 - 25
HT		REPLACE PARTS CODED	73 -
HT		HS AFTER	
HT		ACCOMPLISHMENT OF	
HT		T.O. 2J-F100229(III)-508	
HU	F100-PW-229	PARTS CODED HU ARE	71 - 25
HU		REPLACED BY PARTS	73 -
HU		CODED HV AFTER	
HU		ACCOMPLISHMENT OF	
HU		T.O. 2J-F100229(III)-508	
HV	F100-PW-229	PARTS CODED HV	71 - 25
HV		REPLACE PARTS CODED	73 -
HV		HU AFTER	
HV		ACCOMPLISHMENT OF	
HV		T.O. 2J-F100229(III)-508	
HW	F100-PW-229	PARTS CODED HW ARE	71 - 25
HW		REPLACED BY PARTS	73 -
HW		CODED HX AFTER	
HW		ACCOMPLISHMENT OF	
HW		T.O. 2J-F100229(III)-508	
HX	F100-PW-229	PARTS CODED HX	71 - 25
HX		REPLACE PARTS CODED	73 -
HX		HW AFTER	
HX		ACCOMPLISHMENT OF	
HX		T.O. 2J-F100229(III)-508	
HY	F100-PW-229	PARTS CODED HY ARE	71 - 25
HY		REPLACED BY PARTS	73 -
HY		CODED HZ AFTER	
HY		ACCOMPLISHMENT OF	
HY		T.O. 2J-F100229(III)-508	
HZ	F100-PW-229	PARTS CODED HZ	71 - 25
HZ		REPLACE PARTS CODED	73 -
HZ		HY AFTER	
HZ		ACCOMPLISHMENT OF	
HZ		T.O. 2J-F100229(III)-508	
JA	F100-PW-229	PARTS CODED JA ARE	71 - 25
JA		REPLACED BY PARTS	73 -
JA		CODED JB AFTER	
JA		ACCOMPLISHMENT OF	
JA		T.O. 2J-F100229(III)-508	
JB	F100-PW-229	PARTS CODED JB	71 - 25
JB		REPLACE PARTS CODED	73 -
JB		JA AFTER	
JB		ACCOMPLISHMENT OF	
JB		T.O. 2J-F100229(III)-508	
JC	F100-PW-229	PARTS CODED JC ARE	71 - 25
JC		REPLACED BY PARTS	73 -
JC		CODED JD AFTER	
JC		ACCOMPLISHMENT OF	
JC		T.O. 2J-F100229(III)-508	
JD	F100-PW-229	PARTS CODED JD	71 - 25
JD		REPLACE PARTS CODED	73 -
JD		JC AFTER	
JD		ACCOMPLISHMENT OF	
JD		T.O. 2J-F100229(III)-508	
JE	F100-PW-229	PARTS CODED JE ARE	71 - 25
JE		REPLACED BY PARTS	73 -
JE		CODED JF AFTER	
JE		ACCOMPLISHMENT OF	
JE		T.O. 2J-F100229(III)-508	
JF	F100-PW-229	PARTS CODED JF	71 - 25
JF		REPLACE PARTS CODED	73 -
JF		JE AFTER	
JF		ACCOMPLISHMENT OF	
JF		T.O. 2J-F100229(III)-508	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
JG	F100-PW-229	PARTS CODED JG ARE	71 - 25
JG		REPLACED BY PARTS	73 -
JG		CODED JH AFTER	
JG		ACCOMPLISHMENT OF	
JG		T.O. 2J-F100229(III)-508	
JH	F100-PW-229	PARTS CODED JH	71 - 25
JH		REPLACE PARTS CODED	73 -
JH		JG AFTER	
JH		ACCOMPLISHMENT OF	
JH		T.O. 2J-F100229(III)-508	
JJ	F100-PW-229	PARTS CODED JJ ARE	71 - 25
JJ		REPLACED BY PARTS	73 -
JJ		CODED JK AFTER	
JJ		ACCOMPLISHMENT OF	
JJ		T.O. 2J-F100229(III)-508	
JK	F100-PW-229	PARTS CODED JK	71 - 25
JK		REPLACE PARTS CODED	73 -
JK		JJ AFTER	
JK		ACCOMPLISHMENT OF	
JK		T.O. 2J-F100229(III)-508	
JL	F100-PW-229	PARTS CODED JL ARE	71 - 25
JL		REPLACED BY PARTS	73 -
JL		CODED JM AFTER	
JL		ACCOMPLISHMENT OF	
JL		T.O. 2J-F100229(III)-508	
JM	F100-PW-229	PARTS CODED JM	71 - 25
JM		REPLACE PARTS CODED	73 -
JM		JL AFTER	
JM		ACCOMPLISHMENT OF	
JM		T.O. 2J-F100229(III)-508	
JN	F100-PW-229	PARTS CODED JN ARE	71 - 25
JN		REPLACED BY PARTS	73 -
JN		CODED JP AFTER	
JN		ACCOMPLISHMENT OF	
JN		T.O. 2J-F100229(III)-508	
JP	F100-PW-229	PARTS CODED JP	71 - 25
JP		REPLACE PARTS CODED	73 -
JP		JN AFTER	
JP		ACCOMPLISHMENT OF	
JP		T.O. 2J-F100229(III)-508	
JQ	F100-PW-229	PARTS CODED JQ ARE	71 - 25
JQ		REPLACED BY PARTS	73 -
JQ		CODED JR AFTER	
JQ		ACCOMPLISHMENT OF	
JQ		T.O. 2J-F100229(III)-508	
JR	F100-PW-229	PARTS CODED JR	71 - 25
JR		REPLACE PARTS CODED	73 -
JR		JQ AFTER	
JR		ACCOMPLISHMENT OF	
JR		T.O. 2J-F100229(III)-508	
JS	F100-PW-229	PARTS CODED JS ARE	58 - 34
JS		REPLACED BY PARTS	
JS		CODED JT AFTER	
JS		ACCOMPLISHMENT OF	
JS		T.O. 2J-F100229(V)-501	
JT	F100-PW-229	PARTS CODED JT	58 - 45
JT		REPLACE PARTS CODED	
JT		JS AFTER	
JT		ACCOMPLISHMENT OF	
JT		T.O. 2J-F100229(V)-501	
JU	F100-PW-229	PARTS CODED JU ARE	71 - 25
JU		REPLACED BY PARTS	73 -
JU		CODED JV	
JV	F100-PW-229	PARTS CODED JV	71 - 25
JV		REPLACE PARTS CODED	73 -
JV		JU	
JW	F100-PW-229	PARTS CODED JW ARE	88 - 16
JW		INTERCHANGEABLE WITH	88 - 17
JW		PARTS CODED JX IN	88 - 20
JW		COMPLETE SETS ONLY	88 - 21
JW			88 - 23
JW			88 - 24
JW			88 - 26
JW			88 - 28

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
JW			88 - 30
JX	F100-PW-229	PARTS CODED JX ARE	88 - 16
JX		INTERCHANGEABLE WITH	88 - 17
JX		PARTS CODED JW IN	88 - 20
JX		COMPLETE SETS ONLY	88 - 21
JX			88 - 23
JX			88 - 24
JX			88 - 26
JX			88 - 28
JX			88 - 30
JY	F100-PW-229	PARTS CODED JY ARE	88 - 24
JY		REPLACED BY PARTS	88 - 26
JY		CODED JZ IN COMPLETE	88 - 28
JY		SETS ONLY	88 - 30
JY			88 - 36
JY			104 -
JZ	F100-PW-229	PARTS CODED JZ	88 - 24
JZ		REPLACE PARTS CODED	88 - 26
JZ		JY IN COMPLETE SETS	88 - 28
JZ		ONLY	88 - 30
JZ			88 - 36
JZ			104 -
KA	F100-PW-229	PARTS CODED KA ARE	85 - 19
KA		REPLACED BY PARTS	96 -
KA		CODED KB AFTER	
KA		ACCOMPLISHMENT OF	
KA		T.O. 2J-F100229(II)-515	
KB	F100-PW-229	PARTS CODED KB	85 - 19
KB		REPLACE PARTS CODED	96 -
KB		KA AFTER	
KB		ACCOMPLISHMENT OF	
KB		T.O. 2J-F100229(II)-515	
KC	F100-PW-229	PARTS CODED KC ARE	71 - 25
KC		REPLACED BY PARTS	73 -
KC		CODED KD AFTER	
KC		ACCOMPLISHMENT OF	
KC		T.O. 2J-F100229(III)-508	
KD	F100-PW-229	PARTS CODED KD	71 - 25
KD		REPLACE PARTS CODED	73 -
KD		KC AFTER	
KD		ACCOMPLISHMENT OF	
KD		T.O. 2J-F100229(III)-508	
KE	F100-PW-229	PARTS CODED KE ARE	71 - 25
KE		REPLACED BY PARTS	73 -
KE		CODED KF AFTER	
KE		ACCOMPLISHMENT OF	
KE		T.O. 2J-F100229(III)-508	
KF	F100-PW-229	PARTS CODED KF	71 - 25
KF		REPLACE PARTS CODED	73 -
KF		KE AFTER	
KF		ACCOMPLISHMENT OF	
KF		T.O. 2J-F100229(III)-508	
KG	F100-PW-229	PARTS CODED KG ARE	88 - 36
KG		REPLACED BY PARTS	104 -
KG		CODED KH IN COMPLETE	
KG		SETS ONLY	
KH	F100-PW-229	PARTS CODED KH	88 - 36
KH		REPLACE PARTS CODED	104 -
KH		KG IN COMPLETE SETS	
KH		ONLY	
KJ	F100-PW-229	PARTS CODED KJ ARE	88 - 36
KJ		REPLACED BY PARTS	104 -
KJ		CODED KK IN COMPLETE	
KJ		SETS ONLY	
KK	F100-PW-229	PARTS CODED KK	88 - 36
KK		REPLACE PARTS CODED	104 -
KK		KJ IN COMPLETE SETS	
KK		ONLY	
KL		Not Used	
KM		Not Used	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
KN		Not Used	
KP		Not Used	
KQ	F100-PW-229	PARTS CODED KQ ARE	99 - 22
KQ		INTERCHANGEABLE WITH	99 - 28
KQ		PARTS CODED KR IN	
KQ		COMPLETE SETS ONLY	
KR	F100-PW-229	PARTS CODED KR ARE	99 - 22
KR		INTERCHANGEABLE WITH	99 - 28
KR		PARTS CODED KQ IN	
KR		COMPLETE SETS ONLY	
KS	F100-PW-229	PARTS CODED KS ARE	62 - 41
KS		REPLACED BY PARTS	66 - 1
KS		CODED KT IN COMPLETE	
KS		SETS ONLY AFTER	
KS		ACCOMPLISHMENT OF	
KS		CP95QA002	
KT	F100-PW-229	PARTS CODED KT	62 - 41
KT		REPLACE PARTS CODED	66 - 1
KT		KS IN COMPLETE SETS	
KT		ONLY AFTER	
KT		ACCOMPLISHMENT OF	
KT		CP95QA002	
KU	F100-PW-229	PARTS CODED KU ARE	1 - 5
KU		INTERCHANGEABLE WITH	1 - 6
KU		PARTS CODED KV IN	1 - 15
KU		COMPLETE SETS ONLY	75 -
KV	F100-PW-229	PARTS CODED KV ARE	1 - 15
KV		INTERCHANGEABLE WITH	75 -
KV		PARTS CODED KU IN	
KV		COMPLETE SETS ONLY	
KW	F100-PW-229	PARTS CODED KW ARE	1 - 7
KW		INTERCHANGEABLE WITH	1 - 8
KW		PARTS CODED KX IN	1 - 14
KW		COMPLETE SETS ONLY	74 -
KW			74 - 76

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
KW			74 - 78
KX	F100-PW-229	PARTS CODED KX ARE	1 - 14
KX		INTERCHANGEABLE WITH	74 -
KX		PARTS CODED KW IN	
KX		COMPLETE SETS ONLY	
KY	F100-PW-229	PARTS CODED KY ARE	71 - 12
KY		REPLACED BY PARTS	71 - 13
KY		CODED KZ IN COMPLETE	
KY		SETS ONLY AFTER	
KY		ACCOMPLISHMENT OF	
KY		T.O. 2J-F100229(III)-512	
KZ	F100-PW-229	PARTS CODED KZ	71 - 13A
KZ		REPLACE PARTS CODED	71 - 13B
KZ		KY IN COMPLETE SETS	
KZ		ONLY AFTER	
KZ		ACCOMPLISHMENT OF	
KZ		T.O. 2J-F100229(III)-512	
LA	F100-PW-229	PARTS CODED LA ARE	71 - 22
LA		REPLACED BY PARTS	72 -
LA		CODED LB AFTER	
LA		ACCOMPLISHMENT OF	
LA		T.O. 2J-F100229(III)-513	
LB	F100-PW-229	PARTS CODED LB	71 - 22
LB		REPLACE PARTS CODED	72 -
LB		LA AFTER	
LB		ACCOMPLISHMENT OF	
LB		T.O. 2J-F100229(III)-513	
LC	F100-PW-229	PARTS CODED LC ARE	63 - 117
LC		REPLACED BY PARTS	
LC		CODED LD AFTER	
LC		ACCOMPLISHMENT OF	
LC		T.O. 2J-F100229(IV)-502	
LD	F100-PW-229	PARTS CODED LD	63 - 117A
LD		REPLACE PARTS CODED	
LD		LC AFTER	
LD		ACCOMPLISHMENT OF	
LD		T.O. 2J-F100229(IV)-502	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
LE	F100-PW-229	PARTS CODED LE ARE	41 - 14
LE		REPLACED BY PARTS	51 - 18
LE		CODED LF IN COMPLETE	
LE		SETS ONLY AFTER	
LE		ACCOMPLISHMENT OF	
LE		T.O. 5E1-2-15-507 AND T.O.	
LE		6J3-4-117-517	
LF	F100-PW-229	PARTS CODED LF	41 - 14
LF		REPLACE PARTS CODED	51 - 18
LF		LE IN COMPLETE SETS	
LF		ONLY AFTER	
LF		ACCOMPLISHMENT OF	
LF		T.O. 5E1-2-15-507 AND T.O.	
LF		6J3-4-117-517	
LG	F100-PW-229	PARTS CODED LG ARE	85 - 19
LG		REPLACED BY PARTS	96 -
LG		CODED LH IN COMPLETE	
LG		SETS ONLY	
LH	F100-PW-229	PARTS CODED LH	85 - 19
LH		REPLACE PARTS CODED	96 -
LH		LG IN COMPLETE SETS	
LH		ONLY	
LJ	F100-PW-229	PARTS CODED LJ ARE	85 - 19
LJ		REPLACED BY PARTS	96 -
LJ		CODED LK IN COMPLETE	
LJ		SETS ONLY	
LK	F100-PW-229	PARTS CODED LK	85 - 19
LK		REPLACE PARTS CODED	96 -
LK		LJ IN COMPLETE SETS	
LK		ONLY	
LL	F100-PW-229	PARTS CODED LL ARE	5 - 13A
LL		USED IN COMPLETE SETS	5 - 13B
LL		ONLY AFTER	5 - 19
LL		ACCOMPLISHMENT OF	
LL		T.O. 2J-F100229-552	
LM	F100-PW-229	PARTS CODED LM ARE	67 - 15
LM		REPLACED BY PARTS	67 - 16
LM		CODED LN IN COMPLETE	67 - 18
LM		SETS AFTER	
LM		ACCOMPLISHMENT OF	
LM		T.O. 2J-F100229(I)-514 OR	
LM		T.O. 2J-F100229(I)-516	
LN	F100-PW-229	PARTS CODED LN	67 - 15
LN		REPLACE PARTS CODED	67 - 16
LN		LM IN COMPLETE SETS	67 - 18
LN		AFTER ACCOMPLISHMENT	
LN		OF T.O. 2J-F100229(I)-514	
LN		OR T.O. 2J-F100229(I)-516	
LP		Not Used	
LQ		Not Used	
LR	F100-PW-229	PARTS CODED LR ARE	88 - 36
LR		REPLACED BY PARTS	104 -
LR		CODED LS IN COMPLETE	
LR		SETS ONLY	
LS	F100-PW-229	PARTS CODED LS	88 - 36
LS		REPLACE PARTS CODED	104 -
LS		LR IN COMPLETE SETS	
LS		ONLY	
LT	F100-PW-229	PARTS CODED LT ARE	63 - 57
LT		INTERCHANGEABLE WITH	
LT		PARTS CODED LU	
LU	F100-PW-229	PARTS CODED LU ARE	63 - 57
LU		INTERCHANGEABLE WITH	
LU		PARTS CODED LT	
LV	F100-PW-229	PARTS CODED LV ARE	84 - 8
LV		INTERCHANGEABLE WITH	94 -
LV		PARTS CODED LW	
LW	F100-PW-229	PARTS CODED LW ARE	84 - 8
LW		INTERCHANGEABLE WITH	94 -
LW		PARTS CODED LV	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
LX	F100-PW-229	PARTS CODED LX ARE	84 - 1
LX		REPLACED BY PARTS	84 - 2
LX		CODED LY IN COMPLETE	84 - 8
LX		SETS ONLY AFTER	88 - 36
LX		ACCOMPLISHMENT OF	93 -
LX		T.O. 2J-F100229(II)-536	94 -
LX			104 -
LY	F100-PW-229	PARTS CODED LY	84 - 1
LY		REPLACE PARTS CODED	84 - 3
LY		LX IN COMPLETE SETS	84 - 4
LY		ONLY AFTER	84 - 8
LY		ACCOMPLISHMENT OF	88 - 36
LY		T.O. 2J-F100229(II)-536	93 -
LY			94 -
LY			104 -
LZ	F100-PW-229	PARTS CODED LZ ARE	84 - 1
LZ		REPLACED BY PARTS	84 - 2
LZ		CODED MA IN COMPLETE	84 - 8
LZ		SETS ONLY AFTER	88 - 36
LZ		ACCOMPLISHMENT OF	93 -
LZ		T.O. 2J-F100229(II)-536	94 -
LZ			104 -
MA	F100-PW-229	PARTS CODED MA	84 - 1
MA		REPLACE PARTS CODED	84 - 3
MA		LZ IN COMPLETE SETS	84 - 4
MA		ONLY AFTER	84 - 8
MA		ACCOMPLISHMENT OF	88 - 36
MA		T.O. 2J-F100229(II)-536	93 -
MA			94 -
MA			104 -
MB	F100-PW-229	PARTS CODED MB ARE	84 - 1
MB		REPLACED BY PARTS	84 - 2
MB		CODED MC IN COMPLETE	84 - 8
MB		SETS ONLY AFTER	88 - 36
MB		ACCOMPLISHMENT OF	93 -
MB		T.O. 2J-F100229(II)-536	94 -
MB			104 -
MC	F100-PW-229	PARTS CODED MC	84 - 1
MC		REPLACE PARTS CODED	84 - 3
MC		MB IN COMPLETE SETS	84 - 4
MC		ONLY AFTER	84 - 8
MC		ACCOMPLISHMENT OF	88 - 36
MC		T.O. 2J-F100229(II)-536	93 -
MC			94 -
MC			104 -
MD	F100-PW-229	PARTS CODED MD ARE	84 - 1
MD		REPLACED BY PARTS	84 - 2
MD		CODED ME IN COMPLETE	84 - 8
MD		SETS ONLY AFTER	88 - 36
MD		ACCOMPLISHMENT OF	93 -
MD		T.O. 2J-F100229(II)-536	94 -
MD			104 -
ME	F100-PW-229	PARTS CODED ME	84 - 1
ME		REPLACE PARTS CODED	84 - 3
ME		MD IN COMPLETE SETS	84 - 4
ME		ONLY AFTER	84 - 8
ME		ACCOMPLISHMENT OF	88 - 36
ME		T.O. 2J-F100229(II)-536	93 -
ME			94 -
ME			104 -
MF	F100-PW-229	PARTS CODED MF ARE	84 - 1
MF		REPLACED BY PARTS	84 - 2
MF		CODED MG IN COMPLETE	84 - 8
MF		SETS ONLY AFTER	88 - 36
MF		ACCOMPLISHMENT OF	93 -
MF		T.O. 2J-F100229(II)-536	94 -
MF			104 -
MG	F100-PW-229	PARTS CODED MG	84 - 1
MG		REPLACE PARTS CODED	84 - 3
MG		MF IN COMPLETE SETS	84 - 4
MG		ONLY AFTER	84 - 8
MG		ACCOMPLISHMENT OF	88 - 36
MG		T.O. 2J-F100229(II)-536	93 -
MG			94 -
MG			104 -
MH	F100-PW-229	PARTS CODED MH ARE	84 - 1
MH		REPLACED BY PARTS	84 - 2
MH		CODED MJ IN COMPLETE	84 - 8
MH		SETS ONLY AFTER	88 - 36
MH		ACCOMPLISHMENT OF	93 -
MH		T.O. 2J-F100229(II)-536	94 -
MH			104 -

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER	USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
MJ	F100-PW-229	PARTS CODED MJ	84 - 1	MR		CODED MS	
MJ		REPLACE PARTS CODED	84 - 3				
MJ		MH IN COMPLETE SETS	84 - 4				
MJ		ONLY AFTER	84 - 8	MS	F100-PW-229	PARTS CODED MS	86 - 22
MJ		ACCOMPLISHMENT OF	88 - 36	MS		SUPERSEDE PARTS	100 -
MJ		T.O. 2J-F100229(II)-536	93 -	MS		CODED MR	
MJ			94 -				
MJ			104 -				
				MT	F100-PW-229	PARTS CODED MT ARE	3 - 50
				MT		USED IN COMPLETE SETS	3 - 51
MK	F100-PW-229	PARTS CODED MK ARE	53 - 27	MT		ONLY AFTER	29 - 28
MK		REPLACED BY PARTS	53 - 28	MT		ACCOMPLISHMENT OF	67 - 106A
MK		CODED ML IN COMPLETE	53 - 28A	MT		T.O. 2J-F100229-576	67 - 118
MK		SETS	53 - 33				
				MU	F100-PW-229	PARTS CODED MU ARE	30 - 21
ML	F100-PW-229	PARTS CODED ML	53 - 27A	MU		REPLACED BY PARTS	30 - 26
ML		REPLACE PARTS CODED	53 - 28A	MU		CODED MV IN COMPLETE	30 - 34
ML		MK IN COMPLETE SETS	53 - 32A	MU		SETS ONLY AFTER	30 - 35
ML			53 - 32B	MU		ACCOMPLISHMENT OF	30 - 36
ML			53 - 33A	MU		T.O. 2J-F100229-565	30 - 37
				MU			58 - 98
MM	F100-PW-229	PARTS CODED MM ARE	84 - 16				
MM		REPLACED BY PARTS	84 - 17	MV	F100-PW-229	PARTS CODED MV	30 - 21A
MM		CODED MN AFTER	85 - 19	MV		REPLACE PARTS CODED	30 - 21B
MM		ACCOMPLISHMENT OF	96 -	MV		MU IN COMPLETE SETS	30 - 21C
MM		CP94QA062		MV		ONLY AFTER	30 - 26A
				MV		ACCOMPLISHMENT OF	30 - 36A
				MV		T.O. 2J-F100229-565	30 - 37A
MN	F100-PW-229	PARTS CODED MN	84 - 16	MV			58 - 98A
MN		REPLACE PARTS CODED	84 - 17				
MN		MM AFTER	85 - 19				
MN		ACCOMPLISHMENT OF	96 -	MW	F100-PW-229	PARTS CODED MW ARE	88 - 1
MN		CP94QA062		MW		REPLACED BY PARTS	
				MW		CODED MX IN COMPLETE	
				MW		SETS ONLY	
MP	F100-PW-229	PARTS CODED MP ARE	84 - 16				
MP		INTERCHANGEABLE WITH	84 - 17				
MP		PARTS CODED MQ IN		MX	F100-PW-229	PARTS CODED MX	88 - 1
MP		COMPLETE SETS ONLY		MX		REPLACE PARTS CODED	
				MX		MW IN COMPLETE SETS	
				MX		ONLY	
MQ	F100-PW-229	PARTS CODED MQ ARE	84 - 16				
MQ		INTERCHANGEABLE WITH	84 - 17				
MQ		PARTS CODED MP IN		MY	F100-PW-229	PARTS CODED MY ARE	53 - 37
MQ		COMPLETE SETS ONLY		MY		REPLACED BY PARTS	53 - 41
				MY		CODED MZ IN COMPLETE	53 - 55A
				MY		SETS ONLY	53 - 61
MR	F100-PW-229	PARTS CODED MR ARE	86 - 22	MY			53 - 74
MR		SUPERSEDED BY PARTS	100 -	MY			53 - 89

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
MY			53 - 91
MZ	F100-PW-229	PARTS CODED MZ	53 - 37
MZ		REPLACE PARTS CODED	53 - 41
MZ		MY IN COMPLETE SETS	53 - 41A
MZ		ONLY	53 - 41B
MZ			53 - 55A
MZ			53 - 61
MZ			53 - 61A
MZ			53 - 61B
MZ			53 - 74
MZ			53 - 89
MZ			53 - 91
MZ			53 - 92
MZ			53 - 93
MZ			53 - 94
MZ			53 - 95
NA	F100-PW-229	PARTS CODED NA ARE	71 - 25
NA		REPLACED BY PARTS	73 -
NA		CODED NB AFTER	
NA		ACCOMPLISHMENT OF	
NA		T.O. 2J-F100229(III)-508	
NB	F100-PW-229	PARTS CODED NB	71 - 25
NB		REPLACE PARTS CODED	73 -
NB		NA AFTER	
NB		ACCOMPLISHMENT OF	
NB		T.O. 2J-F100229(III)-508	
NC	F100-PW-229	PARTS CODED NC ARE	71 - 25
NC		REPLACED BY PARTS	73 -
NC		CODED ND AFTER	
NC		ACCOMPLISHMENT OF	
NC		T.O. 2J-F100229(III)-508	
ND	F100-PW-229	PARTS CODED ND	71 - 25
ND		REPLACE PARTS CODED	73 -
ND		NC AFTER	
ND		ACCOMPLISHMENT OF	
ND		T.O. 2J-F100229(III)-508	
NE	F100-PW-229	PARTS CODED NE ARE	71 - 25
NE		REPLACED BY PARTS	73 -
NE		CODED NF AFTER	
NE		ACCOMPLISHMENT OF	
NE		T.O. 2J-F100229(III)-508	
NF	F100-PW-229	PARTS CODED NF	71 - 25
NF		REPLACE PARTS CODED	73 -
NF		NE AFTER	
NF		ACCOMPLISHMENT OF	
NF		T.O. 2J-F100229(III)-508	
NG	F100-PW-229	PARTS CODED NG ARE	71 - 25
NG		REPLACED BY PARTS	73 -
NG		CODED NH AFTER	
NG		ACCOMPLISHMENT OF	
NG		T.O. 2J-F100229(III)-508	
NH	F100-PW-229	PARTS CODED NH	71 - 25
NH		REPLACE PARTS CODED	73 -
NH		NG AFTER	
NH		ACCOMPLISHMENT OF	
NH		T.O. 2J-F100229(III)-508	
NJ		Not Used	
NK		Not Used	
NL	F100-PW-229	PARTS CODED NL ARE	85 - 19
NL		REPLACED BY PARTS	96 -
NL		CODED NM AFTER	
NL		ACCOMPLISHMENT OF	
NL		T.O. 2J-F100229(II)-519	
NM	F100-PW-229	PARTS CODED NM	85 - 19
NM		REPLACE PARTS CODED	96 -
NM		NL AFTER	
NM		ACCOMPLISHMENT OF	
NM		T.O. 2J-F100229(II)-519	
NN	F100-PW-229	PARTS CODED NN ARE	1 - 15
NN		INTERCHANGEABLE WITH	75 -
NN		PARTS CODED NP IN	
NN		COMPLETE SETS ONLY	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
NP	F100-PW-229	PARTS CODED NP ARE	1 - 15
NP		INTERCHANGEABLE WITH	75 -
NP		PARTS CODED NN IN	
NP		COMPLETE SETS ONLY	
NQ	F100-PW-229	PARTS CODED NQ ARE	8 - 13A
NQ		ADDED AFTER	8 - 13B
NQ		ACCOMPLISHMENT OF	
NQ		T.O. 2J-F100229-562	
NR	F100-PW-229	PARTS CODED NR ARE	11 - 1
NR		REPLACED BY PARTS	
NR		CODED NS AFTER	
NR		ACCOMPLISHMENT OF	
NR		CP91QA090	
NS	F100-PW-229	PARTS CODED NS	11 - 1
NS		REPLACE PARTS CODED	
NS		NR AFTER	
NS		ACCOMPLISHMENT OF	
NS		CP91QA090	
NT		Not Used	
NU		Not Used	
NV	F100-PW-229	PARTS CODED NV ARE	71 - 5
NV		REPLACED BY PARTS	
NV		CODED NW IN COMPLETE	
NV		SETS ONLY AFTER	
NV		ACCOMPLISHMENT OF	
NV		T.O. 2J-F100229(III)-510	
NW	F100-PW-229	PARTS CODED NW	71 - 5
NW		REPLACE PARTS CODED	
NW		NV IN COMPLETE SETS	
NW		ONLY AFTER	
NW		ACCOMPLISHMENT OF	
NW		T.O. 2J-F100229(III)-510	
NX		Not Used	
NY		Not Used	
NZ	F100-PW-229	PARTS CODED NZ ARE	99 - 34
NZ		REPLACED BY PARTS	111 -
NZ		CODED PA IN COMPLETE	
NZ		SETS ONLY AFTER	
NZ		ACCOMPLISHMENT OF	
NZ		T.O. 2J-F100229(VI)-508	
PA	F100-PW-229	PARTS CODED PA	99 - 34
PA		REPLACE PARTS CODED	111 -
PA		NZ IN COMPLETE SETS	
PA		ONLY AFTER	
PA		ACCOMPLISHMENT OF	
PA		T.O. 2J-F100229(VI)-508	
PB	F100-PW-229	PARTS CODED PB ARE	99 - 34
PB		REPLACED BY PARTS	111 -
PB		CODED PC IN COMPLETE	
PB		SETS ONLY AFTER	
PB		ACCOMPLISHMENT OF	
PB		T.O. 2J-F100229(VI)-508	
PC	F100-PW-229	PARTS CODED PC	99 - 34
PC		REPLACE PARTS CODED	111 -
PC		PB IN COMPLETE SETS	
PC		ONLY AFTER	
PC		ACCOMPLISHMENT OF	
PC		T.O. 2J-F100229(VI)-508	
PD	F100-PW-229	PARTS CODED PD ARE	99 - 34
PD		REPLACED BY PARTS	111 -
PD		CODED PE IN COMPLETE	
PD		SETS ONLY AFTER	
PD		ACCOMPLISHMENT OF	
PD		T.O. 2J-F100229(VI)-508	
PE	F100-PW-229	PARTS CODED PE	99 - 34
PE		REPLACE PARTS CODED	111 -
PE		PD IN COMPLETE SETS	
PE		ONLY AFTER	
PE		ACCOMPLISHMENT OF	
PE		T.O. 2J-F100229(VI)-508	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
PF		Not Used	
PG		Not Used	
PH	F100-PW-229	PARTS CODED PH ARE	85 - 18
PH		INTERCHANGEABLE WITH	95 -
PH		PARTS CODED PJ	
PJ	F100-PW-229	PARTS CODED PJ ARE	85 - 18
PJ		INTERCHANGEABLE WITH	95 -
PJ		PARTS CODED PH	
PK	F100-PW-229	PARTS CODED PK ARE	85 - 18
PK		INTERCHANGEABLE WITH	95 -
PK		PARTS CODED PL	
PL	F100-PW-229	PARTS CODED PL ARE	85 - 18
PL		INTERCHANGEABLE WITH	95 -
PL		PARTS CODED PK	
PM	F100-PW-229	PARTS CODED PM ARE	85 - 18
PM		INTERCHANGEABLE WITH	95 -
PM		PARTS CODED PN	
PN	F100-PW-229	PARTS CODED PN ARE	85 - 18
PN		INTERCHANGEABLE WITH	95 -
PN		PARTS CODED PM	
PP	F100-PW-229	PARTS CODED PP ARE	85 - 18
PP		INTERCHANGEABLE WITH	95 -
PP		PARTS CODED PQ	
PQ	F100-PW-229	PARTS CODED PQ ARE	85 - 18
PQ		INTERCHANGEABLE WITH	95 -
PQ		PARTS CODED PP	
PR	F100-PW-229	PARTS CODED PR ARE	71 - 25
PR		REPLACED BY PARTS	73 -
PR		CODED PS AFTER	
PR		ACCOMPLISHMENT OF	
PR		T.O. 2J-F100229(III)-508	
PS	F100-PW-229	PARTS CODED PS	71 - 25
PS		REPLACE PARTS CODED	73 -
PS		PR AFTER	
PS		ACCOMPLISHMENT OF	
PS		T.O. 2J-F100229(III)-508	
PT	F100-PW-229	PARTS CODED PT ARE	71 - 25
PT		REPLACED BY PARTS	73 -
PT		CODED PU AFTER	
PT		ACCOMPLISHMENT OF	
PT		T.O. 2J-F100229(III)-508	
PU	F100-PW-229	PARTS CODED PU	71 - 25
PU		REPLACE PARTS CODED	73 -
PU		PT AFTER	
PU		ACCOMPLISHMENT OF	
PU		T.O. 2J-F100229(III)-508	
PV	F100-PW-229	PARTS CODED PV ARE	71 - 25
PV		REPLACED BY PARTS	73 -
PV		CODED PW AFTER	
PV		ACCOMPLISHMENT OF	
PV		T.O. 2J-F100229(III)-508	
PW	F100-PW-229	PARTS CODED PW	71 - 25
PW		REPLACE PARTS CODED	73 -
PW		PV AFTER	
PW		ACCOMPLISHMENT OF	
PW		T.O. 2J-F100229(III)-508	
PX	F100-PW-229	PARTS CODED PX ARE	71 - 25
PX		REPLACED BY PARTS	73 -
PX		CODED PY AFTER	
PX		ACCOMPLISHMENT OF	
PX		T.O. 2J-F100229(III)-508	
PY	F100-PW-229	PARTS CODED PY	71 - 25
PY		REPLACE PARTS CODED	73 -
PY		PX AFTER	
PY		ACCOMPLISHMENT OF	
PY		T.O. 2J-F100229(III)-508	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
PZ	F100-PW-229	PARTS CODED PZ ARE	71 - 25
PZ		REPLACED BY PARTS	73 -
PZ		CODED QA AFTER	
PZ		ACCOMPLISHMENT OF	
PZ		T.O. 2J-F100229(III)-508	
QA	F100-PW-229	PARTS CODED QA	71 - 25
QA		REPLACE PARTS CODED	73 -
QA		PZ AFTER	
QA		ACCOMPLISHMENT OF	
QA		T.O. 2J-F100229(III)-508	
QB	F100-PW-229	PARTS CODED QB ARE	71 - 25
QB		REPLACED BY PARTS	73 -
QB		CODED QC AFTER	
QB		ACCOMPLISHMENT OF	
QB		T.O. 2J-F100229(III)-508	
QC	F100-PW-229	PARTS CODED QC	71 - 25
QC		REPLACE PARTS CODED	73 -
QC		QB AFTER	
QC		ACCOMPLISHMENT OF	
QC		T.O. 2J-F100229(III)-508	
QD	F100-PW-229	PARTS CODED QD ARE	71 - 25
QD		REPLACED BY PARTS	73 -
QD		CODED QE AFTER	
QD		ACCOMPLISHMENT OF	
QD		T.O. 2J-F100229(III)-508	
QE	F100-PW-229	PARTS CODED QE	71 - 25
QE		REPLACE PARTS CODED	73 -
QE		QD AFTER	
QE		ACCOMPLISHMENT OF	
QE		T.O. 2J-F100229(III)-508	
QF	F100-PW-229	PARTS CODED QF ARE	71 - 25
QF		REPLACED BY PARTS	73 -
QF		CODED QG AFTER	
QF		ACCOMPLISHMENT OF	
QF		T.O. 2J-F100229(III)-508	
QG	F100-PW-229	PARTS CODED QG	71 - 25
QG		REPLACE PARTS CODED	73 -
QG		QF AFTER	
QG		ACCOMPLISHMENT OF	
QG		T.O. 2J-F100229(III)-508	
QH	F100-PW-229	PARTS CODED QH ARE	71 - 25
QH		REPLACED BY PARTS	73 -
QH		CODED QJ AFTER	
QH		ACCOMPLISHMENT OF	
QH		T.O. 2J-F100229(III)-508	
QJ	F100-PW-229	PARTS CODED QJ	71 - 25
QJ		REPLACE PARTS CODED	73 -
QJ		QH AFTER	
QJ		ACCOMPLISHMENT OF	
QJ		T.O. 2J-F100229(III)-508	
QK	F100-PW-229	PARTS CODED QK ARE	71 - 25
QK		REPLACED BY PARTS	73 -
QK		CODED QL AFTER	
QK		ACCOMPLISHMENT OF	
QK		T.O. 2J-F100229(III)-508	
QL	F100-PW-229	PARTS CODED QL	71 - 25
QL		REPLACE PARTS CODED	73 -
QL		QK AFTER	
QL		ACCOMPLISHMENT OF	
QL		T.O. 2J-F100229(III)-508	
QM	F100-PW-229	PARTS CODED QM ARE	71 - 25
QM		REPLACED BY PARTS	73 -
QM		CODED QN AFTER	
QM		ACCOMPLISHMENT OF	
QM		T.O. 2J-F100229(III)-508	
QN	F100-PW-229	PARTS CODED QN	71 - 25
QN		REPLACE PARTS CODED	73 -
QN		QM AFTER	
QN		ACCOMPLISHMENT OF	
QN		T.O. 2J-F100229(III)-508	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
QP	F100-PW-229	PARTS CODED QP ARE	71 - 25
QP		REPLACED BY PARTS	73 -
QP		CODED QR AFTER	
QP		ACCOMPLISHMENT OF	
QP		T.O. 2J-F100229(III)-508	
QQ		Not Used	
QR	F100-PW-229	PARTS CODED QR	71 - 25
QR		REPLACE PARTS CODED	73 -
QR		QP AFTER	
QR		ACCOMPLISHMENT OF	
QR		T.O. 2J-F100229(III)-508	
QS		Not Used	
QT		Not Used	
QU		Not Used	
QV		Not Used	
QW		Not Used	
QX		Not Used	
QY		Not Used	
QZ		Not Used	
RA		Not Used	
RB		Not Used	
RC	F100-PW-229	PARTS CODED RC ARE	21 - 13
RC		REPLACED BY PARTS	21 - 17
RC		CODED RD IN COMPLETE	50 - 1A
RC		SETS ONLY AFTER	
RC		ACCOMPLISHMENT OF	
RC		T.O. 2J-F100229-545	
RD	F100-PW-229	PARTS CODED RD	21 - 13
RD		REPLACE PARTS CODED	21 - 17
RD		RC IN COMPLETE SETS	50 - 1A
RD		ONLY AFTER	
RD		ACCOMPLISHMENT OF	
RD		T.O. 2J-F100229-545	
RE	F100-PW-229	PARTS CODED RE ARE	21 - 12
RE		REPLACED BY PARTS	
RE		CODED RF AFTER	
RE		ACCOMPLISHMENT OF	
RE		T.O. 2J-F100229-545	
RF	F100-PW-229	PARTS CODED RF	21 - 12
RF		REPLACE PARTS CODED	
RF		RE AFTER	
RF		ACCOMPLISHMENT OF	
RF		T.O. 2J-F100229-545	
RG	F100-PW-229	PARTS CODED RG ARE	28 - 17
RG		REPLACED BY PARTS	28 - 28
RG		CODED RH IN COMPLETE	75 - 70
RG		SETS ONLY AFTER	
RG		ACCOMPLISHMENT OF	
RG		T.O. 2J-F100229-545	
RH	F100-PW-229	PARTS CODED RH	28 - 17
RH		REPLACE PARTS CODED	28 - 27A
RH		RG IN COMPLETE SETS	28 - 27B
RH		ONLY AFTER	28 - 27C
RH		ACCOMPLISHMENT OF	28 - 28
RH		T.O. 2J-F100229-545	75 - 70
RH			75 - 71
RJ		Not Used	
RK		Not Used	
RL		Not Used	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
RM		Not Used	
RN	F100-PW-229	PARTS CODED RN ARE	39 - 43
RN		REPLACED BY PARTS	
RN		CODED RP IN COMPLETE	
RN		SETS ONLY	
RP	F100-PW-229	PARTS CODED RP	39 - 48
RP		REPLACE PARTS CODED	39 - 54
RP		RN IN COMPLETE SETS	
RP		ONLY	
RQ	F100-PW-229	PARTS CODED RQ ARE	99 - 34
RQ		REPLACED BY PARTS	111 -
RQ		CODED RR IN COMPLETE	
RQ		SETS ONLY AFTER	
RQ		ACCOMPLISHMENT OF	
RQ		T.O. 2J-F100229(VI)-508	
RR	F100-PW-229	PARTS CODED RR	99 - 34
RR		REPLACE PARTS CODED	111 -
RR		RQ IN COMPLETE SETS	
RR		ONLY AFTER	
RR		ACCOMPLISHMENT OF	
RR		T.O. 2J-F100229(VI)-508	
RS	F100-PW-229	PARTS CODED RS ARE	99 - 34
RS		REPLACED BY PARTS	111 -
RS		CODED RT IN COMPLETE	
RS		SETS ONLY AFTER	
RS		ACCOMPLISHMENT OF	
RS		T.O. 2J-F100229(VI)-508	
RT	F100-PW-229	PARTS CODED RT	99 - 34
RT		REPLACE PARTS CODED	111 -
RT		RS IN COMPLETE SETS	
RT		ONLY AFTER	
RT		ACCOMPLISHMENT OF	
RT		T.O. 2J-F100229(VI)-508	
RU	F100-PW-229	PARTS CODED RU ARE	99 - 34
RU		REPLACED BY PARTS	111 -
RU		CODED RV IN COMPLETE	
RU		SETS ONLY AFTER	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
RU		ACCOMPLISHMENT OF	
RU		T.O. 2J-F100229(VI)-508	
RV	F100-PW-229	PARTS CODED RV	99 - 34
RV		REPLACE PARTS CODED	111 -
RV		RU IN COMPLETE SETS	
RV		ONLY AFTER	
RV		ACCOMPLISHMENT OF	
RV		T.O. 2J-F100229(VI)-508	
RW	F100-PW-229	PARTS CODED RW ARE	99 - 34
RW		REPLACED BY PARTS	
RW		CODED RX AFTER	
RW		ACCOMPLISHMENT OF	
RW		T.O. 2J-F100229(VI)-508	
RX	F100-PW-229	PARTS CODED RX	99 - 34
RX		REPLACE PARTS CODED	
RX		RW AFTER	
RX		ACCOMPLISHMENT OF	
RX		T.O. 2J-F100229(VI)-508	
RY	F100-PW-229	PARTS CODED RY ARE	93 - 3
RY		REPLACED BY PARTS	
RY		CODED RZ AFTER	
RY		ACCOMPLISHMENT OF	
RY		T.O. 2J-F100229(II)-535	
RZ	F100-PW-229	PARTS CODED RZ	93 - 3
RZ		REPLACE PARTS CODED	
RZ		RY AFTER	
RZ		ACCOMPLISHMENT OF	
RZ		T.O. 2J-F100229(II)-535	
SA		Not Used	
SB		Not Used	
SC	F100-PW-229	PARTS CODED SC ARE	49 - 32
SC		REPLACED BY PARTS	
SC		CODED SD AFTER	
SC		ACCOMPLISHMENT OF	
SC		T.O. 2J-F100229-548	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
SD	F100-PW-229	PARTS CODED SD	49 - 32
SD		REPLACE PARTS CODED	
SD		SC AFTER	
SD		ACCOMPLISHMENT OF	
SD		T.O. 2J-F100229-548	
SE	F100-PW-229	PARTS CODED SE ARE	1 - 16
SE		REPLACED BY PARTS	76 -
SE		CODED SF AFTER	99 - 42
SE		ACCOMPLISHMENT OF	
SE		T.O. 2J-F100229(II)-536	
SF	F100-PW-229	PARTS CODED SF	1 - 16
SF		REPLACE PARTS CODED	76 -
SF		SE AFTER	99 - 42
SF		ACCOMPLISHMENT OF	
SF		T.O. 2J-F100229(II)-536	
SG	F100-PW-229	PARTS CODED SG ARE	99 - 34
SG		REPLACED BY PARTS	
SG		CODED SH AFTER	
SG		ACCOMPLISHMENT OF	
SG		T.O. 2J-F100229(VI)-507	
SH	F100-PW-229	PARTS CODED SH	99 - 34
SH		REPLACE PARTS CODED	
SH		SG AFTER	
SH		ACCOMPLISHMENT OF	
SH		T.O. 2J-F100229(VI)-507	
SJ	F100-PW-229	PARTS CODED SJ ARE	86 - 22
SJ		REPLACED BY PARTS	100 -
SJ		CODED SK AFTER	
SJ		ACCOMPLISHMENT OF	
SJ		CP92QA030	
SK	F100-PW-229	PARTS CODED SK	86 - 22
SK		REPLACE PARTS CODED	100 -
SK		SJ AFTER	
SK		ACCOMPLISHMENT OF	
SK		CP92QA030	
SL	F100-PW-229	PARTS CODED SL ARE	86 - 22
SL		REPLACED BY PARTS	100 -
SL		CODED SM AFTER	
SL		ACCOMPLISHMENT OF	
SL		CP92QA030	
SM	F100-PW-229	PARTS CODED SM	86 - 22
SM		REPLACE PARTS CODED	100 -
SM		SL AFTER	
SM		ACCOMPLISHMENT OF	
SM		CP92QA030	
SN	F100-PW-229	PARTS CODED SN ARE	86 - 22
SN		REPLACED BY PARTS	100 -
SN		CODED SP AFTER	
SN		ACCOMPLISHMENT OF	
SN		CP92QA030	
SP	F100-PW-229	PARTS CODED SP	86 - 22
SP		REPLACE PARTS CODED	100 -
SP		SN AFTER	
SP		ACCOMPLISHMENT OF	
SP		CP92QA030	
SQ	F100-PW-229	PARTS CODED SQ ARE	86 - 22
SQ		REPLACED BY PARTS	100 -
SQ		CODED SR AFTER	
SQ		ACCOMPLISHMENT OF	
SQ		CP92QA030	
SR	F100-PW-229	PARTS CODED SR	86 - 22
SR		REPLACE PARTS CODED	100 -
SR		SQ AFTER	
SR		ACCOMPLISHMENT OF	
SR		CP92QA030	
SS	F100-PW-229	PARTS CODED SS ARE	86 - 22
SS		REPLACED BY PARTS	100 -
SS		CODED ST AFTER	
SS		ACCOMPLISHMENT OF	
SS		CP92QA030	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
ST	F100-PW-229	PARTS CODED ST	86 - 22
ST		REPLACE PARTS CODED	100 -
ST		SS AFTER	
ST		ACCOMPLISHMENT OF	
ST		CP92QA030	
SU	F100-PW-229	PARTS CODED SU ARE	86 - 22
SU		REPLACED BY PARTS	100 -
SU		CODED SV AFTER	
SU		ACCOMPLISHMENT OF	
SU		CP92QA030	
SV	F100-PW-229	PARTS CODED SV	86 - 22
SV		REPLACE PARTS CODED	100 -
SV		SU AFTER	
SV		ACCOMPLISHMENT OF	
SV		CP92QA030	
SW	F100-PW-229	PARTS CODED SW ARE	73 - 81
SW		REPLACED BY PARTS	
SW		CODED SX AFTER	
SW		ACCOMPLISHMENT OF	
SW		CP94QA148	
SX	F100-PW-229	PARTS CODED SX	73 - 81
SX		REPLACE PARTS CODED	
SX		SW AFTER	
SX		ACCOMPLISHMENT OF	
SX		CP94QA148	
SY	F100-PW-229	PARTS CODED SY ARE	71 - 25
SY		REPLACED BY PARTS	71 - 26
SY		CODED SZ AFTER	71 - 42
SY		ACCOMPLISHMENT OF	73 -
SY		T.O. 2J-F100229(III)-525	
SZ	F100-PW-229	PARTS CODED SZ	71 - 25
SZ		REPLACE PARTS CODED	71 - 42
SZ		SY AFTER	71 - 44A
SZ		ACCOMPLISHMENT OF	73 -
SZ		T.O. 2J-F100229(III)-525	
TA	F100-PW-229	PARTS CODED TA ARE	73 - 61
TA		USED IN SETS	73 - 79B
TB	F100-PW-229	PARTS CODED TB ARE	73 - 61
TB		USED IN SETS	73 - 79B
TC	F100-PW-229	PARTS CODED TC ARE	73 - 61
TC		SUPERSEDED BY PARTS	73 - 68
TC		CODED TD AFTER	
TC		ACCOMPLISHMENT OF	
TC		CP95QA007	
TD	F100-PW-229	PARTS CODED TD	73 - 61
TD		SUPERSEDE PARTS	73 - 68
TD		CODED TC AFTER	
TD		ACCOMPLISHMENT OF	
TD		CP95QA007	
TE	F100-PW-229	PARTS CODED TE ARE	73 - 61
TE		SUPERSEDED BY PARTS	73 - 68
TE		CODED TF AFTER	
TE		ACCOMPLISHMENT OF	
TE		CP95QA007	
TF	F100-PW-229	PARTS CODED TF	73 - 61
TF		SUPERSEDE PARTS	73 - 68
TF		CODED TE AFTER	
TF		ACCOMPLISHMENT OF	
TF		CP95QA007	
TG	F100-PW-229	PARTS CODED TG ARE	73 - 61
TG		SUPERSEDED BY PARTS	73 - 68
TG		CODED TH AFTER	
TG		ACCOMPLISHMENT OF	
TG		CP95QA007	
TH	F100-PW-229	PARTS CODED TH	73 - 61
TH		SUPERSEDE PARTS	73 - 68
TH		CODED TG AFTER	
TH		ACCOMPLISHMENT OF	
TH		CP95QA007	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
TJ	F100-PW-229	PARTS CODED TJ ARE	73 - 54
TJ		REPLACED BY PARTS	
TJ		CODED TK AFTER	
TJ		ACCOMPLISHMENT OF	
TJ		CP94QA149	
TK	F100-PW-229	PARTS CODED TK	73 - 54
TK		REPLACE PARTS CODED	
TK		TJ AFTER	
TK		ACCOMPLISHMENT OF	
TK		CP94QA149	
TL	F100-PW-229	PARTS CODED TL ARE	73 - 57
TL		REPLACED BY PARTS	
TL		CODED TM AFTER	
TL		ACCOMPLISHMENT OF	
TL		CP94QA149	
TM	F100-PW-229	PARTS CODED TM	73 - 57
TM		REPLACE PARTS CODED	
TM		TL AFTER	
TM		ACCOMPLISHMENT OF	
TM		CP94QA149	
TN	F100-PW-229	PARTS CODED TN ARE	21 - 10
TN		REPLACED BY PARTS	
TN		CODED TP AFTER	
TN		ACCOMPLISHMENT OF	
TN		CP96QA078	
TP	F100-PW-229	PARTS CODED TP	21 - 10
TP		REPLACE PARTS CODED	
TP		TN AFTER	
TP		ACCOMPLISHMENT OF	
TP		CP96QA078	
TQ	F100-PW-229	PARTS CODED TQ ARE	67 - 10
TQ		REPLACED BY PARTS	
TQ		CODED TR AFTER	
TQ		ACCOMPLISHMENT OF	
TQ		CP96QA055	
TR	F100-PW-229	PARTS CODED TR	67 - 10
TR		REPLACE PARTS CODED	
TR		TQ AFTER	
TR		ACCOMPLISHMENT OF	
TR		CP96QA055	
TS	F100-PW-229	PARTS CODED TS ARE	34 - 39
TS		REPLACED BY PARTS	
TS		CODED TT AFTER	
TS		ACCOMPLISHMENT OF	
TS		T.O. 2J-F100229(III)-512	
TT	F100-PW-229	PARTS CODED TT	34 - 39
TT		REPLACE PARTS CODED	
TT		TS AFTER	
TT		ACCOMPLISHMENT OF	
TT		T.O. 2J-F100229(III)-512	
TU	F100-PW-229	PARTS CODED TU ARE	27 - 7
TU		REPLACED BY PARTS	28 - 10
TU		CODED TV AFTER	
TU		ACCOMPLISHMENT OF	
TU		T.O. 2J-F100229-571	
TV	F100-PW-229	PARTS CODED TV	27 - 7
TV		REPLACE PARTS CODED	28 - 10
TV		TU AFTER	28 - 39
TV		ACCOMPLISHMENT OF	28 - 40
TV		T.O. 2J-F100229-571	28 - 41
TV			28 - 42
TV			28 - 43
TV			28 - 44
TV			28 - 45
TV			28 - 46
TW	F100-PW-229	PARTS CODED TW ARE	48 - 37
TW		REPLACED BY PARTS	
TW		CODED TX AFTER	
TW		ACCOMPLISHMENT OF	
TW		T.O. 6J3-8-21-504	
TX	F100-PW-229	PARTS CODED TX	48 - 37
TX		REPLACE PARTS CODED	
TX		TW AFTER	
TX		ACCOMPLISHMENT OF	
TX		T.O. 6J3-8-21-504	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER	USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
TY	F100-PW-229	PARTS CODED TY ARE	1 - 13				
TY		REPLACED BY 4082655-801	55 - 46				
TY		AFTER ACCOMPLISHMENT	71 -	UN		Not Used	
TY		OF T.O. 2J-F100229(III)-517					
				UP		Not Used	
TZ	F100-PW-229	PARTS CODED TZ ARE	73 - 40F				
TZ		REPLACED BY PARTS					
TZ		CODED UA AFTER		UQ		Not Used	
TZ		ACCOMPLISHMENT OF					
TZ		T.O. 2J-F100229(III)-503					
				UR		Not Used	
UA	F100-PW-229	PARTS CODED UA	73 - 40F				
UA		REPLACE PARTS CODED		US		Not Used	
UA		TZ AFTER					
UA		ACCOMPLISHMENT OF					
UA		T.O. 2J-F100229(III)-503		UT		Not Used	
UB		Not Used		UU		Not Used	
UC		Not Used		UV		Not Used	
UD		Not Used		UW		Not Used	
UE		Not Used		UX		Not Used	
UF		Not Used		UY		Not Used	
UG		Not Used		UZ		Not Used	
UH		Not Used		VA		Not Used	
UJ		Not Used		VB		Not Used	
UK		Not Used		VC		Not Used	
UL		Not Used		VD		Not Used	
UM		Not Used		VE		Not Used	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
VF		Not Used	
VG		Not Used	
VH		Not Used	
VJ		Not Used	
VK		Not Used	
VL		Not Used	
VM		Not Used	
VN		Not Used	
VP		Not Used	
VQ		Not Used	
VR		Not Used	
VS		Not Used	
VT		Not Used	
VU		Not Used	
VV		Not Used	
VW		Not Used	
VX	F100-PW-229	PARTS CODED VX ARE	95 - 102
VX		REPLACED BY PARTS	
VX		CODED VY IN COMPLETE	
VX		SETS ONLY	
VY	F100-PW-229	PARTS CODED VY	95 - 102A
VY		REPLACE PARTS CODED	
VY		VX IN COMPLETE SETS	
VY		ONLY	
VZ	F100-PW-229	PARTS CODED VZ ARE	95 - 112
VZ		REPLACED BY PARTS	
VZ		CODED WA IN COMPLETE	
VZ		SETS ONLY	
WA	F100-PW-229	PARTS CODED WA	95 - 112A
WA		REPLACE PARTS CODED	
WA		VZ IN COMPLETE SETS	
WA		ONLY	
WB	F100-PW-229	PARTS CODED WB ARE	95 - 121
WB		REPLACED BY PARTS	95 - 122
WB		CODED WC IN COMPLETE	
WB		SETS ONLY	
WC	F100-PW-229	PARTS CODED WC	95 - 121A
WC		REPLACE PARTS CODED	95 - 122A
WC		WB IN COMPLETE SETS	
WC		ONLY	
WD	F100-PW-229	PARTS CODED WD ARE	96 - 82
WD		REPLACED BY PARTS	
WD		CODED WE IN COMPLETE	
WD		SETS ONLY	
WE	F100-PW-229	PARTS CODED WE	96 - 82A
WE		REPLACE PARTS CODED	
WE		WD IN COMPLETE SETS	
WE		ONLY	
WF	F100-PW-229	PARTS CODED WF ARE	96 - 96
WF		REPLACED BY PARTS	
WF		CODED WG IN COMPLETE	
WF		SETS ONLY	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER	USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
WG	F100-PW-229	PARTS CODED WG	96 - 96A				
WG		REPLACE PARTS CODED		WQ	F100-PW-229	PARTS CODED WQ	63 - 34
WG		WF IN COMPLETE SETS		WQ		SUPERSEDE PARTS	63 - 42
WG		ONLY		WQ		CODED WP FOR	63 - 115
				WQ		4068724-800	
WH	F100-PW-229	PARTS CODED WH ARE	96 - 107				
WH		REPLACED BY PARTS	96 - 108	WR	F100-PW-229	PARTS CODED WR ARE	63 - 34
WH		CODED WJ IN COMPLETE		WR		REPLACED BY PARTS	63 - 42
WH		SETS ONLY		WR		CODED WS FOR	63 - 115
				WR		4068824-800	
WJ	F100-PW-229	PARTS CODED WJ	96 - 107A				
WJ		REPLACE PARTS CODED	96 - 108A	WS	F100-PW-229	PARTS CODED WS	63 - 34
WJ		WH IN COMPLETE SETS		WS		REPLACE PARTS CODED	63 - 42
WJ		ONLY		WS		WR FOR 4068824-800	63 - 115
WK	F100-PW-229	PARTS CODED WK ARE	1 - 11	WT	F100-PW-229	PARTS CODED WT ARE	53 - 40
WK		REPLACED BY PARTS	62 -	WT		REPLACED BY PARTS	
WK		CODED WL AFTER		WT		CODED WU AFTER	
WK		ACCOMPLISHMENT OF		WT		ACCOMPLISHMENT OF	
WK		T.O. 2J-F100229(IV)-506		WT		CP95QA081	
WL	F100-PW-229	PARTS CODED WL	1 - 11	WU	F100-PW-229	PARTS CODED WU	53 - 40
WL		REPLACE PARTS CODED	62 -	WU		REPLACE PARTS CODED	
WL		WK AFTER		WU		WT AFTER	
WL		ACCOMPLISHMENT OF		WU		ACCOMPLISHMENT OF	
WL		T.O. 2J-F100229(IV)-506		WU		CP95QA081	
WM	F100-PW-229	PARTS CODED WM ARE	1 - 11	WV	F100-PW-229	PARTS CODED WV ARE	80 - 21
WM		REPLACED BY PARTS	62 -	WV		REPLACED BY PARTS	
WM		CODED WN AFTER		WV		CODED WW AFTER	
WM		ACCOMPLISHMENT OF		WV		ACCOMPLISHMENT OF	
WM		T.O. 2J-F100229(IV)-506		WV		T.O. 2J-F100229(II)-561	
WN	F100-PW-229	PARTS CODED WN	1 - 11	WW	F100-PW-229	PARTS CODED WW	80 - 21
WN		REPLACE PARTS CODED	62 -	WW		REPLACE PARTS CODED	
WN		WM AFTER		WW		WV AFTER	
WN		ACCOMPLISHMENT OF		WW		ACCOMPLISHMENT OF	
WN		T.O. 2J-F100229(IV)-506		WW		T.O. 2J-F100229(II)-561	
WP	F100-PW-229	PARTS CODED WP ARE	63 - 34	WX		Not Used	
WP		SUPERSEDED BY PARTS	63 - 42				
WP		CODED WQ FOR	63 - 115				
WP		4068724-800		WY		Not Used	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
WZ	F100-PW-229	PARTS CODED WZ ARE	15 - 71
WZ		REPLACED BY PARTS	75 - 76
WZ		CODED XA IN COMPLETE	
WZ		SETS ONLY AFTER	
WZ		ACCOMPLISHMENT OF	
WZ		T.O. 2J-F100229-551	
XA	F100-PW-229	PARTS CODED XA	15 - 68
XA		REPLACE PARTS CODED	15 - 69
XA		WZ IN COMPLETE SETS	15 - 70
XA		ONLY AFTER	15 - 71
XA		ACCOMPLISHMENT OF	75 - 76
XA		T.O. 2J-F100229-551	75 - 77
XB	F100-PW-229	PARTS CODED XB ARE	1 - 13
XB		REPLACED BY PARTS	55 - 46
XB		CODED XC AFTER	71 -
XB		ACCOMPLISHMENT OF	
XB		T.O. 2J-F100229(III)-519	
XC	F100-PW-229	PARTS CODED XC	1 - 13
XC		REPLACE PARTS CODED	55 - 46
XC		XB AFTER	71 -
XC		ACCOMPLISHMENT OF	
XC		T.O. 2J-F100229(III)-519	
XD	F100-PW-229	PARTS CODED XD ARE	1 - 13
XD		INTERCHANGEABLE WITH	55 - 46
XD		PARTS CODED XE	71 -
XE	F100-PW-229	PARTS CODED XE ARE	1 - 13
XE		INTERCHANGEABLE WITH	55 - 46
XE		PARTS CODED XD	71 -
XF	F100-PW-229	PARTS CODED XF ARE	1 - 13
XF		REPLACED BY PARTS	55 - 46
XF		CODED XG AFTER	71 -
XF		ACCOMPLISHMENT OF	
XF		T.O. 2J-F100229(III)-519	
XG	F100-PW-229	PARTS CODED XG	1 - 13
XG		REPLACE PARTS CODED	55 - 46
XG		XF AFTER	71 -
XG		ACCOMPLISHMENT OF	
XG		T.O. 2J-F100229(III)-519	
XH	F100-PW-229	PARTS CODED XH ARE	1 - 16
XH		REPLACED BY PARTS	76 -
XH		CODED XJ AFTER	99 - 42
XH		ACCOMPLISHMENT OF	
XH		T.O. 2J-F100229(II)-531	
XJ	F100-PW-229	PARTS CODED XJ	1 - 16
XJ		REPLACE PARTS CODED	76 -
XJ		XH AFTER	99 - 42
XJ		ACCOMPLISHMENT OF	
XJ		T.O. 2J-F100229(II)-531	
XK	F100-PW-229	PARTS CODED XK ARE	1 - 16
XK		REPLACED BY PARTS	76 -
XK		CODED XL AFTER	99 - 42
XK		ACCOMPLISHMENT OF	
XK		T.O. 2J-F100229(II)-531	
XL	F100-PW-229	PARTS CODED XL	1 - 16
XL		REPLACE PARTS CODED	76 -
XL		XK AFTER	99 - 42
XL		ACCOMPLISHMENT OF	
XL		T.O. 2J-F100229(II)-531	
XM	F100-PW-229	PARTS CODED XM ARE	1 - 12
XM		REPLACED BY PARTS	67 -
XM		CODED XN	
XN	F100-PW-229	PARTS CODED XN	1 - 12
XN		REPLACE PARTS CODED	67 -
XN		XM	
XP	F100-PW-229	PARTS CODED XP ARE	1 - 12
XP		REPLACED BY PARTS	67 -
XP		CODE XQ AFTER	
XP		ACCOMPLISHMENT OF	
XP		T.O. 2J-F100229(I)-513	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
XQ	F100-PW-229	PARTS CODED XQ	1 - 12
XQ		REPLACE PARTS CODED	67 -
XQ		XP AFTER	
XQ		ACCOMPLISHMENT OF	
XQ		T.O. 2J-F100229(I)-513	
XR	F100-PW-229	PARTS CODED XR ARE	1 - 16
XR		REPLACED BY PARTS	76 -
XR		CODED XS AFTER	99 - 42
XR		ACCOMPLISHMENT OF	
XR		T.O. 2J-F100229(VI)-507	
XS	F100-PW-229	PARTS CODED XS	1 - 16
XS		REPLACE PARTS CODED	76 -
XS		XR AFTER	99 - 42
XS		ACCOMPLISHMENT OF	
XS		T.O. 2J-F100229(VI)-507	
XT	F100-PW-229	PARTS CODED XT ARE	1 - 16
XT		REPLACED BY PARTS	76 -
XT		CODED XU AFTER	99 - 42
XT		ACCOMPLISHMENT OF	
XT		T.O. 2J-F100229(VI)-507	
XU	F100-PW-229	PARTS CODED XU	1 - 16
XU		REPLACE PARTS CODED	76 -
XU		XT AFTER	99 - 42
XU		ACCOMPLISHMENT OF	
XU		T.O. 2J-F100229(VI)-507	
XV	F100-PW-229	PARTS CODED XV ARE	86 - 22
XV		REPLACED BY PARTS	100 -
XV		CODED XW AFTER	
XV		ACCOMPLISHMENT OF	
XV		CP95QA006	
XW	F100-PW-229	PARTS CODED XW	86 - 22
XW		REPLACE PARTS CODED	100 -
XW		XV AFTER	
XW		ACCOMPLISHMENT OF	
XW		CP95QA006	
XX	F100-PW-229	PARTS CODED XX ARE	86 - 22
XX		REPLACED BY PARTS	100 -
XX		CODED XY AFTER	
XX		ACCOMPLISHMENT OF	
XX		CP95QA006	
XY	F100-PW-229	PARTS CODED XY	86 - 22
XY		REPLACE PARTS CODED	100 -
XY		XX AFTER	
XY		ACCOMPLISHMENT OF	
XY		CP95QA006	
XZ	F100-PW-229	PARTS CODED XZ ARE	86 - 22
XZ		REPLACED BY PARTS	100 -
XZ		CODED YA AFTER	
XZ		ACCOMPLISHMENT OF	
XZ		CP95QA006	
YA	F100-PW-229	PARTS CODED YA	86 - 22
YA		REPLACE PARTS CODED	100 -
YA		XZ AFTER	
YA		ACCOMPLISHMENT OF	
YA		CP95QA006	
YB	F100-PW-229	PARTS CODED YB ARE	86 - 22
YB		REPLACED BY PARTS	100 -
YB		CODED YC AFTER	
YB		ACCOMPLISHMENT OF	
YB		CP95QA006	
YC	F100-PW-229	PARTS CODED YC	86 - 22
YC		REPLACE PARTS CODED	100 -
YC		YB AFTER	
YC		ACCOMPLISHMENT OF	
YC		CP95QA006	
YD	F100-PW-229	PARTS CODED YD ARE	86 - 22
YD		REPLACED BY PARTS	100 -
YD		CODED YE AFTER	
YD		ACCOMPLISHMENT OF	
YD		CP95QA006	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
YE	F100-PW-229	PARTS CODED YE	86 - 22
YE		REPLACE PARTS CODED	100 -
YE		YD AFTER	
YE		ACCOMPLISHMENT OF	
YE		CP95QA006	
YF	F100-PW-229	PARTS CODED YF ARE	86 - 22
YF		REPLACED BY PARTS	100 -
YF		CODED YG AFTER	
YF		ACCOMPLISHMENT OF	
YF		CP95QA006	
YG	F100-PW-229	PARTS CODED YG	86 - 22
YG		REPLACE PARTS CODED	100 -
YG		YF AFTER	
YG		ACCOMPLISHMENT OF	
YG		CP95QA006	
YH	F100-PW-229	PARTS CODED YH ARE	53 - 36
YH		REPLACED BY PARTS	
YH		CODED YJ AFTER	
YH		ACCOMPLISHMENT OF	
YH		CP94QA139	
YJ	F100-PW-229	PARTS CODED YJ	53 - 36
YJ		REPLACE PARTS CODED	
YJ		YH AFTER	
YJ		ACCOMPLISHMENT OF	
YJ		CP94QA139	
YK	F100-PW-229	PARTS CODED YK ARE	62 - 40
YK		REPLACED BY PARTS	65 - 1
YK		CODED YL AFTER	
YK		ACCOMPLISHMENT OF	
YK		T.O. 2J-F100229(IV)-503	
YL	F100-PW-229	PARTS CODED YL	62 - 40A
YL		REPLACE PARTS CODED	65 - 1
YL		YK AFTER	
YL		ACCOMPLISHMENT OF	
YL		T.O. 2J-F100229(IV)-503	
YM	F100-PW-229	PARTS CODED YM ARE	62 - 40
YM		REPLACED BY PARTS	62 - 40A
YM		CODED YN AFTER	65 - 1
YM		ACCOMPLISHMENT OF	
YM		T.O. 2J-F100229(IV)-505	
YN	F100-PW-229	PARTS CODED YN	62 - 40
YN		REPLACE PARTS CODED	65 - 1
YN		YM AFTER	
YN		ACCOMPLISHMENT OF	
YN		T.O. 2J-F100229(IV)-505	
YP	F100-PW-229	PARTS CODED YP ARE	85 - 19
YP		REPLACED BY PARTS	96 -
YP		CODED YQ AFTER	
YP		ACCOMPLISHMENT OF	
YP		CP96QA097	
YQ	F100-PW-229	PARTS CODED YQ	85 - 19
YQ		REPLACE PARTS CODED	96 -
YQ		YP AFTER	
YQ		ACCOMPLISHMENT OF	
YQ		CP96QA097	
YR	F100-PW-229	PARTS CODED YR ARE	85 - 19
YR		REPLACED BY PARTS	96 -
YR		CODED YS AFTER	
YR		ACCOMPLISHMENT OF	
YR		CP96QA097	
YS	F100-PW-229	PARTS CODED YS	85 - 19
YS		REPLACE PARTS CODED	96 -
YS		YR AFTER	
YS		ACCOMPLISHMENT OF	
YS		CP96QA097	
YT	F100-PW-229	PARTS CODED YT ARE	85 - 19
YT		REPLACED BY PARTS	96 -
YT		CODED YU AFTER	
YT		ACCOMPLISHMENT OF	
YT		CP96QA097	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
YU	F100-PW-229	PARTS CODED YU	85 - 19
YU		REPLACE PARTS CODED	96 -
YU		YT AFTER	
YU		ACCOMPLISHMENT OF	
YU		CP96QA097	
YV	F100-PW-229	PARTS CODED YV ARE	85 - 19
YV		REPLACED BY PARTS	96 -
YV		CODED YW AFTER	
YV		ACCOMPLISHMENT OF	
YV		CP96QA097	
YW	F100-PW-229	PARTS CODED YW	85 - 19
YW		REPLACE PARTS CODED	96 -
YW		YV AFTER	
YW		ACCOMPLISHMENT OF	
YW		CP96QA097	
YX	F100-PW-229	PARTS CODED YX ARE	85 - 19
YX		REPLACED BY PARTS	96 -
YX		CODED YY AFTER	
YX		ACCOMPLISHMENT OF	
YX		CP96QA097	
YY	F100-PW-229	PARTS CODED YY	85 - 19
YY		REPLACE PARTS CODED	96 -
YY		YX AFTER	
YY		ACCOMPLISHMENT OF	
YY		CP96QA097	
YZ	F100-PW-229	PARTS CODED YZ ARE	85 - 19
YZ		REPLACED BY PARTS	96 -
YZ		CODED ZA AFTER	
YZ		ACCOMPLISHMENT OF	
YZ		CP96QA097	
ZA	F100-PW-229	PARTS CODED ZA	85 - 19
ZA		REPLACE PARTS CODED	96 -
ZA		YZ AFTER	
ZA		ACCOMPLISHMENT OF	
ZA		CP96QA097	
ZB	F100-PW-229	PARTS CODED ZB ARE	85 - 19
ZB		REPLACED BY PARTS	96 -
ZB		CODED ZC AFTER	
ZB		ACCOMPLISHMENT OF	
ZB		CP96QA097	
ZC	F100-PW-229	PARTS CODED ZC	85 - 19
ZC		REPLACE PARTS CODED	96 -
ZC		ZB AFTER	
ZC		ACCOMPLISHMENT OF	
ZC		CP96QA097	
ZD	F100-PW-229	PARTS CODED ZD ARE	88 - 24
ZD		REPLACED BY PARTS	88 - 26
ZD		CODED ZE AFTER	88 - 28
ZD		ACCOMPLISHMENT OF	88 - 30
ZD		CP96QA097	
ZE	F100-PW-229	PARTS CODED ZE	88 - 24
ZE		REPLACE PARTS CODED	88 - 26
ZE		ZD AFTER	88 - 28
ZE		ACCOMPLISHMENT OF	88 - 30
ZE		CP96QA097	
ZF	F100-PW-229	PARTS CODED ZF ARE	88 - 24
ZF		REPLACED BY PARTS	88 - 26
ZF		CODED ZG AFTER	88 - 28
ZF		ACCOMPLISHMENT OF	88 - 30
ZF		CP96QA097	
ZG	F100-PW-229	PARTS CODED ZG	88 - 24
ZG		REPLACE PARTS CODED	88 - 26
ZG		ZF AFTER	88 - 28
ZG		ACCOMPLISHMENT OF	88 - 30
ZG		CP96QA097	
ZH	F100-PW-229	PARTS CODED ZH ARE	88 - 24
ZH		REPLACED BY PARTS	88 - 26
ZH		CODED ZJ AFTER	88 - 28
ZH		ACCOMPLISHMENT OF	88 - 30
ZH		CP96QA097	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
ZJ	F100-PW-229	PARTS CODED ZJ	88 - 24
ZJ		REPLACE PARTS CODED	88 - 26
ZJ		ZH AFTER	88 - 28
ZJ		ACCOMPLISHMENT OF	88 - 30
ZJ		CP96QA097	
ZK	F100-PW-229	PARTS CODED ZK ARE	96 - 50
ZK		REPLACED BY PARTS	
ZK		CODED ZL IN COMPLETE	
ZK		SETS ONLY AFTER	
ZK		ACCOMPLISHMENT OF	
ZK		T.O. 2J-F100229(II)-558	
ZL	F100-PW-229	PARTS CODED ZL	96 - 50
ZL		REPLACE PARTS CODED	
ZL		ZK IN COMPLETE SETS	
ZL		ONLY AFTER	
ZL		ACCOMPLISHMENT OF	
ZL		T.O. 2J-F100229(II)-558	
ZM	F100-PW-229	PARTS CODED ZM ARE	84 - 8
ZM		REPLACED BY PARTS	94 -
ZM		CODED ZN AFTER	
ZM		ACCOMPLISHMENT OF	
ZM		T.O. 2J-F100229(II)-555	
ZN	F100-PW-229	PARTS CODED ZN	84 - 8
ZN		REPLACE PARTS CODED	94 -
ZN		ZM AFTER	
ZN		ACCOMPLISHMENT OF	
ZN		T.O. 2J-F100229(II)-555	
ZP	F100-PW-229	PARTS CODED ZP ARE	84 - 8
ZP		REPLACED BY PARTS	94 -
ZP		CODED ZQ AFTER	
ZP		ACCOMPLISHMENT OF	
ZP		T.O. 2J-F100229(II)-555	
ZQ	F100-PW-229	PARTS CODED ZQ	84 - 8
ZQ		REPLACE PARTS CODED	94 -
ZQ		ZP AFTER	
ZQ		ACCOMPLISHMENT OF	
ZQ		T.O. 2J-F100229(II)-555	
ZR	F100-PW-229	PARTS CODED ZR ARE	84 - 8
ZR		REPLACED BY PARTS	94 -
ZR		CODED ZS AFTER	
ZR		ACCOMPLISHMENT OF	
ZR		T.O. 2J-F100229(II)-555	
ZS	F100-PW-229	PARTS CODED ZS	84 - 8
ZS		REPLACE PARTS CODED	94 -
ZS		ZR AFTER	
ZS		ACCOMPLISHMENT OF	
ZS		T.O. 2J-F100229(II)-555	
ZT	F100-PW-229	PARTS CODED ZT ARE	84 - 8
ZT		REPLACED BY PARTS	94 -
ZT		CODED ZU AFTER	
ZT		ACCOMPLISHMENT OF	
ZT		T.O. 2J-F100229(II)-555	
ZU	F100-PW-229	PARTS CODED ZU	84 - 8
ZU		REPLACE PARTS CODED	94 -
ZU		ZT AFTER	
ZU		ACCOMPLISHMENT OF	
ZU		T.O. 2J-F100229(II)-555	
ZV	F100-PW-229	PARTS CODED ZV ARE	84 - 8
ZV		REPLACED BY PARTS	94 -
ZV		CODED ZW AFTER	
ZV		ACCOMPLISHMENT OF	
ZV		T.O. 2J-F100229(II)-555	
ZW	F100-PW-229	PARTS CODED ZW	84 - 8
ZW		REPLACE PARTS CODED	94 -
ZW		ZV AFTER	
ZW		ACCOMPLISHMENT OF	
ZW		T.O. 2J-F100229(II)-555	
ZX	F100-PW-229	PARTS CODED ZX ARE	84 - 8
ZX		REPLACED BY PARTS	94 -
ZX		CODED ZY AFTER	
ZX		ACCOMPLISHMENT OF	
ZX		T.O. 2J-F100229(II)-555	


USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
ZY	F100-PW-229	PARTS CODED ZY	84 - 8
ZY		REPLACE PARTS CODED	94 -
ZY		ZX AFTER	
ZY		ACCOMPLISHMENT OF	
ZY		T.O. 2J-F100229(II)-555	
ZZ	F100-PW-229	PARTS CODED ZZ ARE	84 - 8
ZZ		REPLACED BY PARTS	94 -
ZZ		CODED AAA AFTER	
ZZ		ACCOMPLISHMENT OF	
ZZ		T.O. 2J-F100229(II)-555	
AAA	F100-PW-229	PARTS CODED AAA	84 - 8
AAA		REPLACE PARTS CODED	94 -
AAA		ZZ AFTER	
AAA		ACCOMPLISHMENT OF	
AAA		T.O. 2J-F100229(II)-555	
AAB	F100-PW-229	PARTS CODED AAB ARE	84 - 8
AAB		REPLACED BY PARTS	94 -
AAB		CODED AAC AFTER	
AAB		ACCOMPLISHMENT OF	
AAB		T.O. 2J-F100229(II)-555	
AAC	F100-PW-229	PARTS CODED AAC	84 - 8
AAC		REPLACE PARTS CODED	94 -
AAC		AAB AFTER	
AAC		ACCOMPLISHMENT OF	
AAC		T.O. 2J-F100229(II)-555	
AAD	F100-PW-229	PARTS CODED AAD ARE	1 - 16
AAD		REPLACED BY PARTS	76 -
AAD		CODED AAE AFTER	99 - 42
AAD		ACCOMPLISHMENT OF	
AAD		T.O. 2J-F100229(II)-550	
AAE	F100-PW-229	PARTS CODED AAE	1 - 16
AAE		REPLACE PARTS CODED	76 -
AAE		AAD AFTER	99 - 42
AAE		ACCOMPLISHMENT OF	
AAE		T.O. 2J-F100229(II)-550	
AAF	F100-PW-229	PARTS CODED AAF ARE	1 - 16
AAF		REPLACED BY PARTS	76 -
AAF		CODED AAG AFTER	99 - 42
AAF		ACCOMPLISHMENT OF	
AAF		T.O. 2J-F100229(II)-550	
AAG	F100-PW-229	PARTS CODED AAG	1 - 16
AAG		REPLACE PARTS CODED	76 -
AAG		AAF AFTER	99 - 42
AAG		ACCOMPLISHMENT OF	
AAG		T.O. 2J-F100229(II)-550	
AAH	F100-PW-229	PARTS CODED AAH ARE	1 - 16
AAH		REPLACED BY PARTS	76 -
AAH		CODED AAJ AFTER	99 - 42
AAH		ACCOMPLISHMENT OF	
AAH		T.O. 2J-F100229(II)-550	
AAJ	F100-PW-229	PARTS CODED AAJ	1 - 16
AAJ		REPLACE PARTS CODED	76 -
AAJ		AAH AFTER	99 - 42
AAJ		ACCOMPLISHMENT OF	
AAJ		T.O. 2J-F100229(II)-550	
AAK	F100-PW-229	PARTS CODED AAK ARE	1 - 16
AAK		REPLACED BY PARTS	76 -
AAK		CODED AAL AFTER	99 - 42
AAK		ACCOMPLISHMENT OF	
AAK		T.O. 2J-F100229(II)-550	
AAL	F100-PW-229	PARTS CODED AAL	1 - 16
AAL		REPLACE PARTS CODED	76 -
AAL		AAK AFTER	99 - 42
AAL		ACCOMPLISHMENT OF	
AAL		T.O. 2J-F100229(II)-550	
AAM	F100-PW-229	PARTS CODED AAM ARE	1 - 16
AAM		REPLACED BY PARTS	76 -
AAM		CODED AAN AFTER	99 - 42
AAM		ACCOMPLISHMENT OF	
AAM		T.O. 2J-F100229(II)-550	

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER	USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
AAN	F100-PW-229	PARTS CODED AAN	1 - 16				
AAN		REPLACE PARTS CODED	76 -	AAW	F100-PW-229	PARTS CODED AAW	86 - 22
AAN		AAM AFTER	99 - 42	AAW		REPLACE PARTS CODED	100 -
AAN		ACCOMPLISHMENT OF		AAW		AAV AFTER	
AAN		T.O. 2J-F100229(II)-550		AAW		ACCOMPLISHMENT OF	
				AAW		T.O. 2J-F100229(II)-552	
AAP	F100-PW-229	PARTS CODED AAP ARE	73 - 5A				
AAP		REPLACED BY PARTS	73 - 6	AAX	F100-PW-229	PARTS CODED AAX ARE	41 - 14
AAP		CODED AAQ AFTER	73 - 7	AAX		REPLACED BY PARTS	51 - 18
AAP		ACCOMPLISHMENT OF	73 - 42	AAX		CODED AAY IN COMPLETE	
AAP		T.O. 2J-F100229(III)-527,	73 - 50	AAX		SETS ONLY AFTER	
AAP		-528, -529, AND -530	73 - 53	AAX		ACCOMPLISHMENT OF	
AAP			73 - 61	AAX		T.O. 5E1-2-15-509 AND T.O.	
				AAX		6J3-4-117-520	
AAQ	F100-PW-229	PARTS CODED AAQ	73 - 5A				
AAQ		REPLACE PARTS CODED	73 - 6A	AAY	F100-PW-229	PARTS CODED AAY	41 - 14
AAQ		AAP AFTER	73 - 7	AAY		REPLACE PARTS CODED	51 - 18
AAQ		ACCOMPLISHMENT OF	73 - 42	AAY		AAX IN COMPLETE SETS	
AAQ		T.O. 2J-F100229(III)-527,	73 - 50	AAY		ONLY AFTER	
AAQ		-528, -529, AND -530	73 - 53	AAY		ACCOMPLISHMENT OF	
AAQ			73 - 61	AAY		T.O. 5E1-2-15-509 AND T.O.	
				AAY		6J3-4-117-520	
AAR	F100-PW-229	PARTS CODED AAR ARE	86 - 12				
AAR		REPLACED BY PARTS		AAZ	F100-PW-229	PARTS CODED AAZ ARE	79 - 1
AAR		CODED AAS AFTER		AAZ		REPLACED BY PARTS	79 - 2
AAR		ACCOMPLISHMENT OF		AAZ		CODED ABA AFTER	79 - 3
AAR		CP94QA113		AAZ		ACCOMPLISHMENT OF	79 - 4
				AAZ		T.O. 2J-F100229(II)-559 OR	79 - 5
				AAZ		-560	79 - 6
AAS	F100-PW-229	PARTS CODED AAS	86 - 12	AAZ			79 - 7
AAS		REPLACE PARTS CODED		AAZ			79 - 8
AAS		AAR AFTER		AAZ			79 - 9
AAS		ACCOMPLISHMENT OF		AAZ			79 - 10
AAS		CP94QA113		AAZ			79 - 11
				AAZ			79 - 12
				AAZ			79 - 13
AAT		Not Used		AAZ			79 - 14
				AAZ			79 - 15
				AAZ			79 - 16
AAU		Not Used		AAZ			79 - 17
				AAZ			79 - 23
				AAZ			79 - 24
AAV	F100-PW-229	PARTS CODED AAV ARE	86 - 22	AAZ			79 - 25
AAV		REPLACED BY PARTS	100 -	AAZ			79 - 26
AAV		CODED AAW AFTER		AAZ			79 - 27
AAV		ACCOMPLISHMENT OF		AAZ			79 - 28
AAV		T.O. 2J-F100229(II)-552		AAZ			79 - 29
				AAZ			79 - 30

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER	USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
AAZ			79 - 31				
AAZ			79 - 32				
AAZ			85 - 5				
ABA	F100-PW-229	PARTS CODED ABA	79 - 1				
ABA		REPLACE PARTS CODED	79 - 2				
ABA		AAZ AFTER	79 - 3				
ABA		ACCOMPLISHMENT OF	79 - 4				
ABA		T.O. 2J-F100229(II)-559 OR	79 - 5				
ABA		-560	79 - 6				
ABA			79 - 9A				
ABA			79 - 9B				
ABA			79 - 9C				
ABA			79 - 17A				
ABA			79 - 23				
ABA			79 - 24				
ABA			79 - 25A				
ABA			79 - 25D				
ABA			79 - 26A				
ABA			79 - 26D				
ABA			79 - 27A				
ABA			79 - 27B				
ABA			79 - 27C				
ABA			79 - 27D				
ABA			79 - 28A				
ABA			79 - 28B				
ABA			79 - 28C				
ABA			79 - 28D				
ABA			79 - 28E				
ABA			79 - 29				
ABA			79 - 30				
ABA			79 - 31				
ABA			79 - 32				
ABA			79 - 32A				
ABA			79 - 32B				
ABA			85 - 5				

USABLE ON CODE	MODEL DESIGNATION	DESCRIPTION	FIGURE & INDEX NUMBER
YM	F100-PW-229	PARTS CODED YM ARE	62 - 39
YM		REPLACED BY PARTS	65 - 1
YM		CODED YN AFTER	
YM		ACCOMPLISHMENT OF	
YM		CP954QA060	
YN	F100-PW-229	PARTS CODED YN	62 - 39A
YN		REPLACE PARTS CODED	65 - 1
YN		YM AFTER	
YN		ACCOMPLISHMENT OF	
YN		CP95QA060	
YP	F100-PW-229	PARTS CODED YP ARE	85 - 19
YP		REPLACED BY PARTS	96 -
YP		CODED YQ AFTER	
YP		ACCOMPLISHMENT OF	
YP		CP96QA097	
YQ	F100-PW-229	PARTS CODED YQ	85 - 19
YQ		REPLACE PARTS CODED	96 -
YQ		YP AFTER	
YQ		ACCOMPLISHMENT OF	
YQ		CP96QA097	
YR	F100-PW-229	PARTS CODED YR ARE	85 - 19
YR		REPLACED BY PARTS	96 -
YR		CODED YS AFTER	
YR		ACCOMPLISHMENT OF	
YR		CP96QA097	
YS	F100-PW-229	PARTS CODED YS	85 - 19
YS		REPLACE PARTS CODED	96 -
YS		YR AFTER	
YS		ACCOMPLISHMENT OF	
YS		CP96QA097	
YT	F100-PW-229	PARTS CODED YT ARE	85 - 19
YT		REPLACED BY PARTS	96 -
YT		CODED YU AFTER	
YT		ACCOMPLISHMENT OF	
YT		CP96QA097	
YU	F100-PW-229	PARTS CODED YU	85 - 19
YU		REPLACE PARTS CODED	96 -
YU		YT AFTER	
YU		ACCOMPLISHMENT OF	
YU		CP96QA097	
YV	F100-PW-229	PARTS CODED YV ARE	85 - 19
YV		REPLACED BY PARTS	96 -
YV		CODED YW AFTER	
YV		ACCOMPLISHMENT OF	
YV		CP96QA097	
YW	F100-PW-229	PARTS CODED YW	85 - 19
YW		REPLACE PARTS CODED	96 -
YW		YV AFTER	
YW		ACCOMPLISHMENT OF	
YW		CP96QA097	
YX	F100-PW-229	PARTS CODED YX ARE	85 - 19
YX		REPLACED BY PARTS	96 -
YX		CODED YY AFTER	
YX		ACCOMPLISHMENT OF	
YX		CP96QA097	
YY	F100-PW-229	PARTS CODED YY	85 - 19
YY		REPLACE PARTS CODED	96 -
YY		YX AFTER	
YY		ACCOMPLISHMENT OF	
YY		CP96QA097	
YZ	F100-PW-229	PARTS CODED YZ ARE	85 - 19
YZ		REPLACED BY PARTS	96 -
YZ		CODED ZA AFTER	
YZ		ACCOMPLISHMENT OF	
YZ		CP96QA097	
ZA	F100-PW-229	PARTS CODED ZA	85 - 19
ZA		REPLACE PARTS CODED	96 -
ZA		YZ AFTER	
ZA		ACCOMPLISHMENT OF	
ZA		CP96QA097	

27. MODULE INDEX.

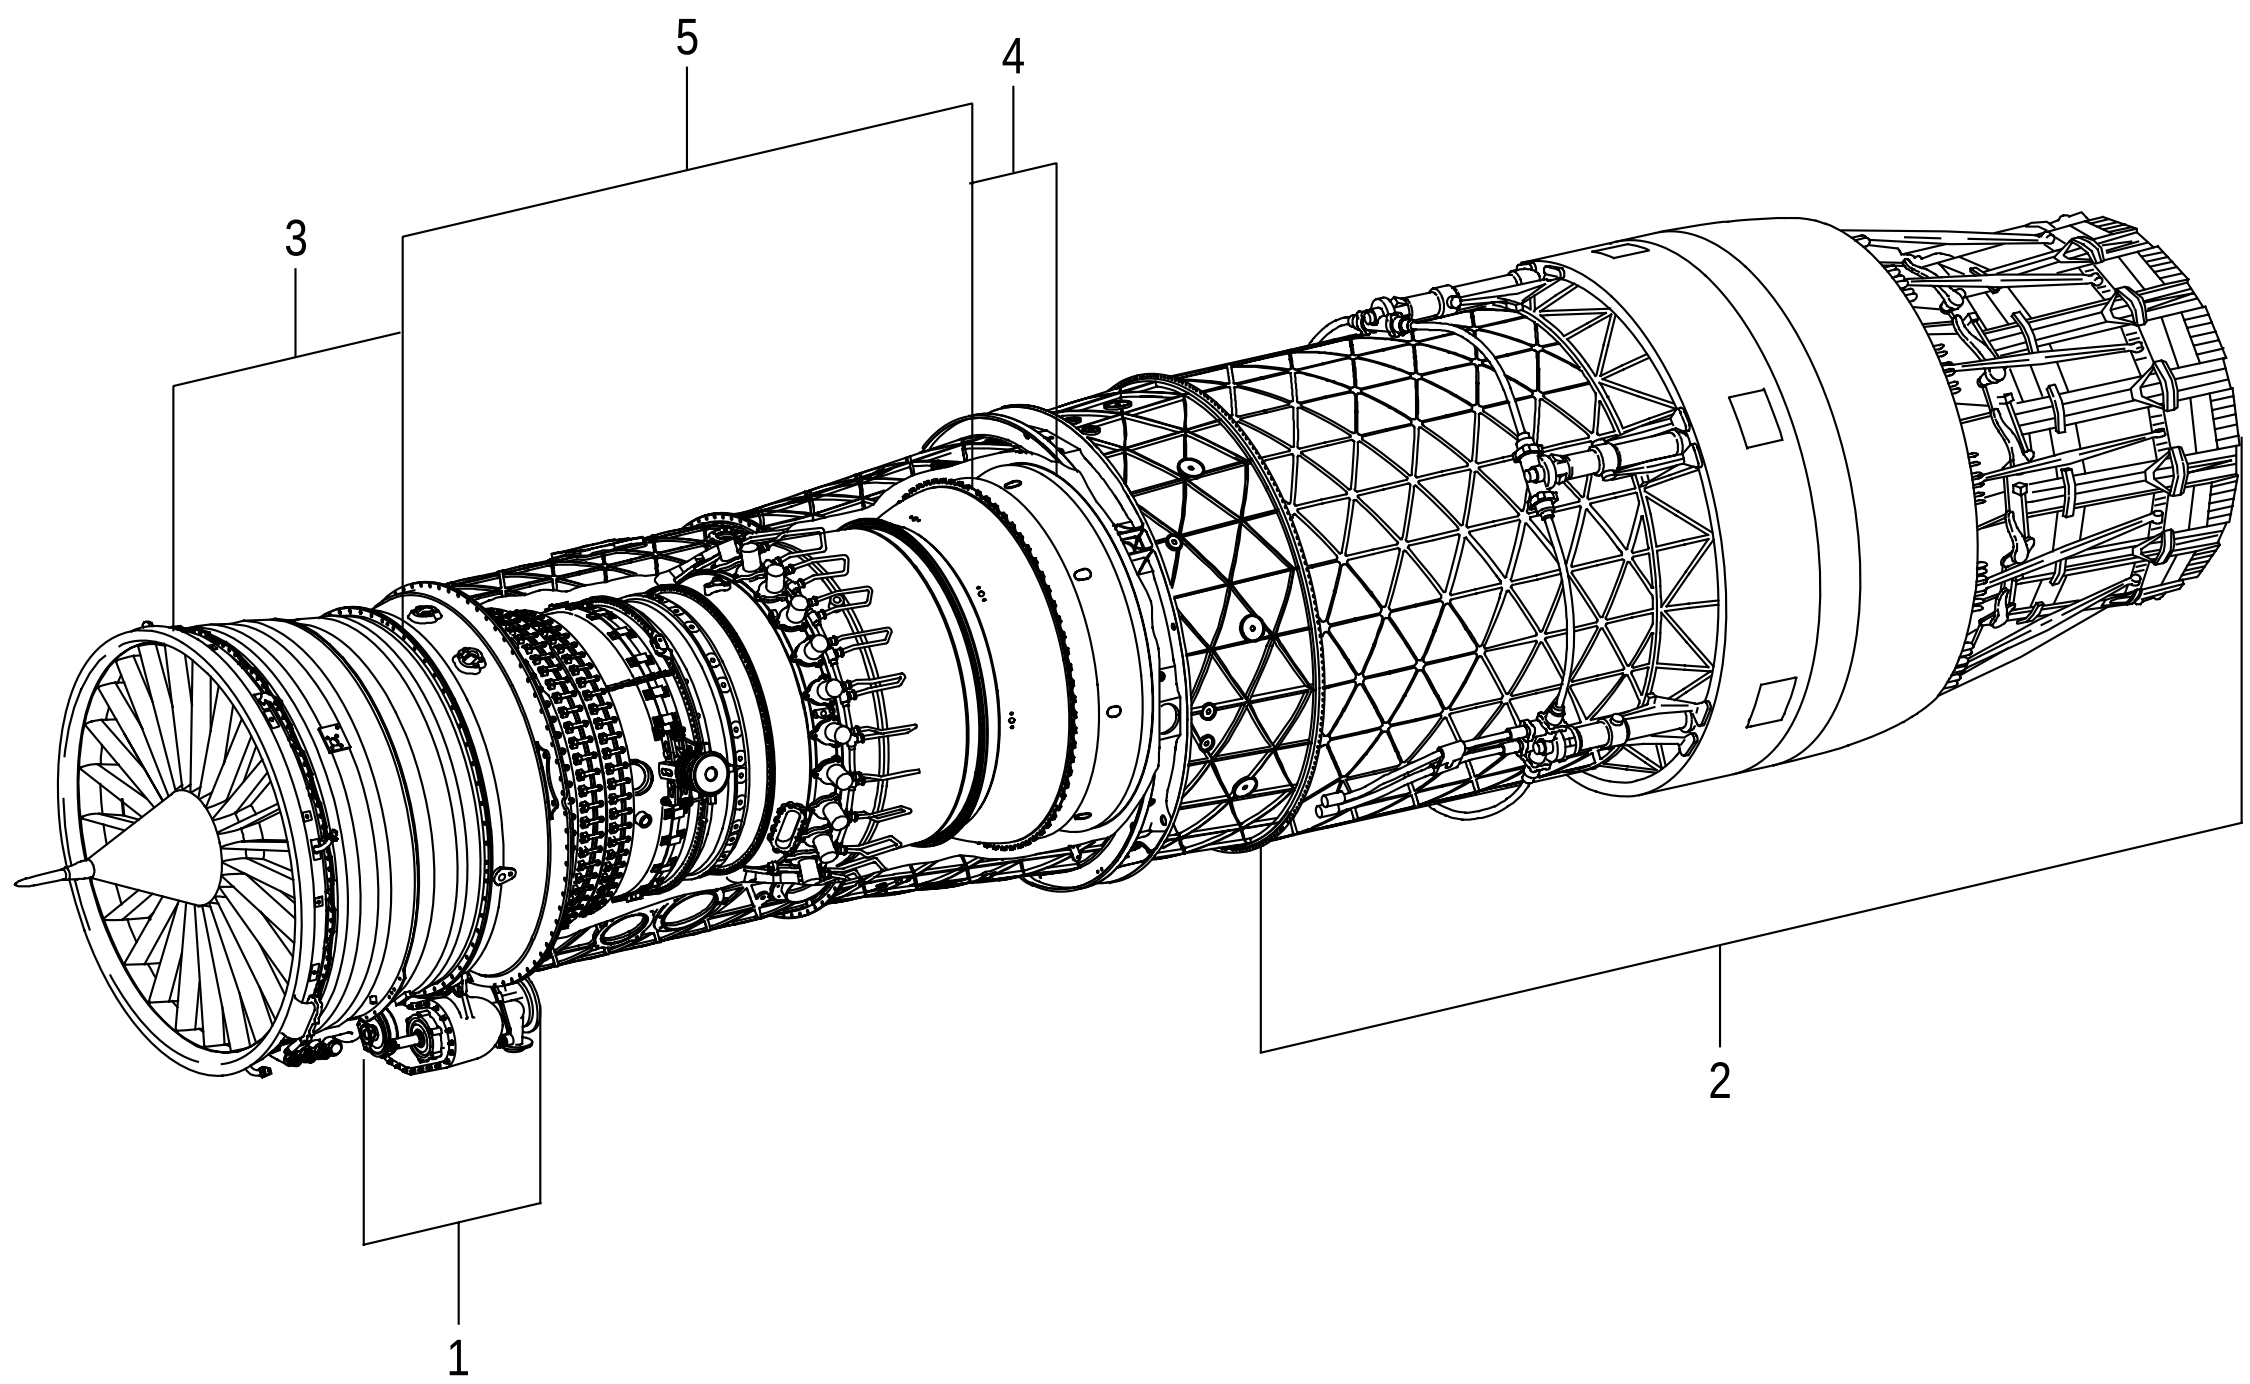

INDEX NO.	DESCRIPTION	FIGURE NO.
1	GEARBOX MODULE	58 THROUGH 61
2	AUGMENTOR DUCT AND NOZZLE MODULE	62 THROUGH 66
3	INLET/FAN MODULE	67 THROUGH 70
4	FAN DRIVE TUBINE MODULE.	71 THROUGH 73
5	ENGINE CORE MODULE	76 THROUGH 104

5976

SECTION II

MAINTENANCE PARTS LIST

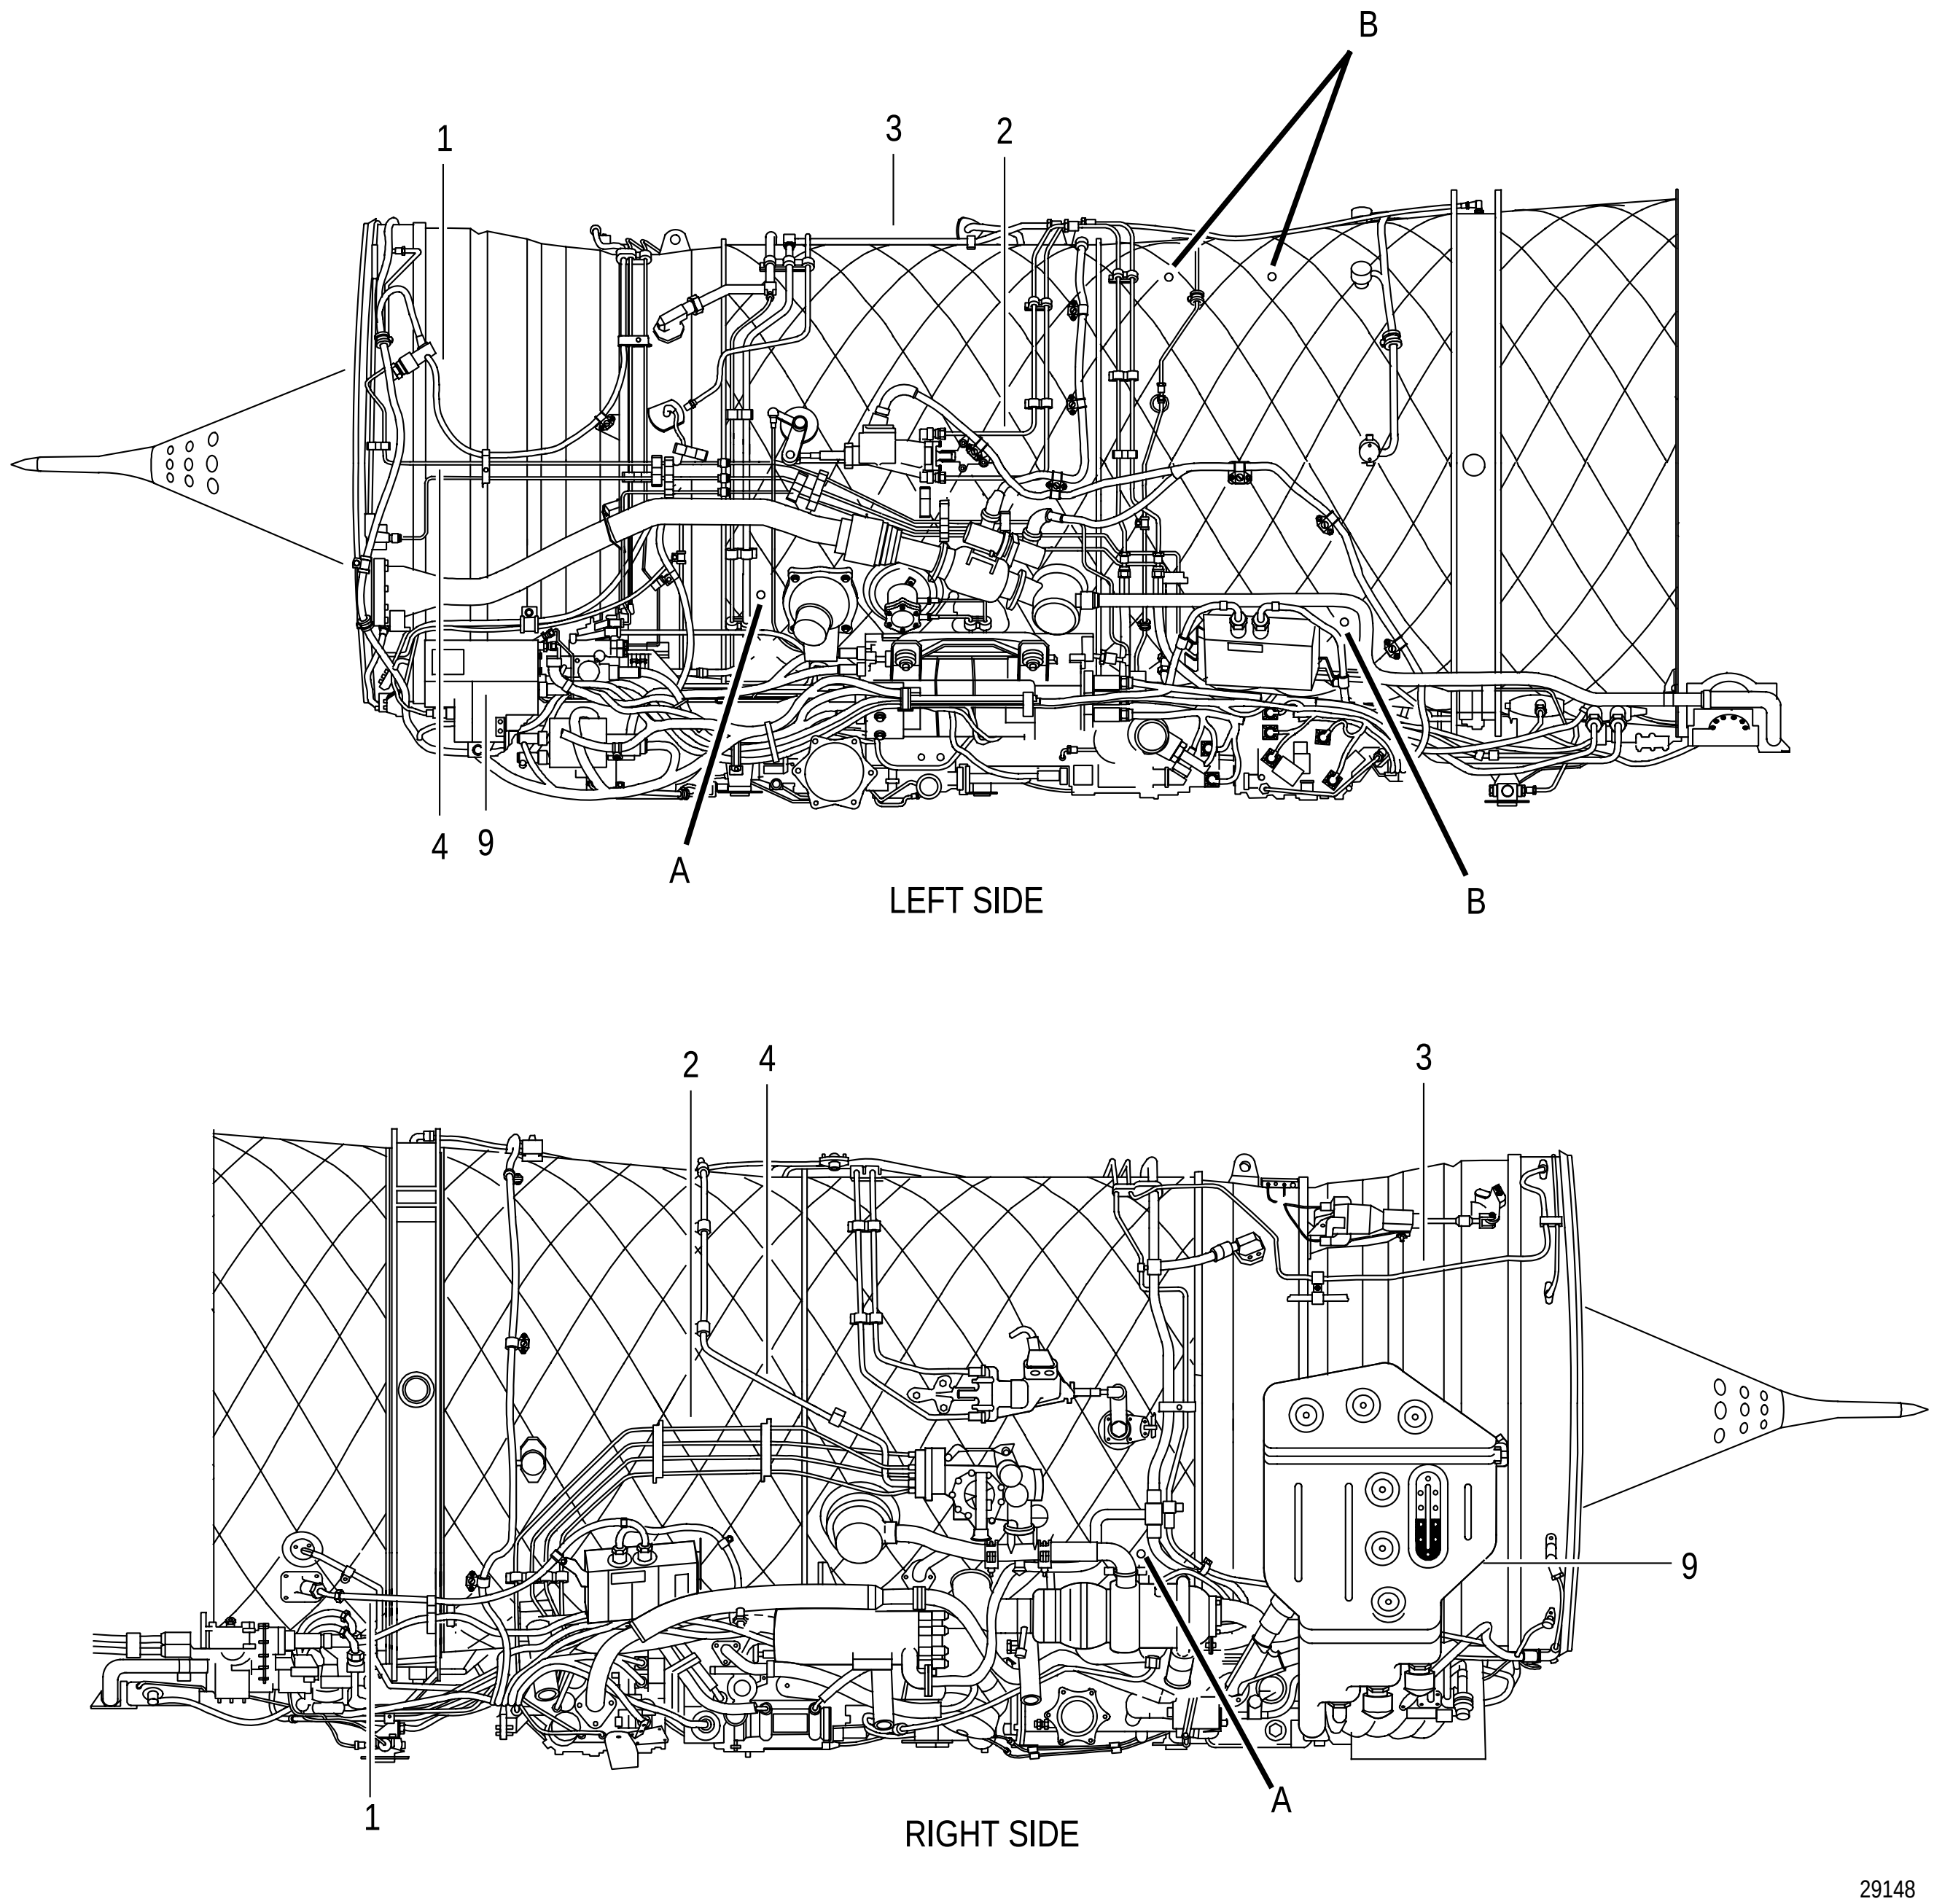


FIGURE 1. TURBO FAN ENGINE ASSY
(SHEET 1 OF 3)

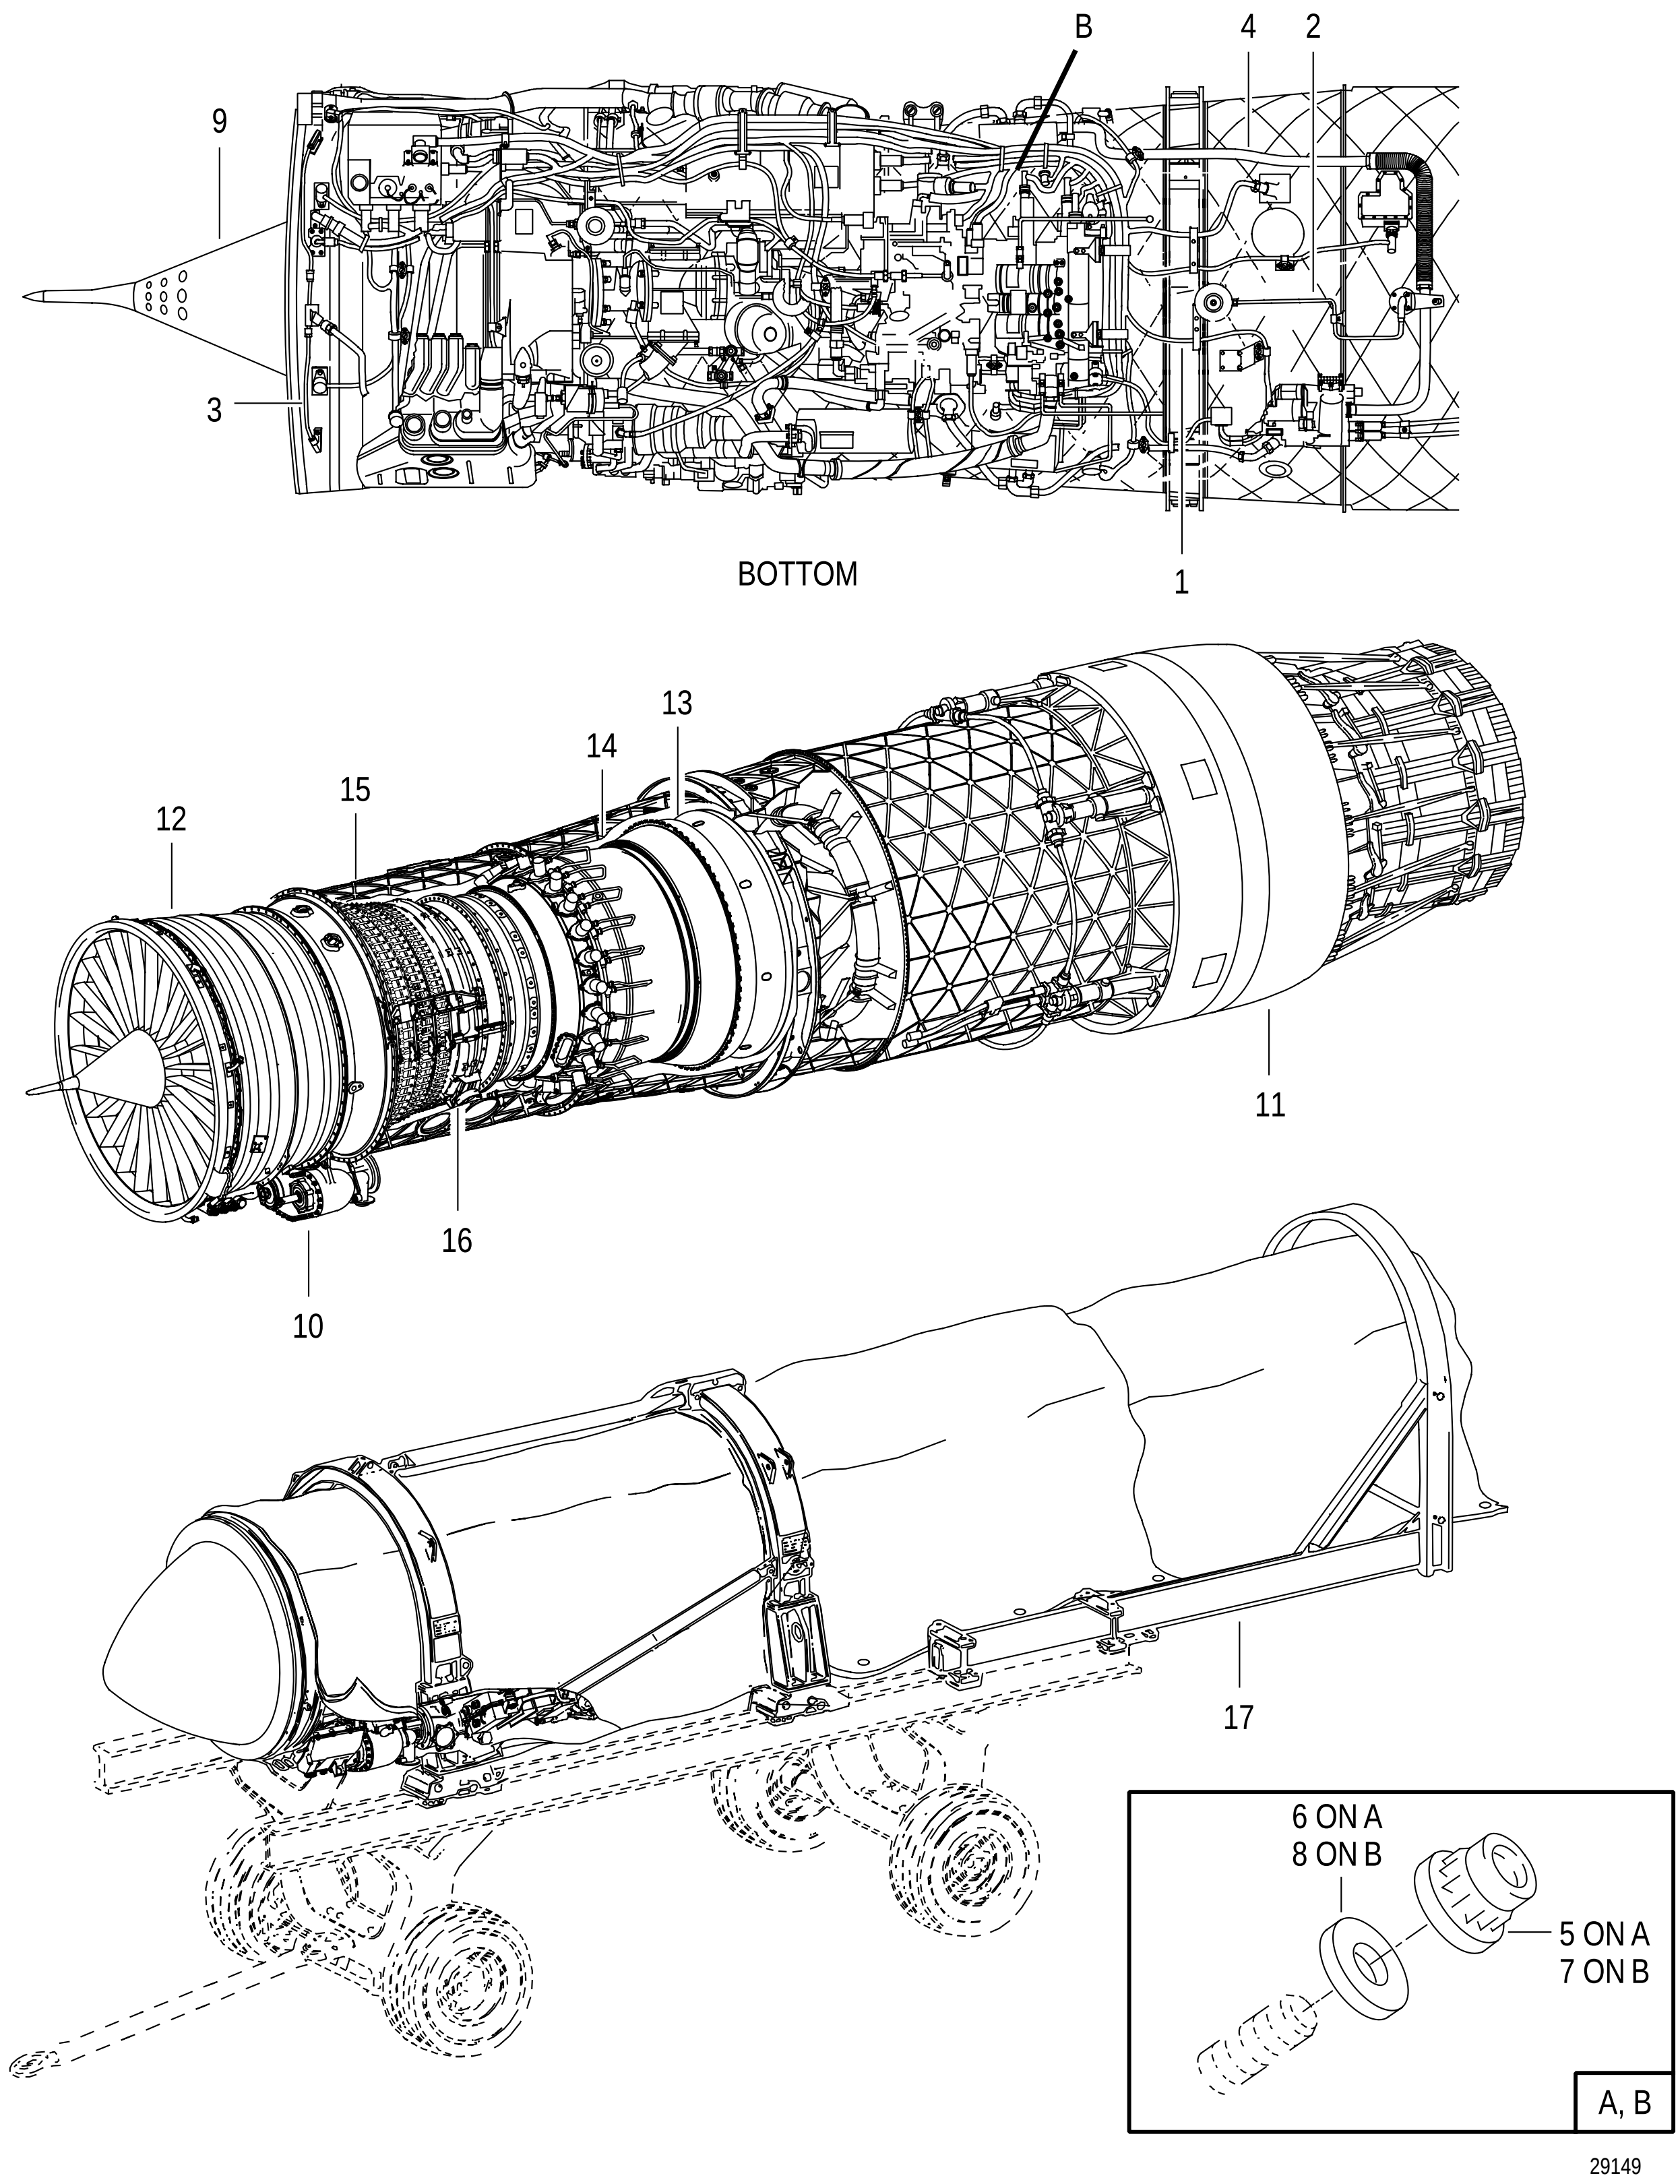


FIGURE 1. TURBO FAN ENGINE ASSY
(SHEET 2 OF 3)

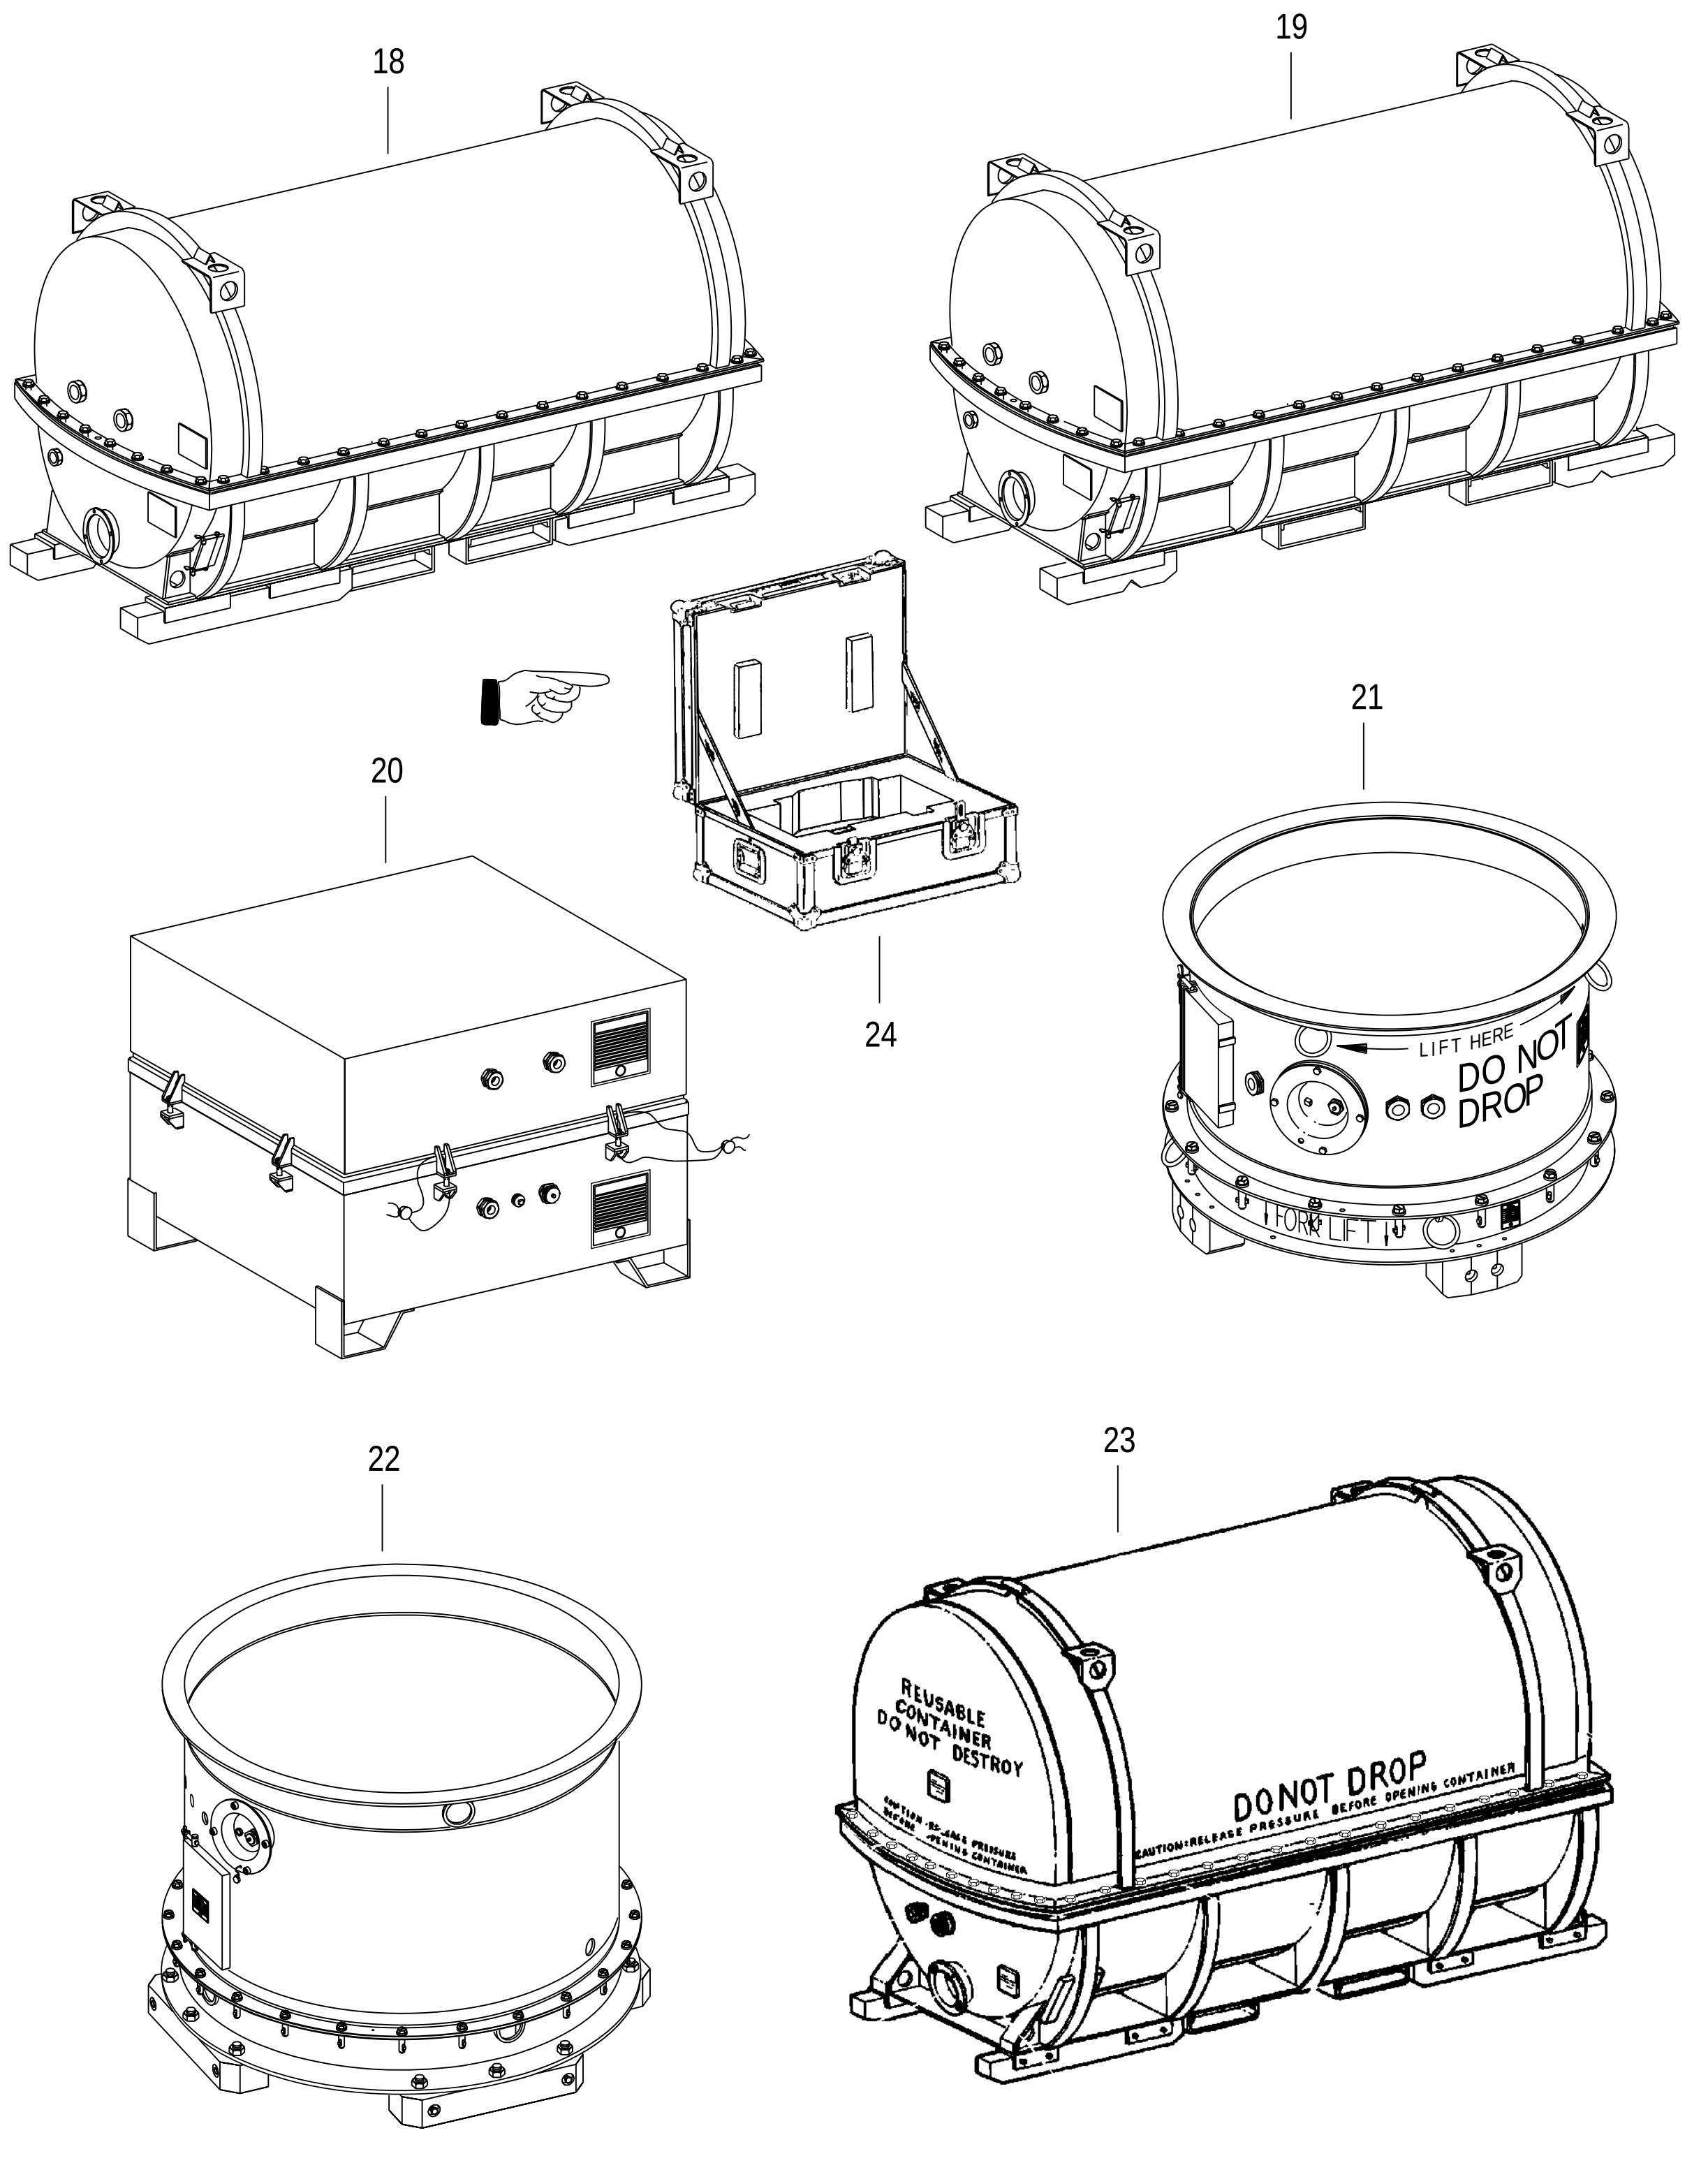


FIGURE 1. TURBO FAN ENGINE ASSY
(SHEET 3 OF 3)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	1	4068700	52661	ENGINE ASSY-TURBO FAN	1	A	ADD
		4068800	52661	ENGINE ASSY-TURBO FAN	1	B	ADD
	- 1	NO NUMBER		. ENGINE ELECTRICAL CABLES SEE FIG. 2 FOR DETAIL PARTS	REF		
		NO NUMBER		. TUBING-ENGINE	REF		
	- 2	NO NUMBER		.. FUEL TUBING SEE FIG. 12 FOR DETAIL PARTS	REF		
	- 3	NO NUMBER		.. OIL TUBING SEE FIG. 25 FOR DETAIL PARTS	REF		
	- 4	NO NUMBER		.. AIR TUBING SEE FIG. 33 FOR DETAIL PARTS	REF		
	- 5	4023115	52661	. NUT OPTION SEE OPTION TABLE	2	KU	PAOZZ
	- 6	ST2108-04	52661	. SPACER-SLEEVE 0.203 ID X 0.406 OD X 0.125 IN. THK	2	KU	PAOZZ
	- 7	4023115	52661	. NUT OPTION SEE OPTION TABLE	4	KW	PAOZZ
	- 8	ST2108-04	52661	. SPACER-SLEEVE 0.203 ID X 0.406 OD X 0.125 IN. THK	4	KW	PAOZZ
	- 9	NO NUMBER		. ENGINE EQUIPMENT SEE FIG. 38 FOR DETAIL PARTS	REF		
	- 10	4068725-800	52661	. GEARBOX MODULE SEE FIG. 58 FOR DETAIL PARTS	1	AC	PAFDD
R		4082609-800	52661	. GEARBOX MODULE REPLACED BY 4086325-800 SEE FIG. 58 FOR DETAIL PARTS	1	AD	PAFDD
R		4086325-800	52661	. GEARBOX MODULE REPLACES 4082609-800 SEE FIG. 58 FOR DETAIL PARTS	1		PAFDD
R	- 11	4068724-800	52661	. AUGMENTOR DUCT AND NOZZLE MODULE USE ONLY ON 4068700 SEE FIG. 62 FOR DETAIL PARTS	1	A/WK	PAFDD
R		4068824-800	52661	. AUGMENTOR DUCT AND NOZZLE MODULE USE ONLY ON 4068800 SEE FIG. 62 FOR DETAIL PARTS	1	B/WM	PAFDD
R		4084758-800	52661	. AUGMENTOR DUCT AND NOZZLE MODULE USE ONLY ON 4068700 SEE FIG. 62 FOR DETAIL PARTS	1	A/WL	PAFDD
R		4084858-800	52661	. AUGMENTOR DUCT AND NOZZLE MODULE USE ONLY ON 4068800 SEE FIG. 62 FOR DETAIL PARTS	1	B/WN	PAFDD
	- 12	4068721-803	52661	. INLET/FAN MODULE SEE FIG. 67 FOR DETAIL PARTS	1	XM/XP	PAFDD
		4068721-804	52661	. INLET/FAN MODULE SEE FIG. 67 FOR DETAIL PARTS	1	XN/XP	PAFDD
		4082653-800	52661	. INLET/FAN MODULE SEE FIG. 67 FOR DETAIL PARTS REOP AND REID OF 4068721-803 OR -804 DO NOT PROCURE FROM P&W	1	XQ	PAFDD
	- 13	4080823-801	52661	. FAN DRIVE TURBINE MODULE REOP AND REID OF 4080723-801 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
		4080823-802	52661	. FAN DRIVE TURBINE MODULE REOP AND REID OF 4080723-802 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
		4080823-803	52661	. FAN DRIVE TURBINE MODULE REOP AND REID OF 4080723-803 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
		4080823-804	52661	. FAN DRIVE TURBINE MODULE REOP AND REID OF 4080723-804 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
1 - 13	4080823-805	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-805 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-806	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-806 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-807	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-807 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-808	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-808 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-809	52661	. FAN DRIVE TURBINE MODULE .... SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-810	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-816 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-811	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-800 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-812	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-810 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-813	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-811 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-814	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-812 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-815	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-813 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-816	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-814 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-817	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080723-815 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-835	52661	. FAN DRIVE TURBINE MODULE .... SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-836	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080823-802 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-837	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080823-803 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-838	52661	. FAN DRIVE TURBINE MODULE .... REOP AND REID OF 4080823-804 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
1 - 13	4080823-839	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-805 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-840	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-806 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-841	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-807 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-842	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-808 DO NOT PROCURE FROM P&W SEE FIG.71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-843	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-810 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-844	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-811 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-845	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-812 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-846	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-813 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-847	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-814 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-848	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-815 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-849	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-816 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-850	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-817 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-851	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-809 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-852	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-801 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY	PAFDD
	4080823-853	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-818 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
	4080823-854	52661	. FAN DRIVE TURBINE MODULE . . . . SEE FIG. 71 FOR DETAIL PARTS	1	TY/XD	PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	1 - 13	4080823-872	52661	. FAN DRIVE TURBINE MODULE . . . . SEE FIG. 71 FOR DETAIL PARTS	1	TY/XB	PAFDD
R		4080823-873	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-802 OR -836 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-874	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-803 OR -837 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-875	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-804 OR -838 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-876	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-805 OR -839 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-877	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-806 OR -840 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-878	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-807 OR -841 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-879	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-808 OR -842 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-880	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-810 OR -843 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-881	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-811 OR -844 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-882	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-812 OR -845 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-883	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-813 OR -846 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-884	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-814 OR -847 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-885	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-815 OR -848 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-886	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-816 OR -849 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-887	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-817 OR -850 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	1 - 13	4080823-888	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-809 OR -851 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-889	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-801 OR -852 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-890	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-835 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-891	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-851 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-892	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-852 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-893	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-836 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-894	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-837 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-895	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-838 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-896	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-839 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-897	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-840 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-898	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-841 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-899	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-842 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-900	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-843 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
R		4080823-901	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-844 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
1 - 13	4080823-902	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-845 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
	4080823-903	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-846 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
	4080823-904	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-847 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
	4080823-905	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-848 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
	4080823-906	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-849 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
	4080823-907	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-850 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
	4080823-908	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-853 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XF	PAFDD
	4080823-909	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-908 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XB	PAFDD
	4082655-800	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-853 OR -873 THRU 908 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	TY/XG	PAFDD
	4082655-801	52661	. FAN DRIVE TURBINE MODULE . . . . REOP AND REID OF 4080823-801 THRU -909 AND 4082655-800 DO NOT PROCURE FROM P&W SEE FIG. 71 FOR DETAIL PARTS	1	XC/XE	PAFDD
- 14	4069402	52661	. DUCT-FAN, REAR, ASSY OF . . . . SEE FIG. 74 FOR DETAIL PARTS	1	KW	PAFDD
	4079768	52661	. DUCT-FAN, REAR, ASSY OF . . . . SEE FIG. 74 FOR DETAIL PARTS	1	KX	PAFDD
R	4086531	52661	. DUCT-FAN, REAR, ASSY OF . . . . REOP AND REID OF 4069402 DO NOT PROCURE FROM P&W SEE FIG. 74 FOR DETAIL PARTS	1		PAFDD
R	4086671	52661	. DUCT-FAN, REAR, ASSY OF . . . . REOP AND REID OF 4079768 DO NOT PROCURE FROM P&W SEE FIG. 74 FOR DETAIL PARTS	1		PAFDD
- 15	4075426	52661	. DUCT-FAN, FRONT, ASSY OF . . . . SEE FIG. 75 FOR DETAIL PARTS	1	KU	PAFDD
	4079771	52661	. DUCT-FAN, FRONT, ASSY OF . . . . SEE FIG. 75 FOR DETAIL PARTS	1	KV/NN	PAFDD
	4081642	52661	. DUCT-FAN, FRONT, ASSY OF . . . . SEE FIG. 75 FOR DETAIL PARTS	1	NP	PAFDD
- 16	= 4068722-801	52661	. ENGINE CORE MODULE (VARIABLE 6TH STAGE . . . VANES) SEE FIG. 76 FOR DETAIL PARTS	1	AN/BL	PAFDD

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
1 - 16	=	4082657-801	52661	. ENGINE CORE MODULE (VARIABLE 6TH STAGE . . . VANES) REOP AND REID OF 4068722-801 DO NOT PROCURE FROM P&W SEE FIG. 76 FOR DETAIL PARTS	1	AN/BL	PAFDD
	=	4068722-806	52661	. ENGINE CORE MODULE (VARIABLE 6TH STAGE . . . VANES) SEE FIG. 76 FOR DETAIL PARTS	1	AN/BM	PAFDD
	=	4082657-806	52661	. ENGINE CORE MODULE (VARIABLE 6TH STAGE . . . VANES) REOP AND REID OF 4068722-806 DO NOT PROCURE FROM P&W SEE FIG.76 FOR DETAIL PARTS	1	AN/BM	PAFDD
	=	4068722-803	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) REOP AND REID OF 4068722-800 OR -801 DO NOT PROCURE FROM P&W SEE FIG. 76 FOR DETAIL PARTS	1	AP/DA/ AAK	PAFDD
	=	4082657-803	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) REOP AND REID OF 4068722-803 DO NOT PROCURE FROM P&W SEE FIG. 76 FOR DETAIL PARTS	1	AP/DA	PAFDD
	=	4068722-807	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 76 FOR DETAIL PARTS	1	AP/DB/XH/ XK/AAH	PAFDD
	=	4082657-807	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) REOP AND REID OF 4068722-807 DO NOT PROCURE FROM P&W SEE FIG. 76 FOR DETAIL PARTS	1	AP/DB/ AAM	PAFDD
	=	4068722-810	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 76 FOR DETAIL PARTS	1	AP/DB/XJ/ XK/XR	PAFDD
	=	4082654-800	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) REOP AND REID OF 4068722-807 OR -810 DO NOT PROCURE FROM P&W SEE FIG. 76 FOR DETAIL PARTS	1	AP/DB/SE/ XL/XT	PAFDD
	=	4082654-801	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) REOP AND REID OF 4082654-800 DO NOT PROCURE FROM P&W SEE FIG. 76 FOR DETAIL PARTS	1	AP/DB/SF/ XL	PAFDD
	=	4068722-811	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) REOP AND REID OF 4068722-810 SEE FIG. 76 FOR DETAIL PARTS	1	XS/AAD	PAFDD
	=	4082654-802	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) REOP AND REID OF 4082654-800 SEE FIG. 76 FOR DETAIL PARTS DO NOT PROCURE FROM P&W	1	XU/AAF	PAFDD
		4068722-812	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 76 FOR DETAIL PARTS	1	AAD	PAFDD
		4084522-802	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 76 FOR DETAIL PARTS	1	AAL	PAFDD
		4084522-801	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 76 FOR DETAIL PARTS	1	AAJ	PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
1 - 16	4082657-808	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES) SEE FIG. 76 FOR DETAIL PARTS	1	AAN	PAFDD
	4084522-800	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES) SEE FIG. 76 FOR DETAIL PARTS	1	AAE	PAFDD
	4082654-803	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES) SEE FIG. 76 FOR DETAIL PARTS	1	AAG	PAFDD
- 17	NO NUMBER		. ENGINE ASSY SHIPPING EQUIPMENT .... SEE FIG. 105 FOR DETAIL PARTS	REF		
- 18	NO NUMBER		. CORE ENGINE MODULE CONTAINER ASSY .... SEE FIG. 108 OR FIG. 108A FOR DETAIL PARTS	REF		
- 19	NO NUMBER		. FAN DRIVE TURBINE MODULE CONTAINER ASSY . SEE FIG. 109 FOR DETAIL PARTS	REF		
- 20	NO NUMBER		. GEARBOX MODULE CONTAINER ASSY AND .... CONSUMABLE PACKAGING PARTS SEE FIG. 110 FOR DETAIL PARTS	REF		
- 21	NO NUMBER		. REAR COMPRESSOR DRIVE TURBINE ROTOR .... AND STATOR CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS SEE FIG. 111 OR FIG. 111A FOR DETAIL PARTS	REF		
- 22	NO NUMBER		. INLET/FAN MODULE CONTAINER ASSY AND .... CONSUMABLE PACKAGING PARTS SEE FIG. 112 FOR DETAIL PARTS	REF		
- 23	NO NUMBER		. AUGMENTOR DUCT AND NOZZLE MODULE .... CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS SEE FIG. 113 FOR DETAIL PARTS	REF		
R - 24	T791873	73030	CASE-ASSY OF, TRANSIT, DEEC .... P&W PART NO. P4021623 SEE FIG. 114 FOR DETAIL PARTS	1		

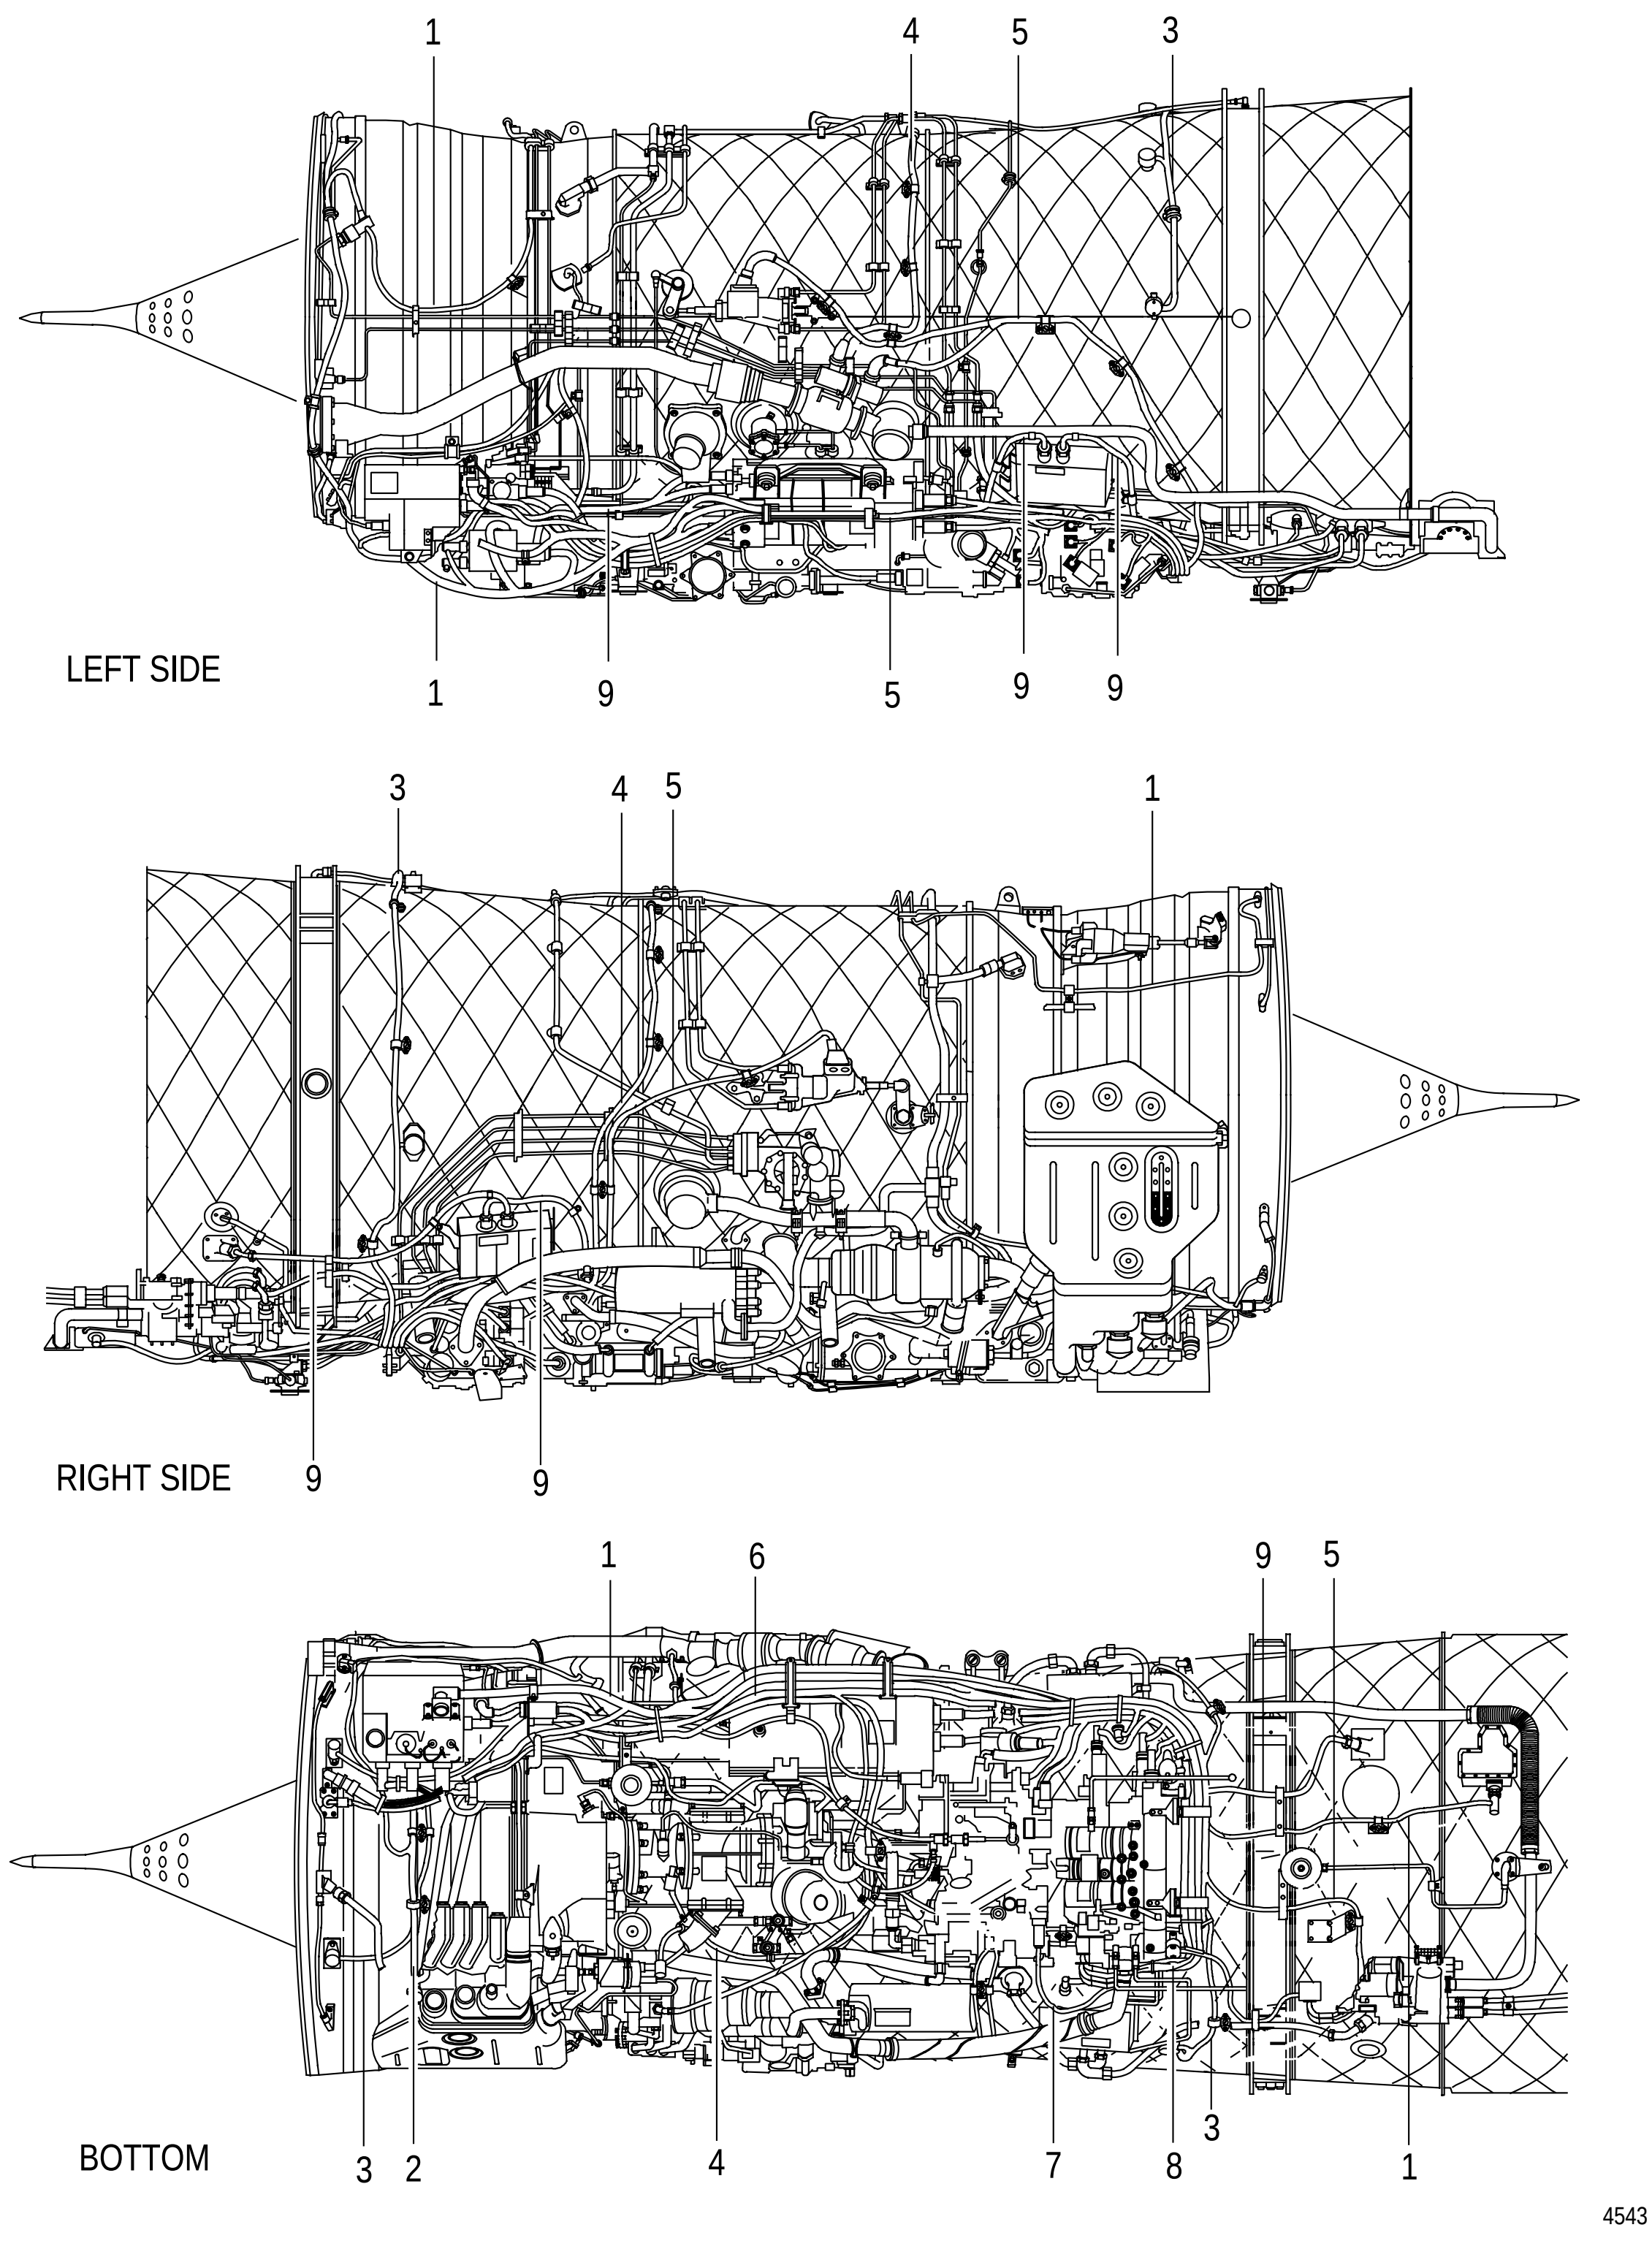


FIGURE 2. ENGINE ELECTRICAL CABLES

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
2	NO NUMBER		ENGINE ELECTRICAL CABLES . . . . SEE FIG. 1-1 FOR NHA	REF		
- 1	NO NUMBER		. POWER AND SPEED CABLE . . . . SEE FIG. 3 FOR DETAIL PARTS	REF		
- 2	NO NUMBER		. EDU GROUND CABLE . . . . SEE FIG. 4 FOR DETAIL PARTS	REF		
- 3	NO NUMBER		. ENGINE ELECTRONIC CONTROL SIGNALS CABLE . SEE FIG. 5 FOR DETAIL PARTS	REF		
- 4	NO NUMBER		. ENGINE ACCESSORIES CABLE . . . . SEE FIG. 6 FOR DETAIL PARTS	REF		
- 5	NO NUMBER		. ENGINE ACTUATOR CABLE . . . . SEE FIG. 7 FOR DETAIL PARTS	REF		
- 6	NO NUMBER		. IGNITION CABLE . . . . SEE FIG. 8 FOR DETAIL PARTS	REF		
- 7	NO NUMBER		. GAS GENERATOR CABLE . . . . SEE FIG. 9 FOR DETAIL PARTS	REF		
- 8	NO NUMBER		. AUGMENTOR FUEL MANAGEMENT CABLE . . . . SEE FIG. 10 FOR DETAIL PARTS	REF		
- 9	NO NUMBER		. DEEC AND EXCITER CABLES . . . . SEE FIG. 11 FOR DETAIL PARTS	REF		

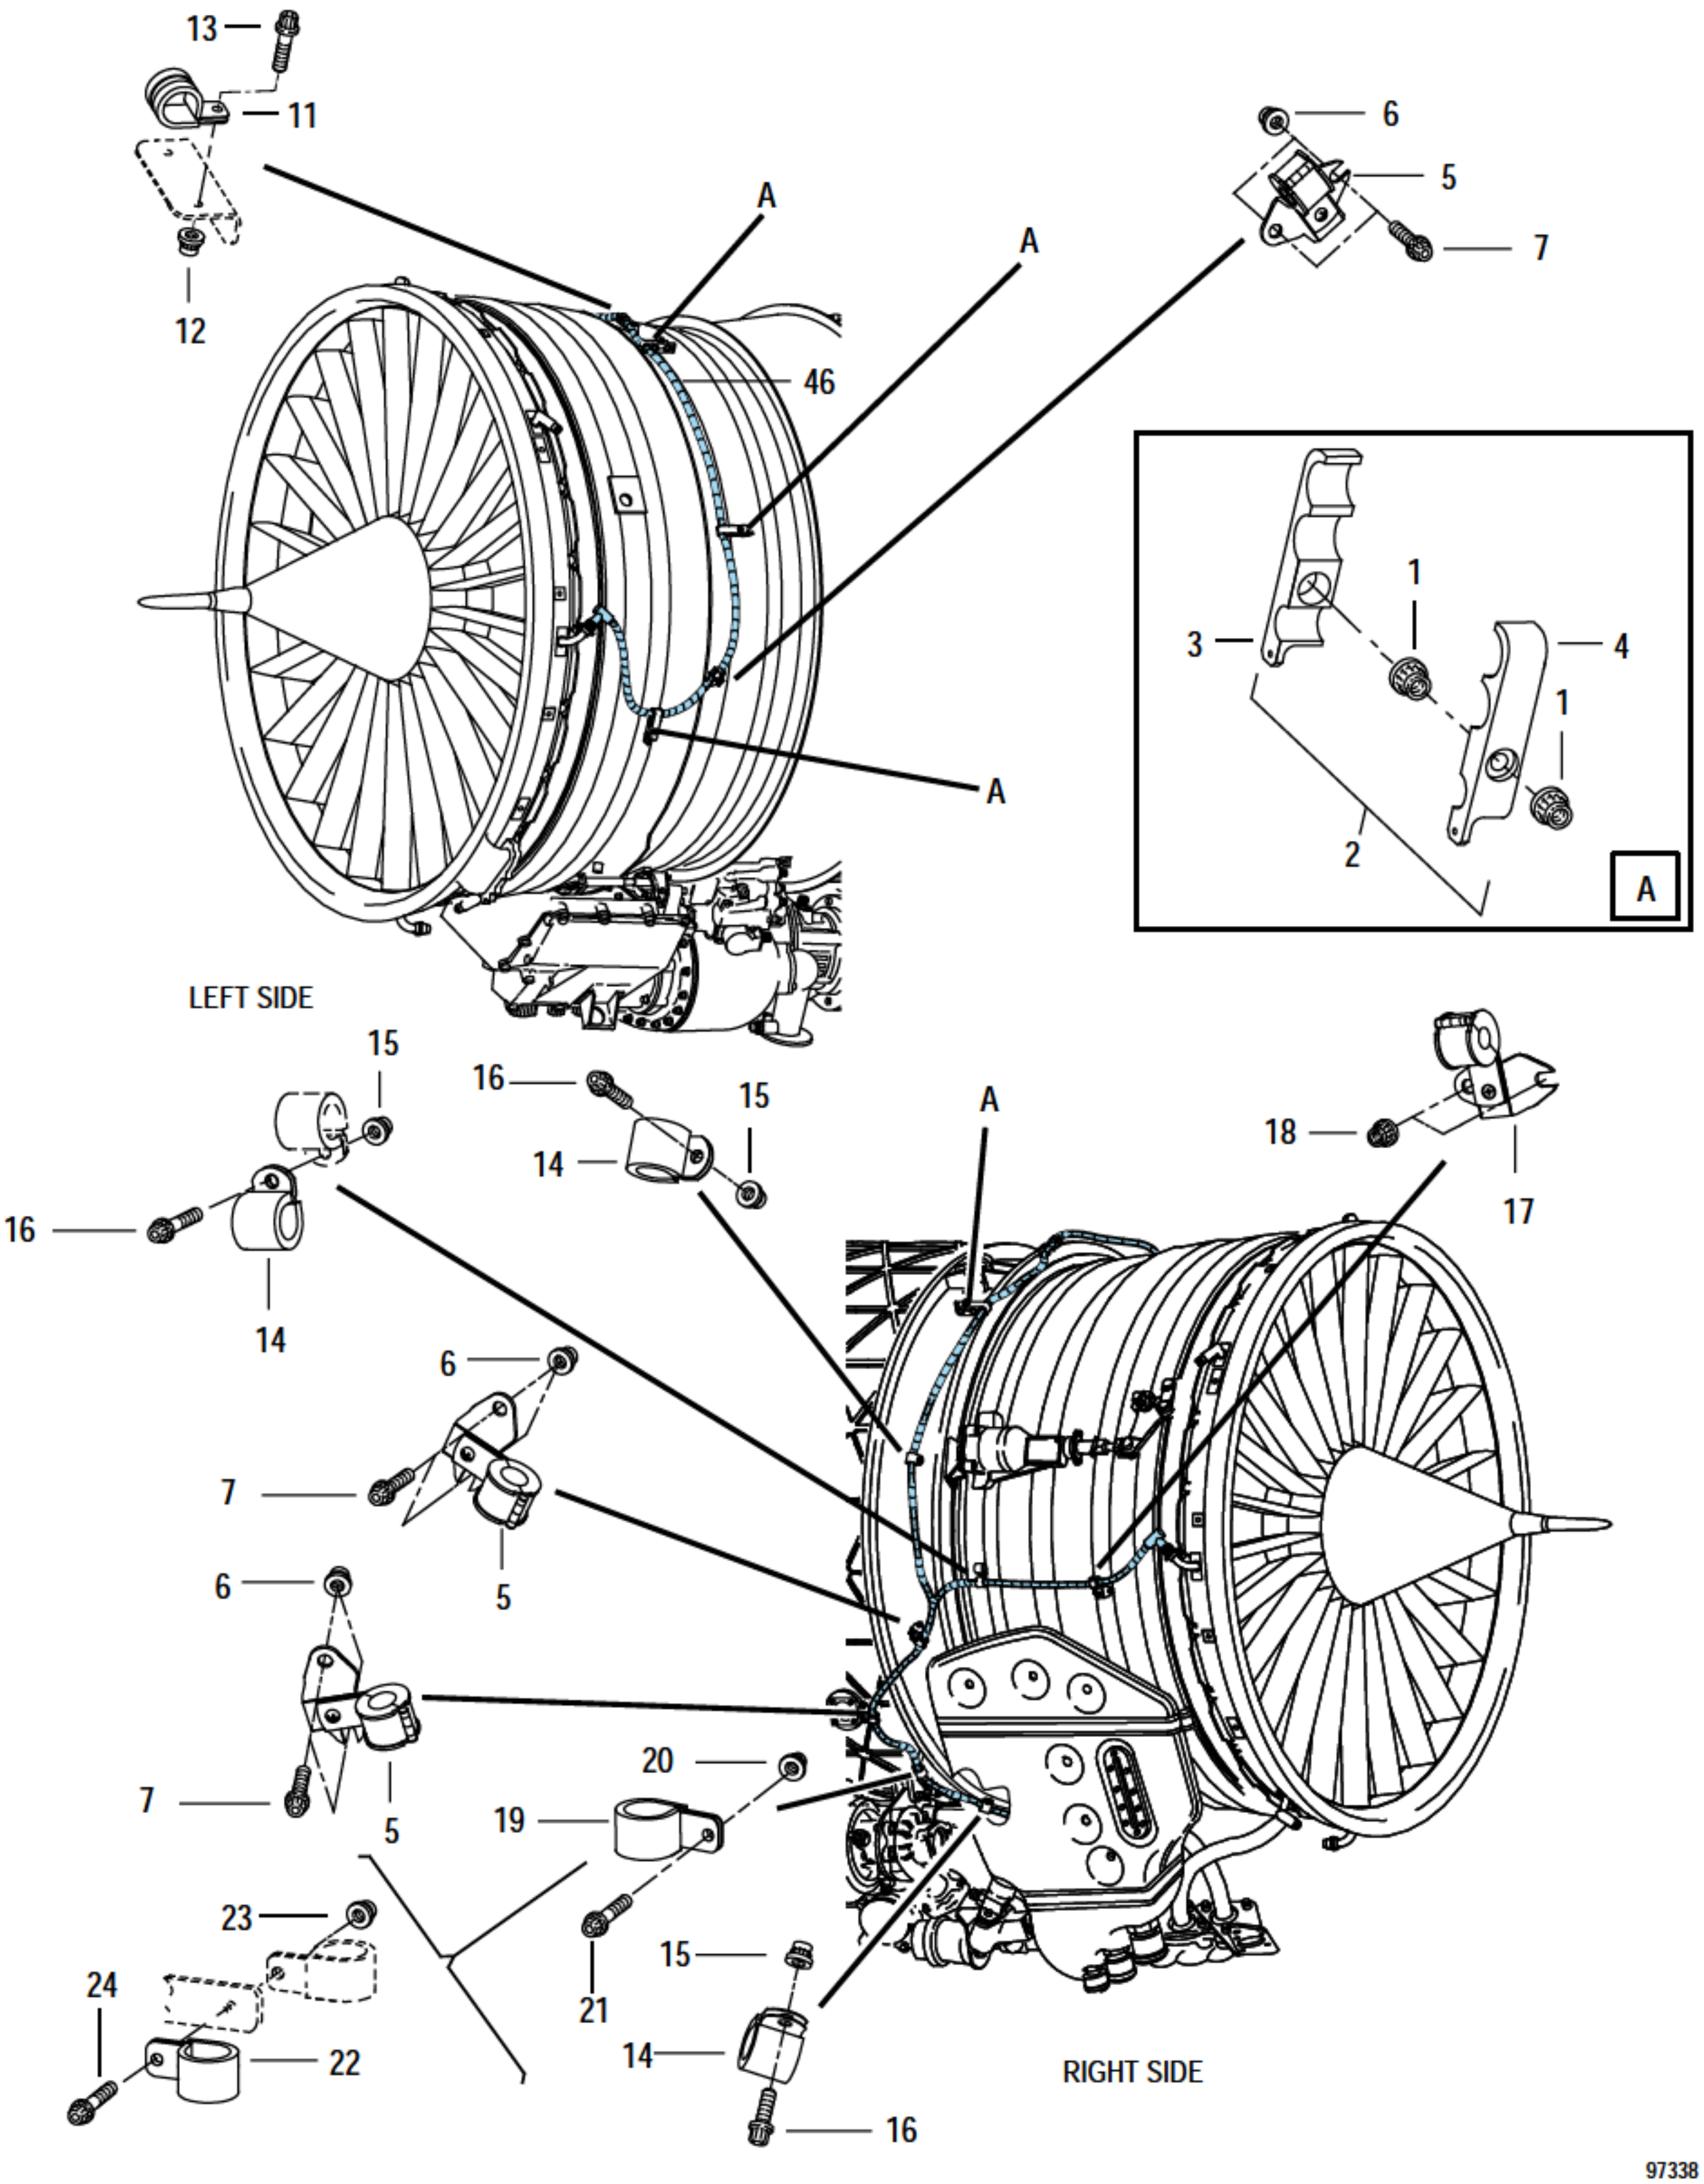


FIGURE 3. POWER AND SPEED CABLE
(SHEET 1 OF 2)

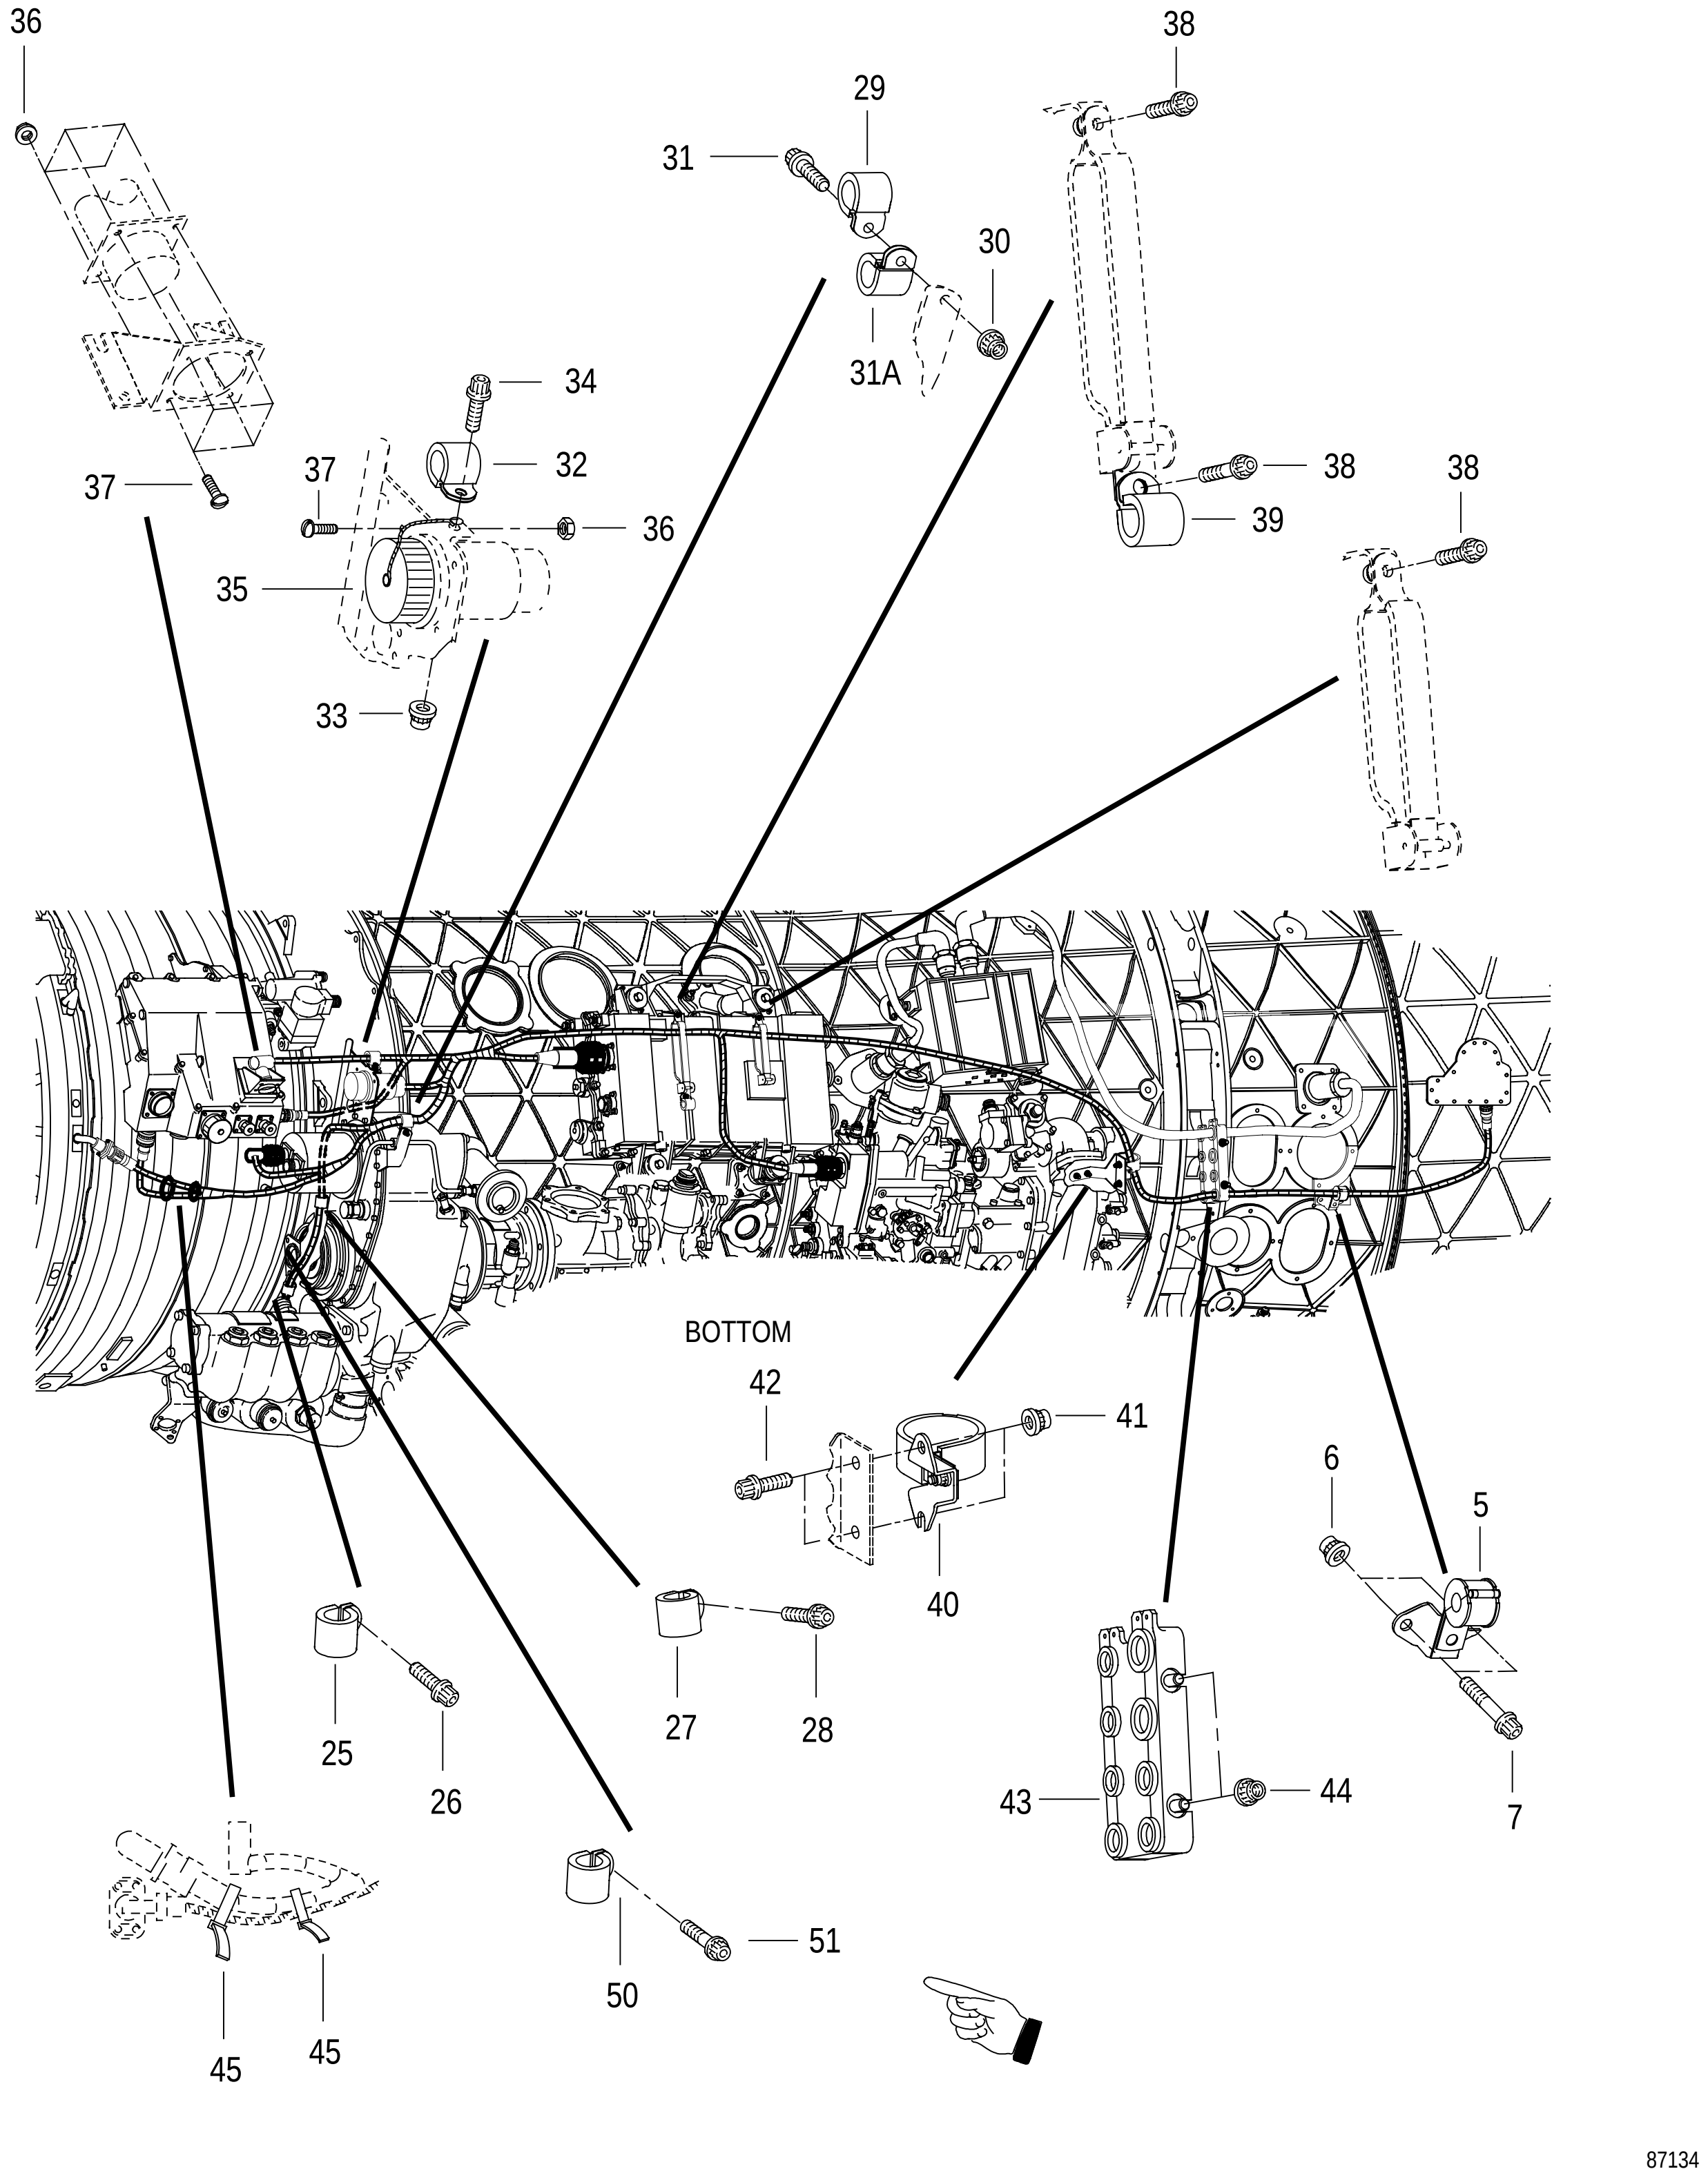


FIGURE 3. POWER AND SPEED CABLE
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
3		NO NUMBER		POWER AND SPEED CABLE . . . . SEE FIG. 2-1 FOR NHA	REF		
- 1		4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	8		PAOZZ
- 2		4075947	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078518	4		PAOBZ
		4078518	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	4		PAOBZ
- 3		4075945	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 4		4075946	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 5		TA107000010-06	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2816-06 REPLACES ST2399-06	4		PAOZZ
- 6		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 7		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 8		DELETED					
- 9		DELETED					
- 10		DELETED					
- 11		ST1540-06	52661	. CLAMP-LOOP, CUSHION.	1		PAOZZ
- 12		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 13		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 14	+	ST2439-06	52661	. CLAMP ASSY-LOOP, CUSHION. WHEN EXH USE ST1540-06	3		PAOZZ
	+	ST1540-06	52661	. CLAMP-LOOP, CUSHION.	3		PAOZZ
- 15		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 16		ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP) REPLACES ST2015-016	1		PAOZZ
- 17		TA107000010-06	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2816-06 REPLACES ST2399-06	1		PAOZZ
- 18		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 19		ST2439-06	52661	. CLAMP ASSY-LOOP, CUSHION. WHEN EXH USE ST1540-06	1	BL/DA	PAOZZ
		ST1540-06	52661	. CLAMP-LOOP, CUSHION.	1	BL/DA	PAOZZ
- 20		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1	BL/DA	PAOZZ
- 21		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	BL/DA	PAOZZ
- 22		ST2439-06	52661	. CLAMP ASSY-LOOP, CUSHION. WHEN EXH USE ST1540-06	1	BM/DB	PAOZZ
		ST1540-06	52661	. CLAMP-LOOP, CUSHION.	1	BM/DB	PAOZZ
- 23		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1	BM/DB	PAOZZ
- 24		ST2015-018	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.562 IN. LONG (AP)	1	BM/DB	PAFZZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
3 - 25	+	ST2439-06	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-06	1		PAOZZ
	+	ST1540-06	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 26		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 27	+	ST2439-07	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-07	1		PAOZZ
	+	ST1540-07	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 28		ST2015-012	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.375 IN. LONG (AP)	1	AA	PAOZZ
		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	AB	PAOZZ
- 29	+	ST2439-08	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-08	1		PAOZZ
	+	ST1540-08	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 30		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 31		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 31A		ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-04	1		PAOZZ
		ST1540-04	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 32	+	ST2439-10	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-10	1		PAOZZ
	+	ST1540-10	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 33		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 34		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 35		45104	83311	. COVER-ELECTRICAL CONNECTOR . . . . P&WA PART NO. 4066025	1		PAOZZ
- 36		379530	52661	. NUT OPTION . . . . SEE OPTION TABLE REPLACES ST2169-01	8		PAOZZ
- 37		2159117	52661	. SCREW-MACHINE, FILLISTER . . . . 0.112-40UNJF-3A X 0.500 IN. LONG SUPERSEDES 2068444	8		PAOZZ
- 38		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG	3		PAOZZ
- 39		ST2439-05	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-05	1		PAOZZ
		ST1540-05	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 40		TA10300016-20	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-20 REPLACES ST2441-20	1		PAOZZ
- 41		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 42		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 43		4076761	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4077680 OR 4083660	1		PAOBZ
	=	4077680	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
	=	4083660	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
- 44		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	4		PAOZZ
- 45		4076700	52661	. TIE OPTION . . . . SEE OPTION TABLE	AR		PAOZZ

	FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	3 - 46		46301	#	83311	. CABLE-SPECIAL PURPOSE, ELECTRICAL, ... BRANCHED, POWER AND SPEED P&WA PART NO. 4077009 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
	- 47	<	149383-1013		77820	.. BAND-EMI...................................... SERVICE REPAIR PART	1		PAFZZ
		<	149383-2013		49367	.. BAND-EMI...................................... SERVICE REPAIR PART	1		PAFZZ
	- 48	<	149383-1015		77820	.. BAND-EMI...................................... SERVICE REPAIR PART	1		PAFZZ
		<	149383-2015		49367	.. BAND-EMI...................................... SERVICE REPAIR PART	1		PAFZZ
	- 49	<	149383-1025		77820	.. BAND-EMI...................................... SERVICE REPAIR PART	1		PAFZZ
		<	149383-2025		49367	.. BAND-EMI...................................... SERVICE REPAIR PART	1		PAFZZ
R	- 50		ST1540-06		52661	. CLAMP-LOOP, CUSHION..........................	1	MT	PAOZZ
R R	- 51		ST2015-020		52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.625 IN. LONG	1	MT	PAOZZ

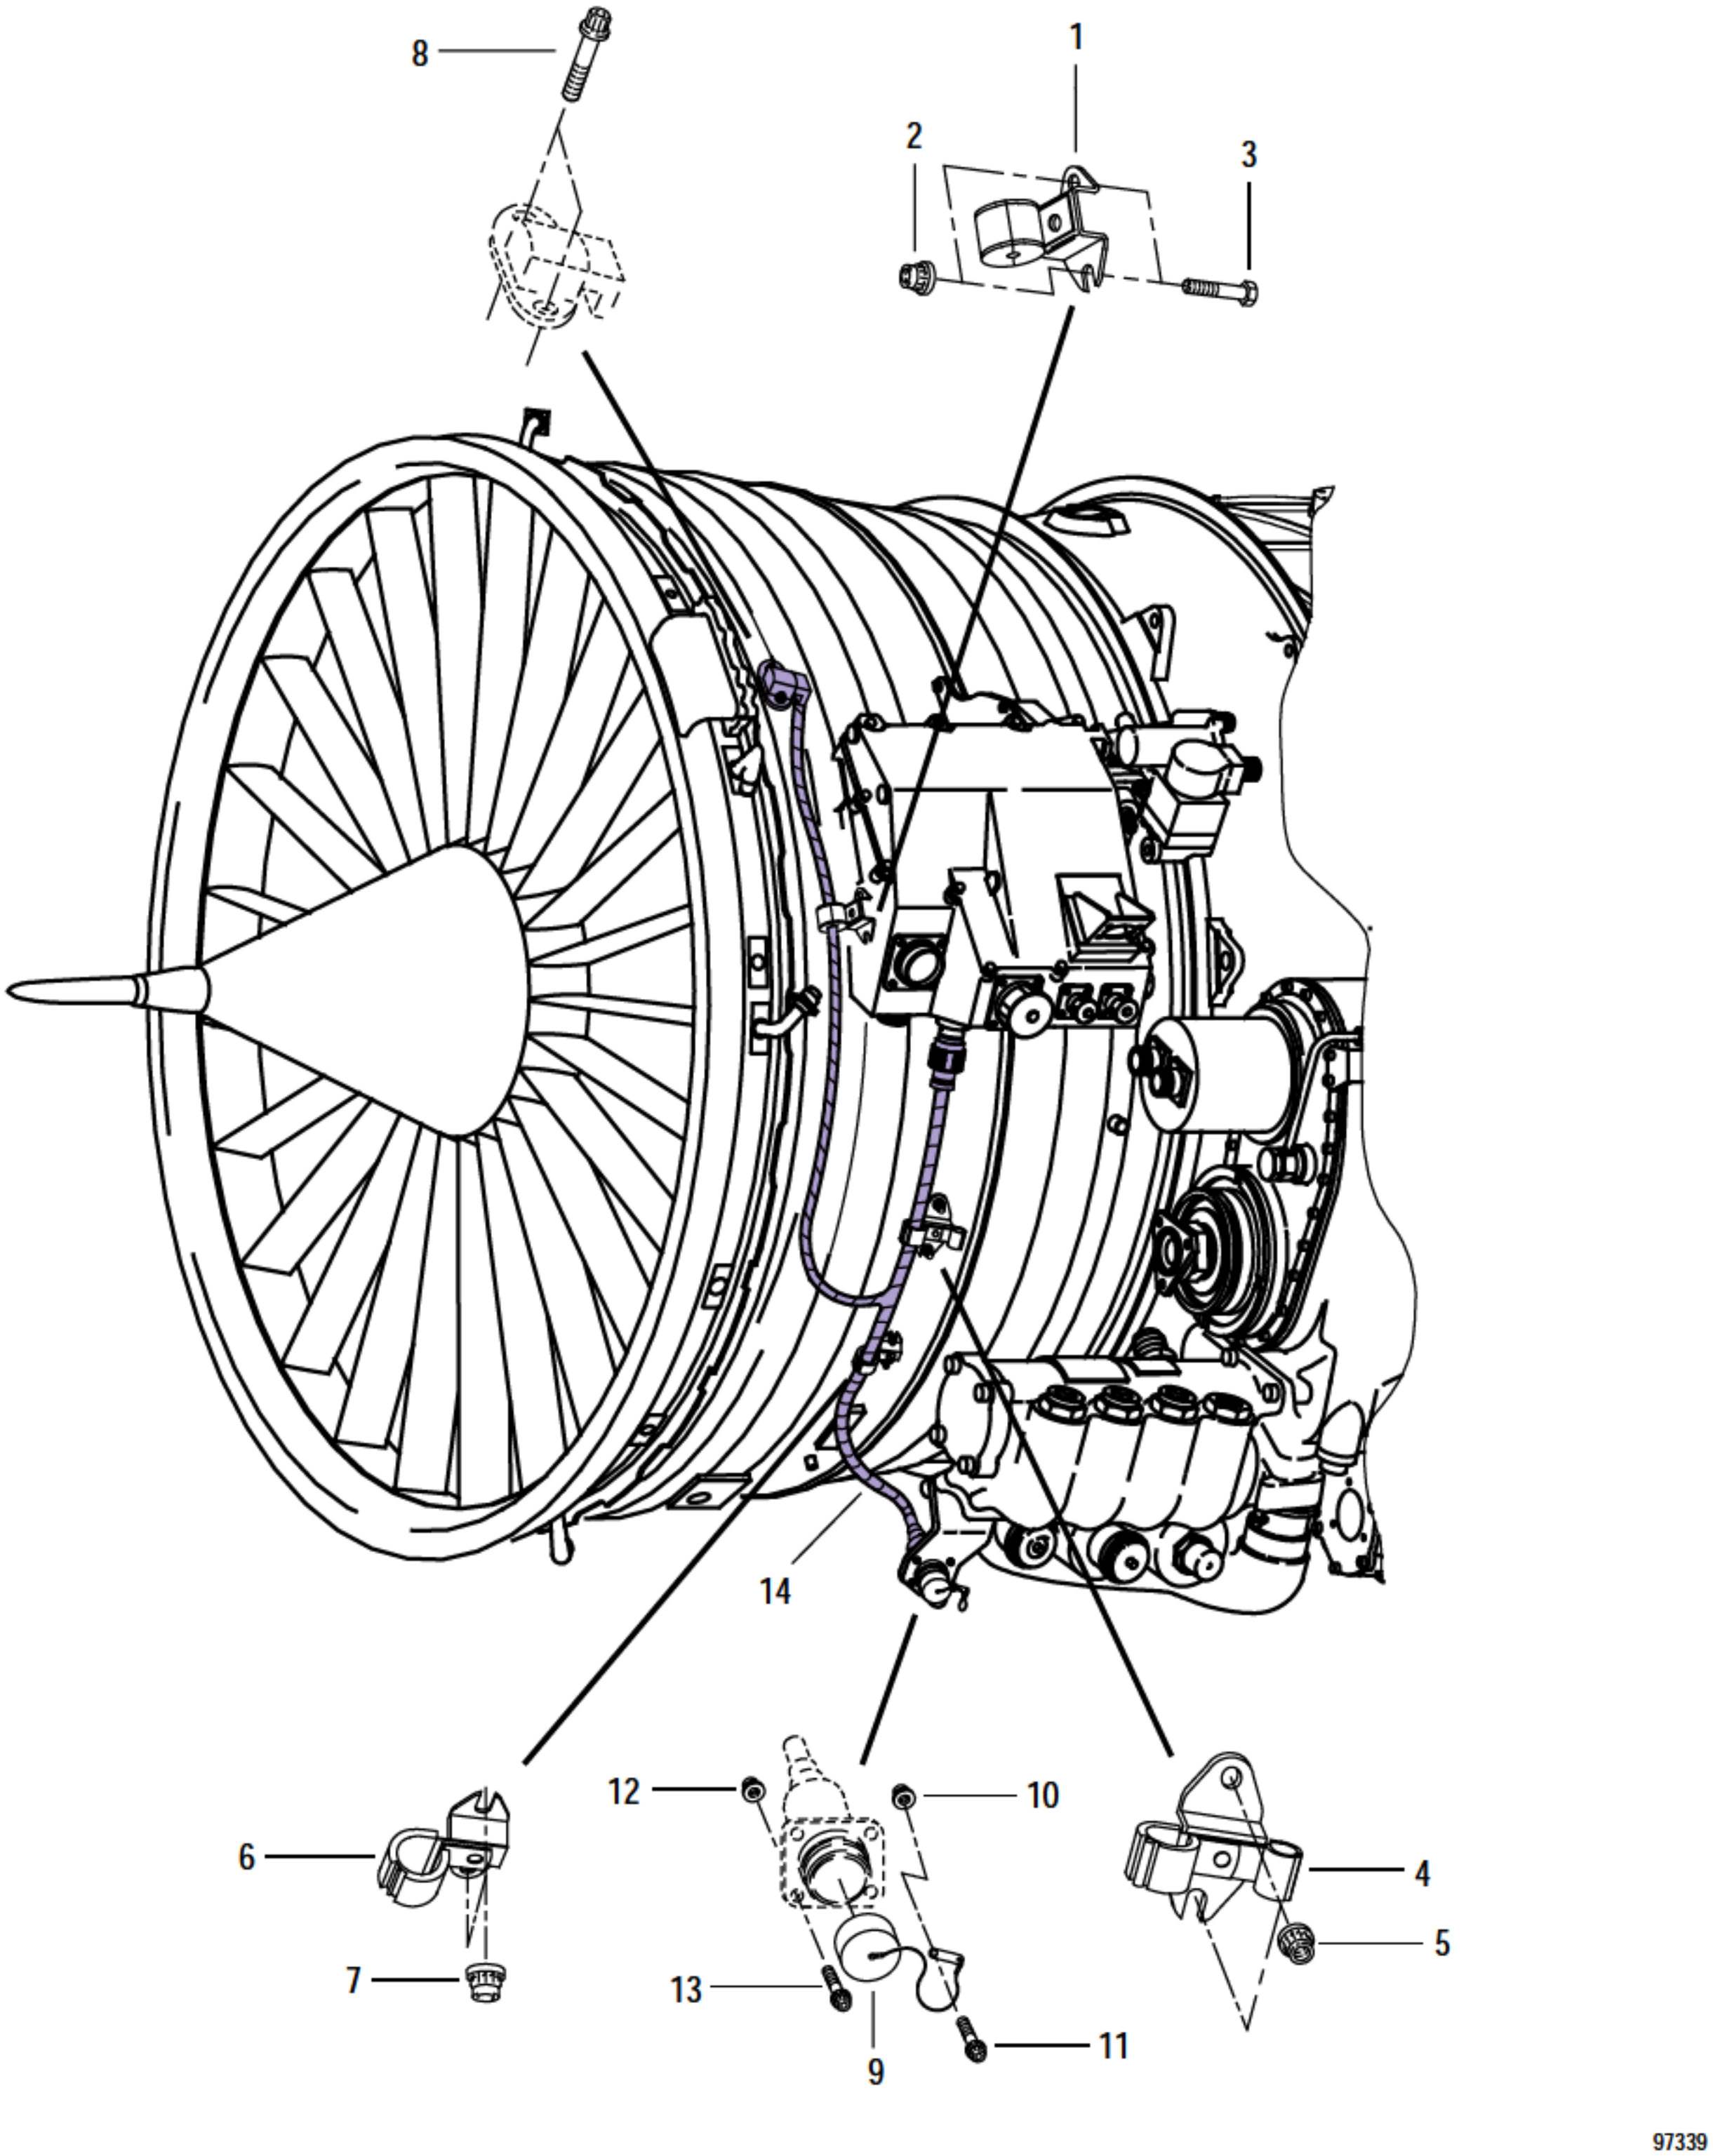


FIGURE 4. EDU GROUND CABLE

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
4	NO NUMBER		EDU GROUND CABLE . . . . SEE FIG. 2-2 FOR NHA	REF		
- 1	TA107000010-06	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2816-06 REPLACES ST2399-06	1		PAOZZ
- 2	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 3	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 4	TA14300004-0410	84971	. CLAMP-LOOP, 2 HOLE, CUSHION, HINGE. . . . . P&WA PART NO. ST2818-0410 REPLACES ST2442-0410	1		PAOZZ
- 5	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 6	TA10300016-11	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-11 REPLACES ST2441-11	1		PAOZZ
- 7	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 8	MS9565-06	96906	. BOLT	2		PAOZZ
- 9	45105	83311	. COVER-ELECTRICAL CONNECTOR . . . . P&WA PART NO. 4065894	1		PAOZZ
- 10	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 11	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 12	379530	52661	. NUT OPTION . . . . SEE OPTION TABLE REPLACES ST2169-01	4		PAOZZ
- 13	2159117	52661	. SCREW-MACHINE, FILLISTER . . . . 0.112-40UNJF-3A X 0.500 IN. LONG SUPERSEDES 2068444	4		PAOZZ
- 14	46197 #	83311	. CABLE-SPECIAL PURPOSE, ELECTRICAL, EDU . . . . P&WA PART NO. 4071841 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 15	< 149383-1015	77820	.. BAND-EMI. . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2015	49367	.. BAND-EMI. . . . . SERVICE REPAIR PART	1		PAFZZ
- 16	< 149383-1019	77820	.. BAND-EMI. . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2019	49367	.. BAND-EMI. . . . . SERVICE REPAIR PART	1		PAFZZ

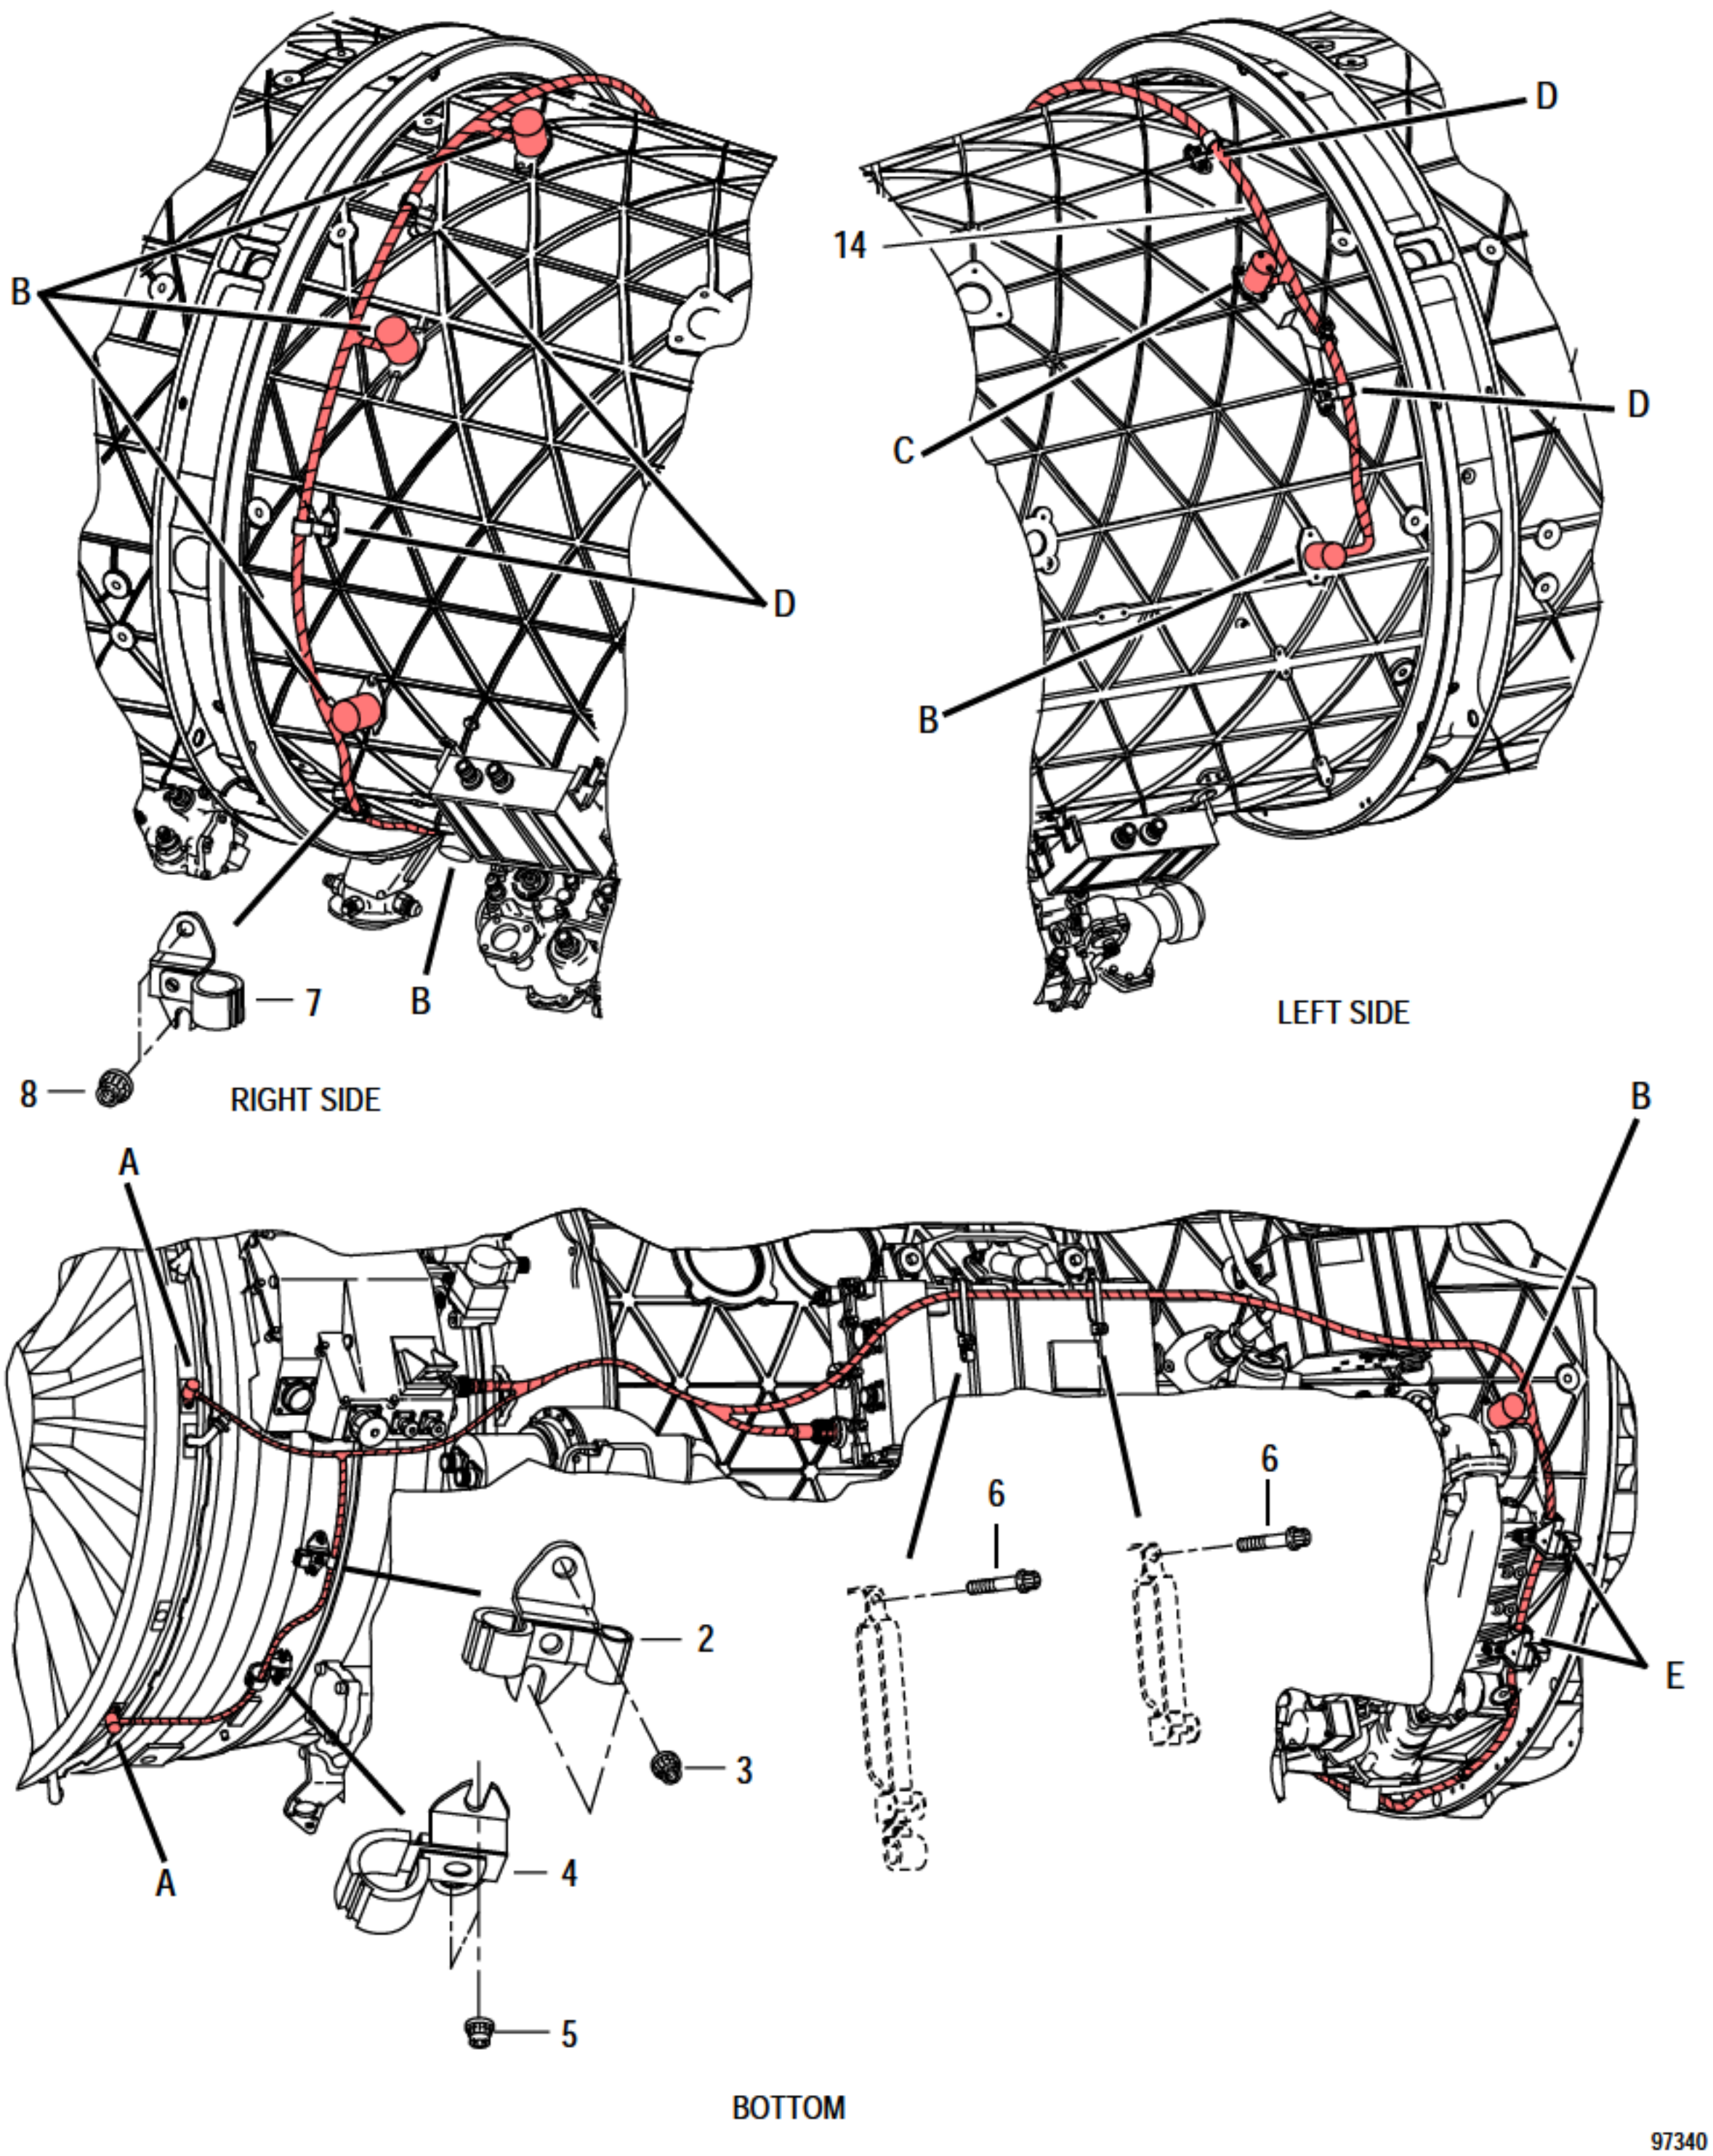


FIGURE 5. ENGINE ELECTRONIC CONTROL SIGNALS CABLE
(SHEET 1 OF 2)

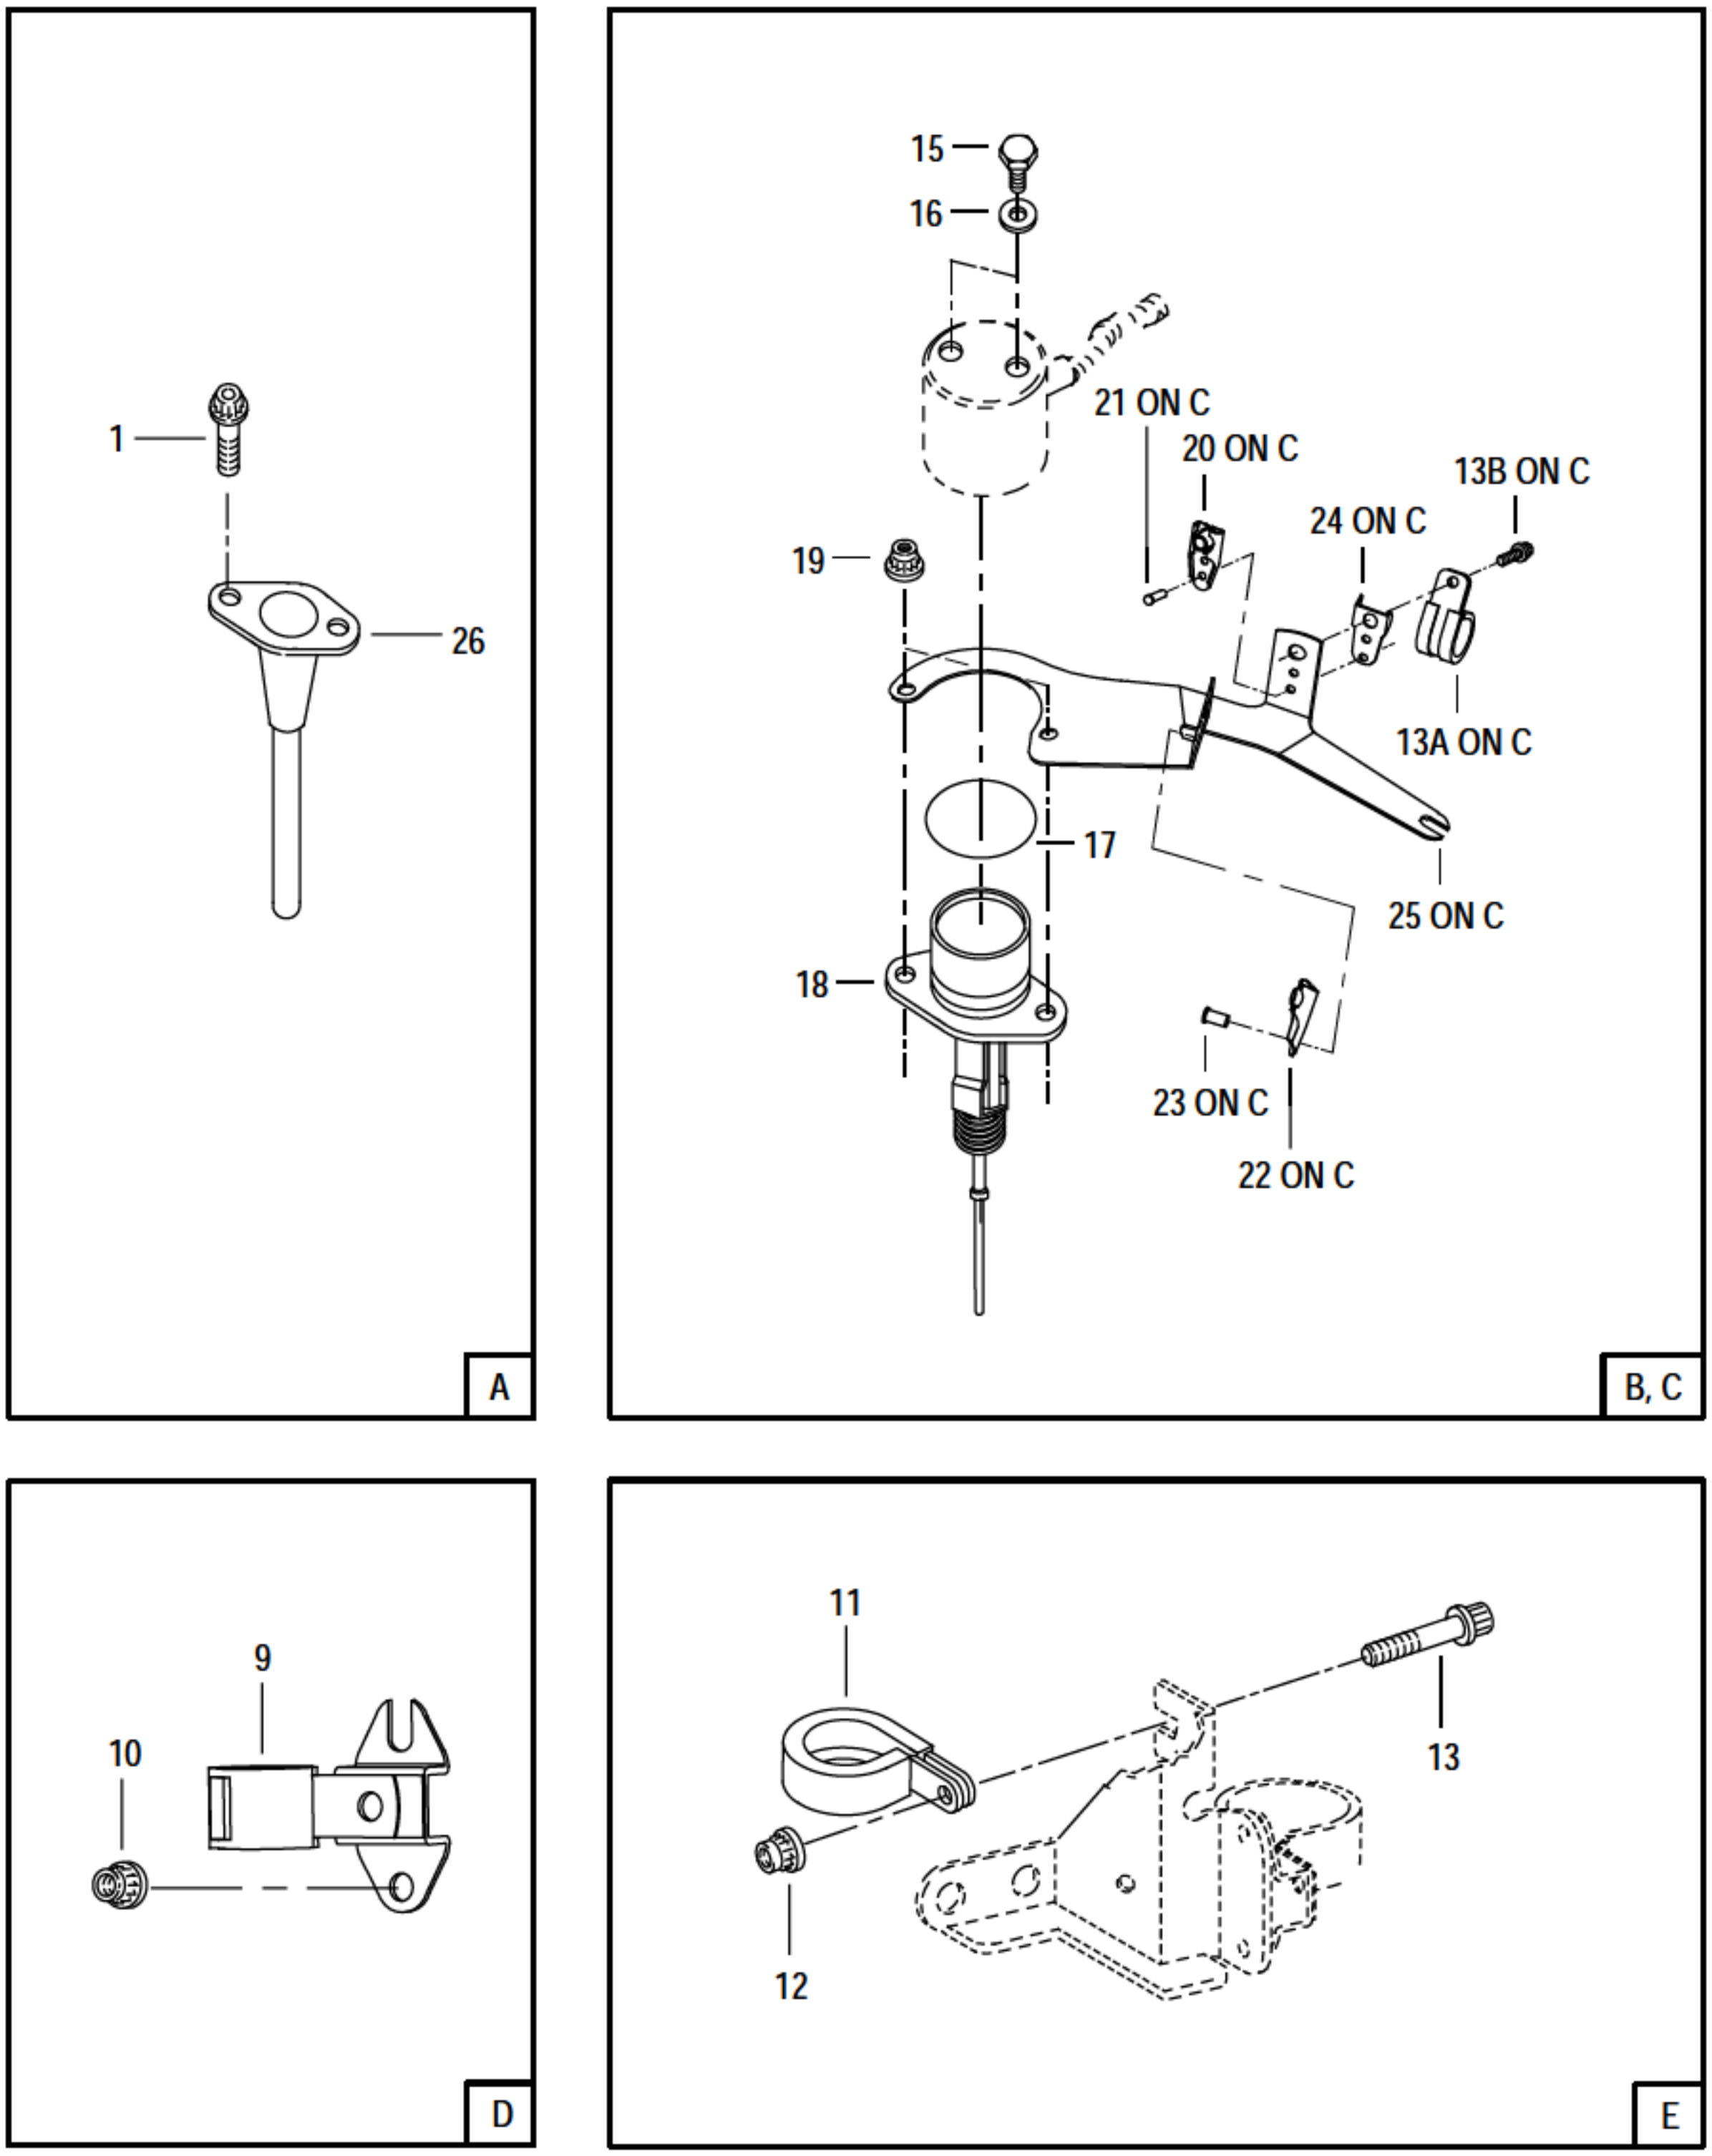


FIGURE 5. ENGINE ELECTRONIC CONTROL SIGNALS CABLE
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
5	NO NUMBER		ENGINE ELECTRONIC CONTROL SIGNALS CABLE . . SEE FIG. 2-3 FOR NHA	REF		
- 1	ST2017-028	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.875 IN. LONG	4		PAOZZ
- 2	TA14300004- 0410	84971	. CLAMP-LOOP, 2 HOLE, CUSHION, HINGE. . . . . P&WA PART NO. ST2818-0410 REPLACES ST2442-0410	1		PAOZZ
- 3	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 4	TA10300016-11	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-11 REPLACES ST2441-11	1		PAOZZ
- 5	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 6	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG	2		PAOZZ
- 7	TA10300016-09	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-09 REPLACES ST2441-09	1		PAOZZ
- 8	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 9	TA10300016-09	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-09 REPLACES ST2441-09	4		PAOZZ
- 10	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 11	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION. WHEN EXH USE ST1540-04	2		PAOZZ
	ST1540-04	52661	. CLAMP-LOOP, CUSHION.	2		PAOZZ
- 12	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 13	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 13A	ST1540-09	52661	. CLAMP-LOOP, CUSHION.	1	LL	PAOZZ
- 13B	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	LL	PAOZZ
- 14	46300 #	83311	. CABLE-SPECIAL PURPOSE, ELECTRICAL, ... BRANCHED, ENGINE ELECTRONIC CONTROL SIGNALS P&WA PART NO. 4077010 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 15	111724	83311	.. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.062 IN. LONG	14		PAOZZ
- 16	104753	83311	.. WASHER-SEALING . . . . 0.438 OD X 0.500 IN. THK	14		PAOZZ
- 16A	< 149383-1017	77820	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2017	49367	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
- 17	MS9386-122	96906	. PACKING	7		PAOZZ
R - 18	5302 #	60678	. THERMOCOUPLE-IMMERSION, FTIT SENSING . . . . . P&WA PART NO. 4077612	7		PAOZZ
- 19	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
	4082284-01	52661	. BRACKET-LOOP CLAMP, ASSY OF	1	LL	PAOFF
- 20	ST1569-04	52661	.. NUT OPTION . . . . SEE OPTION TABLE	1		PAOZZ
- 21	AN123469	88044	.. RIVET (AP)	2		PAOZZ
- 22	ST1569-04	52661	.. NUT OPTION . . . . SEE OPTION TABLE	1		PAOZZ
- 23	AN123470	88044	.. RIVET (AP)	2		PAOZZ
- 24	53T850	52661	.. LUG-ANTI-ROTATION	1		PAFZZ
- 25	4082284-02	52661	.. BRACKET-LOOP CLAMP	1		PAFZZ
- 26	2123848	52661	. HOUSING-THERMOCOUPLE, ASSY OF	2		PAOFF

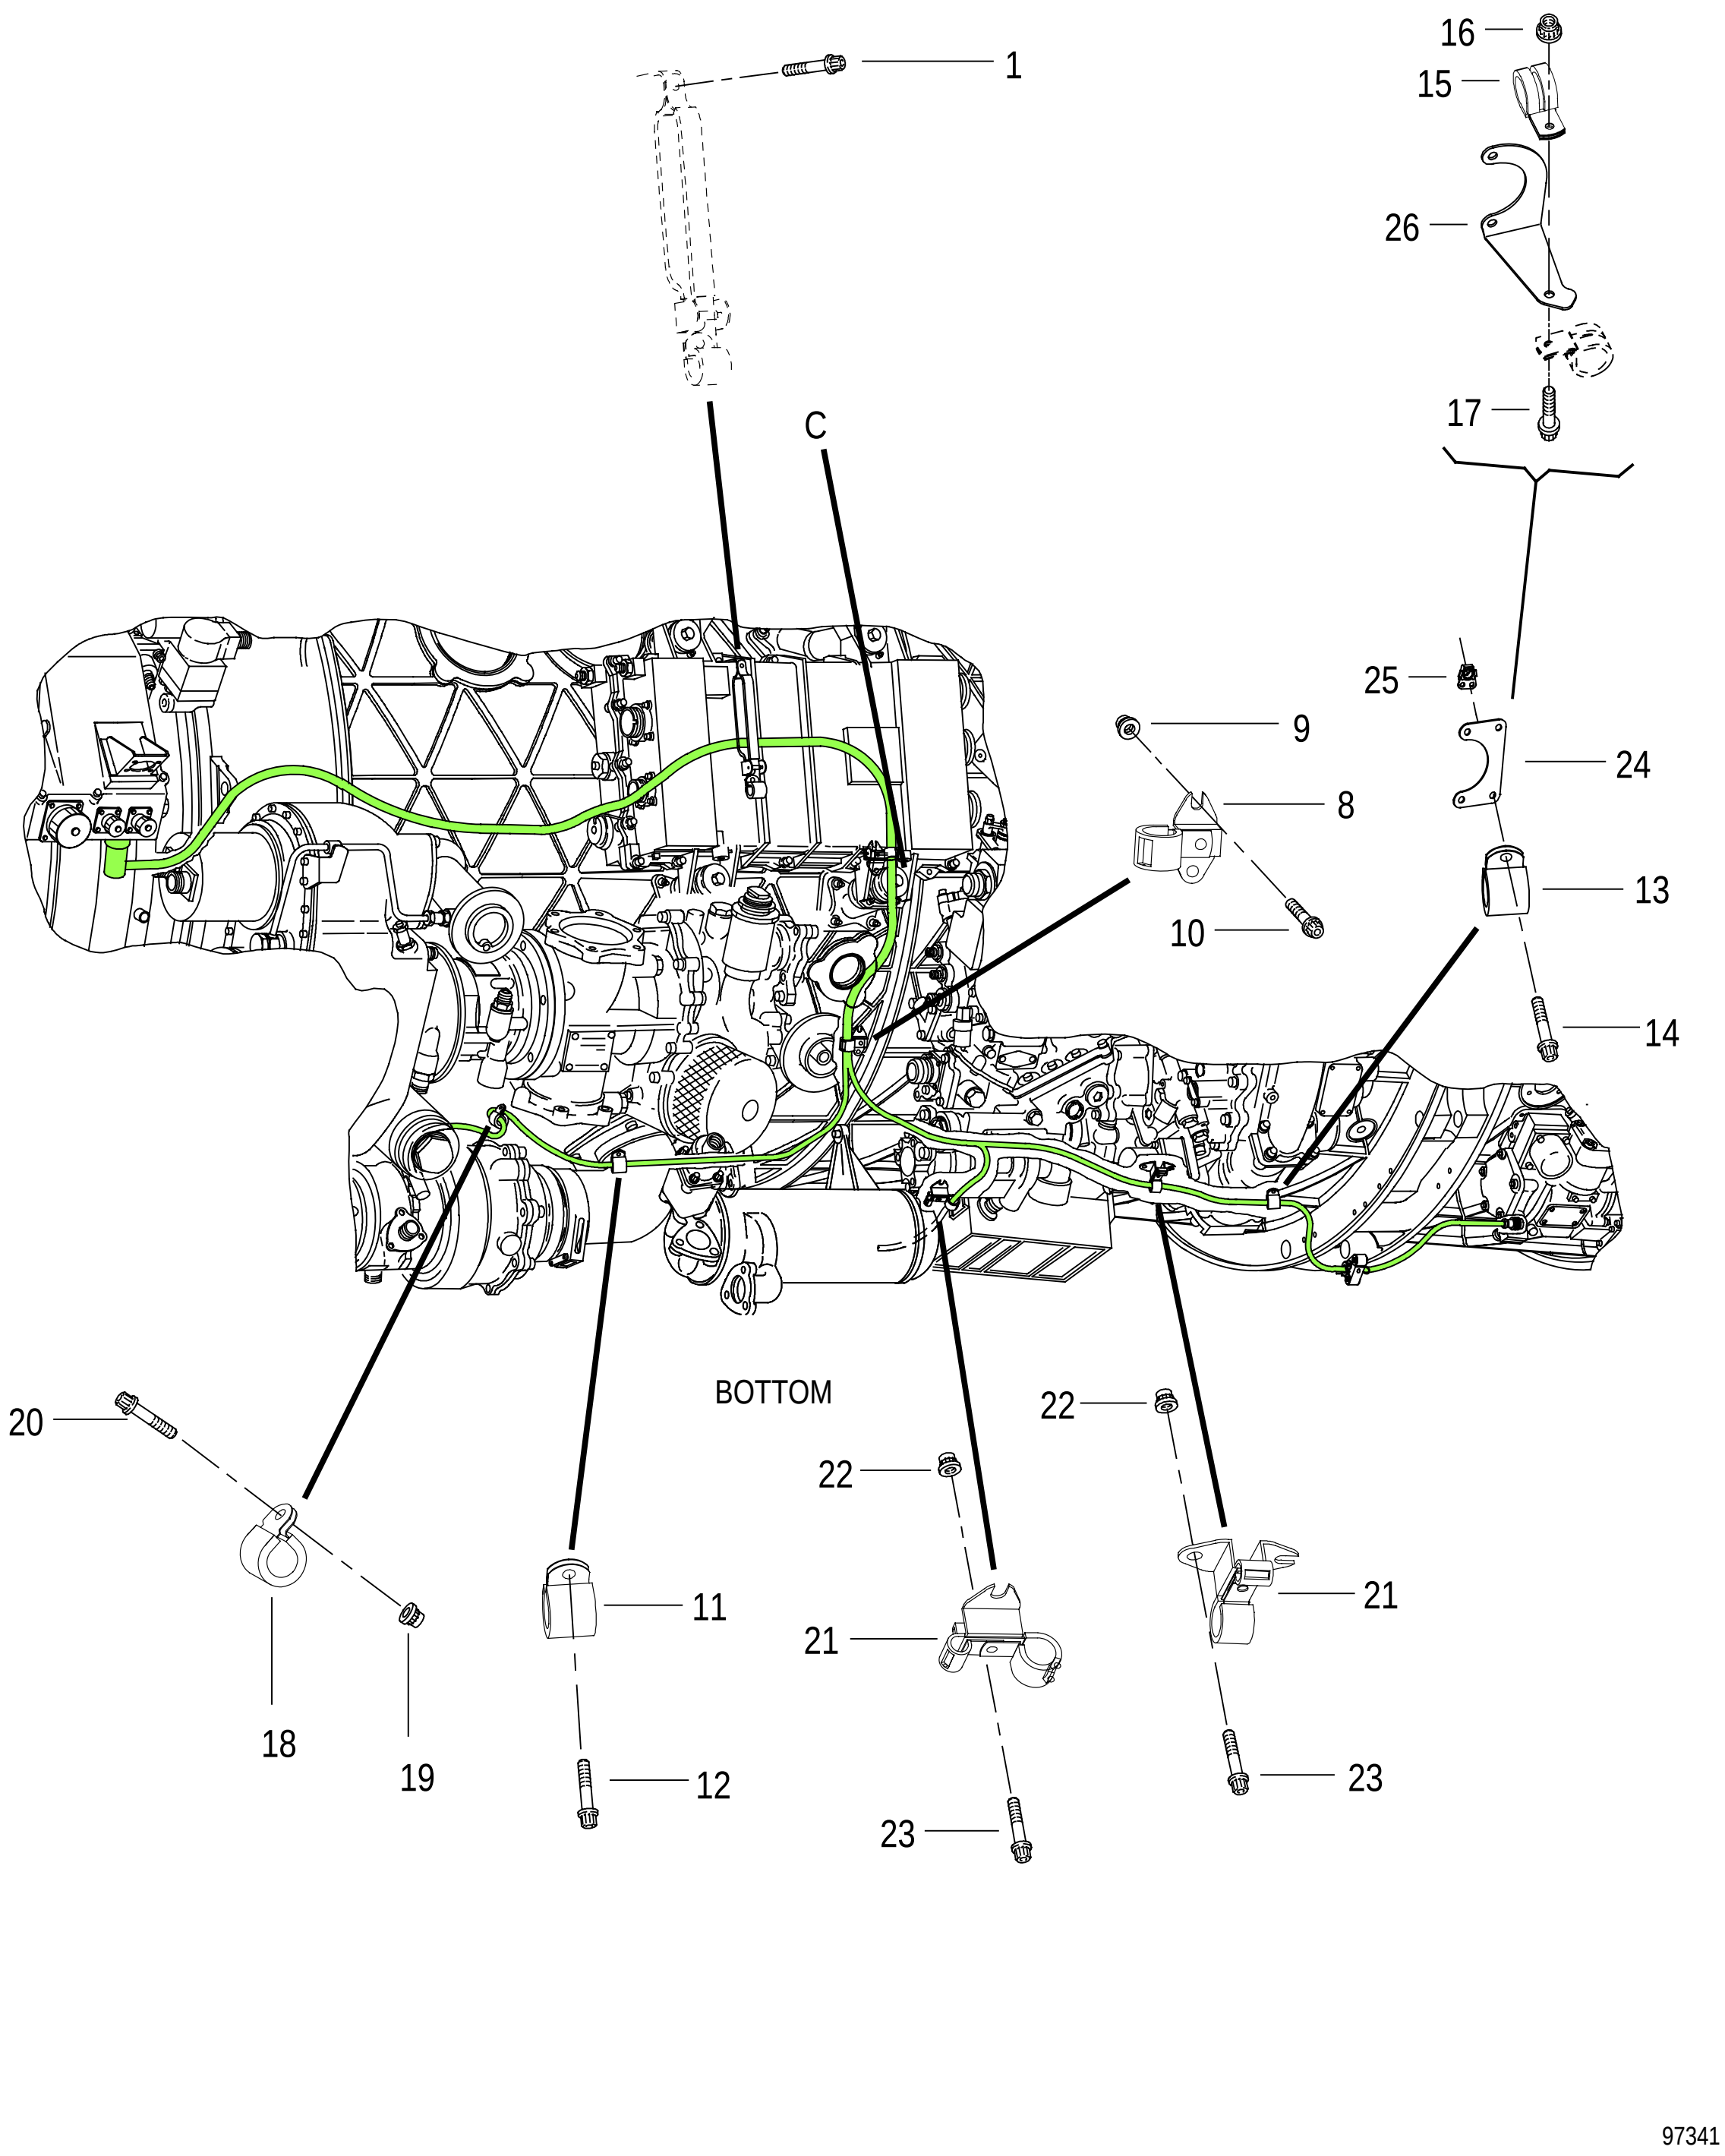


FIGURE 6. ENGINE ACCESSORIES CABLE
(SHEET 1 OF 4)

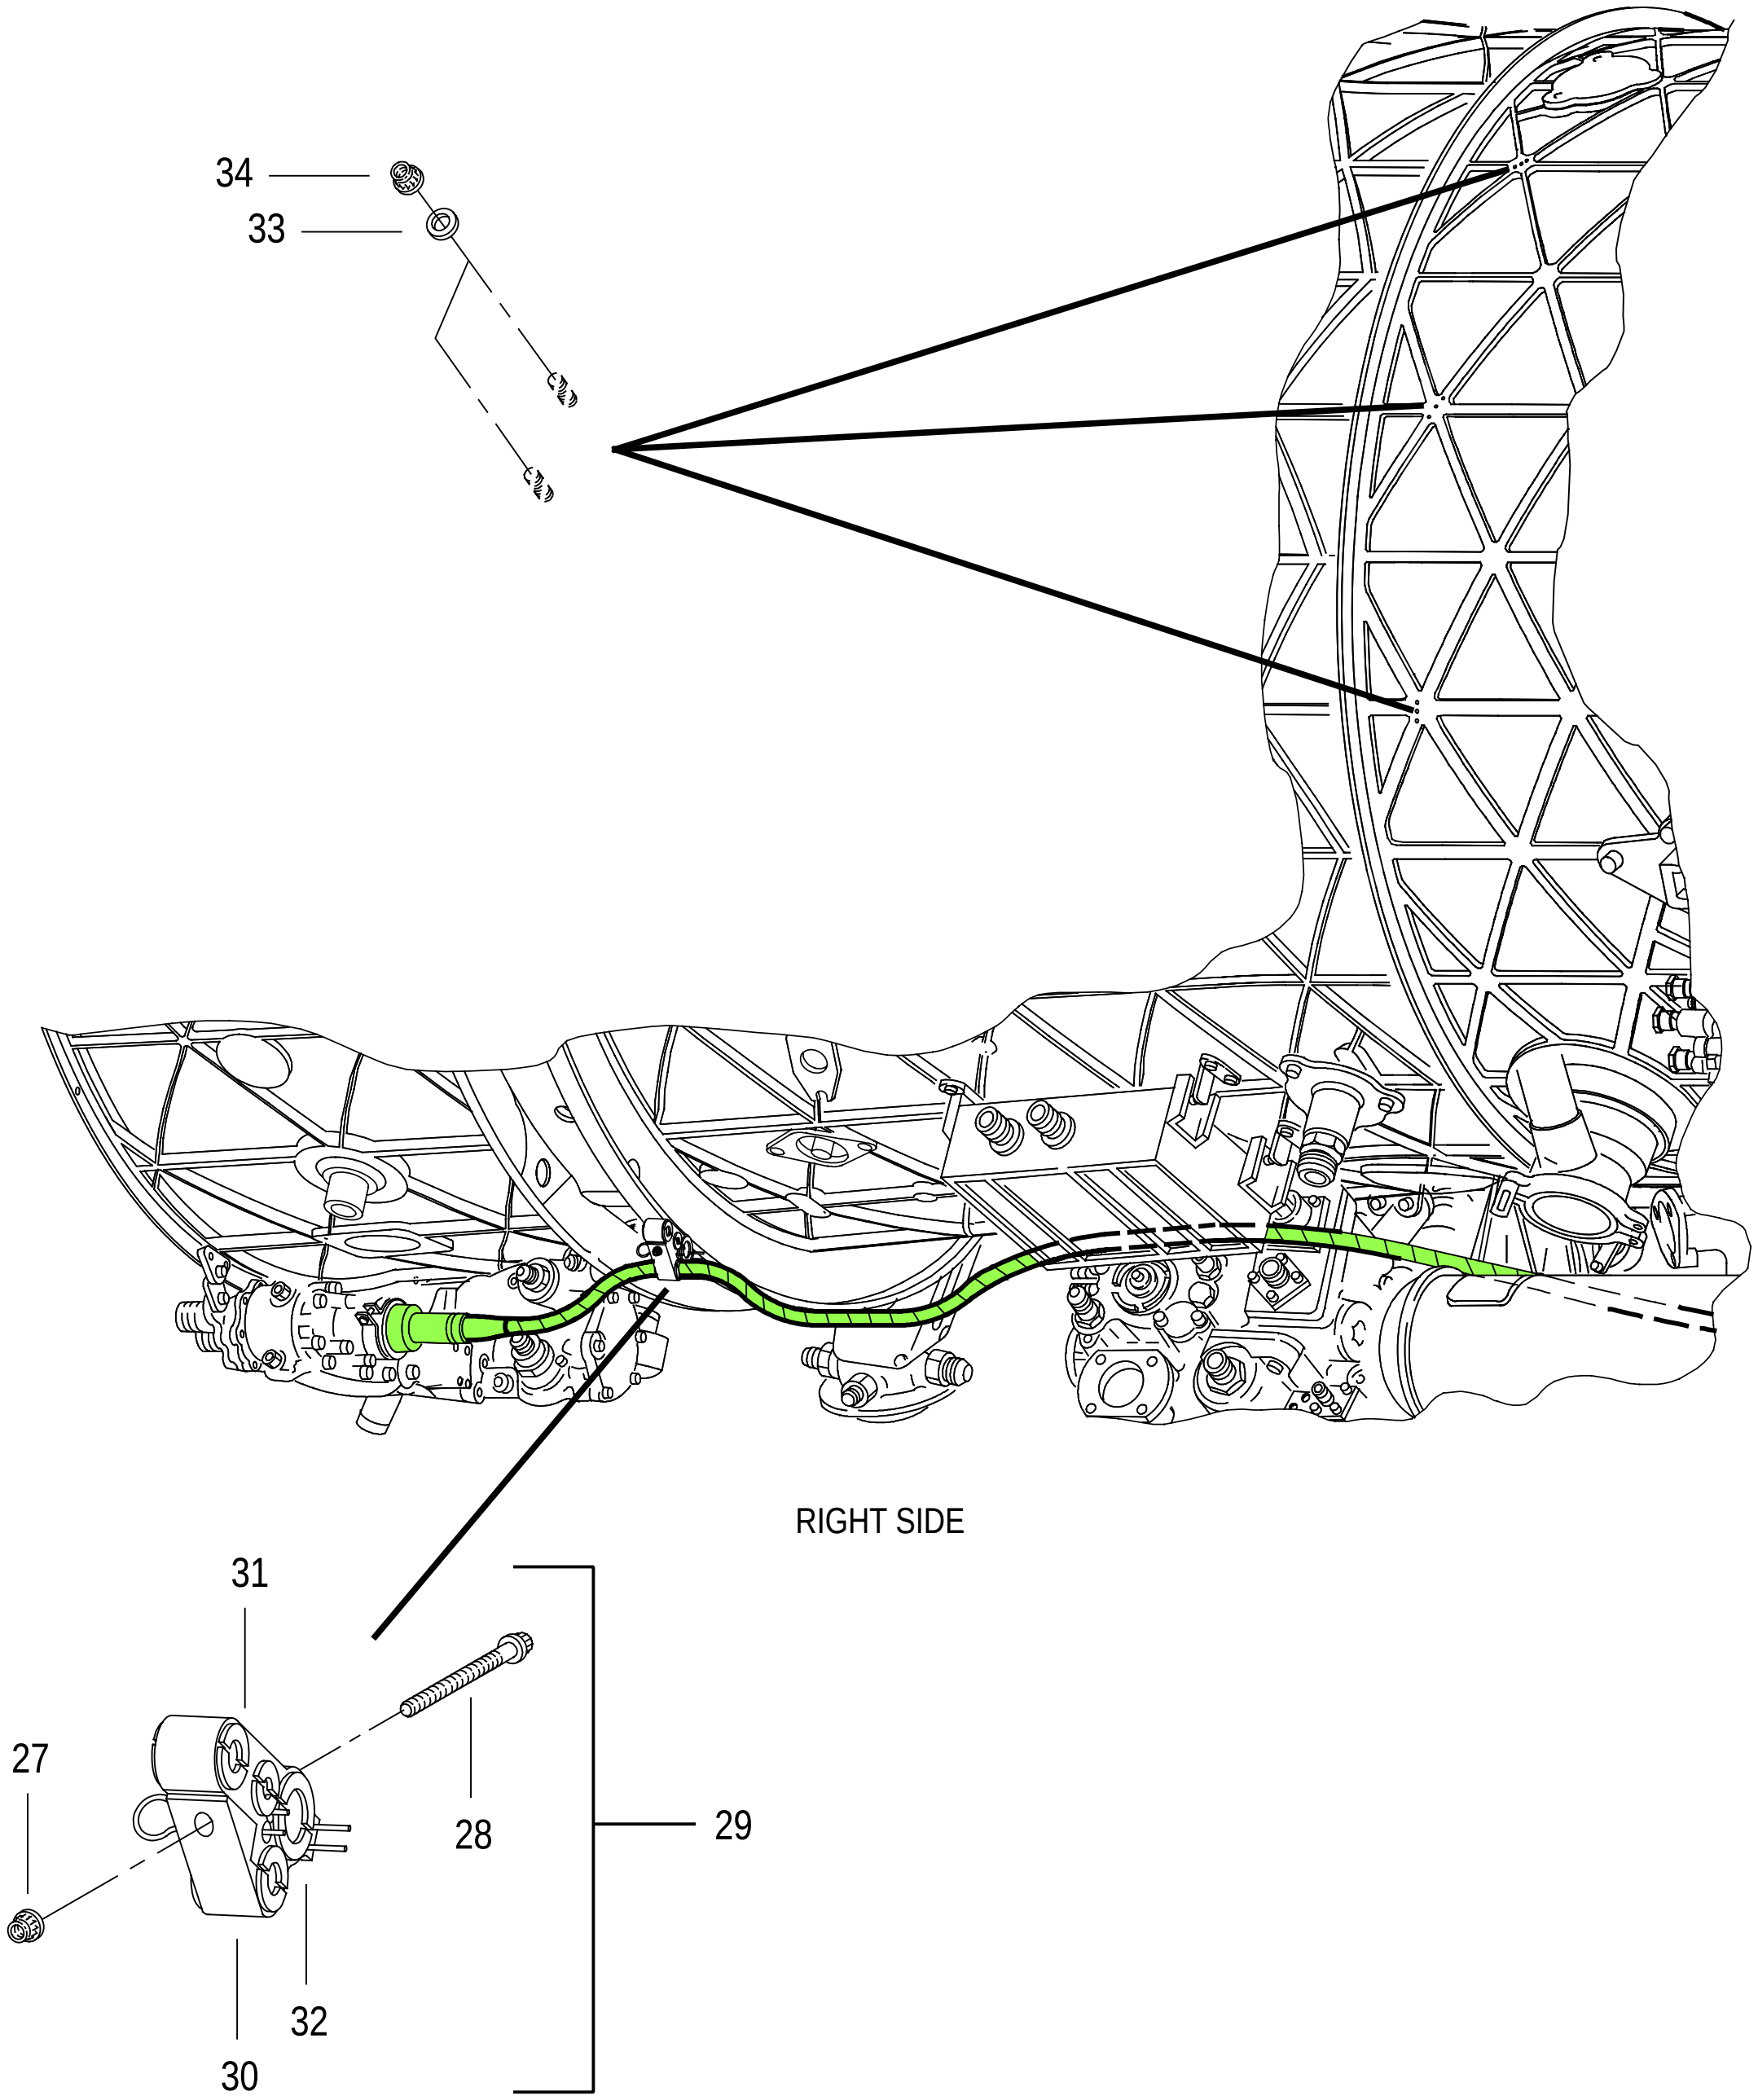


FIGURE 6. ENGINE ACCESSORIES CABLE
(SHEET 2 OF 4)

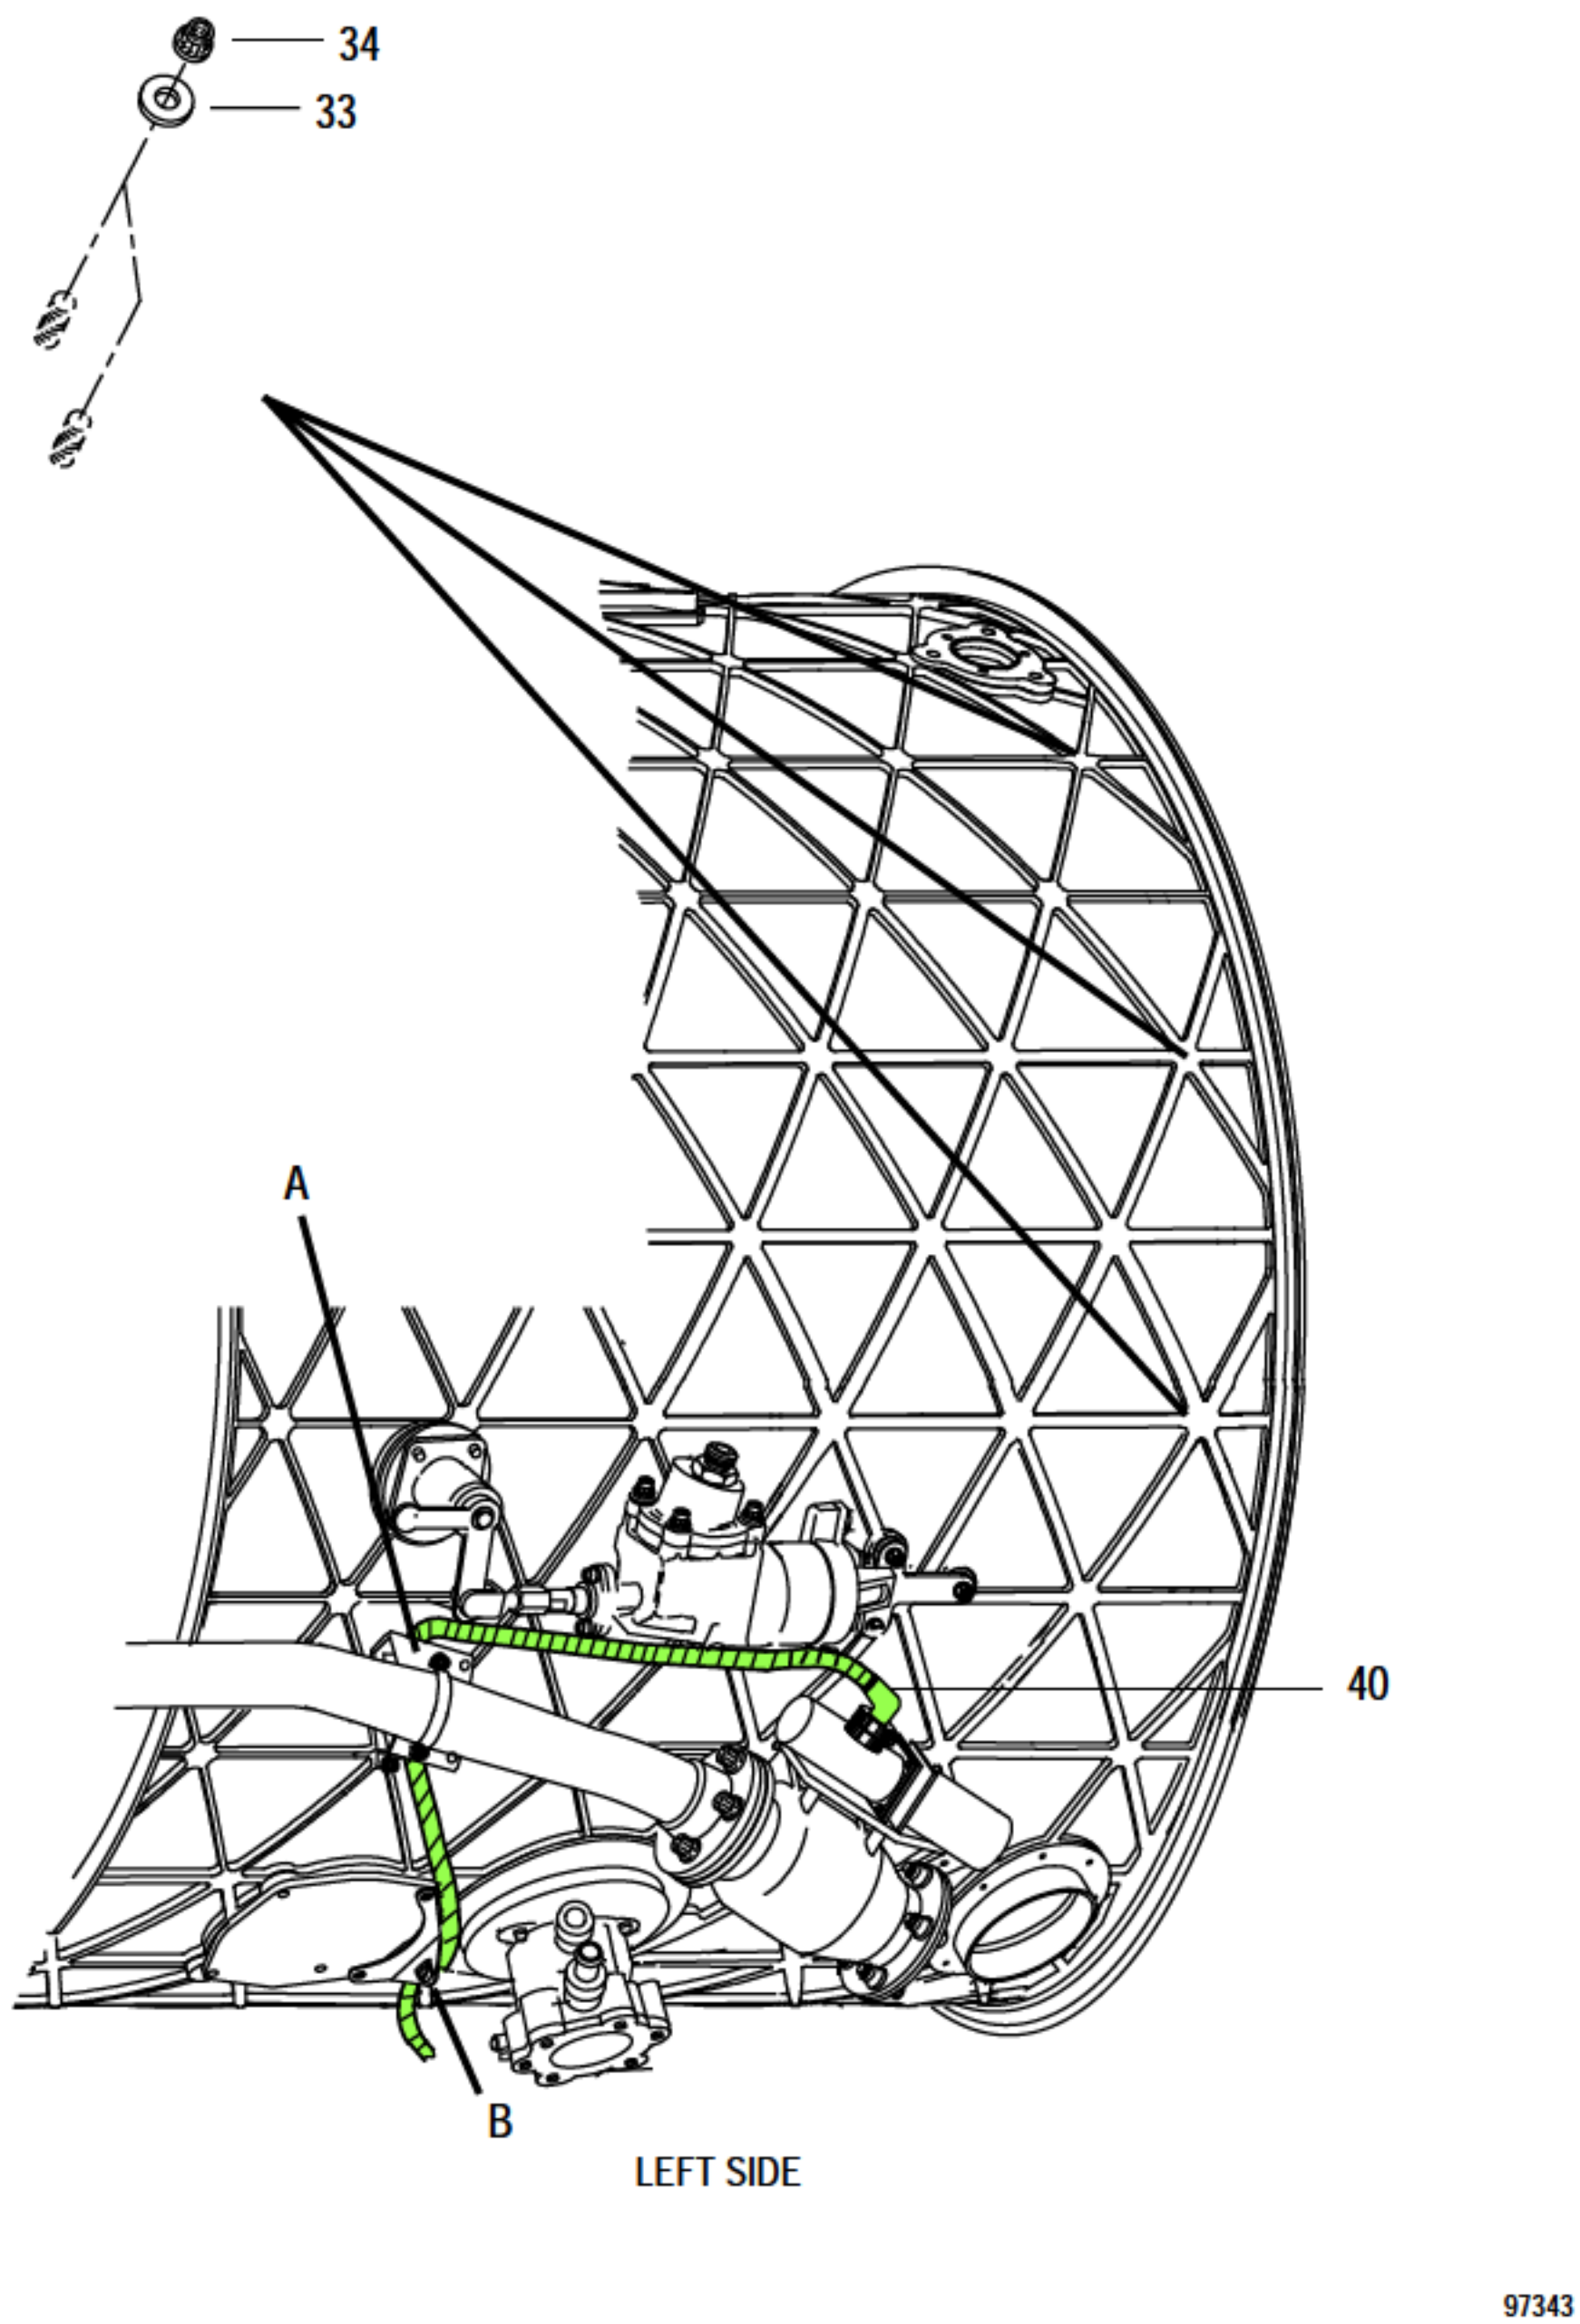


FIGURE 6. ENGINE ACCESSORIES CABLE
(SHEET 3 OF 4)

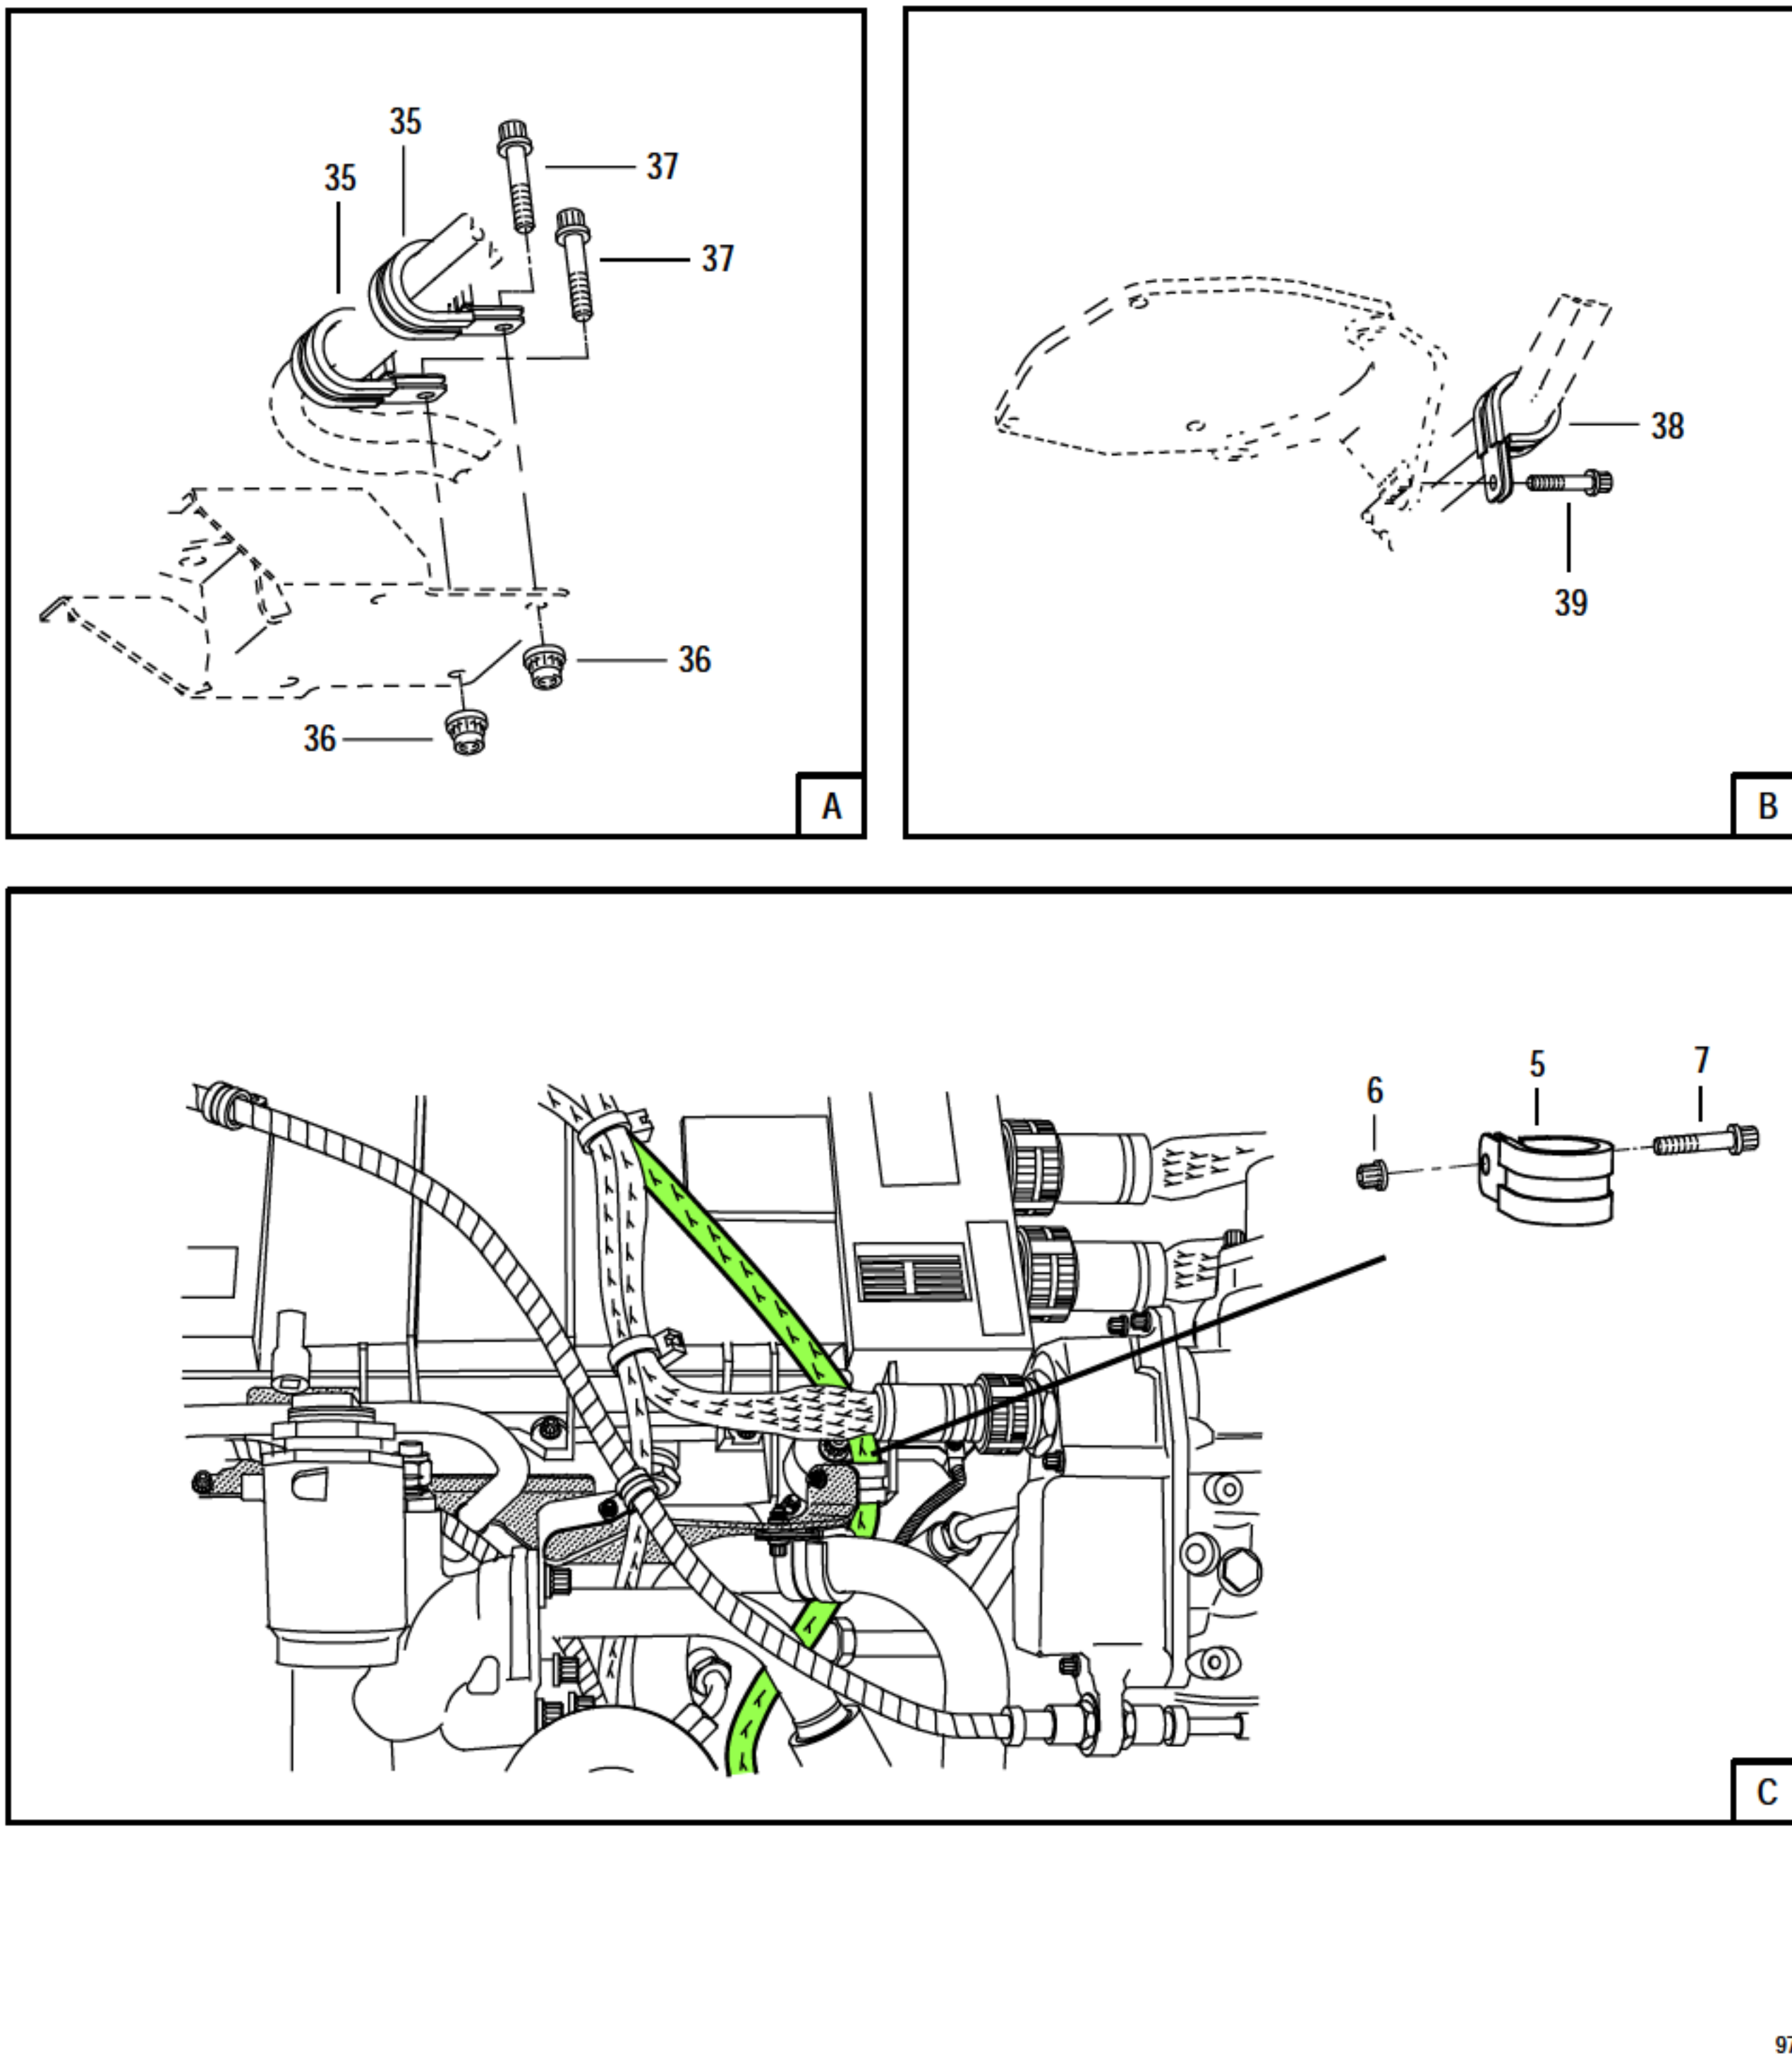


FIGURE 6. ENGINE ACCESSORIES CABLE
(SHEET 4 OF 4)

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
6		NO NUMBER		ENGINE ACCESSORIES CABLE . . . . SEE FIG. 2-4 FOR NHA	REF		
- 1		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG	1		PAOZZ
- 2		DELETED					
- 3		DELETED					
- 4		DELETED					
- 5	+	ST1540-06	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 6		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 7		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 8		TA10300016-09	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-09 REPLACES ST2441-09 SUPERSEDED BY TA107000010-06	1		PAOZZ
		TA107000010-06	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2816-06 SUPERSEDES TA10300016-09	1		PAOZZ
- 9		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 10		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG WHEN EXH USE ST1540-06	2		PAOZZ
- 11		ST2439-06	52661	. CLAMP ASSY-LOOP, CUSHION.	1		PAOZZ
		ST1540-06	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 12		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 13	+	ST2439-06	52661	. CLAMP ASSY-LOOP, CUSHION. WHEN EXH USE ST1540-06	1	S	PAOZZ
	+	ST1540-06	52661	. CLAMP-LOOP, CUSHION	1	S	PAOZZ
- 14		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	S	PAOZZ
- 15	+	ST1540-06	52661	. CLAMP-LOOP, CUSHION	1	T	PAOZZ
- 16		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1	T	PAOZZ
- 17		ST2015-018	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.562 IN. LONG (AP)	1	T	PAFZZ
- 20		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 21		TA14300004- 0506	84971	. CLAMP-LOOP, 2 HOLE, CUSHION, HINGE. . . . . P&WA PART NO. ST2818-0506 REPLACES ST2442-0506	2		PAOZZ
- 22		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 23		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
6 - 24	4075933	52661	. BRACKET-LOOP CLAMP, ASSY OF .... PARTIAL BREAKDOWN FOLLOWS	1	S	PAFZZ
- 25	= 4046367	52661	.. NUT OPTION .... SEE OPTION TABLE	2		PAFZZ
	= ST5030-09	52661	.. NUT OPTION .... SEE OPTION TABLE	2		PAFZZ
- 26	4081492	52661	. BRACKET-LOOP CLAMP	1	T	PAFZZ
- 27	4023115	52661	. NUT OPTION .... SEE OPTION TABLE	1		PAOZZ
- 28	4075410	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 1.230 IN. LONG	1		PAOZZ
- 29	4074134	52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... WHEN EXH USE 4078515	1		PAOBZ
	4078515	52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
- 30	4074131	52661	.. CLAMP SEGMENT-BLOCK, GROMMET, 1 HOLE ...	1		XA
- 31	4074132	52661	.. CLAMP SEGMENT-BLOCK, GROMMET, 4 HOLE ...	1		XA
- 32	4074133	52661	.. CLAMP SEGMENT-BLOCK, GROMMET, 3 HOLE ...	1		XA
- 33	ST2108-04	52661	. SPACER-SLEEVE................................. 0.203 ID X 0.406 OD X 0.125 IN. THK	12		PAOZZ
- 34	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 35	ST1540-10	52661	. CLAMP-LOOP, CUSHION.......................... REPLACES ST1540-06	2		PAOZZ
- 36	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 37	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 38	ST1540-10	52661	. CLAMP-LOOP, CUSHION.......................... REPLACES ST1540-06	1		PAOZZ
- 39	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 40	420133 #	83311	. CABLE-SPECIAL PURPOSE, BRANCHED, ENGINE . ACCESSORIES P&WA PART NO. 4080477 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 41	< 149383-2011	49367	.. BAND-EMI....................................... SERVICE REPAIR PART	1		PAFZZ

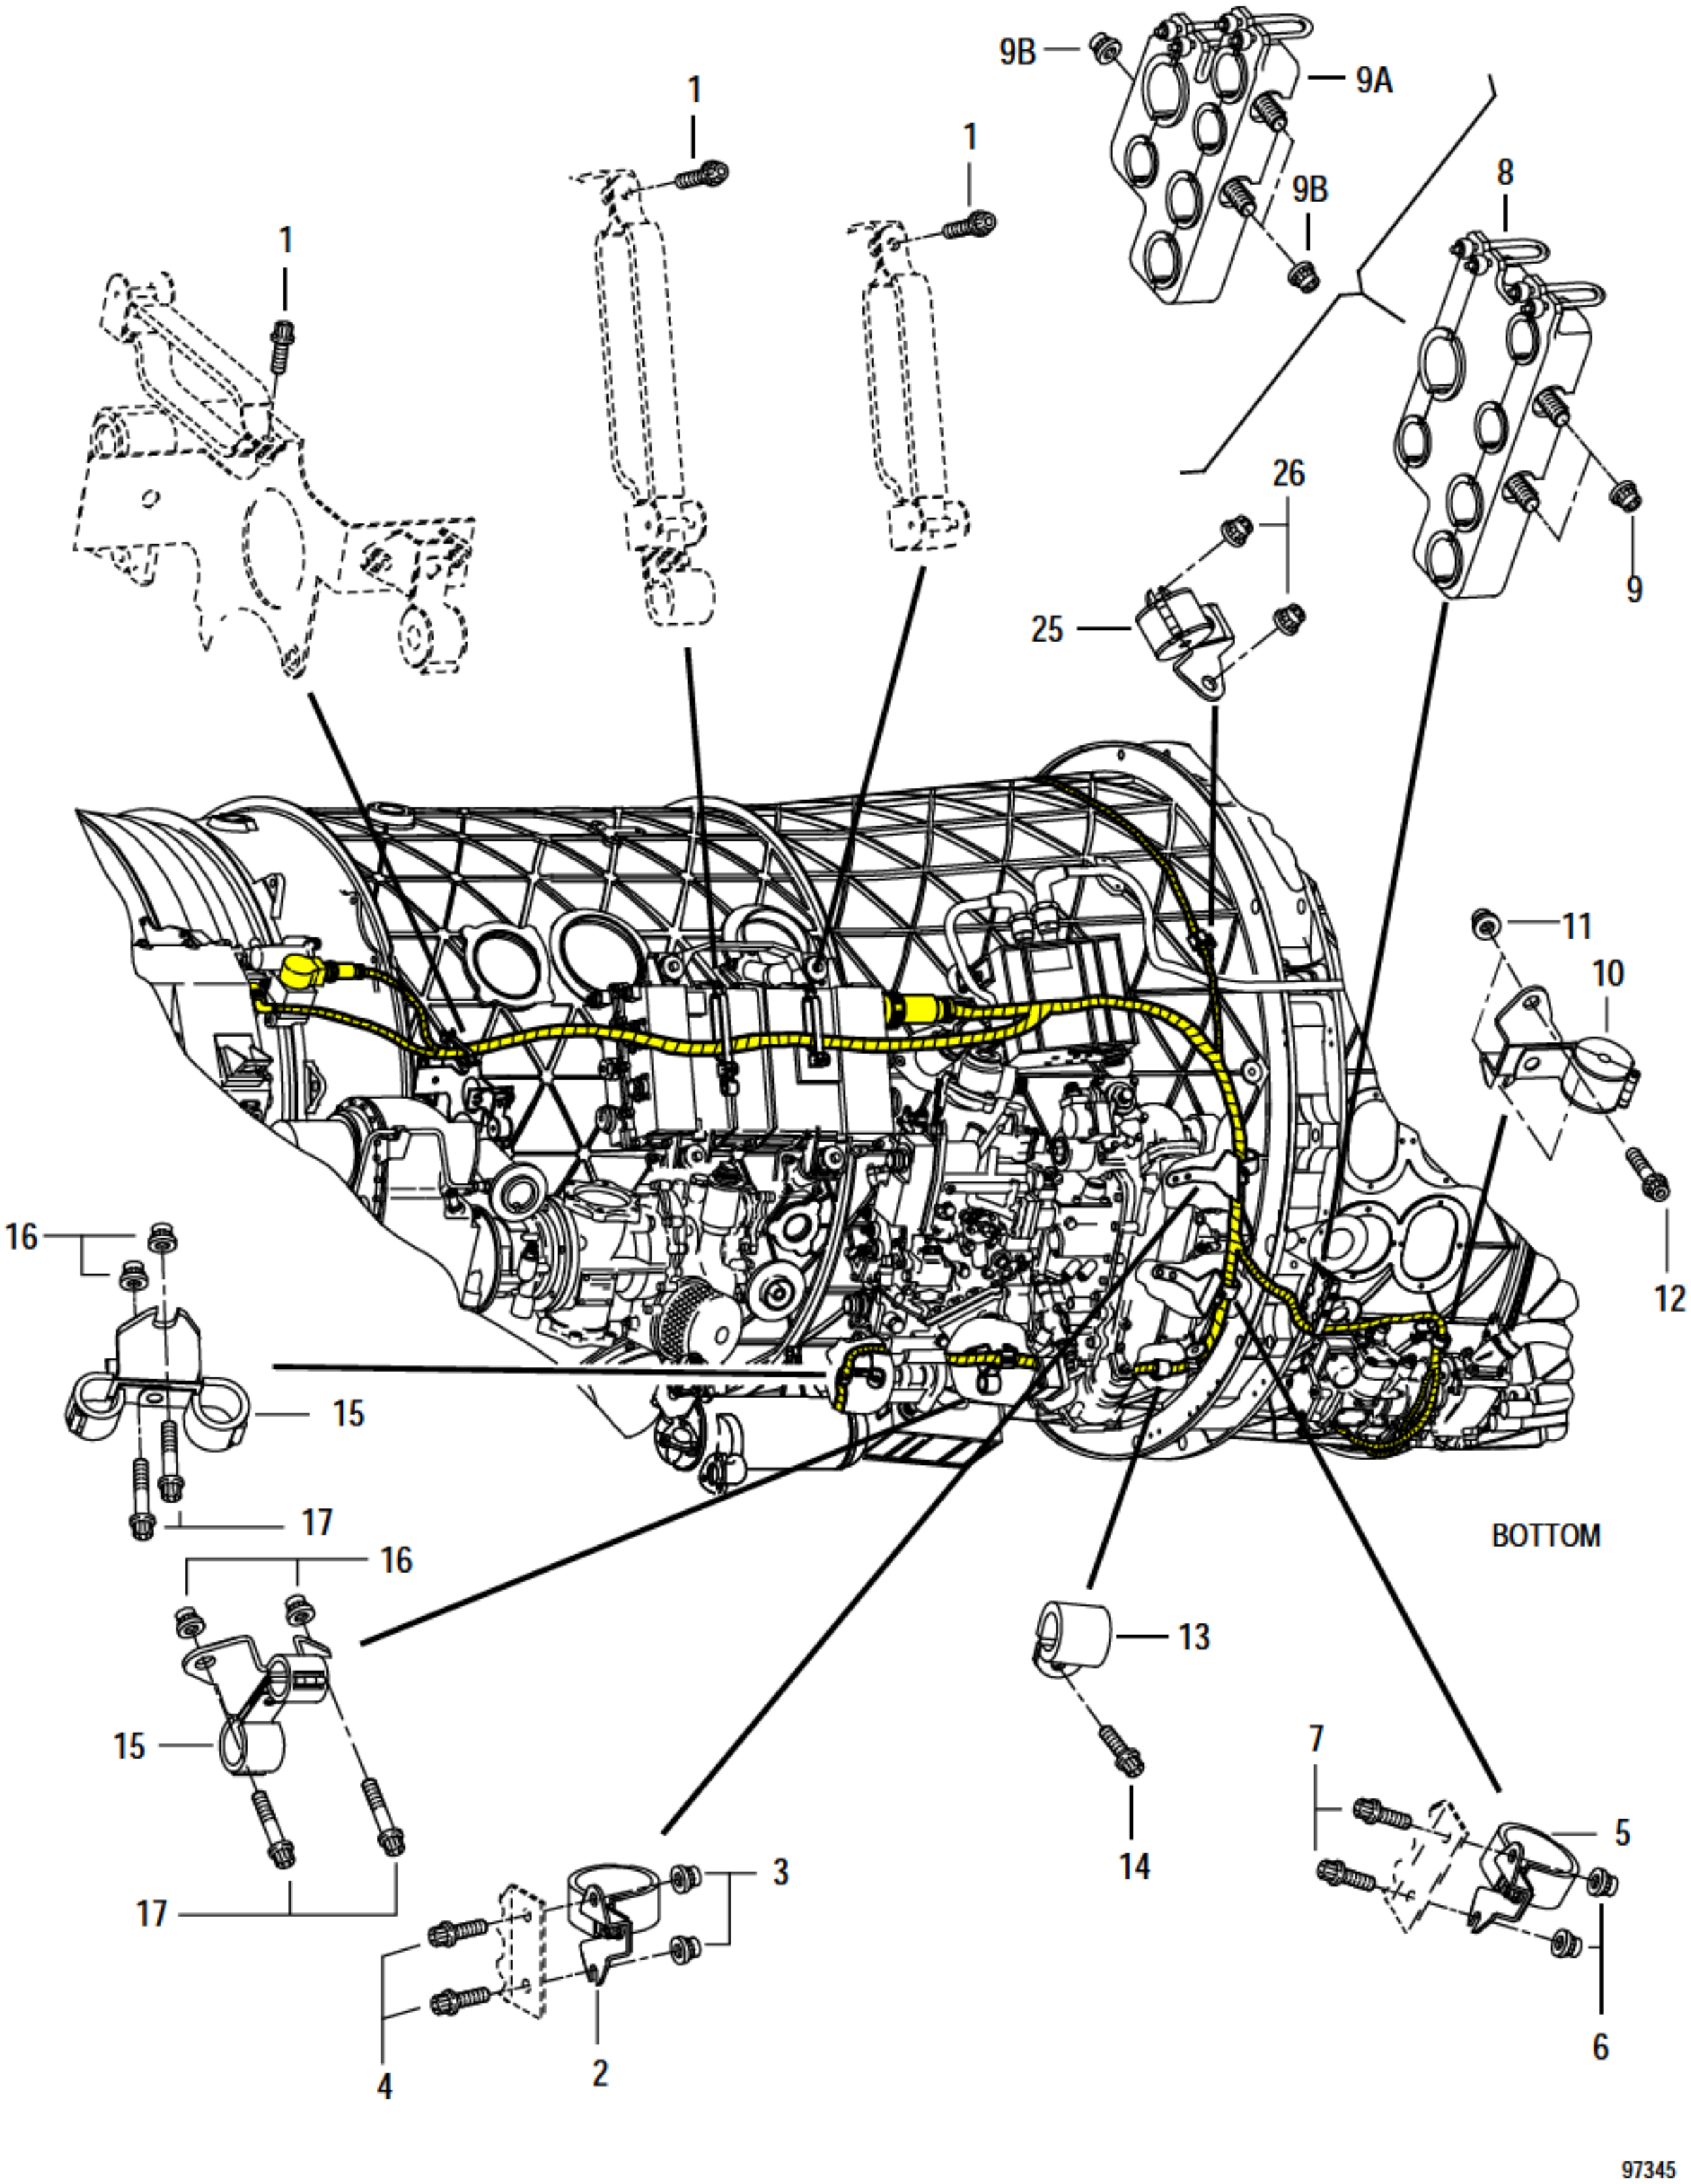


FIGURE 7. ENGINE ACTUATOR CABLE
(SHEET 1 OF 3)

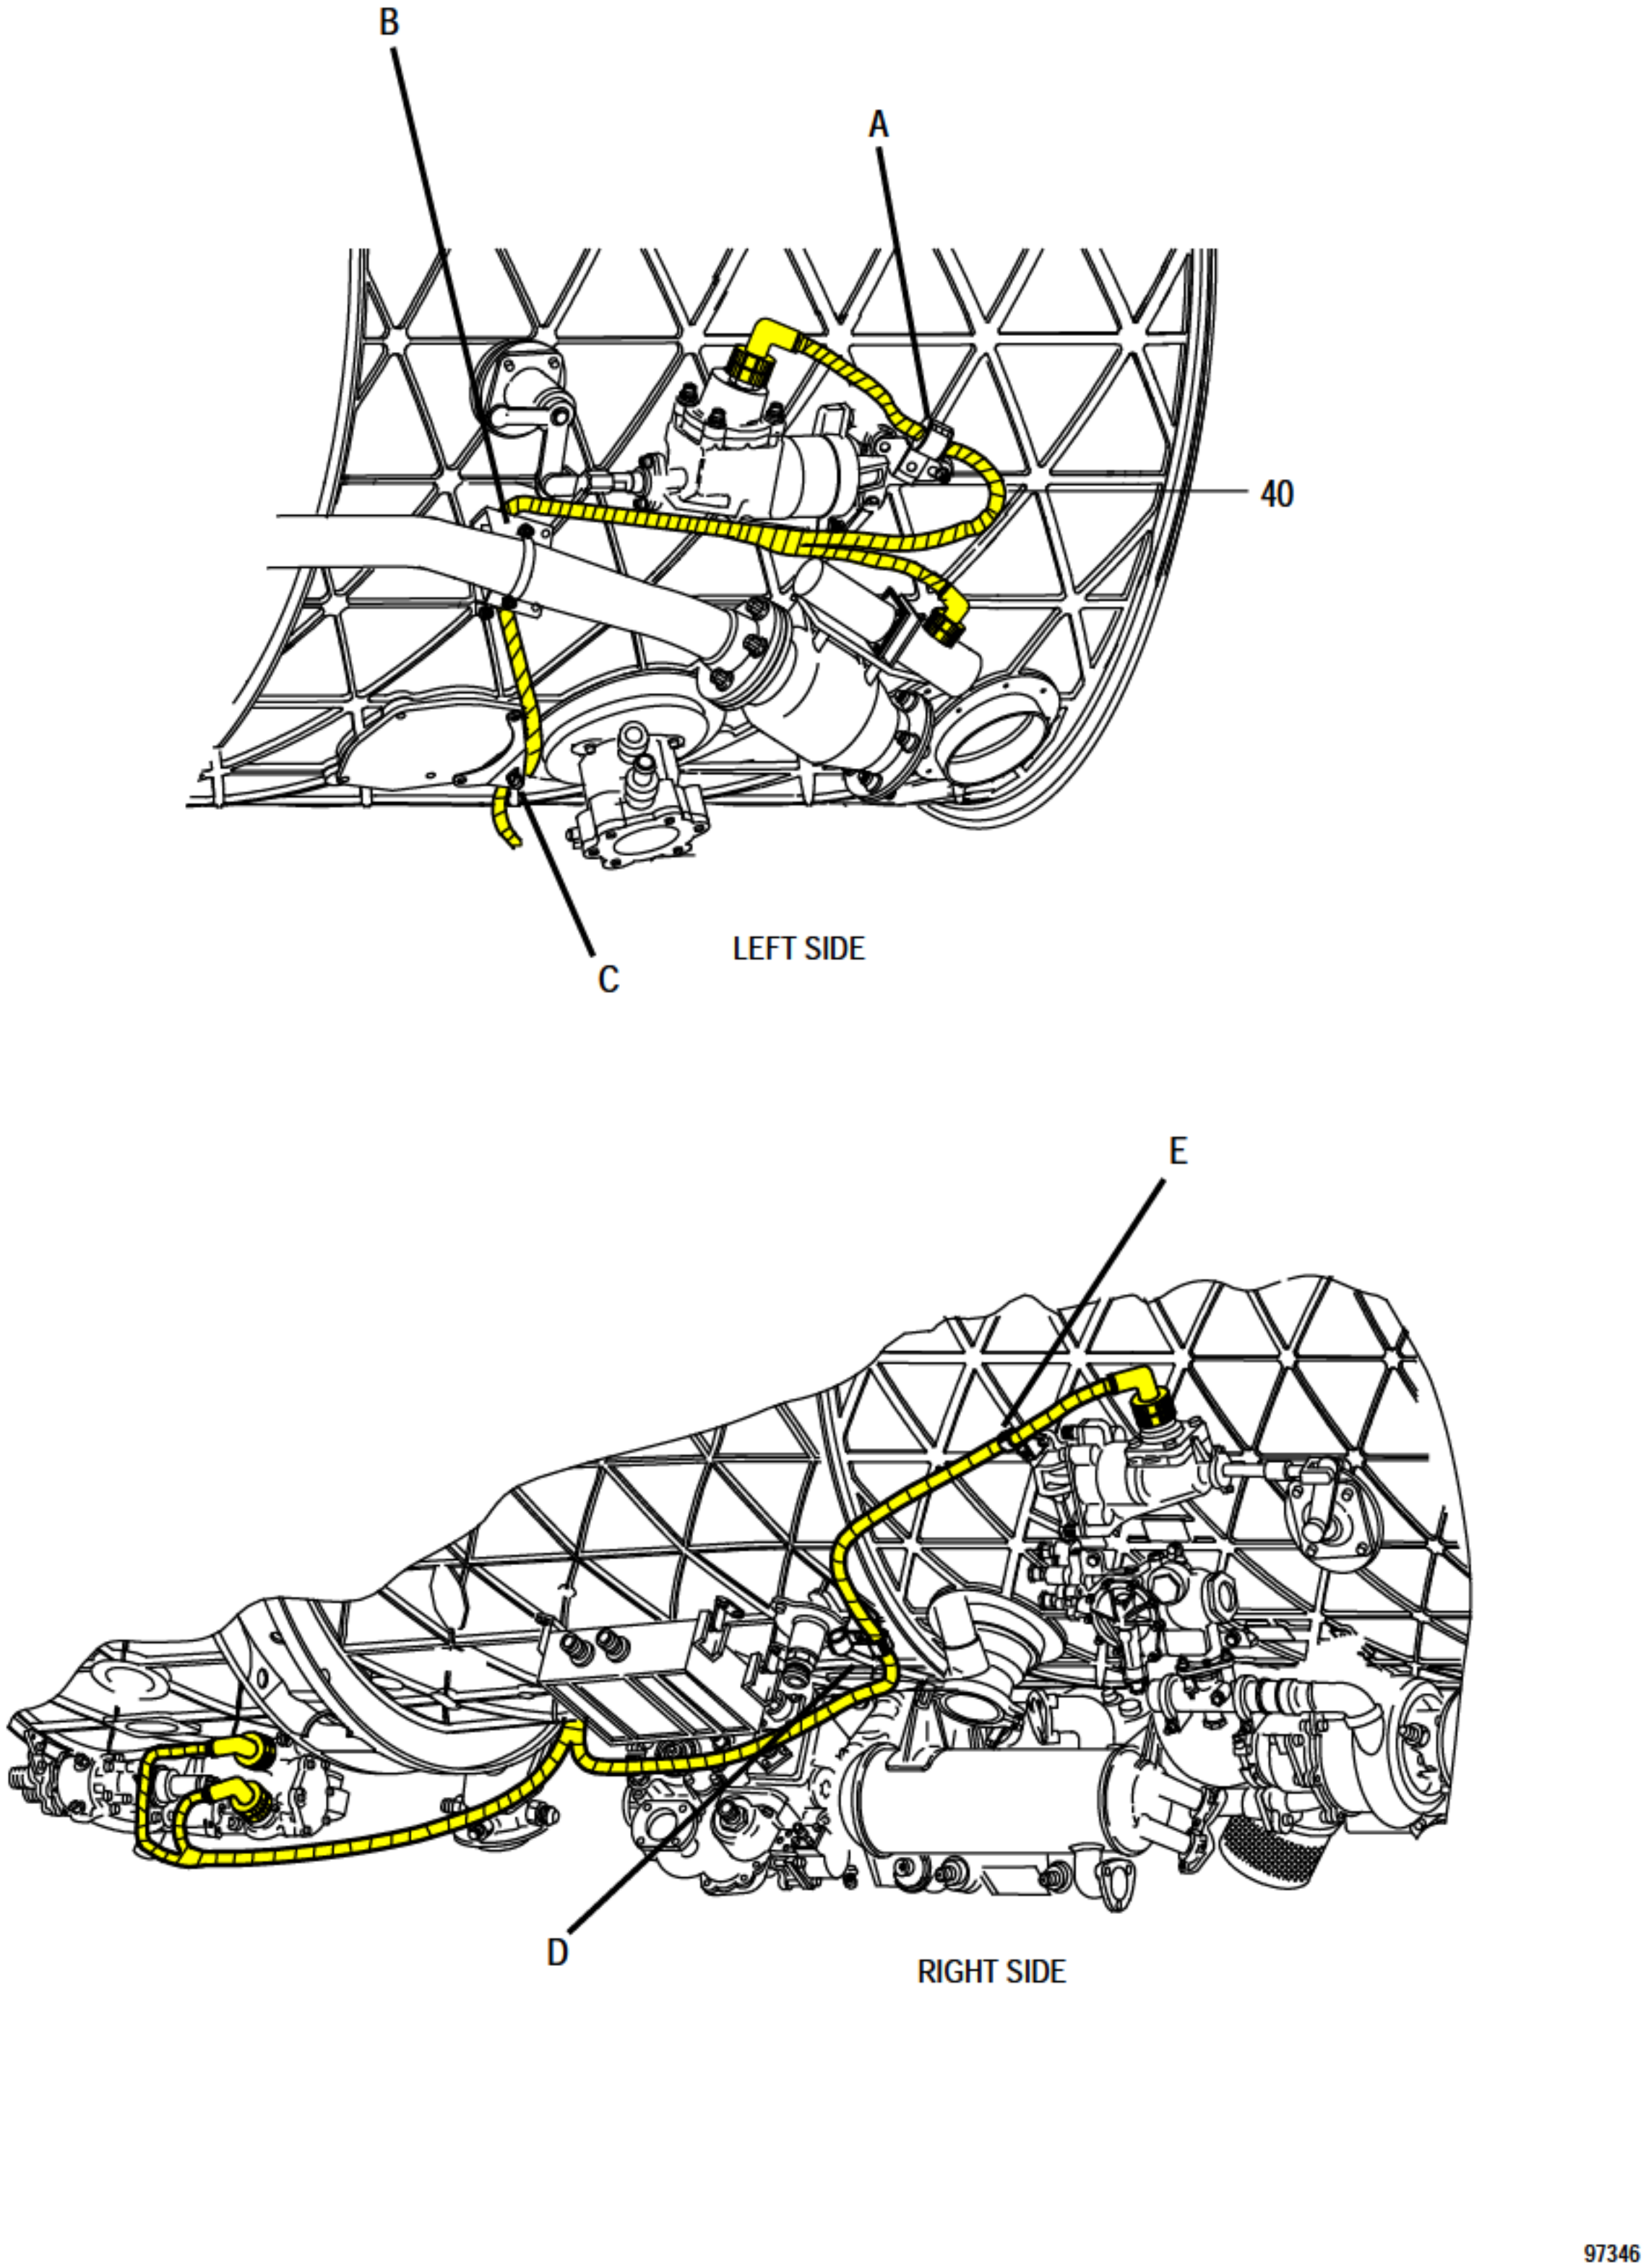


FIGURE 7. ENGINE ACTUATOR CABLE
(SHEET 2 OF 3)

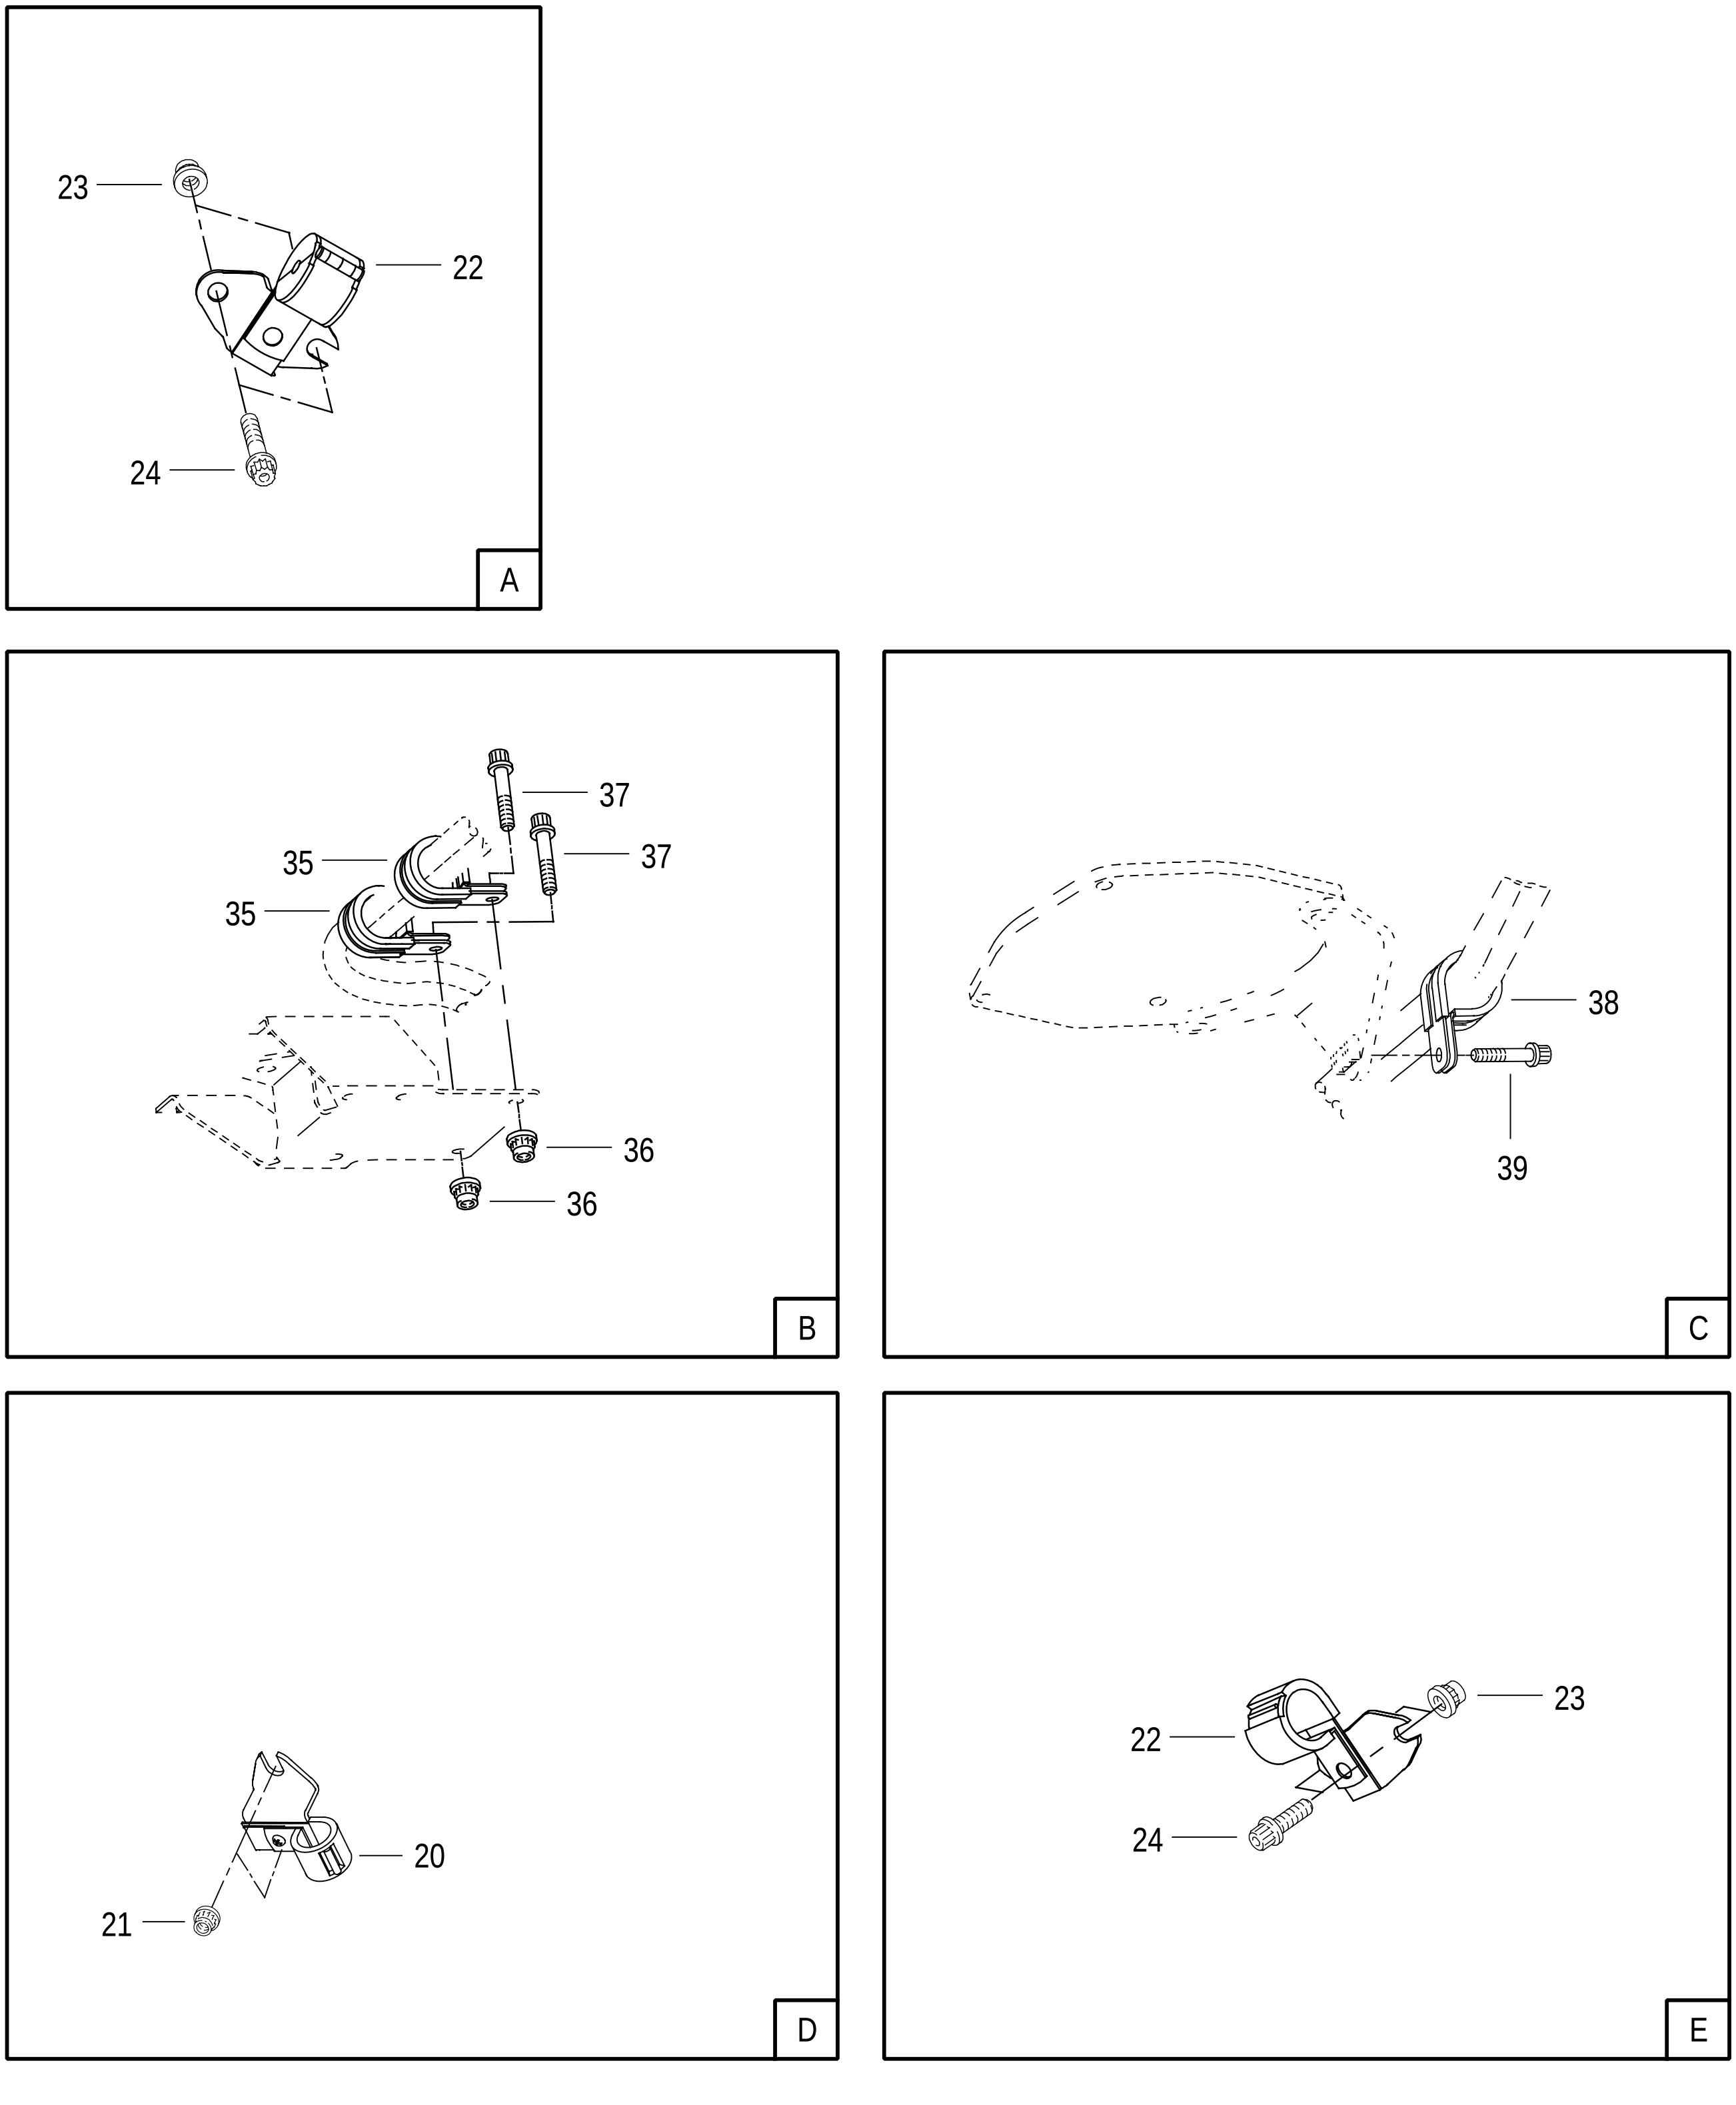


FIGURE 7. ENGINE ACTUATOR CABLE
(SHEET 3 OF 3)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
7	NO NUMBER		ENGINE ACTUATOR CABLE .... SEE FIG. 2-5 FOR NHA	REF		
- 1	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG	3		PAOZZ
- 2	TA10300016-20	84971	. CLAMP-LOOP, CUSHION, HINGE .... P&WA PART NO. ST2817-20 REPLACES ST2441-20	1		PAOZZ
- 3	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
- 4	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	2		PAOZZ
- 5	TA10300016-18	84971	. CLAMP-LOOP, CUSHION, HINGE .... P&WA PART NO. ST2817-18 REPLACES ST2441-18	1		PAOZZ
- 6	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
- 7	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 8	4076760	52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... WHEN EXH USE 4077973	1	AJ	PAOBZ
	4077973	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1	AJ	PAOBZ
- 9	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	4	AJ	PAOZZ
- 9A	4081468	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1	AK	PAOBZ
- 9B	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	3	AK	PAOZZ
- 10	TA107000010-06	84971	. CLAMP-LOOP, CUSHION, HINGE .... P&WA PART NO. ST2816-06 REPLACES ST2399-06	1		PAOZZ
- 11	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
- 12	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 13	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-04	1	BL/DA	PAOZZ
	ST1540-04	52661	. CLAMP-LOOP, CUSHION..........................	1	BL/DA	PAOZZ
- 14	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	BL/DA	PAOZZ
- 15	TA14300004-0506	84971	. CLAMP-LOOP, 2 HOLE, CUSHION, HINGE.......... P&WA PART NO. ST2818-0506 REPLACES ST2442-0506	2		PAOZZ
- 16	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
- 17	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 18	DELETED					
- 19	DELETED					
- 20	TA107000010-04	84971	. CLAMP-LOOP, CUSHION, HINGE .... P&WA PART NO. ST2816-04	1		PAOZZ
- 21	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
- 22	TA107000010-04	84971	. CLAMP-LOOP, CUSHION, HINGE .... P&WA PART NO. ST2816-04 REPLACES ST2399-04	2		PAOZZ
- 23	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ

FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
7 - 24		ST2015-016		52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 25		TA107000010-06		84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2816-06 REPLACES ST2399-06	1		PAOZZ
- 26		4023115		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 27		DELETED						
- 28		DELETED						
- 29		DELETED						
- 30		DELETED						
- 31		DELETED						
- 32		DELETED						
- 33		DELETED						
- 34		DELETED						
- 34A		DELETED						
- 35	+	ST1540-10		52661	. CLAMP-LOOP, CUSHION. . . . . REPLACES ST1540-06	2		PAOZZ
- 36		4023115		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 37		ST2015-016		52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 38	+	ST1540-10		52661	. CLAMP-LOOP, CUSHION. . . . . REPLACES ST1540-06	1		PAOZZ
- 39		ST2015-016		52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 40		420134		83311	. CABLE-SPECIAL PURPOSE, ELECTRICAL, ... BRANCHED, ENGINE ACTUATOR P&WA PART NO. 4080478 REPLACED BY 420434	1		PAODD
		420434	#	83311	. CABLE-SPECIAL PURPOSE, ELECTRICAL, ... BRANCHED, ENGINE ACTUATOR P&WA PART NO. 4081242 REPLACES 420134 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 41	<	149383-2011		49367	.. BAND-EMI. . . . . SERVICE REPAIR PART USE ONLY ON 420134	1		PAFZZ
- 42	<	149383-1023		77820	.. BAND-EMI. . . . . SERVICE REPAIR PART USE ONLY ON 420434	1		PAFZZ
	<	149383-2023		49367	.. BAND-EMI. . . . . SERVICE REPAIR PART USE ONLY ON 420434	1		PAFZZ

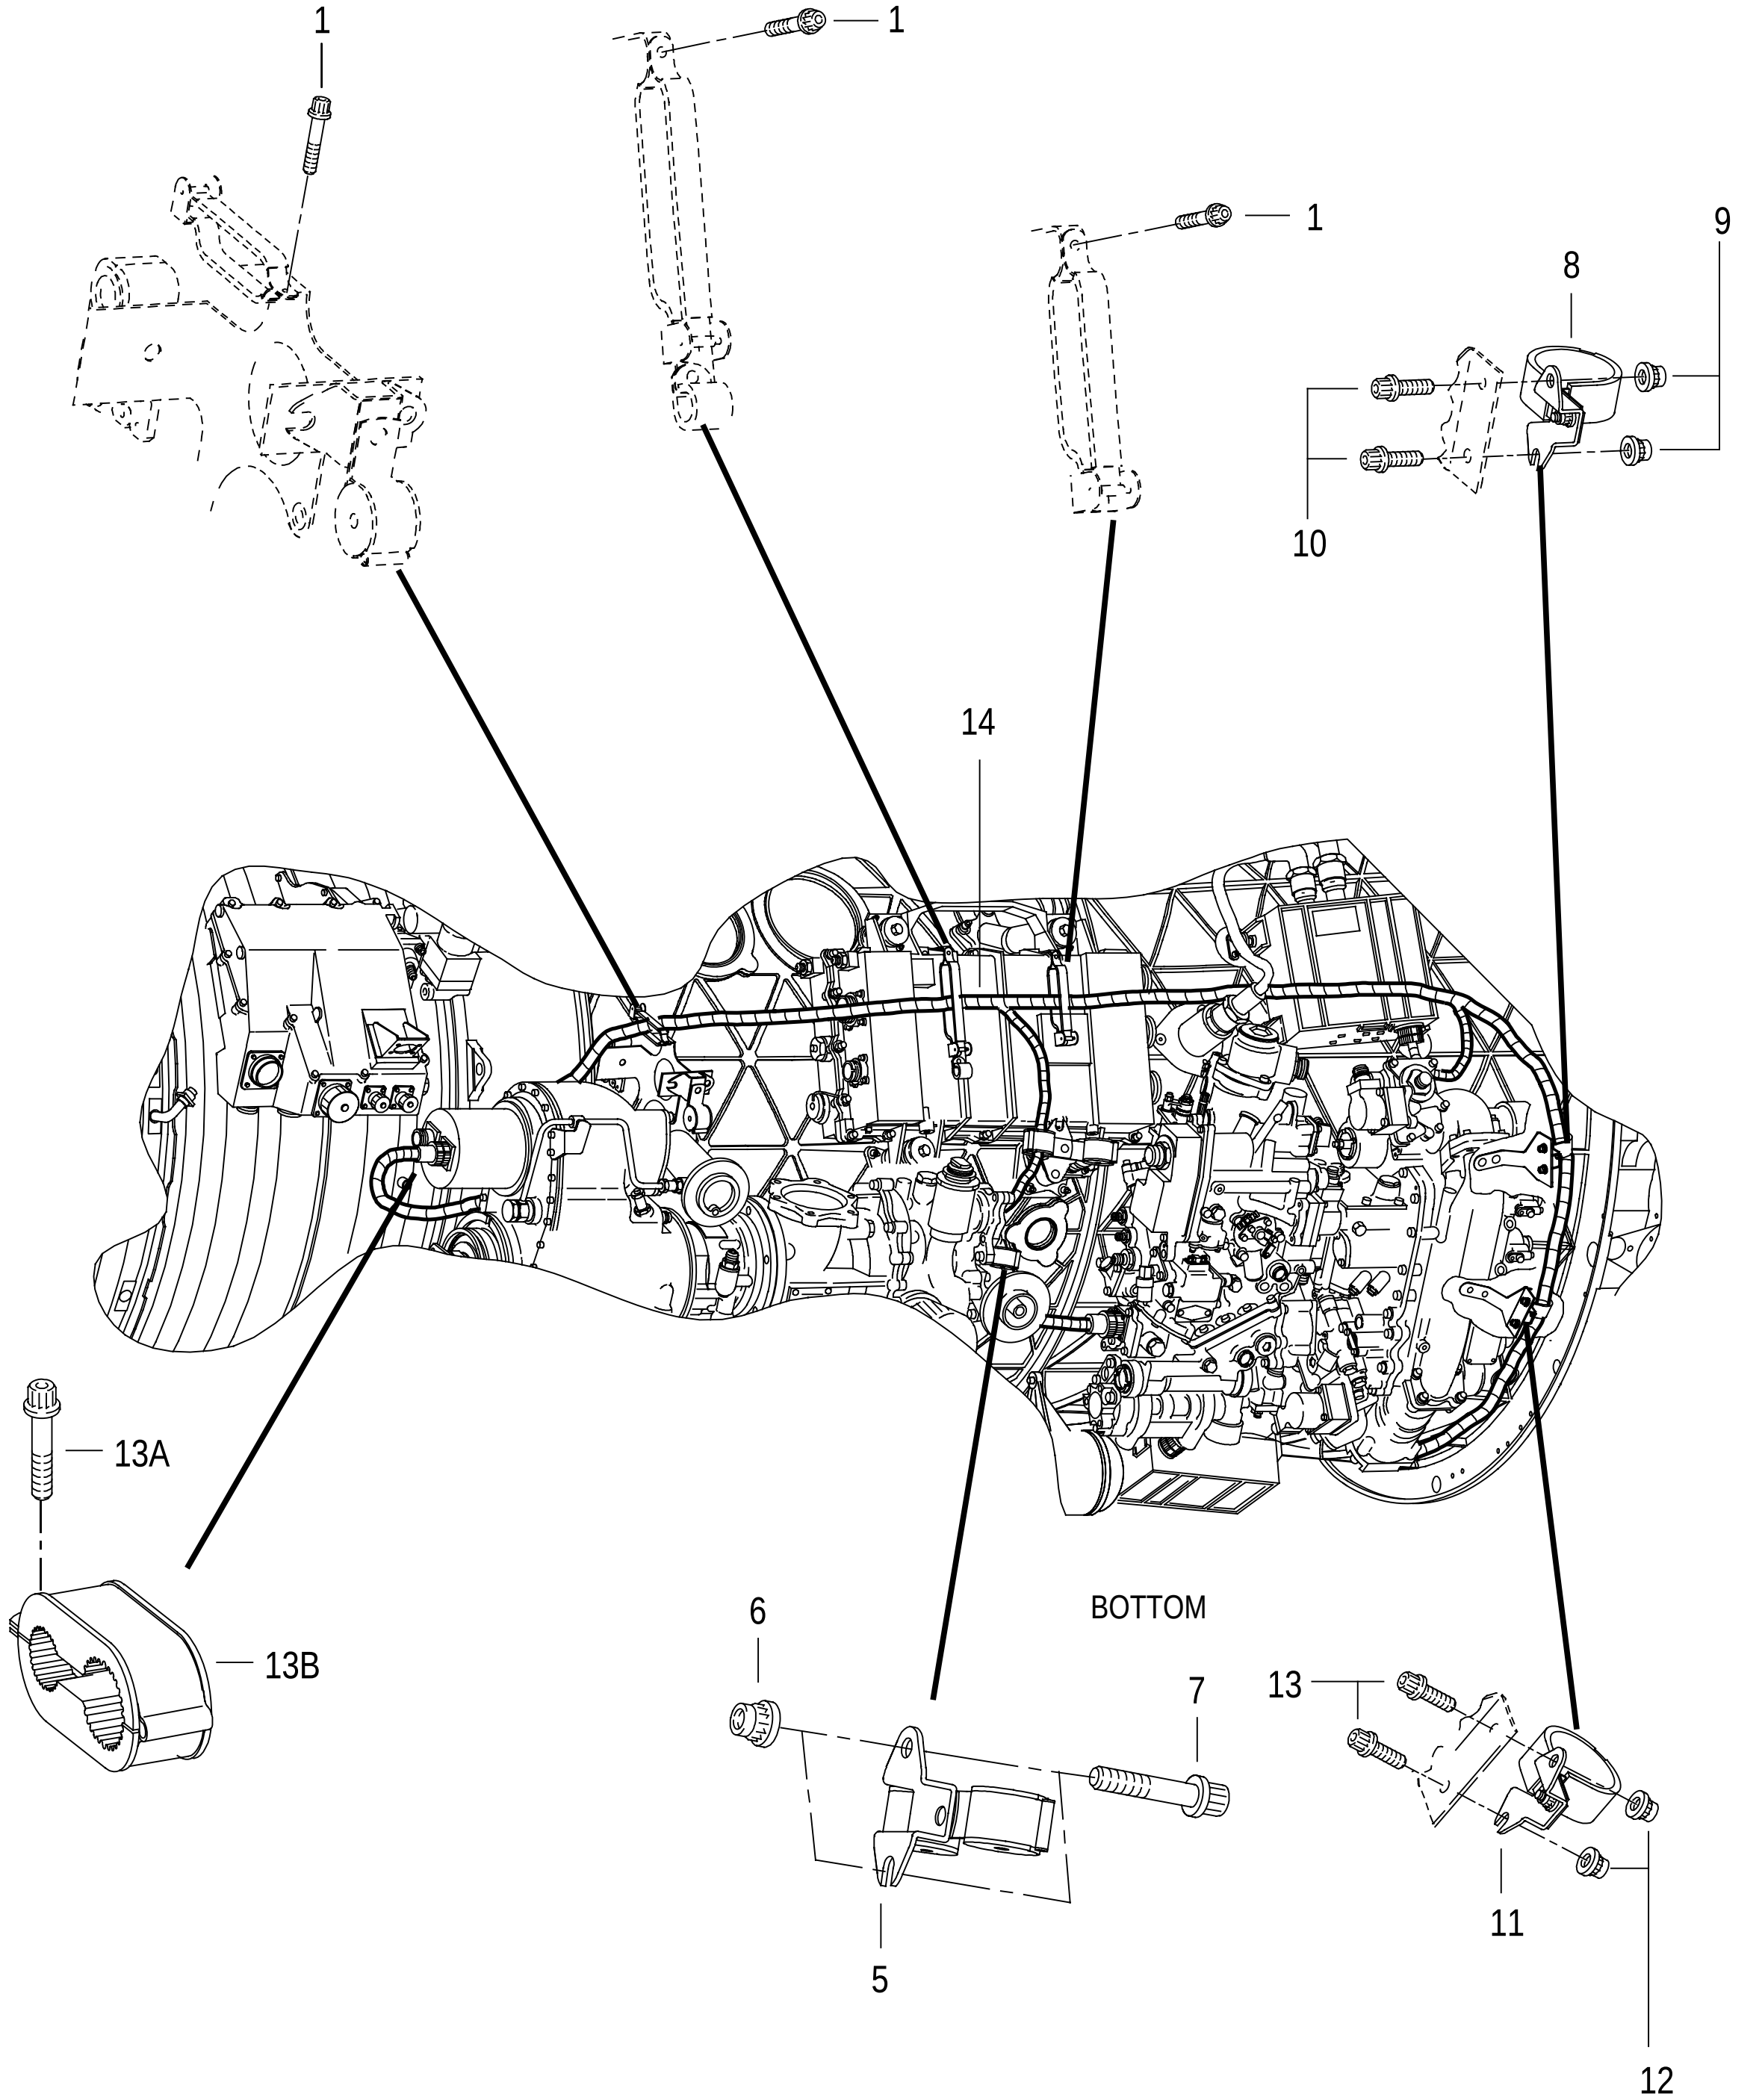


FIGURE 8. IGNITION CABLE

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
8	NO NUMBER		IGNITION CABLE . . . . SEE FIG. 2-6 FOR NHA	REF		
- 1	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG	3		PAOZZ
- 2	DELETED					
- 3	DELETED					
- 4	DELETED					
- 5	TA14300004- 0404	84971	. CLAMP-LOOP, 2 HOLE, CUSHION, HINGE . . . . P&WA PART NO. ST2818-0404 REPLACES ST2442-0404	1		PAOZZ
- 6	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 7	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 8	TA10300016-20	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-20 REPLACES ST2441-20	1		PAOZZ
- 9	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 10	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	2		PAOZZ
- 11	TA10300016-18	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-18 REPLACES ST2441-18	1		PAOZZ
- 12	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 13	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 13A	ST2018-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.500 IN. LONG	1	NQ	PAOZZ
- 13B	TA30700070	84971	. CLAMP-ASSY OF, GENERATOR CABLE . . . . P&WA PART NO. 4082678-01	1	NQ	PAOBZ
- 14	46196 #	83311	. CABLE-SPECIAL PURPOSE, ELECTRICAL, ... BRANCHED, IGNITION P&WA PART NO. 4071837 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 15	< 149383-1017	77820	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2017	49367	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
- 16	< 149383-1019	77820	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2019	49367	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ

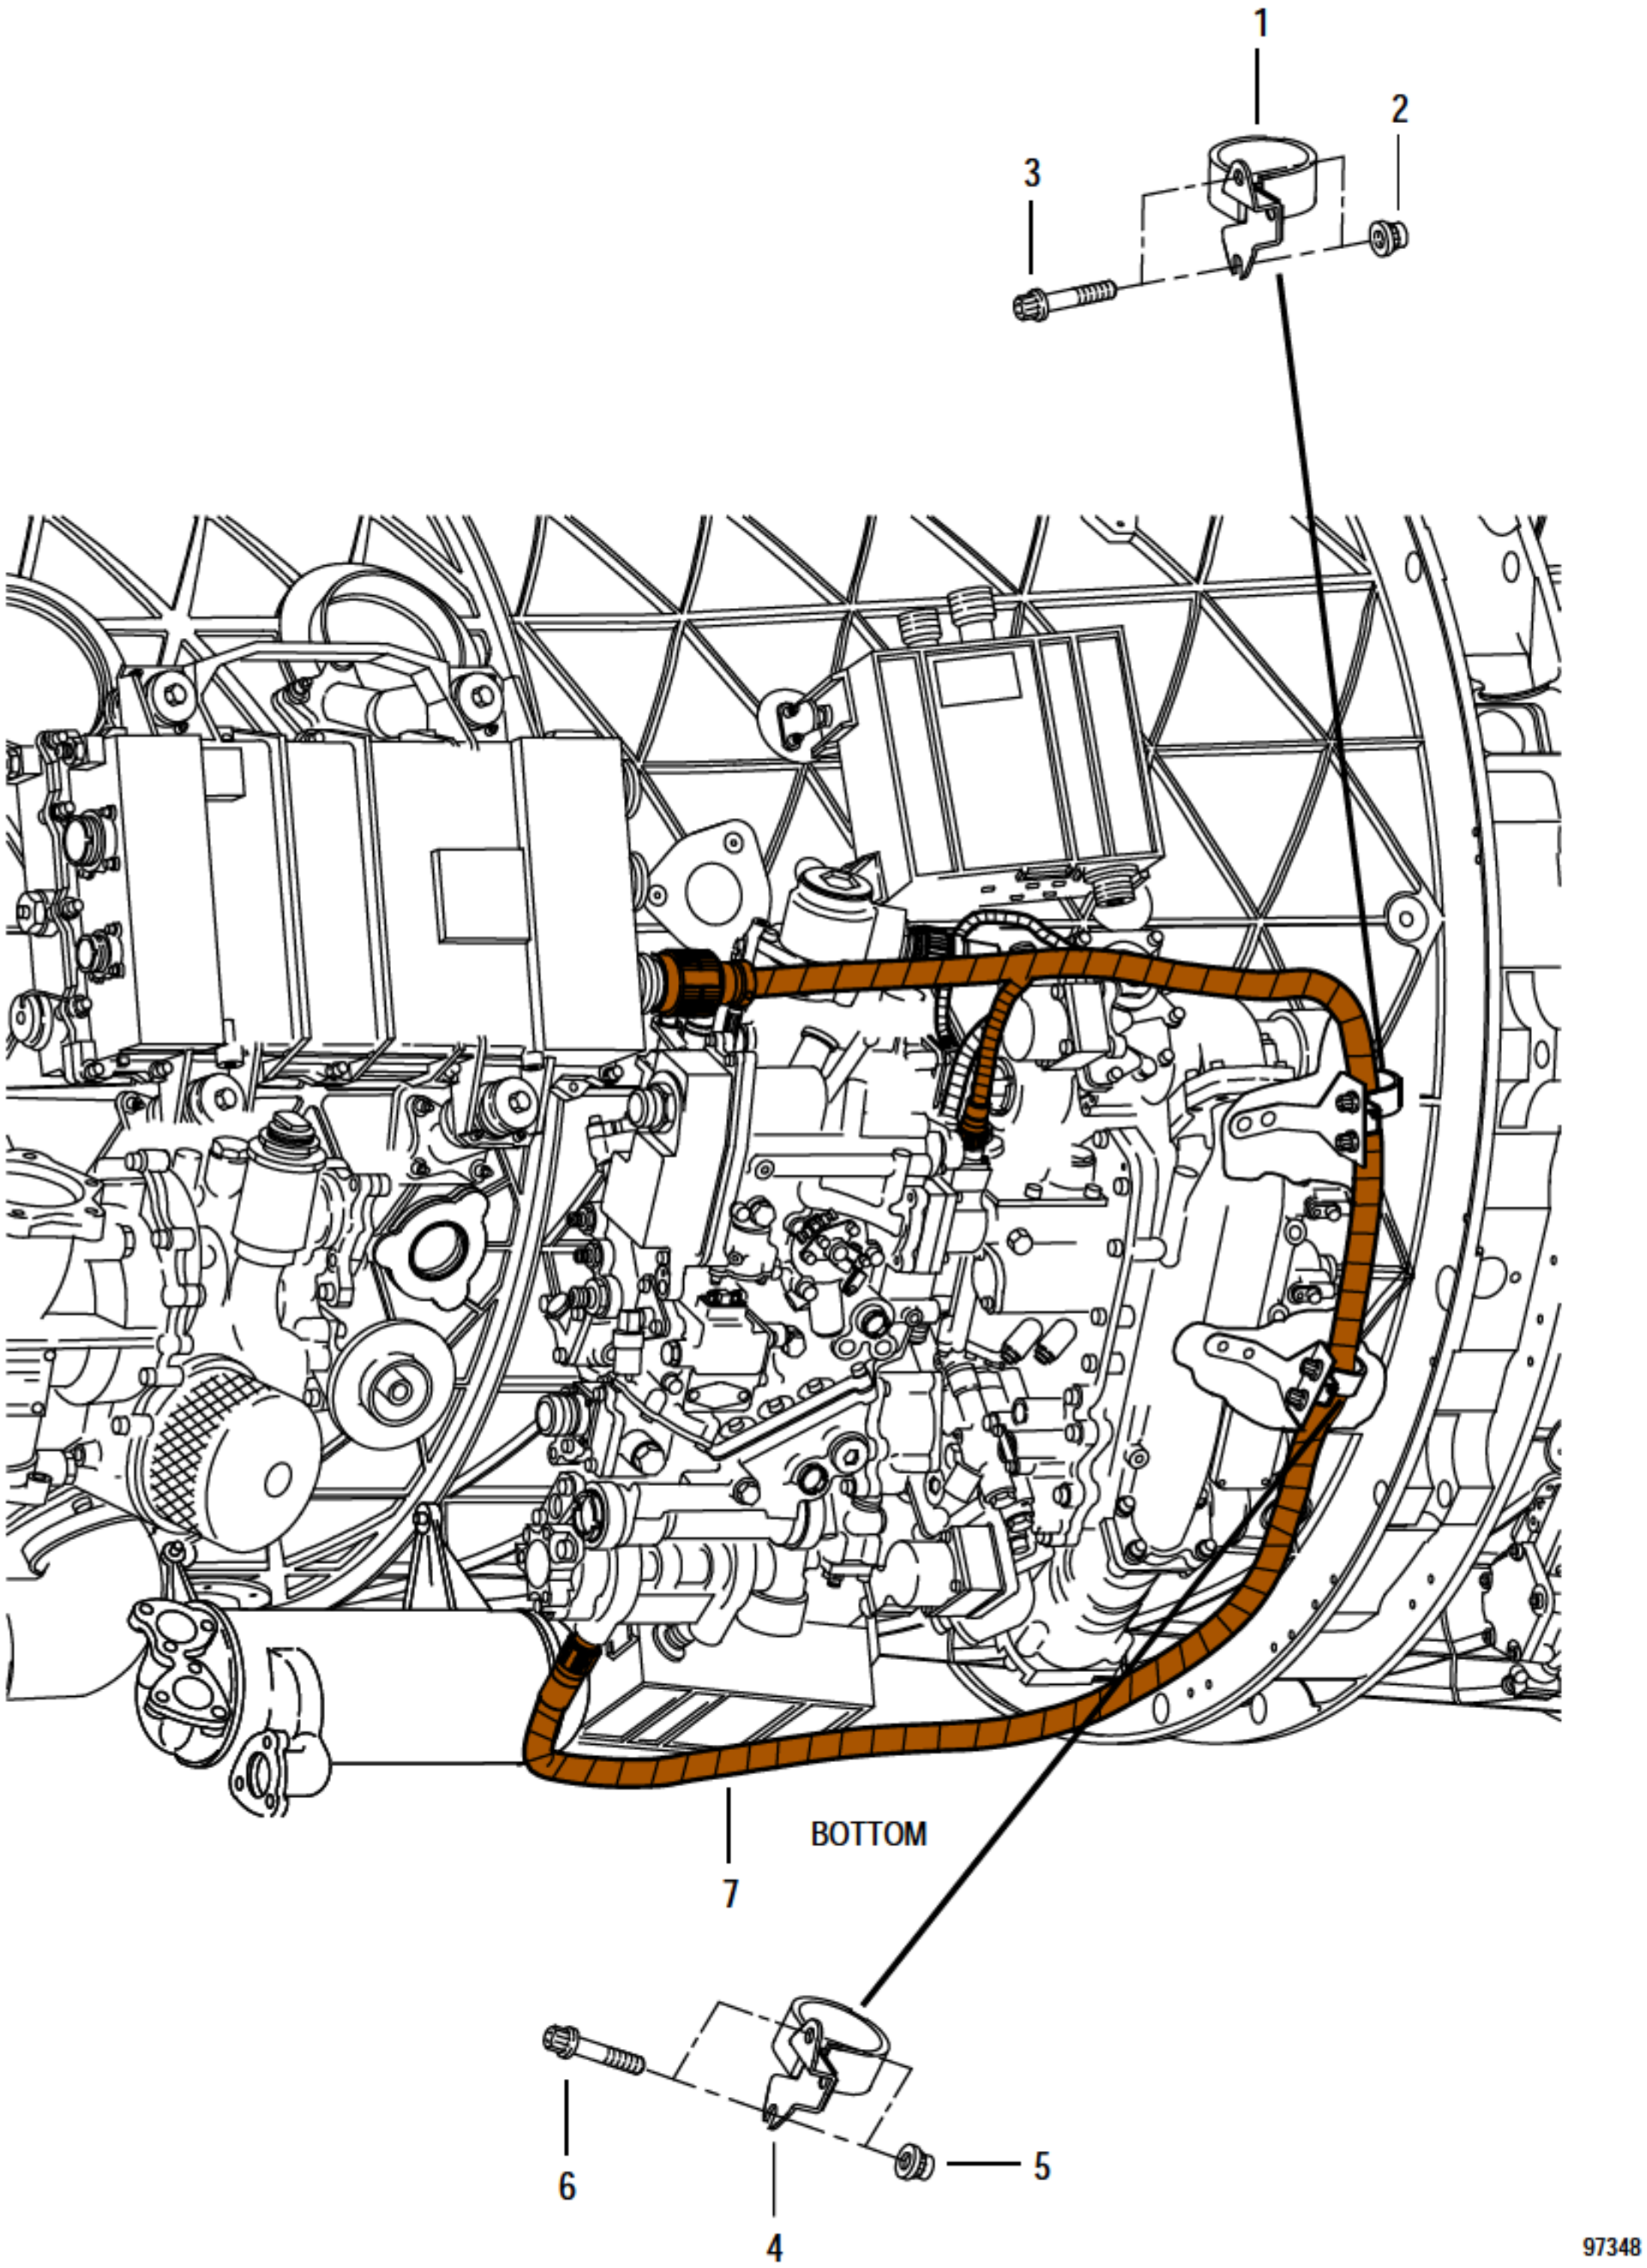


FIGURE 9. GAS GENERATOR CABLE

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
9	NO NUMBER		GAS GENERATOR CABLE . . . . SEE FIG. 2-7 FOR NHA	REF		
- 1	TA10300016-20	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-20 REPLACES ST2441-20	1		PAOZZ
- 2	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 3	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	2		PAOZZ
- 4	TA10300016-18	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-18 REPLACES ST2441-18	1		PAOZZ
- 5	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 6	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 7	46195 #	83311	. CABLE-SPECIAL PURPOSE, ELECTRICAL, ... BRANCHED, GAS GENERATOR P&WA PART NO. 4071839 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 8	< 149383-1009	77820	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2009	49367	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
- 9	< 149383-1011	77820	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2011	49367	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
- 10	< 149383-1013	77820	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2013	49367	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
- 11	< 149383-1023	77820	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2023	49367	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ

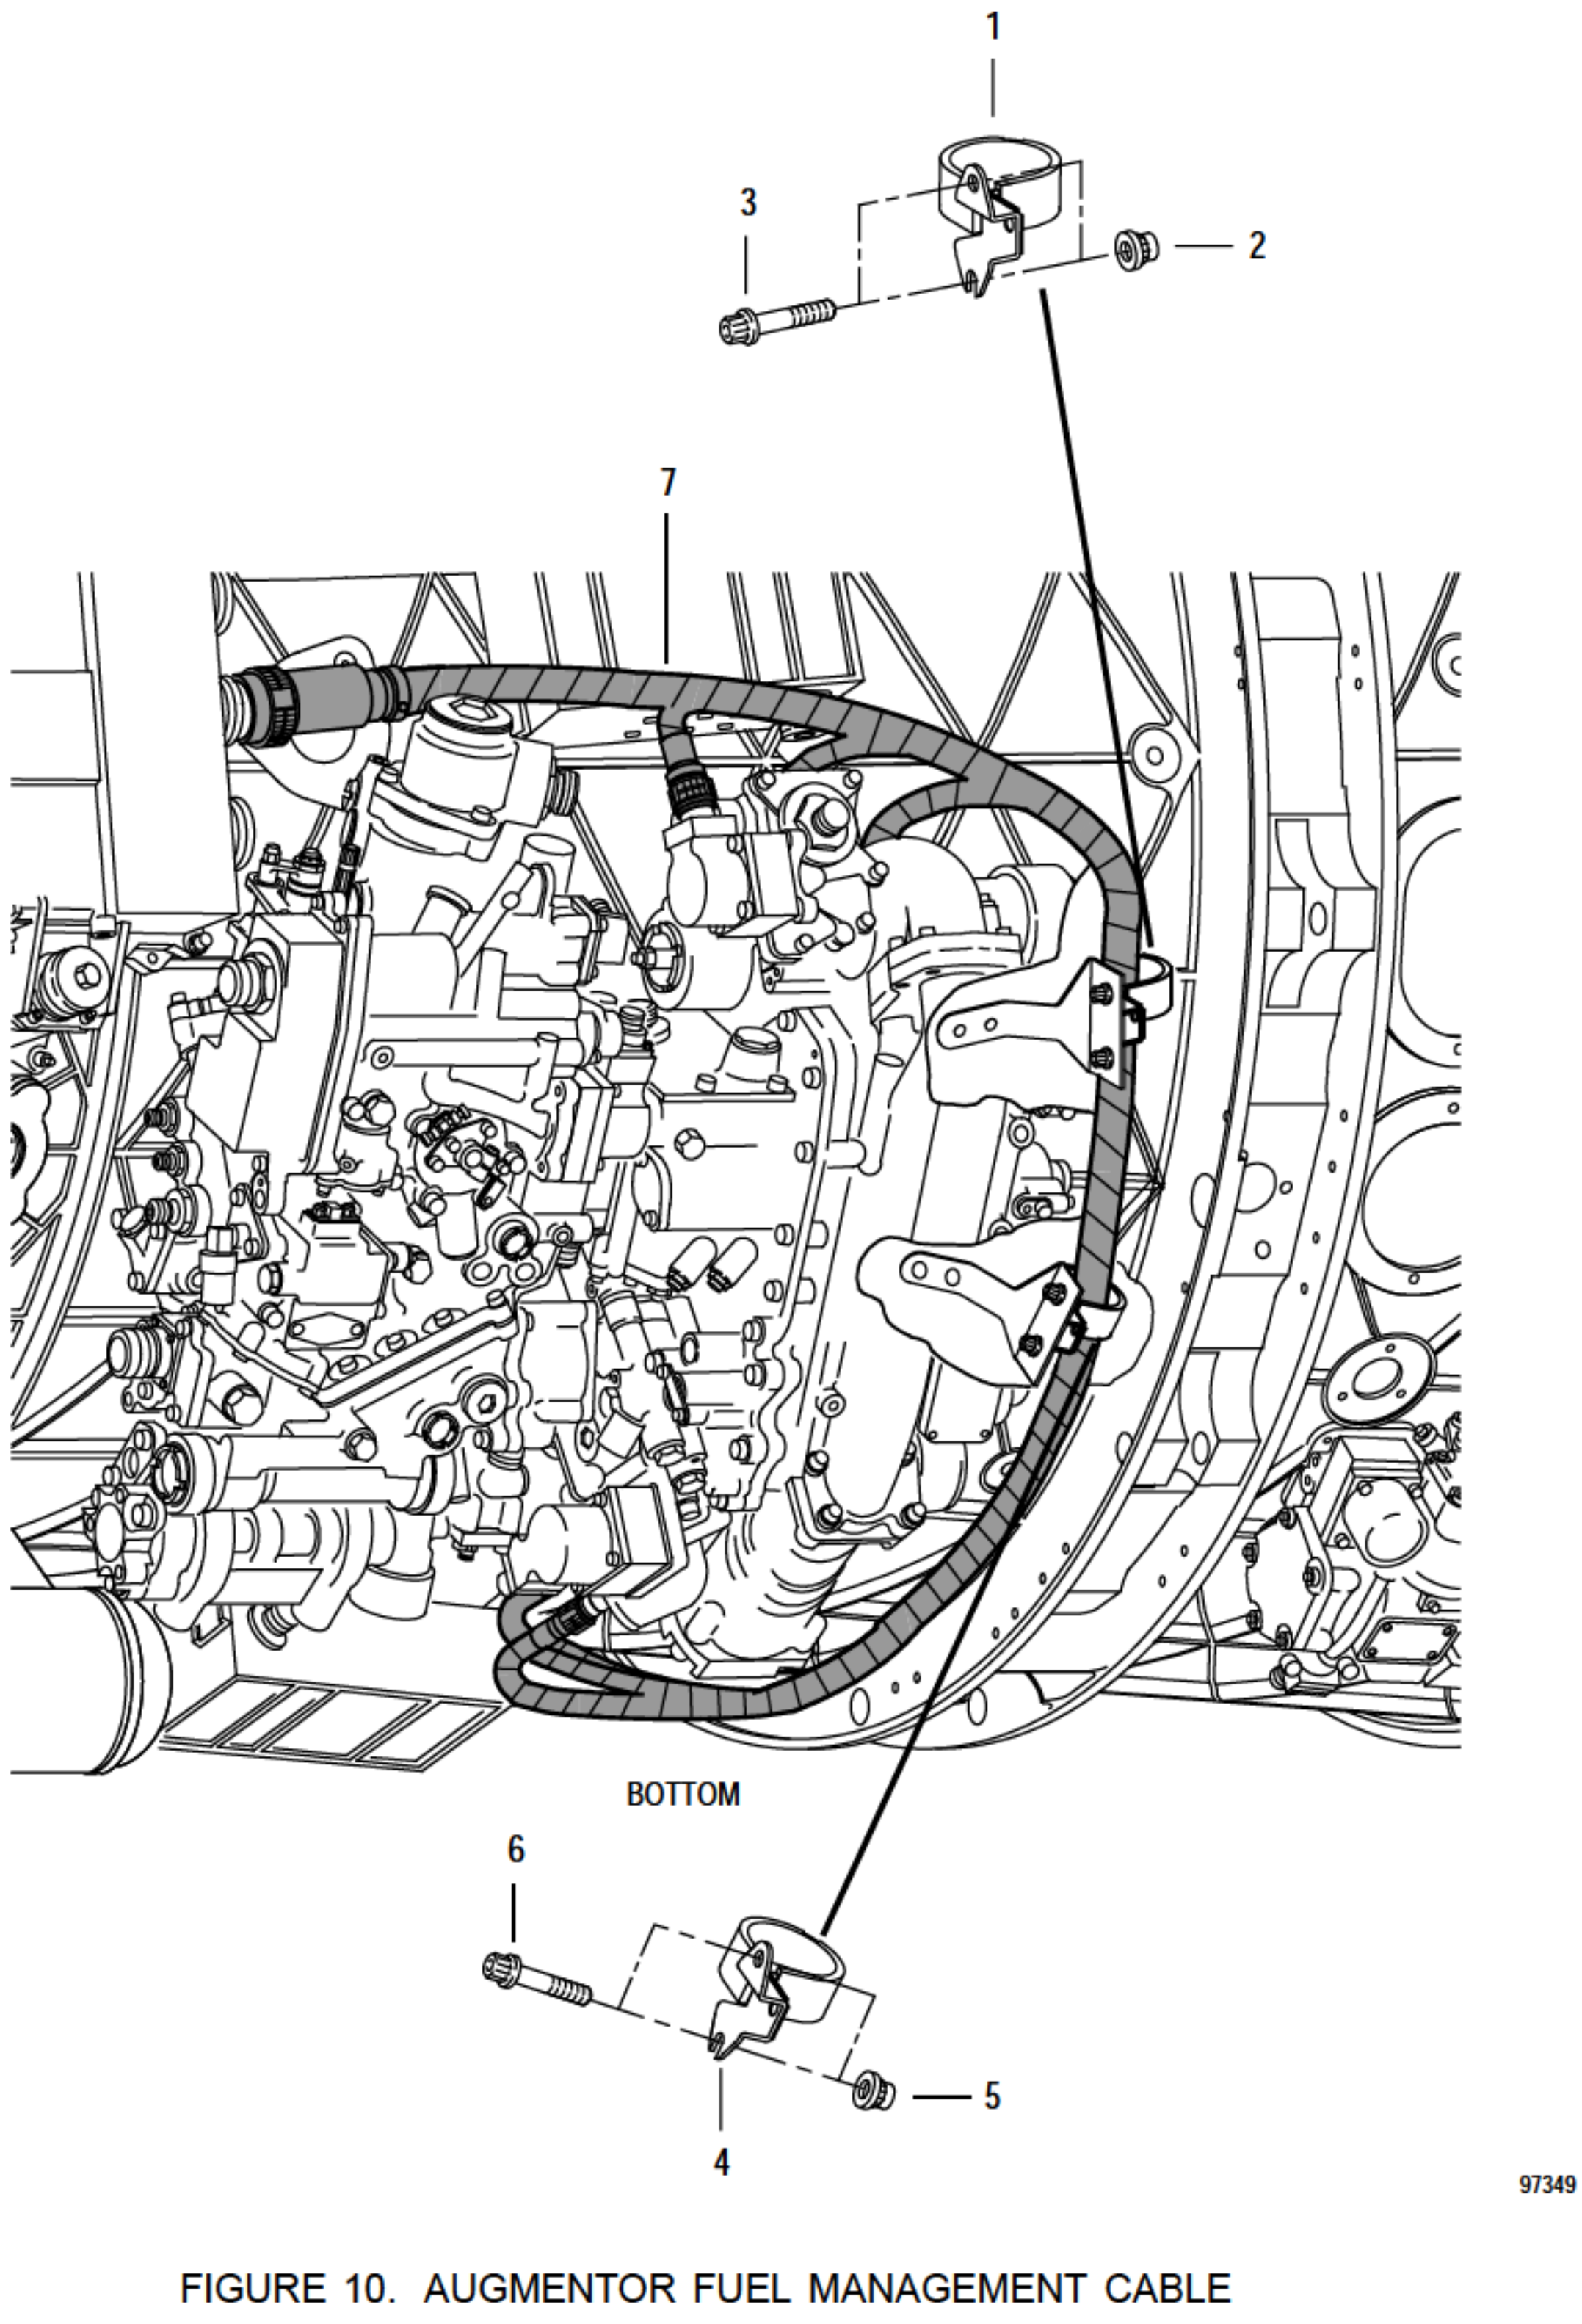


FIGURE 10. AUGMENTOR FUEL MANAGEMENT CABLE

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
10	NO NUMBER		AUGMENTOR FUEL MANAGEMENT CABLE . . . . SEE FIG. 2-8 FOR NHA	REF		
- 1	TA10300016-20	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-20 REPLACES ST2441-20	1		PAOZZ
- 2	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 3	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	2		PAOZZ
- 4	TA10300016-18	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&WA PART NO. ST2817-18 REPLACES ST2441-18	1		PAOZZ
- 5	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 6	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 7	46194 #	83311	. CABLE-SPECIAL PURPOSE, ELECTRICAL, ... BRANCHED, AUGMENTOR FUEL MANAGEMENT P&WA PART NO. 4071840 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 8	< 149383-1011	77820	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2011	49367	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
- 9	< 149383-1013	77820	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2013	49367	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
- 10	< 149383-1025	77820	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ
	< 149383-2025	49367	.. BAND-EMI . . . . SERVICE REPAIR PART	1		PAFZZ

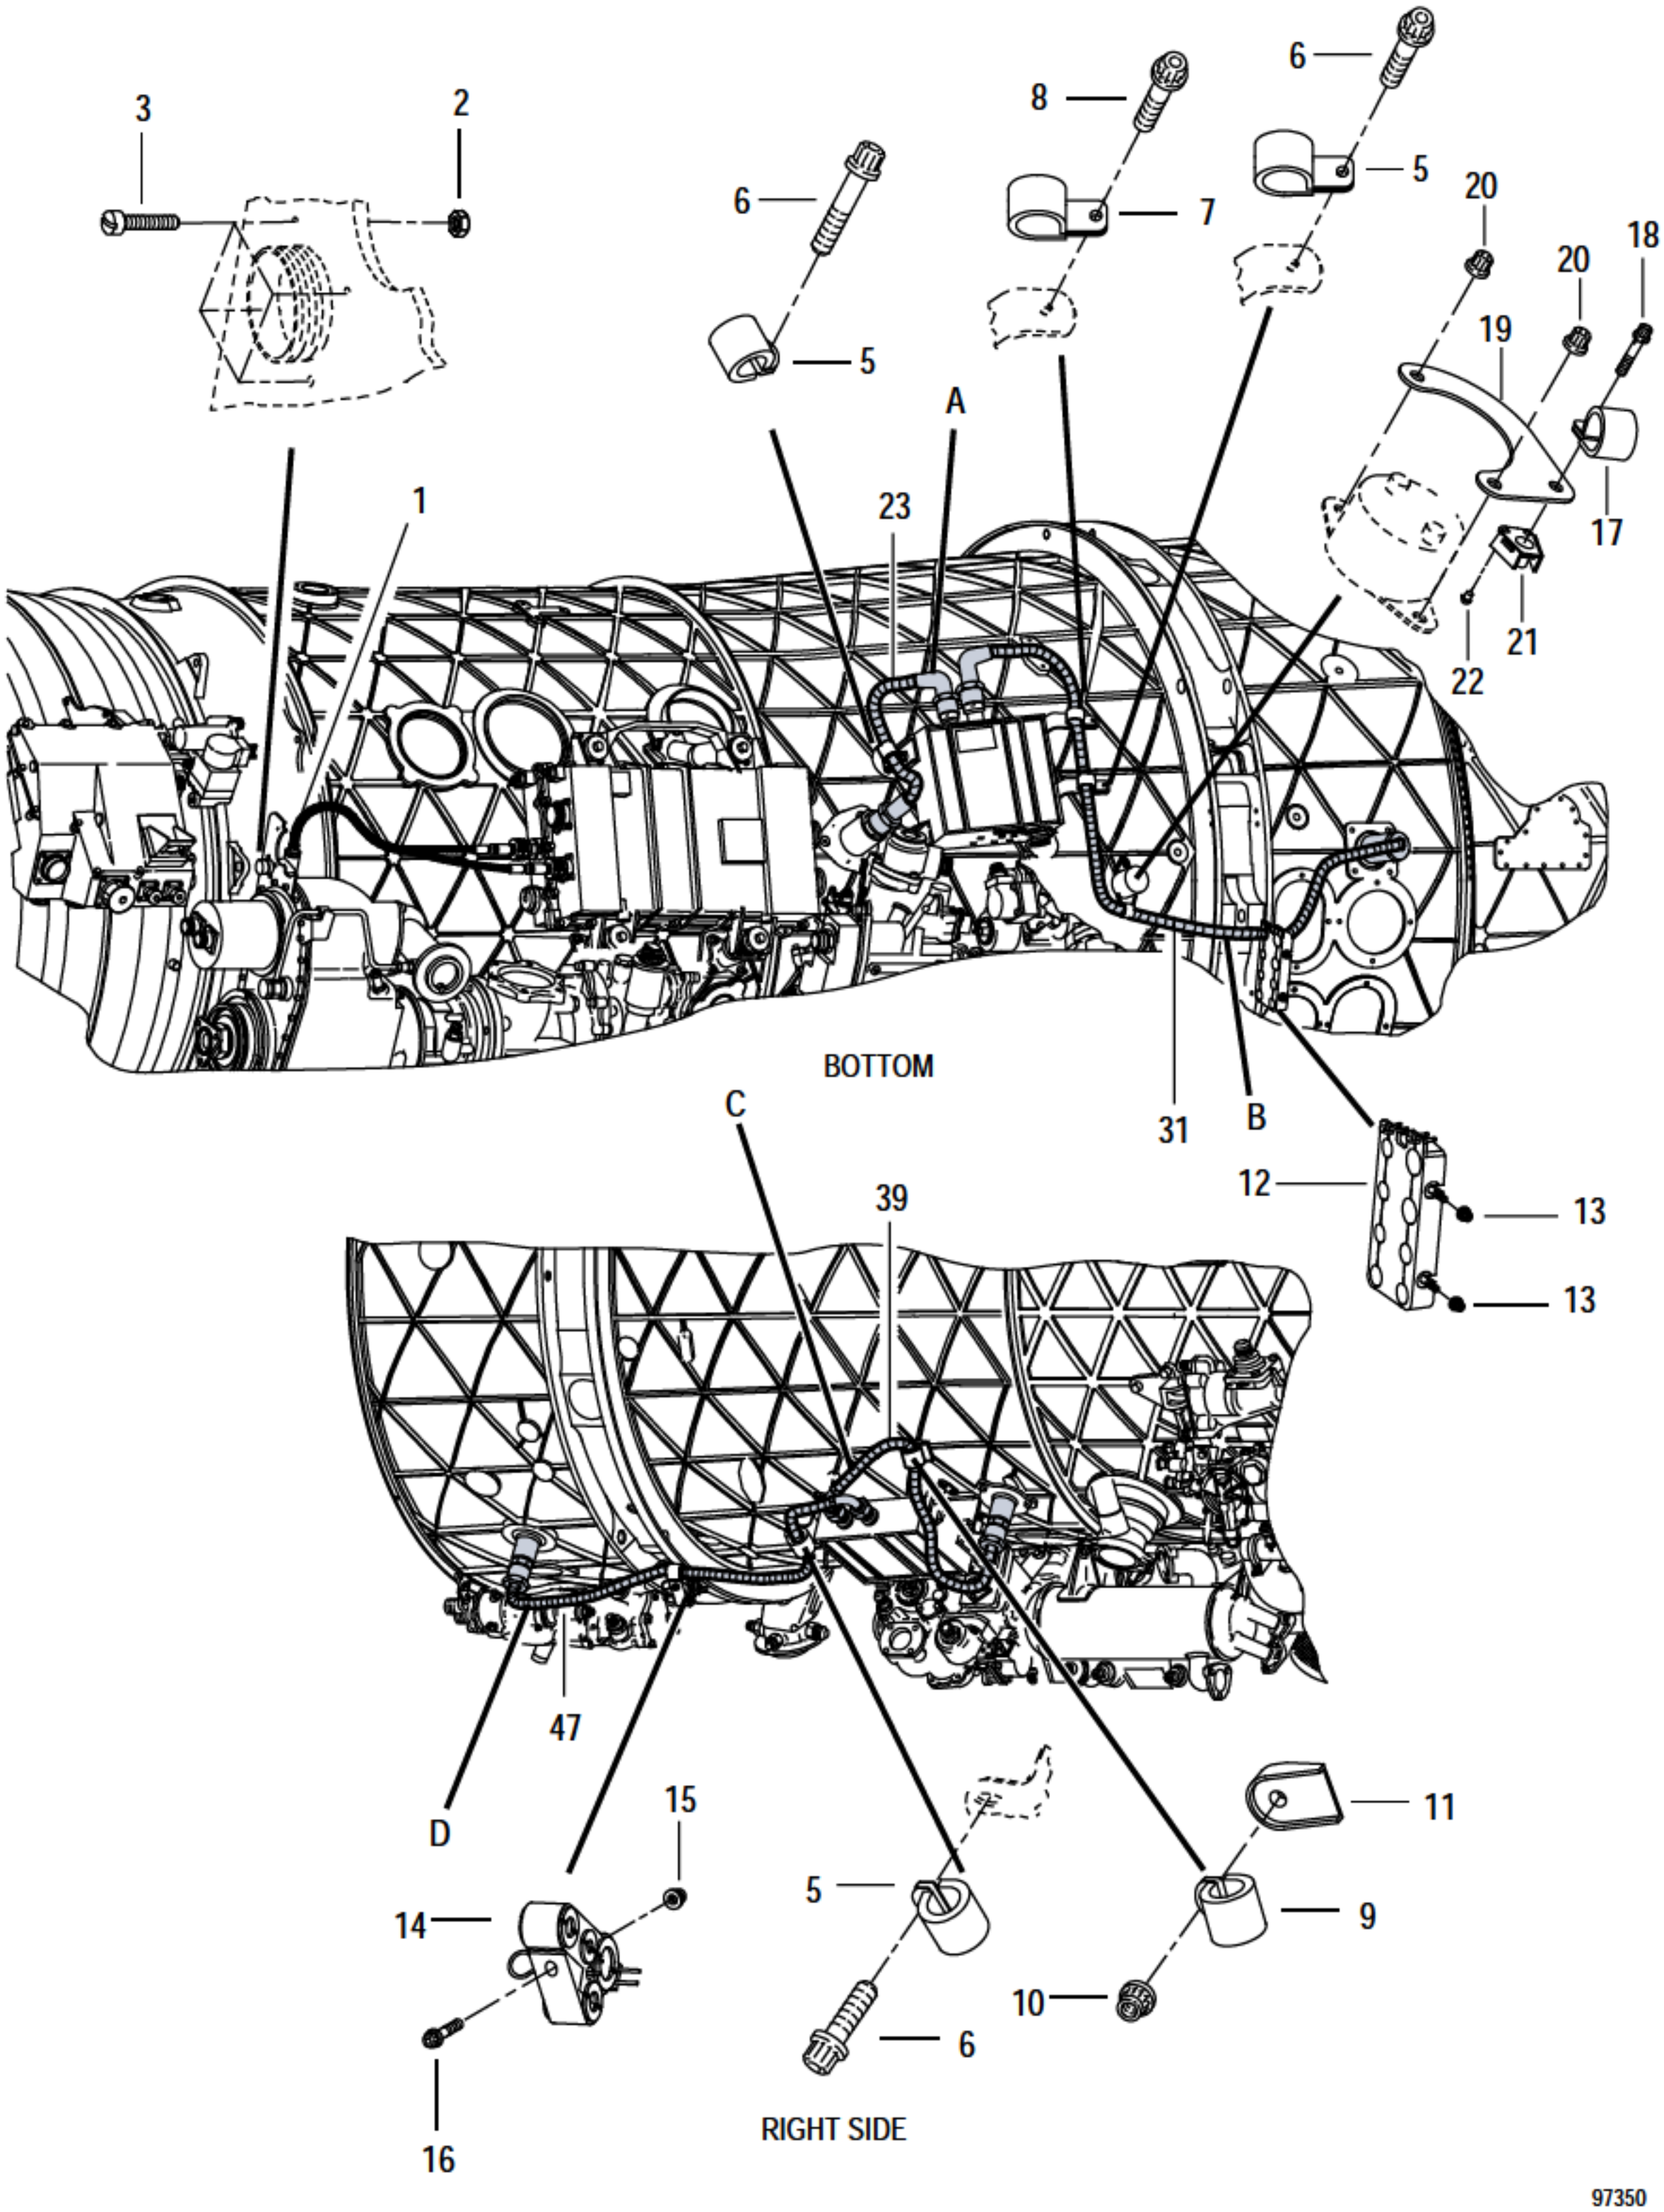


FIGURE 11. DEEC AND EXCITER CABLES
(SHEET 1 OF 2)

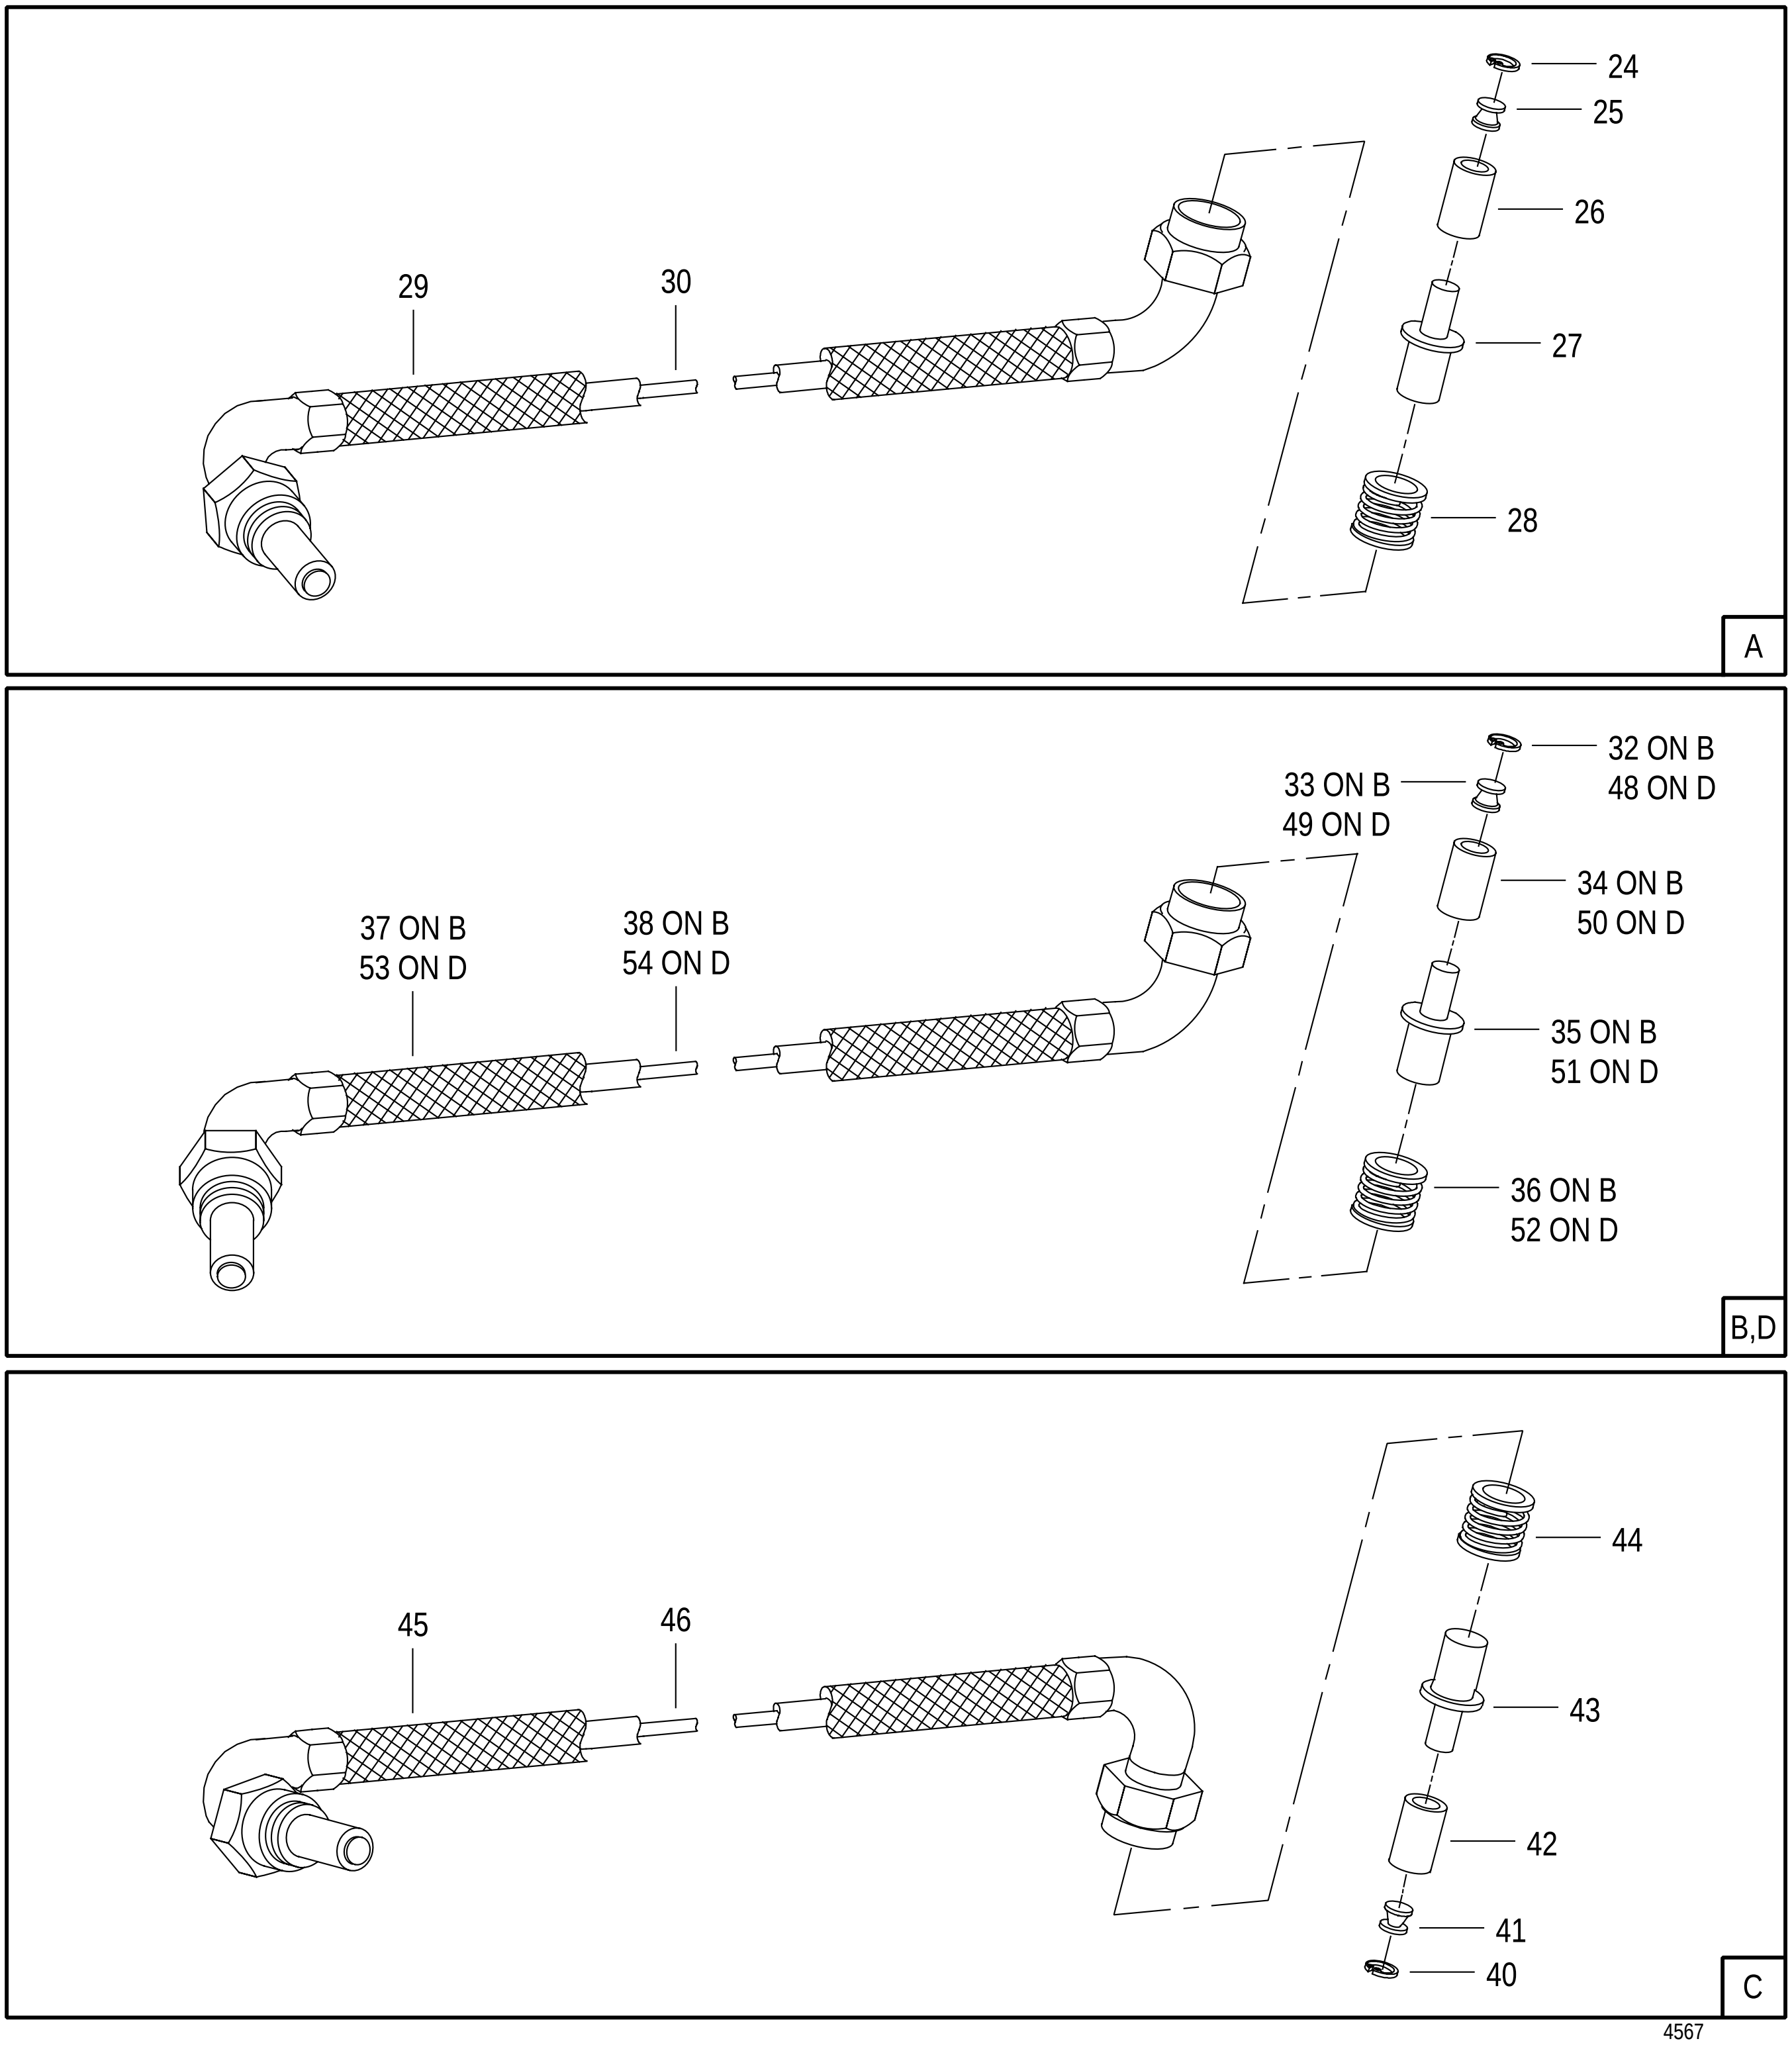


FIGURE 11. DEEC AND EXCITER CABLES
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
11		NO NUMBER			DEEC AND EXCITER CABLES .... SEE FIG. 2-9 FOR NHA	REF		
- 1		46198	#	83311	. CABLE-SPECIAL PURPOSE, ELECTRICAL, ... BRANCHED, DEEC P&WA PART NO. 4071842	1	NR	PAODD
		420068	#	83311	. CABLE-SPECIAL PURPOSE, ELECTRICAL, ... BRANCHED, DEEC P&WA PART NO. 4078363	1	NS	PAODD
- 2		379530		52661	. NUT OPTION (AP) .... SEE OPTION TABLE REPLACES ST2169-01	4		PAOZZ
- 3		2159117		52661	. SCREW-MACHINE, FILLISTER .... 0.112-40UNJF-3A X 0.500 IN. LONG (AP) SUPERSEDES 2068444 PARTIAL BREAKDOWN FOLLOWS	4		PAOZZ
- 4	<	149383-1015		77820	.. BAND-EMI....................................... SERVICE REPAIR PART USE ONLY ON 46198	1		PAFZZ
	<	149383-2015		49367	.. BAND-EMI....................................... SERVICE REPAIR PART USE ONLY ON 420068	1		PAFZZ
- 4A	<	149383-1017		77820	.. BAND-EMI....................................... SERVICE REPAIR PART USE ONLY ON 420068	1		PAFZZ
	<	149383-2017		49367	.. BAND-EMI....................................... SERVICE REPAIR PART USE ONLY ON 420068	1		PAFZZ
- 5	+	ST2439-08		52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-08	3		PAOZZ
	+	ST1540-08		52661	. CLAMP-LOOP, CUSHION..........................	3		PAOZZ
- 6		ST2015-020		52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.625 IN. LONG (AP) REPLACES ST2015-016	1		PAOZZ
- 7	+	ST2439-08		52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-08	1	BP	PAOZZ
	+	ST1540-08		52661	. CLAMP-LOOP, CUSHION..........................	1	BP	PAOZZ
- 8		ST2015-016		52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	BP	PAOZZ
- 9	+	ST2439-08		52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-08	1	FC	PAOZZ
	+	ST1540-08		52661	. CLAMP-LOOP, CUSHION..........................	1	FD	PAOZZ
- 10		4023115		52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 11		4077582		52661	. SPACER-CLAMP .... WHEN EXH USE 4079778	1	FC	PAOZZ
		4079778		52661	. CHANNEL-LOOP CLAMP .... MAY BE USED WITH ST1540-08	1	FD	PAOZZ
- 12		4076761		52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... WHEN EXH USE 4077680 OR 4083660	1		PAOBZ
	=	4077680		52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
	=	4083660		52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
- 13		4023115		52661	. NUT OPTION (AP) .... SEE OPTION TABLE	4		PAOZZ
- 14		4074134		52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... WHEN EXH USE 4078515	1		PAOBZ
		4078515		52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
- 15		4023115		52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 16		4075410		52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 1.230 IN. LONG (AP)	1		PAOZZ
- 17		ST2439-08		52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-08	1	BN	PAOZZ
		ST1540-08		52661	. CLAMP-LOOP, CUSHION..........................	1	BN	PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
11 - 18	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	BN	PAOZZ
- 19	4075879	52661	. BRACKET-LOOP CLAMP, ASSY OF	1	BN	PAFZZ
- 20	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE PARTIAL BREAKDOWN FOLLOWS	2	BN	PAOZZ
- 21	= 4046367	52661	.. NUT OPTION .... SEE OPTION TABLE	1		PAFZZ
	= ST5030-09	52661	.. NUT OPTION .... SEE OPTION TABLE	1		PAFZZ
- 22	AN123469	88044	.. RIVET (AP)	2		PAOZZ
- 23	45689 #	83311	. CABLE-POWER, ELECTRICAL, EXCITER TO MAIN . IGNITER, LH P&WA PART NO. 4072329 PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 24	1814	83311	.. RING-RETAINING	2		PAOZZ
- 25	12617	83311	.. CONTACT-HIGH TENSION........................	2		PAOZZ
- 26	13895	83311	.. INSULATOR-HIGH TENSION	2		PAOZZ
- 27	23711	83311	.. BUSHING-RUBBER	2		PAOZZ
- 28	23705	83311	.. SPRING ASSY	2		PAOZZ
- 29	152878	83311	.. CONDUIT ASSY .... PARTIAL BREAKDOWN FOLLOWS	1		PAOZZ
- 30	23191	83311	... CABLE-WIRE 7MM	AR		PAOZZ
- 31	46216 #	83311	. CABLE-POWER, ELECTRICAL, EXCITER TO .... AUGMENTOR IGNITER, LH P&WA PART NO. 4075711 PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 32	1814	83311	.. RING-RETAINING	2		PAOZZ
- 33	12617	83311	.. CONTACT-HIGH TENSION........................	2		PAOZZ
- 34	13895	83311	.. INSULATOR-HIGH TENSION	2		PAOZZ
- 35	23711	83311	.. BUSHING-RUBBER	2		PAOZZ
- 36	23705	83311	.. SPRING ASSY	2		PAOZZ
- 37	151611	83311	.. CONDUIT ASSY .... PARTIAL BREAKDOWN FOLLOWS	1		PAOZZ
- 38	23191	83311	... CABLE-WIRE 7MM	AR		PAOZZ
- 39	46215 #	83311	. CABLE-POWER, ELECTRICAL, EXCITER TO MAIN . IGNITER, RH P&WA PART NO. 4075712 PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 40	1814	83311	.. RING-RETAINING	2		PAOZZ
- 41	12617	83311	.. CONTACT-HIGH TENSION........................	2		PAOZZ
- 42	13895	83311	.. INSULATOR-HIGH TENSION	2		PAOZZ
- 43	23711	83311	.. BUSHING-RUBBER	2		PAOZZ
- 44	23705	83311	.. SPRING ASSY	2		PAOZZ
- 45	151616	83311	.. CONDUIT ASSY .... PARTIAL BREAKDOWN FOLLOWS	1		PAOZZ
- 46	23191	83311	... CABLE-WIRE 7MM	AR		PAOZZ
- 47	46387 #	83311	. CABLE-POWER, ELECTRICAL, EXCITER TO .... AUGMENTOR IGNITER, RH P&WA PART NO. 4077024 PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 48	1814	83311	.. RING-RETAINING	2		PAOZZ
- 49	12617	83311	.. CONTACT-HIGH TENSION........................	2		PAOZZ
- 50	13895	83311	.. INSULATOR-HIGH TENSION	2		PAOZZ
- 51	23711	83311	.. BUSHING-RUBBER	2		PAOZZ
- 52	23705	83311	.. SPRING ASSY	2		PAOZZ
- 53	156858	83311	.. CONDUIT ASSY .... PARTIAL BREAKDOWN FOLLOWS	1		PAOZZ
- 54	23191	83311	... CABLE-WIRE 7MM	AR		PAOZZ

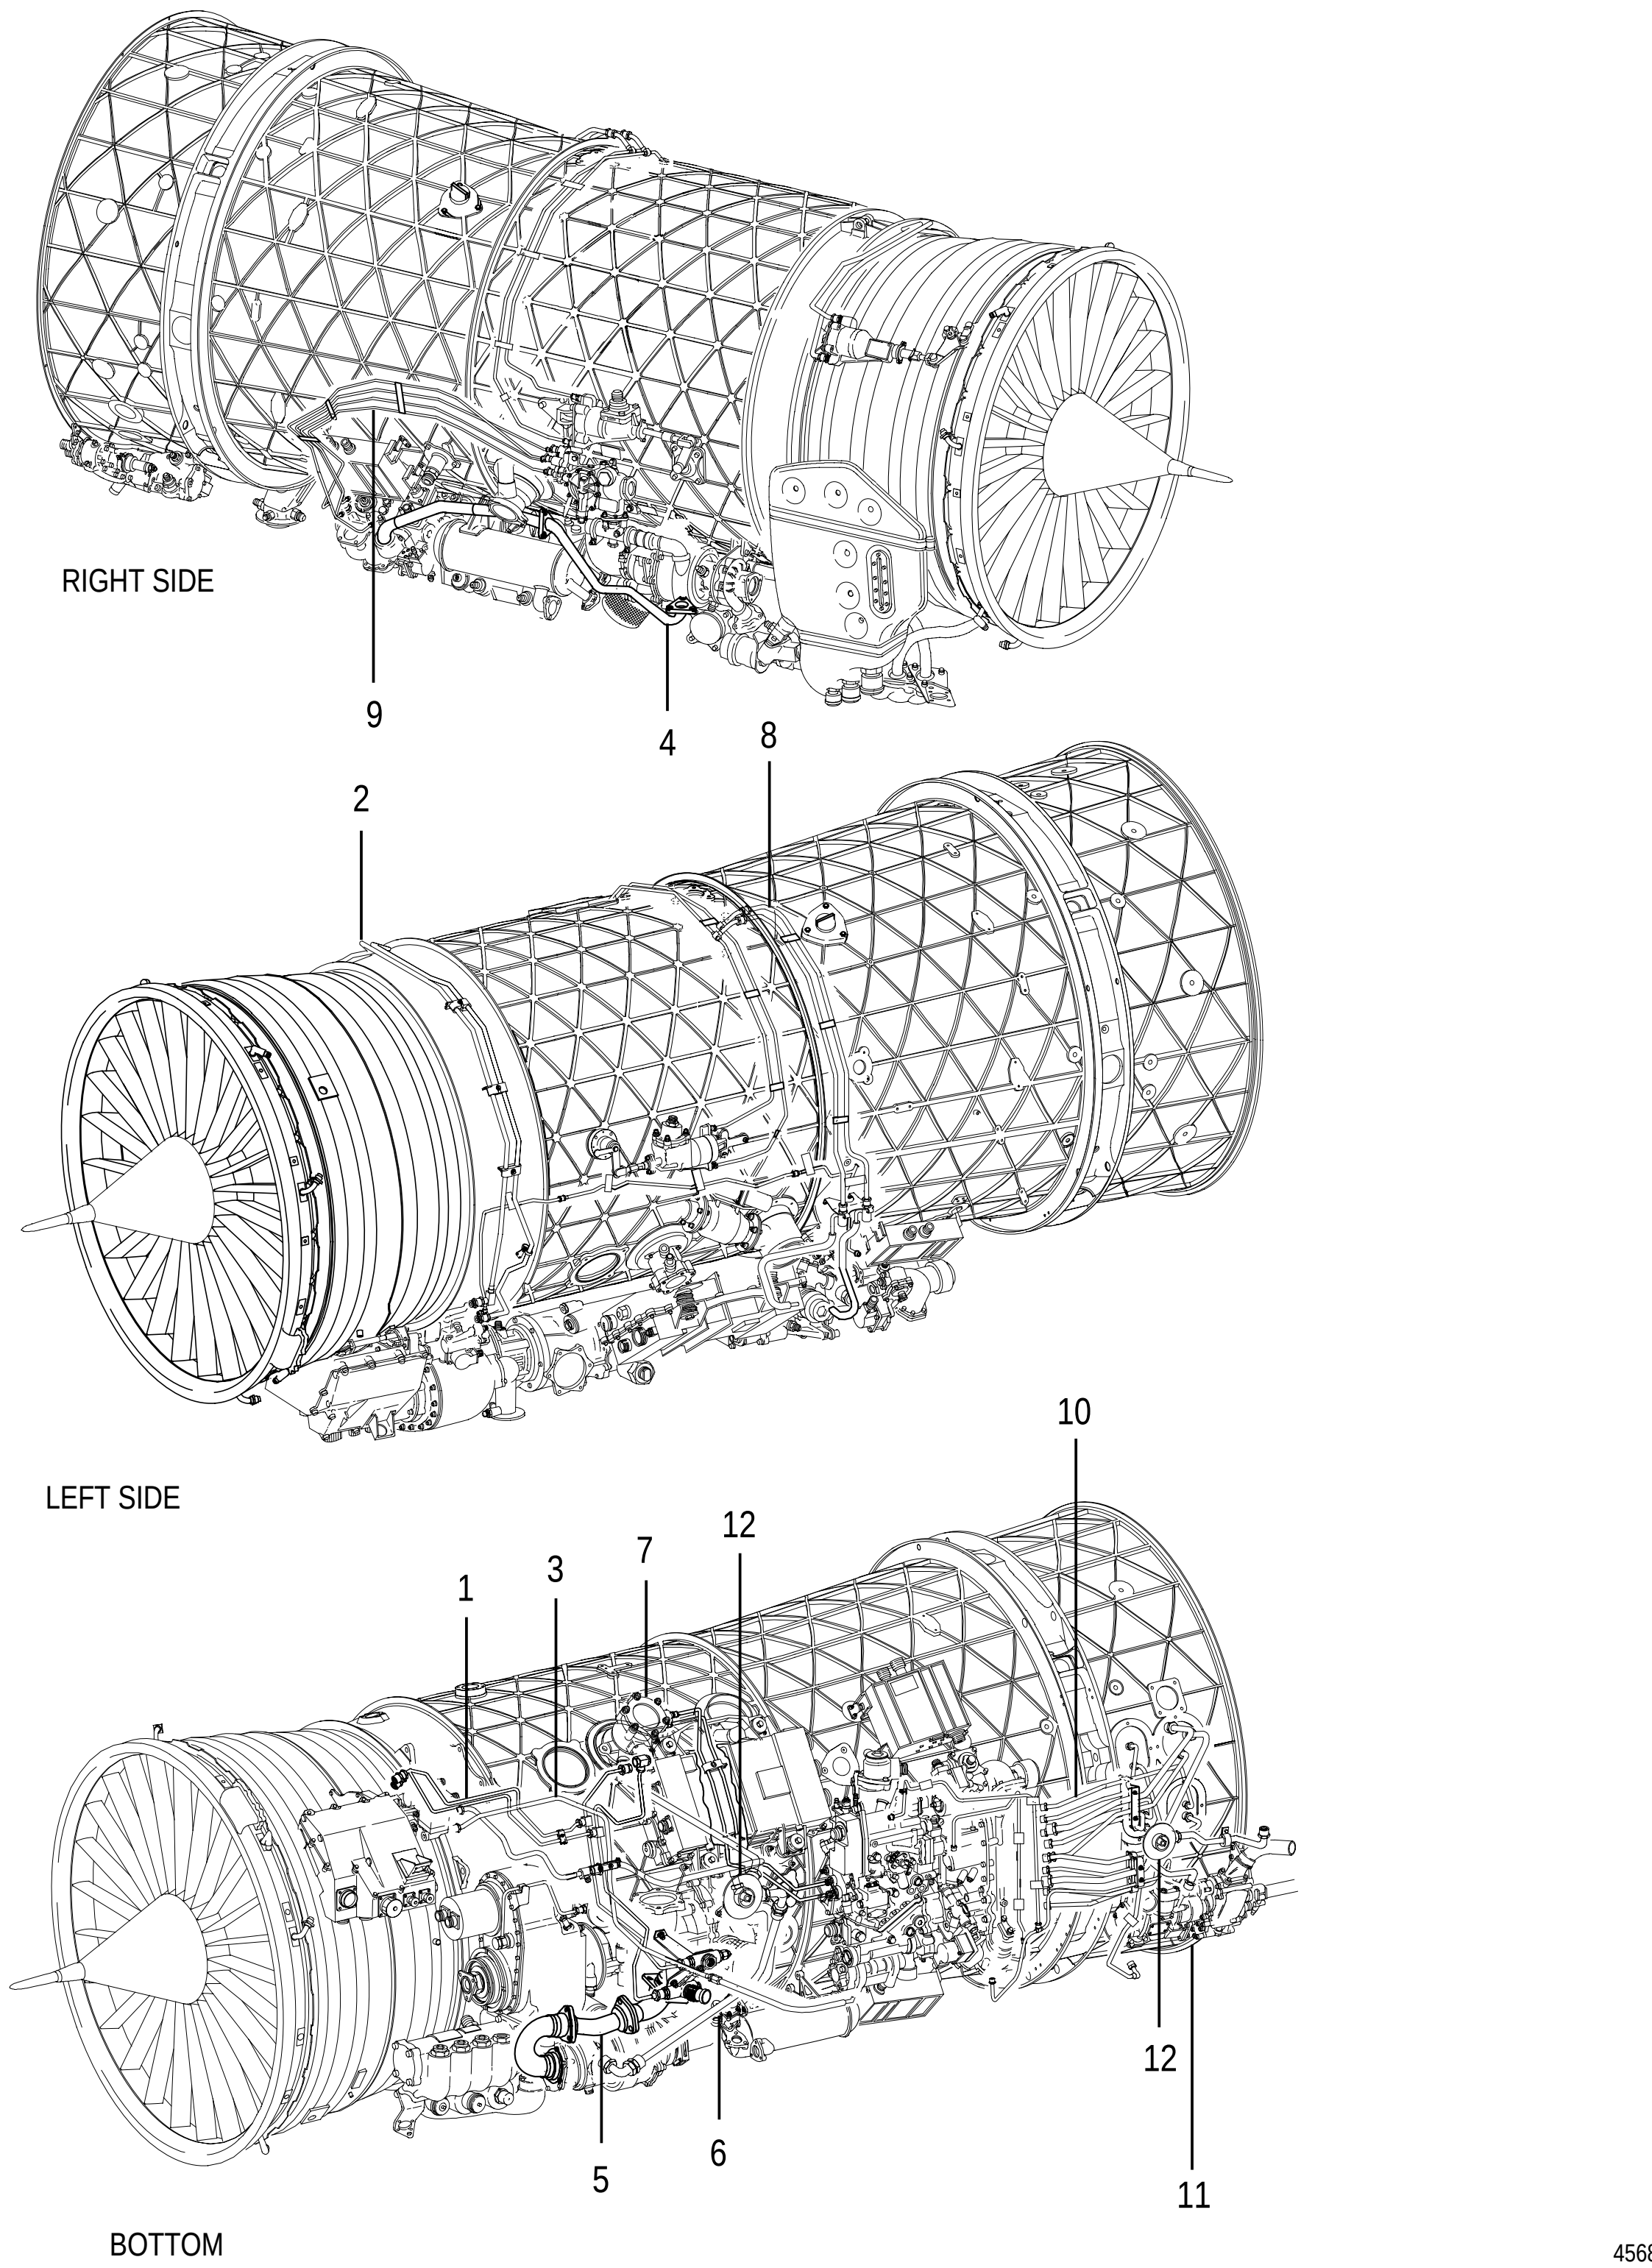


FIGURE 12. FUEL TUBING

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
12	NO NUMBER		FUEL TUBING . . . . SEE FIG. 1-2 FOR NHA	REF		
- 1	NO NUMBER		. DEEC AND EDU INLET/RETURN FUEL TUBING. . . . . SEE FIG. 13 FOR DETAIL PARTS	REF		
- 2	NO NUMBER		. COMPRESSOR INLET CYLINDER . . . . EXTEND/RETRACT TUBING SEE FIG. 14 FOR DETAIL PARTS	REF		
- 3	NO NUMBER		. CIVV FUEL TUBING . . . . SEE FIG. 15 FOR DETAIL PARTS	REF		
- 4	NO NUMBER		. AUGMENTOR FUEL PUMP PF1A TUBING . . . . SEE FIG. 16 FOR DETAIL PARTS	REF		
- 5	NO NUMBER		. AUGMENTOR FUEL PUMP PF1 TUBING . . . . SEE FIG. 17 FOR DETAIL PARTS	REF		
- 6	NO NUMBER		. FUEL MANIFOLD SUPPLY TUBE. . . . . SEE FIG. 18 FOR DETAIL PARTS	REF		
- 7	NO NUMBER		. COMPRESSOR BLEED LINEAR ACTUATING . . . . CYLINDER TUBING SEE FIG. 19 FOR DETAIL PARTS	REF		
- 8	NO NUMBER		. REAR COMPRESSOR CYLINDER . . . . EXTEND/RETRACT TUBING SEE FIG. 20 FOR DETAIL PARTS	REF		
- 9	NO NUMBER		. AUGMENTOR FUEL PUMP CONTROLLER FUEL . . . TUBING SEE FIG. 21 FOR DETAIL PARTS	REF		
- 10	NO NUMBER		. AUGMENTOR FUEL CONTROL TUBING. . . . . SEE FIG. 22 FOR DETAIL PARTS	REF		
- 11	NO NUMBER		. CONVERGENT EXHAUST NOZZLE CONTROL . . . . . TUBING SEE FIG. 23 FOR DETAIL PARTS	REF		
- 12	NO NUMBER		. FRONT AND REAR FUEL DRAINS AND TUBING . . . . SEE FIG. 24 FOR DETAIL PARTS	REF		

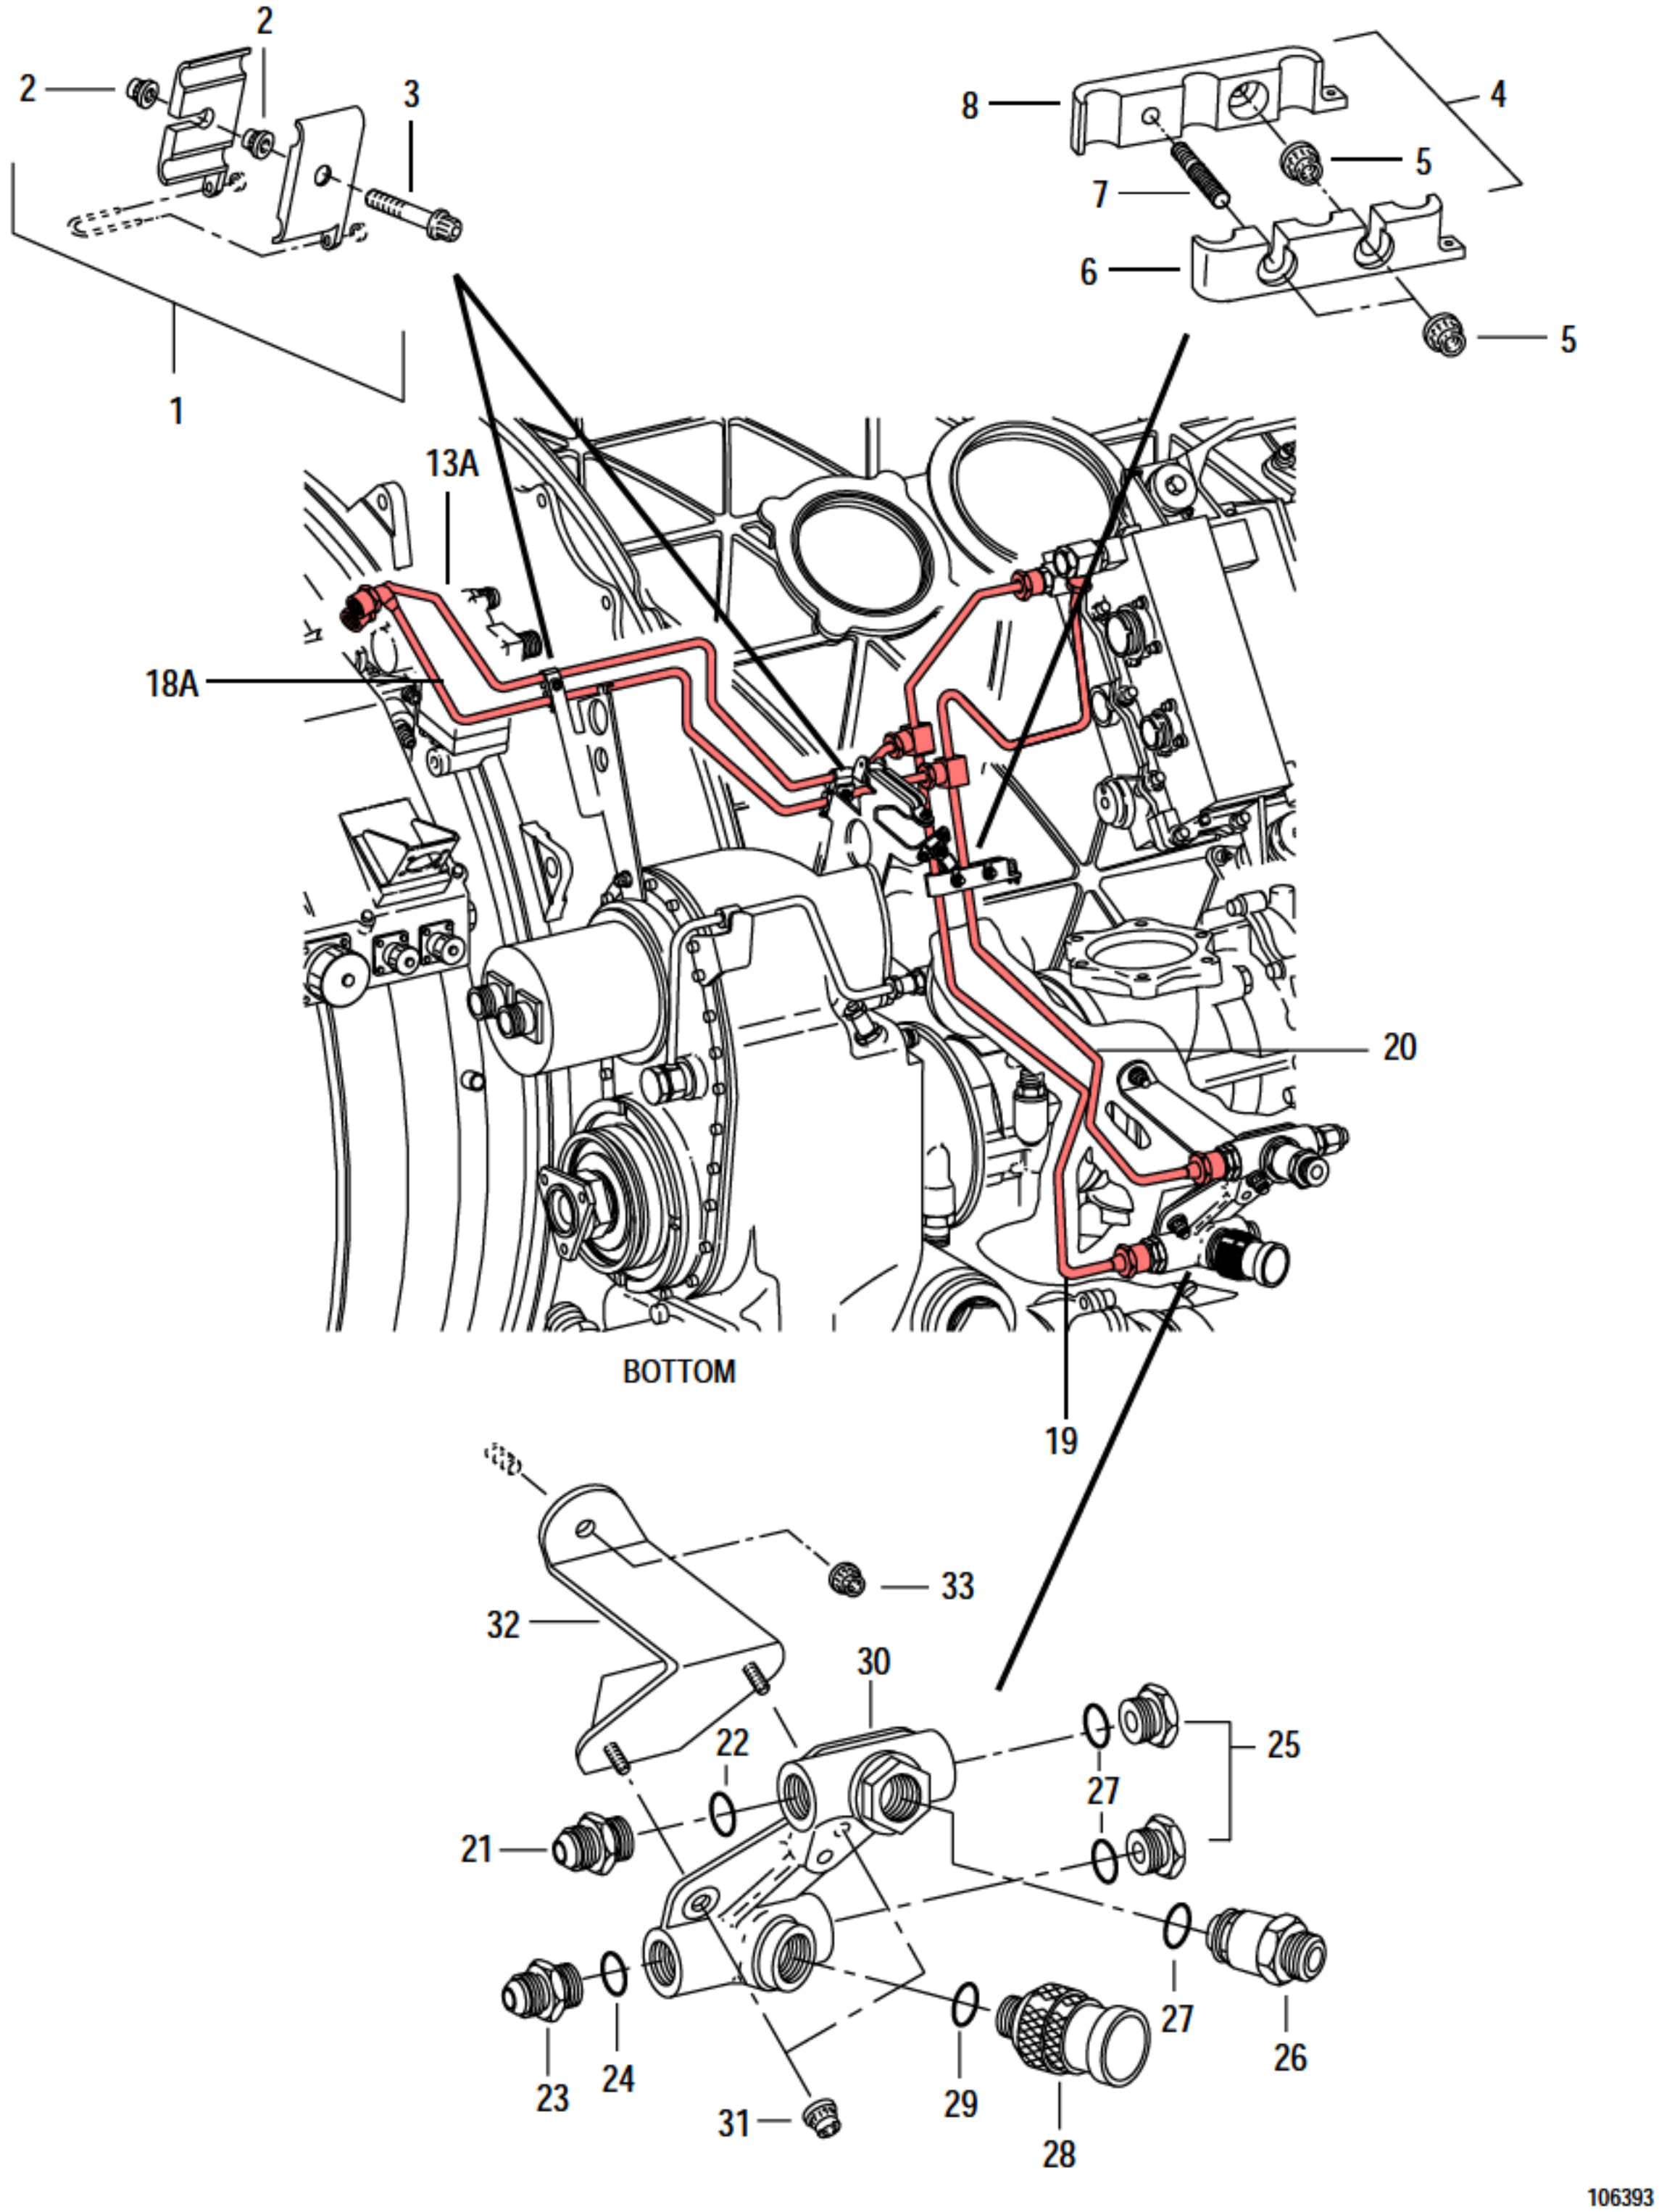


FIGURE 13. DEEC AND EDU INLET/RETURN FUEL TUBING

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	13		NO NUMBER		DEEC AND EDU INLET/RETURN FUEL TUBING . . . . . SEE FIG. 12-1 FOR NHA	REF		
	- 1		4071583	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4073094	2		PAOBZ
			4073094	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	2		PAOBZ
	- 2		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
	- 3		4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG (AP)	1		PAOZZ
	- 4		4076758	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078521	1		PAOBZ
			4078521	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
	- 5		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE PARTIAL BREAKDOWN FOLLOWS	3		PAOZZ
	- 6		4072712	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 7		TR28009-10	29372	.. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG P&W PART NO. ST2665-10	1		PAFZZ
	- 8		4076766	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
R	- 9		DELETED					
R	- 10		DELETED					
R	- 11		DELETED					
R	- 12		DELETED					
R	- 13		DELETED					
R	- 13A	=	4082620-01	52661	. TUBE-FUEL, EDU COOLANT INLET, ASSY OF	1		PAOFF
		=	A9184-1	98441	. TUBE ASSY OF-FUEL, EDU COOLANT INLET . . . . . . P&W PART NO. 4085074	1		PAOFF
R	- 14		DELETED					
R	- 15		DELETED					
R	- 16		DELETED					
R	- 17		DELETED					
R	- 18		DELETED					
R	- 18A	=	4082619-01	52661	. TUBE-FUEL, EDU COOLANT RETURN, ASSY OF . . .	1		PAOFF
		=	A9185-1	98441	. TUBE ASSY OF-FUEL, EDU COOLANT RETURN . . . . P&W PART NO. 4085075	1		PAOFF
	- 19		4077369-01	52661	. MANIFOLD-FUEL COOLANT RETURN, DEEC, ... ASSY OF	1		PAOFF
	- 20		4077370-01	52661	. MANIFOLD-FUEL COOLANT, DEEC, INLET, ASSY . . OF	1		PAOFF
	- 21		ST2101-061	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.5625-18UNJF-3A X 0.375 IN. TUBE OD	1		PAOZZ
	- 22		MS9966-05	96906	. PACKING	1		PAOZZ
	- 23		ST2101-062	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.5625-18UNJF-3A X 0.375 IN. TUBE OD	1		PAOZZ
	- 24		MS9966-04	96906	. PACKING	1		PAOZZ
	- 25		MS9902-06	96906	. PLUG	2		PAOZZ
	- 26		4068431	52661	. COUPLING HALF-QUICK DISCONNECT 0.5625-18UNJF-3A	1		PAOZZ
	- 27		MS9966-06	96906	. PACKING	3		PAOZZ
	- 28		4053946	52661	. COUPLING HALF-QUICK DISCONNECT 0.625-18UNJF-3A	1		PAOZZ
	- 29		MS9966-07	96906	. PACKING	1		PAOZZ
	- 30		4053945	52661	. CONNECTOR-TUBE, FUEL COOLANT	1		PAODD
	- 31		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
	- 32		4077114	52661	. BRACKET-SUPPORT, FUEL COOLANT VALVE, ... ASSY OF	1		PAFZZ
	- 33		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ

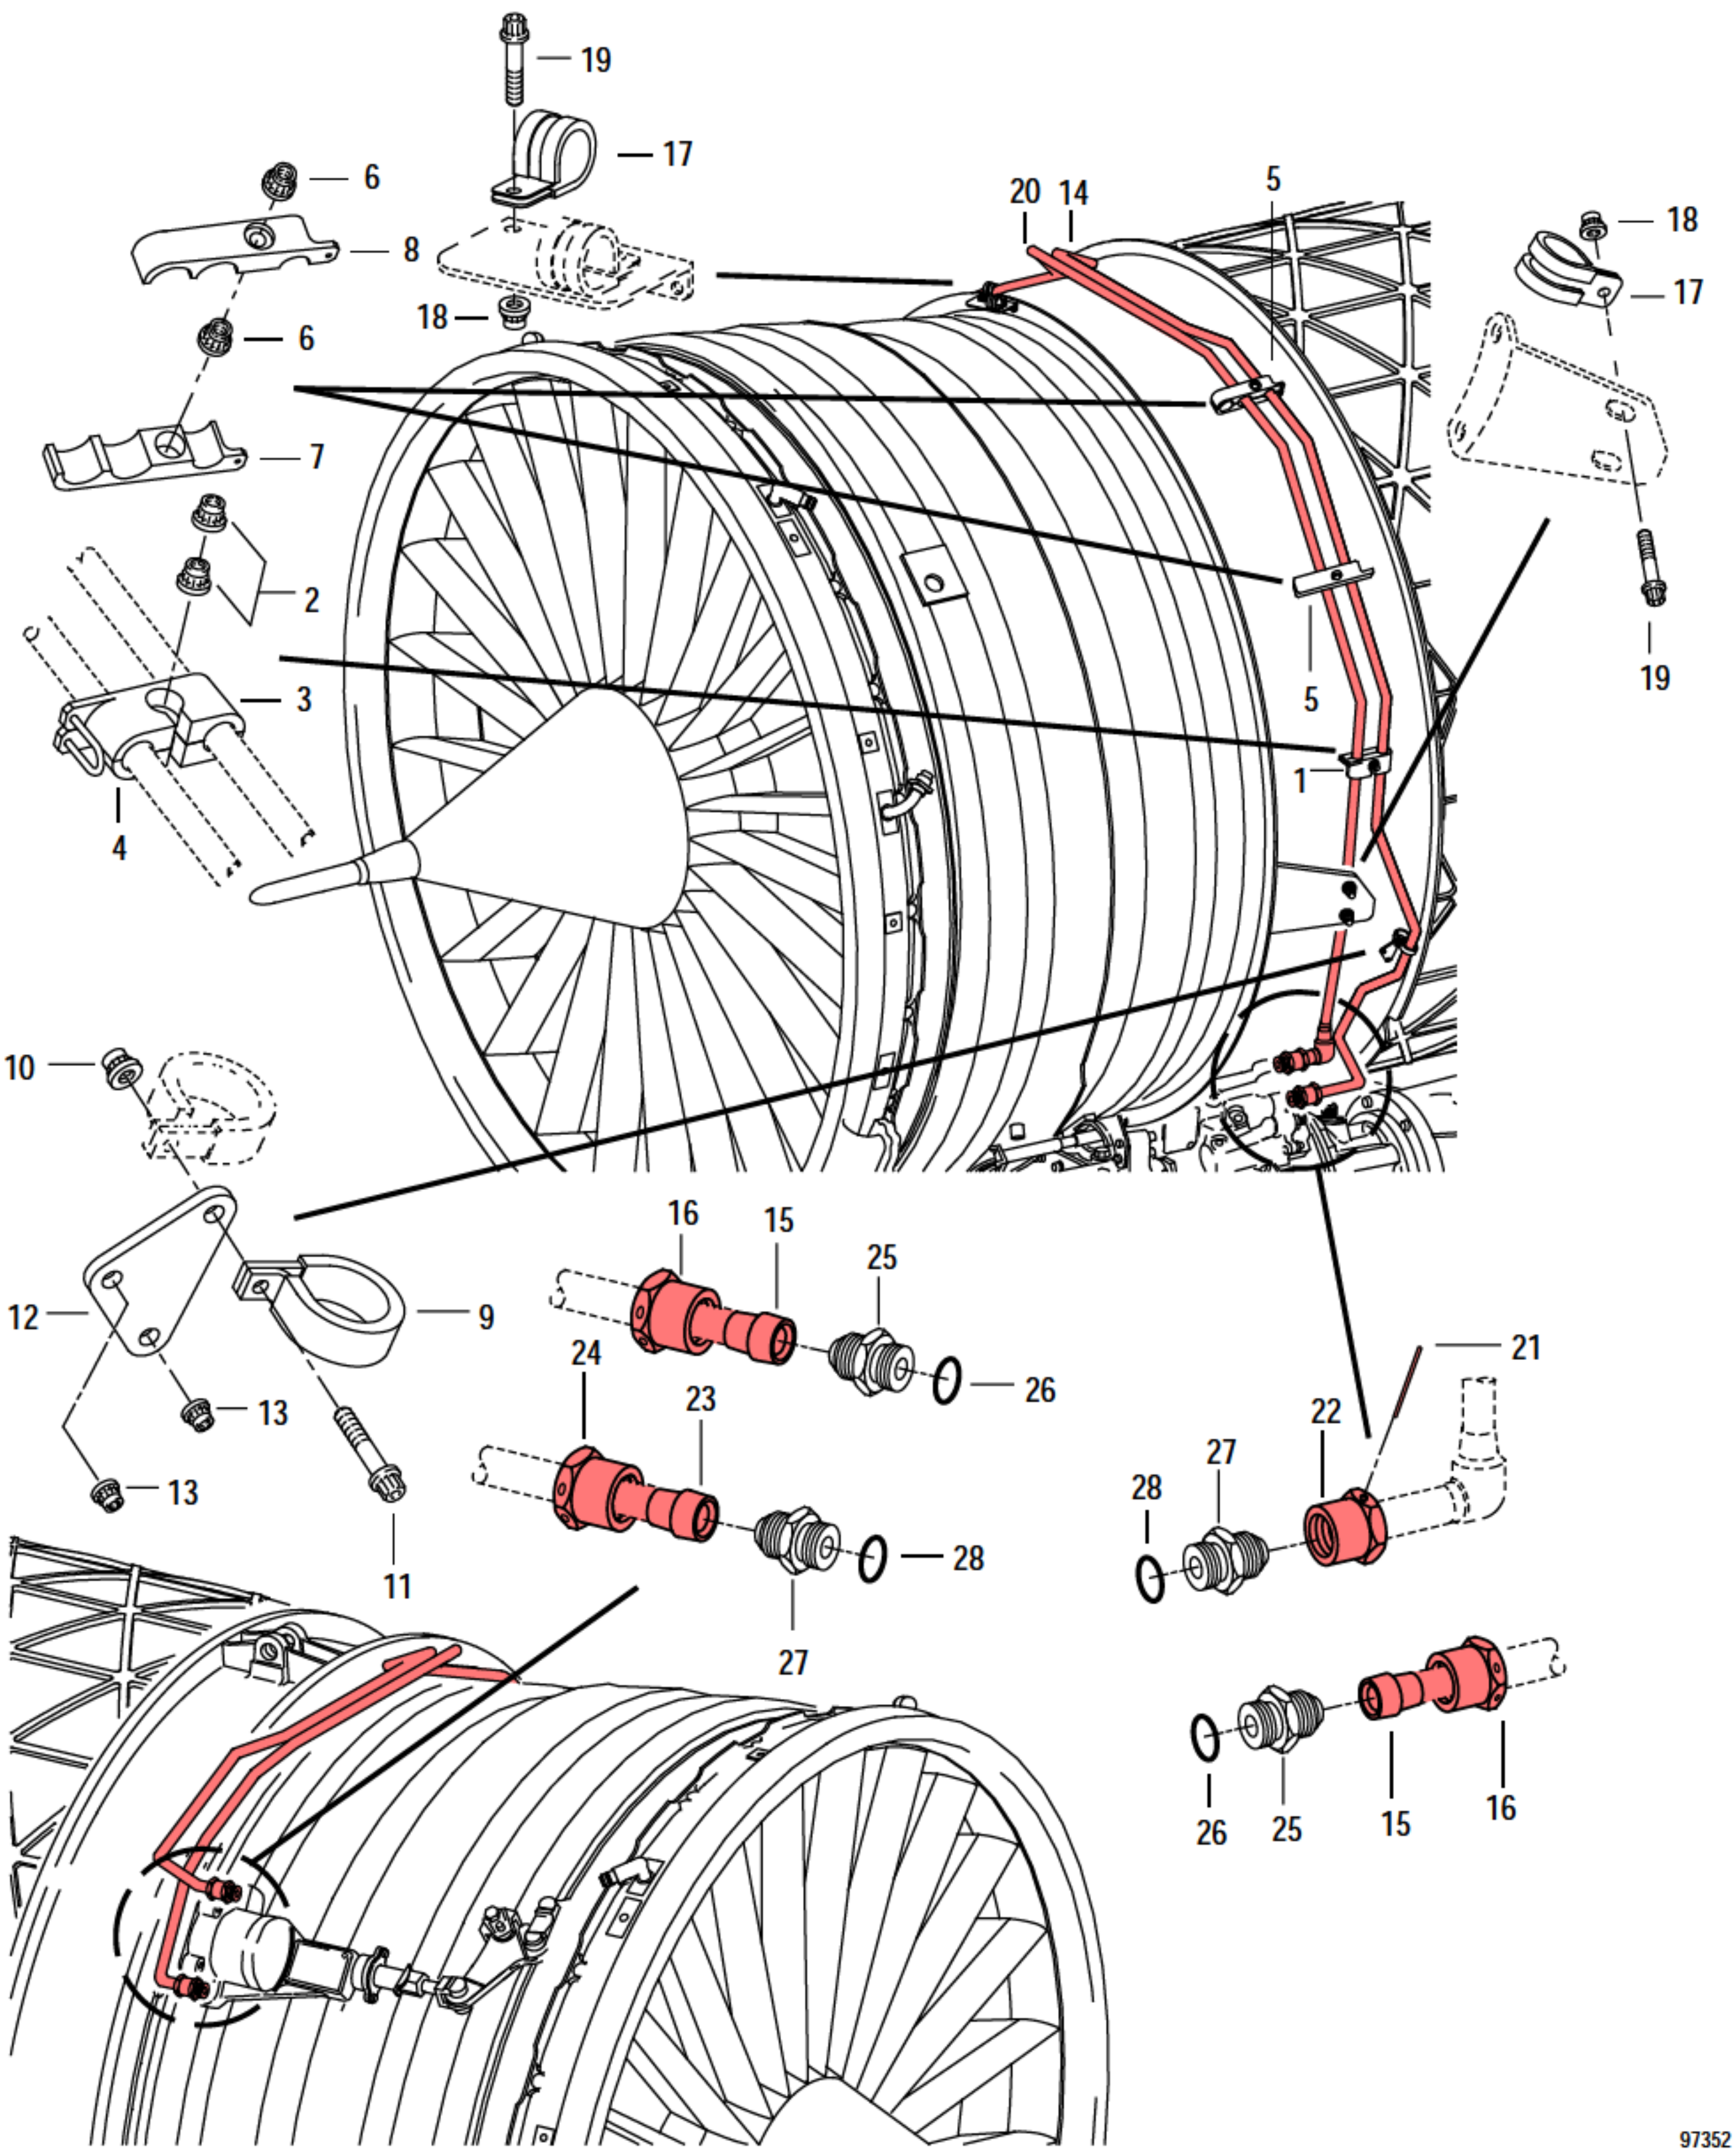


FIGURE 14. COMPRESSOR INLET CYLINDER EXTEND/RETRACT TUBING

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	14		NO NUMBER		COMPRESSOR INLET CYLINDER . . . . EXTEND/RETRACT TUBING SEE FIG. 12-2 FOR NHA	REF		
	- 1		4071583	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4073094	1		PAOBZ
			4073094	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
	- 2		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE PARTIAL BREAKDOWN FOLLOWS	2		PAOZZ
	- 3		4071550	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 4		4071559	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 5		4075947	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078518	2		PAOBZ
			4078518	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	2		PAOBZ
	- 6		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE PARTIAL BREAKDOWN FOLLOWS	2		PAOZZ
	- 7		4075945	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 8		4075946	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 9		ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-04	1		PAOZZ
			ST1540-04	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	- 10		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 11		ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	1		PAOZZ
	- 12		4073665	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
	- 13		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
	- 14		4074059-01	52661	. TUBE-EXTEND, COMPRESSOR INLET VARIABLE . . . VANE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
	- 15		MS9483-04	96906	.. FERRULE	2		PAFZZ
	- 16		MS9198-04	96906	.. NUT	2		PAFZZ
	- 17		ST1540-04	52661	. CLAMP-LOOP, CUSHION	2		PAOZZ
	- 18		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 19		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
R	- 20	=	A7230-1	98441	. HOSE-NONMETALLIC . . . . 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4081097-01 PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
R R R		=	A9170-1	98441	. HOSE-NONMETALLIC . . . . 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4085048	1		PAOFF
	- 21		360193	52661	.. WIRE-THRUST . . . . 0.078 DIA X 1.190 IN. LONG USE ONLY ON 4075077-01	1		PAFZZ
	- 22		ST2121-04	52661	.. NUT-TUBE COUPLING, THRUST WIRE . . . . 0.4375-20UNJF-3B X 0.250 IN. TUBE OD USE ONLY ON 4075077-01	1		PAFZZ
	- 23		MS9483-04	96906	.. FERRULE . . . . USE ONLY ON 4075077-01	1		PAFZZ
	- 24		MS9198-04	96906	.. NUT . . . . USE ONLY ON 4075077-01	1		PAFZZ
	- 25		ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.437-20UNJF-3A X 0.250 IN. TUBE OD	2		PAOZZ
	- 26		MS9966-04	96906	. PACKING	2		PAOZZ
	- 27		ST2091-042	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.4375-20UNJF-3A X 0.250 IN. TUBE OD	2		PAOZZ
	- 28		MS9966-06	96906	. PACKING	2		PAOZZ

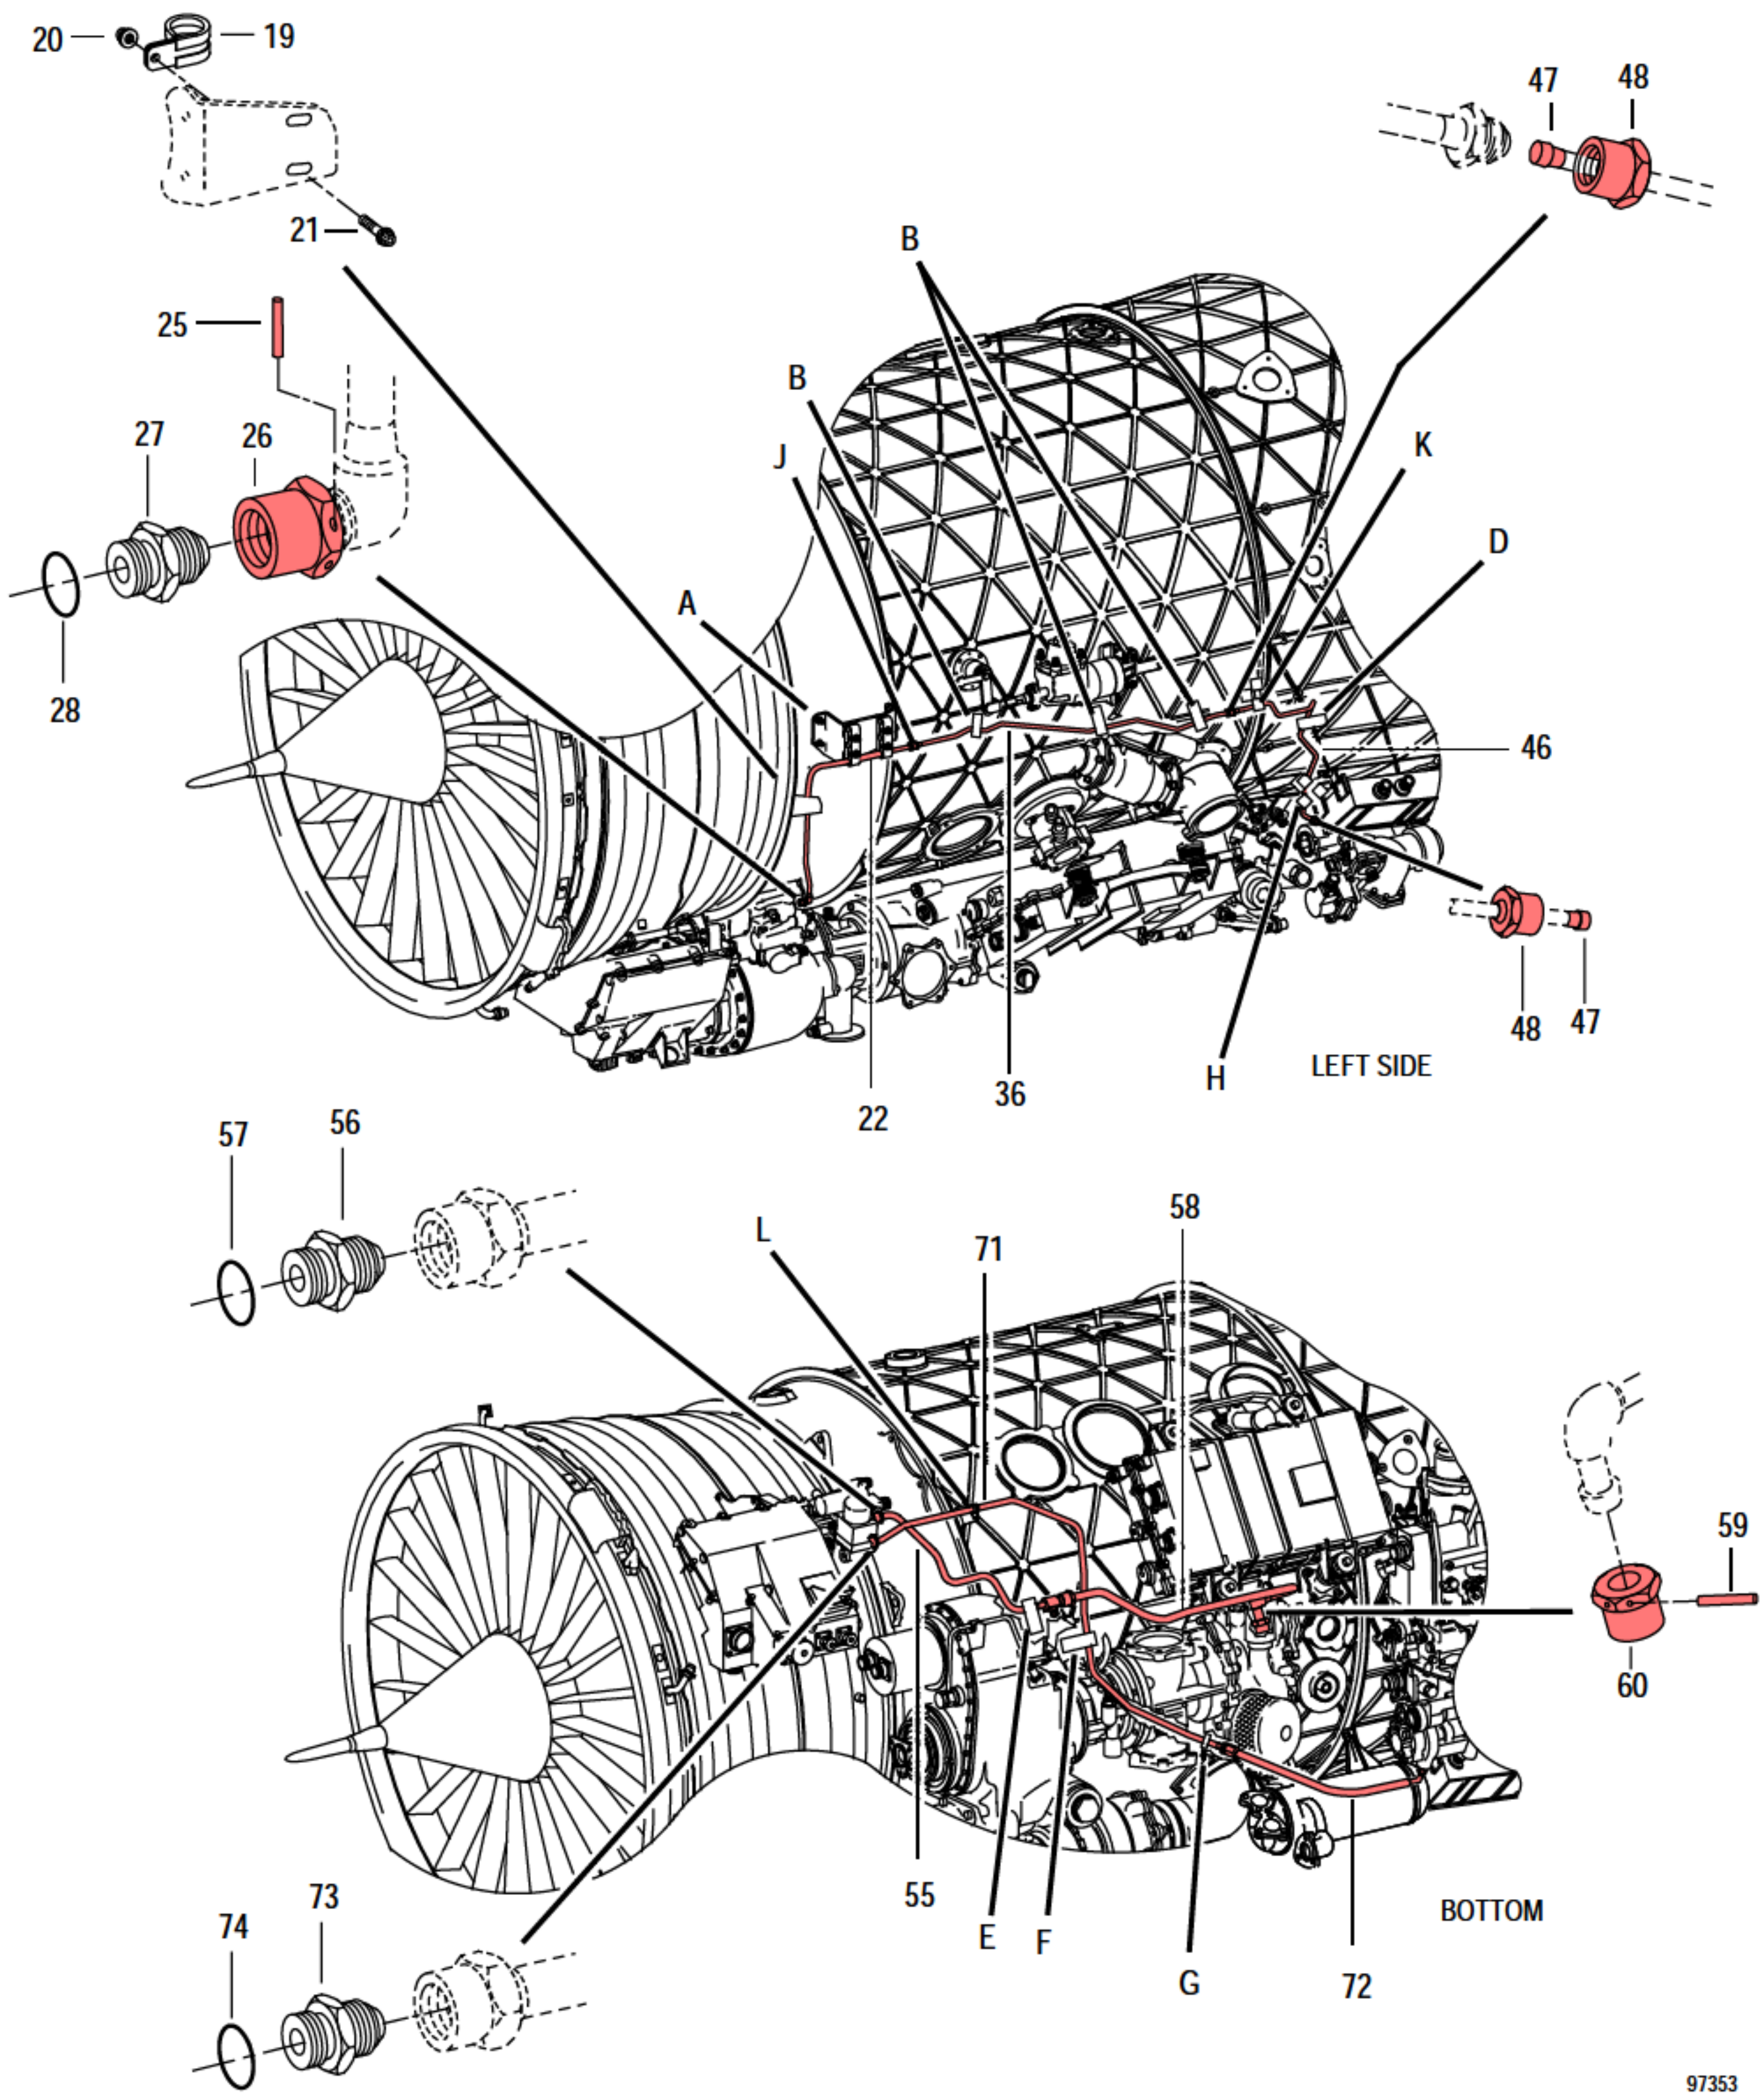


FIGURE 15. CIVV FUEL TUBING
(SHEET 1 OF 3)

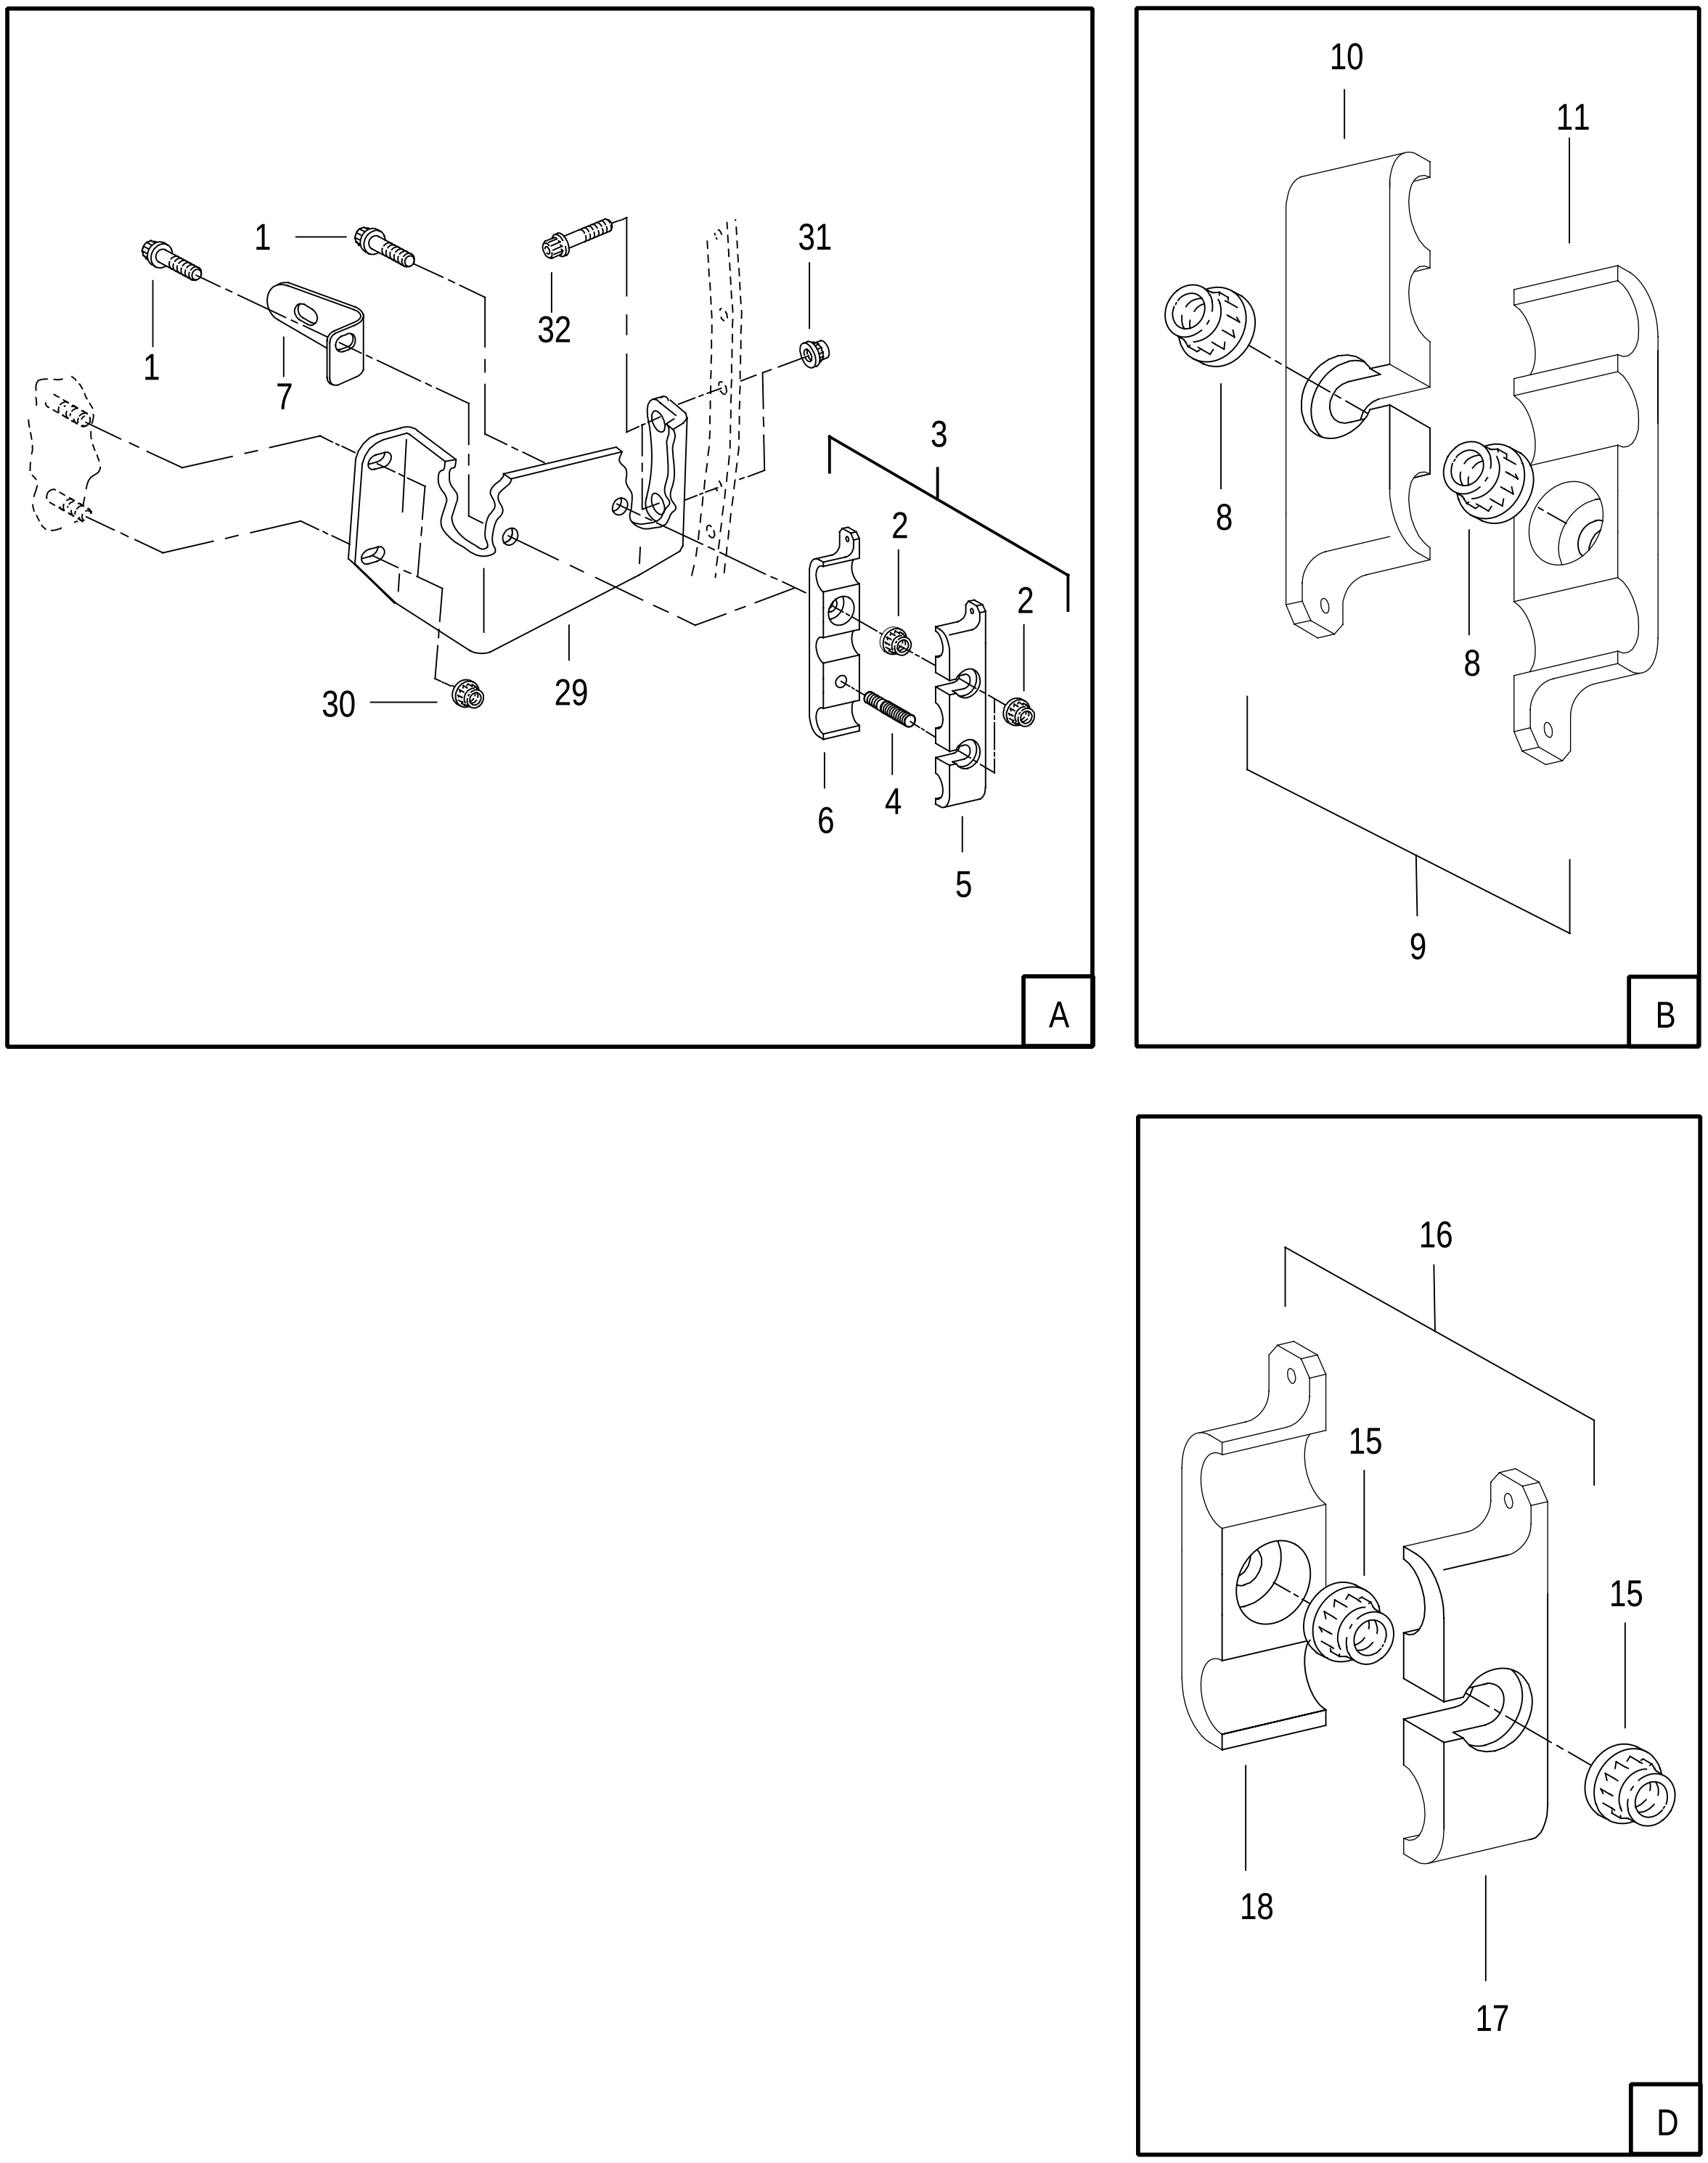


FIGURE 15. CIVV FUEL TUBING
(SHEET 2 OF 3)

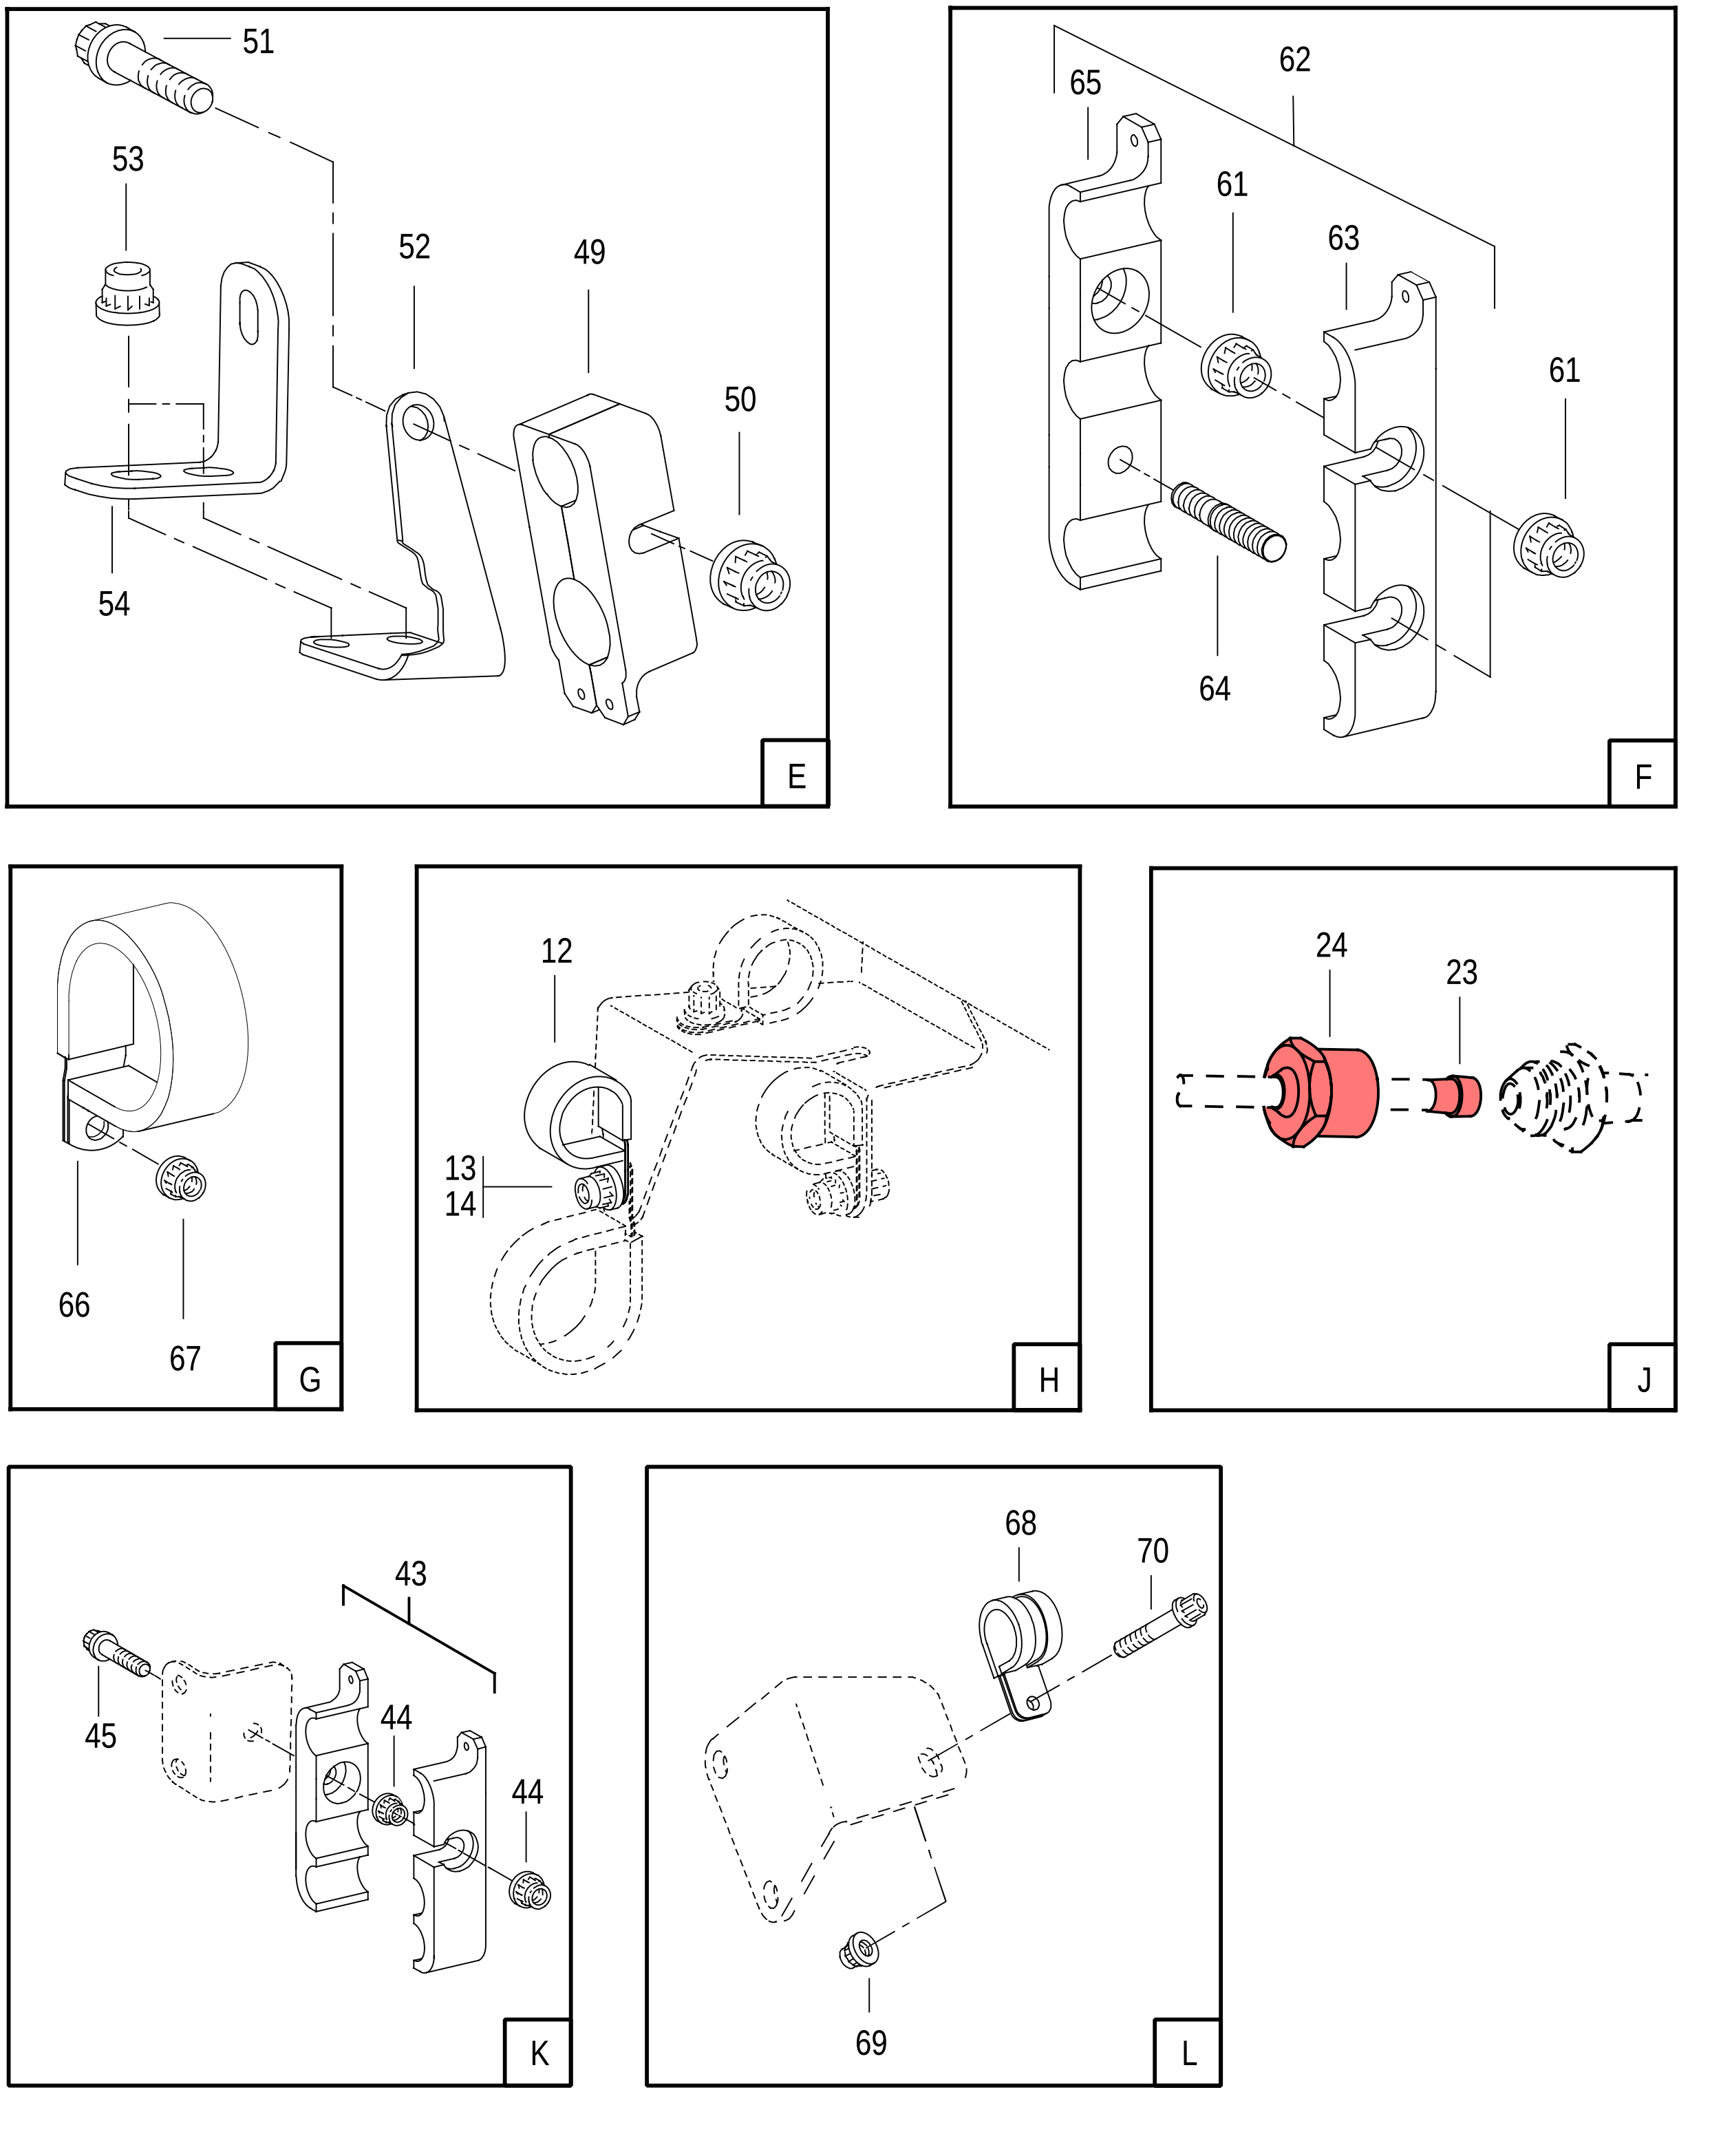


FIGURE 15. CIVV FUEL TUBING
(SHEET 3 OF 3)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	15	NO NUMBER		CIVV FUEL TUBING . . . . SEE FIG. 12-3 FOR NHA	REF		
	- 1	4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG	2		PAOZZ
	- 2	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	6		PAOZZ
	- 3	4078520	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	2		PAOBZ
	- 4	TR28009-10	29372	.. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10	1		PAFZZ
	- 5	4071572	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 6	4076765	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 7	4078548	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
	- 8	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	6		PAOZZ
	- 9	4074067	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078514	3		PAFZZ
		4078514	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	3		PAOBZ
	- 10	4074065	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 11	4074066	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 12	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-04	1		PAOZZ
		ST1540-04	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	- 13	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 14	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP) REPLACES ST2015-016	1		PAOZZ
	- 15	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	2		PAOZZ
	- 16	4071583	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4073094	1		PAOBZ
		4073094	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
	- 17	4071559	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 18	4071550	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 19	ST1540-04	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	- 20	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 21	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
R	- 22	= A7265-1	98441	. HOSE-NONMETALLIC . . . . 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4081210-01	1		PAOFF
R R R R		= A9173-1	98441	. HOSE-NONMETALLIC . . . . 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4085053 PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
	- 23	MS9483-04	96906	.. FERRULE . . . . USE ONLY ON 4072159-01	1		PAFZZ
	- 24	MS9198-04	96906	.. NUT . . . . USE ONLY ON 4072159-01	1		PAFZZ
	- 25	360193	52661	.. WIRE-THRUST . . . . 0.078 DIA X 1.190 IN. LONG USE ONLY ON 4072159-01	1		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
15 - 26	ST2121-04	52661	.. NUT-TUBE COUPLING, THRUST WIRE . . . . 0.4375-20UNJF-3B X 0.250 IN. TUBE OD USE ONLY ON 4072159-01	1		PAFZZ
- 27	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.437-20UNJF-3A X 0.250 IN. TUBE OD	1		PAOZZ
- 28	MS9966-04	96906	. PACKING	1		PAOZZ
- 29	4080994	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 30	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 31	4023116	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 32	ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.750 IN. LONG (AP)	2		PAOZZ
- 33	DELETED					
- 34	DELETED					
- 35	DELETED					
- 36	4081083-01	52661	. TUBE-BACKUP MODE SIGNAL PRESSURE TO . . . . CONNECTOR, ASSY OF	1		PAOFF
- 37	DELETED					
- 38	DELETED					
- 39	DELETED					
- 40	DELETED					
- 41	DELETED					
- 42	DELETED					
- 43	4074067	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAFZZ
- 44	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 45	4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG (AP)	1		PAOZZ
- 46	4081084-01	52661	. TUBE-BACKUP MODE SIGNAL PRESSURE TO . . . . CONNECTOR, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 47	ST2981-04	52661	.. FERRULE-TUBE FITTING	2		XA
- 48	MS9198-04	96906	.. NUT	2		PAFZZ
- 49	4074402	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078516	1		PAOBZ
	4078516	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
- 50	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 51	4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG (AP)	1		PAOZZ
- 52	4081173	52661	. BRACKET-BLOCK CLAMP . . . . REPLACES 4074501	1		PAFZZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	15 - 53		4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
	- 54		4078549	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
	- 55		4074249-01	52661	. MANIFOLD-FUEL, COMPRESSOR INLET .... VARIABLE VANE, ASSY OF	1		PAOFF
	- 56		ST2000-06	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS .... 0.562-18UNJF-3A X 0.375 IN. TUBE OD	1		PAOZZ
	- 57		MS9966-06	96906	. PACKING	1		PAOZZ
	- 58		4072781-01	52661	. TUBE-FUEL, MAIN PUMP, ASSY OF .... PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
	- 59		354581	52661	.. WIRE-THRUST .... 0.094 DIA X 2.170 IN. LONG	1		PAFZZ
	- 60		ST2035-08	52661	.. NUT-TUBE COUPLING, THRUST WIRE .... 0.500 TUBE OD X 0.750-16UNJF-3B	1		PAFZZ
	- 61		4023115	52661	. NUT OPTION .... SEE OPTION TABLE	3		PAOZZ
	- 62		4076758	52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... WHEN EXH USE 4078521	1		PAOBZ
			4078521	52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
	- 63		4072712	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 64		TR28009-10	29372	.. STUD-LOCKED IN .... 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10	1		PAFZZ
	- 65		4076766	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 66		ST2439-06	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-06	1		PAOZZ
			ST1540-06	52661	. CLAMP-LOOP, CUSHION..........................	1		PAOZZ
	- 67		4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
	- 68		ST1540-06	52661	. CLAMP-LOOP, CUSHION..........................	1	XA	PAOZZ
	- 69		4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1	XA	PAOZZ
	- 70		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	XA	PAOZZ
	- 71		4072779-01	52661	. TUBE-FUEL PRESSURE, COMPRESSOR INLET .... VARIABLE VANE, ASSY OF	1	WZ	PAOFF
			4081545-01	52661	. TUBE-FUEL PRESSURE, COMPRESSOR INLET .... VARIABLE VANE, ASSY OF	1	XA	PAOFF
R	- 72	=	4072100	52661	. HOSE OPTION .... SEE OPTION TABLE	1		PAOZZ
R R R		=	A9159-1	98441	. HOSE-NONMETALLIC............................. 0.313 IN. P&WA PART NO. 4085040	1		PAOZZ
	- 73		ST2251-082	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS .... 0.750-16UNJF-3A X 0.500 IN. TUBE OD	1		PAOZZ
	- 74		MS9966-06	96906	. PACKING	1		PAOZZ

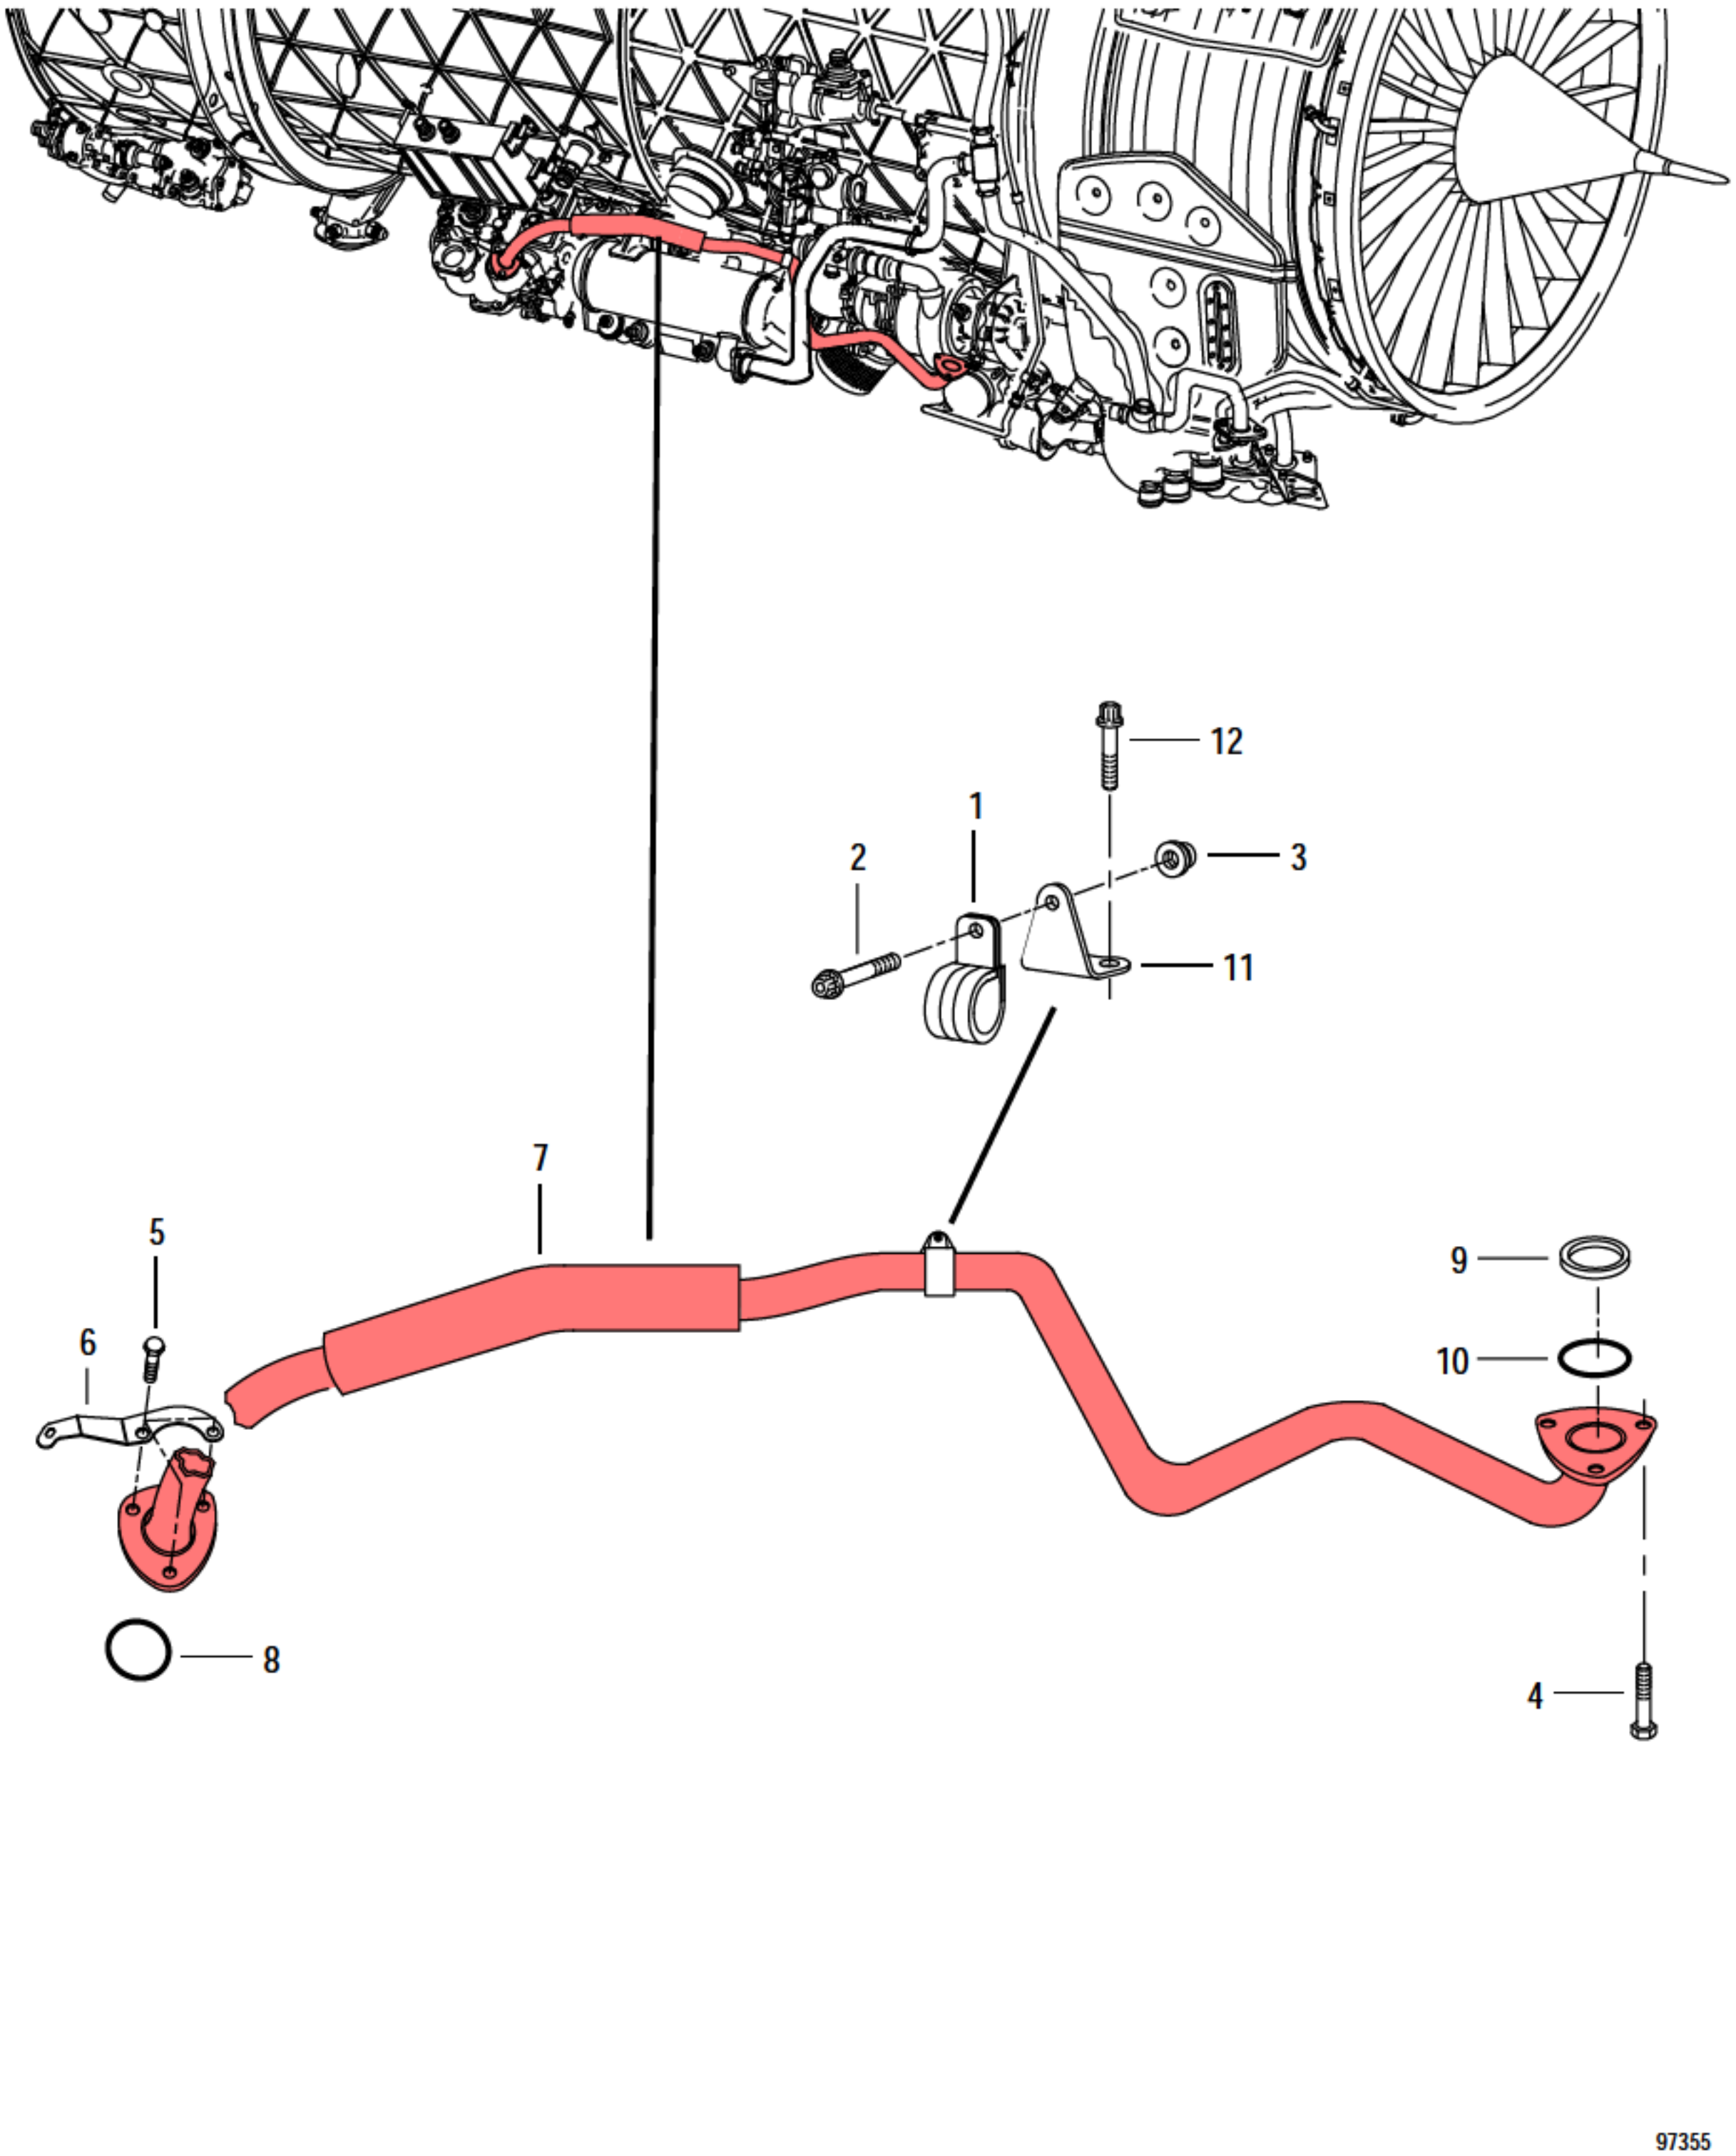


FIGURE 16. AUGMENTOR FUEL PUMP PF1A TUBING

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	16		NO NUMBER		AUGMENTOR FUEL PUMP PF1A TUBING . . . . SEE FIG. 12-4 FOR NHA	REF		
	- 1		ST2439-20	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-20	1		PAOZZ
			ST1540-20	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	- 2		ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP) REPLACES ST2015-016	1		PAOZZ
	- 3		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 4		ST2520-09	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.375-24UNJF-3A X 0.938 IN. LONG	3		PAFZZ
	- 5		ST1421-12	52661	. BOLT-MACHINE . . . . 0.3125-24UNJF-3A X 1.000 IN. LONG	3		PAOZZ
	- 6		4081298	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
R	- 7	=	4075972	52661	. HOSE OPTION . . . . SEE OPTION TABLE	1		PAOZZ
R R R		=	A9177-1	98441	. HOSE-NONMETALLIC . . . . 1.125 IN. P&WA PART NO. 4085041	1		PAOZZ
	- 8		MS9967-222	96906	. PACKING	1		PAOZZ
	- 9		MS28782-26	96906	. RETAINER	1		PAOZZ
	- 10		MS9967-221	96906	. PACKING	1		PAOZZ
	- 11		4074060	52661	. BRACKET-ANGLE	1		PAOZZ
	- 12		ST2018-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	2		PAOZZ

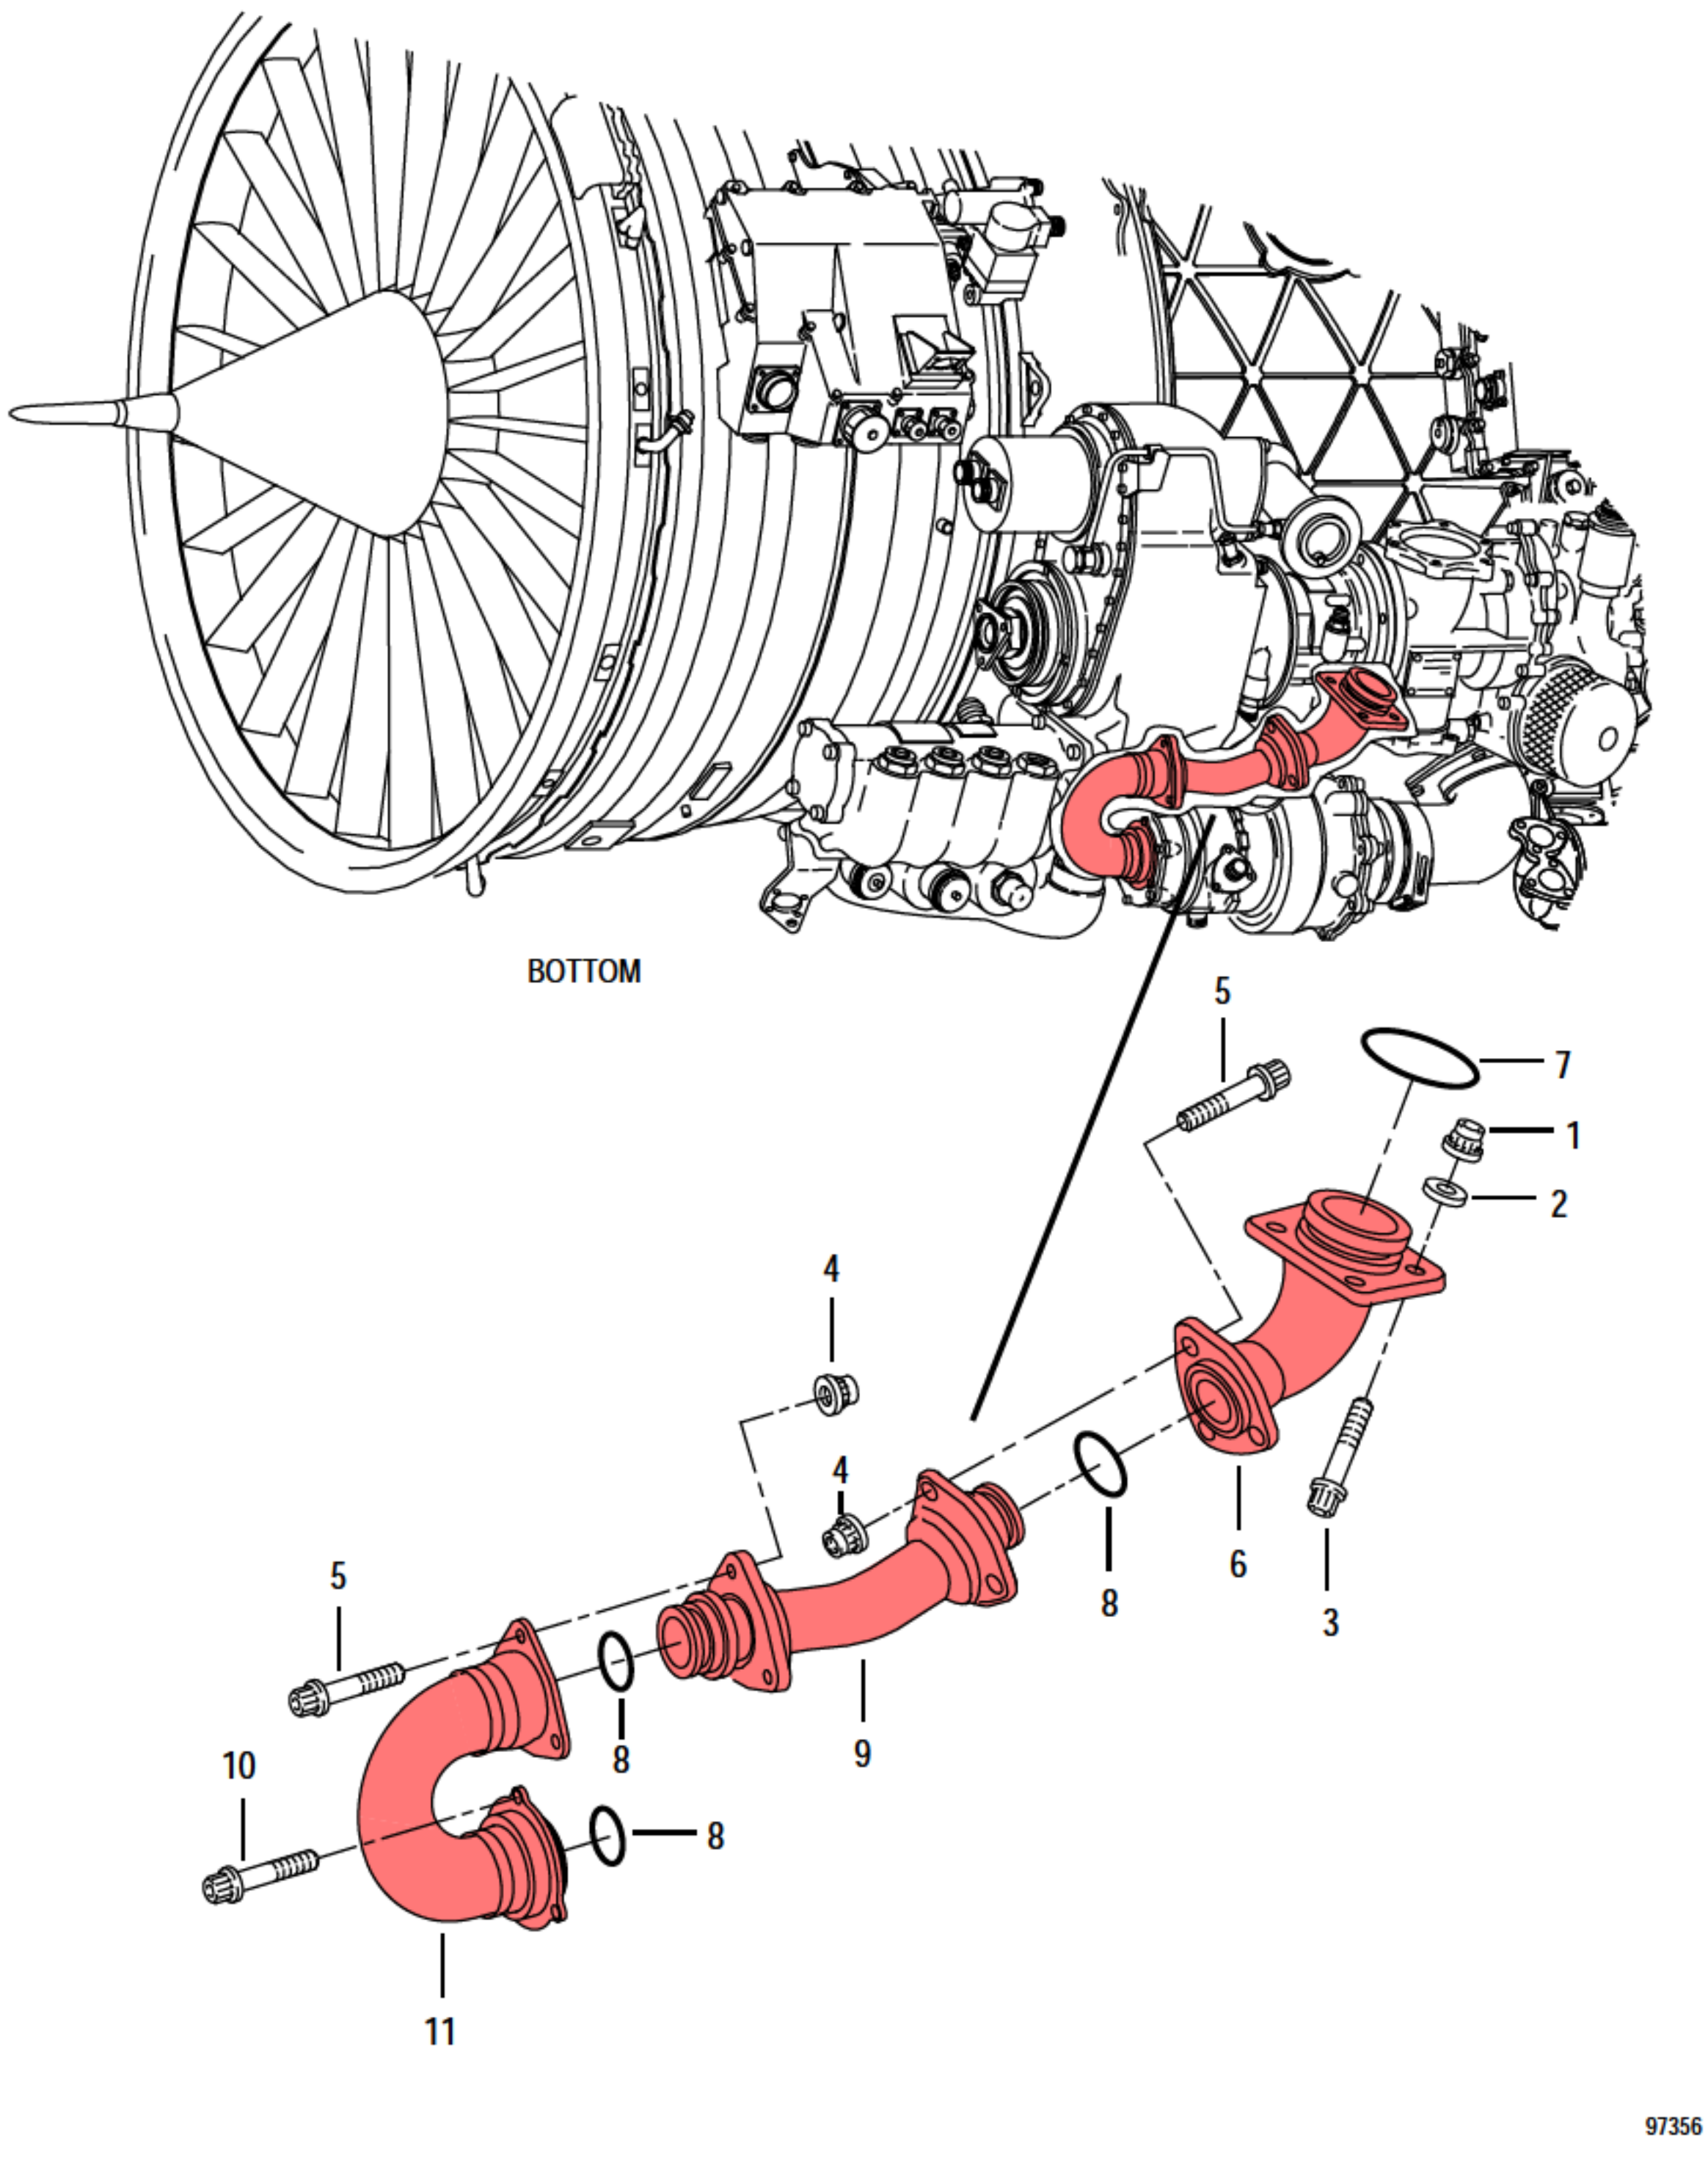


FIGURE 17. AUGMENTOR FUEL PUMP PF1 TUBING

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
17	NO NUMBER		AUGMENTOR FUEL PUMP PF1 TUBING . . . . SEE FIG. 12-5 FOR NHA	REF		
- 1	4023117	52661	. NUT OPTION . . . . SEE OPTION TABLE	4		PAOZZ
- 2	MS9549-11	96906	. WASHER	4		PAOZZ
- 3	ST2235-028	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.3125-24UNJF-3A X 0.875 IN. LONG	4		PAOZZ
- 4	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	6		PAOZZ
- 5	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG	6		PAOZZ
- 6	4063375	52661	. ELBOW-AUGMENTOR FUEL PUMP, PF1 TUBE	1		PAOZZ
- 7	MS9967-225	96906	. PACKING	1		PAOZZ
- 8	MS9967-133	96906	. PACKING	3		PAOZZ
- 9	4074684-01	52661	. TUBE-PF1, AUGMENTOR FUEL PUMP, REAR, ... ASSY OF SUPERSEDES 4063376-01	1		PAODD
- 10	ST2017-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.625 IN. LONG	3		PAOZZ
- 11	4063377	52661	. TUBE-PF1, AUGMENTOR FUEL PUMP, FRONT, ... ASSY OF	1		PAOBZ

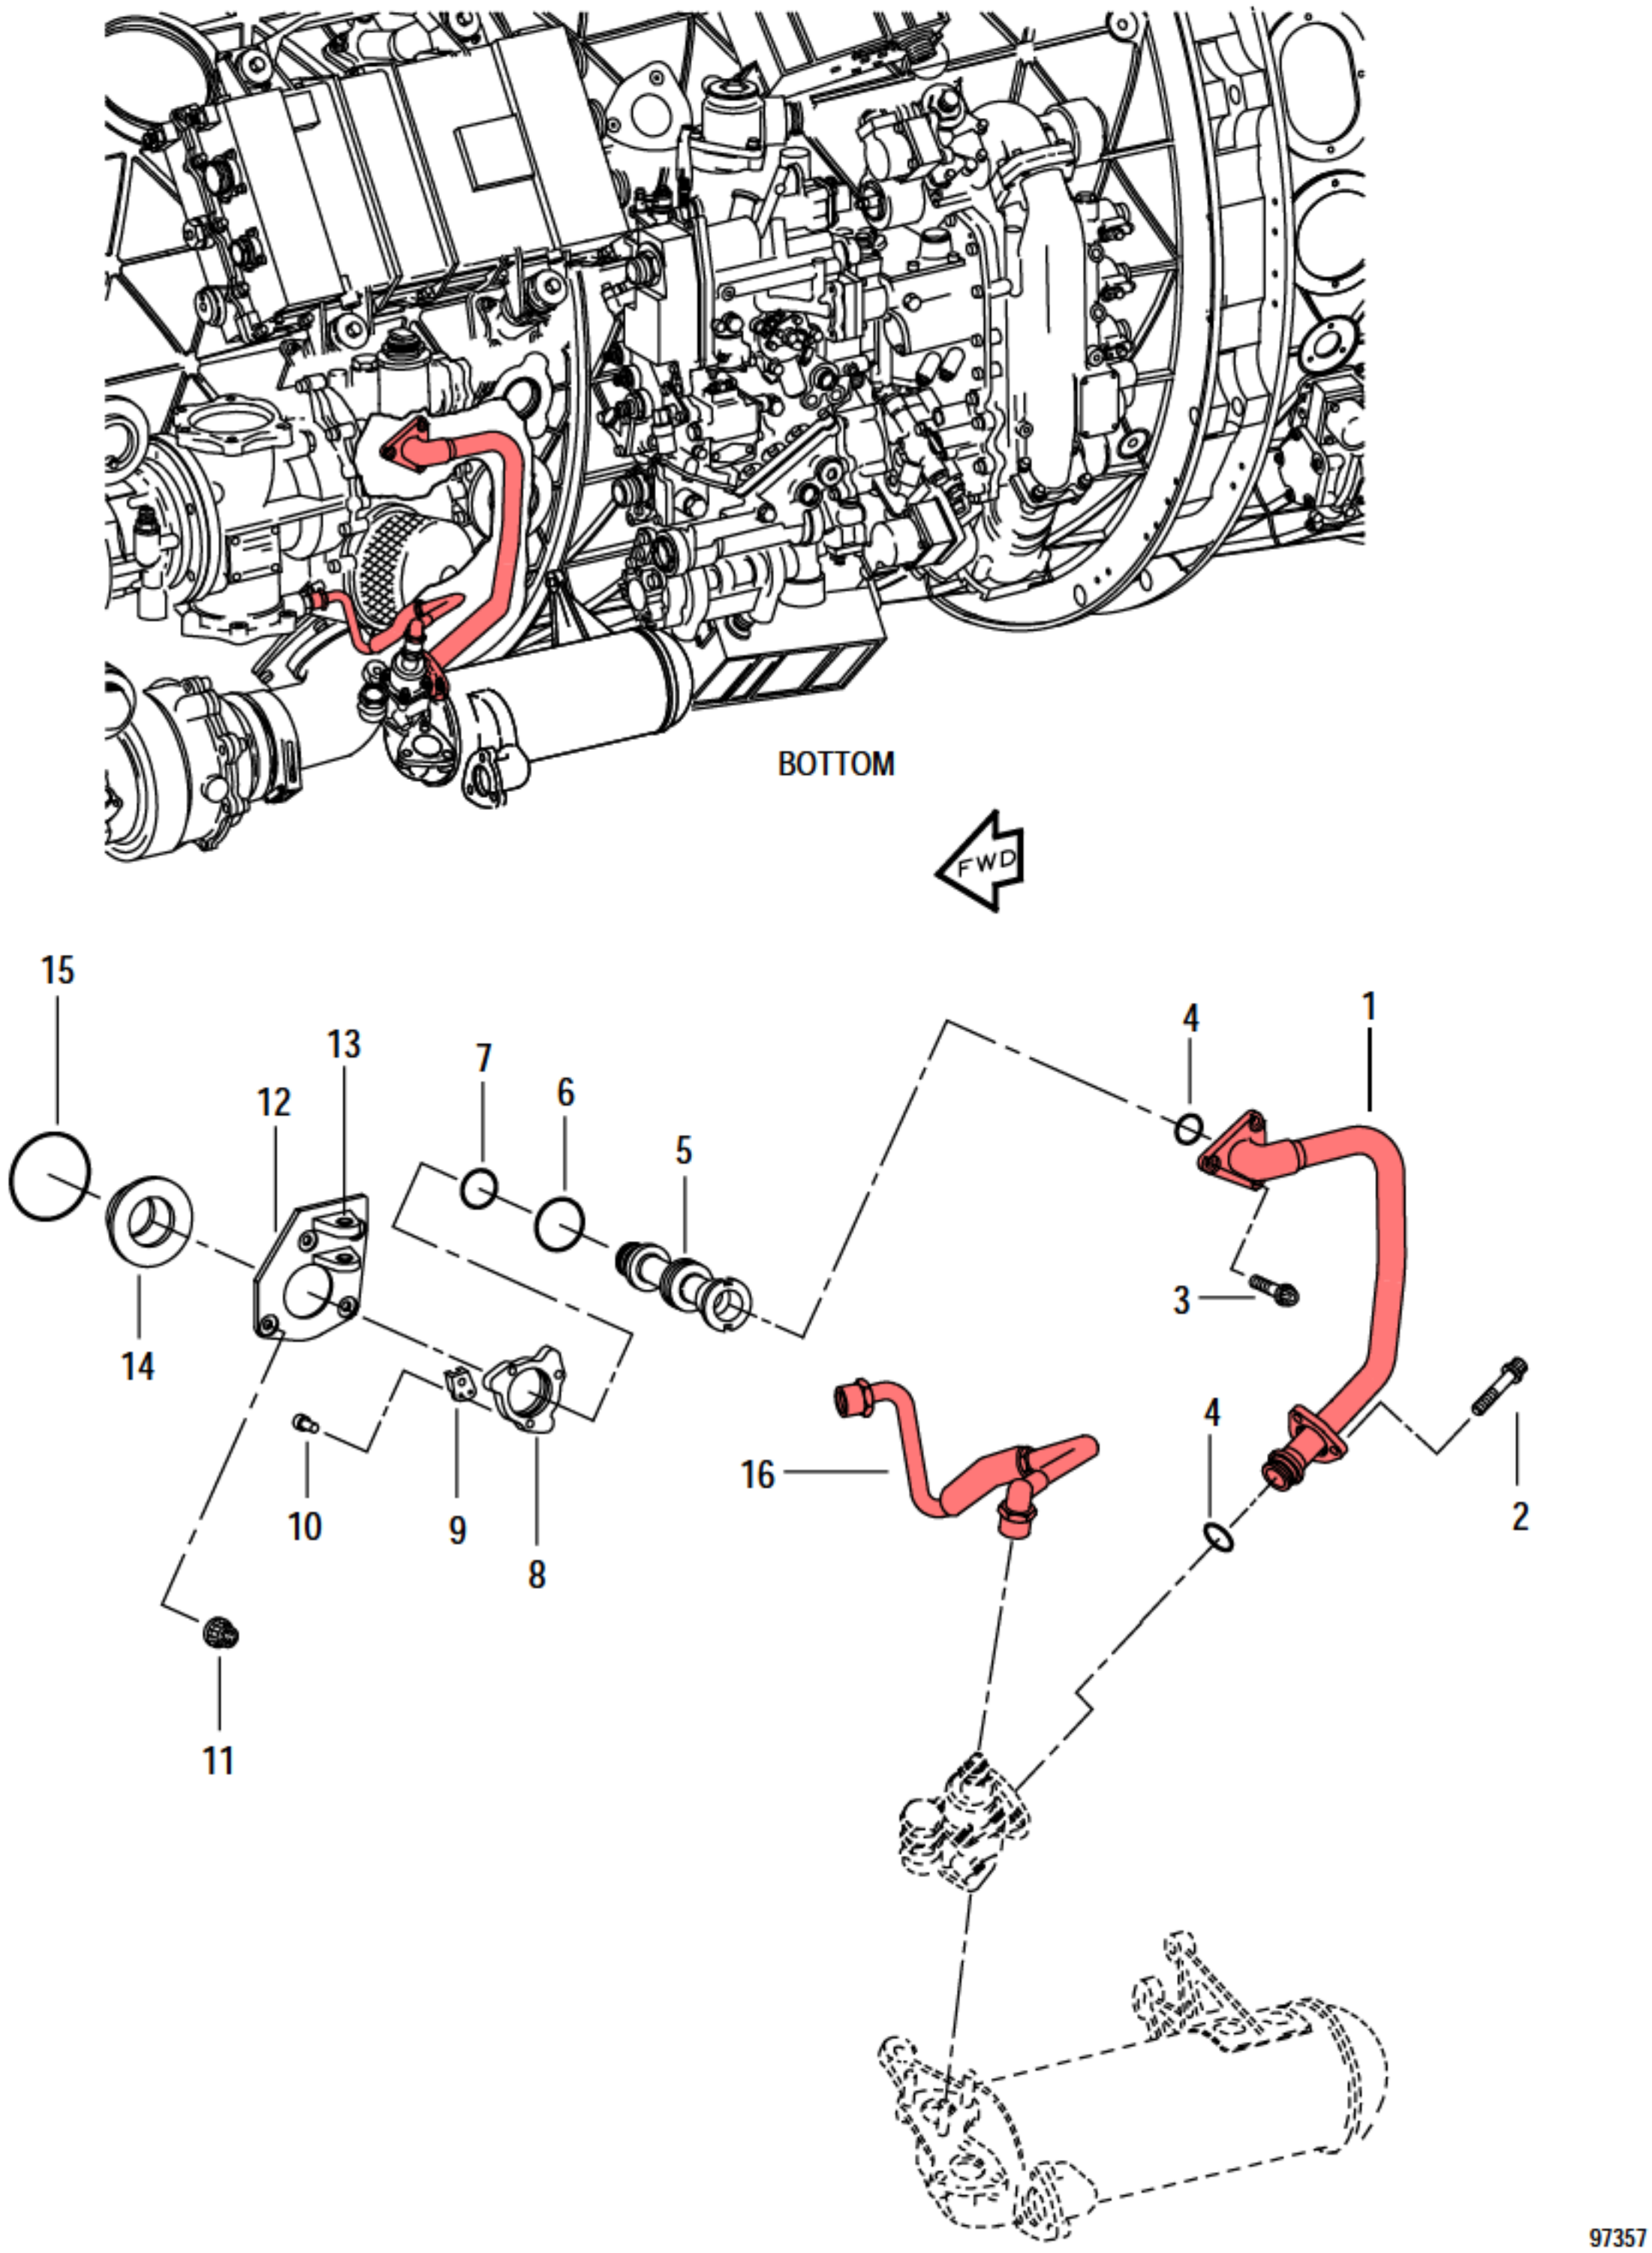


FIGURE 18. FUEL MANIFOLD SUPPLY TUBE

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	18		NO NUMBER		FUEL MANIFOLD SUPPLY TUBE .... SEE FIG. 12-6 FOR NHA	REF		
	- 1		4072707-01	52661	. TUBE-SUPPLY, FUEL MANIFOLD, ASSY OF	1		PAOFF
	- 2		ST2150-020	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX .... 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	3		PAOZZ
	- 3		ST2015-024	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.750 IN. LONG (AP)	3		PAOZZ
	- 4		MS9966-10	96906	. PACKING	2		PAOZZ
	- 5		4074241	52661	. TUBE-TRANSFER, PACKING .... 1.0625-12UNJF-3A X 3.800 IN. LONG	1		PAOBZ
	- 6		MS9386-123	96906	. PACKING	1		PAOZZ
	- 7		MS9966-12	96906	. PACKING	1		PAOZZ
	- 8		4036085	52661	. PLATE-LOCK, NO. 4 BEARING TUBE, ASSY OF ..... PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
	- 9	=	4046367	52661	.. NUT OPTION .... SEE OPTION TABLE	3		PAFZZ
		=	ST5030-09	52661	.. NUT OPTION .... SEE OPTION TABLE	3		PAFZZ
	- 10	=	352194	52661	.. RIVET-TUBULAR, UNIVERSAL .... 0.094 DIA X 0.250 IN. LONG (AP)	2		PAFZZ
		=	453331	52661	.. RIVET-TUBULAR, UNIVERSAL .... 0.094 DIA X 0.188 IN. LONG (AP)	2		XA
		=	495996	52661	.. RIVET-TUBULAR, UNIVERSAL .... 0.094 DIA X 0.219 IN. LONG (AP)	2		XA
	- 11		4023115	52661	. NUT OPTION .... SEE OPTION TABLE	4		PAOZZ
	- 12		4069460	52661	. PLATE ASSY-RETAINING, TUBE, FAN DUCT .... PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
	- 13		4062665	52661	.. BUSHING-SLEEVE .... 0.3135 ID X 0.43835 OD X 0.307 IN. LONG	2		PADZZ
	- 14		4036095	52661	. HOUSING-TRANSFER TUBE	1		PAOBZ
	- 15		MS9386-135	96906	. PACKING	1		PAOZZ
R	- 16	=	4075619	52661	. HOSE OPTION .... SEE OPTION TABLE	1		PAOZZ
R R R		=	A9181-1	98441	. HOSE-NONMETALLIC .... 0.188 IN. P&WA PART NO. 4085071	1		PAOZZ



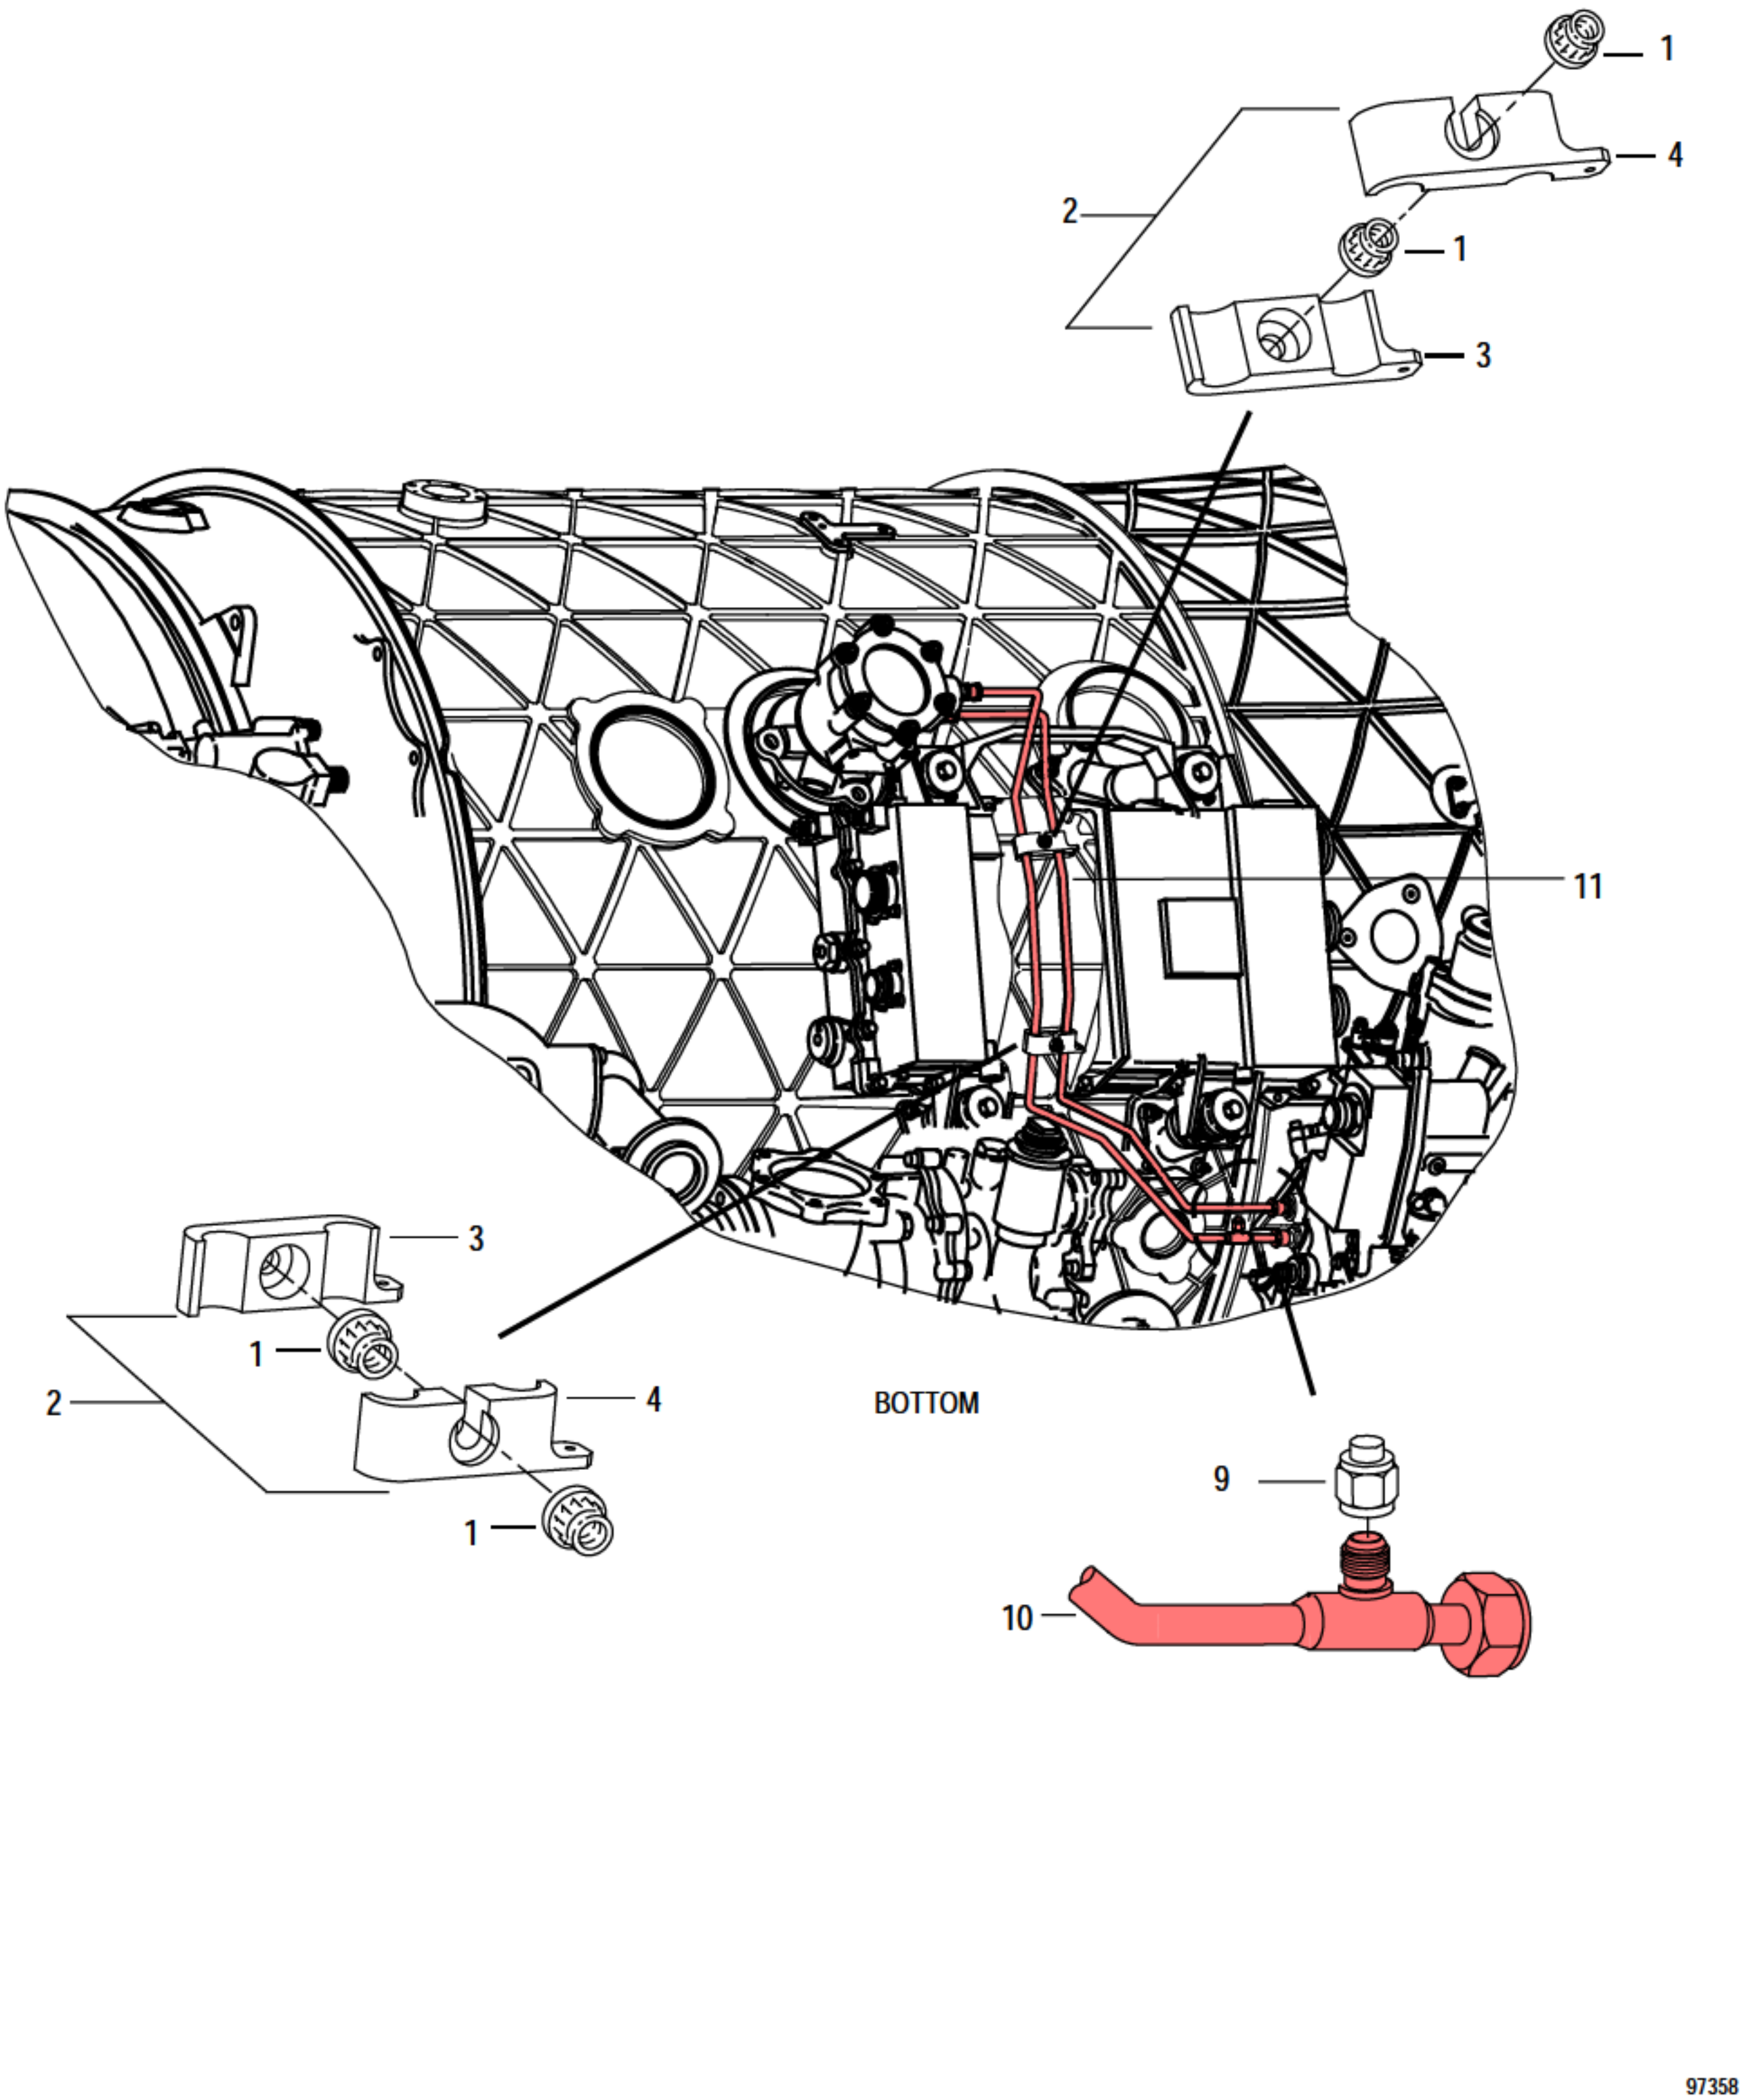


FIGURE 19. COMPRESSOR BLEED LINEAR ACTUATING CYLINDER TUBING

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	19		NO NUMBER		COMPRESSOR BLEED LINEAR ACTUATING .... CYLINDER TUBING SEE FIG. 12-7 FOR NHA	REF		
	- 1		4023115	52661	. NUT OPTION .... SEE OPTION TABLE	4		PAOZZ
	- 2		4071583	52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... WHEN EXH USE 4073094	2		PAOBZ
			4073094	52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... PARTIAL BREAKDOWN FOLLOWS	2		PAOBZ
	- 3		4071559	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 4		4071550	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 5		DELETED					
	- 6		DELETED					
	- 7		DELETED					
	- 8		DELETED					
	- 9		MS9314-04	96906	. CAP ASSY	1		PAOZZ
R	- 10	=	A7227-1	98441	. HOSE-NONMETALLIC .... 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4081092-01	1		PAOFF
R R R		=	A9169-1	98441	. HOSE-NONMETALLIC .... 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4085047	1		PAOFF
R	- 11	=	A7226-1	98441	. HOSE-NONMETALLIC .... 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4081091-01	1		PAOFF
R R R		=	A9180-1	98441	. HOSE-NONMETALLIC .... 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4085070	1		PAOFF

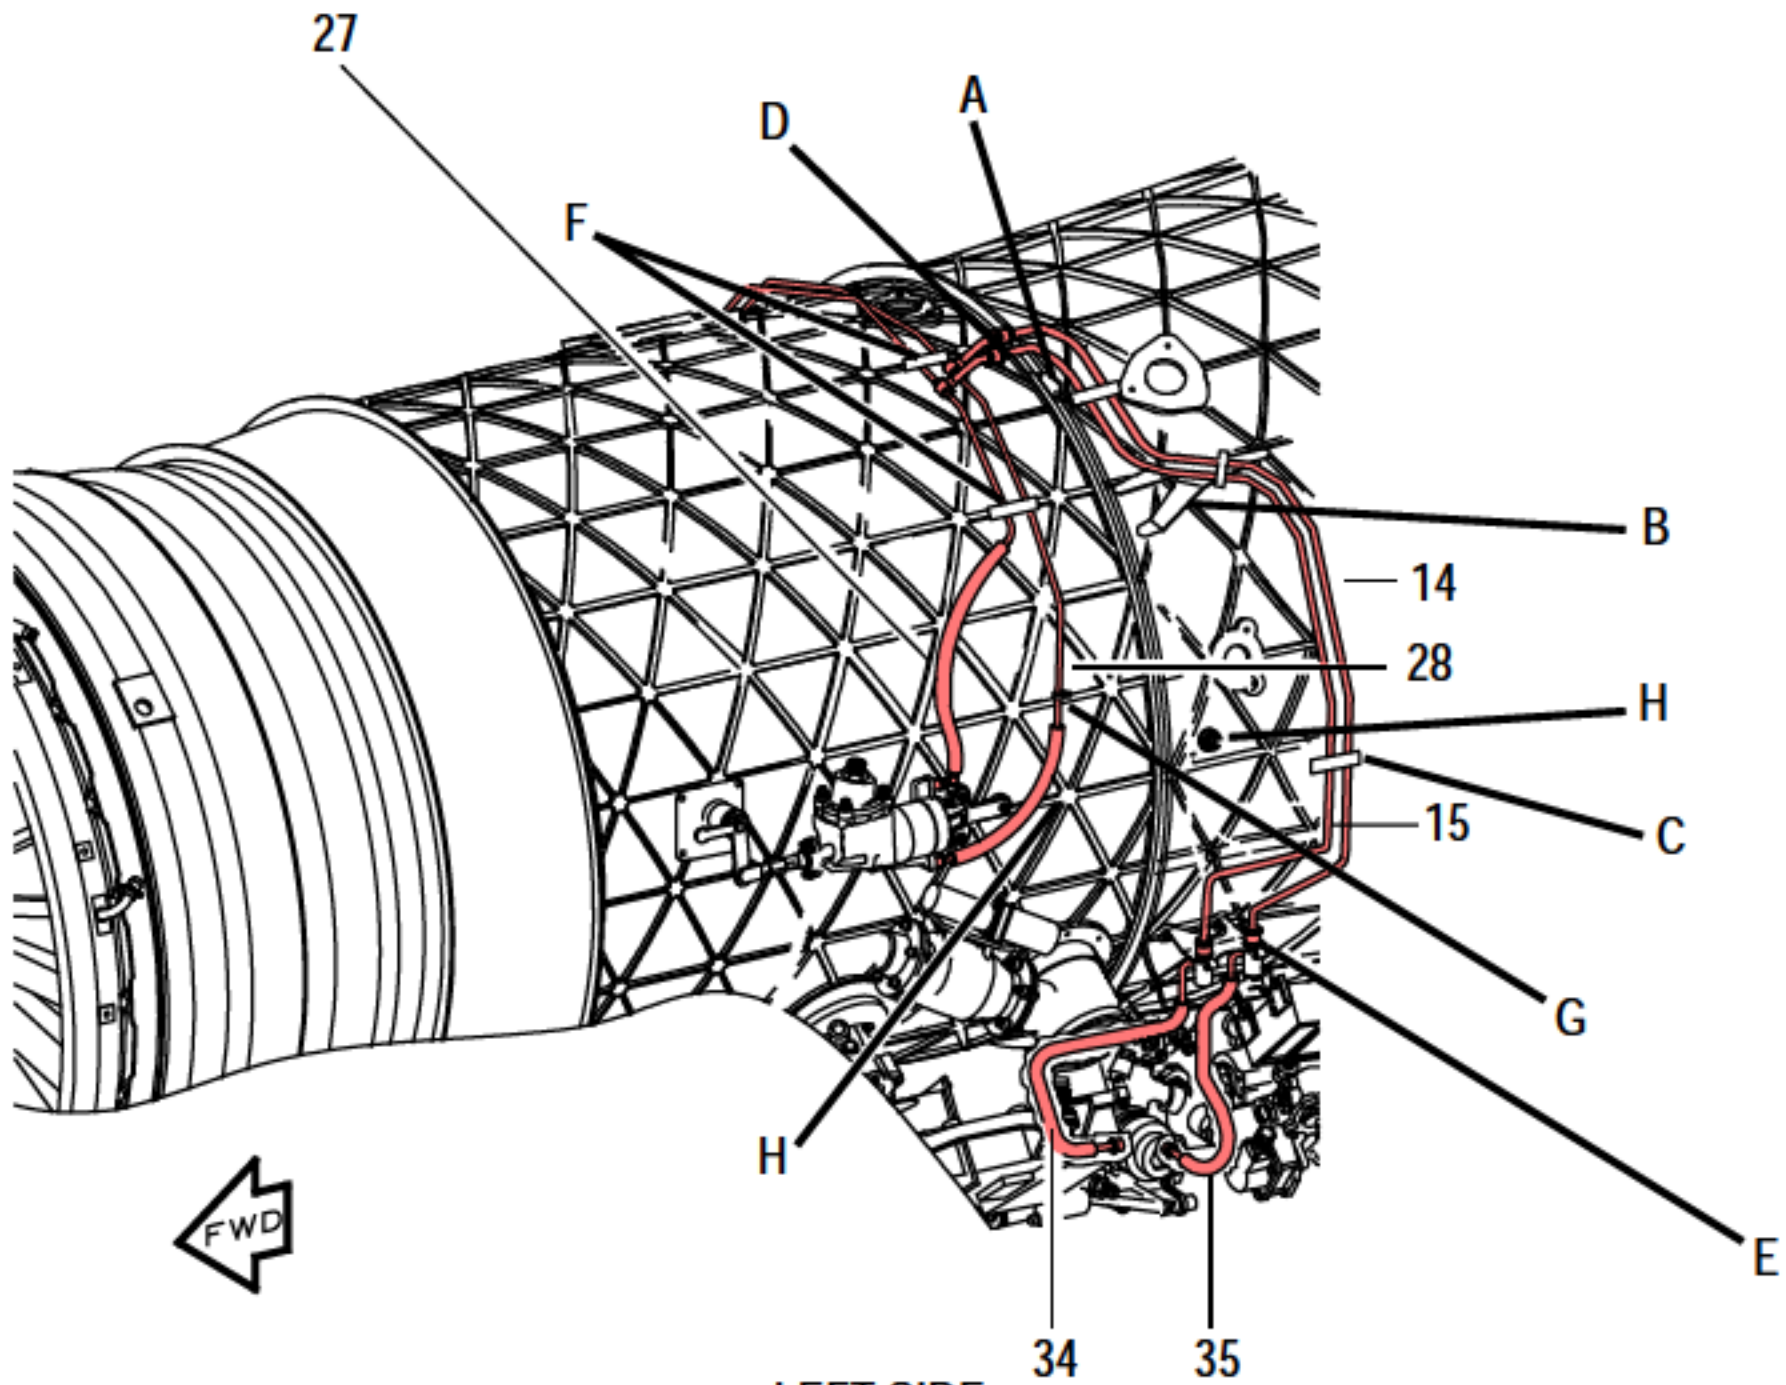

LEFT SIDE

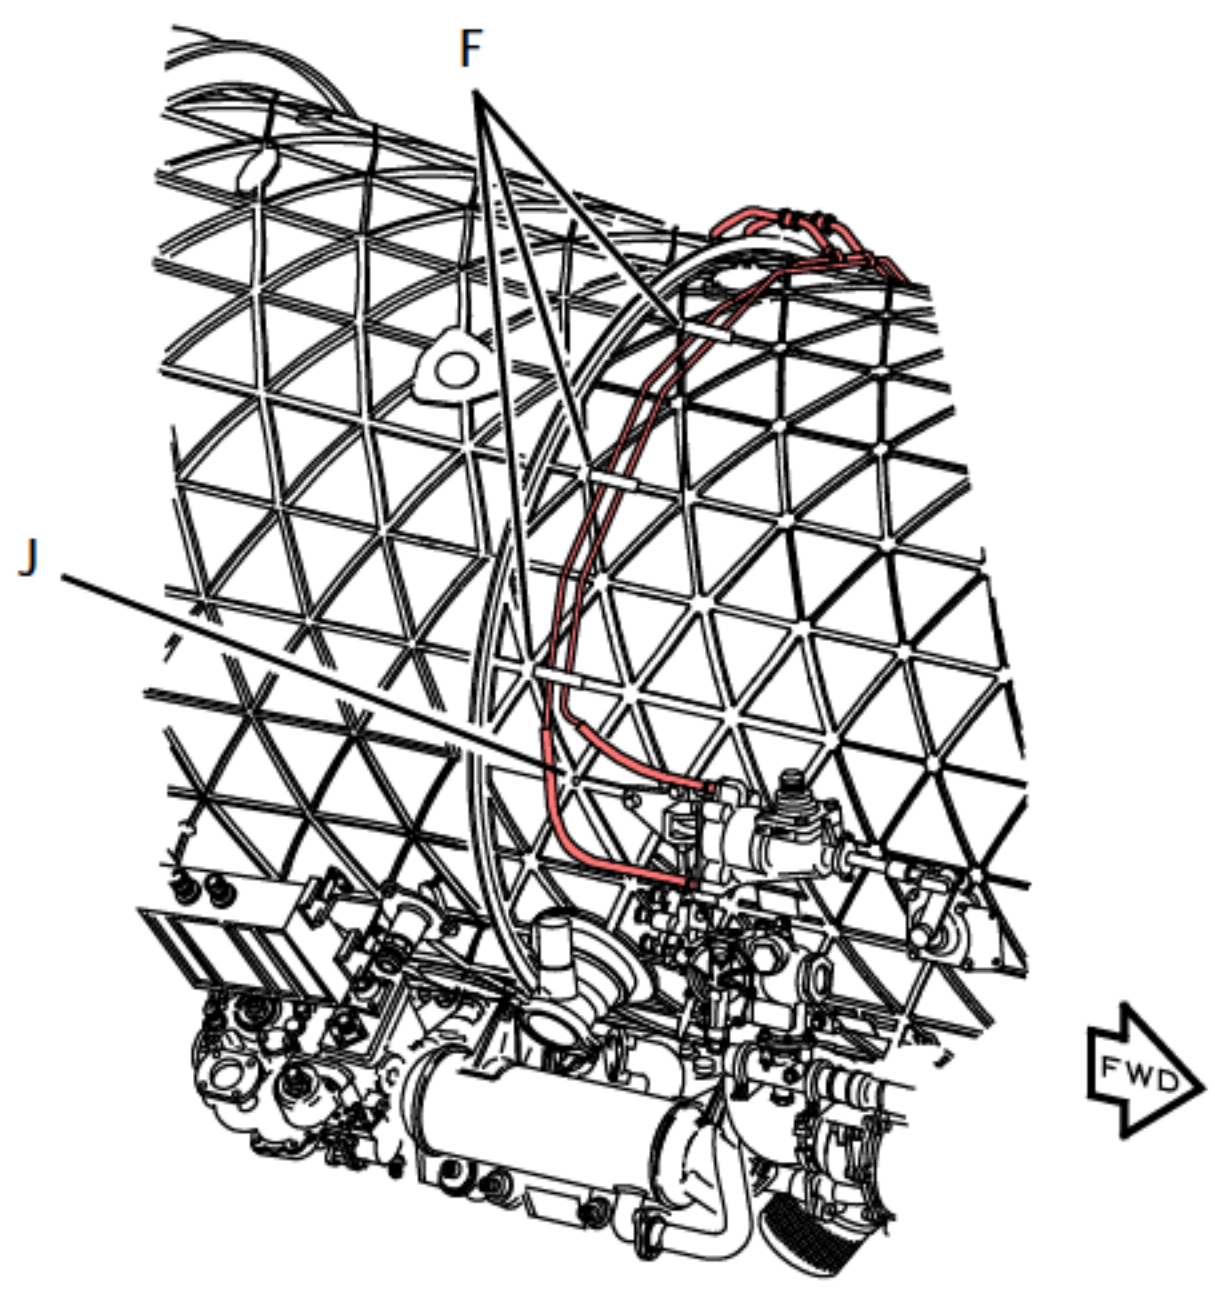

RIGHT SIDE

97359

FIGURE 20. REAR COMPRESSOR CYLINDER EXTEND/RETRACT TUBING
(SHEET 1 OF 3)

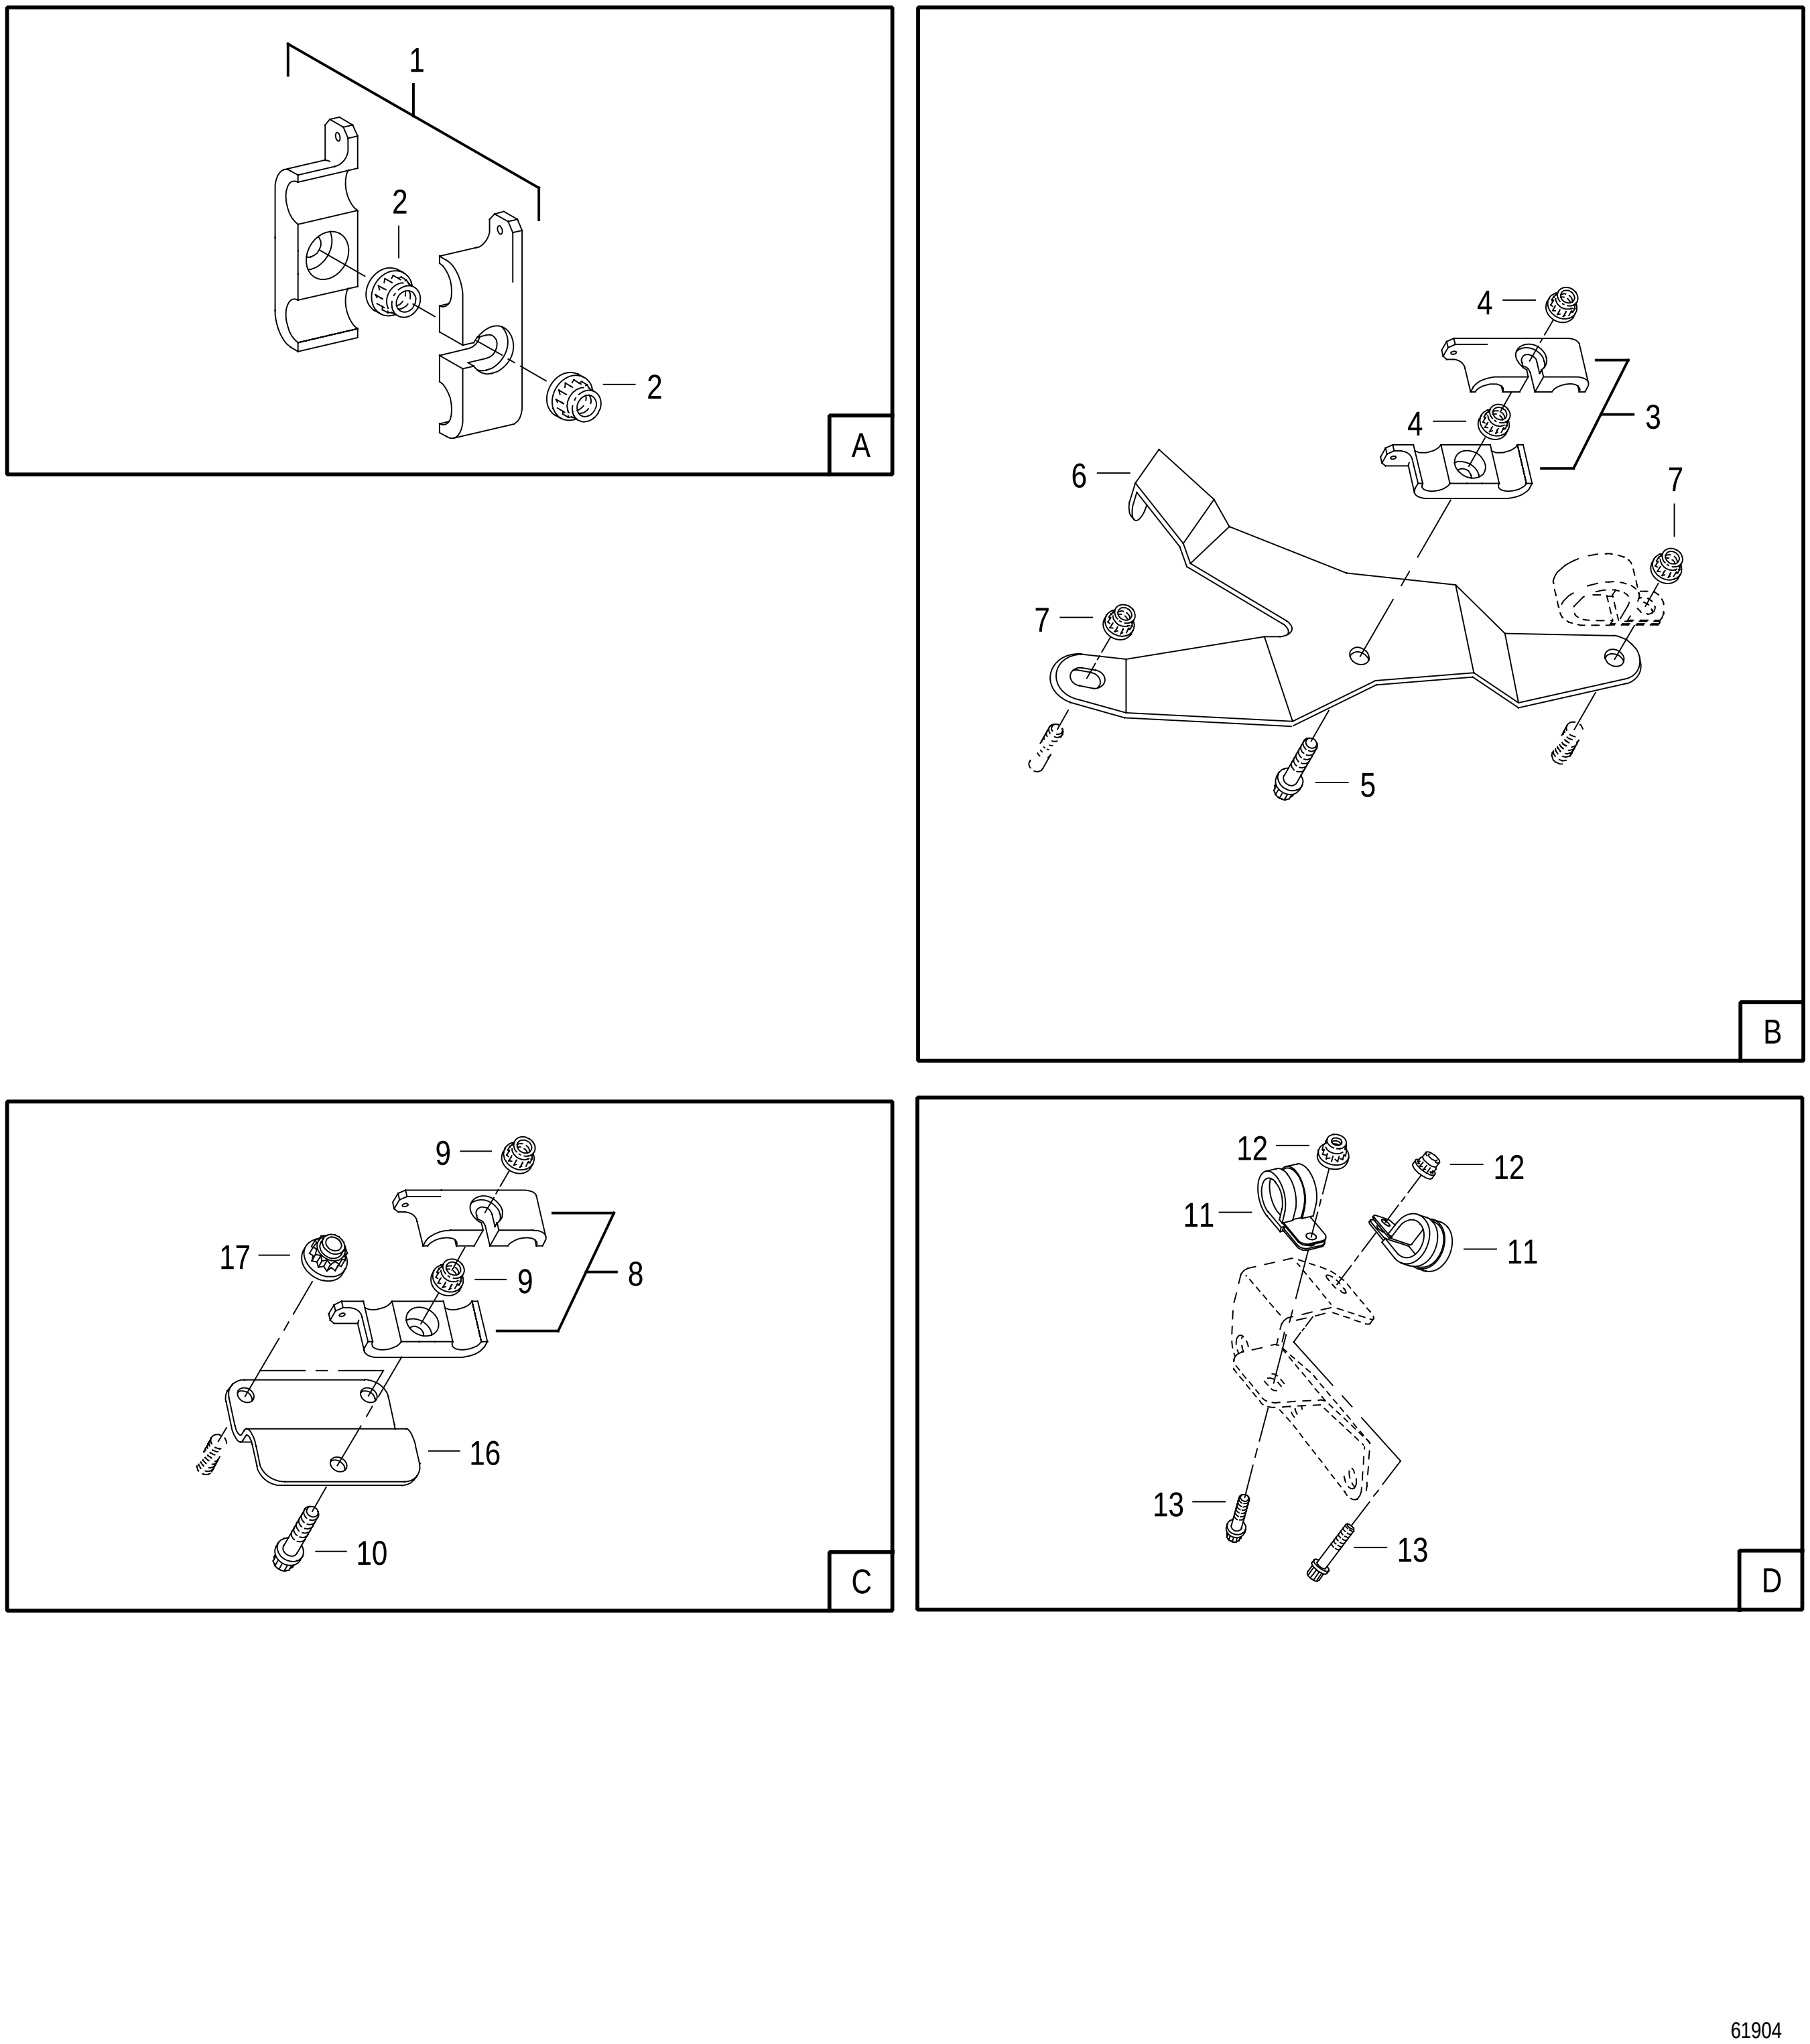


FIGURE 20. REAR COMPRESSOR CYLINDER EXTEND/RETRACT TUBING
(SHEET 2 OF 3)

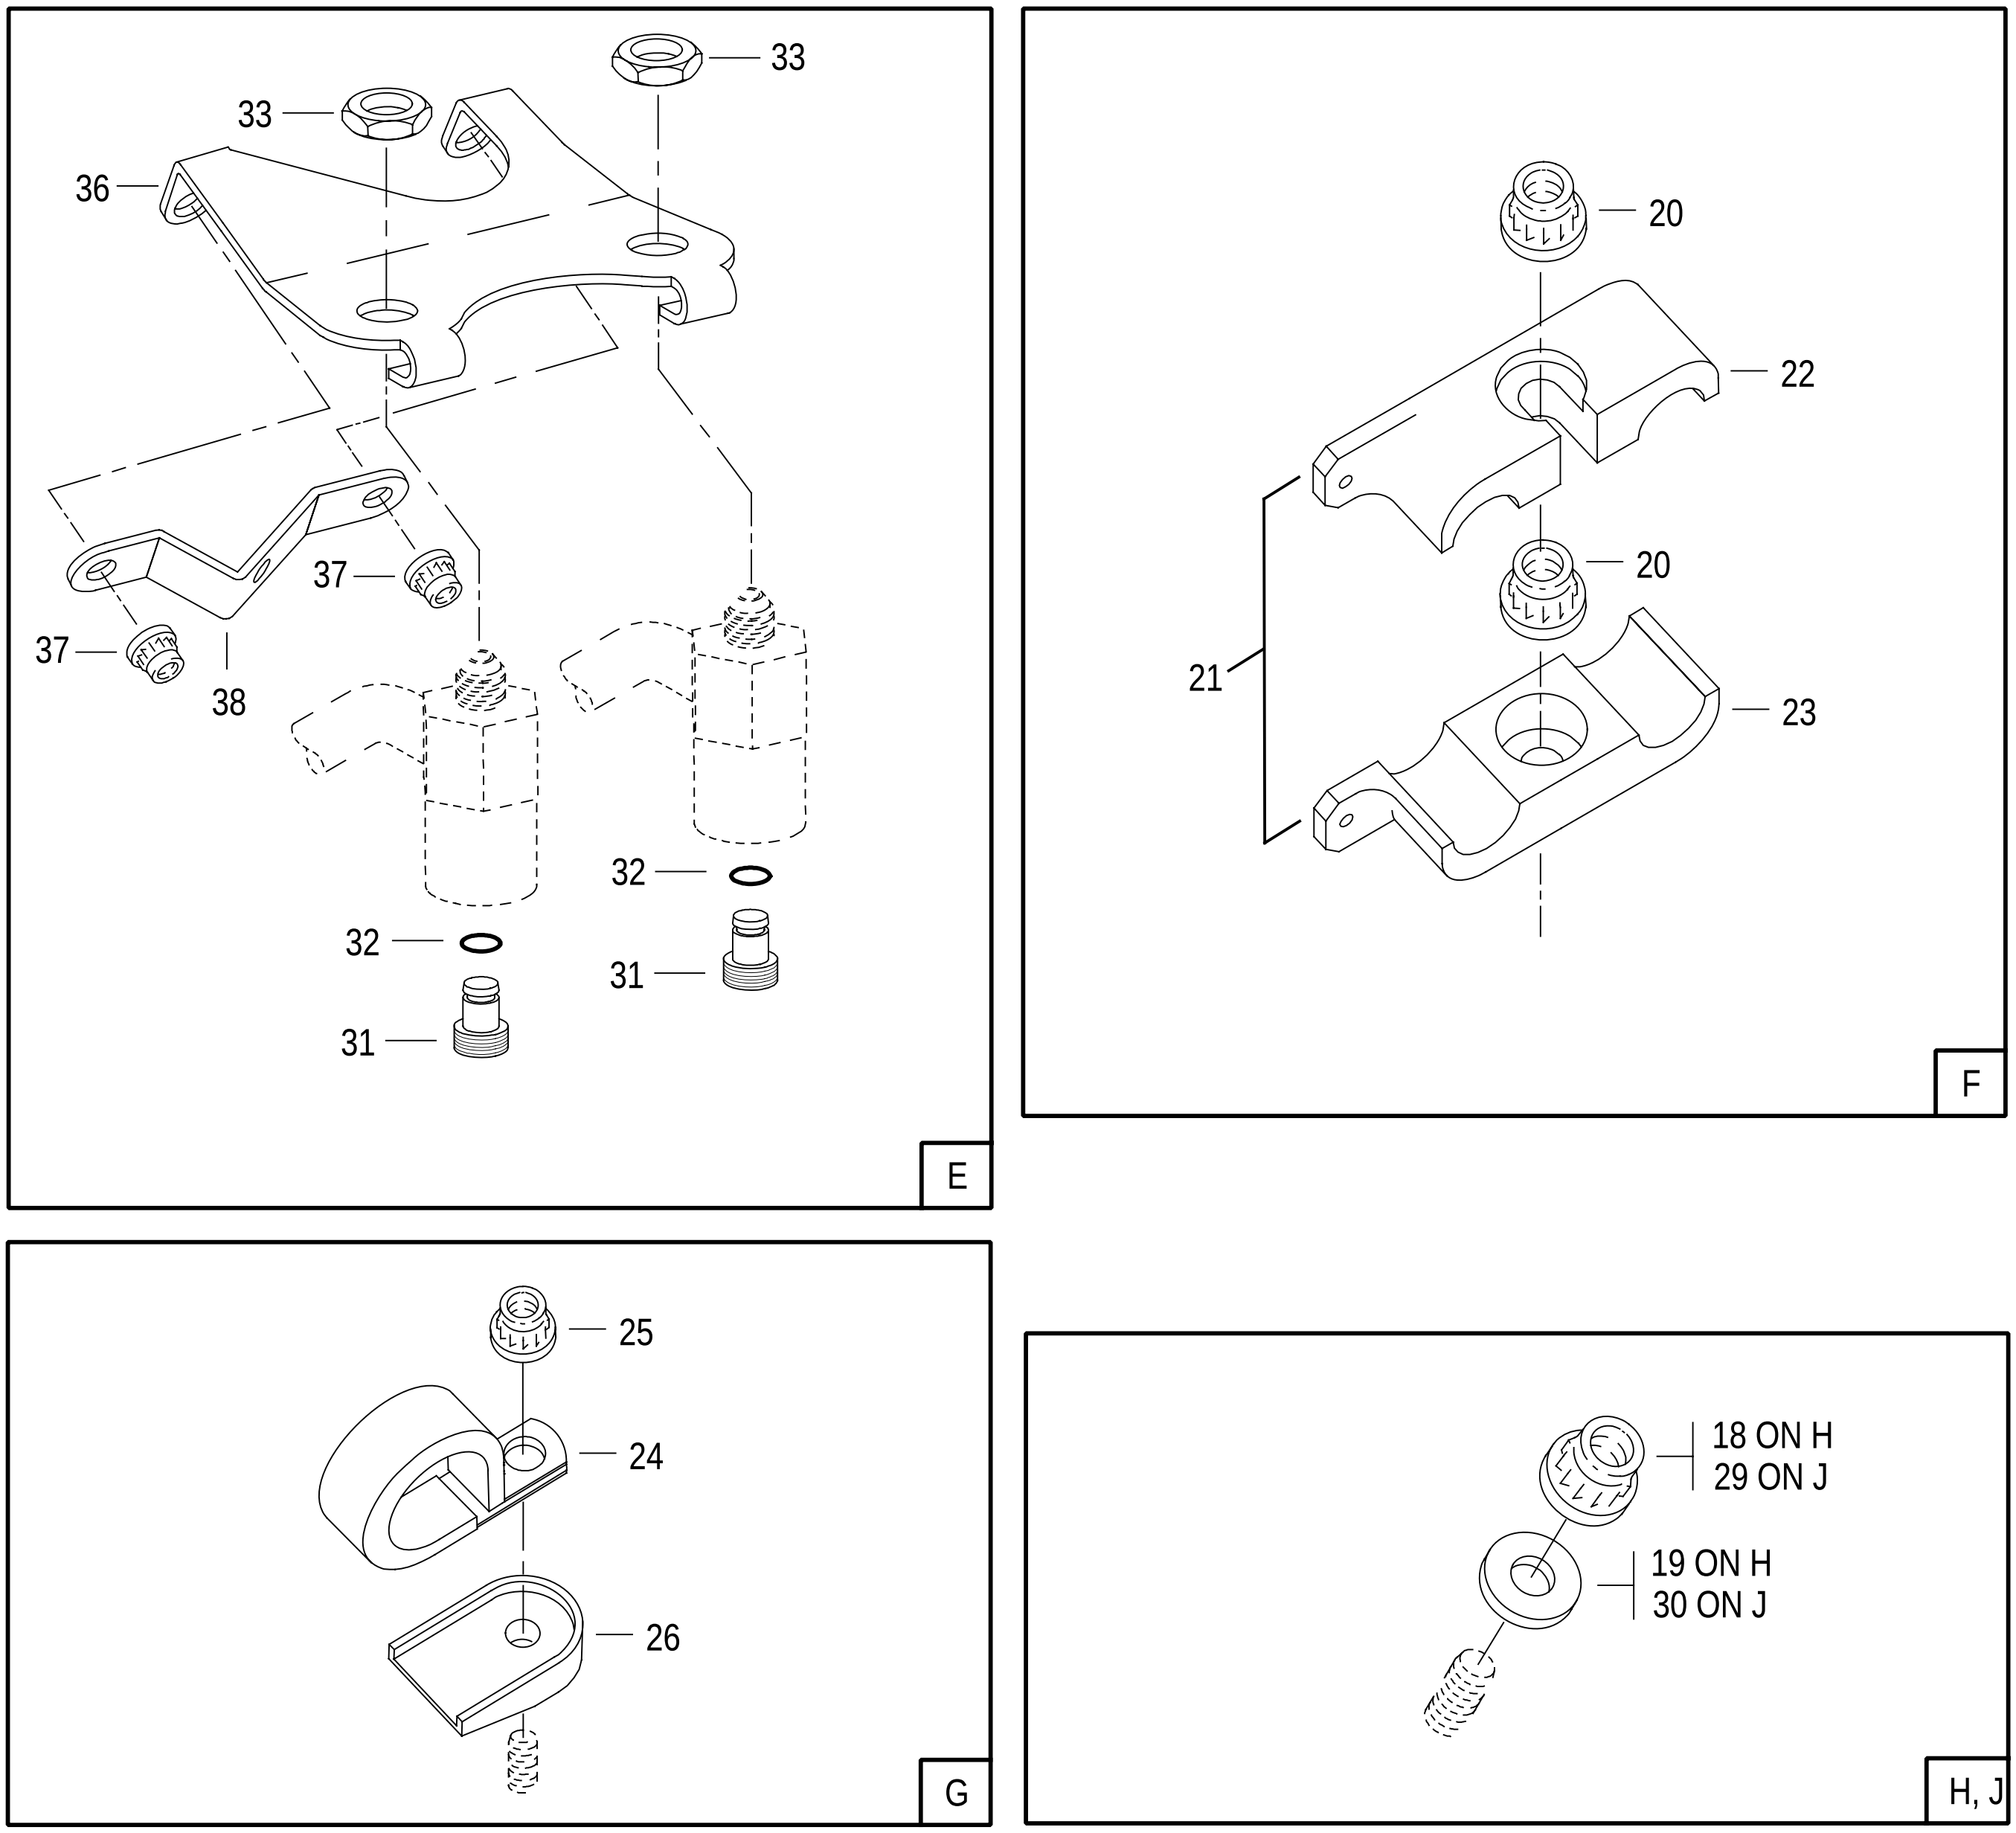


FIGURE 20. REAR COMPRESSOR CYLINDER EXTEND/RETRACT TUBING
(SHEET 3 OF 3)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
20	NO NUMBER		REAR COMPRESSOR CYLINDER EXTEND/RETRACT TUBING SEE FIG. 12-8 FOR NHA	REF		
- 1	4073097	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
- 2	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
- 3	4073097	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
- 4	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
- 5	4075410	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 1.230 IN. LONG (AP)	1		PAOZZ
- 6	4080927-01	52661	. BRACKET-LOOP CLAMP, ASSY OF	1		PAFZZ
- 7	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
- 8	4073097	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
- 9	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
- 10	4075410	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 1.230 IN. LONG (AP)	1		PAOZZ
- 11	ST1540-06	52661	. CLAMP-LOOP, CUSHION	2		PAOZZ
- 12	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
- 13	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 14	4080926-01	52661	. TUBE-COMPRESSOR CYLINDER, EXTEND, ASSY OF	1		PAOFF
- 15	4080925-01	52661	. TUBE-COMPRESSOR CYLINDER, RETRACT, ASSY OF	1		PAOFF
- 16	4080928	52661	. BRACKET-LOOP CLAMP	1		PAFZZ
- 17	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
- 18	4023115	52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
- 19	ST2108-04	52661	. SPACER-SLEEVE 0.203 ID X 0.406 OD X 0.125 IN. THK	1		PAOZZ
- 20	4023115	52661	. NUT OPTION SEE OPTION TABLE	10		PAOZZ
- 21	4073097	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	5		PAOBZ
- 22	4071581	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
- 23	4071582	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
- 24	ST1540-06	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 25	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
- 26	4079778	52661	. CHANNEL-LOOP CLAMP	1		PAOZZ
R - 27	= A7293-1	98441	. HOSE-NONMETALLIC 0.375 IN. TUBE X 0.4375-20 P&WA PART NO. 4081308-01	1		PAOZZ
R R R	= A9174-1	98441	. HOSE-NONMETALLIC 0.375 IN. TUBE X 0.4375-20 P&WA PART NO. 4085039	1		PAOZZ
R - 28	= A7294-1	98441	. HOSE-NONMETALLIC 0.375 IN. TUBE X 0.4375-20 P&WA PART NO. 4081309-01	1		PAOZZ
R R R	= A9175-1	98441	. HOSE-NONMETALLIC 0.375 IN. TUBE X 0.4375-20 P&WA PART NO. 4085043	1		PAOZZ
- 29	4023115	52661	. NUT OPTION SEE OPTION TABLE	2		PAOZZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	20 - 30		ST2108-04	52661	. SPACER-SLEEVE	2		PAOZZ
					0.203 ID X 0.406 OD X 0.125 IN. THK			
	- 31		4059017	52661	. PLUG-INSTRUMENTATION BOSS	2		PAOZZ
					WHEN EXH USE 4082595			
			4082595	52661	. PLUG-INSTRUMENTATION BOSS	2		PAOZZ
	- 32		MS9966-04	96906	. PACKING	2		PAOZZ
	- 33		MS9201-06	96906	. NUT	2		PAFZZ
R	- 34	=	4072104	52661	. HOSE OPTION	1		PAOZZ
					SEE OPTION TABLE			
R		=	A9155-1	98441	. HOSE-NONMETALLIC	1		PAOZZ
R					0.313 IN.			
R					P&WA PART NO. 4085042			
R	- 35	=	4072105	52661	. HOSE OPTION	1		PAOZZ
					SEE OPTION TABLE			
R		=	A9158-1	98441	. HOSE-NONMETALLIC	1		PAOZZ
R					0.313 IN.			
R					P&WA PART NO. 4085038			
	- 36		4071592	52661	. BRACKET-VANE, CALIBRATION TEES	1		PAOZZ
	- 37		4023116	52661	. NUT OPTION (AP)	2		PAOZZ
					SEE OPTION TABLE			
	- 38		4081296	52661	. BRACKET-LOOP CLAMP	1		PAOZZ

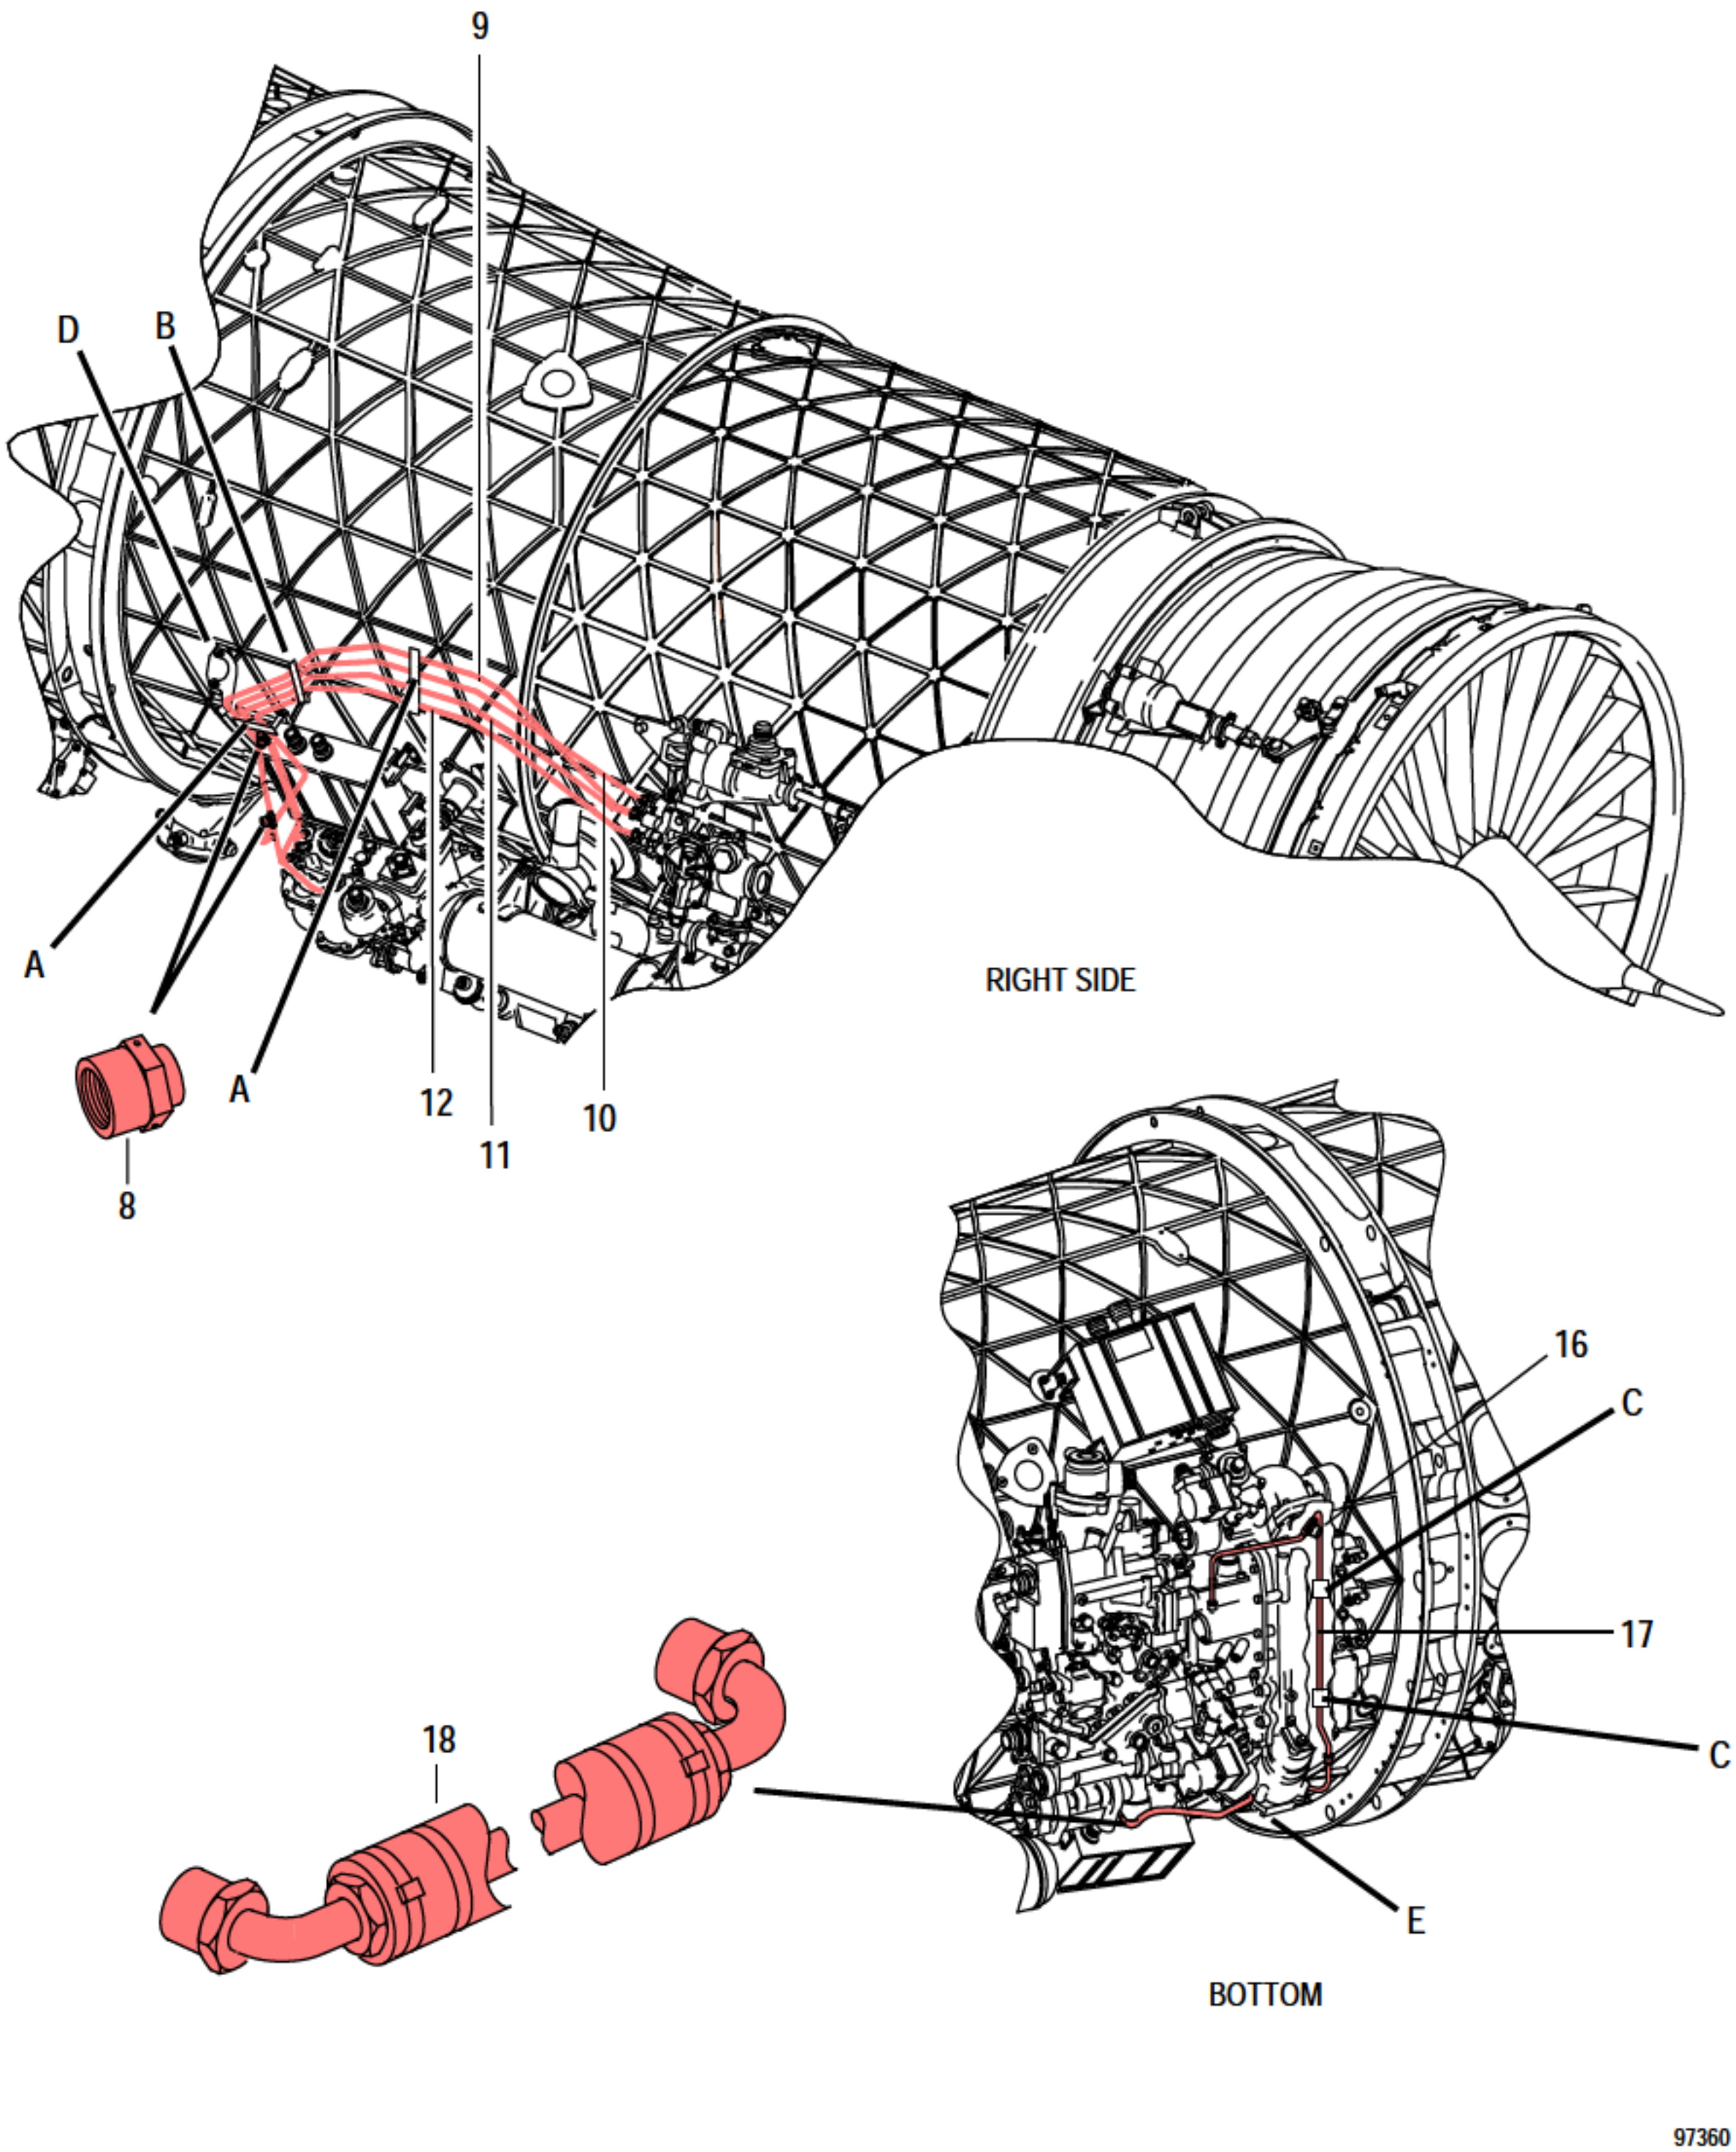


FIGURE 21. AUGMENTOR FUEL PUMP CONTROLLER FUEL TUBING
(SHEET 1 OF 2)

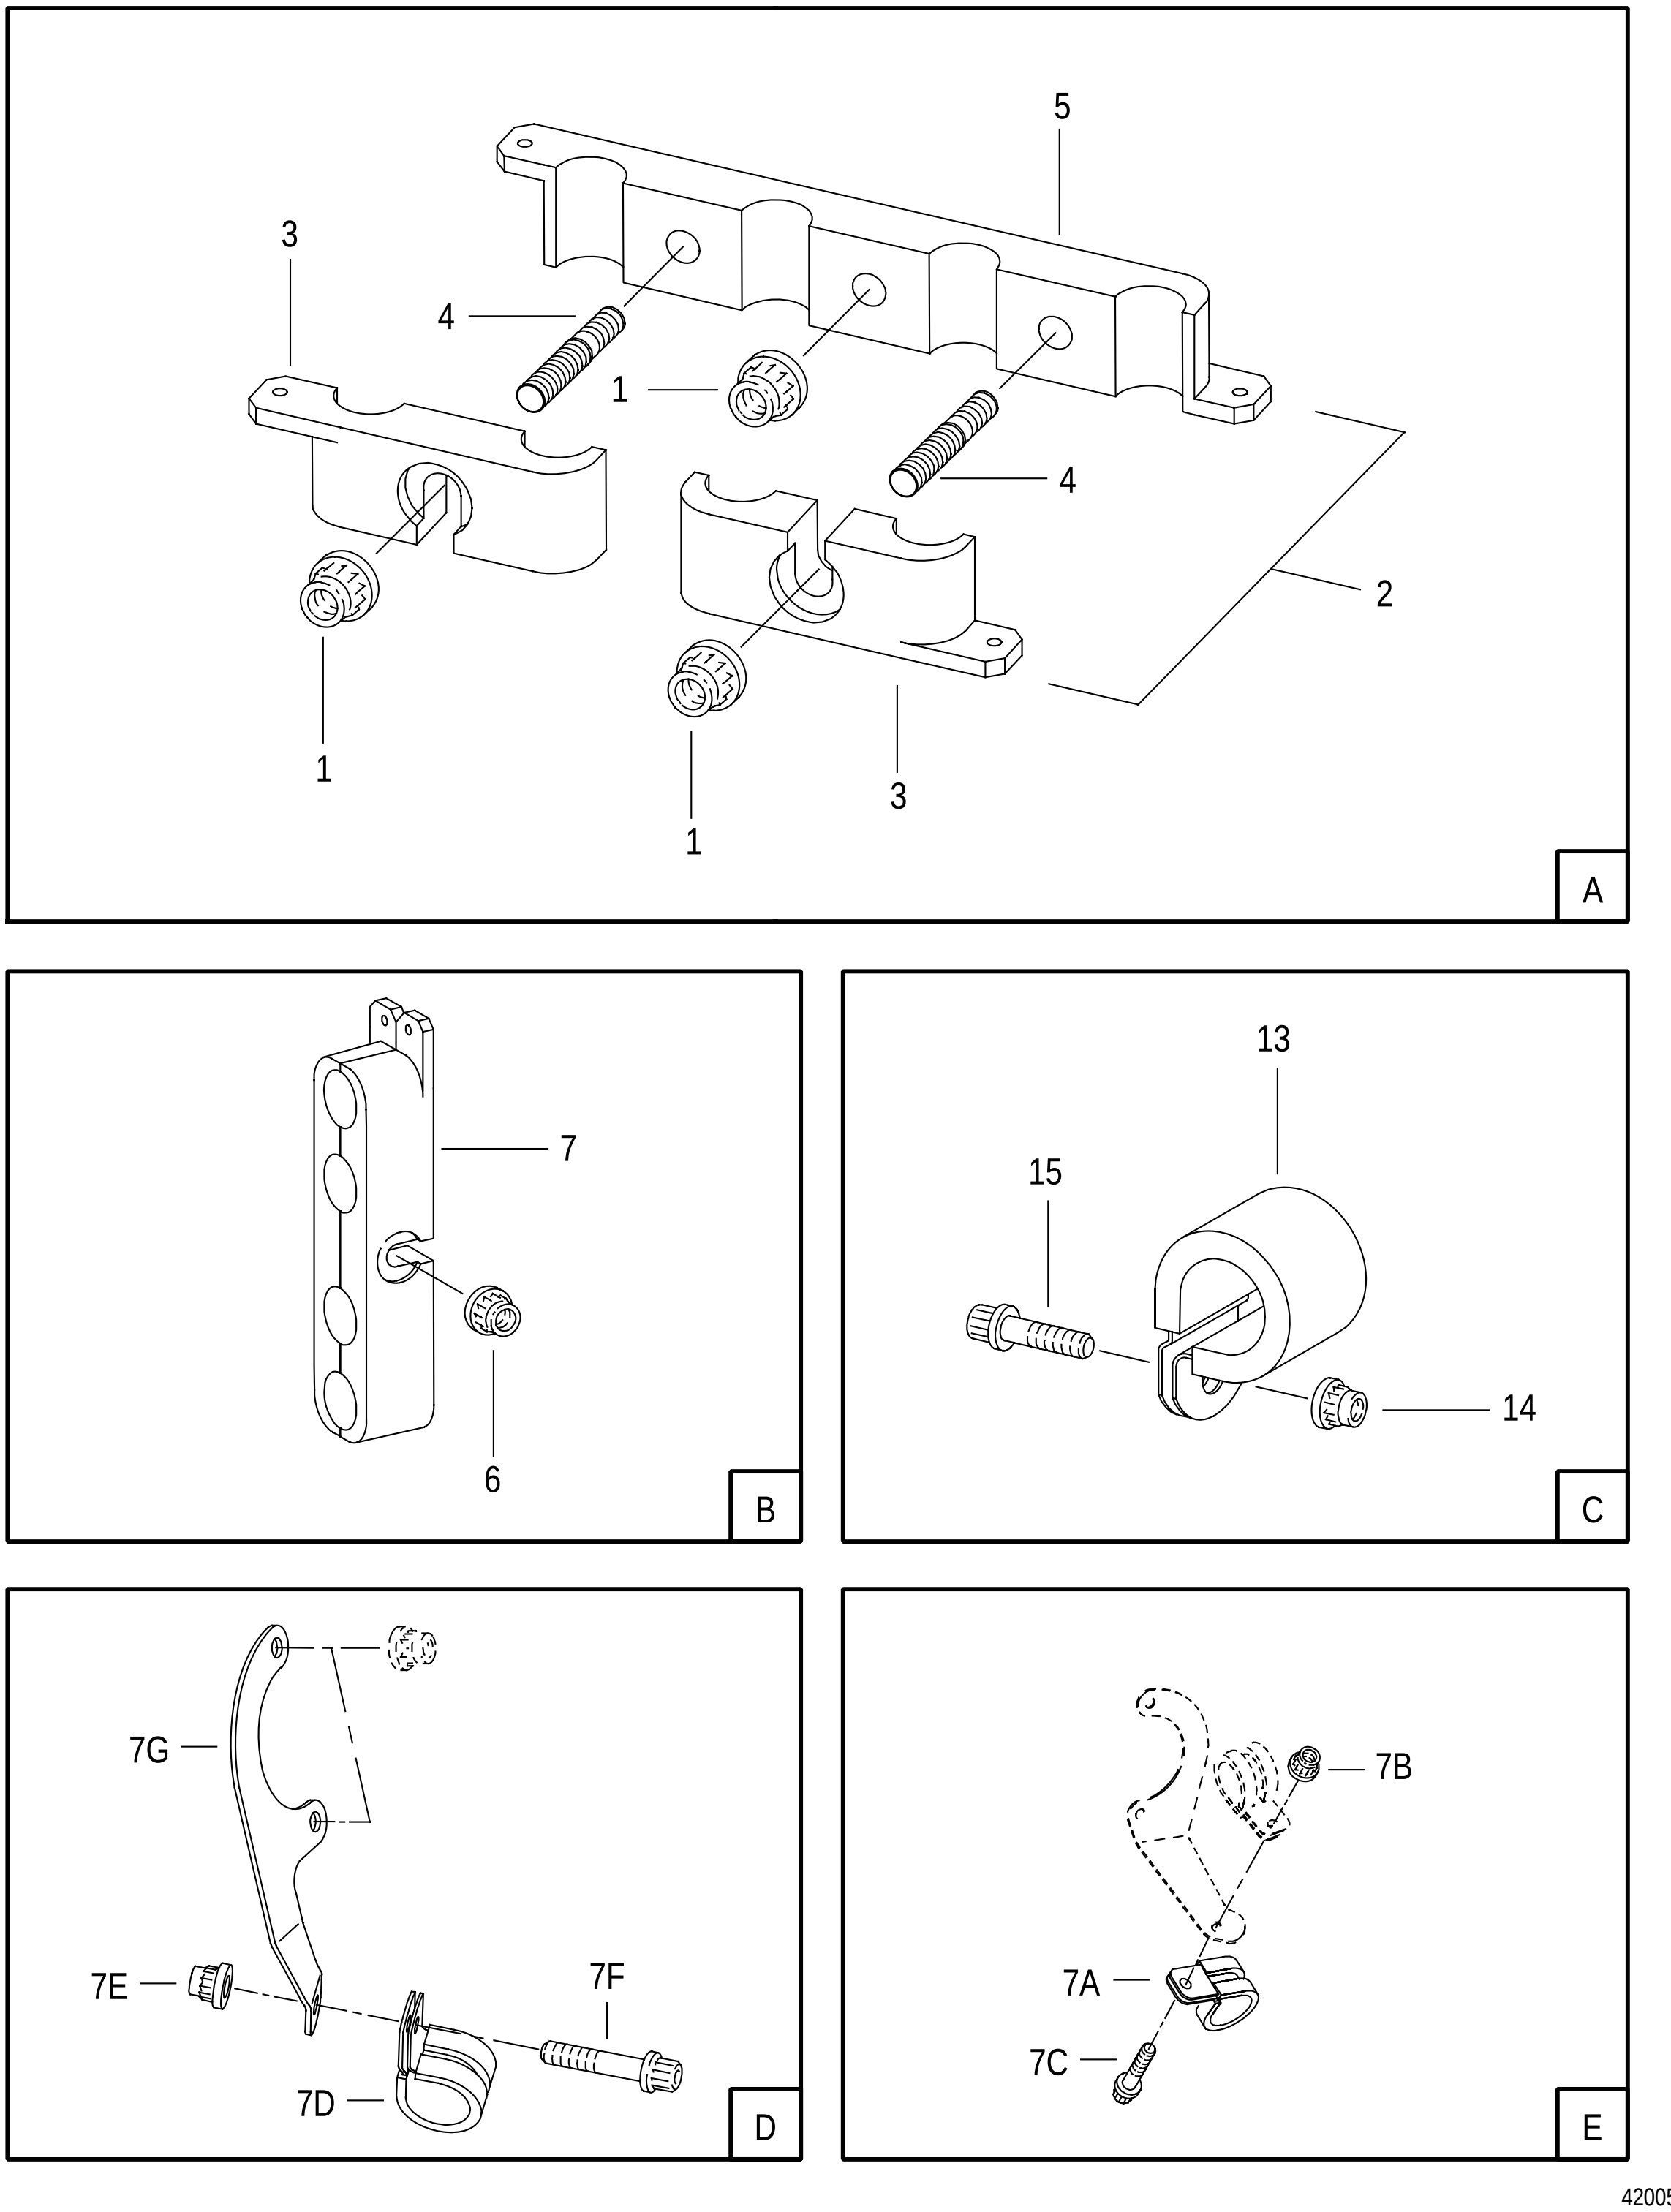


FIGURE 21. AUGMENTOR FUEL PUMP CONTROLLER FUEL TUBING
(SHEET 2 OF 2)

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	21		NO NUMBER		AUGMENTOR FUEL PUMP CONTROLLER FUEL TUBING SEE FIG. 12-9 FOR NHA	REF		
	- 1		4023115	52661	. NUT OPTION SEE OPTION TABLE	6		PAOZZ
	- 2		4076754	52661	. CLAMP-BLOCK, GROMMET, ASSY OF WHEN EXH USE 4078519	2		PAOBZ
			4078519	52661	. CLAMP-BLOCK, GROMMET, ASSY OF PARTIAL BREAKDOWN FOLLOWS	2		PAOBZ
	- 3		4071559	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	2		XA
	- 4		TR28009-10	29372	.. STUD-LOCKED IN 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10	2		PAFZZ
	- 5		4076762	52661	.. CLAMP HALF-BLOCK, GROMMET, 4 HOLE	1		XA
	- 6		4023115	52661	. NUT OPTION SEE OPTION TABLE	2		PAOZZ
	- 7		4075396	52661	. CLAMP-BLOCK, GROMMET, ASSY OF WHEN EXH USE 4078517	1		PAOBZ
			4078517	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
	- 7A		ST1540-04	52661	. CLAMP-LOOP, CUSHION	1	T	PAOZZ
	- 7B		4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1	T	PAOZZ
	- 7C		ST2015-018	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.562 IN. LONG (AP)	1	T	PAFZZ
	- 7D		ST1540-04	52661	. CLAMP-LOOP, CUSHION	1	T	PAOZZ
	- 7E		4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1	T	PAOZZ
	- 7F		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	T	PAOZZ
	- 7G		4081373	52661	. BRACKET-LOOP CLAMP	1	T	PAFZZ
	- 8		MS9314-04	96906	. CAP ASSY	2		PAOZZ
	- 9		4074328-01	52661	. MANIFOLD-PF1AW, AUGMENTOR PUMP CONTROL MANAGEMENT, ASSY OF	1	S	PAOFF
			4081315-01	52661	. MANIFOLD-PF1AW, AUGMENTOR PUMP CONTROL MANAGEMENT, ASSY OF	1	T	PAOFF
	- 10		4074327-01	52661	. MANIFOLD-PFAP, AUGMENTOR PUMP CONTROL MANAGEMENT, ASSY OF	1	TN	PAOFF
			4084074-01	52661	. MANIFOLD-PFAP, AUGMENTOR PUMP CONTROL MANAGEMENT, ASSY OF	1	TP	PAOFF
	- 11		4075405-01	52661	. TUBE-FUEL SIGNAL, AUGMENTOR PUMP CONTROL MANAGEMENT, ASSY OF	1		PAOFF
	- 12		4075406-01	52661	. TUBE-FUEL SIGNAL, AUGMENTOR PUMP CONTROL MANAGEMENT, ASSY OF	1	RE	PAOFF
			4081456-01	52661	. TUBE-FUEL SIGNAL, AUGMENTOR PUMP CONTROL MANAGEMENT, ASSY OF	1	RF	PAOFF
	- 13		ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION WHEN EXH USE ST1540-04	2	RC	PAOZZ
			ST1540-04	52661	. CLAMP-LOOP, CUSHION	2	RC	PAOZZ
			ST1540-05	52661	. CLAMP-LOOP, CUSHION	2	RD	PAOZZ
	- 14		4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
	- 15		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
	- 16		MS9314-04	96906	. CAP ASSY	1		PAOZZ
	- 17		4074326-01	52661	. MANIFOLD-PF3AR, AUGMENTOR PUMP CONTROL MANAGEMENT, ASSY OF	1	RC	PAOFF
			4081455-01	52661	. MANIFOLD-PF3AR, AUGMENTOR PUMP CONTROL MANAGEMENT, ASSY OF	1	RD	PAOFF
R	- 18	=	4072113	52661	. HOSE OPTION SEE OPTION TABLE	1		PAOZZ
R R R		=	A9163-1	98441	. HOSE-NONMETALLIC 0.313 IN. P&WA PART NO. 4085046	1		PAOZZ

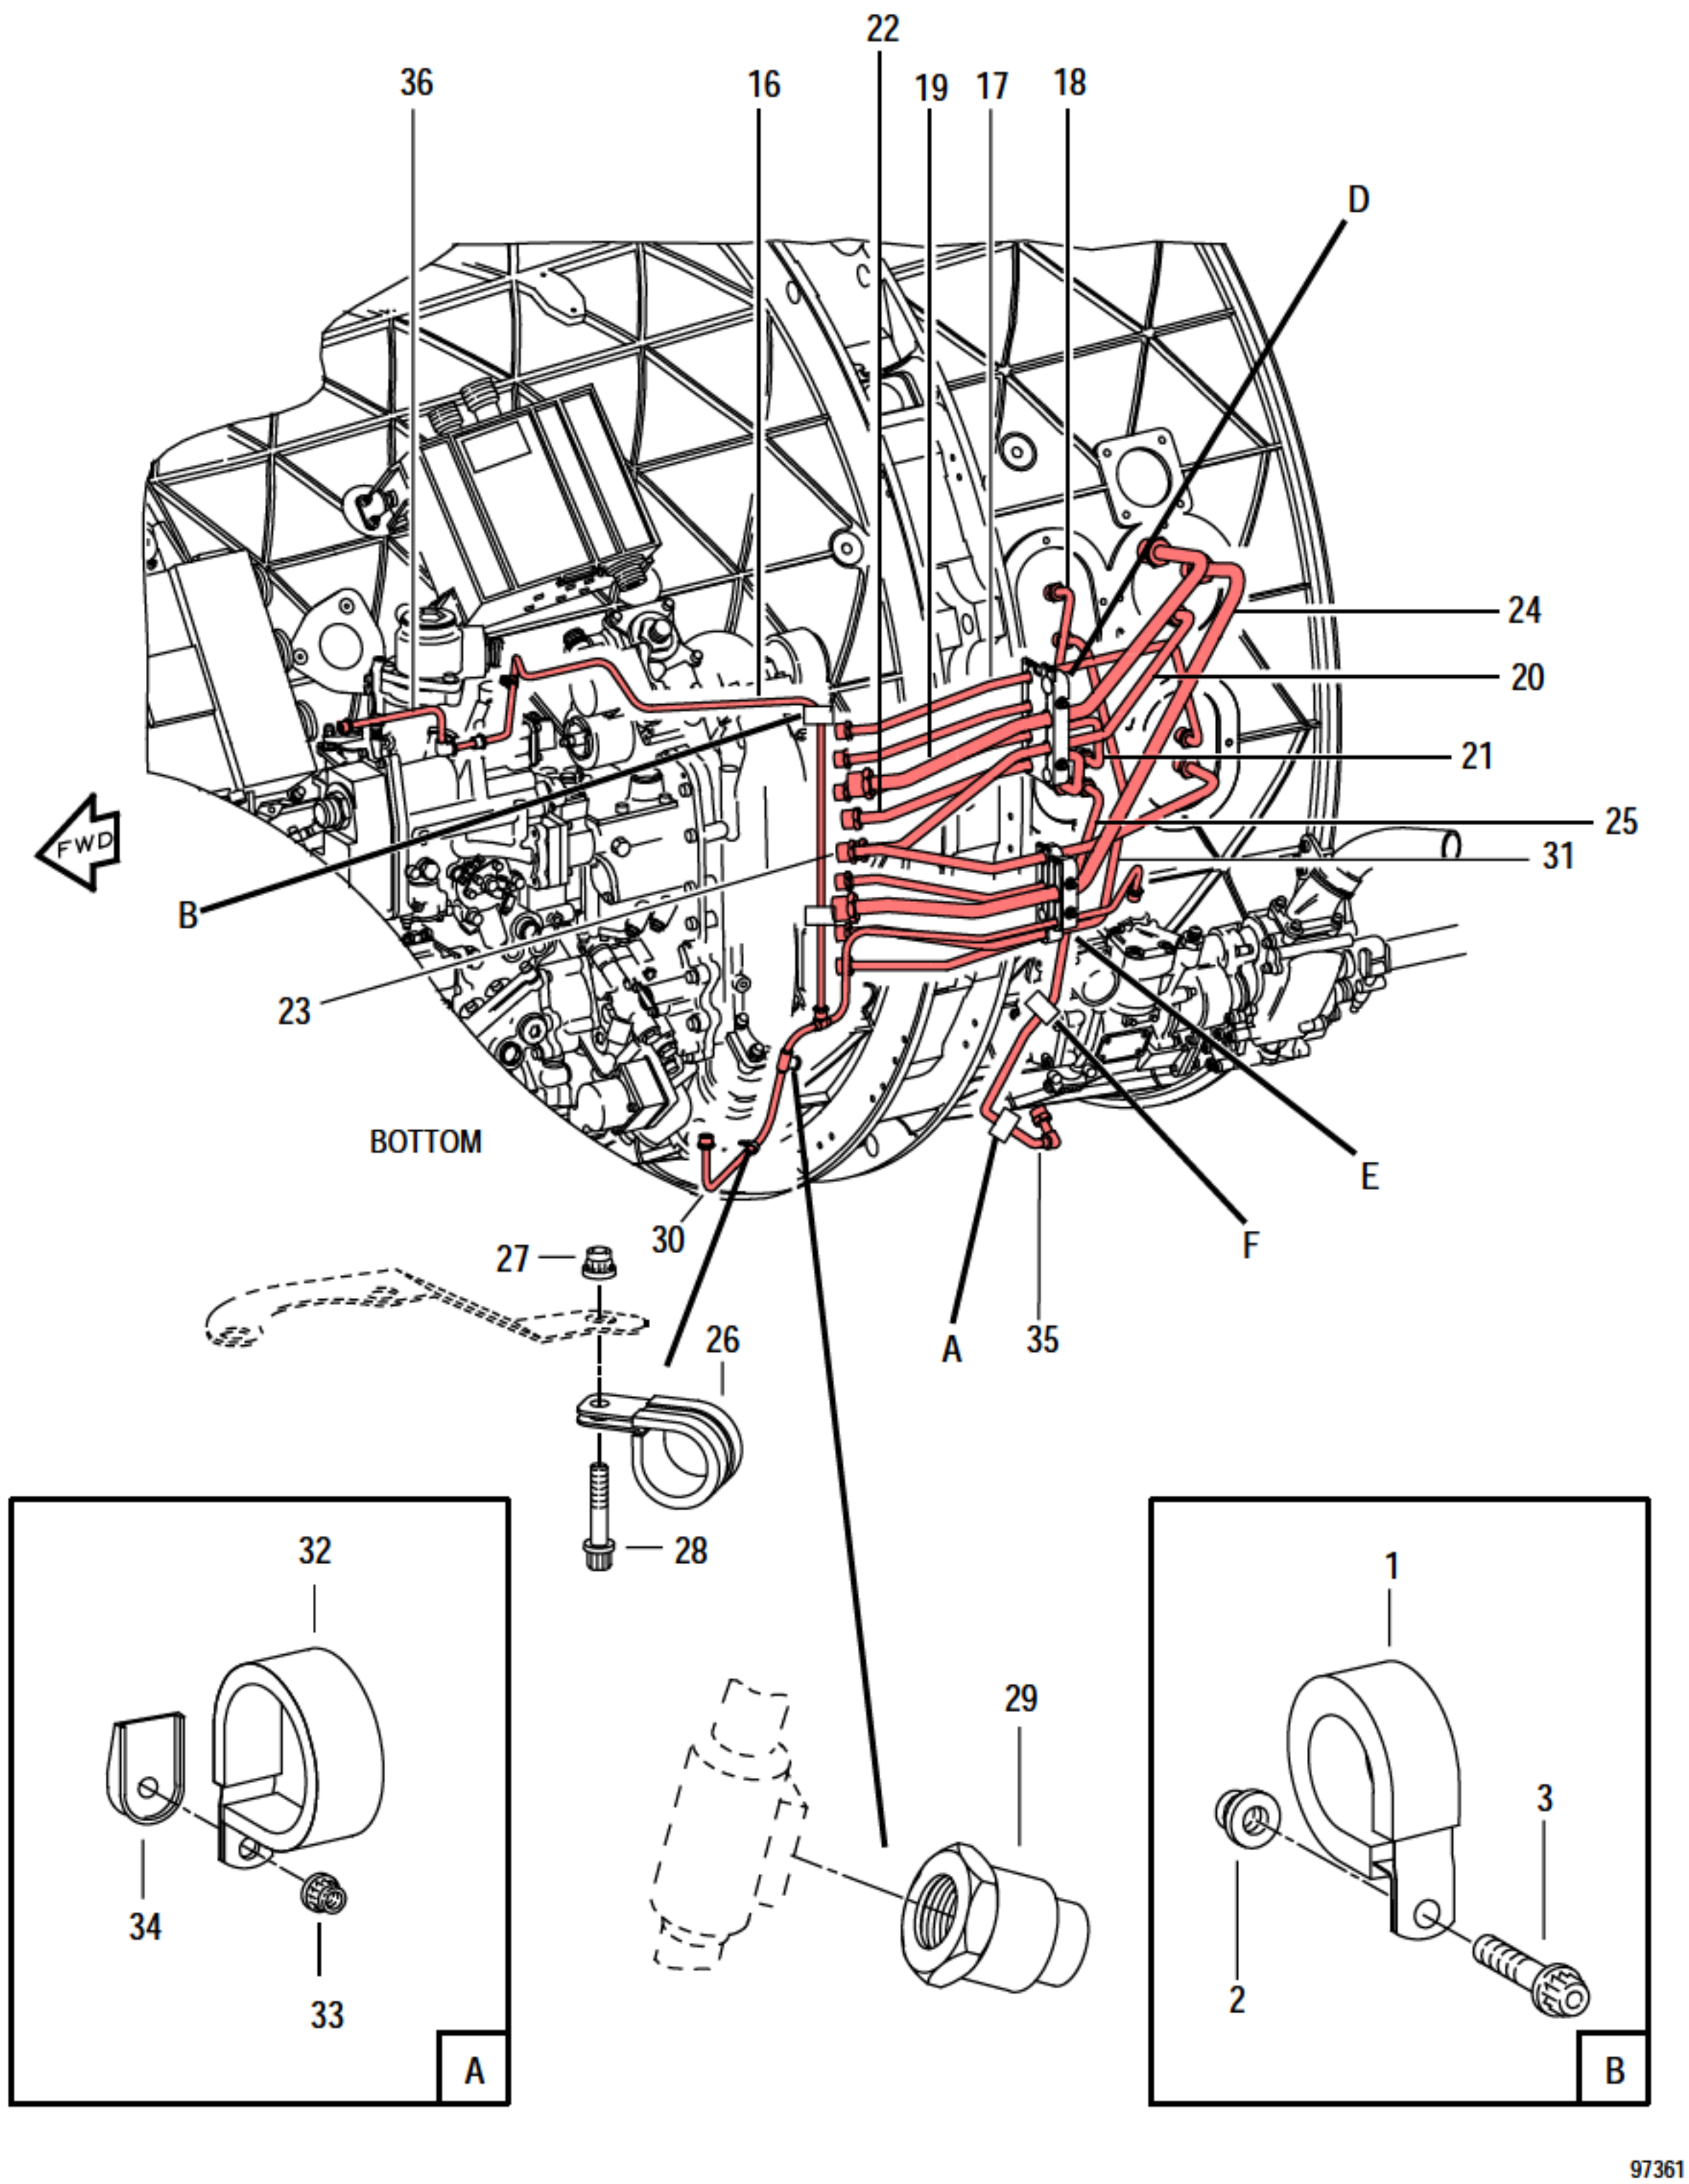


FIGURE 22. AUGMENTOR FUEL CONTROL TUBING
(SHEET 1 OF 2)

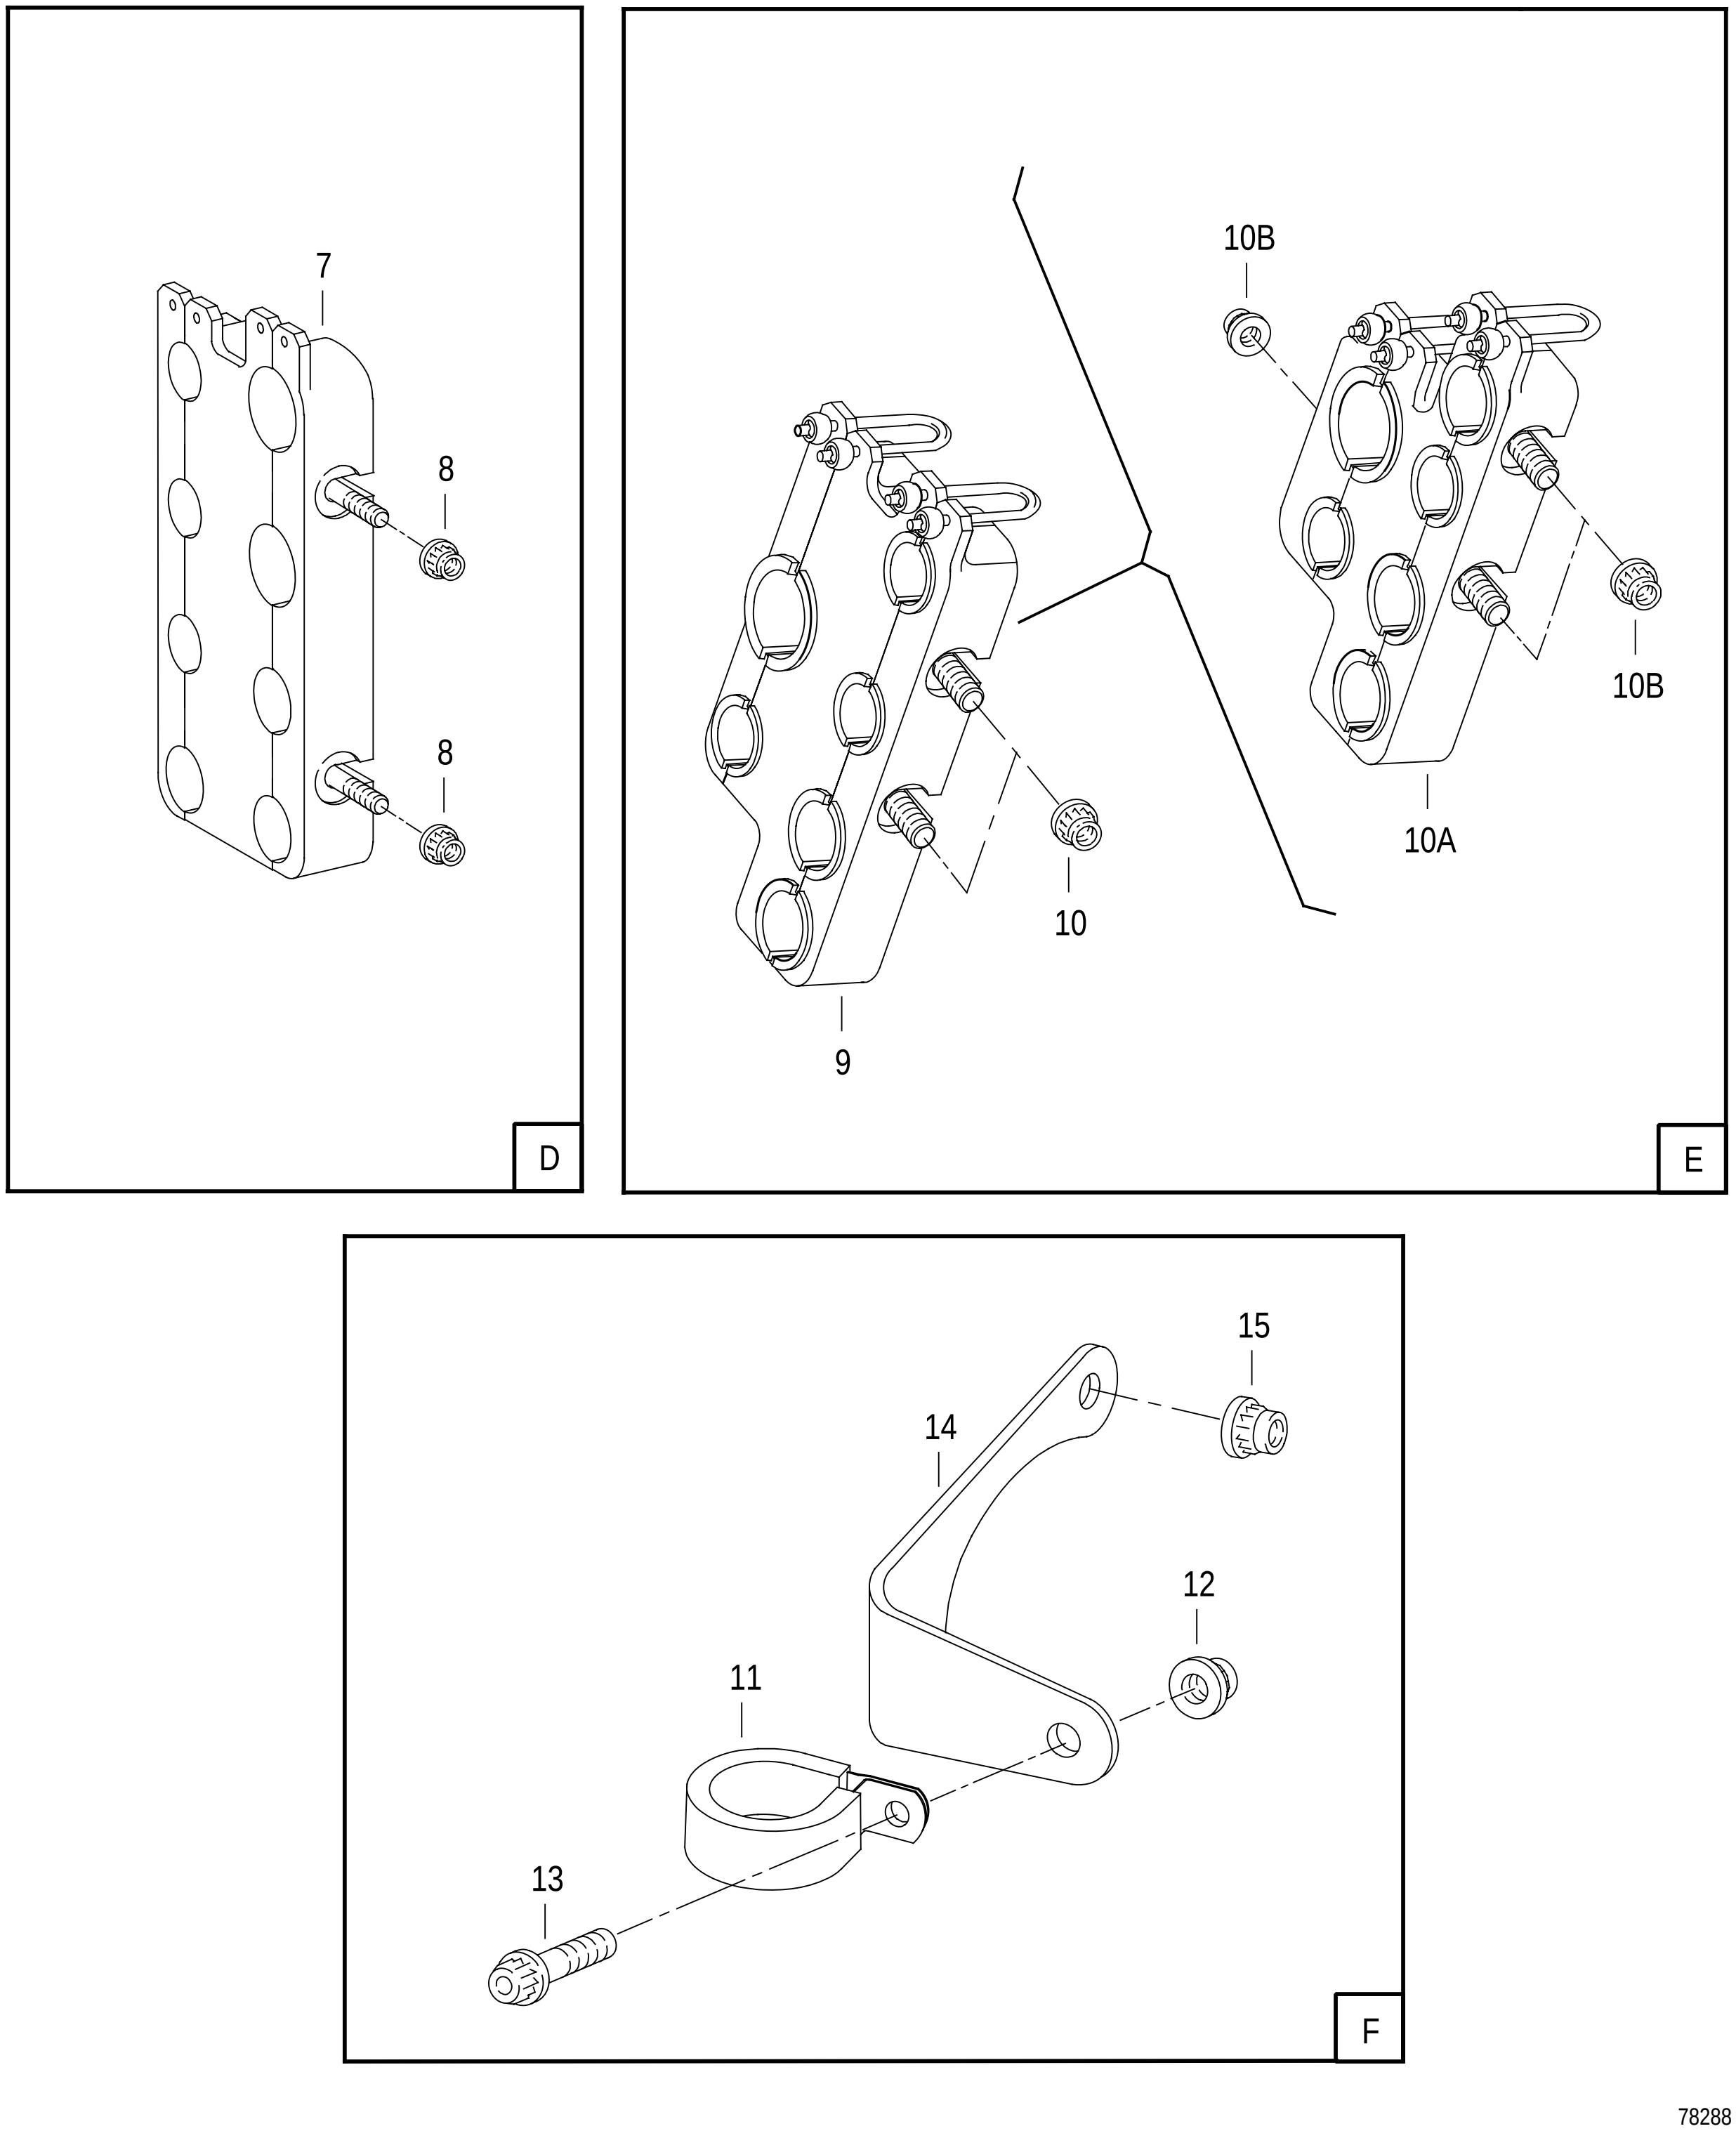


FIGURE 22. AUGMENTOR FUEL CONTROL TUBING
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
22	NO NUMBER		AUGMENTOR FUEL CONTROL TUBING .... SEE FIG. 12-10 FOR NHA	REF		
- 1	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-04	1		PAOZZ
	ST1540-04	52661	. CLAMP-LOOP, CUSHION..........................	1		PAOZZ
- 2	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 3	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 4	DELETED					
- 5	DELETED					
- 6	DELETED					
- 7	4076761	52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... WHEN EXH USE 4077680 OR 4083660	1		PAOBZ
	= 4077680	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
	= 4083660	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
- 8	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	4		PAOZZ
- 9	4076760	52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... WHEN EXH USE 4077973	1	AJ	PAOBZ
	4077973	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1	AJ	PAOBZ
- 10	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	4	AJ	PAOZZ
- 10A	4081468	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1	AK	PAOBZ
- 10B	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	3	AK	PAOZZ
- 11	ST2439-05	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-05	1		PAOZZ
	ST1540-05	52661	. CLAMP-LOOP, CUSHION..........................	1		PAOZZ
- 12	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 13	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	1		PAOZZ
- 14	4074058	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 15	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
- 16	4081328-01	52661	. MANIFOLD-PFMO, MAIN FUEL CONTROL, ASSY ... OF	1		PAOFF
- 17	4077965-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF .... REPLACES 4071679-01	1		PAOFF
- 18	4079160-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF .... REPLACES 4071680-01	1		PAOFF
- 19	4079161-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF .... REPLACES 4071681-01	1		PAOFF
- 20	4079164-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF .... REPLACES 4071684-01	1		PAOFF
- 21	4079162-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF .... REPLACES 4071682-01	1		PAOFF
- 22	4079163-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF .... REPLACES 4071683-01	1		PAOFF
- 23	4079165-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF .... REPLACES 4071685-01	1		PAOFF
- 24	4079167-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF .... REPLACES 4075214-01	1		PAOFF

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	22 - 25		4079166-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF . . . . REPLACES 4071686-01	1		PAOFF
	- 26		ST1540-04	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	- 27		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 28		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
	- 29		MS9314-04	96906	. CAP ASSY	1		PAOZZ
	- 30		4081096-01	52661	. MANIFOLD-PFMO, MAIN FUEL CONTROL, ASSY . . . OF	1		PAOFF
	- 31		4079168-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF . . . . REPLACES 4071714-01	1	AJ	PAOFF
			4081465-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF	1	AK	PAOFF
	- 32		ST2439-05	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-05	1	FG	PAOZZ
			ST1540-05	52661	. CLAMP-LOOP, CUSHION	1	FH	PAOZZ
	- 33		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 34		4077582	52661	. SPACER-CLAMP . . . . WHEN EXH USE 4079778	1	FG	PAOZZ
			4079778	52661	. CHANNEL-LOOP CLAMP . . . . MAY BE USED WITH ST2439-05	1	FH	PAOZZ
	- 35		4079169-01	52661	. TUBE-FUEL, AUGMENTOR, ASSY OF . . . . REPLACES 4074057-01	1		PAOFF
R	- 36	=	A7221-1	98441	. HOSE-NONMETALLIC . . . . 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4081090-01	1		PAOFF
R R R		=	A9168-1	98441	. HOSE-NONMETALLIC . . . . 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4085054	1		PAOFF

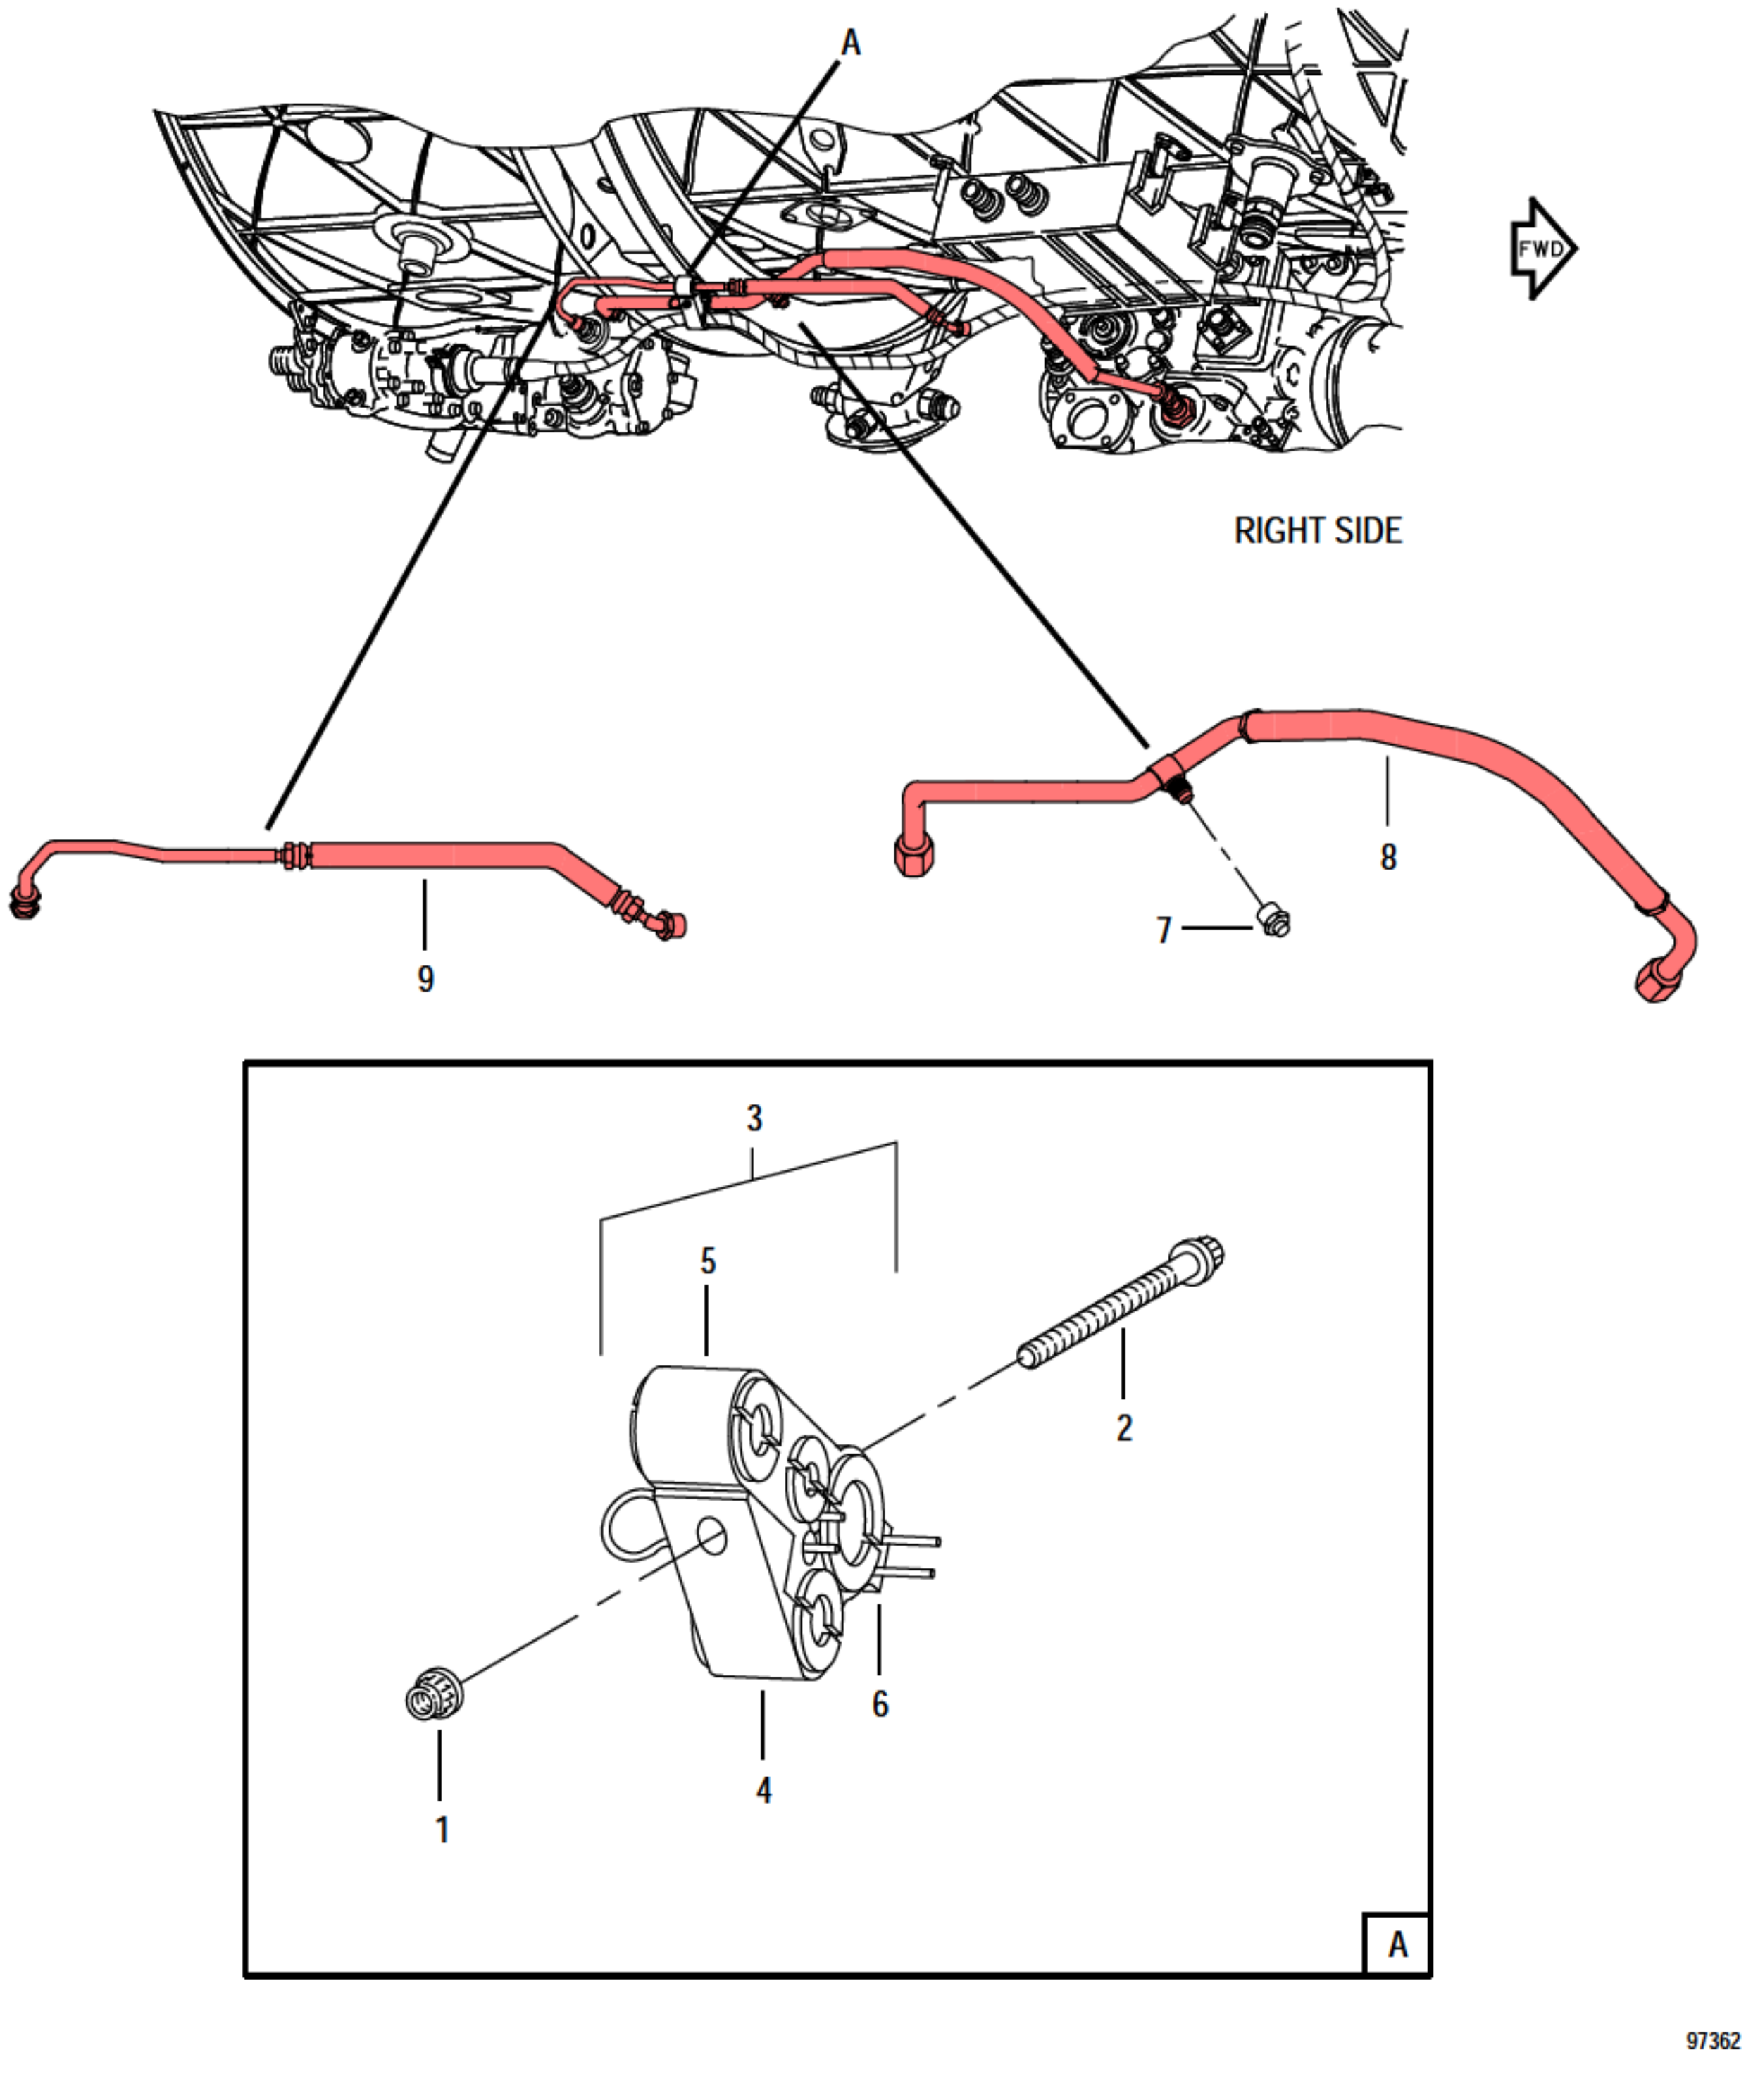


FIGURE 23. CONVERGENT EXHAUST NOZZLE CONTROL TUBING

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	23		NO NUMBER		CONVERGENT EXHAUST NOZZLE CONTROL . . . . TUBING SEE FIG. 12-11 FOR NHA	REF		
	- 1		4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	1		PAOZZ
	- 2		4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG	1		PAOZZ
	- 3		4074134	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078515	1		PAOBZ
			4078515	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
	- 4		4074131	52661	.. CLAMP SEGMENT-BLOCK, GROMMET, 1 HOLE . . .	1		XA
	- 5		4074132	52661	.. CLAMP SEGMENT-BLOCK, GROMMET, 4 HOLE . . .	1		XA
	- 6		4074133	52661	.. CLAMP SEGMENT-BLOCK, GROMMET, 3 HOLE . . .	1		XA
	- 7		MS9314-04	96906	. CAP ASSY	1		PAOZZ
R	- 8	=	4075458	52661	. HOSE OPTION . . . . SEE OPTION TABLE	1		PAOZZ
R R R		=	A9165-1	98441	. HOSE-NONMETALLIC . . . . 0.313 IN. P&WA PART NO. 4085045	1		PAOZZ
R	- 9	=	4072109	52661	. HOSE OPTION . . . . SEE OPTION TABLE	1		PAOZZ
R R R		=	A9160-1	98441	. HOSE-NONMETALLIC . . . . 0.188 IN. P&WA PART NO. 4085051	1		PAOZZ


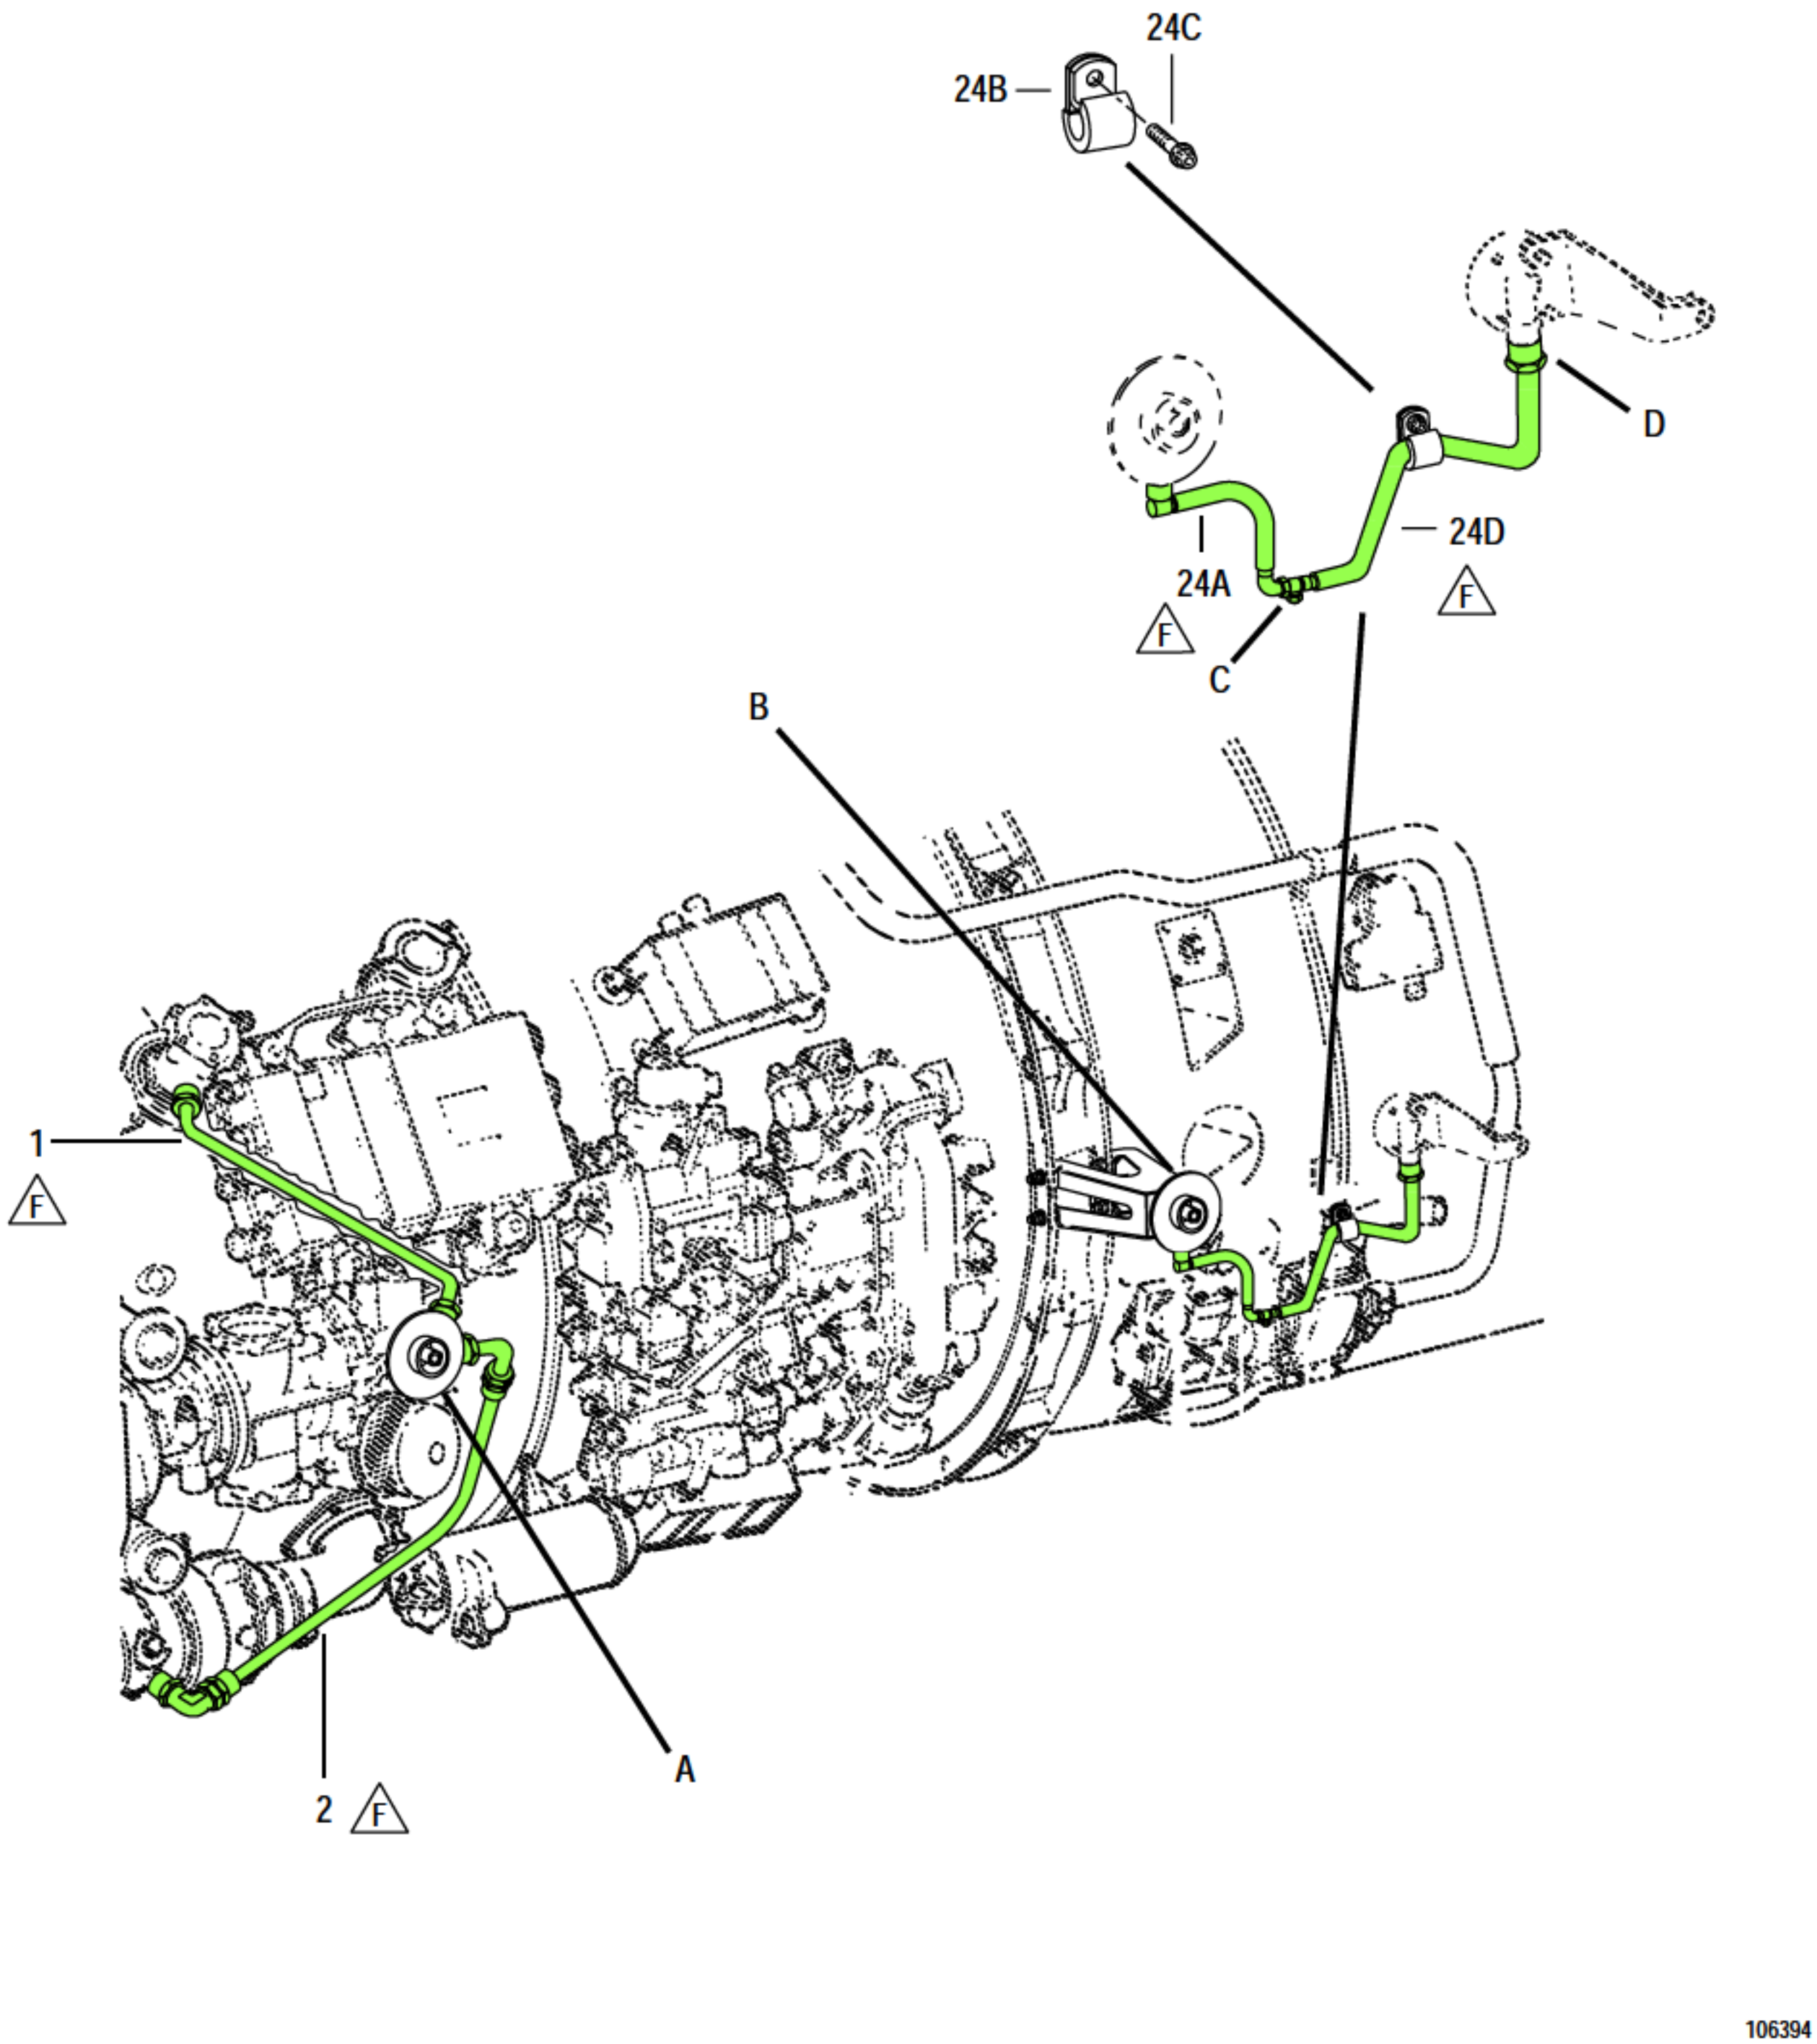


FIGURE 24. FRONT AND REAR FUEL DRAINS AND TUBING
(SHEET 1 OF 2)

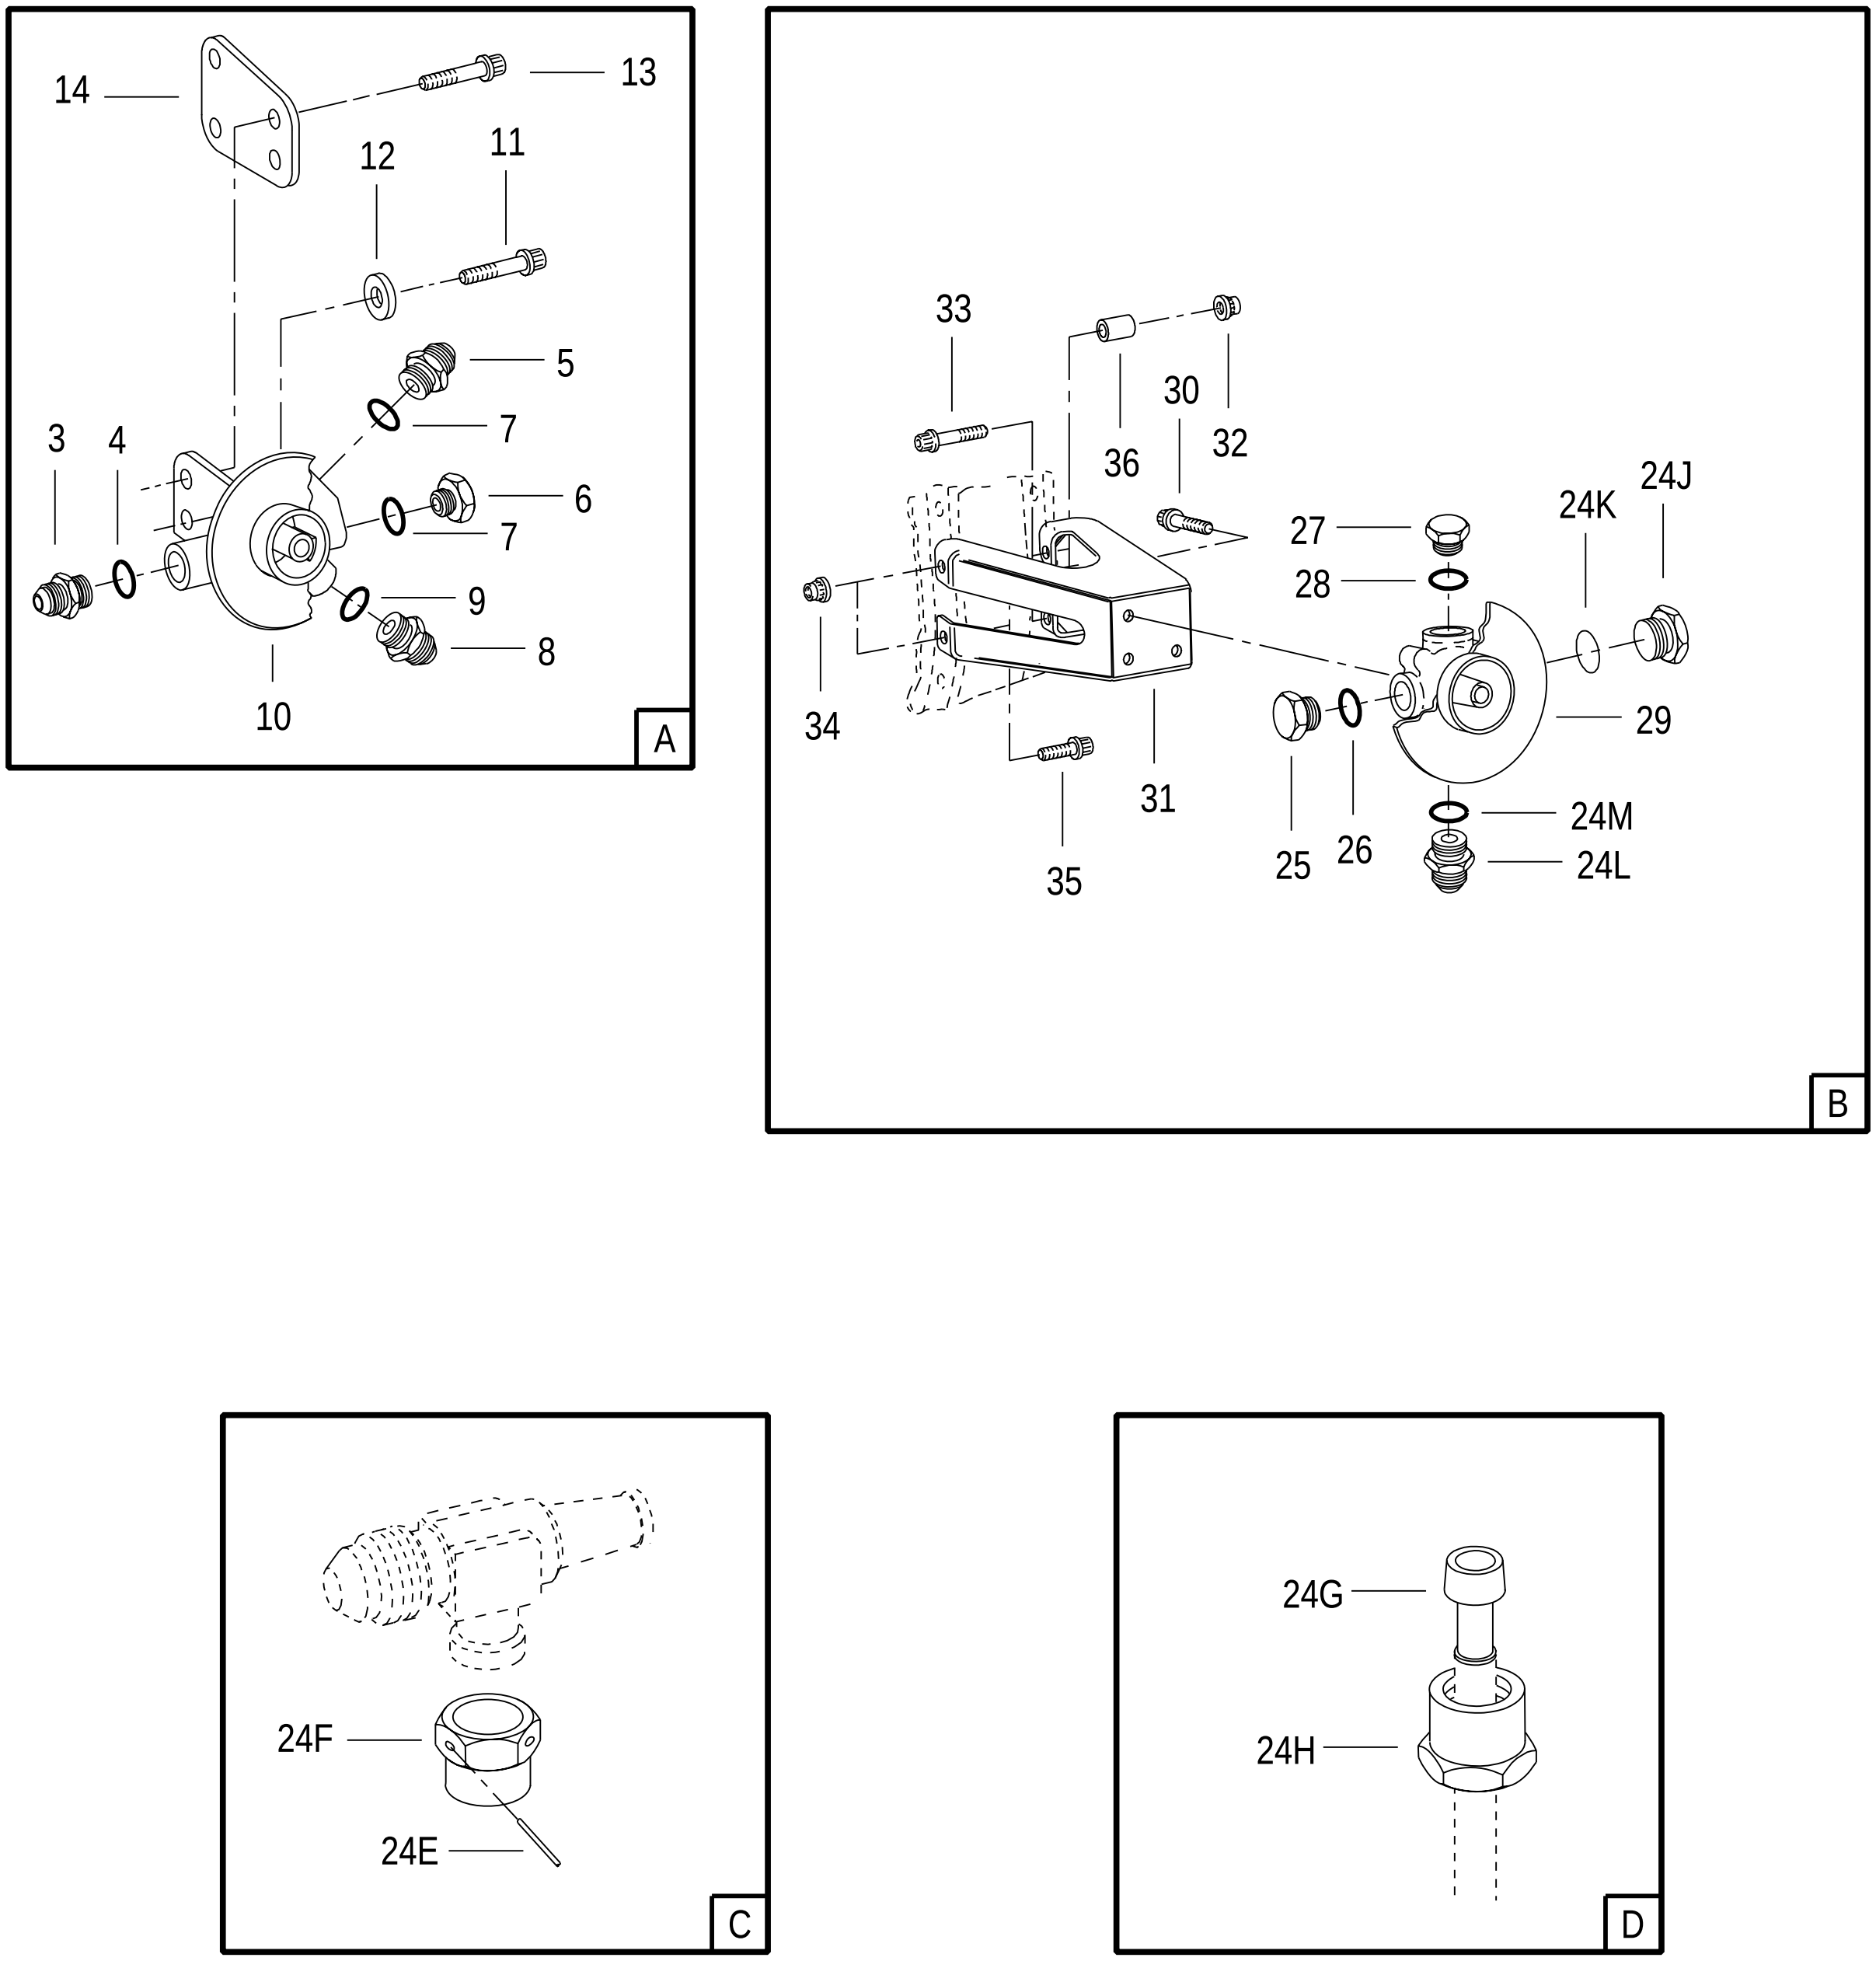

106395

FIGURE 24. FRONT AND REAR FUEL DRAINS AND TUBING
(SHEET 2 OF 2)

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	24		NO NUMBER		FRONT AND REAR FUEL DRAINS AND TUBING . . . . . SEE FIG. 12-12 FOR NHA	REF		
	- 1	=	4072101	52661	. HOSE OPTION . . . . SEE OPTION TABLE	1		PAOZZ
		=	A9187-1	98441	. HOSE-NONMETALLIC . . . . 0.188 IN. P&W PART NO. 4085077	1		PAOZZ
	- 2	=	4077307	52661	. HOSE OPTION . . . . SEE OPTION TABLE	1		PAOZZ
		=	A9186-1	98441	. HOSE-NONMETALLIC . . . . 0.303 IN. P&W PART NO. 4085076	1		PAOZZ
	- 3		ST2101-062	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.5625-18UNJF-3A X 0.375 IN. TUBE OD	1		PAOZZ
	- 4		MS9966-04	96906	. PACKING	1		PAOZZ
	- 5		ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.437-20UNJF-3A X 0.250 IN. TUBE OD	1		PAOZZ
	- 6		MS9902-04	96906	. PLUG	1		PAOZZ
	- 7		MS9966-04	96906	. PACKING	2		PAOZZ
	- 8		ST2000-06	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.562-18UNJF-3A X 0.375 IN. TUBE OD	1		PAOZZ
	- 9		MS9966-06	96906	. PACKING	1		PAOZZ
	- 10		4066764	52661	. CONNECTOR-TUBE, FUEL DRAIN MANIFOLD	1		PAOBZ
	- 11		ST1420-10	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.750 IN. LONG (AP)	1		PAOZZ
	- 12		ST2159-10	52661	. WASHER-FLAT . . . . 0.276 X 0.500 IN. DIA X 0.032 IN. THK (AP)	1		PAOZZ
	- 13		ST1420-14	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 1.000 IN. LONG (AP)	2		PAOZZ
	- 14		4076780	52661	. BRACKET-LOOP CLAMP, ASSY OF	1		PAOBZ
R	- 15		DELETED					
R	- 16		DELETED					
R	- 17		DELETED					
R	- 18		DELETED					
R	- 19		DELETED					
R	- 20		DELETED					
R	- 21		DELETED					
R	- 22		DELETED					
R	- 23		DELETED					
R	- 24		DELETED					
R	- 24A	=	A7281-1	98441	. HOSE-NONMETALLIC . . . . 0.250 IN. HOSE X 0.4375-20 P&W PART NO. 4081112-01	1		PAOZZ
		=	A9188-1	98441	. HOSE-NONMETALLIC . . . . 0.250 IN. HOSE X 0.4375-20 P&W PART NO. 4085078	1		PAOZZ
R	- 24B		ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-04	1		PAOZZ
R			ST1540-04	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
R	- 24C		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
R	- 24D		4081111-01	52661	. MANIFOLD-FUEL DRAIN, COMBUSTION . . . . CHAMBER, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
	- 24E		360193	52661	.. WIRE-THRUST . . . . 0.078 DIA X 1.190 IN. LONG	1		PAFZZ
	- 24F		ST2121-04	52661	.. NUT-TUBE COUPLING, THRUST WIRE . . . . 0.4375-20UNJF-3B X 0.250 IN. TUBE OD	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	24 - 24G	ST2981-04	52661	.. FERRULE-TUBE FITTING	1		XA
	- 24H	MS9198-04	96906	.. NUT	1		PAFZZ
R	- 24J	MS9902-04	96906	. PLUG	1		PAOZZ
R	- 24K	ST1001-04	52661	. PACKING-PREFORMED, BOSS 0.351 ID X 0.072 IN. DIA ROUND	1		PAOZZ
	- 24L	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.437-20UNJF-3A X 0.250 IN. TUBE OD	1		PAOZZ
	- 24M	MS9966-04	96906	. PACKING	1		PAOZZ
	- 25	MS9902-06	96906	. PLUG	1		PAOZZ
	- 26	ST1001-06	52661	. PACKING-PREFORMED, BOSS 0.468 ID X 0.078 IN. DIA ROUND	1		PAOZZ
	- 27	MS9902-04	96906	. PLUG	1		PAOZZ
	- 28	ST1001-04	52661	. PACKING-PREFORMED, BOSS 0.351 ID X 0.072 IN. DIA ROUND	1		PAOZZ
	- 29	4018334	52661	. CONNECTOR-TUBE, FUEL DRAIN MANIFOLD	1		PAOBZ
	- 30	ST2016-016	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	3		PAOZZ
	- 31	4022183	52661	. BRACKET-FUEL DRAIN MANIFOLD, ASSY OF	1		PAOZZ
	- 32	4023116	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
	- 33	ST2018-028	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.875 IN. LONG (AP)	2		PAOZZ
	- 34	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
	- 35	ST2015-024	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.750 IN. LONG (AP)	2		PAOZZ
	- 36	4018374	52661	. SPACER-SLEEVE 0.25175 X 0.355 OD X 0.355 IN. LONG	2		PAOZZ

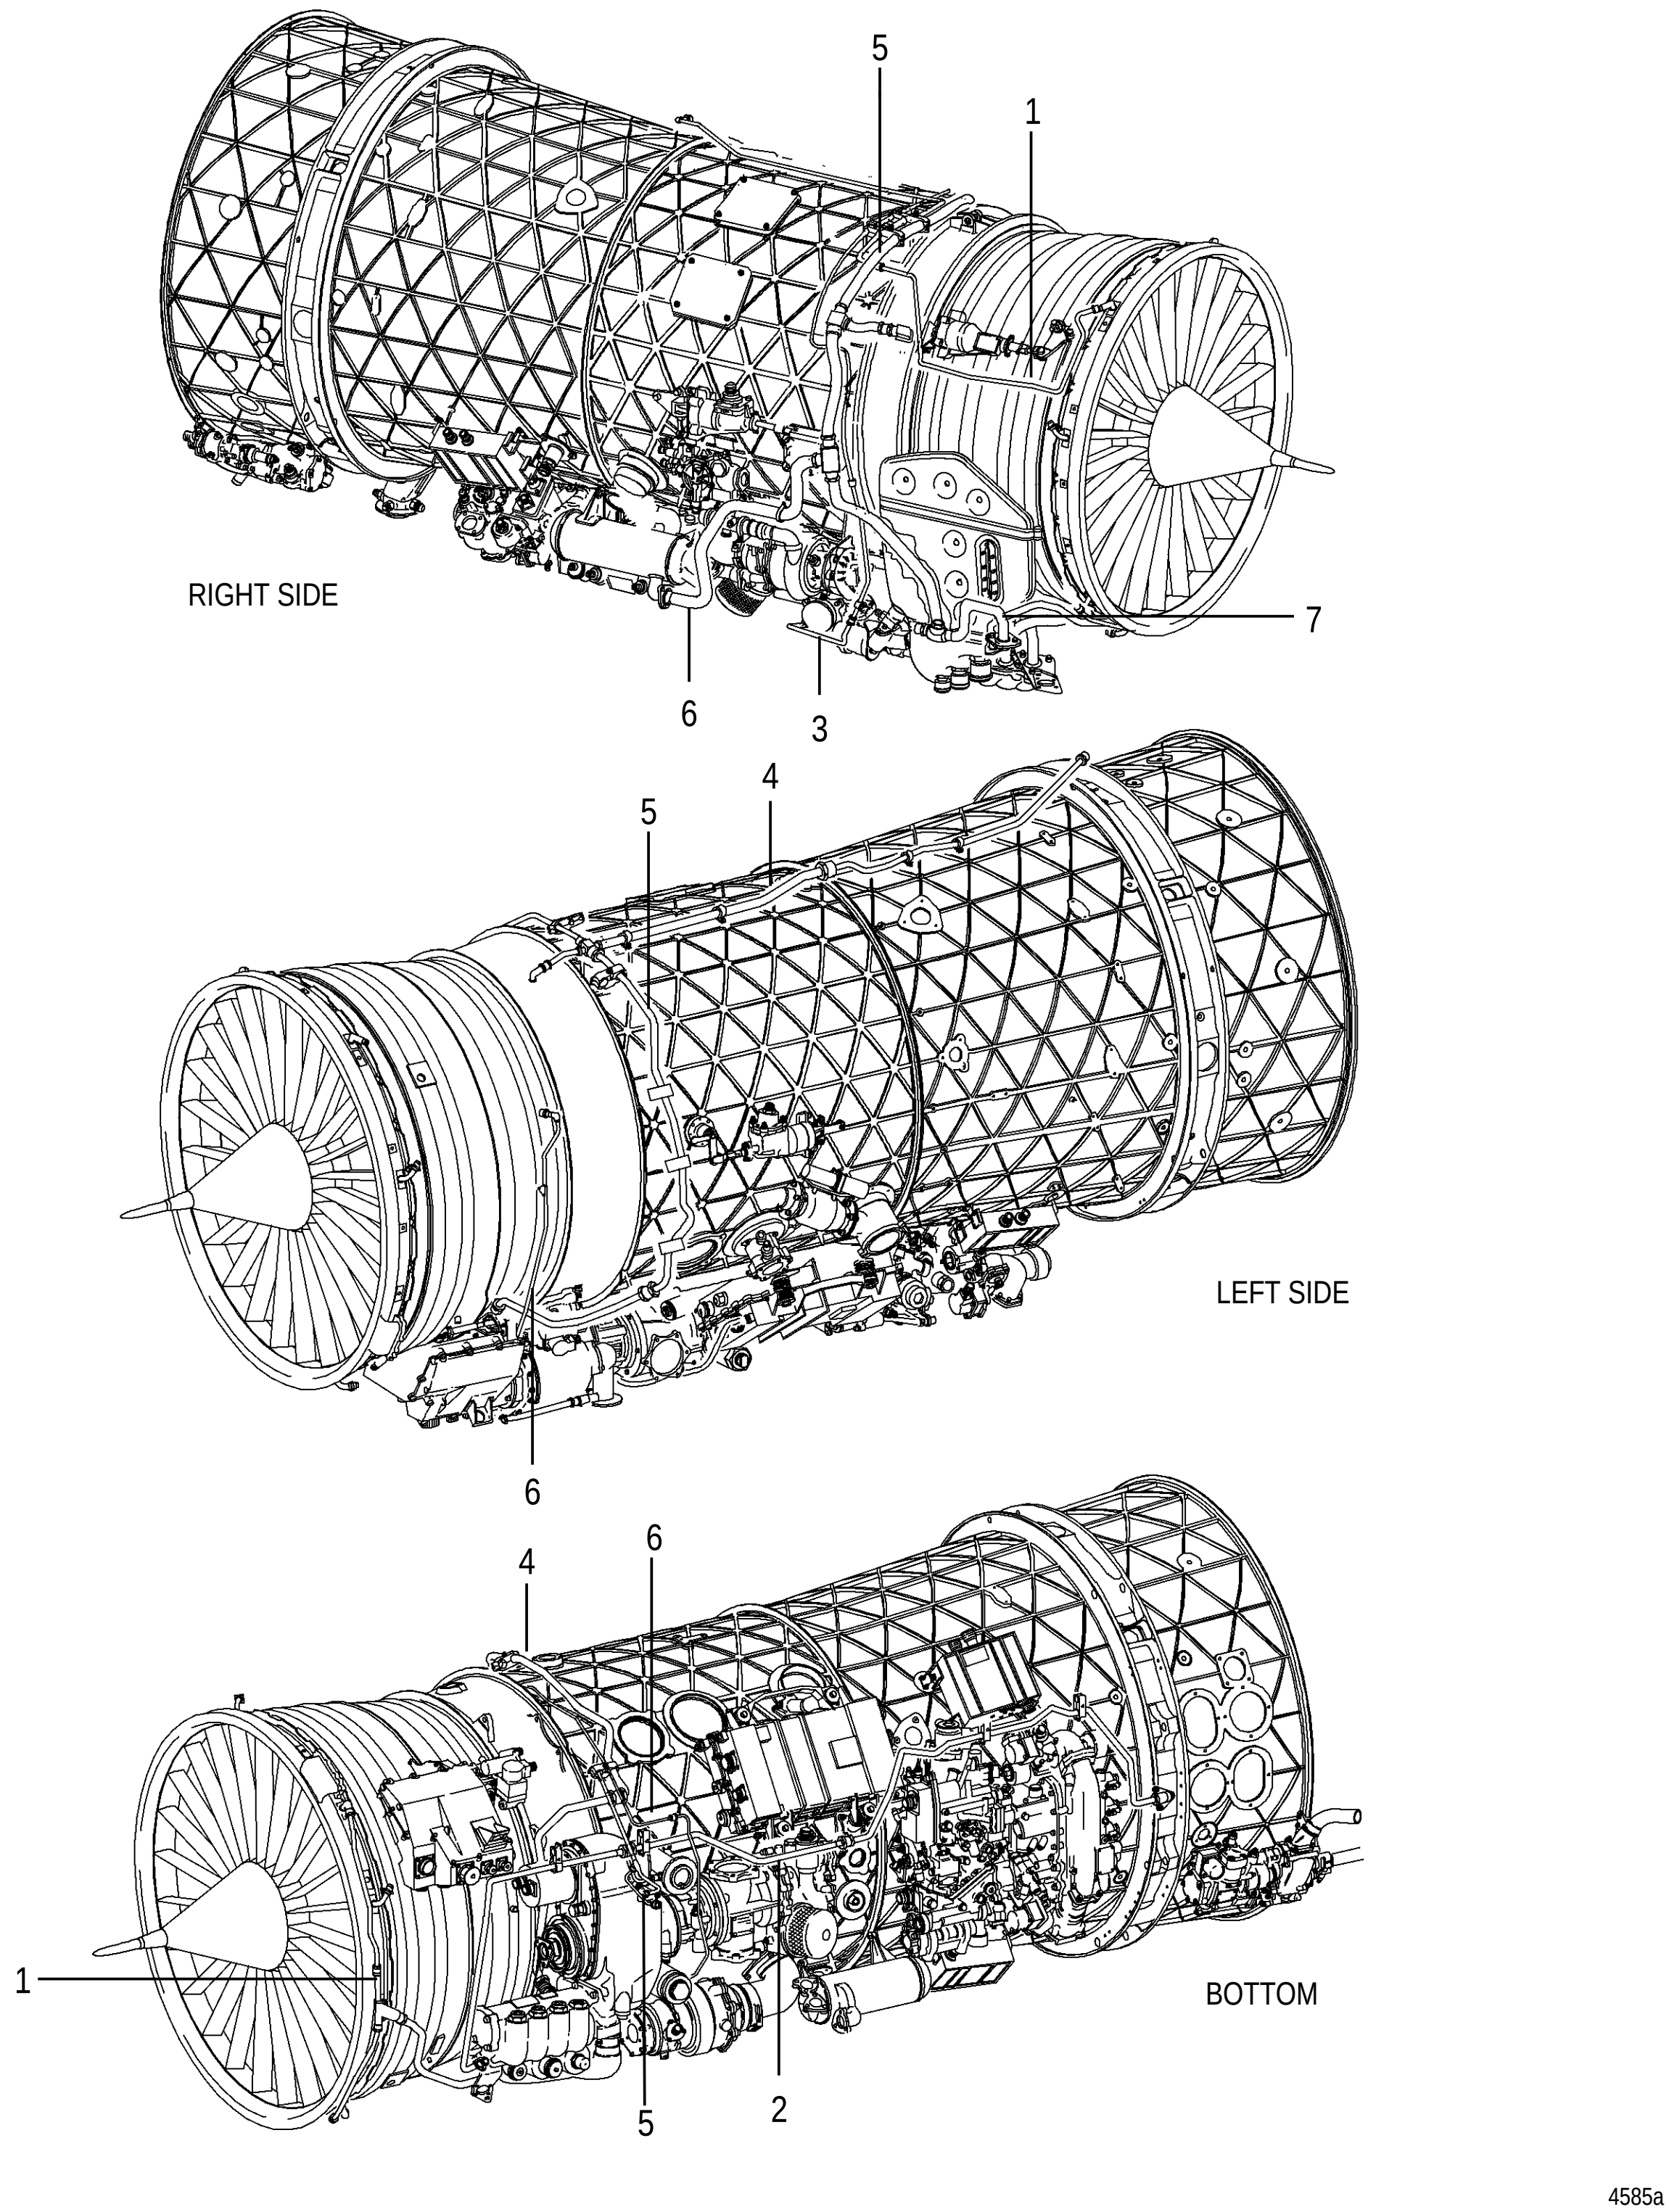


FIGURE 25. OIL TUBING

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
25	NO NUMBER		OIL TUBING . . . . SEE FIG. 1-3 FOR NHA	REF		
- 1	NO NUMBER		. NO. 1 BEARING OIL PRESSURE, ANTI-SIPHON . . . . AND SCAVENGE TUBING SEE FIG. 26 FOR DETAIL PARTS	REF		
- 2	NO NUMBER		. NO. 5 BEARING OIL SCAVENGE TUBING . . . . SEE FIG. 27 FOR DETAIL PARTS	REF		
- 3	NO NUMBER		. OIL PRESSURE TRANSMITTER, OIL TANK . . . . BREATHER MANIFOLD, NO. 1 BEARING ANTI-SIPHON PRESSURE MANIFOLD AND NO. 5 BEARING ANTI-SIPHON TUBING SEE FIG. 28 FOR DETAIL PARTS	REF		
- 4	NO NUMBER		. OIL SUPPLY TUBING . . . . SEE FIG. 29 FOR DETAIL PARTS	REF		
- 5	NO NUMBER		. GEARBOX AND NO. 2 AND NO. 3 BEARING OIL . . . SUPPLY AND ANTI-SIPHON TUBING SEE FIG. 30 FOR DETAIL PARTS	REF		
- 6	NO NUMBER		. DAMPER BEARING AND COLD START VALVE . . . . . MANIFOLD AND OIL SUPPLY TUBING SEE FIG. 31 FOR DETAIL PARTS	REF		
- 7	NO NUMBER		. NO. 4 BEARING OIL, SCAVENGE AND PRESSURE . TRANSMITTER SUPPLY TUBING SEE FIG. 32 FOR DETAIL PARTS	REF		

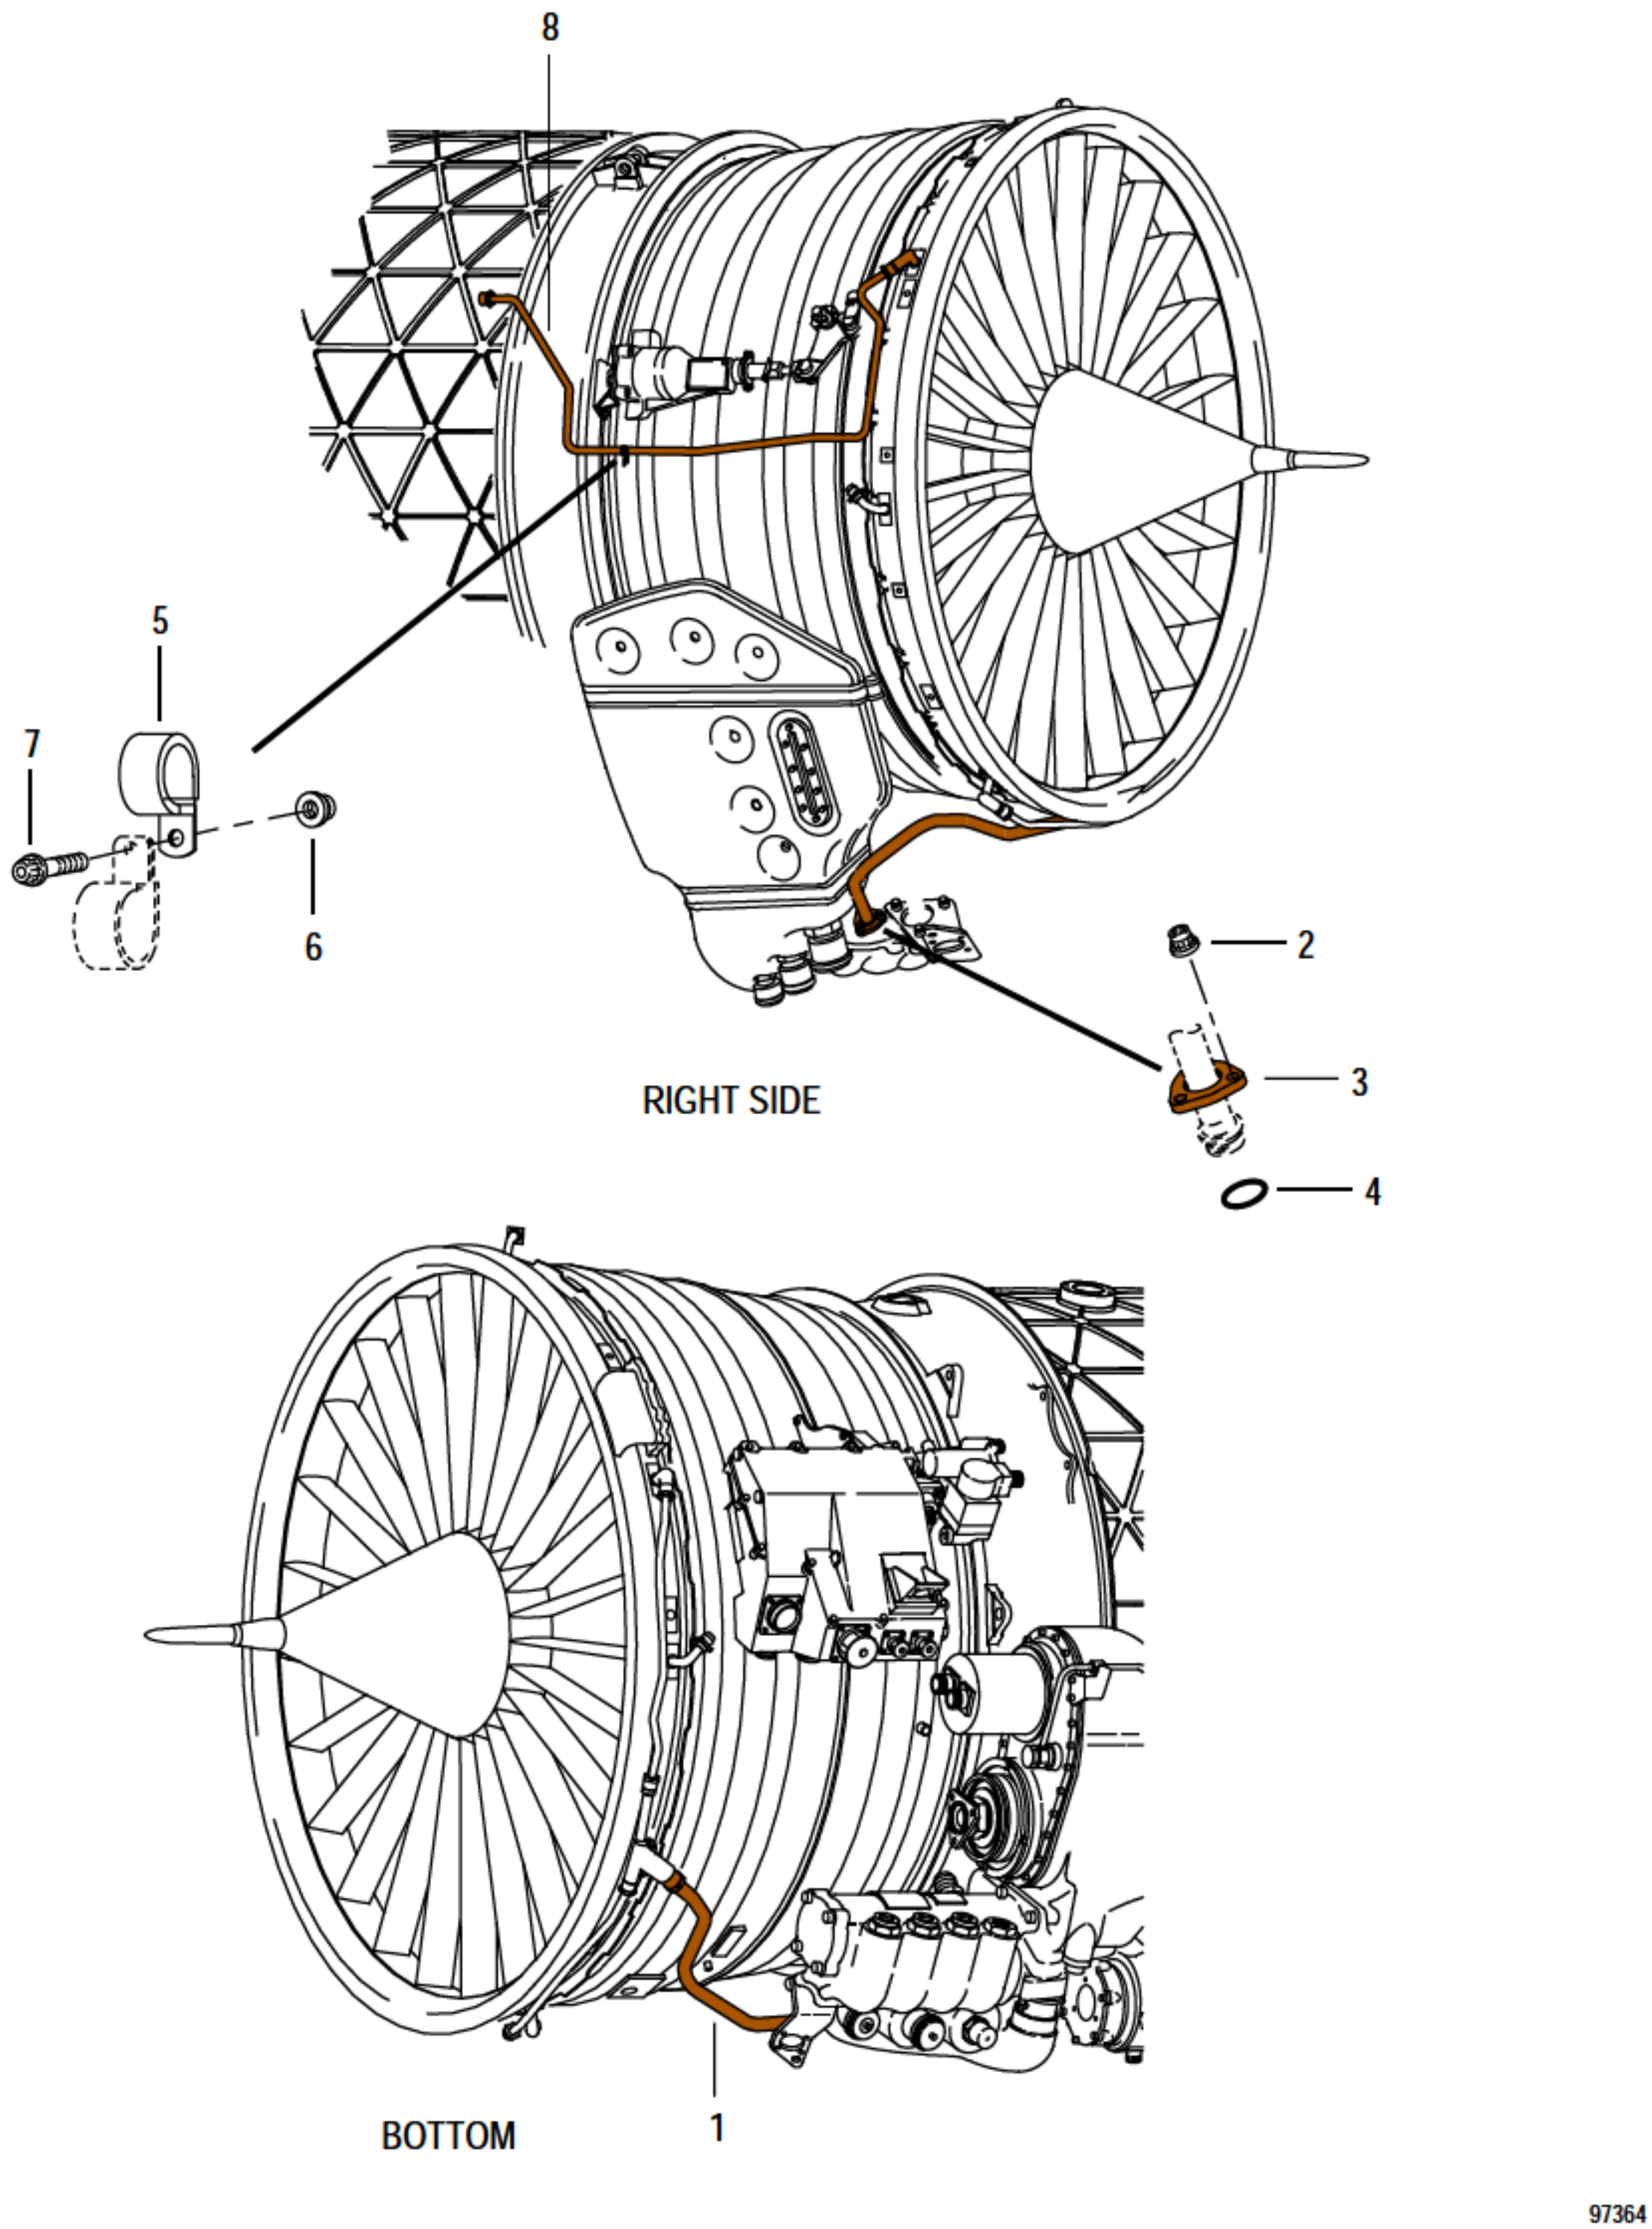


FIGURE 26. NO. 1 BEARING OIL PRESSURE, ANTI-SIPHON AND SCAVENGE TUBING

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
26	NO NUMBER		NO. 1 BEARING OIL PRESSURE, ANTI-SIPHON .... AND SCAVENGE TUBING SEE FIG. 25-1 FOR NHA	REF		
- 1	4071627-01	52661	. TUBE-SCAVENGE, NO. 1 BEARING, ASSY OF	1		PAOFF
- 2	4023116	52661	. NUT OPTION (AP) .... SEE OPTION TABLE PARTIAL BREAKDOWN FOLLOWS	3		PAOZZ
- 3	4016296	52661	.. PLATE-RETAINING, TUBE, 3 HOLE .... 0.9705 IN. ID	1		PAOZZ
- 4	AS3208-10	81343	. PACKING-PREFORMED	1		PAOZZ
- 5	ST2439-06	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-06	1		PAOZZ
	ST1540-06	52661	. CLAMP-LOOP, CUSHION..........................	1		PAOZZ
- 6	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 7	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.625 IN. LONG (AP) REPLACES ST2015-016	1		PAOZZ
- 8	4074051-01	52661	. TUBE-PRESSURE, NO. 1 BEARING AND .... ANTI-SIPHON LINE	1		PAOFF

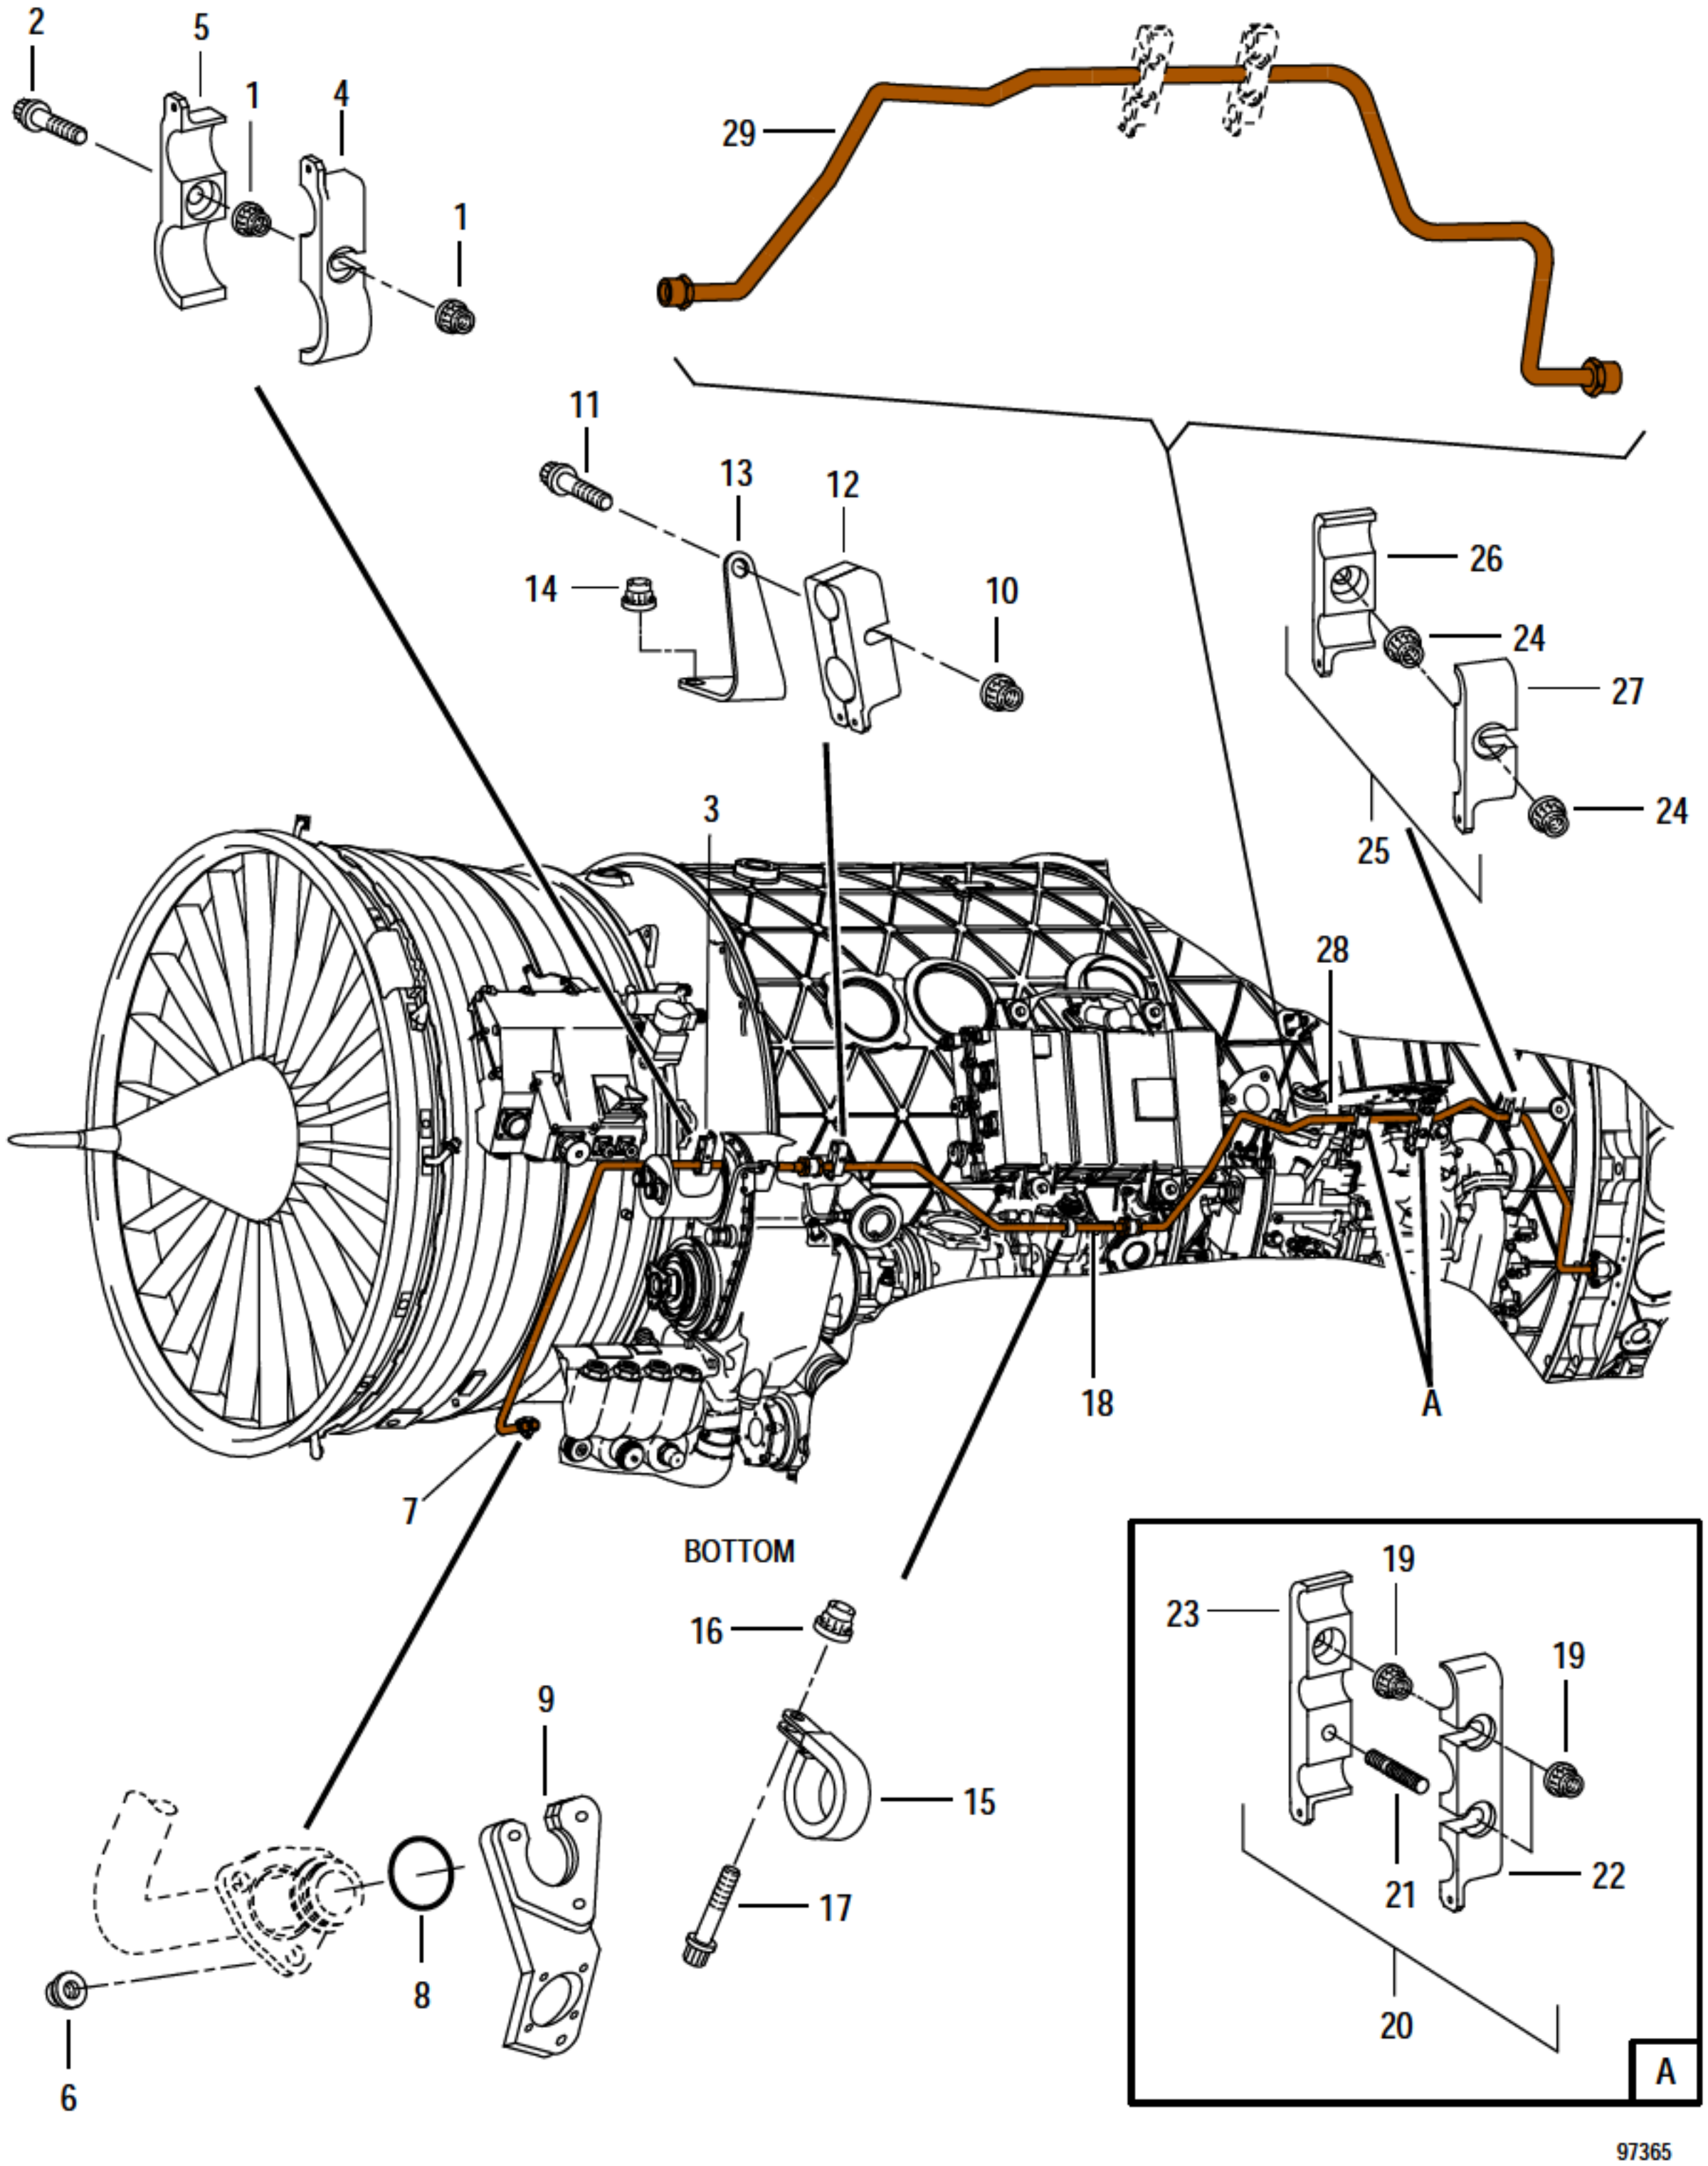


FIGURE 27. NO. 5 BEARING OIL SCAVENGE TUBING

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	27	NO NUMBER		NO. 5 BEARING OIL SCAVENGE TUBING . . . . SEE FIG. 25-2 FOR NHA	REF		
	- 1	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	2		PAOZZ
	- 2	4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG	1		PAOZZ
	- 3	4071643	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . WHEN EXH USE 4073098	1		PAOBZ
		4073098	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
	- 4	4071642	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 5	4071561	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 6	4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	3		PAOZZ
R	- 7	4072704-01	52661	. TUBE-SCAVENGE, NO. 5 BEARING, ASSY OF	1	TU	PAOFF
R		4083199-01	52661	. MANIFOLD-SCAVENGE, NO. 5 BEARING, ASSY OF .	1	TV	PAOFF
	- 8	AS3209-116	81343	. PACKING-PREFORMED	1		PAOZZ
	- 9	4073628	52661	. BRACKET-CABLE, ASSY OF	1		PAOZZ
	- 10	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	1		PAOZZ
	- 11	4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG	1		PAOZZ
	- 12	4074402	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . WHEN EXH USE 4078516	1		PAOBZ
		4078516	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
	- 13	4081173	52661	. BRACKET-BLOCK CLAMP . . . . REPLACES 4074501	1		PAFZZ
	- 14	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
	- 15	ST2439-08	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-08	1		PAOZZ
		ST1540-08	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	- 16	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 17	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
	- 18	4072705-01	52661	. TUBE-SCAVENGE, NO. 5 BEARING, ASSY OF	1		PAOFF
	- 19	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	6		PAOZZ
	- 20	4077341	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . WHEN EXH USE 4078528	2		PAOBZ
		4078528	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . PARTIAL BREAKDOWN FOLLOWS	2		PAOBZ
	- 21	TR28009-12	29372	.. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.000 IN. LONG P&WA PART NO. ST2665-12	1		PAFZZ
	- 22	4077342	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 23	4077343	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 24	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	2	BN	PAOZZ
	- 25	4071646	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . PARTIAL BREAKDOWN FOLLOWS	1	BN	PAOBZ
	- 26	4071645	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 27	4071644	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 28	4072706-01	52661	. TUBE-SCAVENGE, NO. 5 BEARING, ASSY OF	1	BN	PAOFF
	- 29	4079066-01	52661	. TUBE-SCAVENGE, NO. 5 BEARING, ASSY OF	1	BP	PAOFF

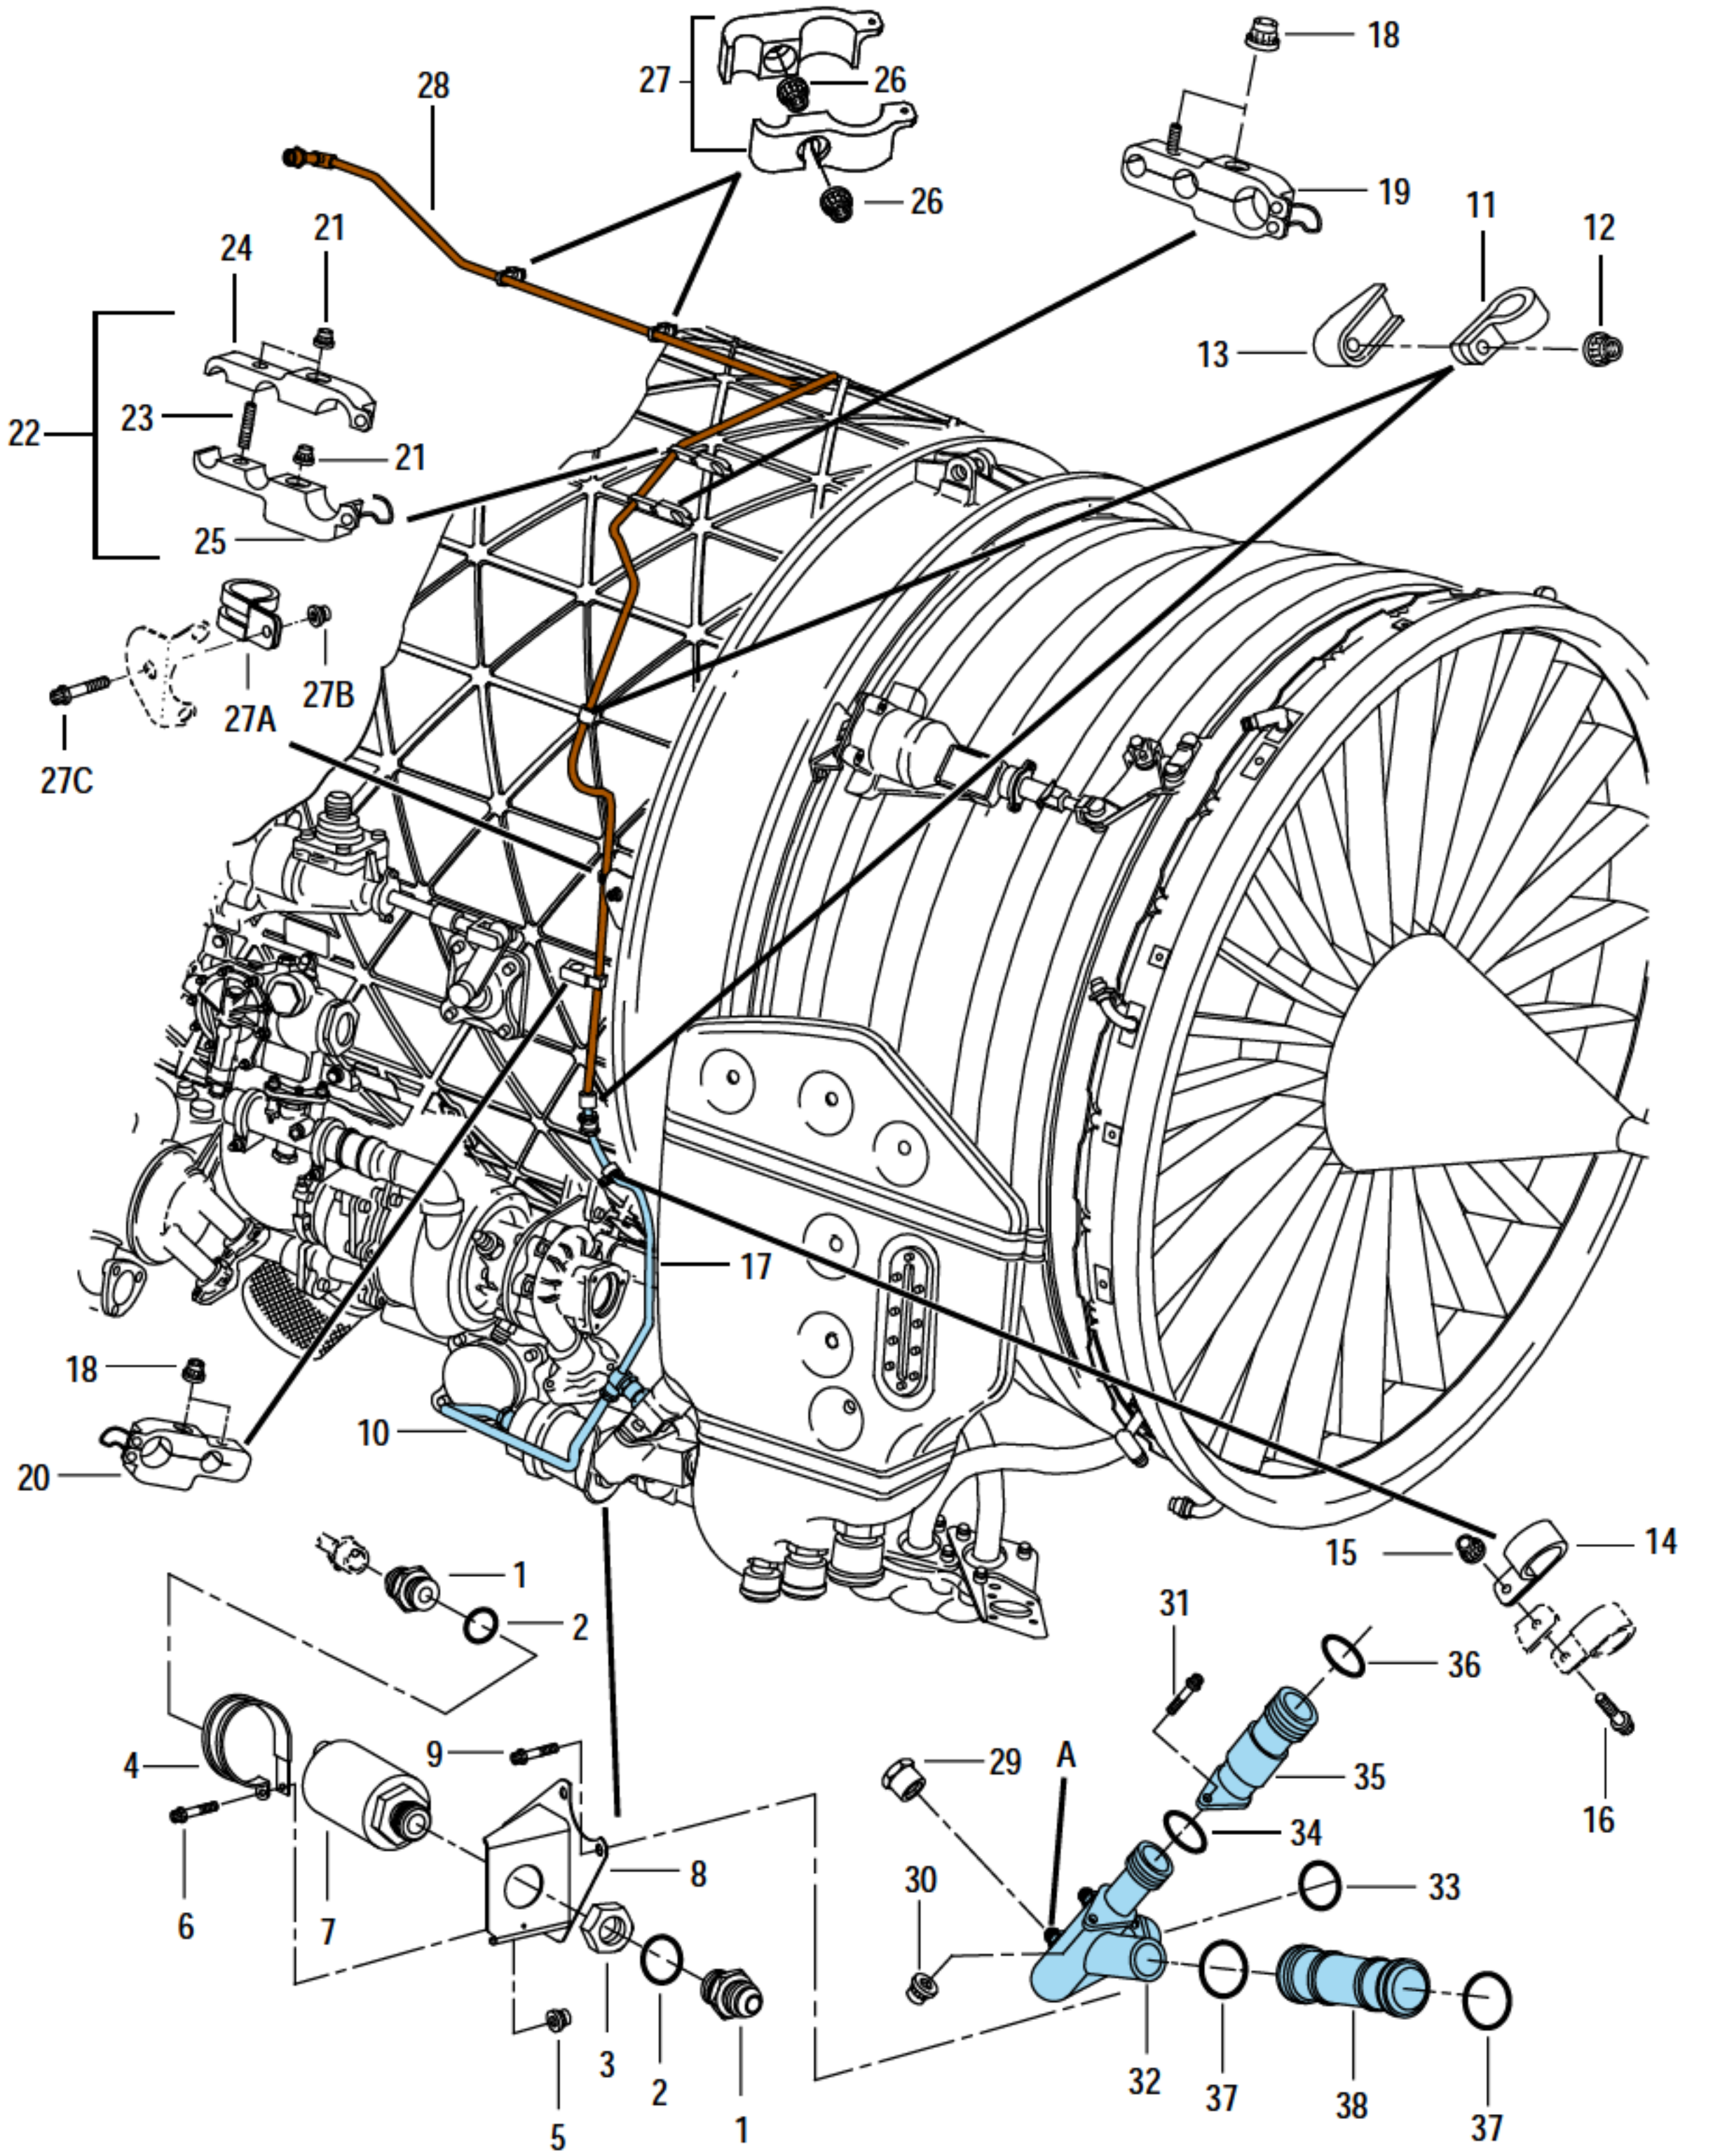


FIGURE 28. OIL PRESSURE TRANSMITTER, OIL TANK BREATHER MANIFOLD, NO. 1 BEARING ANTI-SIPHON PRESSURE MANIFOLD AND NO. 5 BEARING ANTI-SIPHON TUBING (SHEET 1 OF 2)

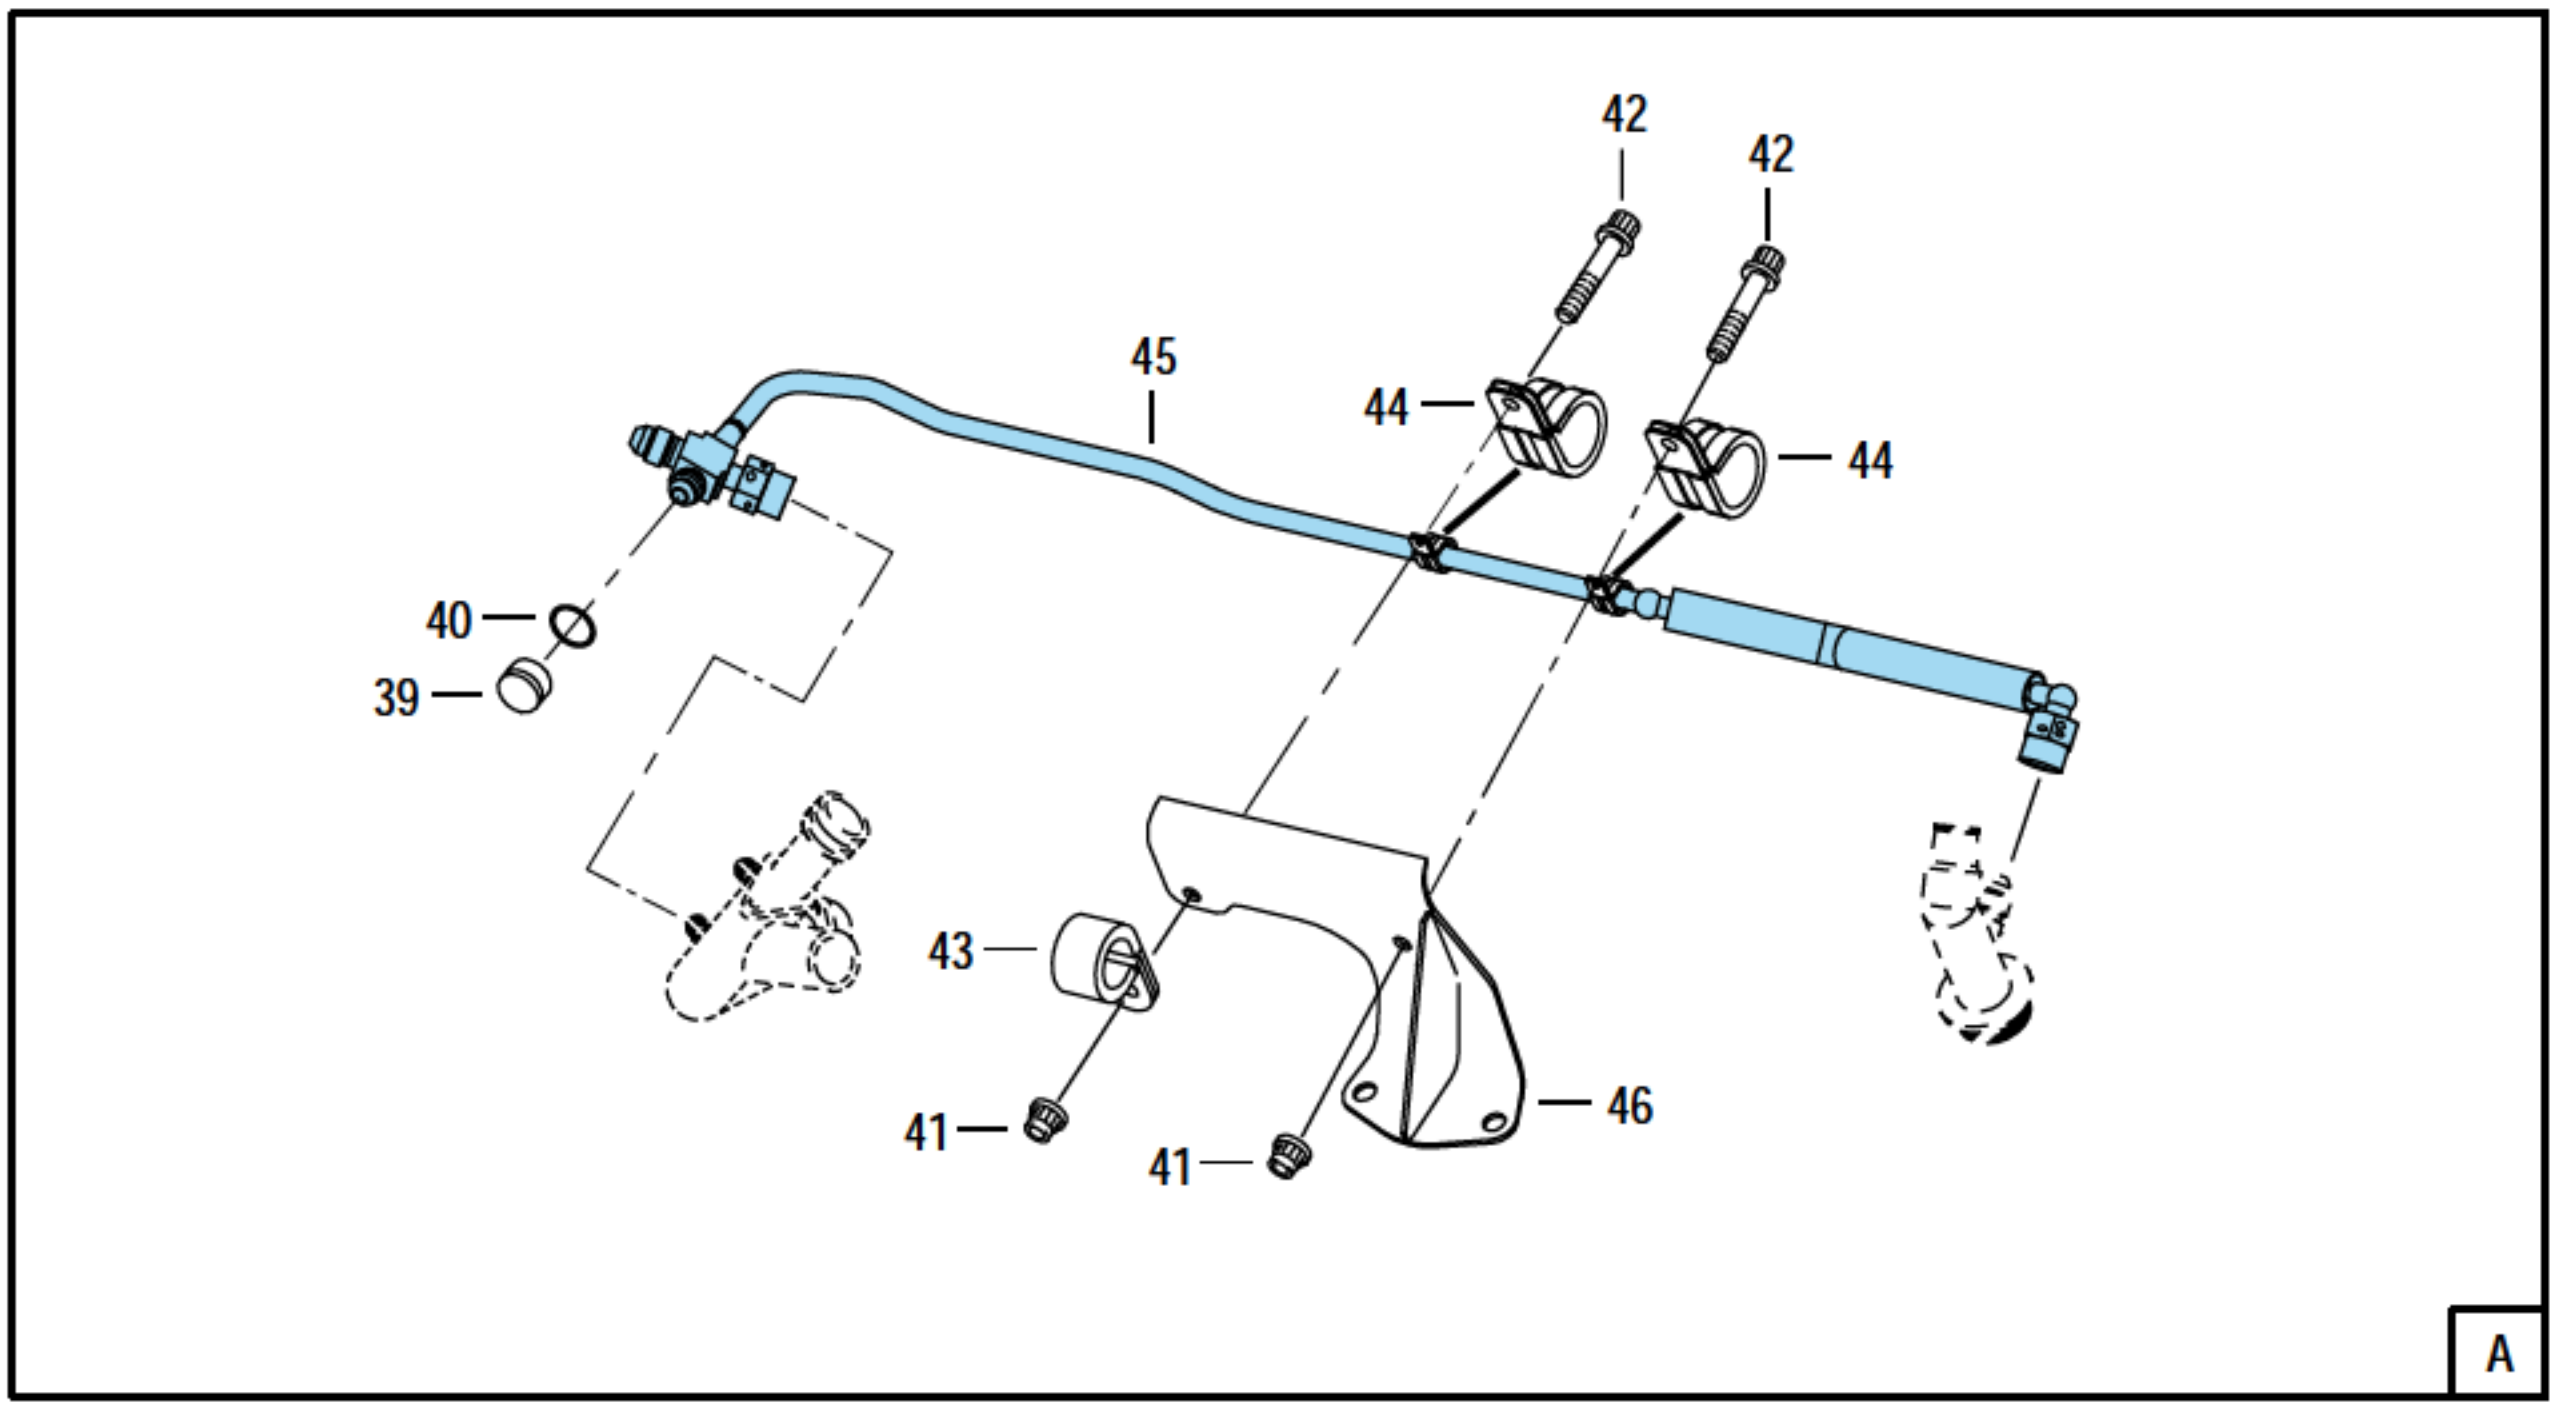


FIGURE 28. OIL PRESSURE TRANSMITTER, OIL TANK BREATHER MANIFOLD, NO. 1 BEARING ANTI-SIPHON PRESSURE MANIFOLD AND NO. 5 BEARING ANTI-SIPHON TUBING
(SHEET 2 OF 2)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	28	NO NUMBER		OIL PRESSURE TRANSMITTER, OIL TANK BREATHER MANIFOLD, NO. 1 BEARING ANTI-SIPHON PRESSURE MANIFOLD AND NO. 5 BEARING ANTI-SIPHON TUBING SEE FIG. 25-3 FOR NHA	REF		
	- 1	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.437-20UNJF-3A X 0.250 IN. TUBE OD	2		PAOZZ
	- 2	ST1001-04	52661	. PACKING-PREFORMED, BOSS 0.351 ID X 0.072 IN. DIA ROUND	2		PAOZZ
	- 3	4020969	52661	. NUT-PLAIN, HEX, DRILLED 1.0625-12UNJF-3B X 0.406 IN. THK	1		PAOZZ
	- 4	427992	52661	. CLAMP-ASSY OF, LOOP, CUSHION 2.250 IN. DIA	1		PAOZZ
	- 5	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
	- 6	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	1		PAOZZ
	- 7	4059195	52661	. TRANSMITTER OPTION-OIL PRESSURE SEE OPTION TABLE	1		PAOFF
	- 8	4063884	52661	. BRACKET-OIL PRESSURE TRANSMITTER, ASSY OF	1		PAOZZ
	- 9	ST2150-020	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	2		PAOZZ
R	- 10	4074050-01	52661	. TUBE-ANTI-SIPHON, NO. 5 BEARING, ASSY OF	1	TU	PAOFF
R		4083252-01	52661	. TUBE-ANTI-SIPHON, NO. 5 BEARING, ASSY OF	1	TV	PAOFF
	- 11	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION WHEN EXH USE ST1540-04	2	FJ	PAOZZ
		ST1540-04	52661	. CLAMP-LOOP, CUSHION	2	FK	PAOZZ
	- 12	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
	- 13	4077582	52661	. SPACER-CLAMP WHEN EXH USE 4079778	2	FJ	PAOZZ
		4079778	52661	. CHANNEL-LOOP CLAMP MAY BE USED WITH ST2439-04	2	FK	PAOZZ
	- 14	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION	1	BM/DB	PAOZZ
	- 15	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1	BM/DB	PAOZZ
	- 16	ST2015-018	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.562 IN. LONG (AP)	1	BM/DB	PAFZZ
	- 17	4076856-01	52661	. MANIFOLD-PRESSURE, ANTI-SIPHON, NO. 1 BEARING, ASSY OF	1	BL/DA	PAOFF
		4079069-01	52661	. MANIFOLD-PRESSURE, ANTI-SIPHON, NO. 1 BEARING, ASSY OF	1	BM/DB/RG	PAOFF
		4081397-01	52661	. MANIFOLD-PRESSURE, ANTI-SIPHON, NO. 1 BEARING, ASSY OF	1	RH	PAOFF
	- 18	4023115	52661	. NUT OPTION SEE OPTION TABLE	5		PAOZZ
	- 19	4076759	52661	. CLAMP-BLOCK, GROMMET, ASSY OF WHEN EXH USE 4078522	1		PAOBZ
		4078522	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
	- 20	4077170	52661	. CLAMP-BLOCK, GROMMET, ASSY OF WHEN EXH USE 4078526	1		PAOBZ
		4078526	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
	- 21	4023115	52661	. NUT OPTION SEE OPTION TABLE	3		PAOZZ
	- 22	4077216	52661	. CLAMP-BLOCK, GROMMET, ASSY OF WHEN EXH USE 4078527	1		PAOBZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	28 - 22		4078527	52661	. CLAMP-BLOCK, GROMMET, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
	- 23		TR28009-10	29372	.. STUD-LOCKED IN 0.190-32 X 0.250-28 X 0.875 IN. LONG USE ONLY ON 4077216 P&WA PART NO. ST2665-10	1		PAFZZ
			TR28009-12	29372	.. STUD-LOCKED IN 0.190-32 X 0.250-28 X 1.000 IN. LONG USE ONLY ON 4078527 P&WA PART NO. ST2665-12	1		PAFZZ
	- 24		4074061	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 25		4077215	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 26		4023115	52661	. NUT OPTION SEE OPTION TABLE	4		PAOZZ
	- 27		4077219	52661	. CLAMP-BLOCK, GROMMET, ASSY OF WHEN EXH USE 4078525	2		PAOBZ
			4078525	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	2		PAOBZ
	- 27A		ST1540-04	52661	. CLAMP-LOOP, CUSHION	1	RH	PAOZZ
	- 27B		4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1	RH	PAOZZ
	- 27C		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	RH	PAOZZ
	- 28		4076857-01	52661	. TUBE-PRESSURE, ANTI-SIPHON, NO. 1 BEARING, ASSY OF	1	BL/DA	PAOFF
			4079070-01	52661	. TUBE-PRESSURE, ANTI-SIPHON, NO. 1 BEARING, ASSY OF	1	BM/DB/RG	PAOFF
			4081398-01	52661	. TUBE-PRESSURE, ANTI-SIPHON, NO. 1 BEARING, ASSY OF	1	RH	PAOFF
	- 29		MS9314-04	96906	. CAP ASSY	1		PAOZZ
	- 30		4023116	52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
	- 31		ST2018-020	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.625 IN. LONG	1		PAOZZ
	- 32		4072813	52661	. MANIFOLD-BREATHER, OIL TANK, ASSY OF	1		PAOZZ
	- 33		ST1000-218	52661	. PACKING-PREFORMED 1.234 ID X 0.139 IN. DIA ROUND	1		PAOZZ
	- 34		ST1000-215	52661	. PACKING-PREFORMED 1.046 ID X 0.139 IN. DIA ROUND	1		PAOZZ
	- 35		4058006	52661	. TUBE-TRANSFER, PACKING, OIL TANK BREATHER MANIFOLD	1		PAOBZ
	- 36		ST1000-219	52661	. PACKING-PREFORMED 1.296 ID X 0.139 IN. DIA ROUND	1		PAOZZ
	- 37		ST1050-214	52661	. PACKING-PREFORMED 0.984 ID X 0.139 IN. DIA ROUND	2		PAOZZ
	- 38		4060627	52661	. TUBE-TRANSFER, PACKING 0.870 ID X 3.710 IN. LONG	1		PAOBZ
	- 39		MS9902-02	96906	. PLUG	1	TV	PAOZZ
	- 40		AS3208-02	81343	. PACKING-PREFORMED	1	TV	PAOZZ
	- 41		4023115	52661	. NUT OPTION SEE OPTION TABLE	2	TV	PAOZZ
	- 42		ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.625 IN. LONG	2	TV	PAOZZ
	- 43		ST1540-10	52661	. CLAMP-LOOP, CUSHION	1	TV	PAOZZ
	- 44		ST1540-04	52661	. CLAMP-LOOP, CUSHION	2	TV	PAOZZ
R	- 45	=	4086054	52661	. HOSE AND TUBE-ANTI-SIPHON, NO. 5 BEARING	1	TV	PAOZZ
R R		=	A9182-1	98441	. HOSE AND TUBE-ANTI-SIPHON, NO. 5 BEARING P&WA PART NO. 4085072	1		PAOZZ
	- 46		4083198-01	52661	. BRACKET-ASSY OF, LOOP CLAMP	1	TV	PAOBZ

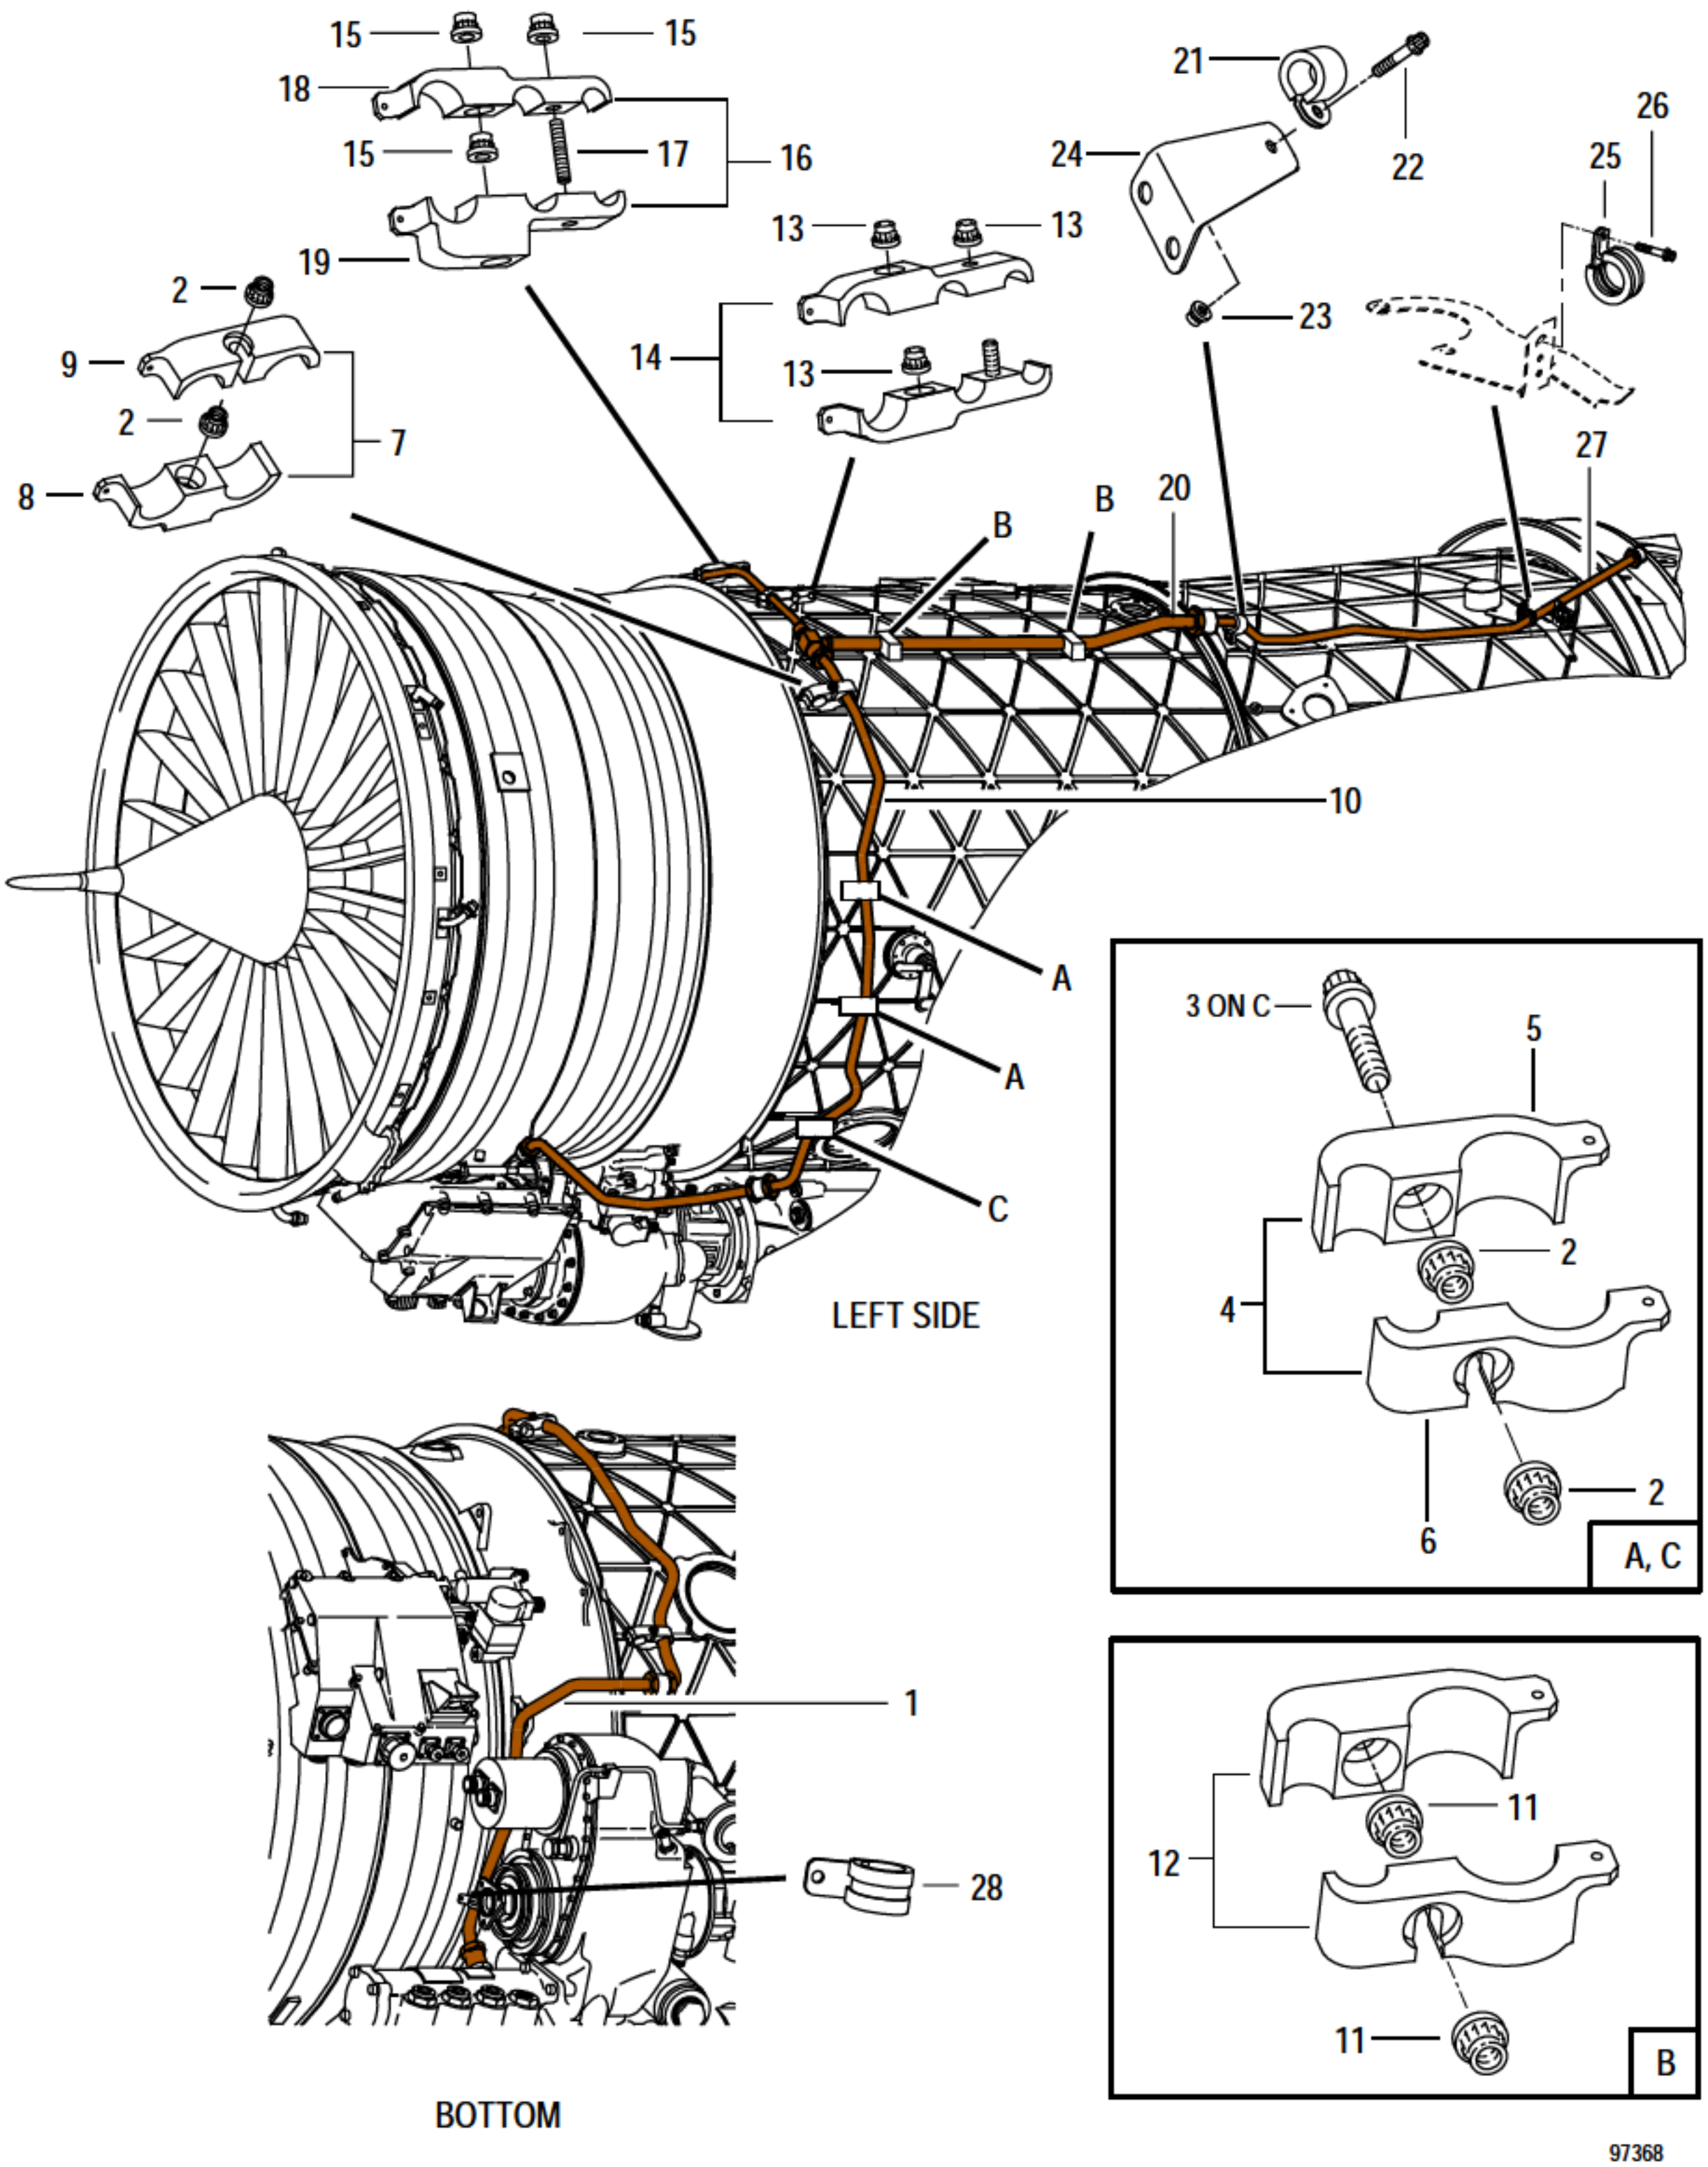


FIGURE 29. OIL SUPPLY TUBING

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
29	NO NUMBER		OIL SUPPLY TUBING . . . . SEE FIG. 25-4 FOR NHA	REF		
- 1	4072141-01	52661	. TUBE-OIL SUPPLY, PUMP, ASSY OF	1		PAOFF
- 2	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	8		PAOZZ
- 3	4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG	1		PAOZZ
- 4	4071584	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4073095	3		PAOBZ
	4073095	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	3		PAOBZ
- 5	4071551	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
- 6	4071552	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
- 7	4073873	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4073099	1		PAOBZ
	4073099	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
- 8	4073869	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
- 9	4073870	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
- 10	4079068-01	52661	. TUBE-OIL SUPPLY, PUMP, ASSY OF	1		PAFFF
- 11	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	4		PAOZZ
- 12	4077219	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078525	2		PAOBZ
	4078525	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	2		PAOBZ
- 13	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	3		PAOZZ
- 14	4076759	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078522	1		PAOBZ
	4078522	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
- 15	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	3		PAOZZ
- 16	4077216	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078527	1		PAOBZ
	4078527	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
- 17	TR28009-10	29372	.. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG USE ONLY ON 4077216 P&WA PART NO. ST2665-10	1		PAFZZ
	TR28009-12	29372	.. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.000 IN. LONG USE ONLY ON 4078527 P&WA PART NO. ST2665-12	1		PAFZZ
- 18	4074061	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 19	4077215	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 20	4072139-01	52661	. MANIFOLD-OIL SUPPLY, NO. 4 BEARING, ASSY OF	1		PAFFF
- 21	ST2439-06	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-06	1		PAOZZ
	ST1540-06	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 22	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 23	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 24	4077947	52661	. BRACKET-LOOP CLAMP . . . . REPLACES 4075481	1		PAOZZ
- 25	ST1540-06	52661	. CLAMP-LOOP, CUSHION	1	L	PAOZZ
- 26	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1	L	PAOZZ
- 27	4072138-01	52661	. TUBE-OIL SUPPLY, NO. 5 BEARING, ASSY OF	1		PAFFF
R - 28	ST1540-10	52661	. CLAMP-LOOP, CUSHION	1	MT	PAOZZ

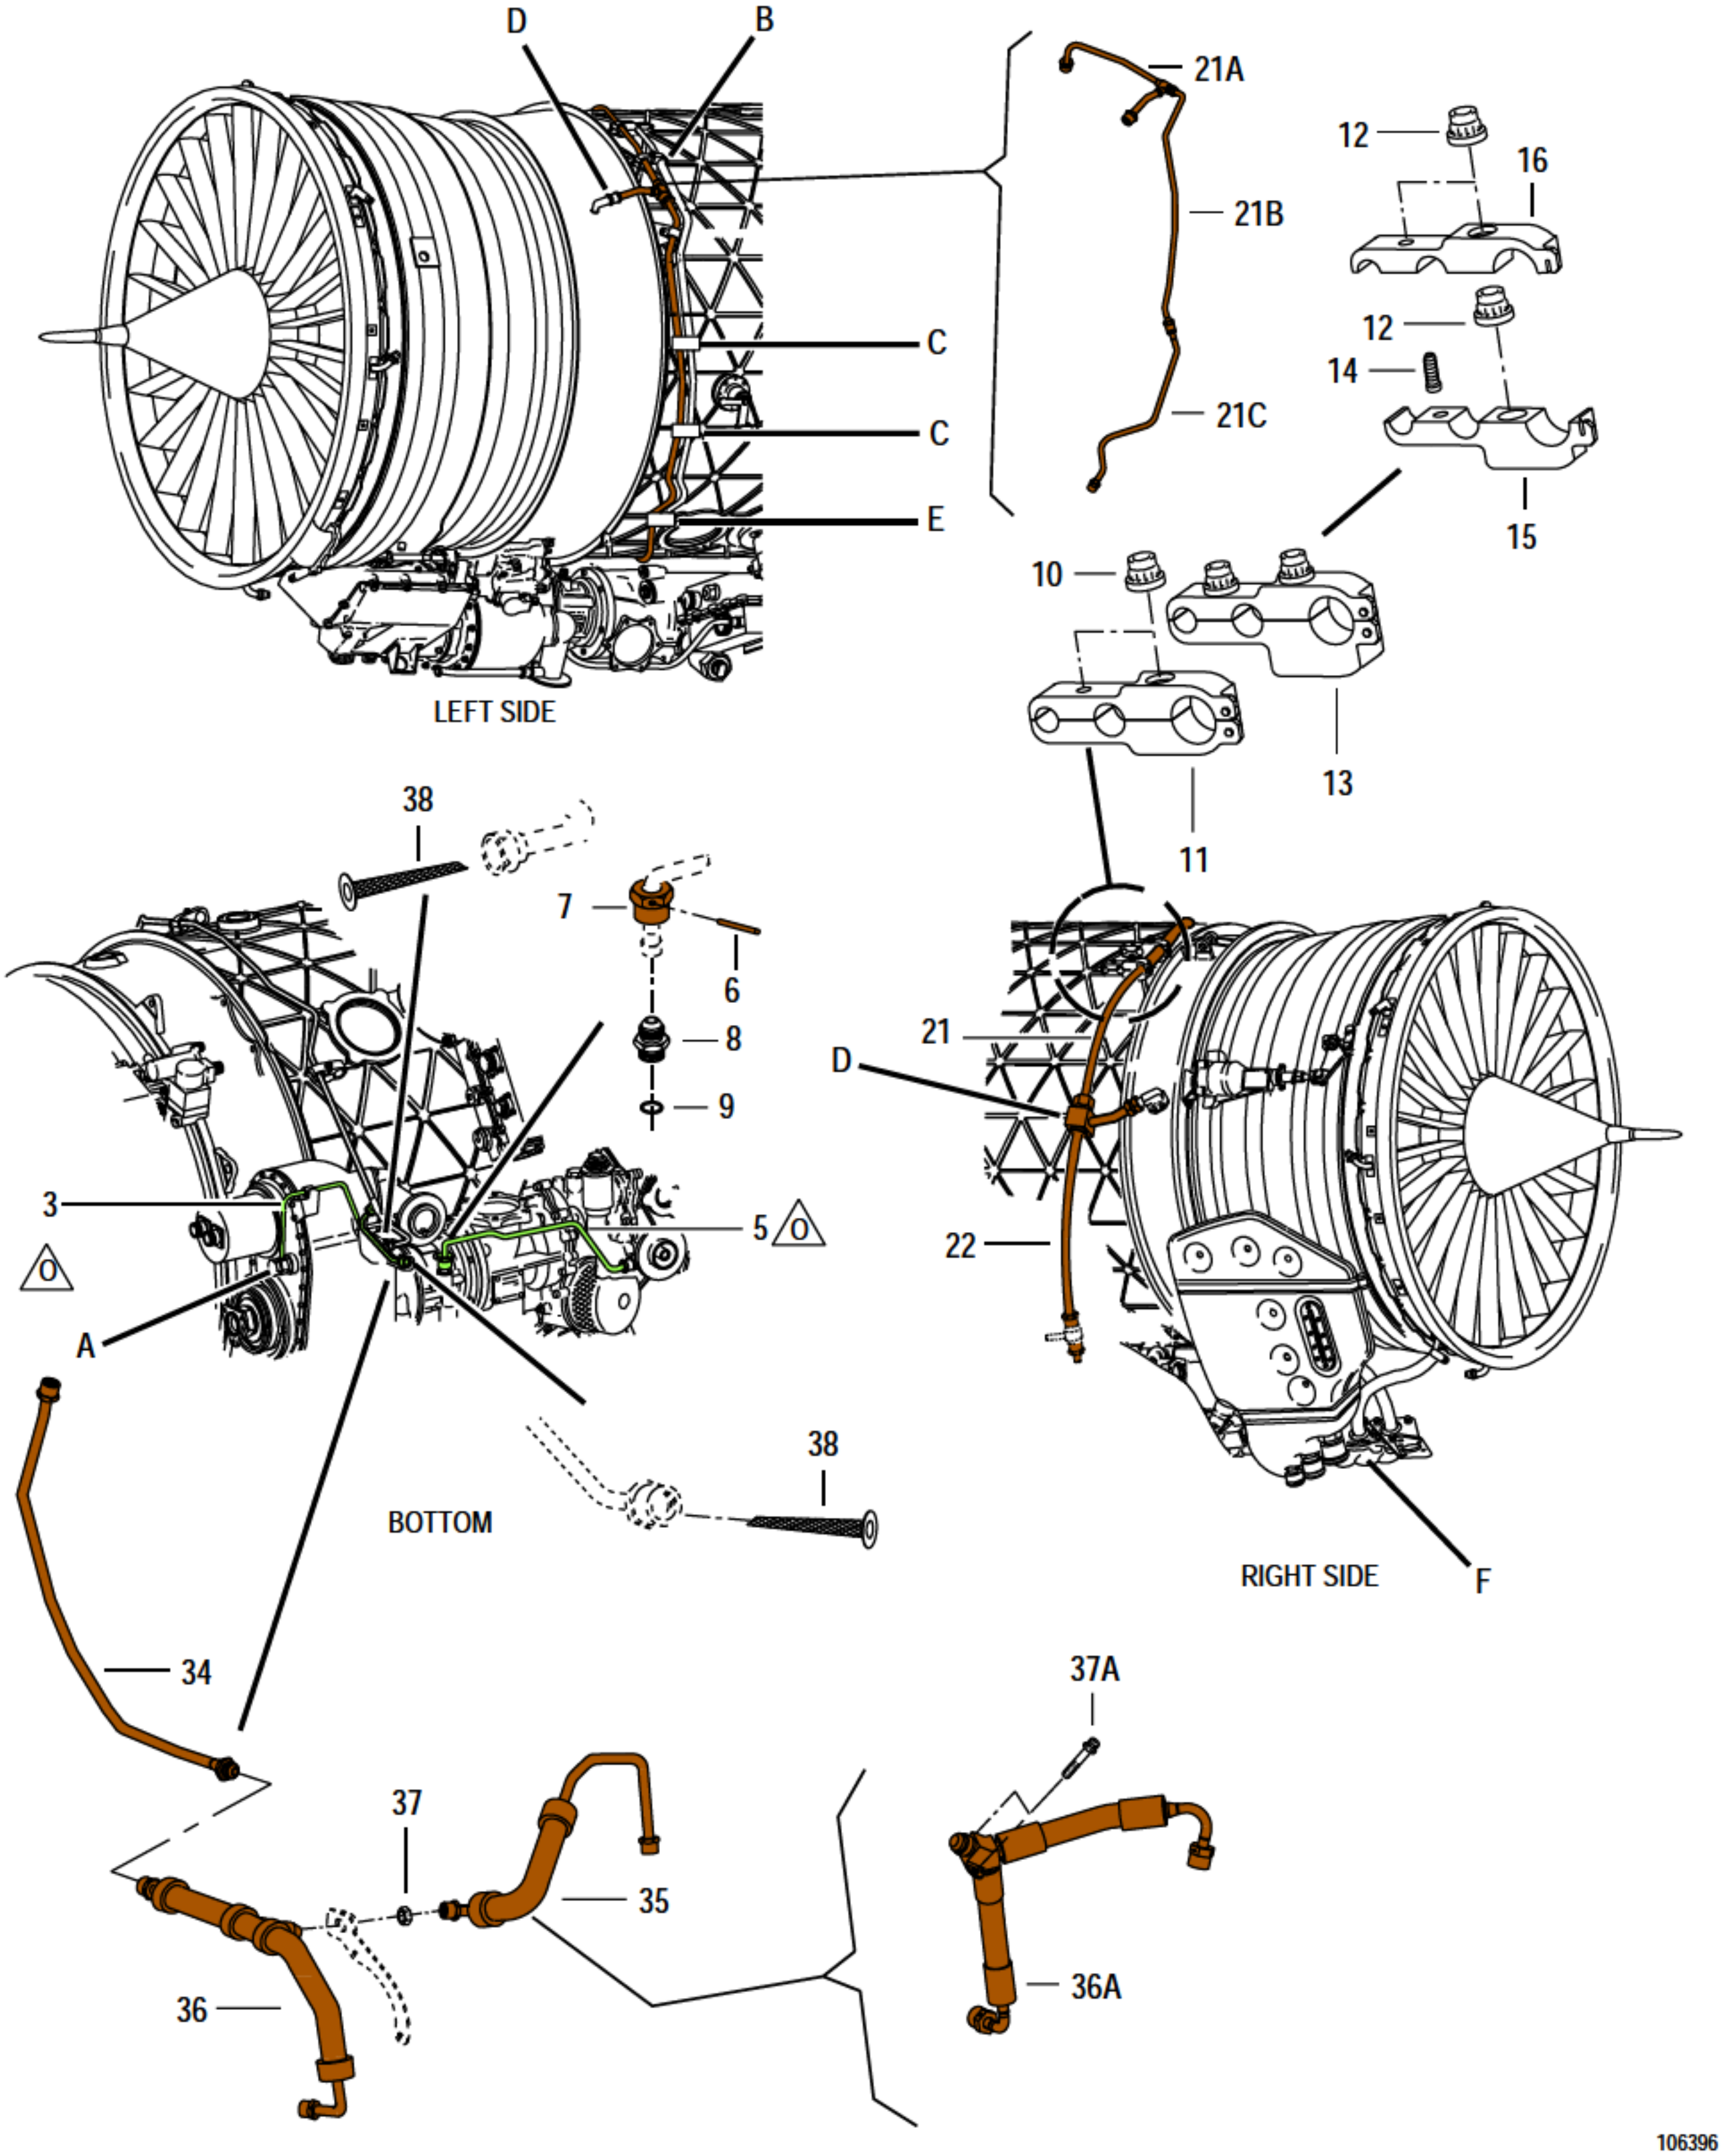


FIGURE 30. GEARBOX AND NO. 2 AND NO. 3 BEARING OIL SUPPLY AND ANTI-SIPHON TUBING
(SHEET 1 OF 3)

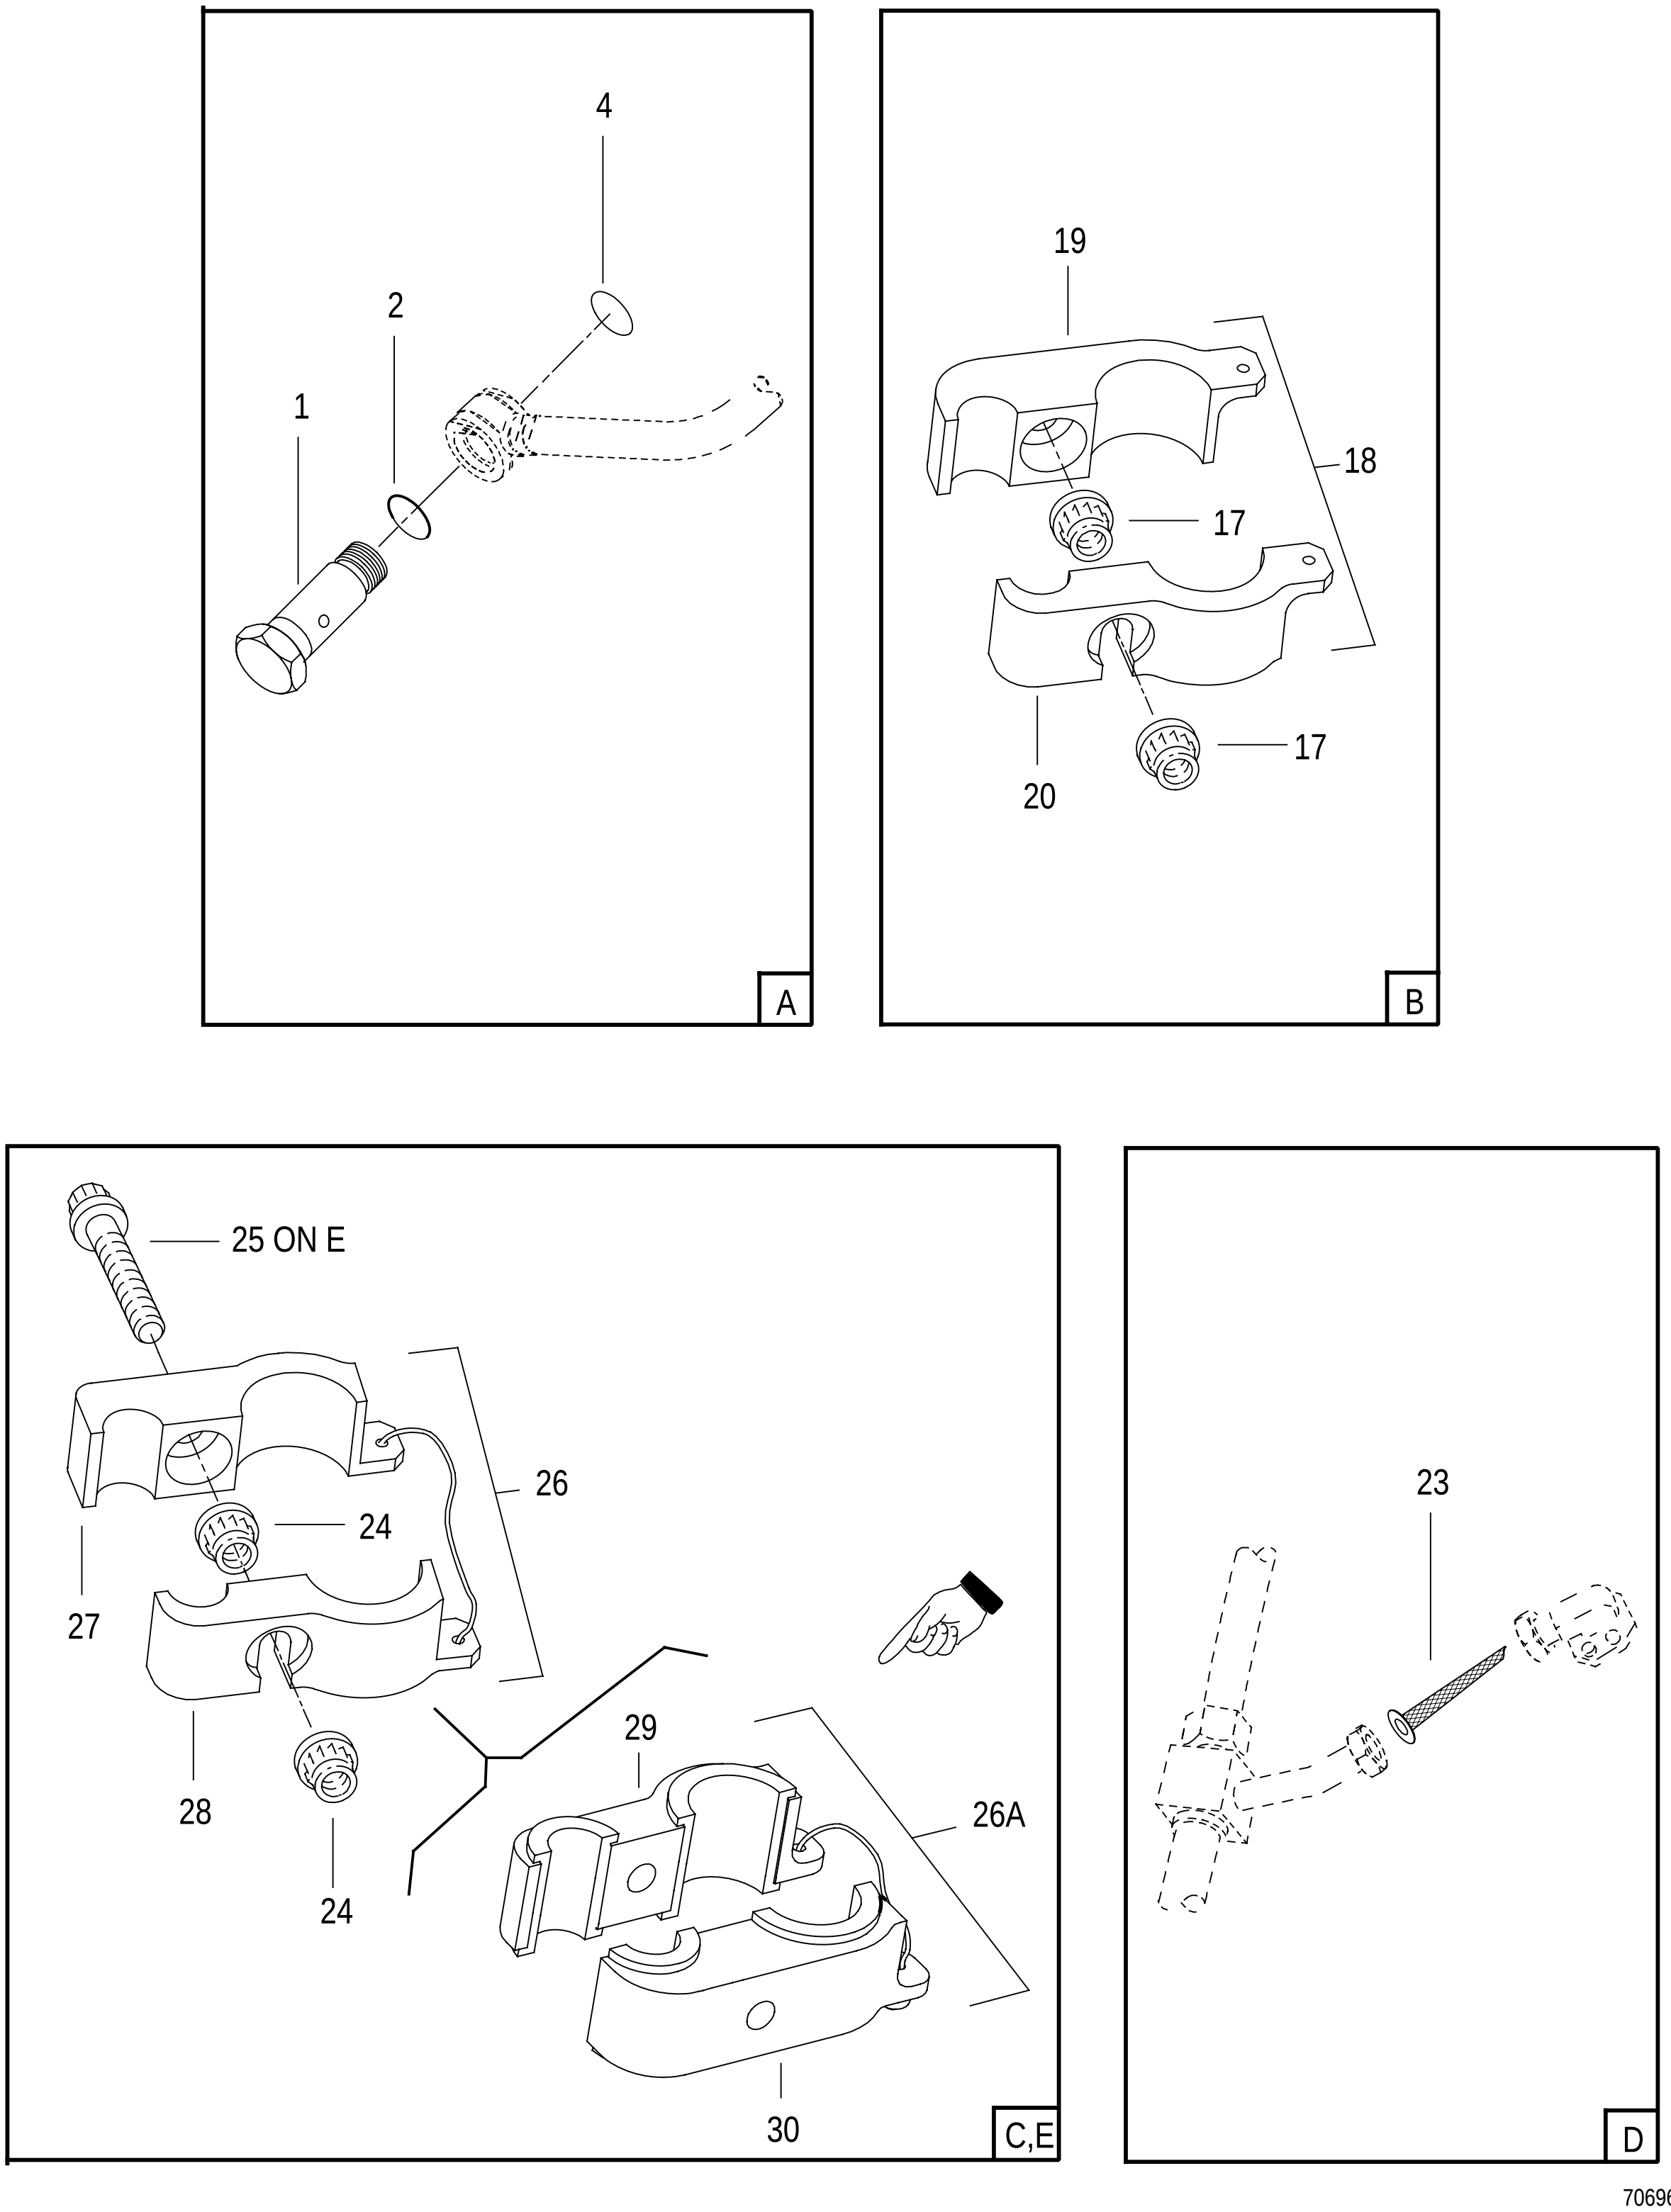


FIGURE 30. GEARBOX AND NO. 2 AND NO. 3 BEARING OIL SUPPLY AND ANTI-SIPHON TUBING
(SHEET 2 OF 3)

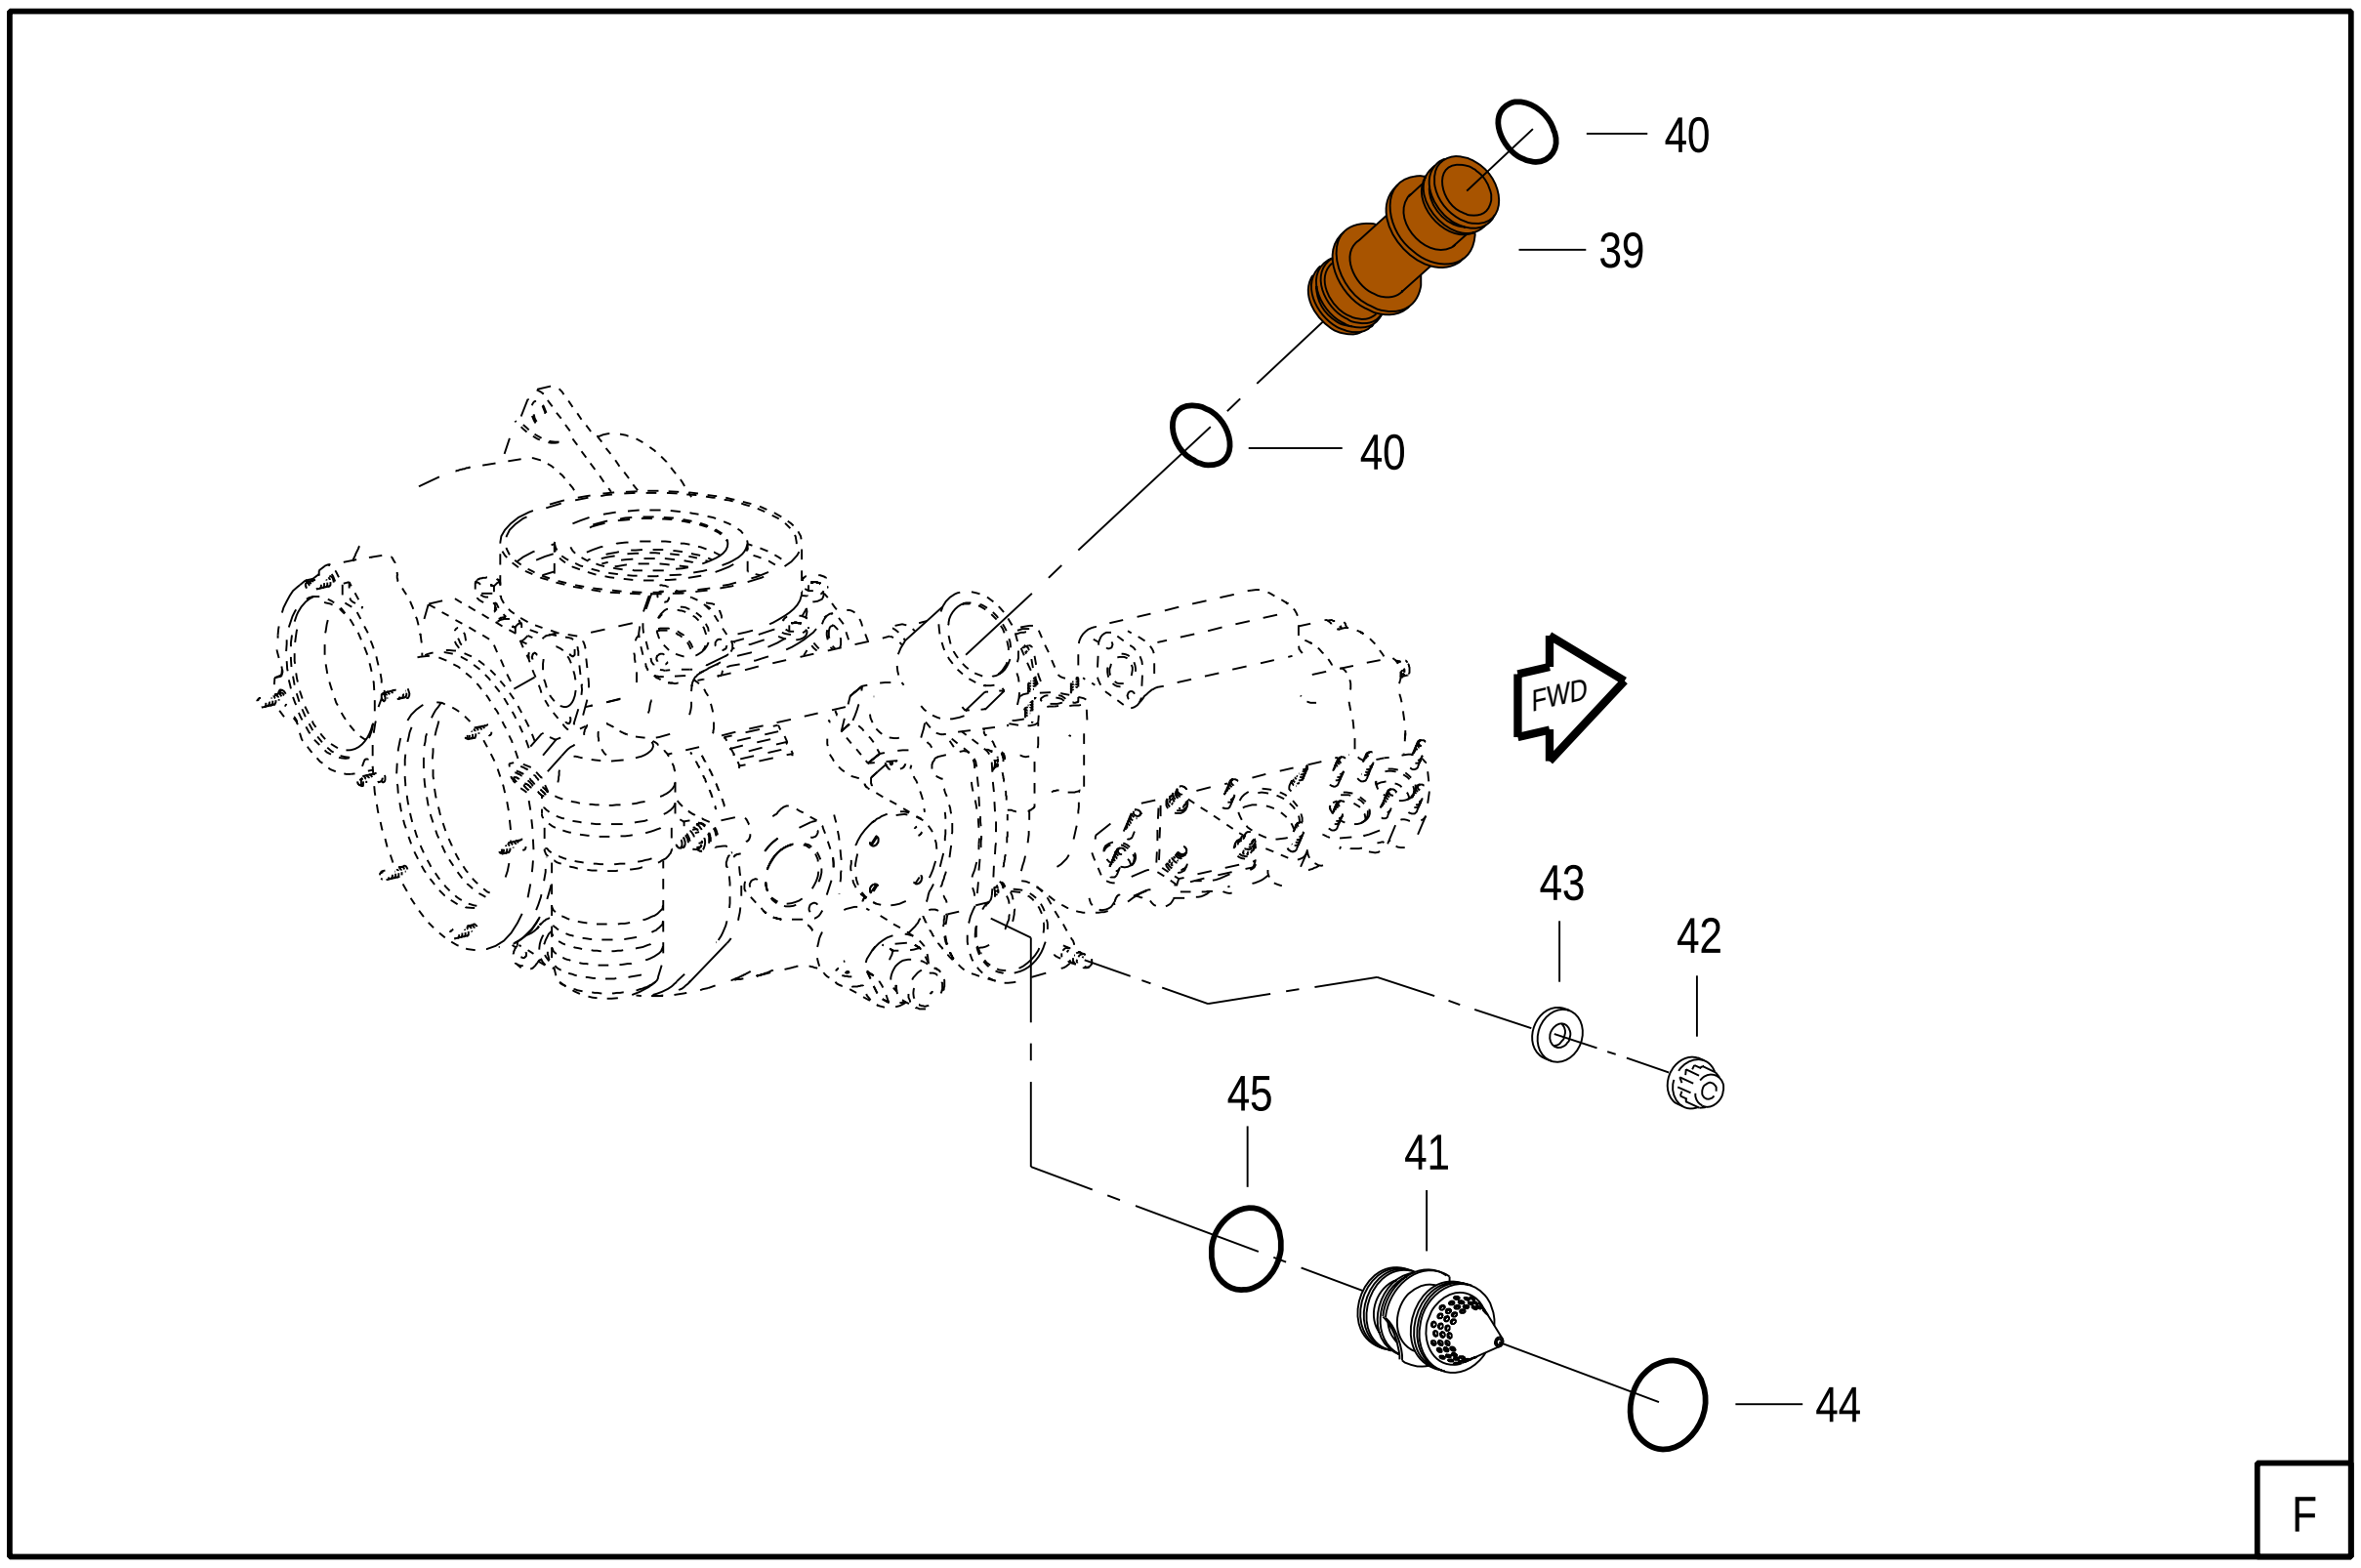


FIGURE 30. GEARBOX AND NO. 2 AND NO. 3 BEARING OIL SUPPLY AND ANTI-SIPHON TUBING
(SHEET 3 OF 3)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
30	NO NUMBER		GEARBOX AND NO. 2 AND NO. 3 BEARING OIL . . . . SUPPLY AND ANTI-SIPHON TUBING SEE FIG. 25-5 FOR NHA	REF		
- 1	4024519	52661	. BOLT-FLUID PASSAGE, DRILLED HEX . . . . 0.4375-20UNJF-3A X 1.180 IN. LONG	1		PAOZZ
- 2	ST1001-06	52661	. PACKING-PREFORMED, BOSS . . . . 0.468 ID X 0.078 IN. DIA ROUND	1		PAOZZ
- 3	4034641	52661	. MANIFOLD-DRAIN, MAIN GEARBOX, ASSY OF	1		PAOZZ
- 4	ST1000-013	52661	. PACKING-PREFORMED . . . . 0.426 ID X 0.070 IN. DIA ROUND	1		PAOZZ
- 5	4075201-01	52661	. TUBE-DRAIN, GEARBOX, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 6	360715	52661	.. WIRE-THRUST . . . . 0.078 DIA X 1.590 IN. LONG	1		PAFZZ
- 7	ST2035-06	52661	.. NUT-TUBE COUPLING, THRUST WIRE . . . . 0.375 TUBE OD X 0.5625-18UNJF-3B	1		PAFZZ
- 8	ST2101-061	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.5625-18UNJF-3A X 0.375 IN. TUBE OD	1		PAOZZ
- 9	MS9966-05	96906	. PACKING	1		PAOZZ
- 10	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	3		PAOZZ
- 11	4076759	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078522	1		PAOBZ
	4078522	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
- 12	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	3		PAOZZ
- 13	4077216	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4078527	1		PAOBZ
	4078527	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
- 14	TR28009-10	29372	.. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG USE ONLY ON 4077216 P&WA PART NO. ST2665-10	1		PAFZZ
	TR28009-12	29372	.. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.000 IN. LONG USE ONLY ON 4078527 P&WA PART NO. ST2665-12	1		PAFZZ
- 15	4074061	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 16	4077215	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 17	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	2		PAOZZ
- 18	4073873	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4073099	1		PAOBZ
	4073099	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
- 19	4073869	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
- 20	4073870	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
- 21	4076855-01	52661	. MANIFOLD-NO. 2 AND NO. 3 BEARING AND . . . . GEARBOX OIL, UPPER, ASSY OF	1	MU	PAOFF
- 21A	4082651-01	52661	. MANIFOLD-NO. 2 AND 3 BEARING AND REARBOX OIL SUPPLY, ASSY OF	1	MV	PAOFF
- 21B	4082817-01	52661	. TUBE-GEARBOX OIL SUPPLY, TOP, ASSY OF	1	MV	PAOFF
- 21C	4082818-01	52661	. TUBE-GEARBOX OIL SUPPLY, BOTTOM, ASSY OF .	1	MV	PAOFF
- 22	4076854-01	52661	. MANIFOLD-OIL SUPPLY, PRESSURE . . . . TRANSMITTER, ASSY OF	1		PAODD
- 23	4024164	52661	. FILTER ELEMENT-NO. 2 AND NO. 3 BEARING	2		PAFBZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	30 - 24		4023115	52661	. NUT OPTION SEE OPTION TABLE	6		PAOZZ
	- 25		4075410	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 1.230 IN. LONG	1		PAOZZ
	- 26		4071584	52661	. CLAMP-BLOCK, GROMMET, ASSY OF WHEN EXH USE 4073095	3		PAOBZ
			4073095	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	3	MU	PAOBZ
	- 26A		4082644-01	52661	. CLAMP-BLOCK, GROMMET, ASSY OF TUBE OD 0.375 X 0.625 PARTIAL BREAKDOWN FOLLOWS	3	MV	PAOBZ
	- 27		4071551	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE USE ONLY ON 4073095	1		XA
	- 28		4071552	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE USE ONLY ON 4073095	1		XA
	- 29		4082645	52661	.. CLAMP HALF-BLOCK, UPPER TUBE OD 0.375 X 0.625 USE ONLY ON 4082644-01	1		XA
	- 30		4082646	52661	.. CLAMP HALF-BLOCK, LOWER TUBE OD 0.375 X 0.625 USE ONLY ON 4082644-01	1		XA
R	- 31		DELETED		...			
R	- 32		DELETED		...			
R	- 33		DELETED		...			
R	- 34		A7277-1	98441	. HOSE-NONMETALLIC 0.250 TUBE X 0.4375-20 P&W PART NO. 4081109-01	1	MU	PAOZZ
	- 35		A7075-1	98441	. HOSE-NONMETALLIC, 85 DEG 0.4375-20 X 6 P&W PART NO. 4080580	1	MU	PAOZZ
	- 36		A7076-1	98441	. HOSE-NONMETALLIC, GEARBOX P&W PART NO. 4080618	1	MU	PAOZZ
	- 36A	=	A7739-1	98441	. HOSE ASSY OF-NONMETALLIC, GEARBOX P&W PART NO. 4082642-01	1	MV	PAOZZ
		=	A9176-1	98441	. HOSE ASSY OF-NONMETALLIC, GEARBOX P&W PART NO. 4085056	1		PAOZZ
	- 37		MS9100-04	96906	. NUT (AP)	1	MU	PAOZZ
	- 37A		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2	MV	PAOZZ
	- 38		4013069	52661	. STRAINER ELEMENT-CONE, GEARBOX	2		PAOBZ
	- 39		4061171	52661	. TUBE-TRANSFER, PACKING 0.870 DIA X 3.710 IN. LONG	1		PAOZZ
	- 40		ST1050-214	52661	. PACKING-PREFORMED 0.984 ID X 0.139 IN. DIA ROUND	2		PAOZZ
	- 41		4058013	52661	. STRAINER ELEMENT-CONE, OIL TANK, ASSY OF	1		PAOBZ
	- 42		4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
	- 43		4028970	52661	. WASHER-FLAT 0.225 ID X 0.750 OD X 0.080 IN. THK (AP)	1		PAOZZ
	- 44		ST1000-131	52661	. PACKING-PREFORMED 1.674 ID X 0.103 IN. DIA ROUND	1		PAOZZ
	- 45		ST1000-128	52661	. PACKING-PREFORMED 1.487 ID X 0.103 IN. DIA ROUND	1		PAOZZ

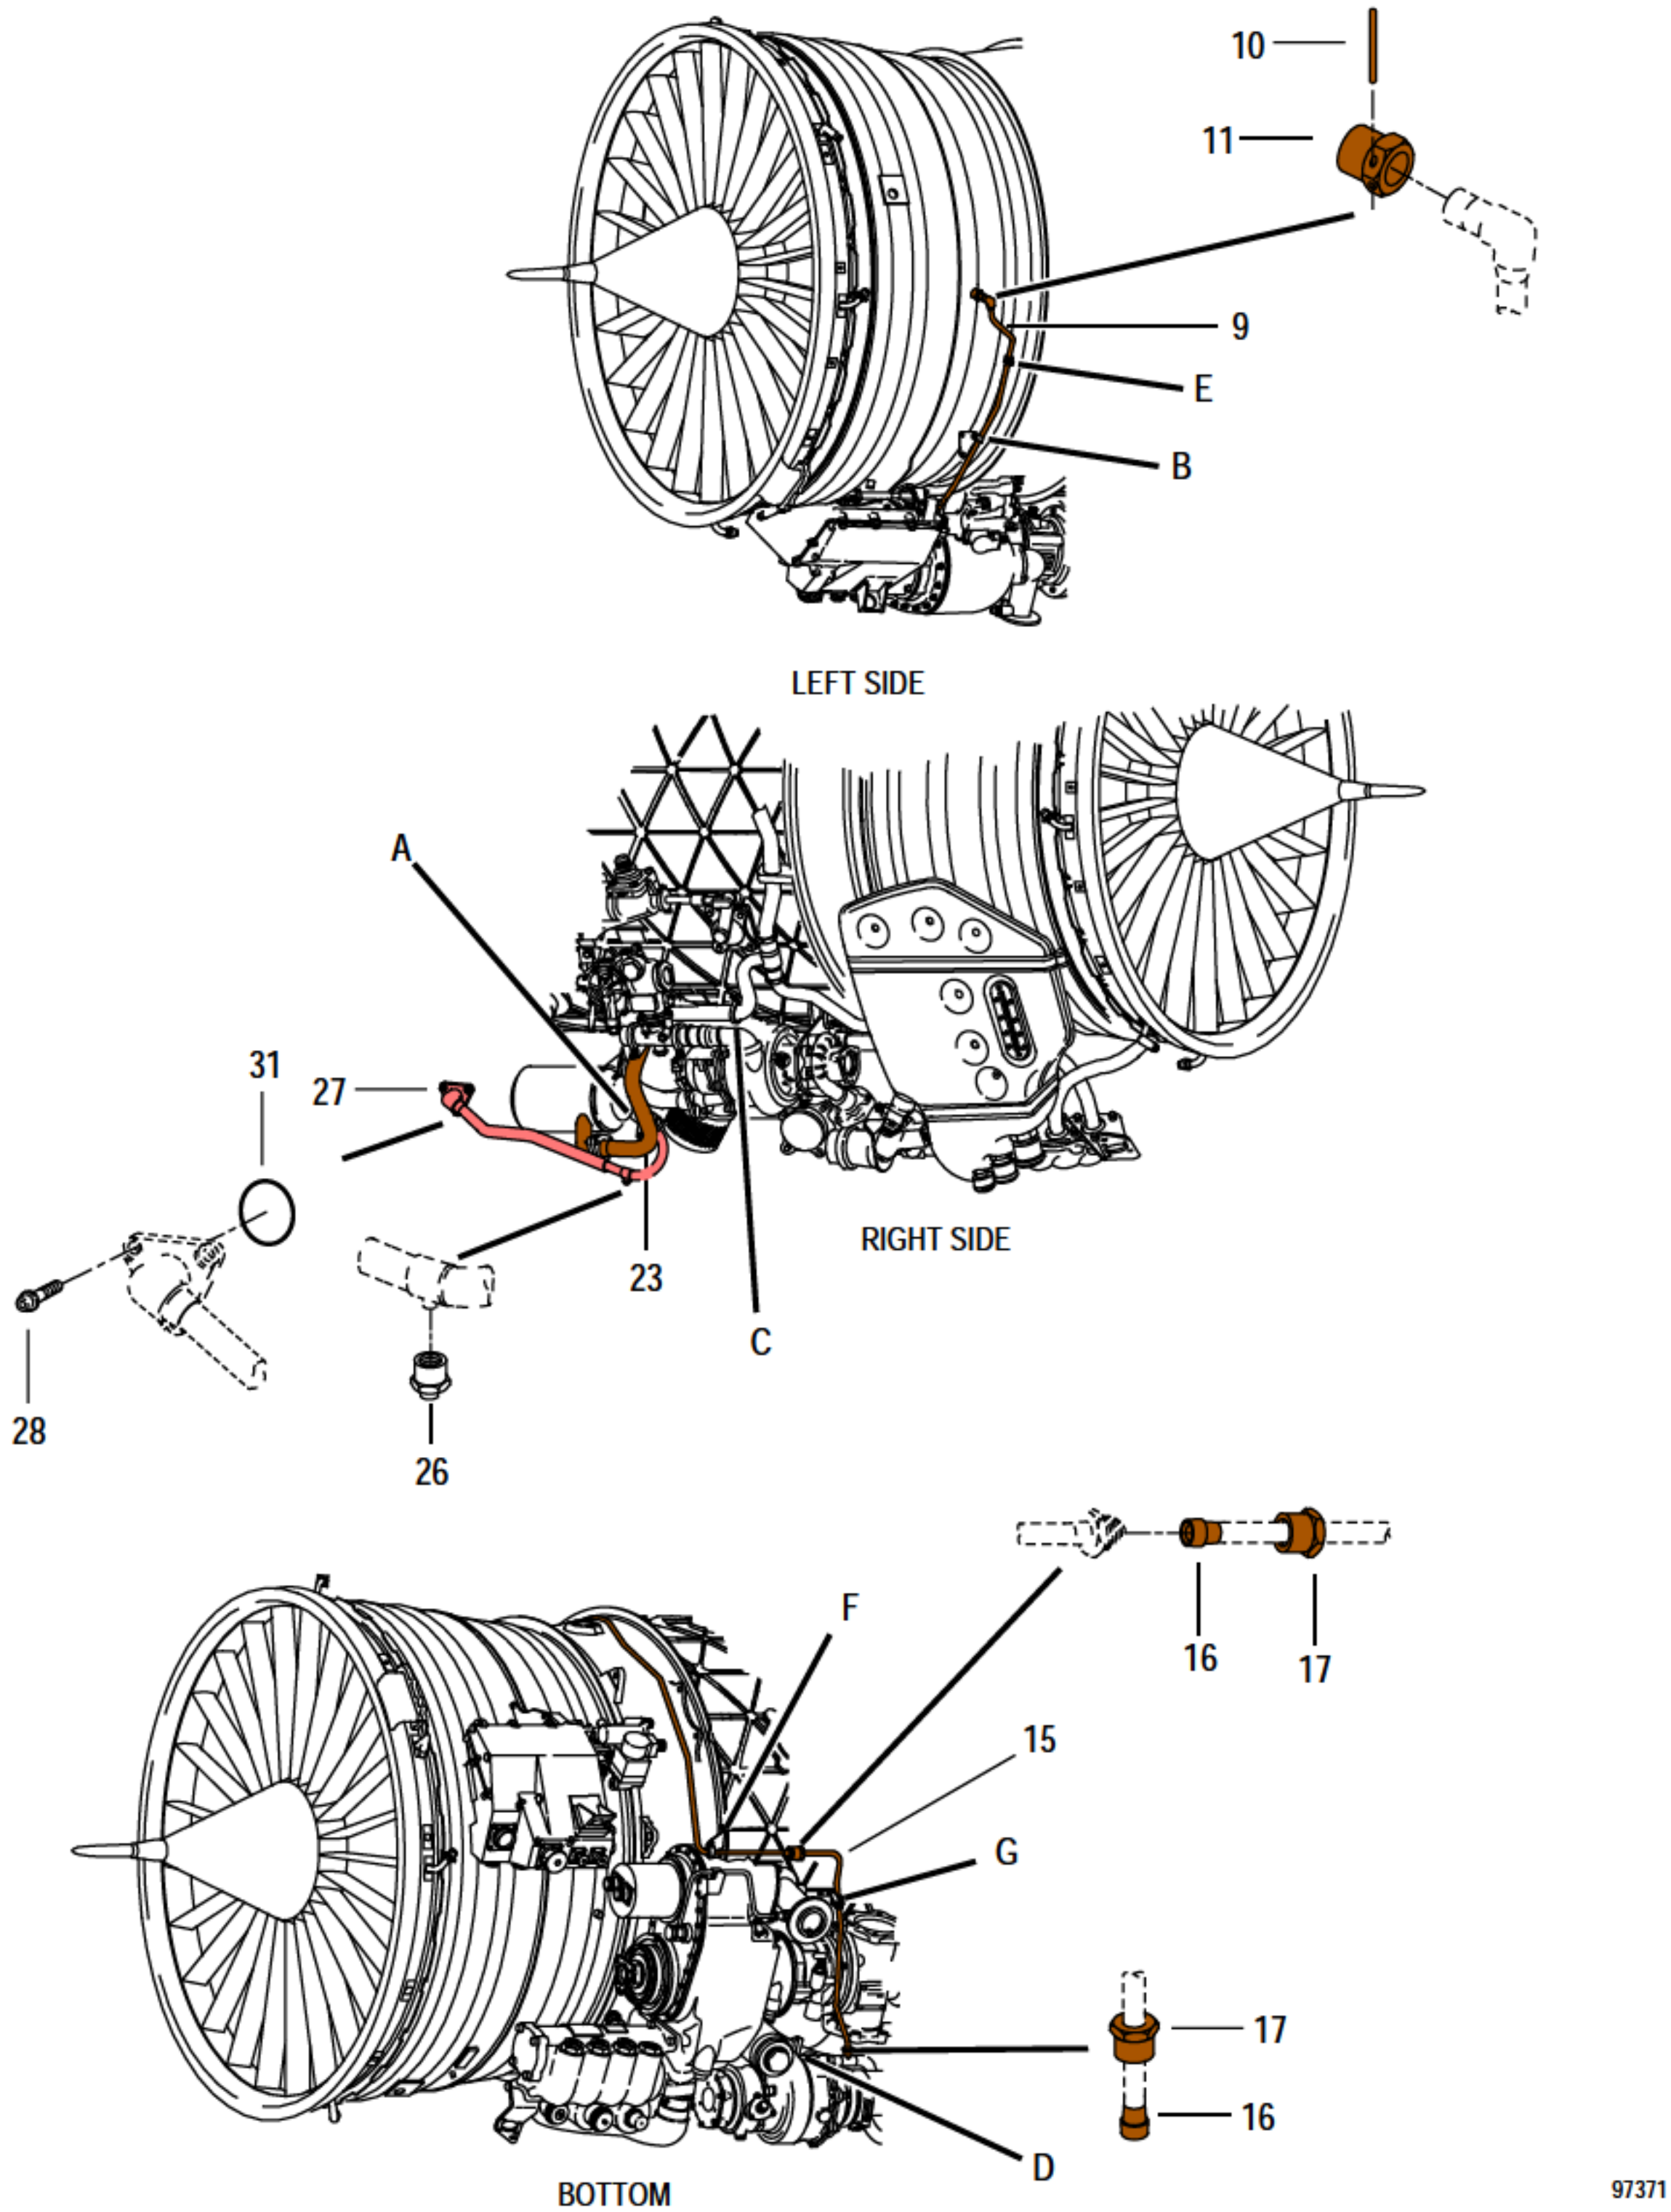


FIGURE 31. DAMPER BEARING AND COLD START VALVE MANIFOLD AND OIL SUPPLY TUBING
(SHEET 1 OF 2)

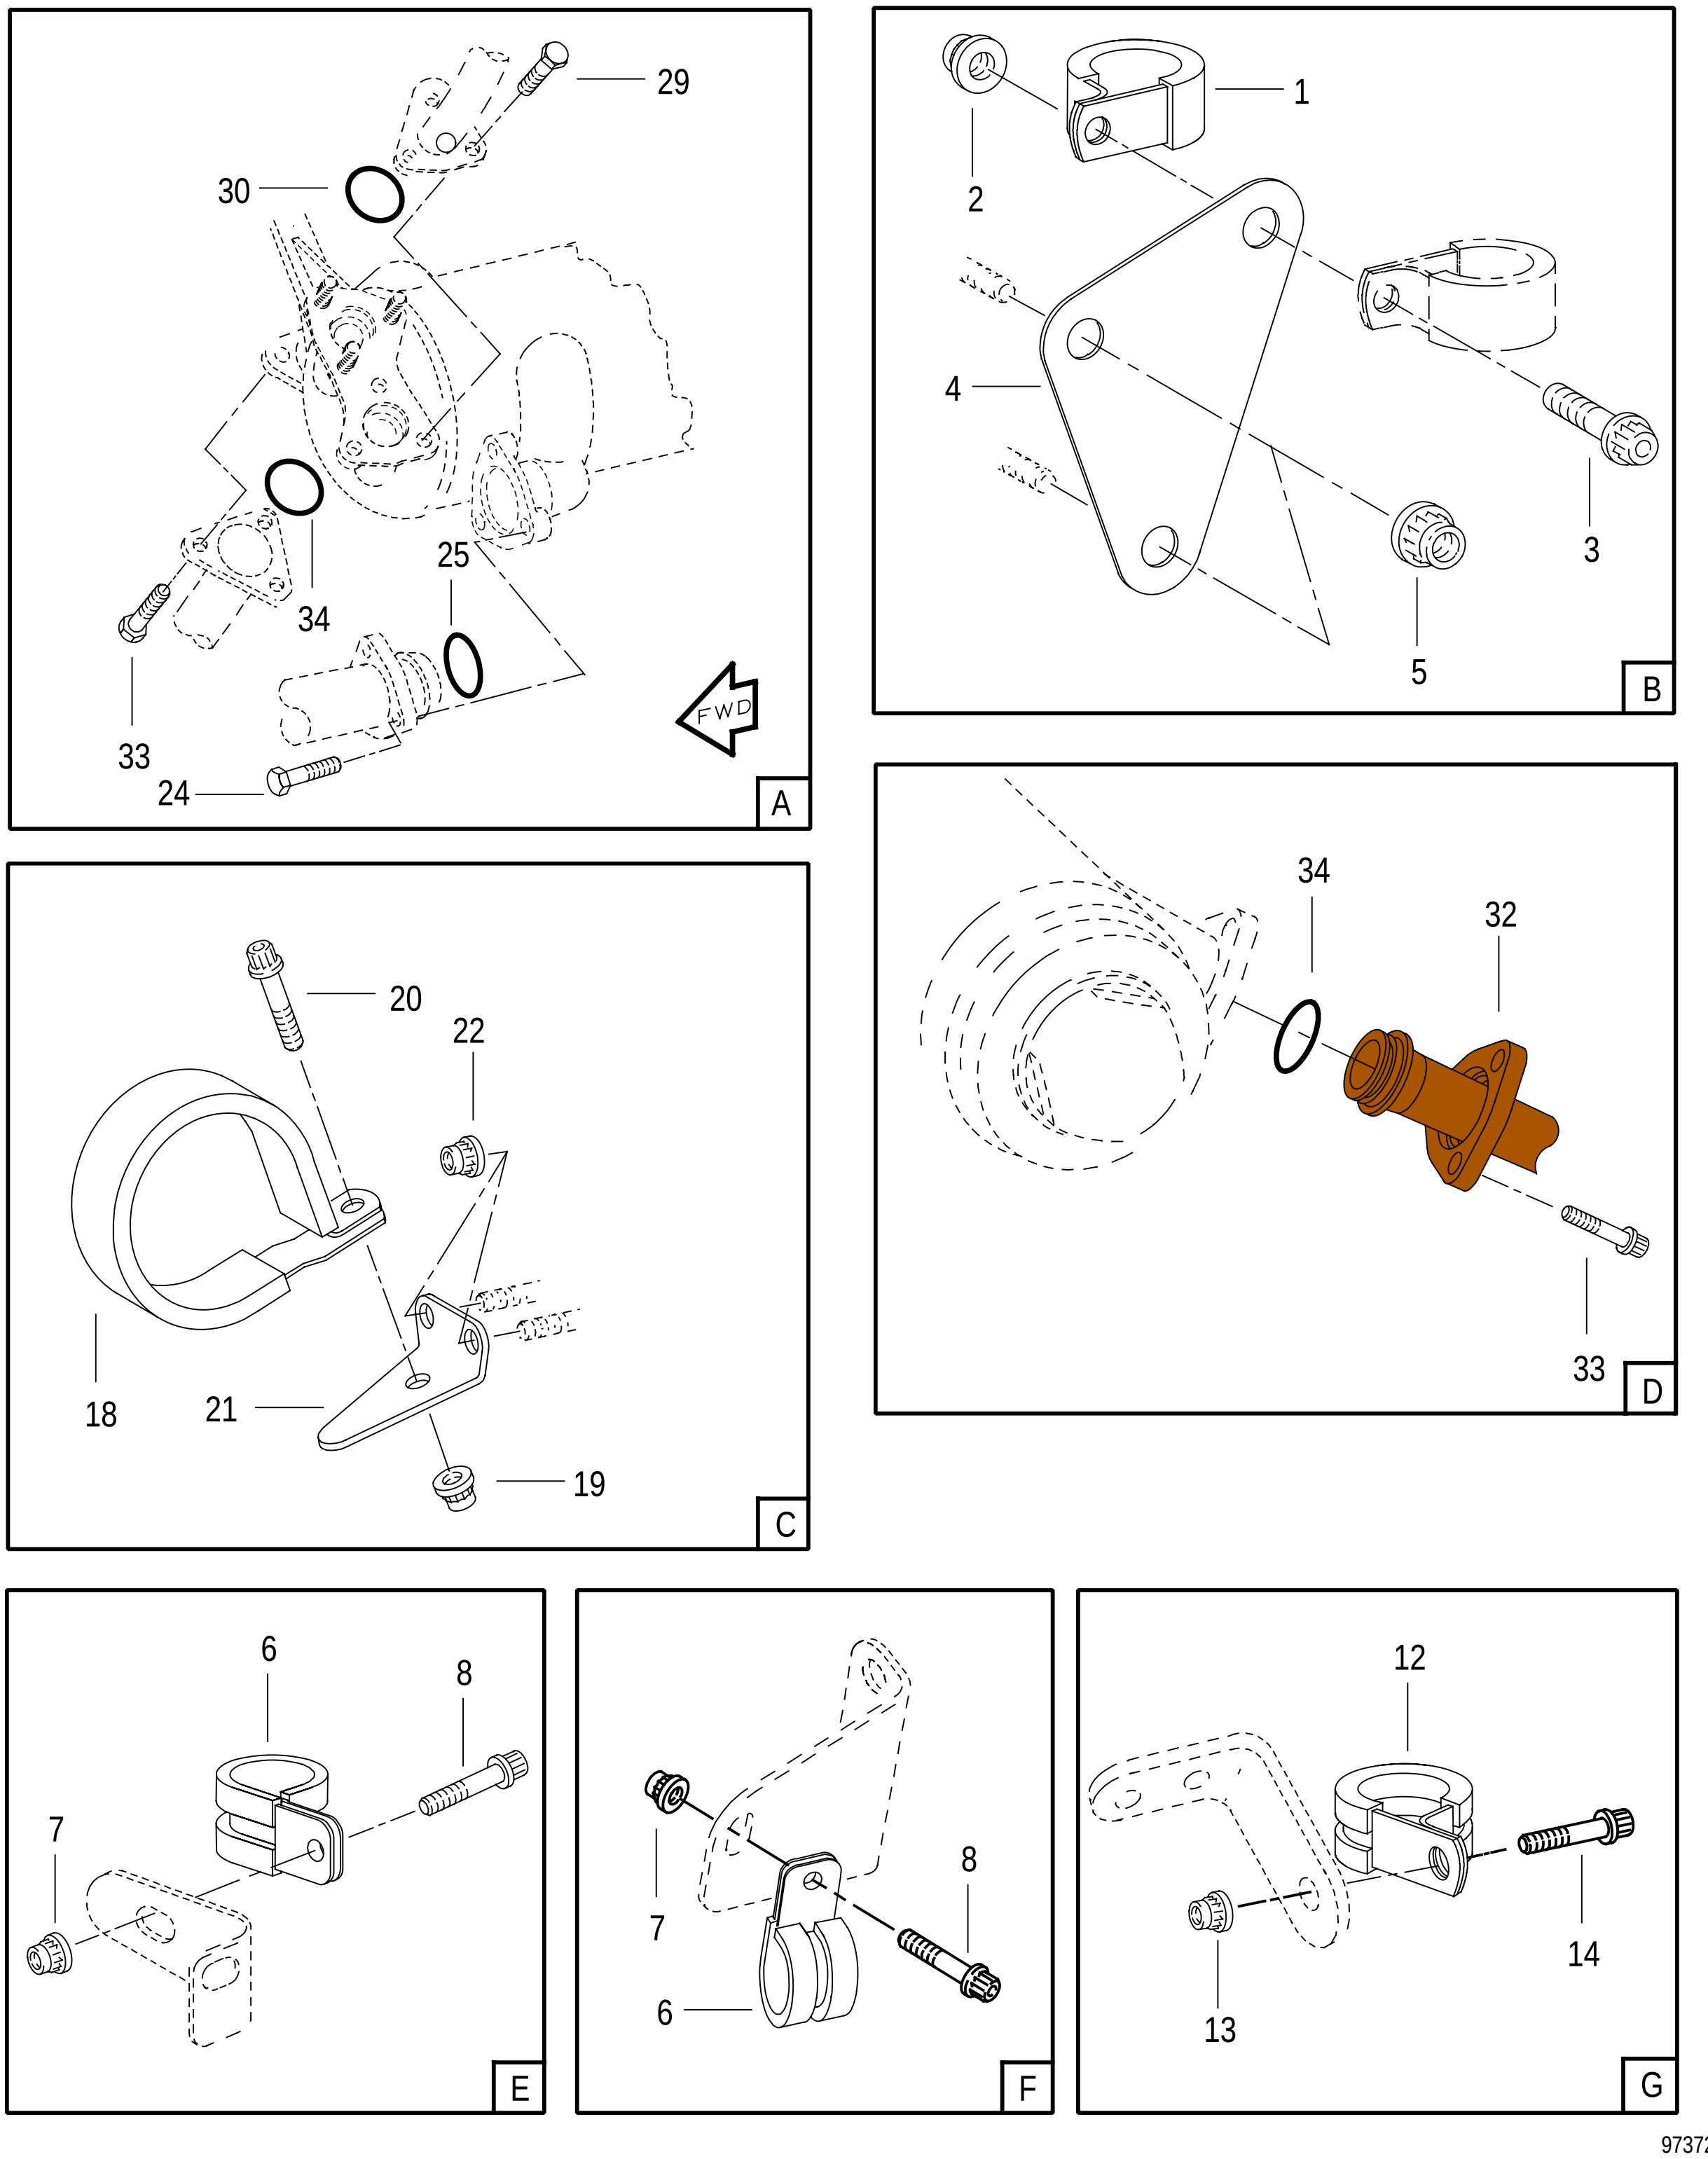


FIGURE 31. DAMPER BEARING AND COLD START VALVE MANIFOLD AND OIL SUPPLY TUBING
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
31	NO NUMBER		DAMPER BEARING AND COLD START VALVE ...... MANIFOLD AND OIL SUPPLY TUBING SEE FIG. 25-6 FOR NHA	REF		
- 1	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-04	1		PAOZZ
	ST1540-04	52661	. CLAMP-LOOP, CUSHION..........................	1		PAOZZ
- 2	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 3	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	1		PAOZZ
- 4	4073665	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 5	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
- 6	ST1540-04	52661	. CLAMP-LOOP, CUSHION..........................	2		PAOZZ
- 7	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 8	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 9	4081039-01	52661	. TUBE-OIL SUPPLY, DAMPER BEARING, ASSY OF .. PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 10	360193	52661	.. WIRE-THRUST .... 0.078 DIA X 1.190 IN. LONG	1		PAFZZ
- 11	ST2121-04	52661	.. NUT-TUBE COUPLING, THRUST WIRE .... 0.4375-20UNJF-3B X 0.250 IN. TUBE OD	1		PAFZZ
- 12	ST1540-04	52661	. CLAMP-LOOP, CUSHION..........................	1		PAOZZ
- 13	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 14	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 15	4081093-01	52661	. TUBE-OIL SUPPLY, DAMPER BEARING, ASSY OF .. PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 16	ST2981-04	52661	.. FERRULE-TUBE FITTING.........................	2		XA
- 17	MS9198-04	96906	.. NUT	2		PAFZZ
- 18	ST2439-14	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-14	1		PAOZZ
	ST1540-14	52661	. CLAMP-LOOP, CUSHION..........................	1		PAOZZ
- 19	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 20	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 21	4071676	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 22	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
- 23	4076858-01	52661	. TUBE-OIL SUPPLY, COLD START VALVE, ASSY OF .	1		PAOFF
- 24	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	3		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
31 - 25	4069414	52661	. PACKING WITH RETAINER 0.850 ID X 1.385 OD X 0.125 IN. THK	1		PAOZZ
- 26	MS9314-04	96906	. CAP ASSY	1		PAOZZ
- 27	= 4075459	52661	. HOSE OPTION SEE OPTION TABLE	1		PAOZZ
	= A9156-1	98441	. HOSE-NONMETALLIC 0.625 IN. P&W PART NO. 4085037	1		PAOZZ
- 28	ST1420-08	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	3		PAOZZ
- 29	ST2150-020	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	3		PAOZZ
- 30	MS9966-10	96906	. PACKING	1		PAOZZ
- 31	MS9967-018	96906	. PACKING	1		PAOZZ
- 32	4077908-01	52661	. MANIFOLD-OIL SUPPLY, COLD START VALVE, ASSY OF	1		PAOFF
R - 33	ST1420-10	52661	. BOLT-MACHINE, DOUBLE HEX R 0.250-28UNJF-3A X 0.750 IN. LONG (AP)	6		PAOZZ
- 34	4069414	52661	. PACKING WITH RETAINER 0.850 ID X 1.385 OD X 0.125 IN. THK	2		PAOZZ

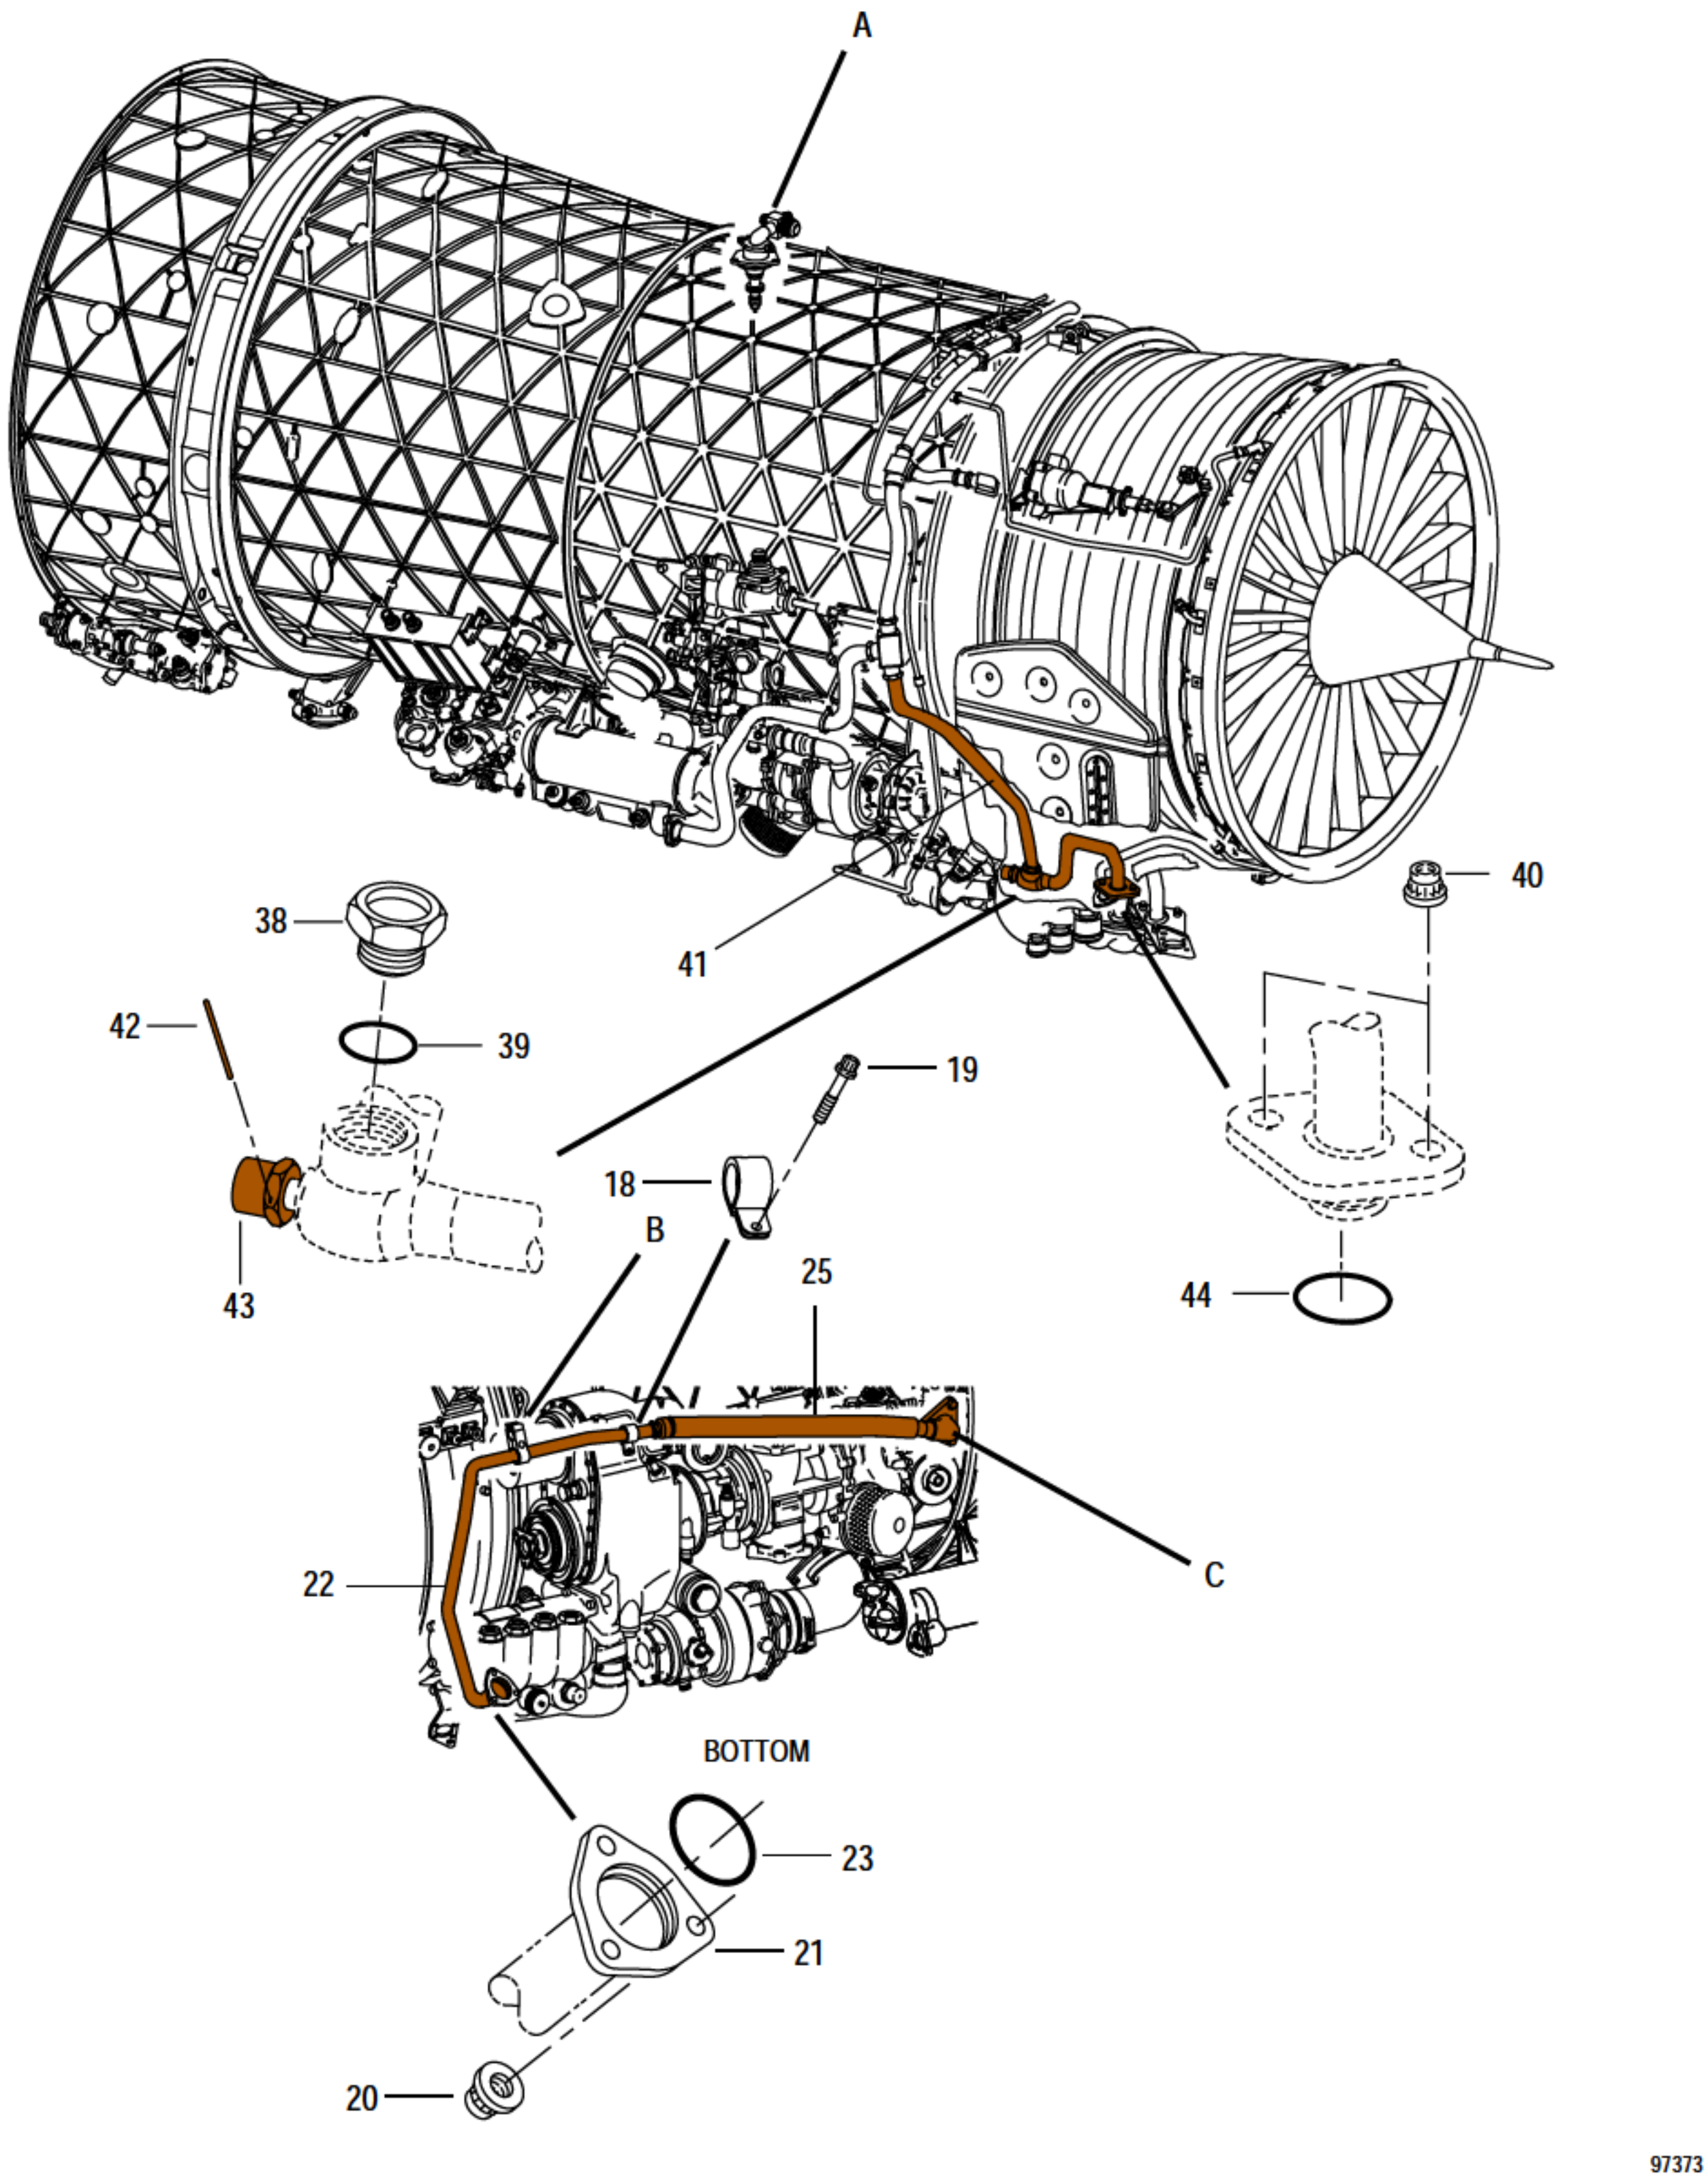


FIGURE 32. NO. 4 BEARING OIL, SCAVENGE AND PRESSURE TRANSMITTER SUPPLY TUBING
(SHEET 1 OF 2)

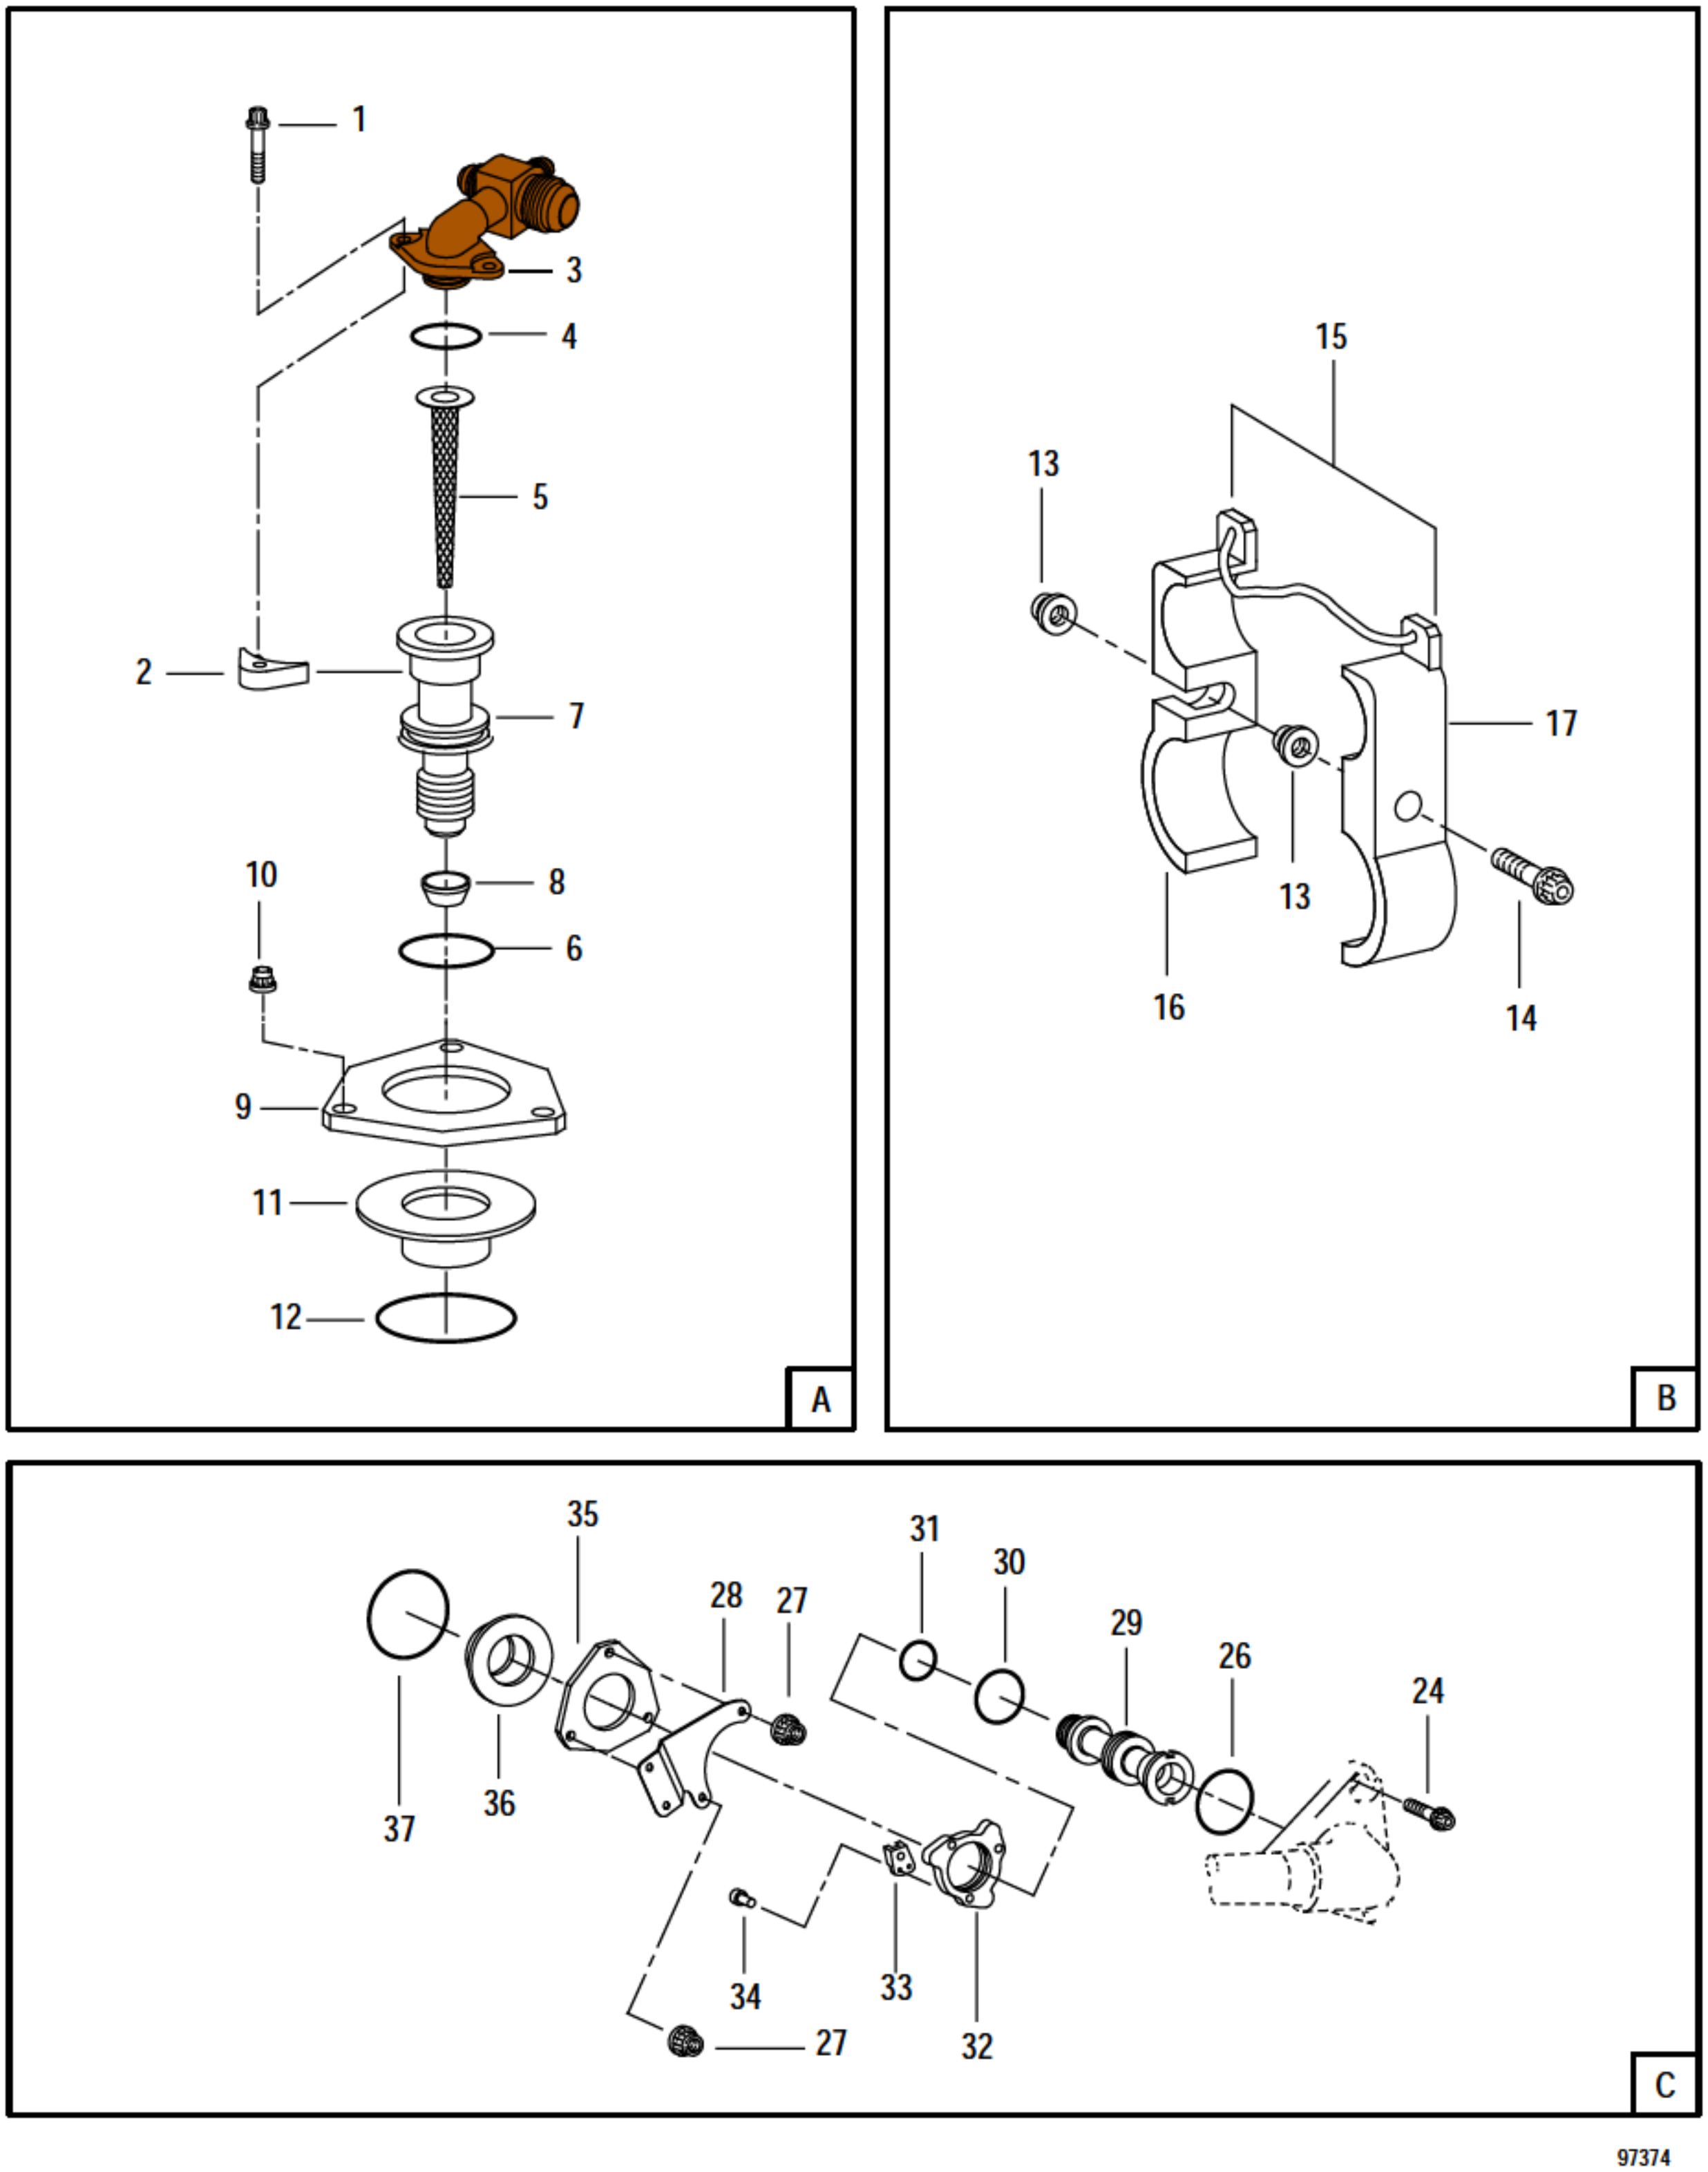


FIGURE 32. NO. 4 BEARING OIL, SCAVENGE AND PRESSURE TRANSMITTER SUPPLY TUBING (SHEET 2 OF 2)

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	32		NO NUMBER		NO. 4 BEARING OIL, SCAVENGE AND PRESSURE . . TRANSMITTER SUPPLY TUBING SEE FIG. 25-7 FOR NHA	REF		
	- 1		111167-012	56878	. BOLT-SELF-LOCKING, HEX . . . . 0.190-32UNJF-3A X 0.375 IN. LONG P&W PART NO. ST2276-012	2		PAOZZ
	- 2		4011887	52661	. NUT-PLAIN, PLATE, NO. 4 BEARING TUBE	2		PAOBZ
	- 3		4074052-01	52661	. MANIFOLD-OIL SUPPLY, NO. 4 BEARING, ASSY OF	1		PAODD
	- 4		ST1000-016	52661	. PACKING-PREFORMED . . . . 0.614 ID X 0.070 IN. DIA ROUND	1		PAFZZ
	- 5		4018387	52661	. FILTER ELEMENT-NO. 4 AND 5 BEARING . . . . PRESSURE MANIFOLD	1		PAOBZ
	- 6		MS9386-119	96906	. PACKING	1		PAOZZ
R	- 7		4071507	52661	. TUBE-TRANSFER, PACKING . . . . 0.8125-16UNJF-3A X 2.560 IN. LONG	1		PAFZZ
R	- 8		ST2284-09	52661	. GASKET OPTION . . . . SEE OPTION TABLE	1		PAOZZ
	- 9		4069559	52661	. PLATE-RETAINING, TUBE, FAN DUCT	1		PAOZZ
	- 10		4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	3		PAOZZ
	- 11		4036467	52661	. HOUSING-TRANSFER, NO. 4 BEARING TUBE	1		PAOBZ
	- 12		MS9386-130	96906	. PACKING	1		PAOZZ
	- 13		4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	2		PAOZZ
	- 14		4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG	1		PAOZZ
	- 15		4071643	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . WHEN EXH USE 4073098	1		PAOBZ
			4073098	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
	- 16		4071642	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 17		4071561	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 18		ST2439-12	52661	. CLAMP ASSY-LOOP, CUSHION . . . . WHEN EXH USE ST1540-12	1		PAOZZ
			ST1540-12	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	- 19		ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP) REPLACES ST2015-016	1		PAOZZ
	- 20		4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	3		PAOZZ
	- 21		ST2028-20	52661	. PLATE-RETAINING, TUBE, 3 HOLE	1		PAOZZ
	- 22		4072703-01	52661	. TUBE-SCAVENGE, NO. 4 BEARING, ASSY OF	1		PAOFF
	- 23		AS3209-218	81343	. PACKING-PREFORMED	1		PAOZZ
	- 24		ST2015-024	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.750 IN. LONG	3		PAOZZ
	- 25	=	4072103	52661	. HOSE OPTION . . . . SEE OPTION TABLE	1		PAOZZ
		=	4078475	52661	. HOSE OPTION . . . . SEE OPTION TABLE	1		PAOZZ
		=	A9166-1	98441	. HOSE-NONMETALLIC . . . . 0.625 IN. P&W PART NO. 4085055	1		PAOZZ
	- 26		ST1000-019	52661	. PACKING-PREFORMED . . . . 0.801 ID X 0.070 IN. DIA ROUND	1		PAOZZ
	- 27		4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	3		PAOZZ
	- 28		4075931	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
	- 29		4036469	52661	. TUBE-TRANSFER, PACKING . . . . 1.0625-12 X 3.400 IN. LONG	1		PAOBZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
32 - 30		MS9386-123	96906	. PACKING	1		PAOZZ
- 31		ST1001-12	52661	. PACKING-PREFORMED 0.924 ID X 0.116 IN. DIA ROUND	1		PAOZZ
- 32		4036085	52661	. PLATE-LOCK, NO. 4 BEARING TUBE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
- 33	=	4046367	52661	.. NUT OPTION SEE OPTION TABLE	3		PAFZZ
	=	ST5030-09	52661	.. NUT OPTION SEE OPTION TABLE	3		PAFZZ
- 34	=	352194	52661	.. RIVET-TUBULAR, UNIVERSAL 0.094 DIA X 0.250 IN. LONG (AP)	2		PAFZZ
	=	453331	52661	.. RIVET-TUBULAR, UNIVERSAL 0.094 DIA X 0.188 IN. LONG (AP)	2		XA
	=	495996	52661	.. RIVET-TUBULAR, UNIVERSAL 0.094 DIA X 0.219 IN. LONG (AP)	2		XA
- 35		4069456	52661	. PLATE-RETAINING, TUBE, FAN DUCT	1		PAOZZ
- 36		4036095	52661	. HOUSING-TRANSFER TUBE	1		PAOBZ
- 37		MS9386-135	96906	. PACKING	1		PAOZZ
- 38		MS9902-08	96906	. PLUG	1		PAOZZ
- 39		ST1051-08	52661	. PACKING-PREFORMED 0.644 ID X 0.087 IN. DIA ROUND	1		PAOZZ
- 40		4023115	52661	. NUT OPTION SEE OPTION TABLE	2		PAOZZ
- 41		4076853-01	52661	. MANIFOLD-OIL SUPPLY, PRESSURE TRANSMITTER, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 42		360193	52661	.. WIRE-THRUST 0.078 DIA X 1.190 IN. LONG	1		PAFZZ
- 43		ST2035-04	52661	.. NUT-TUBE COUPLING, THRUST WIRE 0.250 TUBE OD X 0.4375-20UNJF-3B	1		PAFZZ
- 44		AS3209-016	81343	. PACKING-PREFORMED	1		PAOZZ

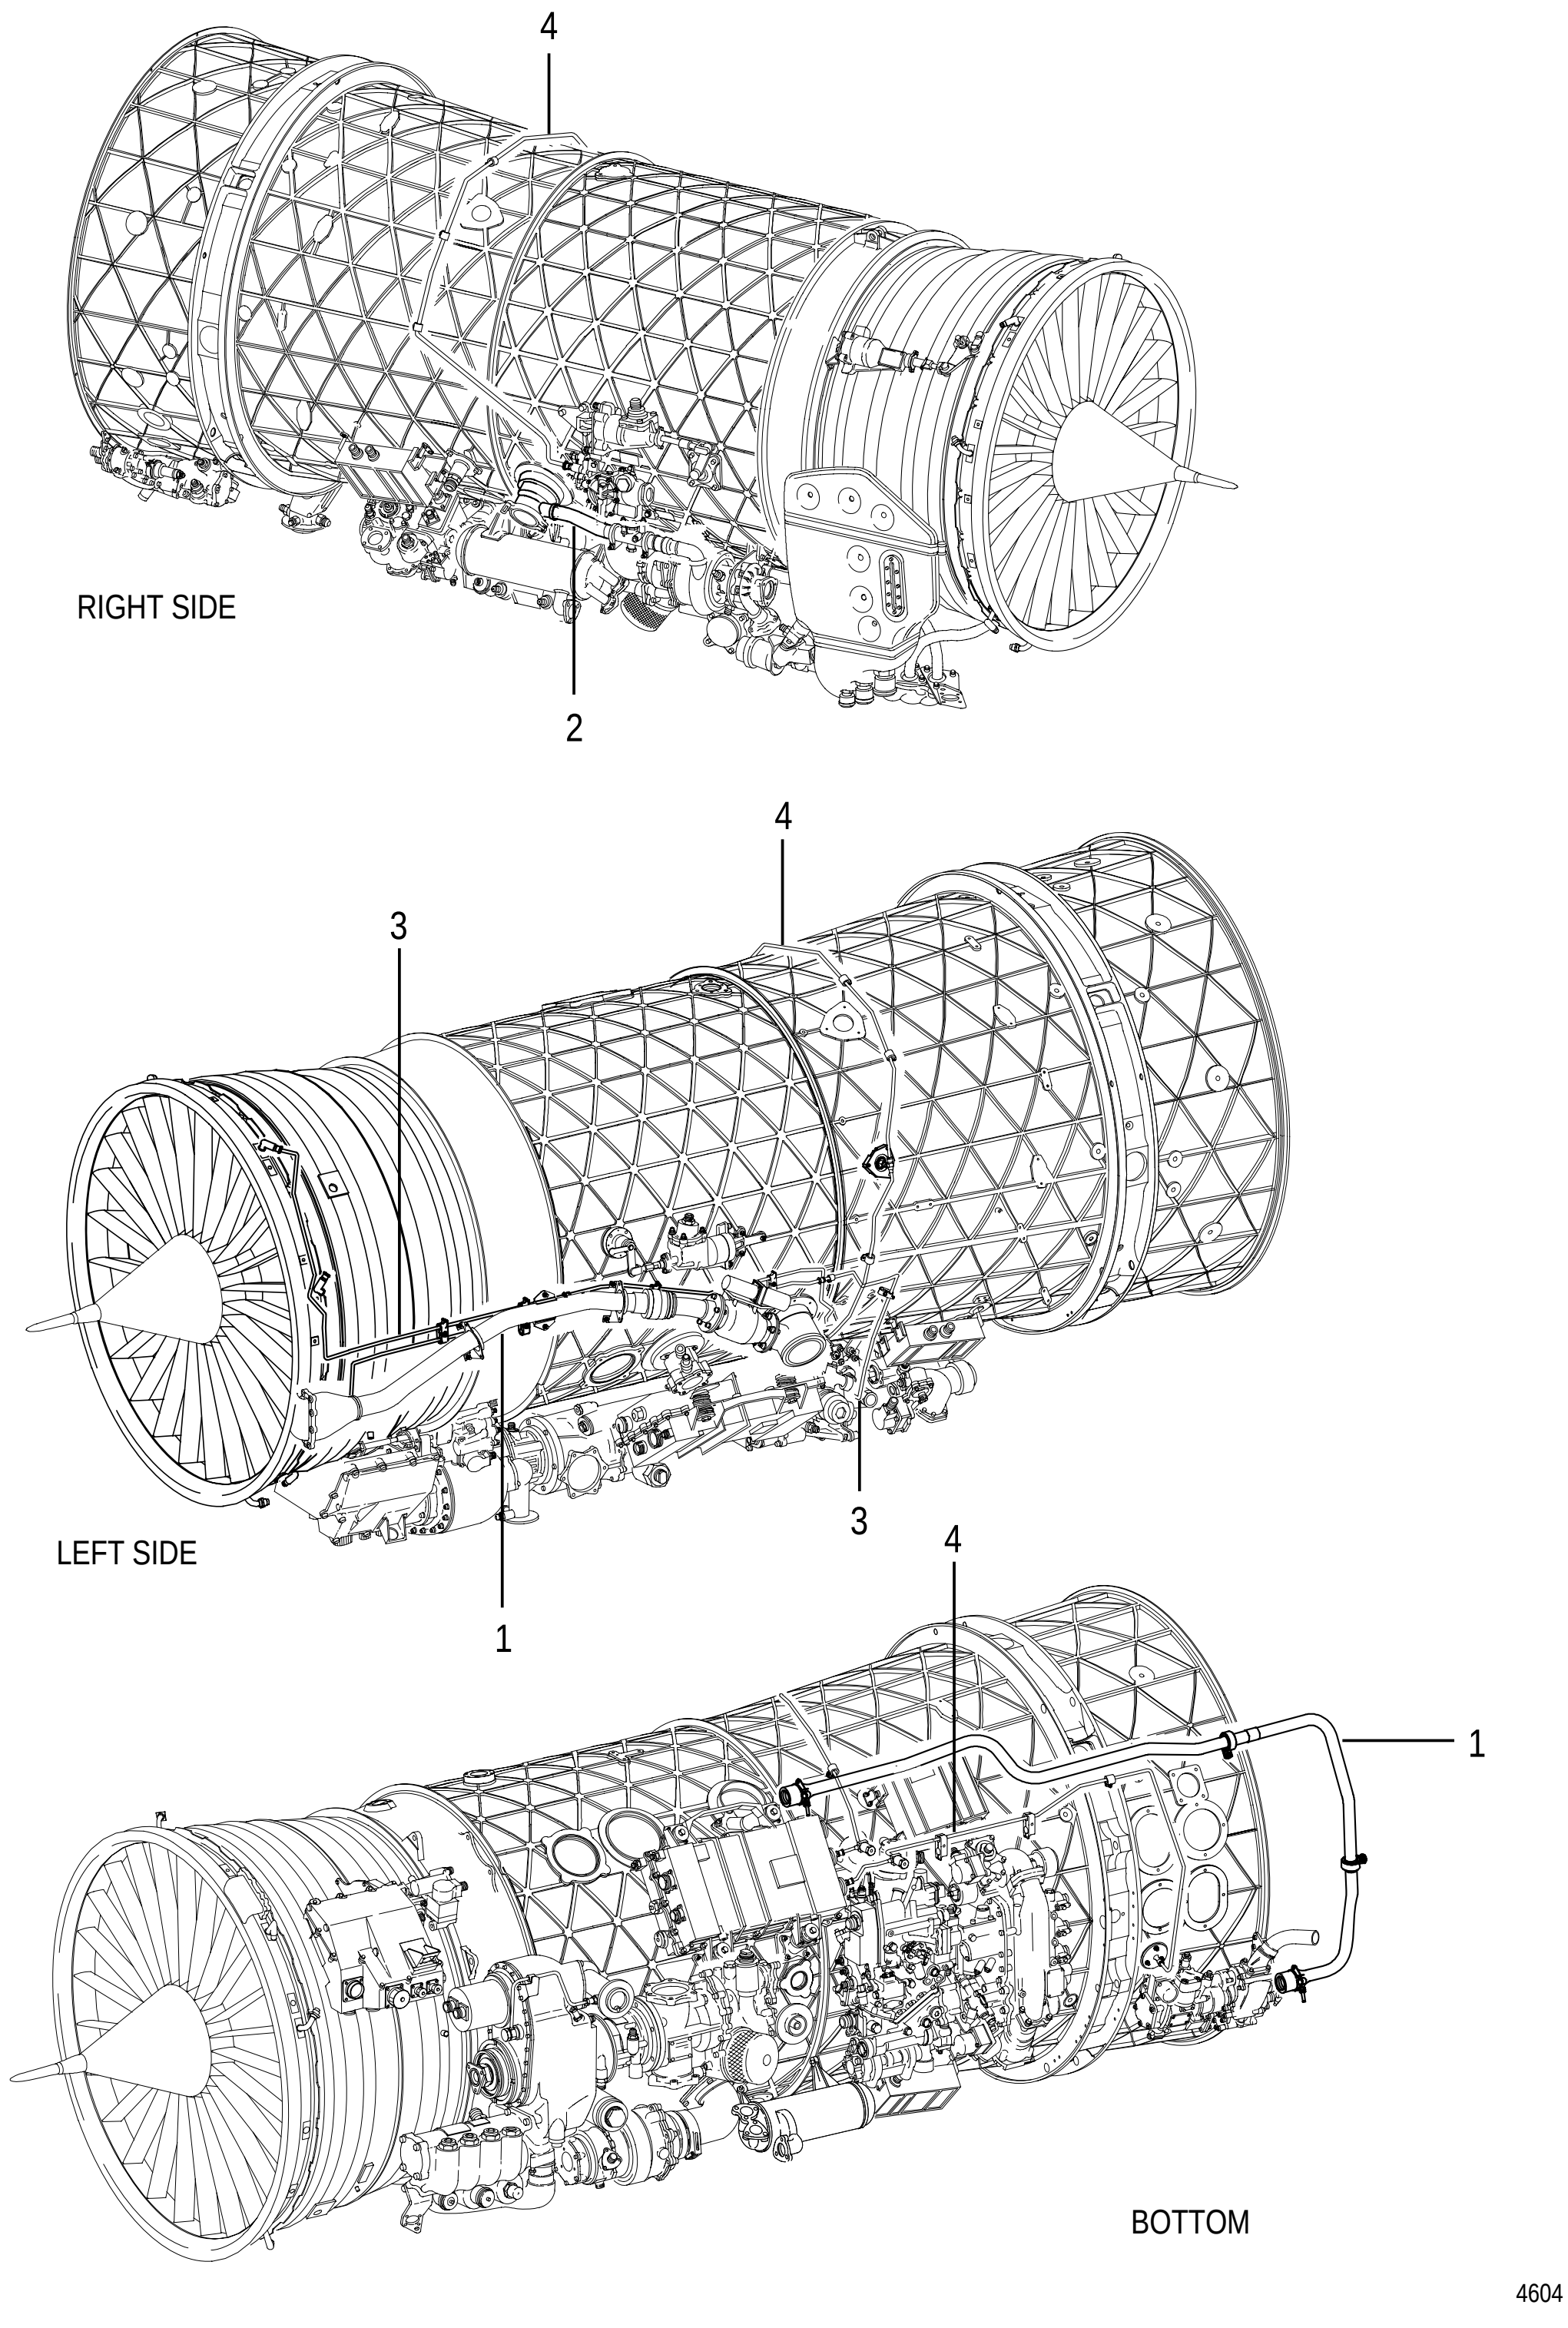


FIGURE 33. AIR TUBING

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
33	NO NUMBER		AIR TUBING . . . . SEE FIG. 1-4 FOR NHA	REF		
- 1	NO NUMBER		. ANTI-ICING MANIFOLD, VALVE AND . . . . CONVERGENT EXHAUST NOZZLE CONTROL TUBING SEE FIG. 34 FOR DETAIL PARTS	REF		
- 2	NO NUMBER		. AUGMENTOR FUEL PUMP AIR SUPPLY AND . . . . . . VENT MANIFOLDS SEE FIG. 35 FOR DETAIL PARTS	REF		
- 3	NO NUMBER		. PS2 AIR TUBING . . . . SEE FIG. 36 FOR DETAIL PARTS	REF		
- 4	NO NUMBER		. AUGMENTOR FUEL PUMP CONTROLLER . . . . PRESSURE BURNER TUBE AND SENSOR PRESSURE AND DEEC PT6 MANIFOLDS AND TOTAL PRESSURE PROBE SEE FIG. 37 FOR DETAIL PARTS	REF		

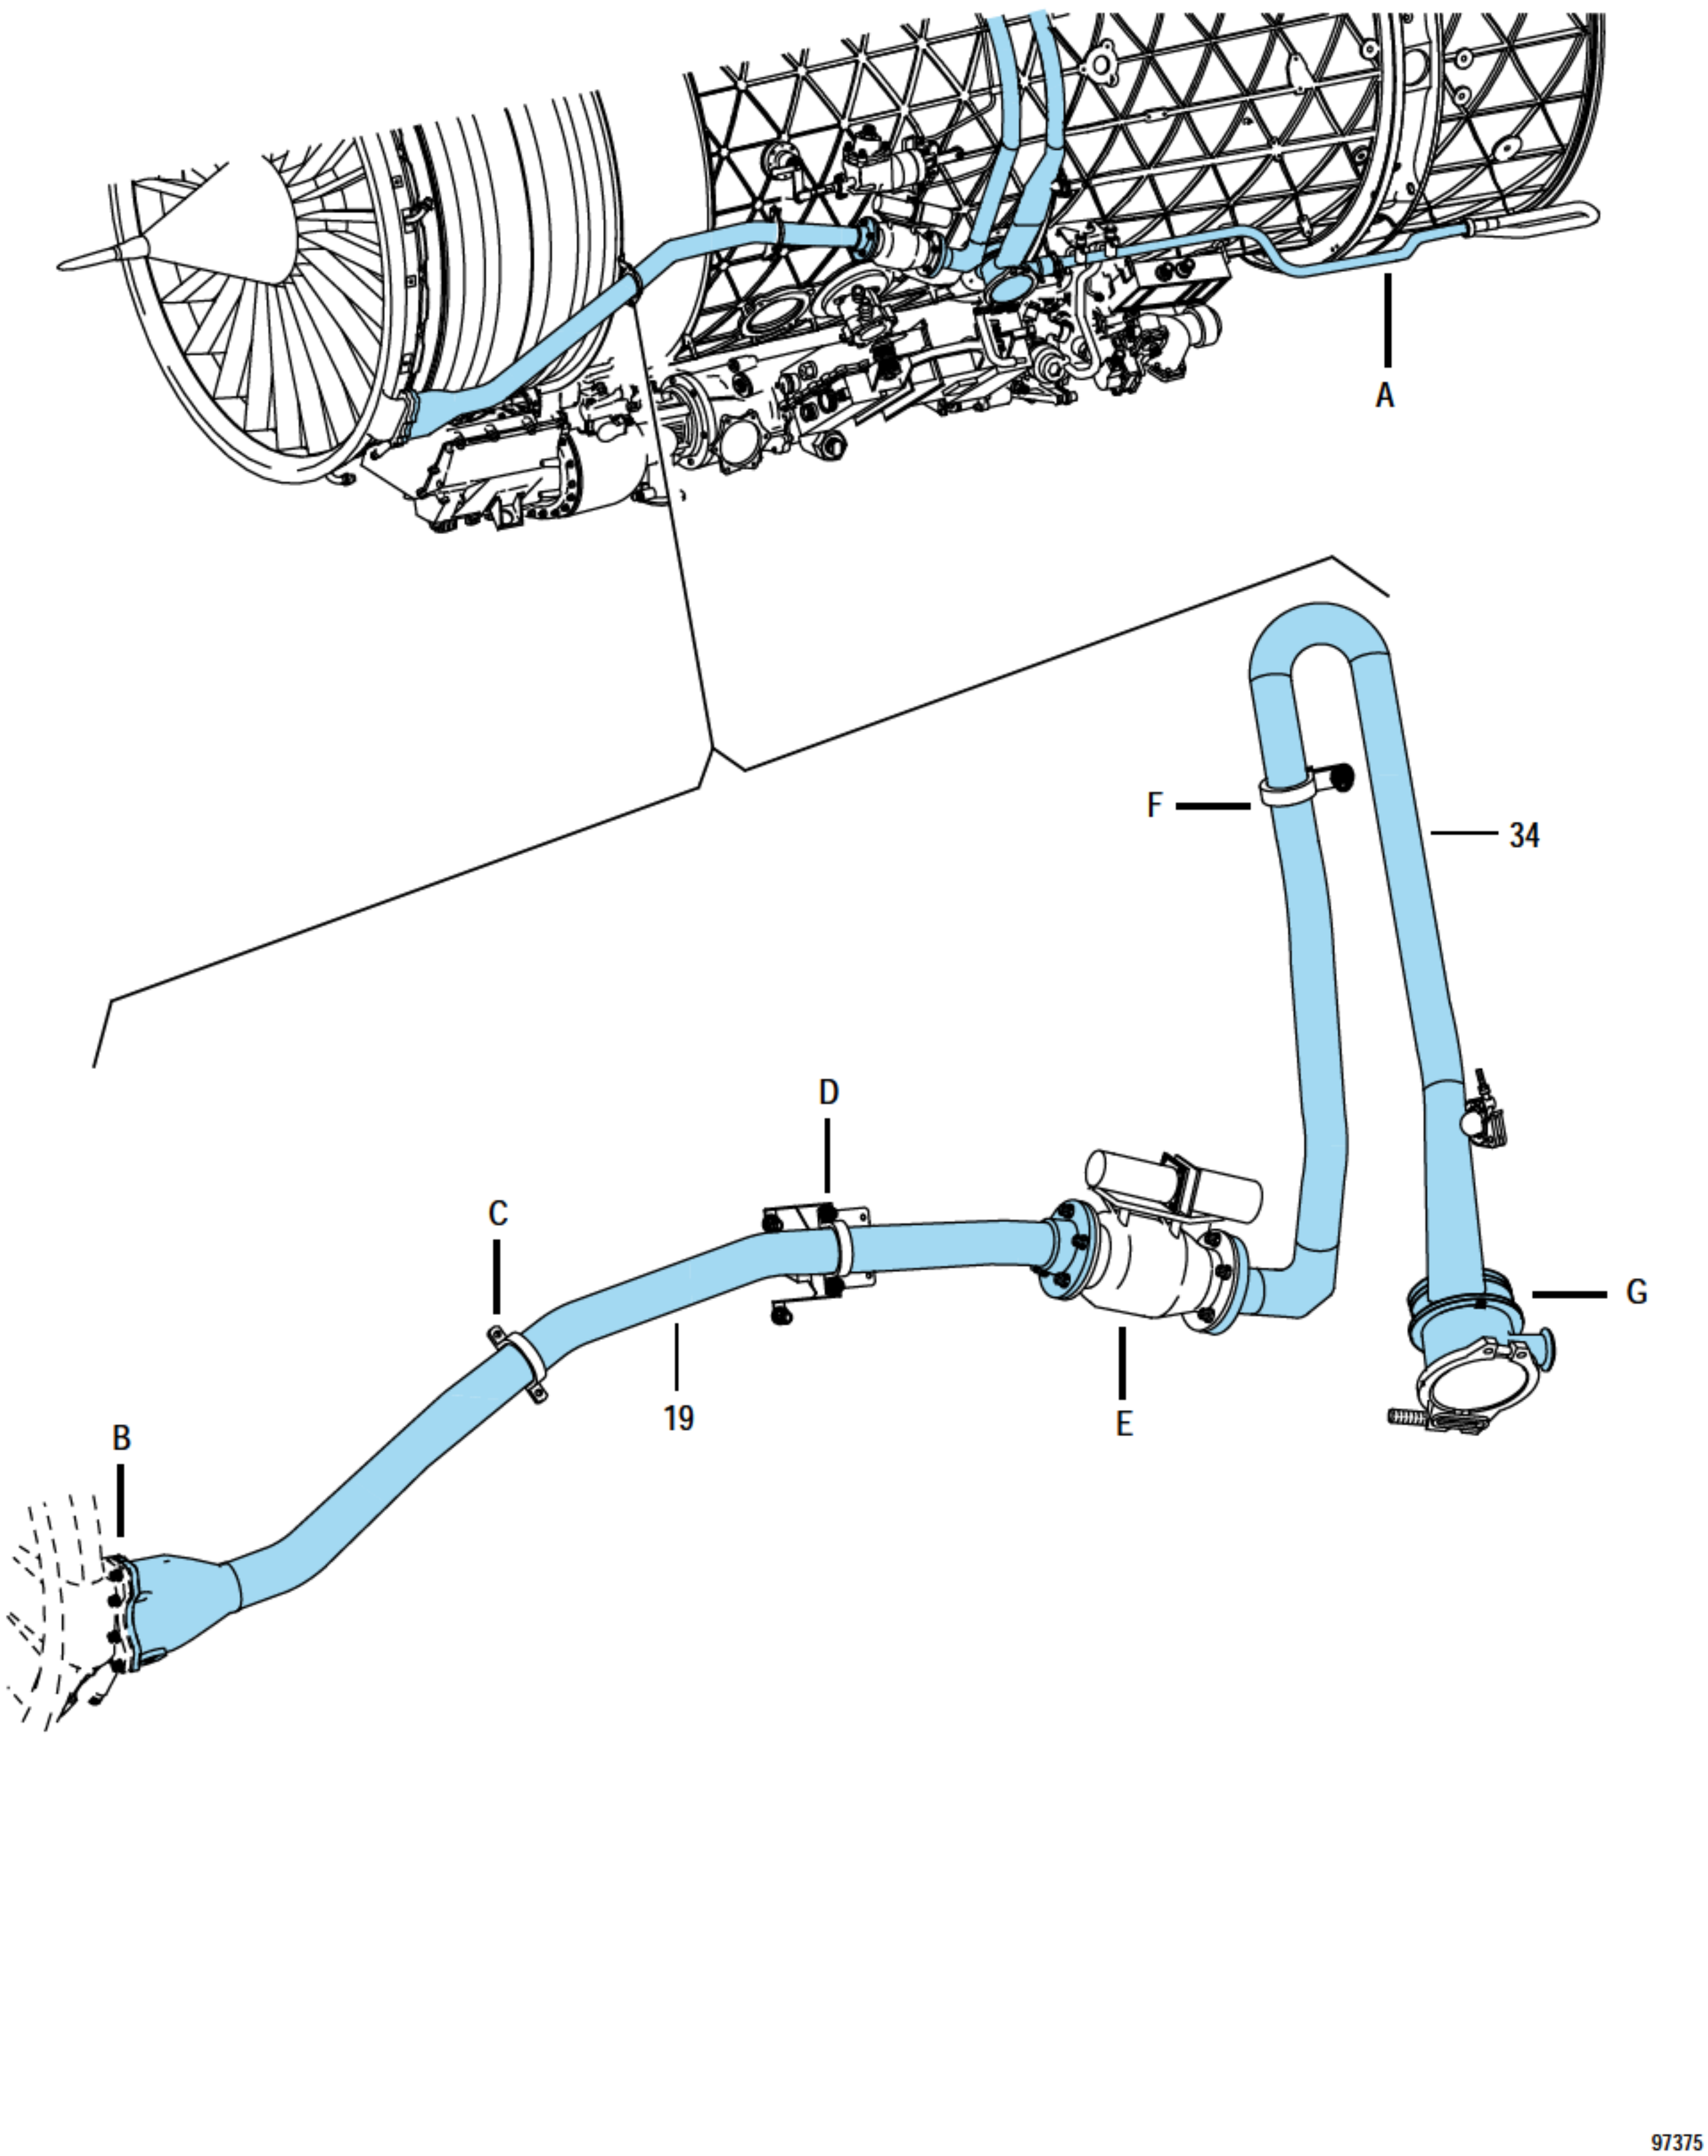


FIGURE 34. ANTI-ICING MANIFOLD, VALVE AND CONVERGENT EXHAUST NOZZLE CONTROL TUBING
(SHEET 1 OF 4)

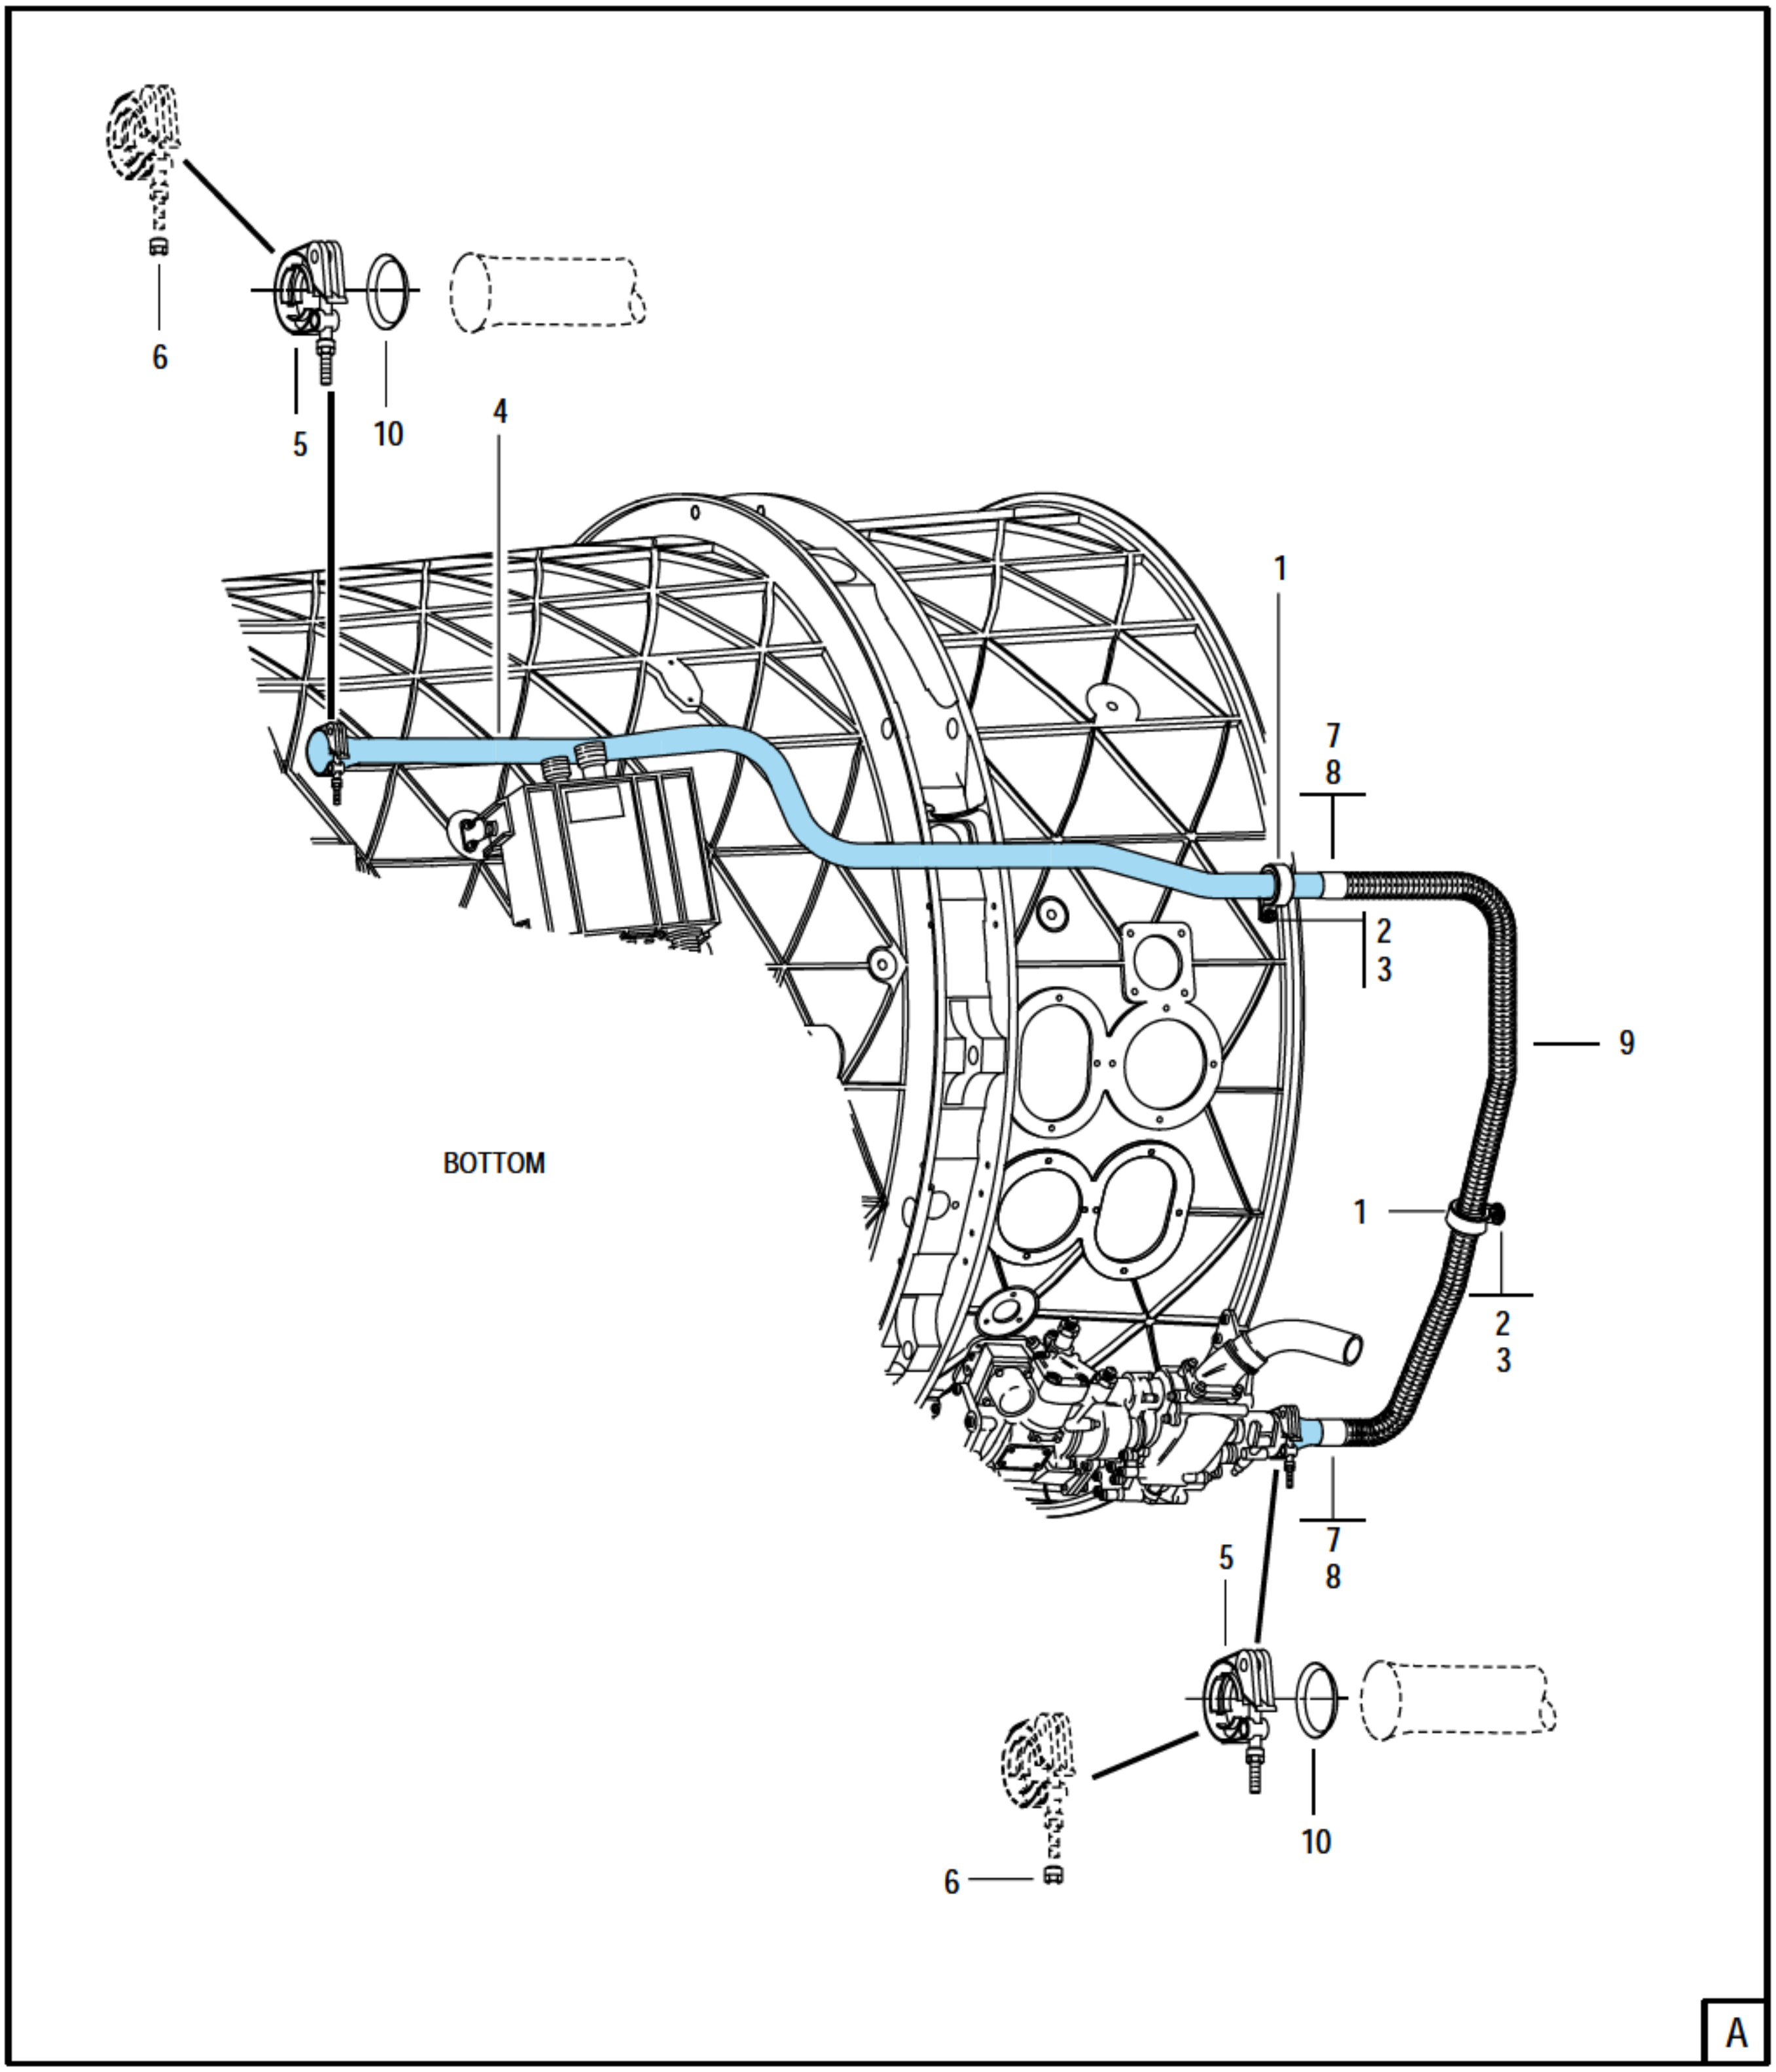


FIGURE 34. ANTI-ICING MANIFOLD, VALVE AND CONVERGENT EXHAUST NOZZLE CONTROL TUBING
(SHEET 2 OF 4)


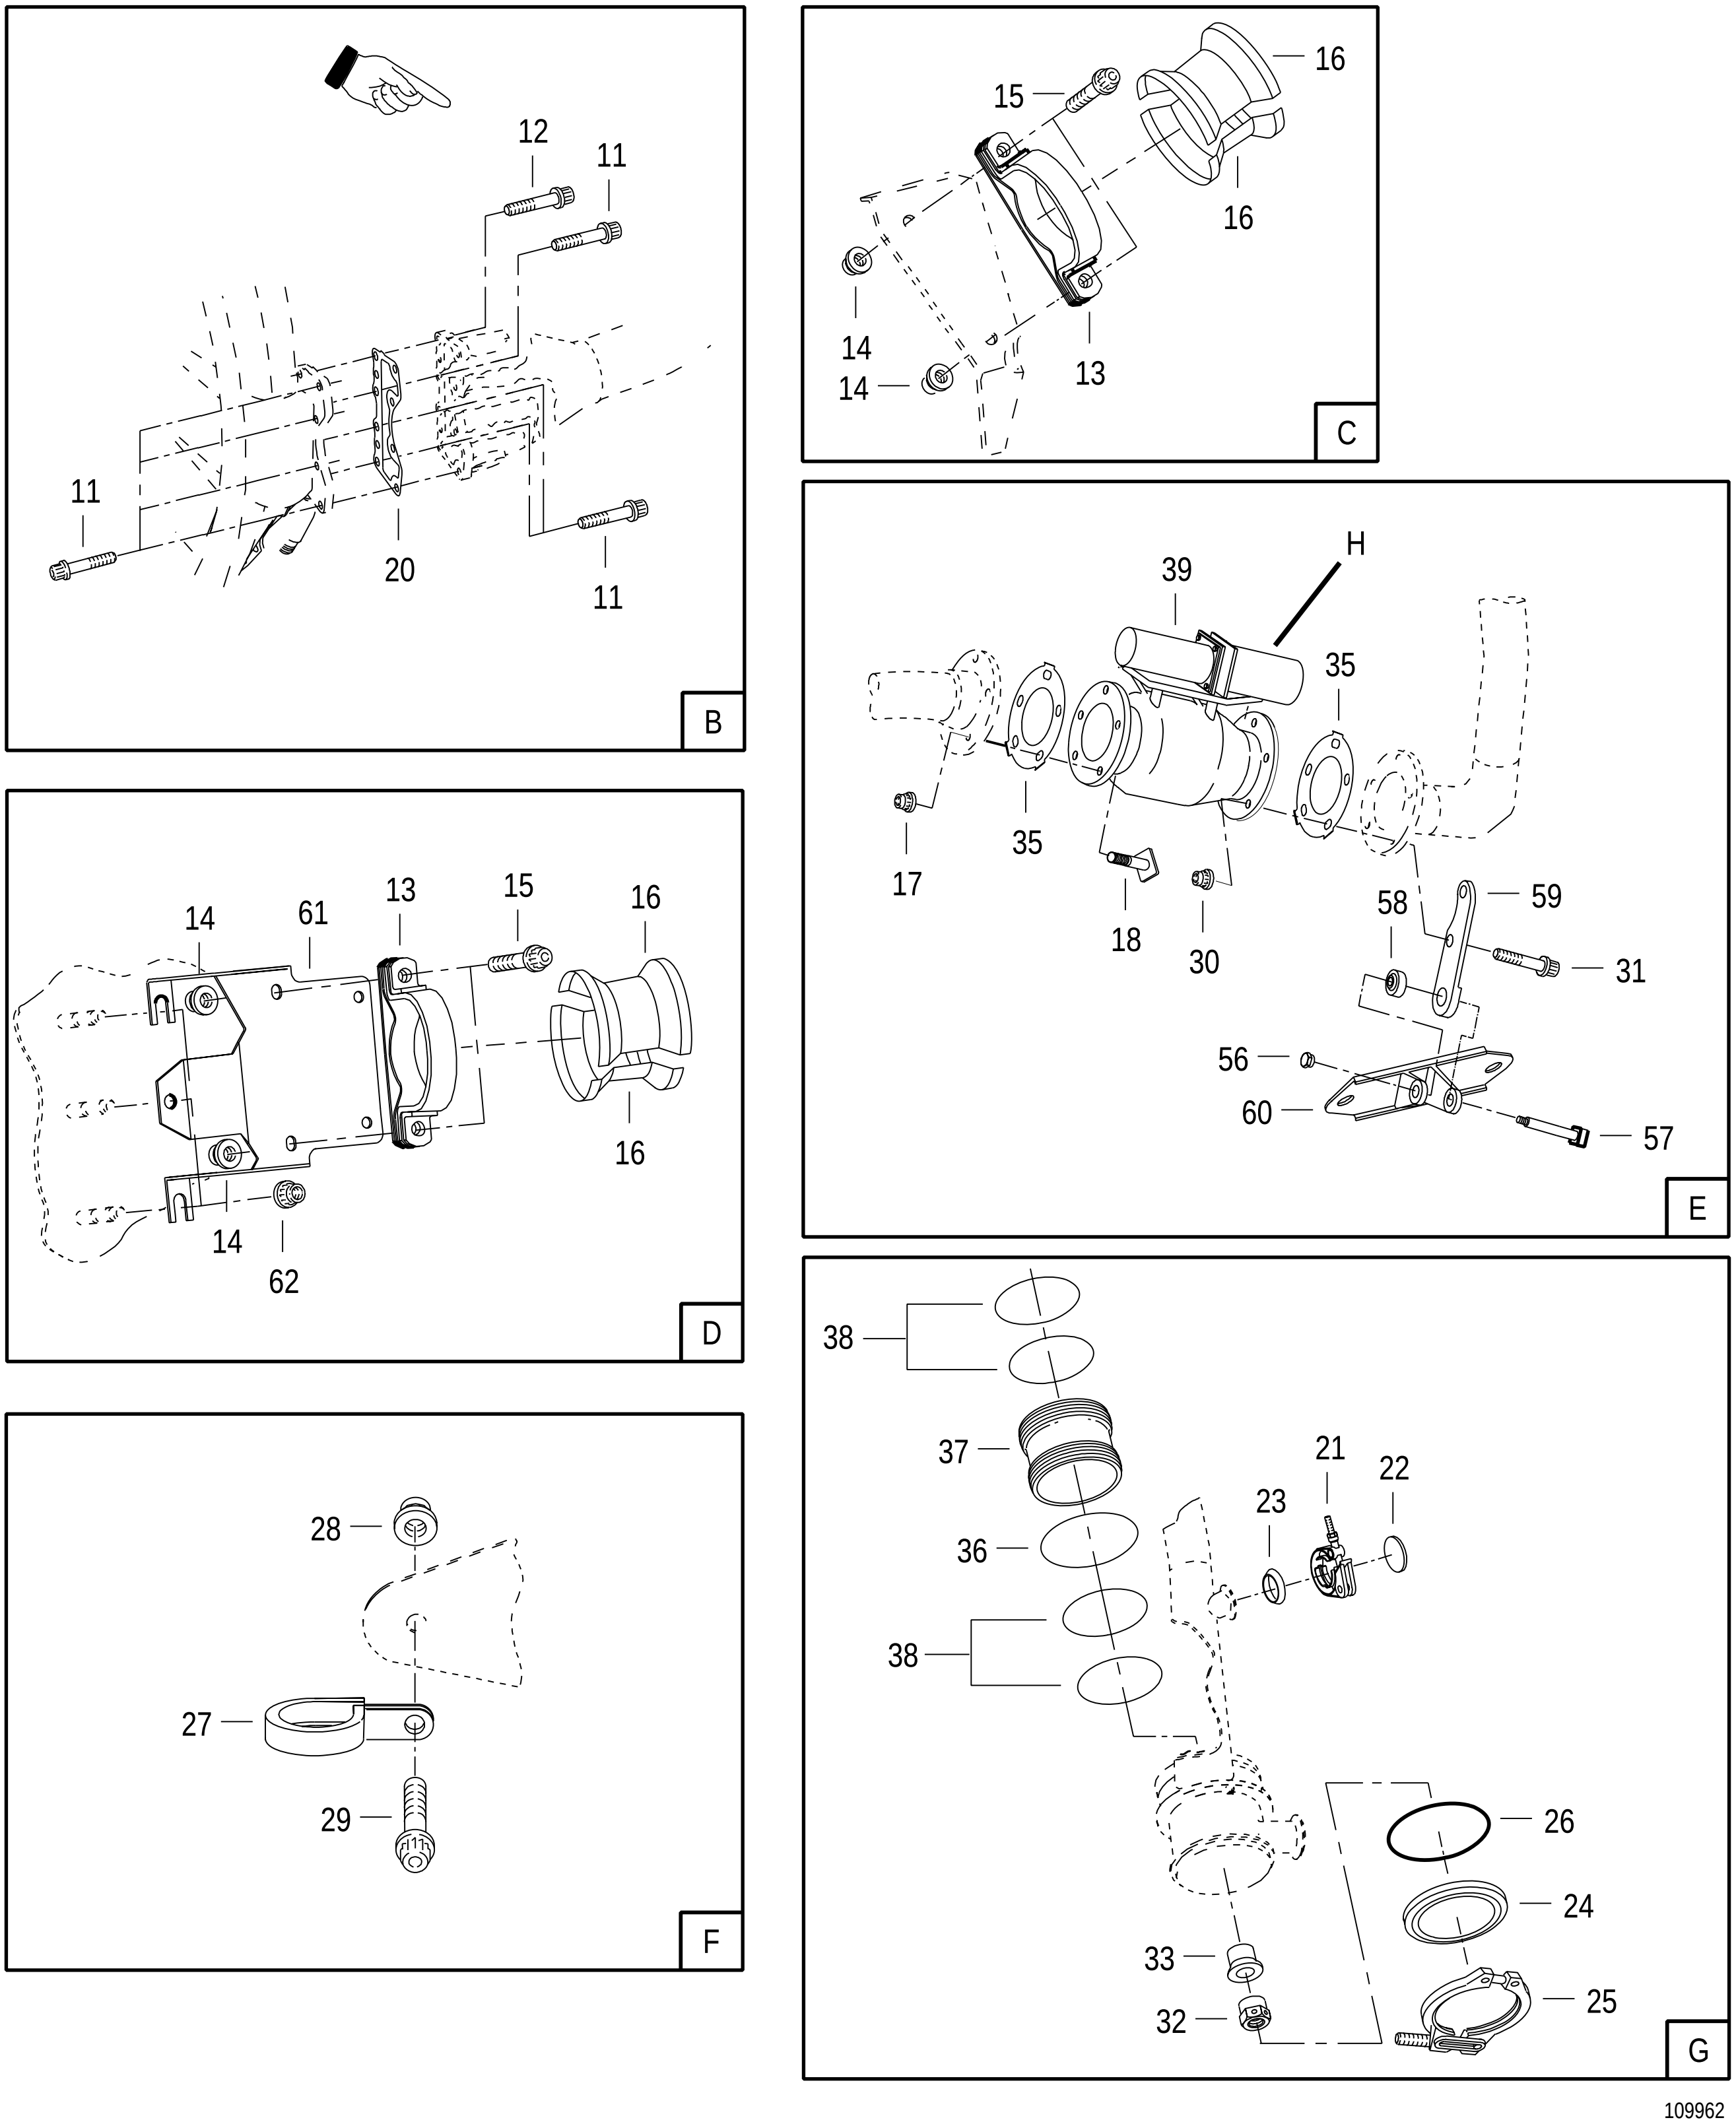


FIGURE 34. ANTI-ICING MANIFOLD, VALVE AND CONVERGENT EXHAUST NOZZLE CONTROL TUBING
(SHEET 3 OF 4)

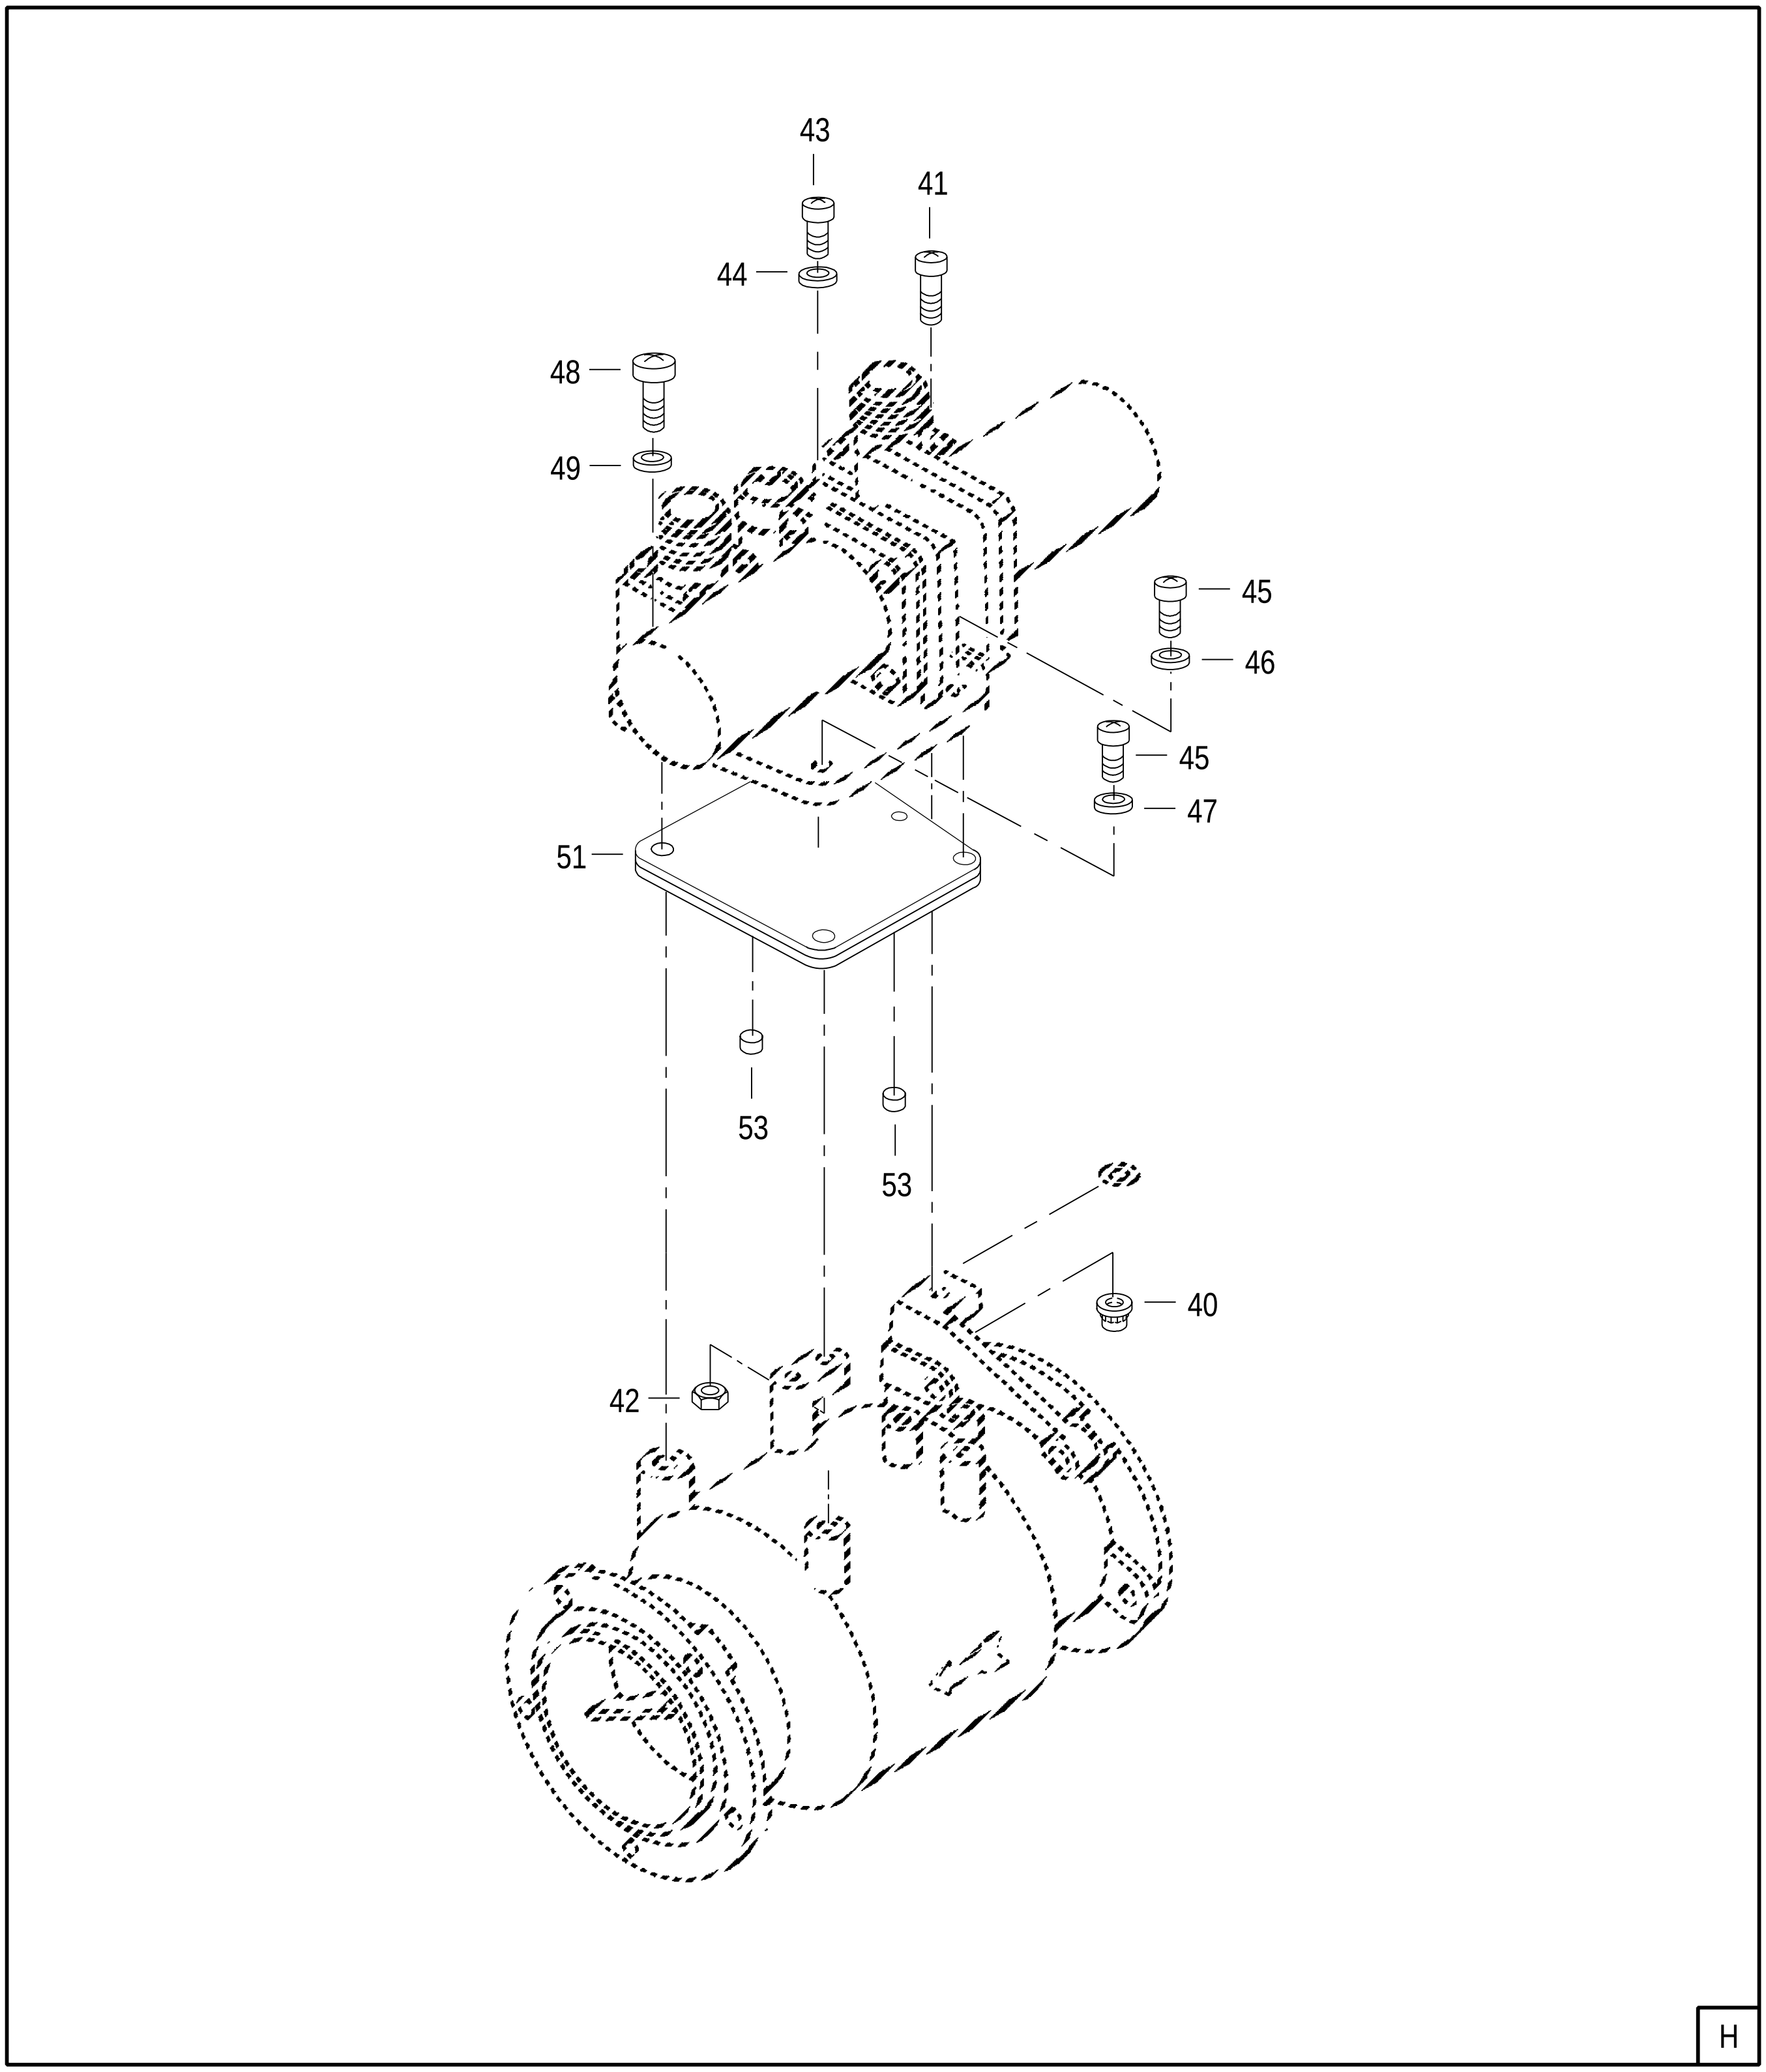

108212

FIGURE 34. ANTI-ICING MANIFOLD, VALVE AND CONVERGENT EXHAUST NOZZLE CONTROL TUBING
(SHEET 4 OF 4)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
34	NO NUMBER		ANTI-ICING MANIFOLD, VALVE AND CONVERGENT EXHAUST NOZZLE CONTROL TUBING SEE FIG. 33-1 FOR NHA	REF		
- 1	310634	52661	. CLIP 1.000 OD TUBE	2		PAOZZ
- 2	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
- 3	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	1		PAOZZ
- 4	4072150-01	52661	. TUBE-CONVERGENT EXHAUST NOZZLE CONTROL, ASSY OF	1		PAODD
- 5	4039946	52661	. COUPLING OPTION (AP) PROCUREMENT NO. CONSISTS OF	2		PAOFF
	4016562	52661	.. COUPLING ASSY-CLAMP, GROOVED 1.540 IN. DIA OPTIONAL TO 4039153	1		XA
	4039153	52661	.. COUPLING ASSY-CLAMP, GROOVED 1.540 IN. DIA OPTIONAL TO 4016562 PARTIAL BREAKDOWN FOLLOWS	1		XA
- 6	MS9360-10	96906	... NUT PARTIAL BREAKDOWN FOLLOWS	1		PAOZZ
- 7	2072968	52661	.. TAPE-INSULATION, THERMAL 0.500 WIDE X 0.125 IN. THK	AR		PADZZ
- 8	2161929	52661	.. TAPE OPTION SEE OPTION TABLE	AR		PADZZ
- 9	4061638	52661	.. SHIELD-HEAT 1.000 TUBE, 83 CORRUGATION	1		PADZZ
- 10	2156866	52661	. GASKET-ANGLE 1.370 OD X 0.161 WIDE X 0.020 IN. THK	2		PAOZZ
- 11	ST2150-022	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX 0.250-28UNJF-3A X 0.688 IN. LONG	7		PAOZZ
- 12	ST2348-06	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.250-28UNJF-3A X 0.500 IN. LONG	1		PAFZZ
- 13	11688	83930	. CLAMP-SADDLE, REINFORCED P&WA PART NO. ST2994-32 REPLACES ST2851-32	2		PAOZZ
- 14	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
- 15	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.625 IN. LONG (AP) REPLACES ST2015-016	2		PAOZZ
- 16	C10GT2-32S	83930	. GROMMET HALF-LOOP CLAMP P&WA PART NO. ST2299-32	4		PAOZZ
- 17	704342	52661	. NUT OPTION SEE OPTION TABLE	5		PAOZZ
- 18	4083658	52661	. BOLT-MACHINE, SLAB 0.250-28UNJF-3A X 0.950 IN. LONG	5		PAOZZ
- 19	4080576-01	52661	. MANIFOLD-ANTI-ICING, ASSY OF	1		PAODD
- 20	4076706	52661	. GASKET OPTION SEE OPTION TABLE	1		PAOZZ
- 21	4039946	52661	. COUPLING OPTION SEE OPTION TABLE	1		PAOFF
- 22	4080479	52661	. COVER-CONVERGENT EXHAUST NOZZLE CONTROL, BLEED	1		PAOZZ

	FIGURE & INDEX NUMBER	PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	34 - 23	2156866		52661	. GASKET-ANGLE . . . . 1.370 OD X 0.161 WIDE X 0.020 IN. THK	1		PAOZZ
	- 24	4020643		52661	. COVER-GROOVED CLAMP COUPLING . . . . 3.500 IN. DIA	1		PAOZZ
	- 25	4054021		52661	. COUPLING OPTION (AP) . . . . SEE OPTION TABLE	1		PAOFF
	- 26	4020644		52661	. GASKET-SPRING . . . . 2.746 ID X 3.1125 OD X 0.140 IN. THK	1		PAOZZ
	- 27	MS122927		52661	. CLAMP	1		PAOZZ
	- 28	4023115		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 29	ST2015-016		52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
	- 30	704342		52661	. NUT OPTION . . . . SEE OPTION TABLE	5		PAOZZ
	- 31	MS9697-16		96906	. BOLT	5		PAOZZ
	- 32	4080167		52661	. NUT-PLAIN, HEX . . . . 0.4375-20UNJF-3B X 0.750 IN. THK	1		PAOZZ
	- 33	4020640		52661	. BALL END-ROD, AIR SUPPLY MANIFOLD . . . . SUPPORT SUPERSEDED BY 4084095	1		PAOZZ
		4084095		52661	. BALL END-ROD, AIR SUPPLY MANIFOLD . . . . SUPPORT SUPERSEDES 4020640	1		PAOZZ
	- 34	4069496-01		52661	. MANIFOLD-AIR SUPPLY, ANTI-ICING, INLET, ASSY . OF	1		PAODD
	- 35	4080936		52661	. GASKET-ANTI-ICING VALVE	2		PAOZZ
	- 36	4020637		52661	. SEAL RING-METAL . . . . 4.000 OD X 0.1545 IN. THK	1		PAOZZ
	- 37	4069557		52661	. TUBE-TRANSFER, SEAL RING . . . . 3.080 ID X 2.580 IN. LONG	1		PAOFF
	- 38	4020638		52661	. SEAL RING-METAL . . . . 3.500 OD X 0.1545 WIDE X 0.090 IN. THK	4		PAOZZ
R	- 39	327455	#	79318	. VALVE-ANTI-ICING, ENGINE INLET . . . . P&W PART NO. 4082475	1	TS	PAFDD
		329205	#	79318	. VALVE-ANTI-ICING, ENGINE INLET . . . . P&W PART NO. 4084053 PARTIAL BREAKDOWN FOLLOWS	1	TT	PAFDD
	- 40	NAS1291C08		80205	.. NUT	1		PAFZZ
	- 41	NAS1101E08H16		80205	.. SCREW	1		PAFZZ
	- 42	110122-3		79318	.. NUT-DRILLED CHECK	1		PAFZZ
	- 43	NAS1101E3H16		80205	.. SCREW	1		PAFZZ
	- 44	100168-168		79318	.. WASHER	1		PAFZZ
	- 45	NAS1101E3H12		80205	.. SCREW	2		PAFZZ
	- 46	100168-168		79318	.. WASHER	1		PAFZZ
	- 47	NAS620C10L		80205	.. WASHER	1		PAOZZ
	- 48	NAS1101E4H16		80205	.. SCREW . . . . USE ONLY ON 327455	1		PAFZZ
	- 49	NAS620C416L		80205	.. WASHER . . . . USE ONLY ON 327455	1		PAFZZ
R	- 50	DELETED						

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	34 - 51	325117	79318	.. SPACER ASSY . . . . USE ONLY ON 327455	1		PAFZZ
R	- 52	DELETED					
	- 53	226590	79318	.. SEAL-METALLIC	2		PAFZZ
		4080365-01	52661	. LINK-ANTI-ICING REGULATOR VALVE, ASSY OF . . .	1		PAOBZ
R	- 54	DELETED					
R	- 55	DELETED					
	- 56	4021812	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE REPLACES 4023115	1		PAOZZ
	- 57	4081206	52661	. BOLT-SHOULDER, SQUARE . . . . 0.190-32UNJF-3A X 1.712 IN. LONG (AP) REPLACES 4069284	1		PAFZZ
	- 58	4071400	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	1		PAFZZ
	- 59	4080366	52661	.. LINK-ANTI-ICING REGULATOR VALVE	1		XA
	- 60	4081218	52661	. CLEVIS ASSY-ANTI-ICING REGULATOR VALVE . . . . . REPLACES 4080457	1		PAOBZ
	- 61	4080665	52661	. BRACKET-ANGLE	1		PAOBZ
	- 62	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	3		PAOZZ

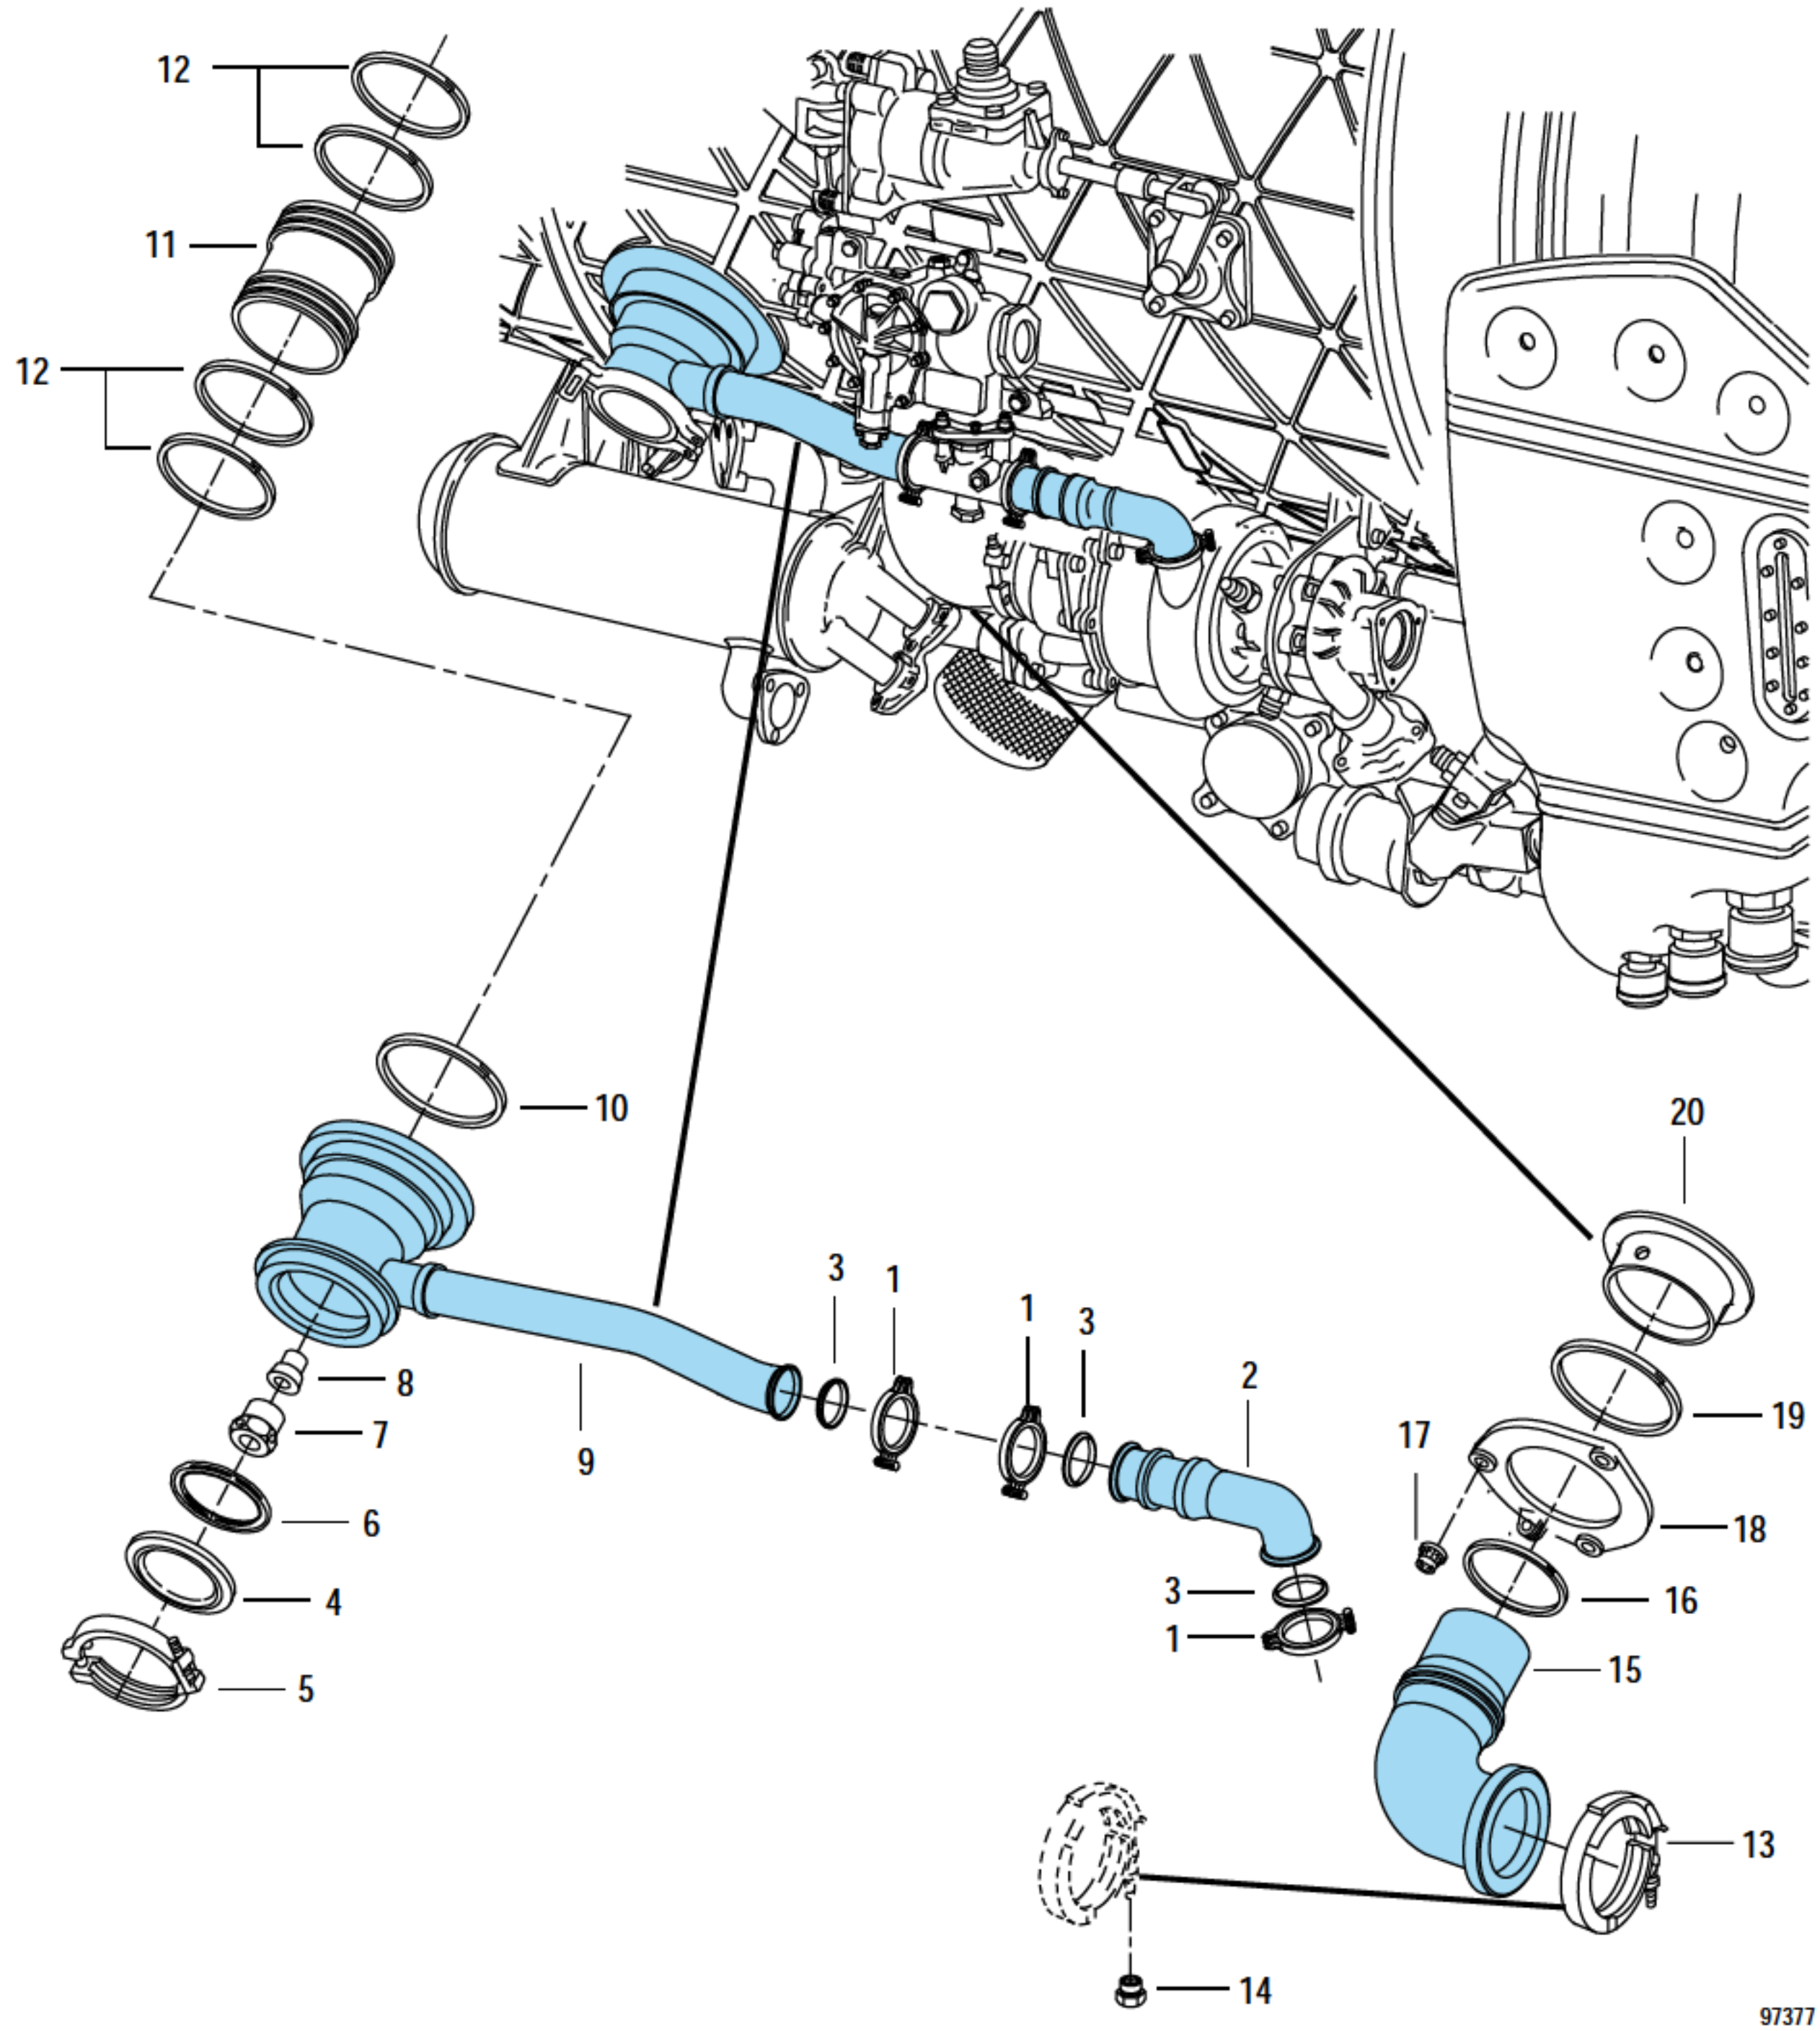


FIGURE 35. AUGMENTOR FUEL PUMP AIR SUPPLY AND VENT MANIFOLDS

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
35	NO NUMBER		AUGMENTOR FUEL PUMP AIR SUPPLY AND VENT . MANIFOLDS SEE FIG. 33-2 FOR NHA	REF		
- 1	4069471	52661	. COUPLING-CLAMP	3		PAOZZ
- 2	4069469	52661	. TUBE-SEAL, AUGMENTOR PUMP	1		PAODD
- 3	0944	15284	. SEAL RING-METAL 1.458 ID X 1.749 OD X 0.108 IN. THK P&WA PART NO. 4069472	3		PAOZZ
- 4	4020643	52661	. COVER-GROOVED CLAMP COUPLING 3.500 IN. DIA	1		PAOZZ
- 5	4054021	52661	. COUPLING OPTION 2.750 IN. TUBE (AP) SEE OPTION TABLE	1		PAOFF
- 6	4020644	52661	. GASKET-SPRING 2.746 ID X 3.1125 OD X 0.140 IN. THK	1		PAOZZ
- 7	4080167	52661	. NUT-PLAIN, HEX 0.4375-20UNJF-3B X 0.750 IN. THK REPLACES 4050103	1		PAOZZ
- 8	4020640	52661	. BALL END-ROD, AIR SUPPLY MANIFOLD SUPPORT SUPERSEDED BY 4084095 (R)	1		PAOZZ
(R)	4084095	52661	. BALL END-ROD, AIR SUPPLY MANIFOLD SUPPORT SUPERSEDES 4020640 (R)	1		PAOZZ
- 9	4069543	52661	. MANIFOLD-AIR SUPPLY, AUGMENTOR FUEL PUMP, ASSY OF	1		PAODD
- 10	4020637	52661	. SEAL RING-METAL 4.000 OD X 0.1545 IN. THK	1		PAOZZ
- 11	4069557	52661	. TUBE-TRANSFER, SEAL RING 3.080 ID X 2.580 IN. LONG	1		PAOFF
- 12	4020638	52661	. SEAL RING-METAL 3.500 OD X 0.1545 WIDE X 0.090 IN. THK	4		PAOZZ
- 13	4039949	52661	. COUPLING OPTION PROCUREMENT NO. CONSISTS OF	1		PAOFF
	4016565	52661	.. COUPLING ASSY-CLAMP, GROOVED 3.665 IN. DIA OPTIONAL TO 4039156	1		XA
	4039156	52661	.. COUPLING ASSY-CLAMP, GROOVED 3.700 IN. DIA OPTIONAL TO 4016565 PARTIAL BREAKDOWN FOLLOWS	1		
- 14	MS9360-10	96906	... NUT	1		PAOZZ
- 15	4075382	52661	. TUBE-AUGMENTOR FUEL PUMP AIR VENT MANIFOLD, ASSY OF	1		PAOFF
- 16	4006717	52661	. SEAL RING-METAL 3.365 OD X 0.110 WIDE X 0.093 IN. THK	1		PAOZZ
- 17	4023116	52661	. NUT OPTION SEE OPTION TABLE	3		PAOZZ
- 18	4032946	52661	. PLATE-RETAINING, SEAT, SLEEVE	1		PAOZZ
- 19	4012272	52661	. SEAL RING-METAL 4.376 OD X 0.103 IN. THK	1		PAOZZ
- 20	4081400	52661	. SLEEVE-SEALING, AUGMENTOR FUEL PUMP AIR . VENT MANIFOLD SUPERSEDES 4075386	1		PAFZZ

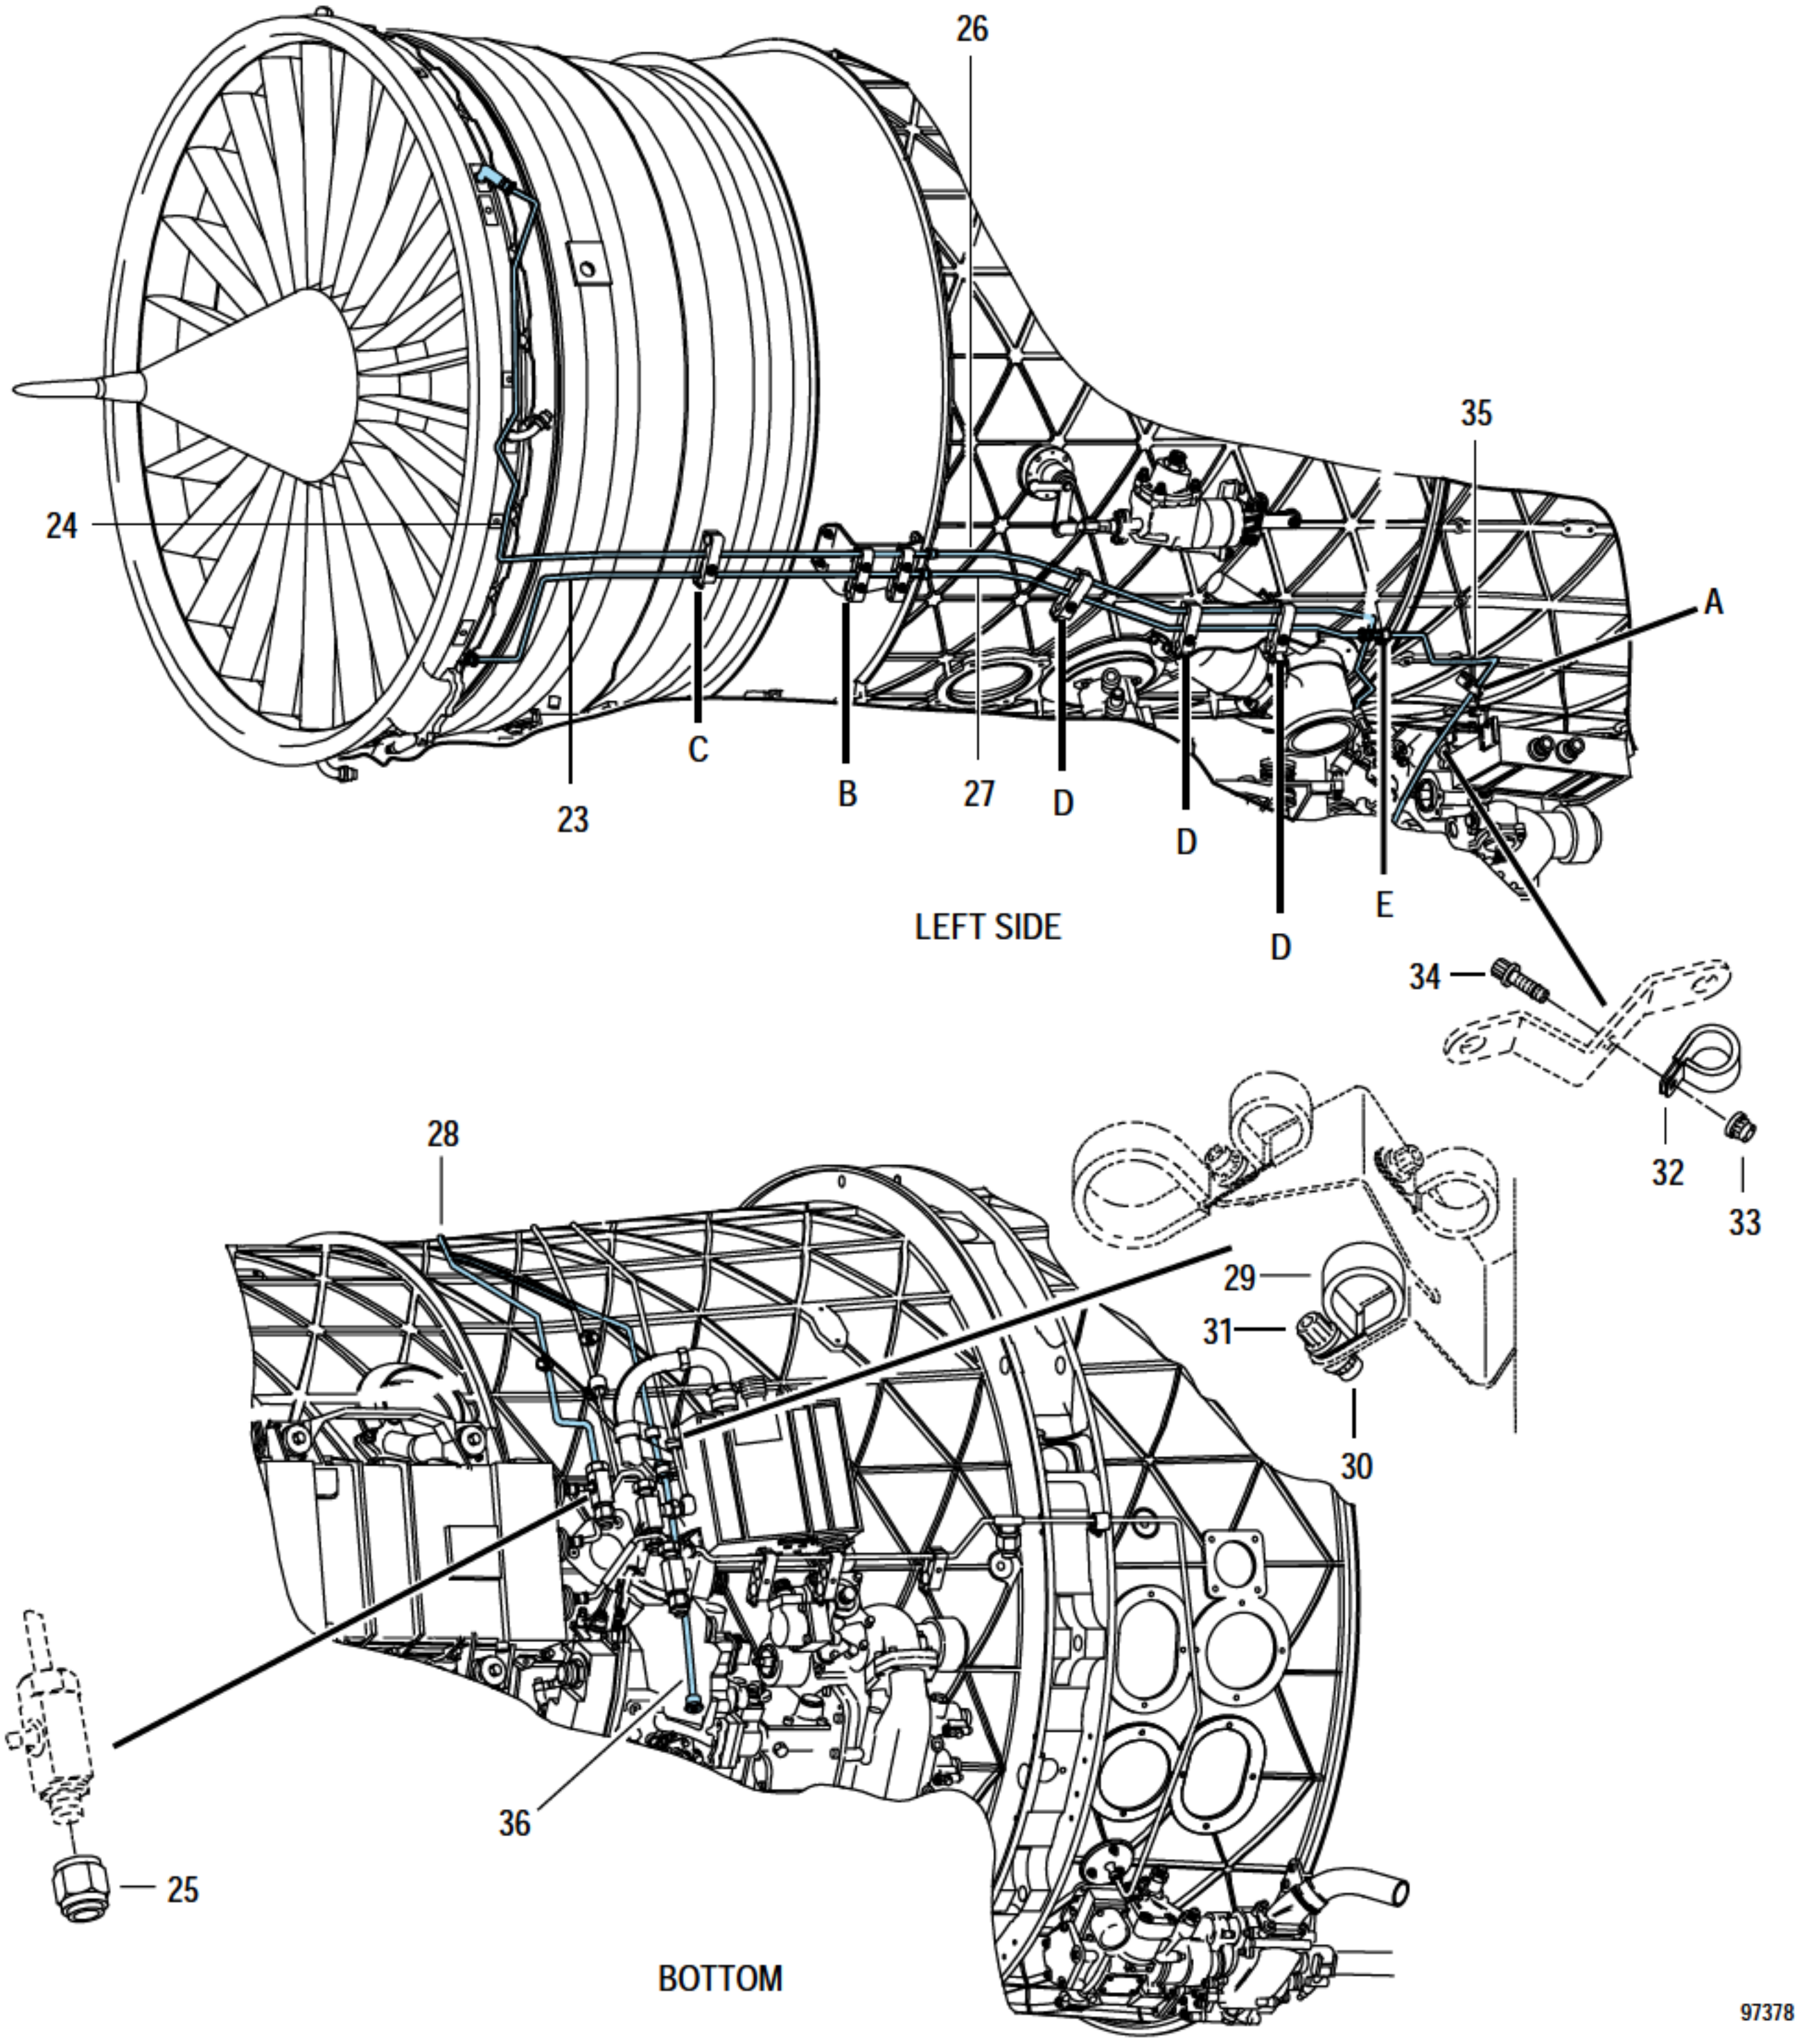


FIGURE 36. PS2 AIR TUBING
(SHEET 1 OF 2)

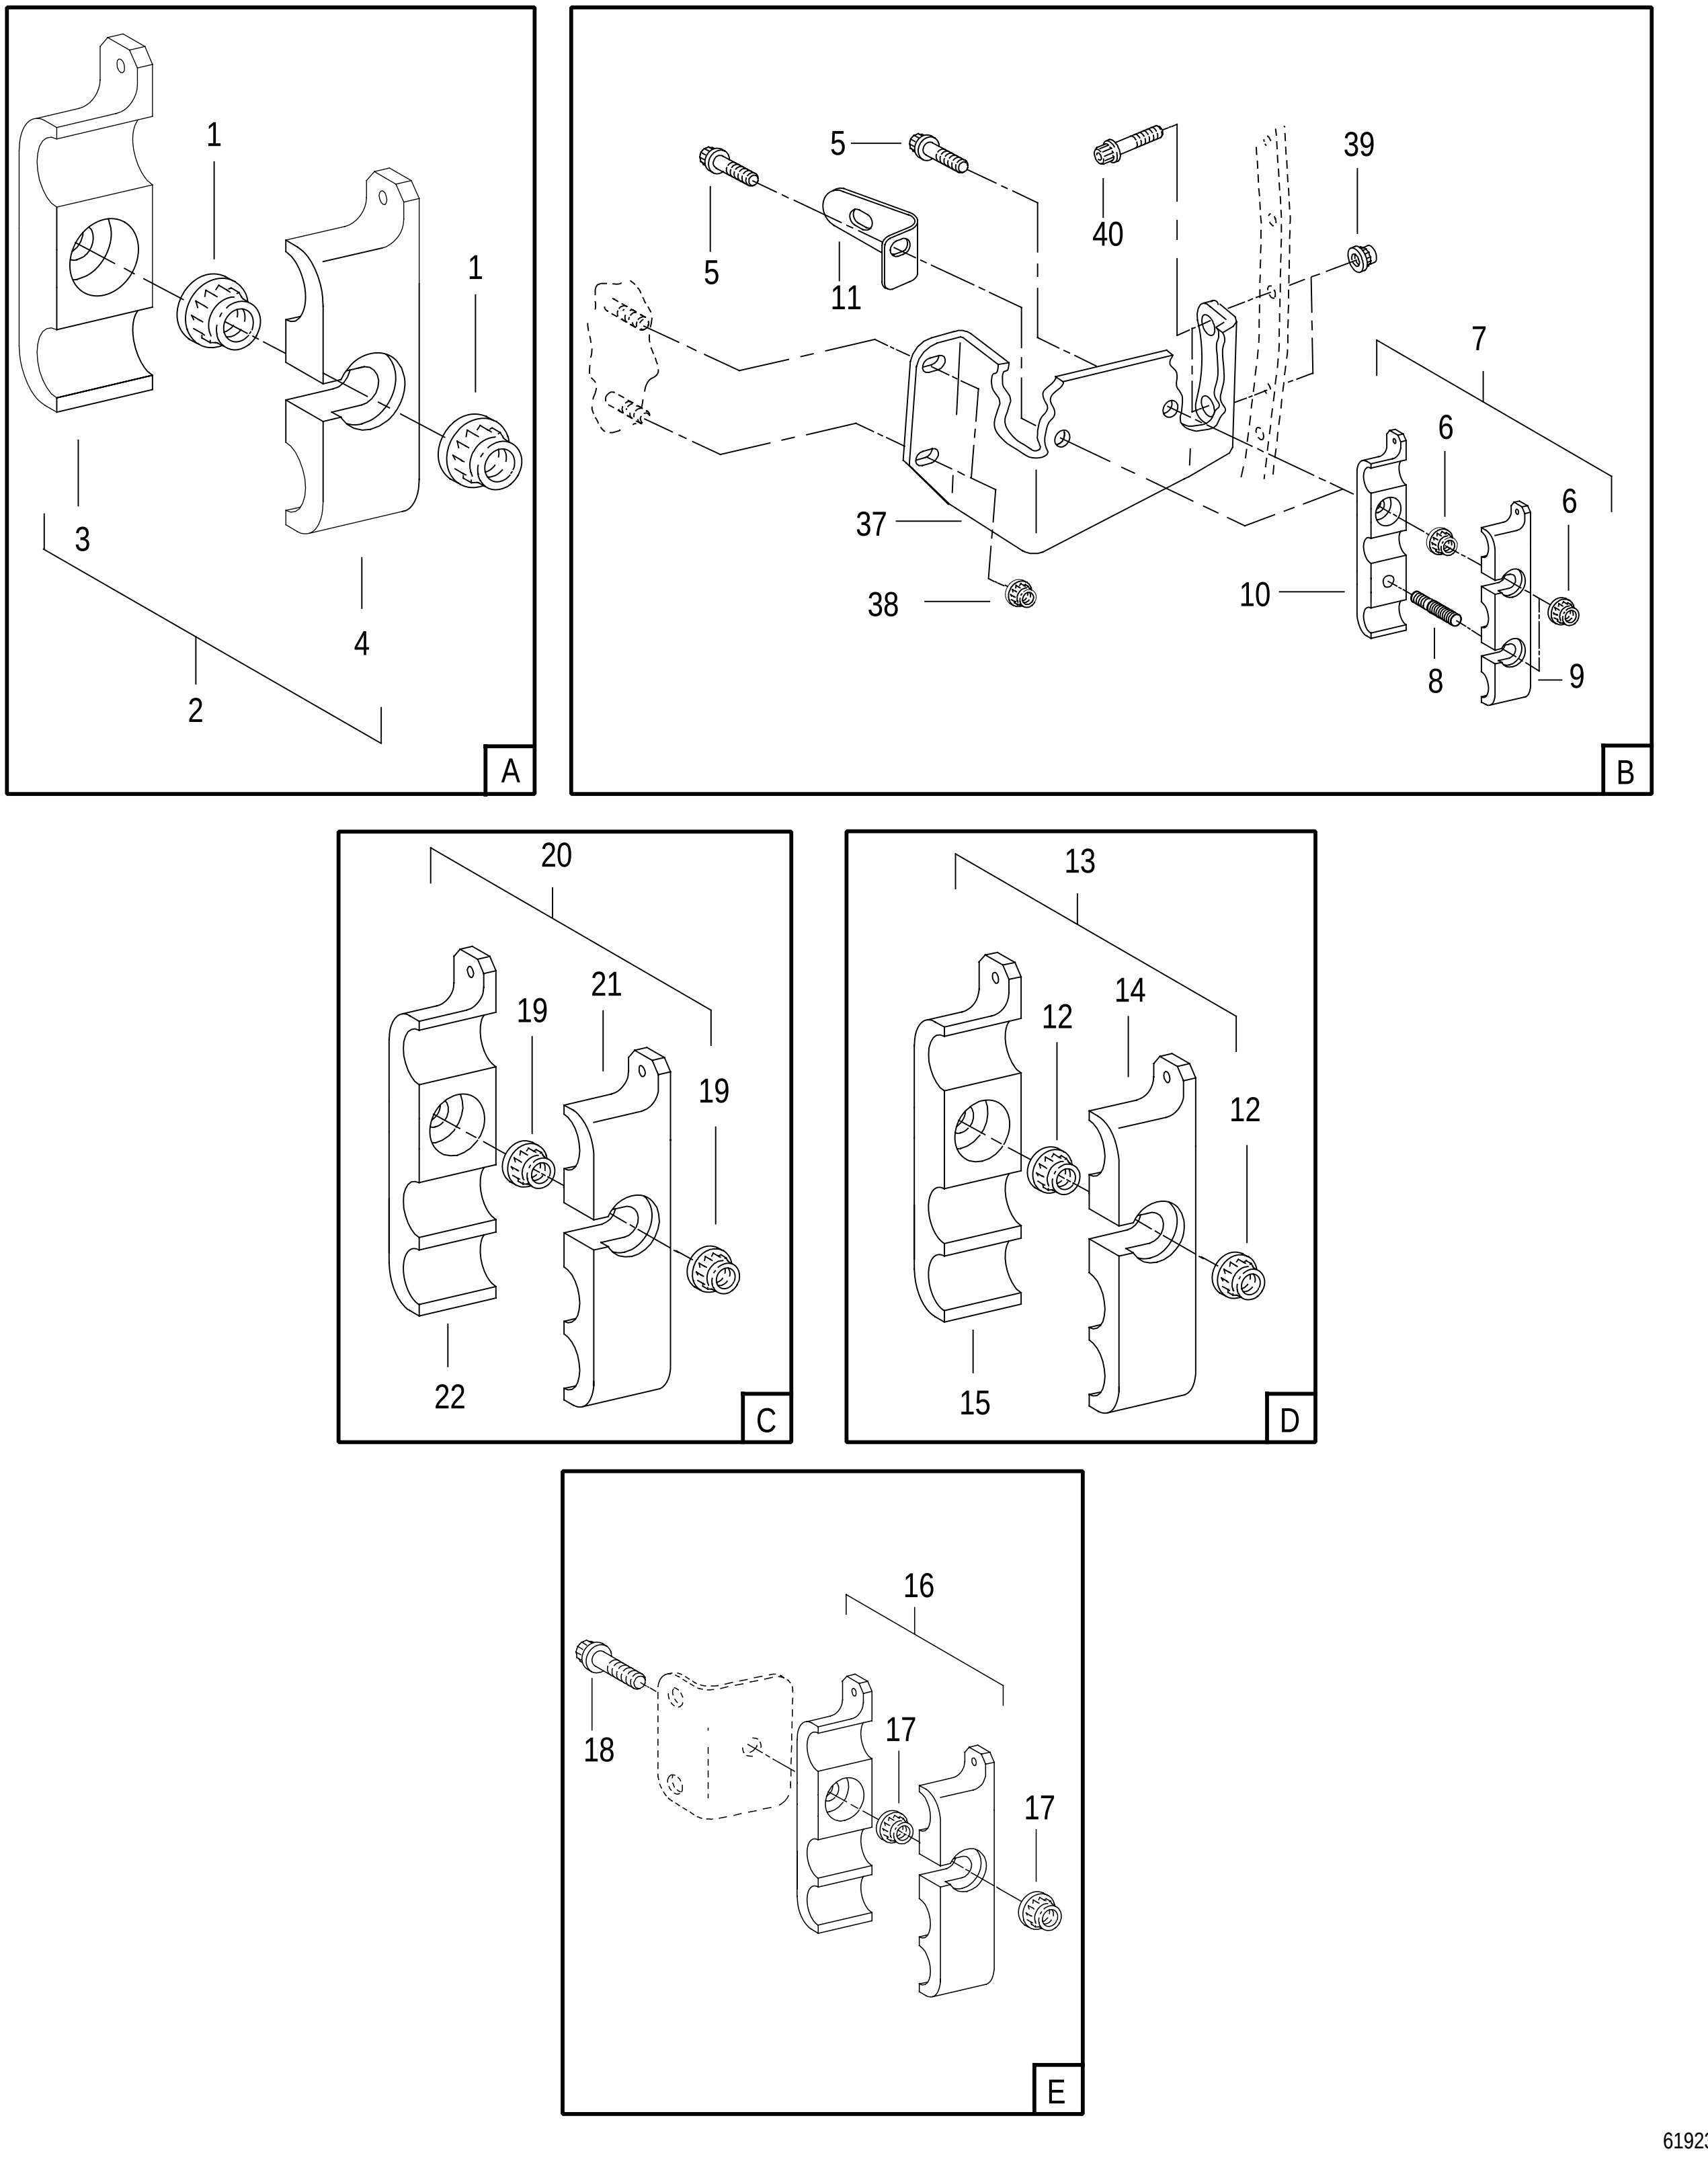


FIGURE 36. PS2 AIR TUBING
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
36	NO NUMBER		PS2 AIR TUBING . . . . SEE FIG. 33-3 FOR NHA	REF		
- 1	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	2		PAOZZ
- 2	4071583	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . WHEN EXH USE 4073094	1		PAOBZ
	4073094	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
- 3	4071550	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
- 4	4071559	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
- 5	4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG	2		PAOZZ
- 6	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	6		PAOZZ
- 7	4078520	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . PARTIAL BREAKDOWN FOLLOWS	2		PAOBZ
- 8	TR28009-10	29372	.. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10	1		PAFZZ
- 9	4071572	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 10	4076765	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 11	4078548	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 12	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	6		PAOZZ
- 13	4074067	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . WHEN EXH USE 4078514	3		PAFZZ
	4078514	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . PARTIAL BREAKDOWN FOLLOWS	3		PAOBZ
- 14	4074065	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 15	4074066	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 16	4074067	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAFZZ
- 17	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 18	4075410	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 1.230 IN. LONG (AP)	1		PAOZZ
- 19	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	2		PAOZZ
- 20	4075947	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . WHEN EXH USE 4078518	1		PAOBZ
	4078518	52661	. CLAMP-BLOCK, GROMMET, ASSY OF . . . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
- 21	4075946	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 22	4075945	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
- 23	4071692-01	52661	. TUBE-PS2, SENSE, ASSY OF	1		PAOFF
- 24	4071693-01	52661	. TUBE-PS2, SENSE, ASSY OF	1		PAOFF

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	36 - 25		MS9314-04	96906	. CAP ASSY	1		PAOZZ
	- 26		4081087-01	52661	. TUBE-PS2, DEEC, ASSY OF	1		PAOFF
	- 27		4081085-01	52661	. TUBE-PS2 GAS GENERATOR CONTROL, ASSY OF	1		PAOFF
R	- 28	=	A7280-01	98441	. HOSE-NONMETALLIC 0.250 IN. DIA TUBE P&WA PART NO. 4081290-01	1		PAOZZ
R R R		=	A9183-1	98441	. HOSE-NONMETALLIC 0.250 IN. TUBE X 0.4375-20 P&WA PART NO. 4085073	1		PAOZZ
	- 29		ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION WHEN EXH USE ST1540-04	1		PAOZZ
			ST1540-04	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	- 30		4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
	- 31		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
	- 32		ST1540-04	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	- 33		4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
	- 34		ST2015-014	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.438 IN. LONG (AP)	1		PAOZZ
	- 35		4081086-01	52661	. TUBE-PS2, GAS GENERATOR CONTROL, ASSY OF	1		PAOFF
R	- 36	=	A7195-1	98441	. HOSE-NONMETALLIC P&WA PART NO. 4080995-P01	1		PAOFF
R R R		=	A9167-1	98441	. HOSE-NONMETALLIC 0.188 IN. P&WA PART NO. 4085057	1		PAOFF
	- 37		4080994	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
	- 38		4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
	- 39		4023116	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
	- 40		ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.750 IN. LONG (AP)	2		PAOZZ

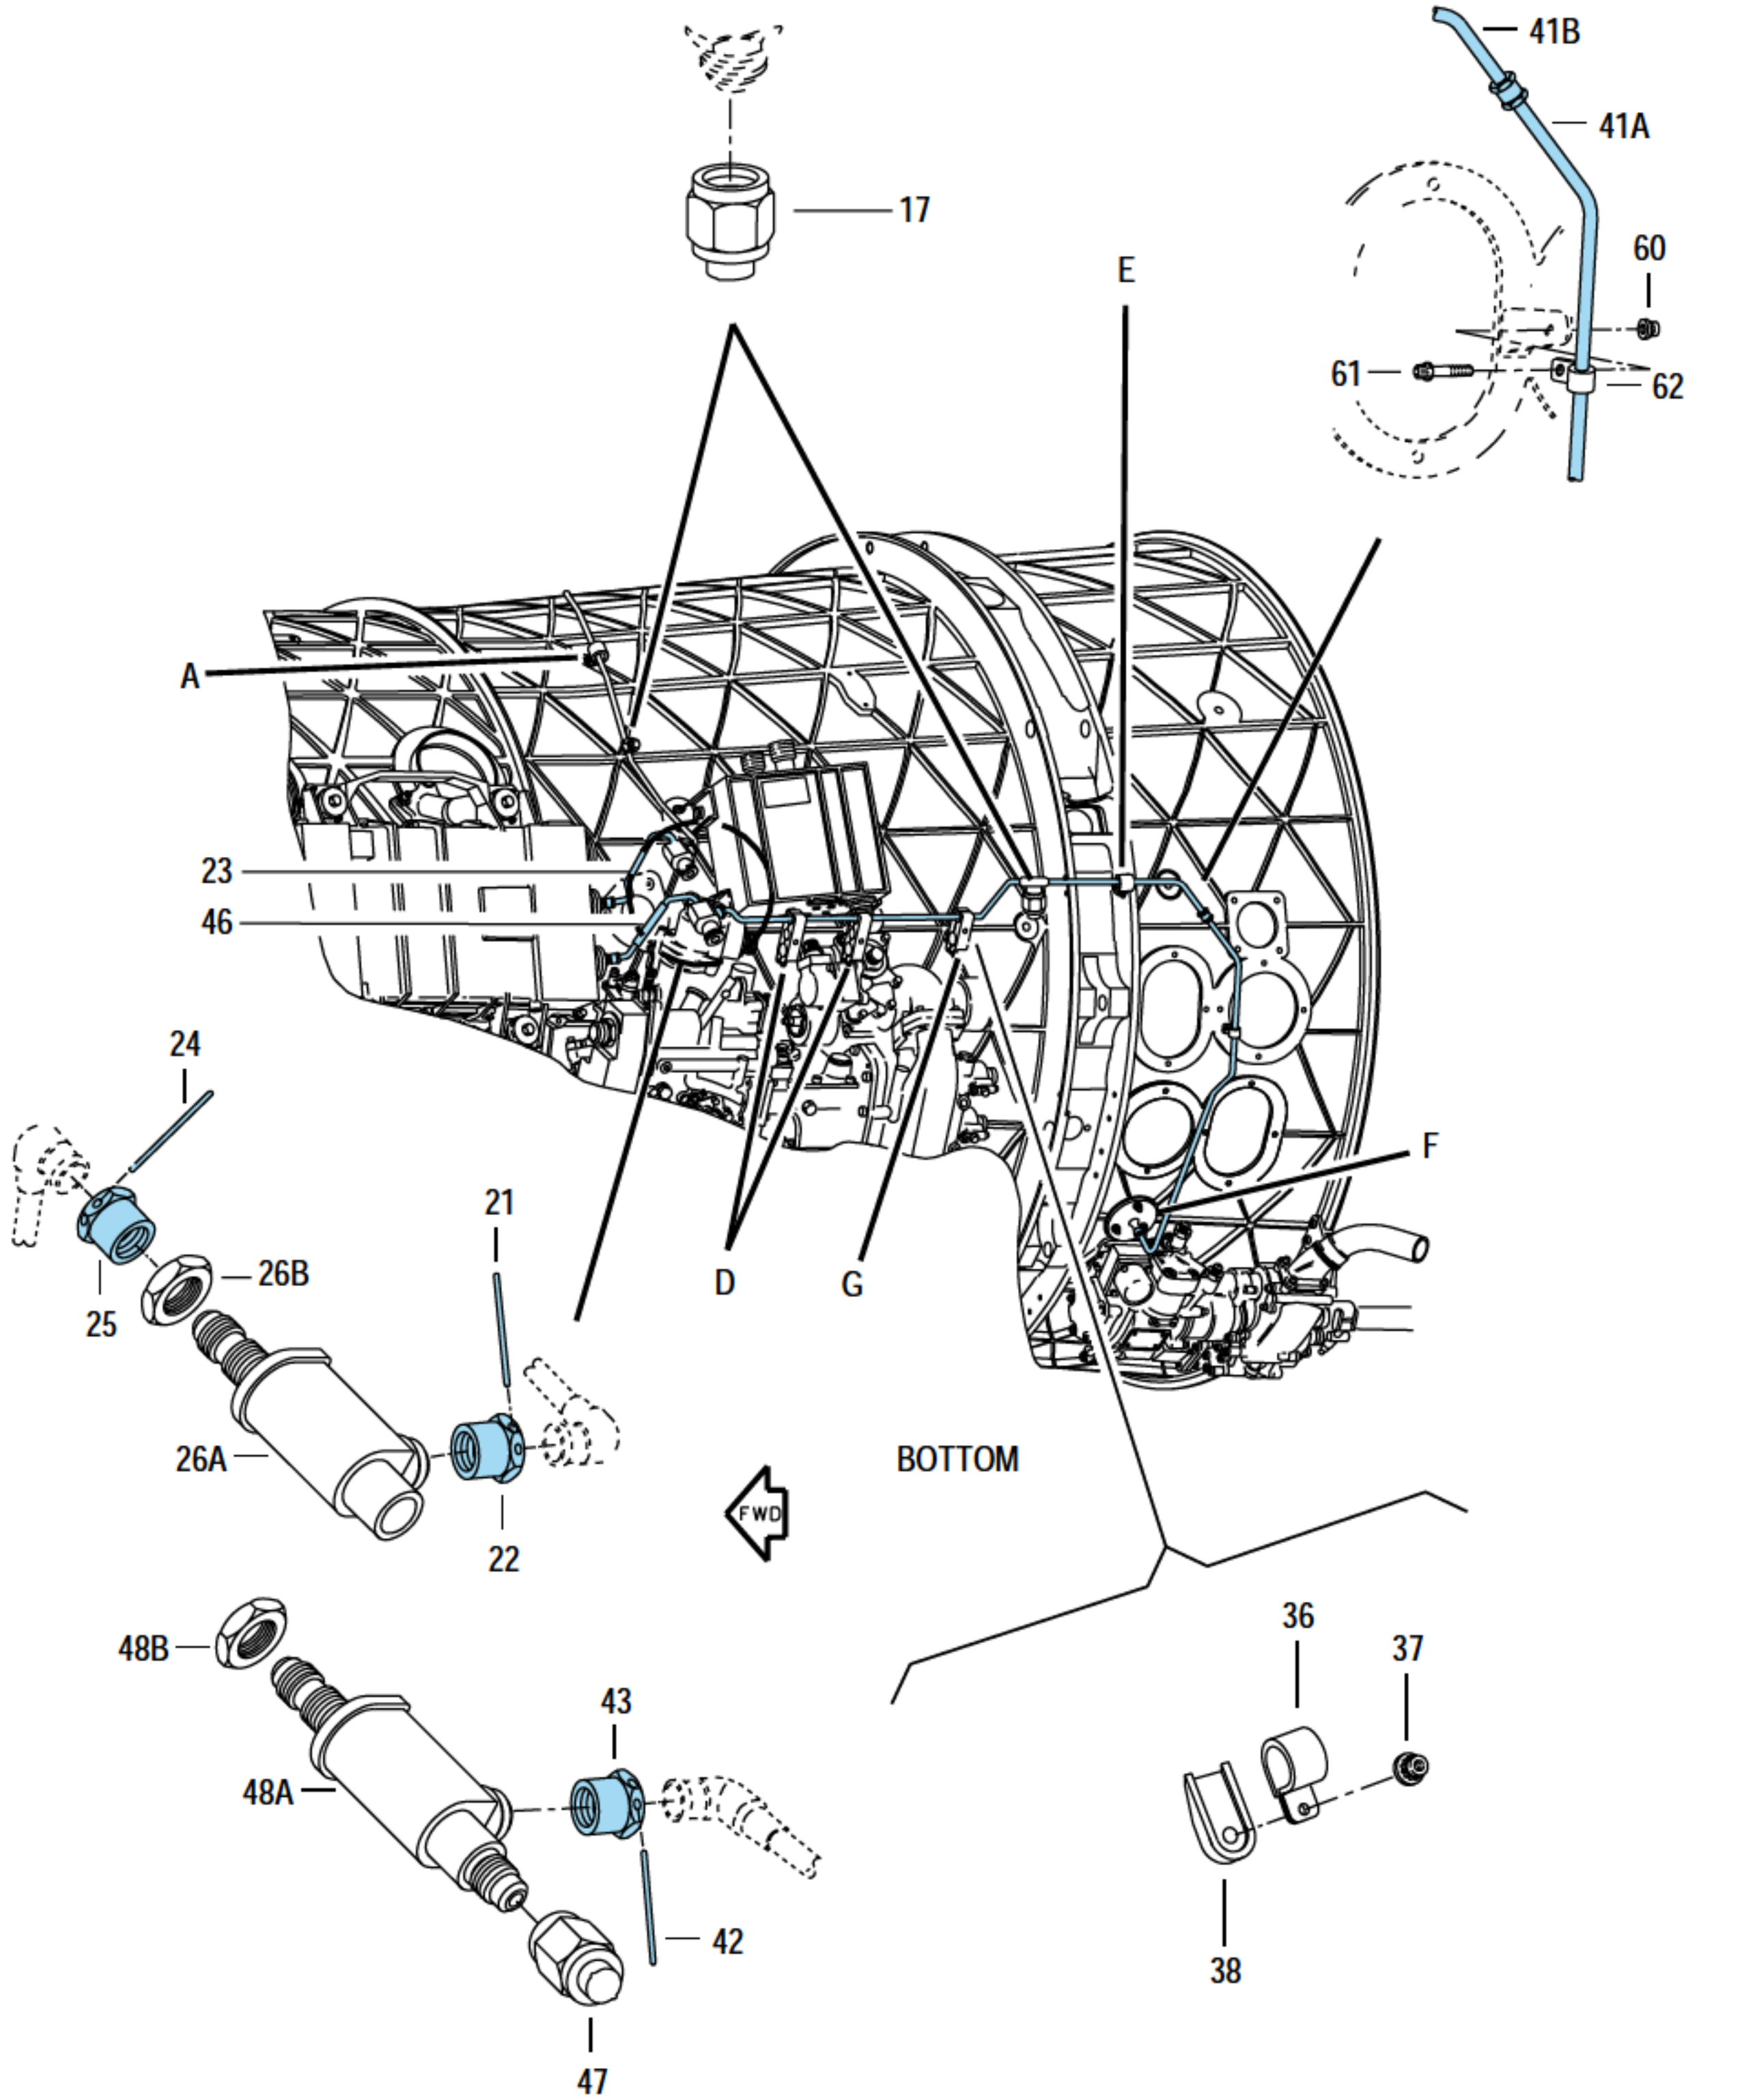


FIGURE 37. AUGMENTOR FUEL PUMP CONTROLLER PRESSURE BURNER TUBE AND SENSOR, COMBUSTION PRESSURE AND DEEC PT6 MANIFOLDS AND TOTAL PRESSURE PROBE
(SHEET 1 OF 3)

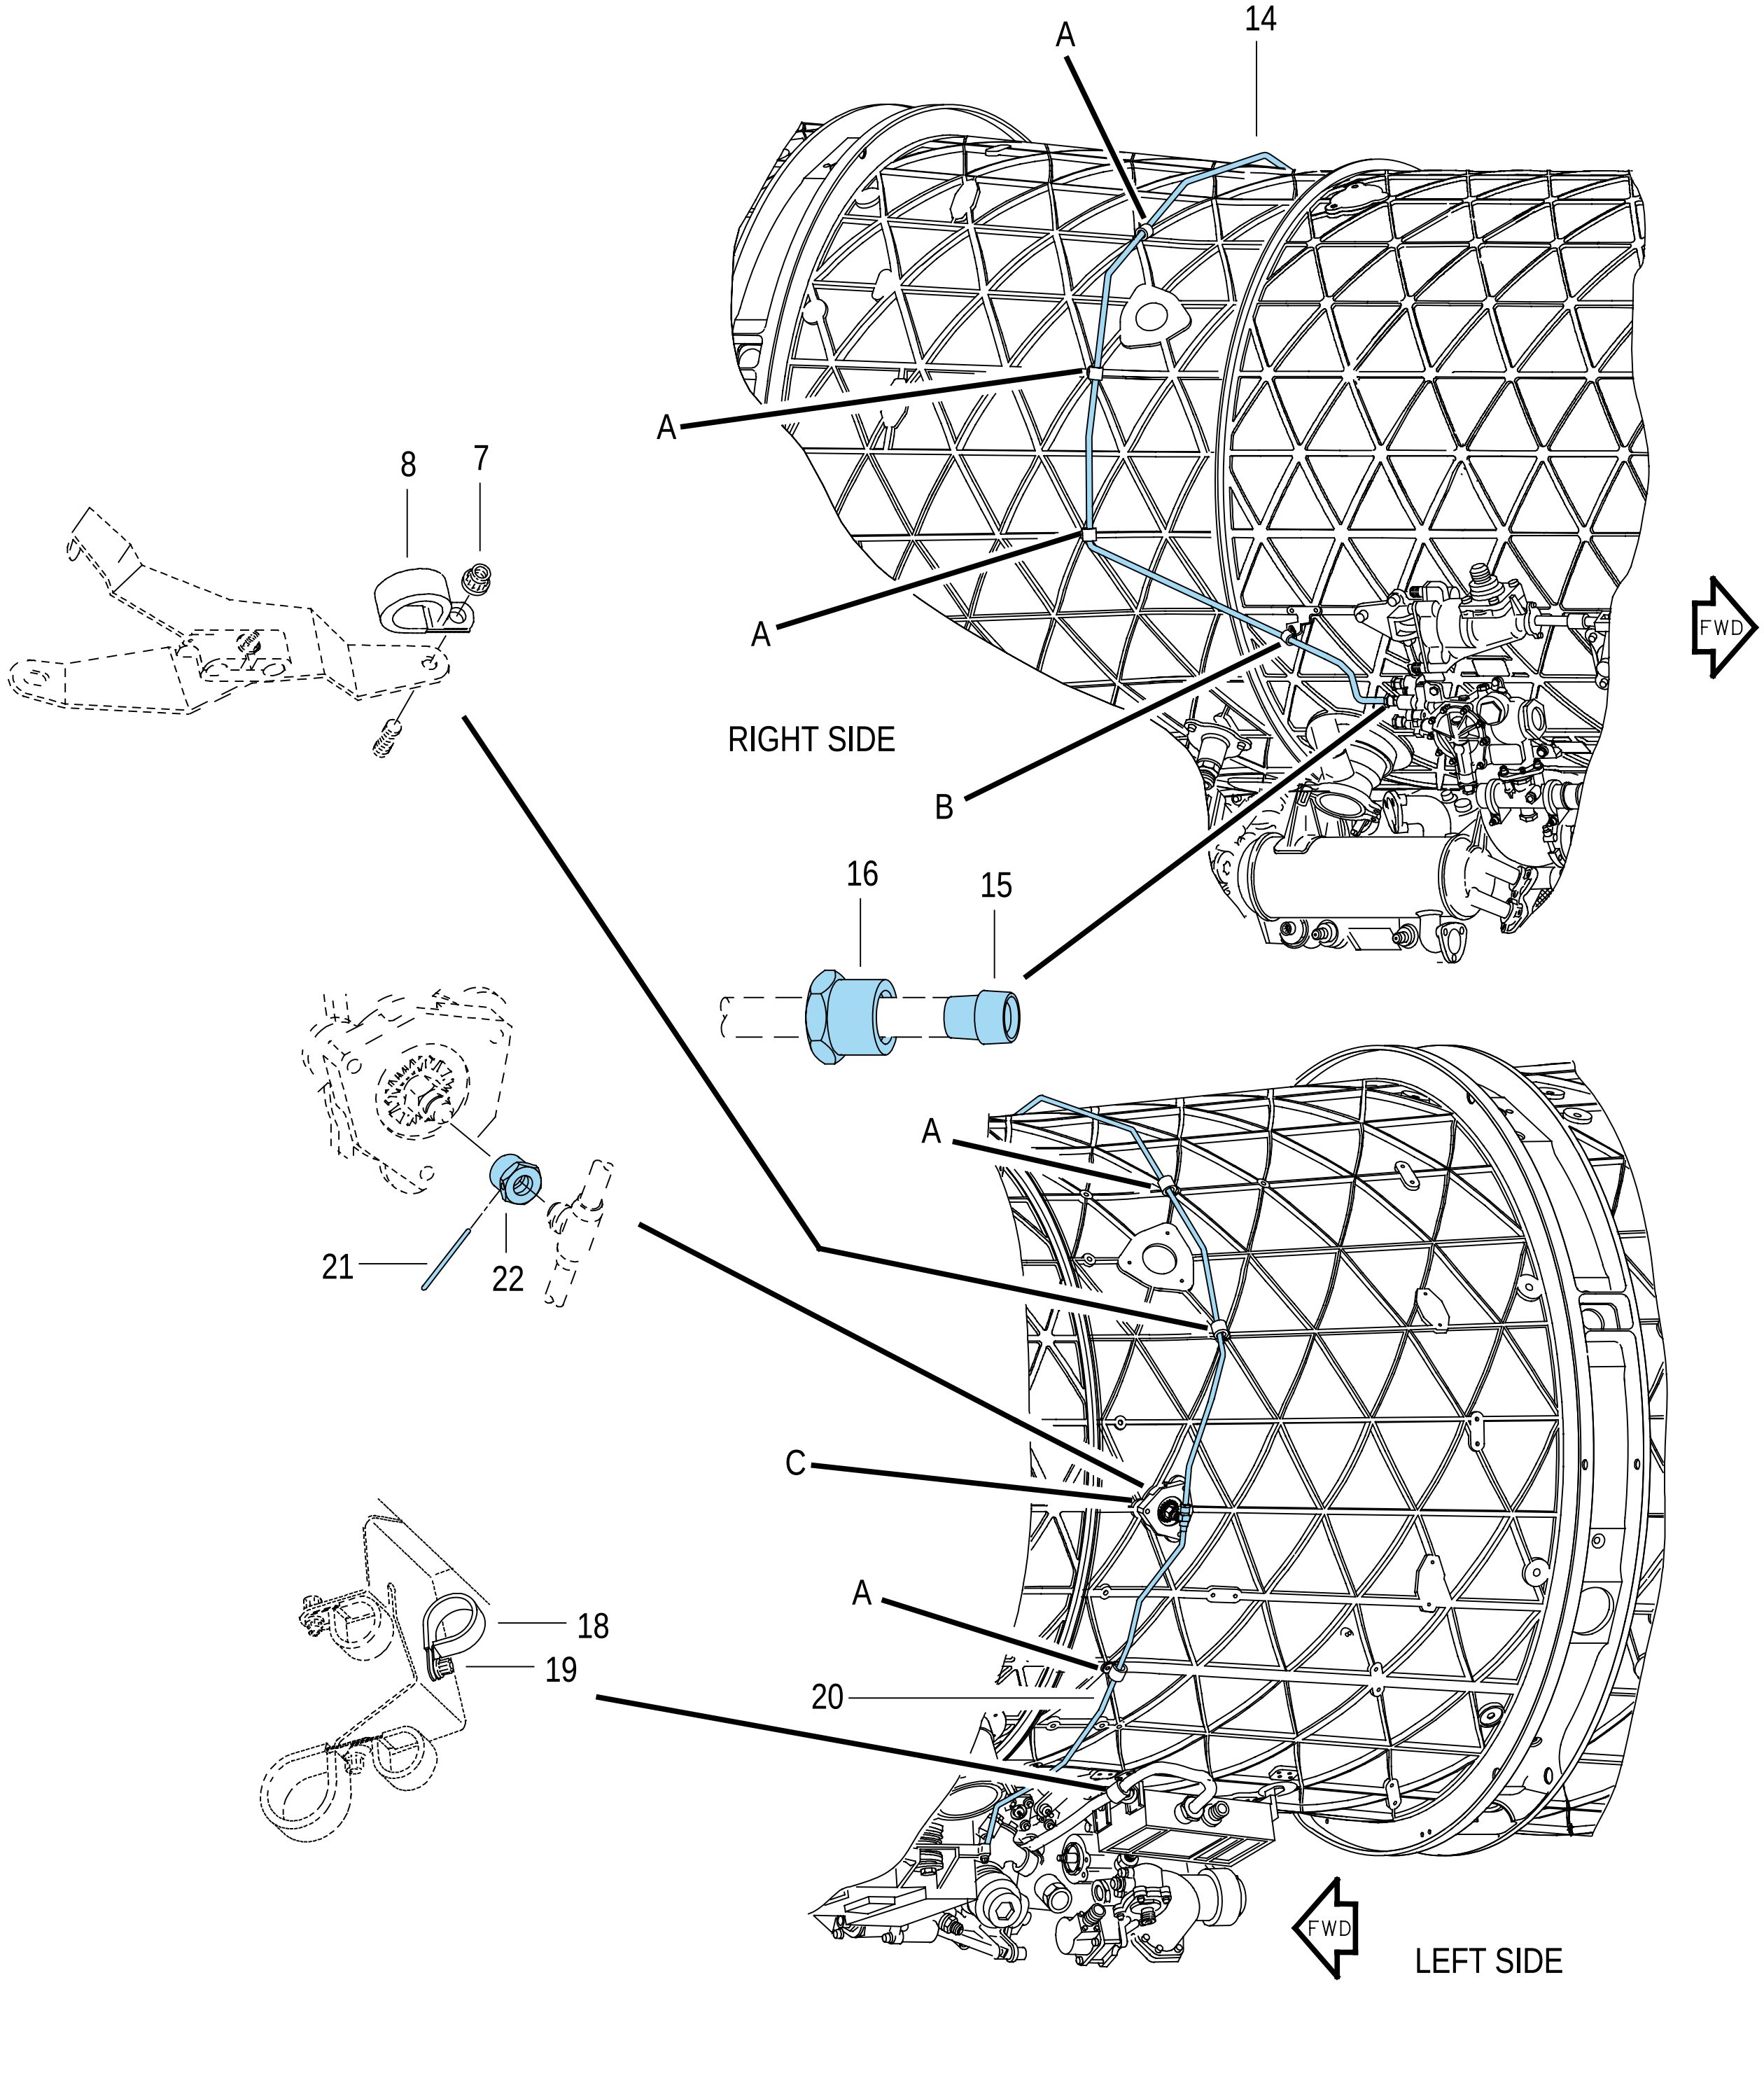


FIGURE 37. AUGMENTOR FUEL PUMP CONTROLLER PRESSURE BURNER TUBE AND SENSOR, COMBUSTION PRESSURE AND DEEC PT6 MANIFOLDS AND TOTAL PRESSURE PROBE
(SHEET 2 OF 3)

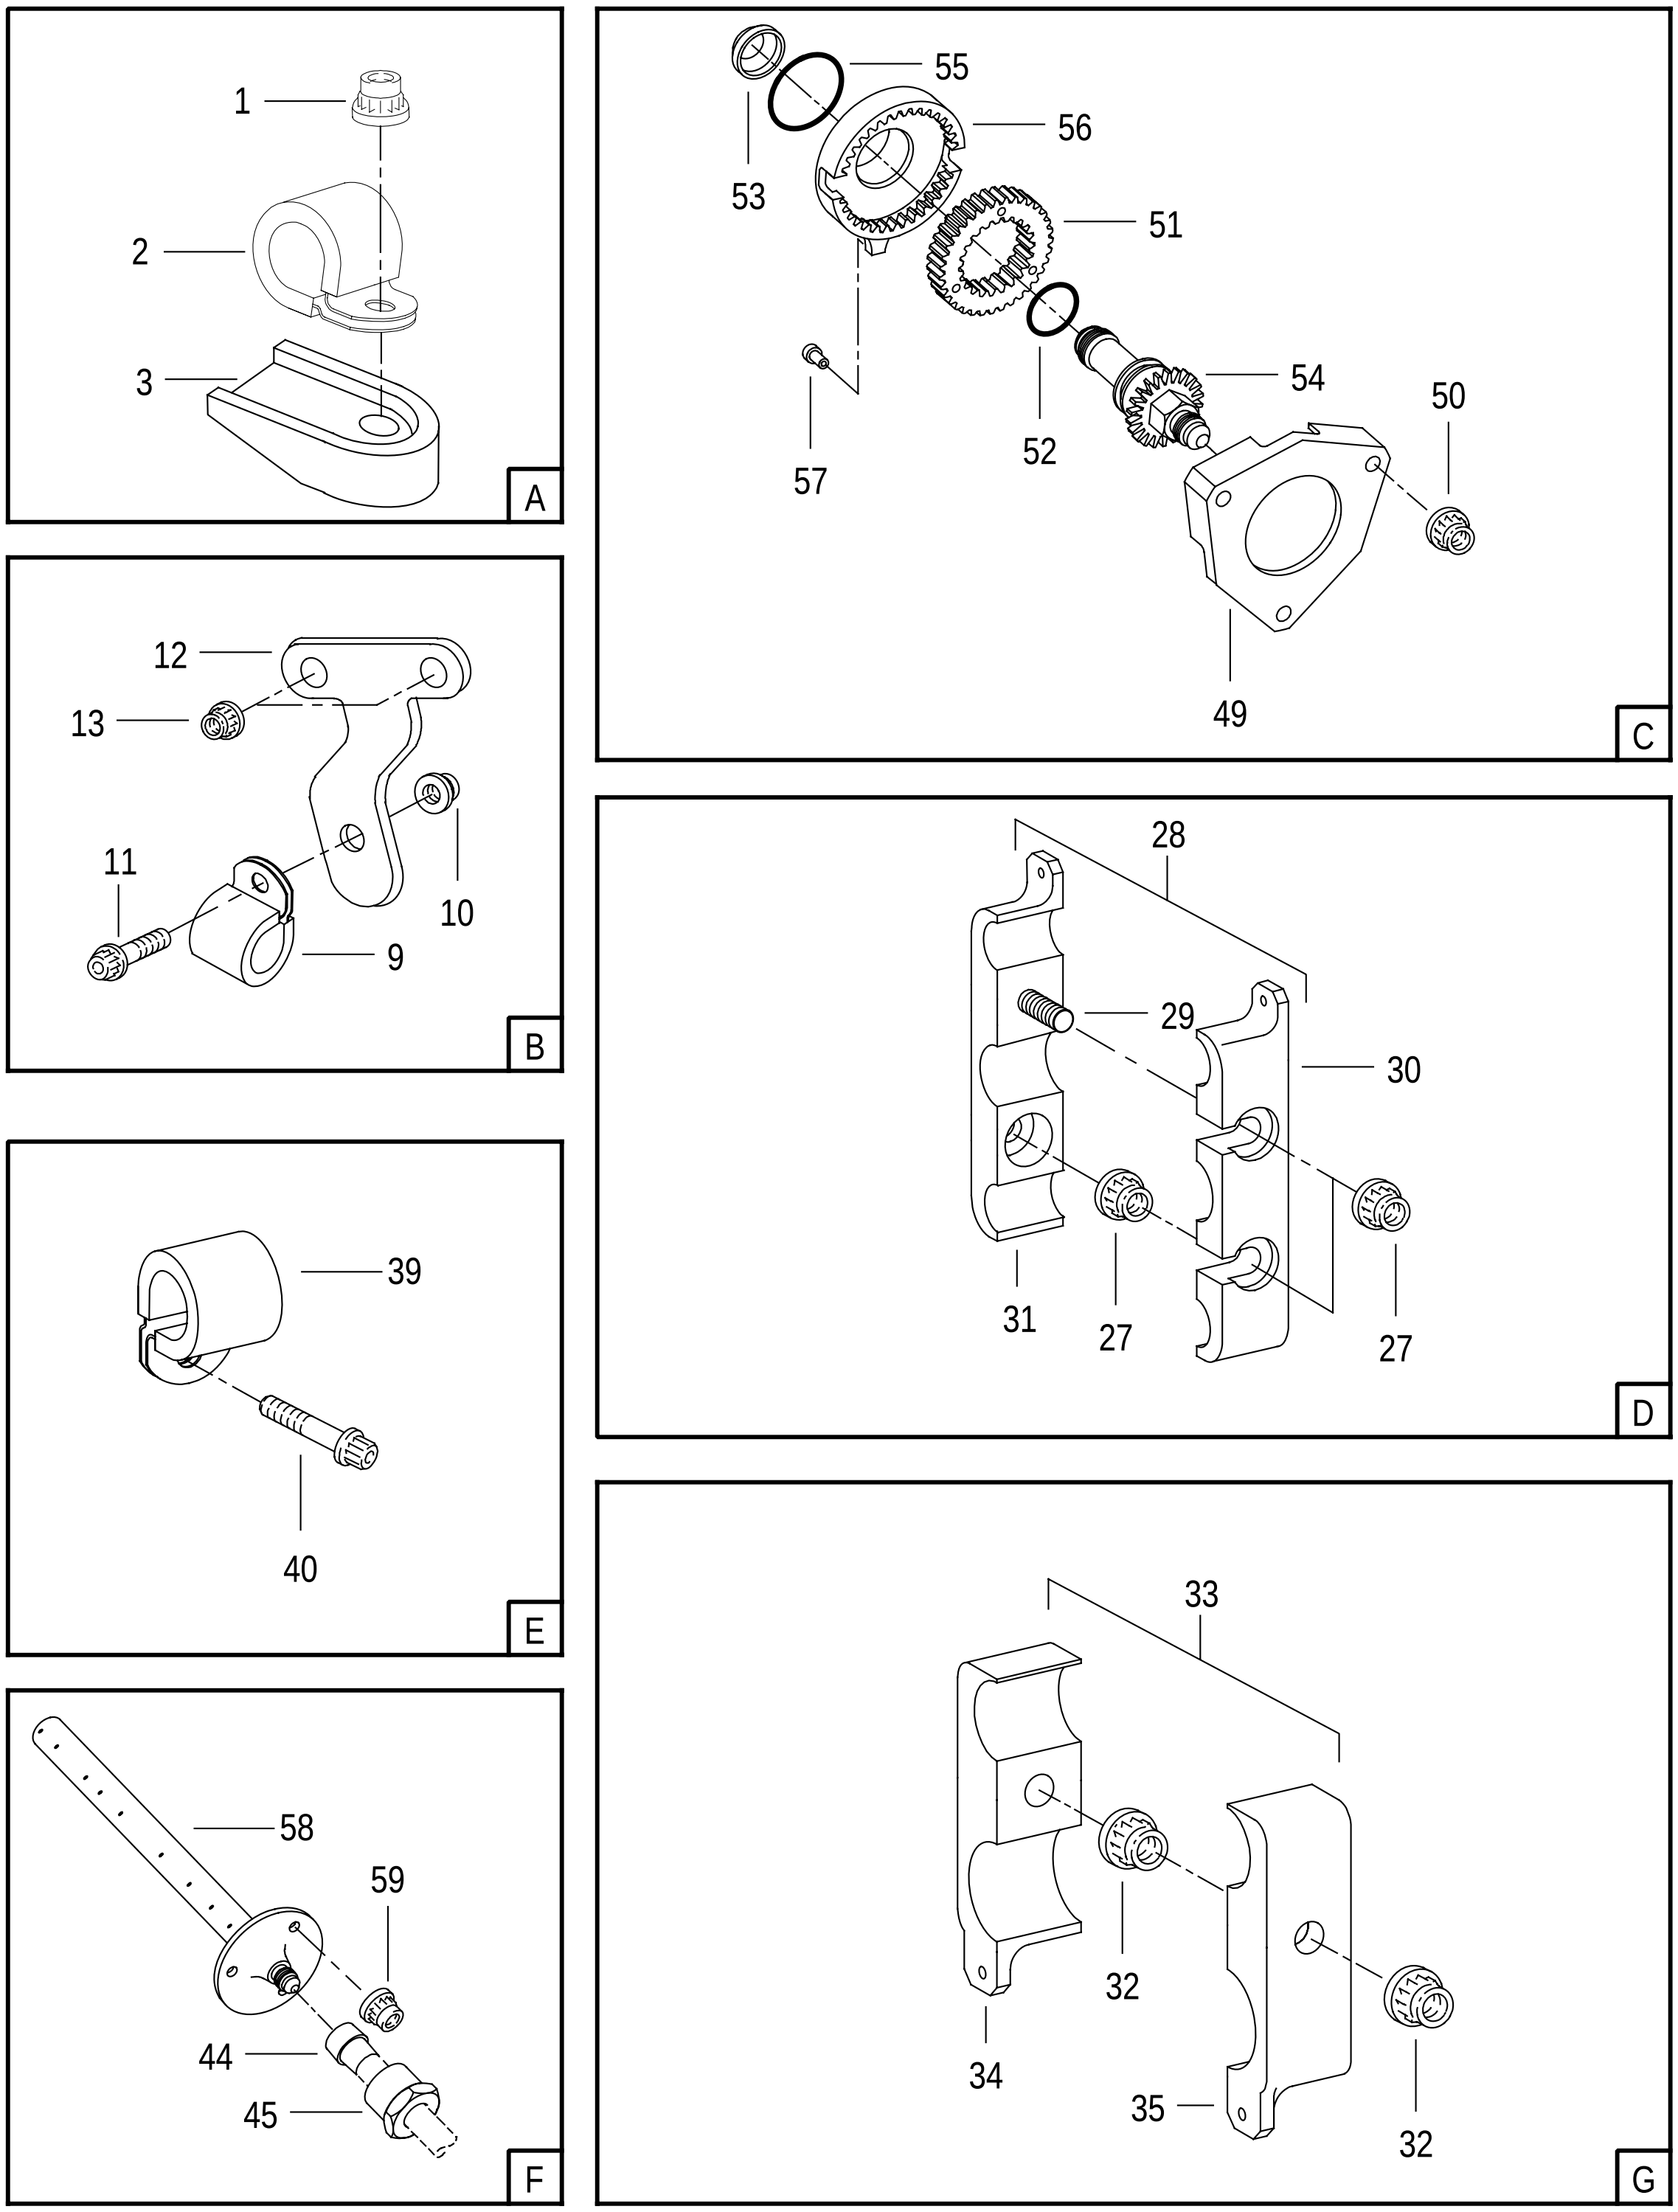


FIGURE 37. AUGMENTOR FUEL PUMP CONTROLLER PRESSURE BURNER TUBE AND SENSOR, COMBUSTION PRESSURE AND DEEC PT6 MANIFOLDS AND TOTAL PRESSURE PROBE
(SHEET 3 OF 3)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	37	NO NUMBER		AUGMENTOR FUEL PUMP CONTROLLER .... PRESSURE BURNER TUBE AND SENSOR PRESSURE AND DEEC PT6 MANIFOLDS AND TOTAL PRESSURE PROBE SEE FIG. 33-4 FOR NHA	REF		
	- 1	4023115	52661	. NUT OPTION .... SEE OPTION TABLE	6		PAOZZ
	- 2	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-04	6		PAOZZ
		ST1540-04	52661	. CLAMP-LOOP, CUSHION..........................	6		PAOZZ
	- 3	4077582	52661	. SPACER-CLAMP .... WHEN EXH USE 4079778	6		PAOZZ
		4079778	52661	. CHANNEL-LOOP CLAMP .... MAY BE USED WITH ST2439-04	6		PAOZZ
	- 4	DELETED					
	- 5	DELETED					
	- 6	DELETED					
	- 7	4023115	52661	. NUT OPTION .... SEE OPTION TABLE	1		PAOZZ
	- 8	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION....................	1		PAOZZ
	- 9	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-04	1		PAOZZ
		ST1540-04	52661	. CLAMP-LOOP, CUSHION..........................	1		PAOZZ
	- 10	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
	- 11	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
	- 12	4072726	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
	- 13	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
R	- 14	4083859-01	52661	. TUBE-PRESSURE BURNER, AUGMENTOR FUEL ... PUMP CONTROLLER, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
	- 15	MS9483-04	96906	.. FERRULE	1		PAFZZ
	- 16	MS9198-04	96906	.. NUT	1		PAFZZ
	- 17	MS9314-04	96906	. CAP ASSY	2		PAOZZ
	- 18	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-04	1		PAOZZ
		ST1540-04	52661	. CLAMP-LOOP, CUSHION..........................	1		PAOZZ
	- 19	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
R	- 20	4081481-01	52661	. MANIFOLD-COMBUSTION CHAMBER PRESSURE, .. ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
	- 21	360193	52661	.. WIRE-THRUST .... 0.078 DIA X 1.190 IN. LONG	2		PAFZZ
	- 22	ST2121-04	52661	.. NUT-TUBE COUPLING, THRUST WIRE .... 0.4375-20UNJF-3B X 0.250 IN. TUBE OD	2		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	37 - 23	4084033-01	52661	. TUBE-PB, WATER TRAP TO DEEC, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
	- 24	360193	52661	.. WIRE-THRUST 0.078 DIA X 1.190 IN. LONG	1		PAFZZ
	- 25	ST2121-04	52661	.. NUT-TUBE COUPLING, THRUST WIRE 0.4375-20UNJF-3B X 0.250 IN. TUBE OD	1		PAFZZ
R	- 26	DELETED		...			
R	- 26A	4081518	52661	. TRAP-MOISTURE, PB, ASSY OF	1		PAOBZ
R	- 26B	MS9100-04	96906	. NUT	1		PAOZZ
	- 27	4023115	52661	. NUT OPTION SEE OPTION TABLE	6		PAOZZ
	- 28	4077341	52661	. CLAMP-BLOCK, GROMMET, ASSY OF WHEN EXH USE 4078528	2		PAOBZ
		4078528	52661	. CLAMP-BLOCK, GROMMET, ASSY OF PARTIAL BREAKDOWN FOLLOWS	2		PAOBZ
	- 29	TR28009-12	29372	.. STUD-LOCKED IN 0.190-32 X 0.250-28 X 1.000 IN. LONG P&W PART NO. ST2665-12	1		PAFZZ
	- 30	4077342	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 31	4077343	52661	.. CLAMP HALF-BLOCK, GROMMET, 3 HOLE	1		XA
	- 32	4023115	52661	. NUT OPTION SEE OPTION TABLE	2	BN	PAOZZ
	- 33	4071646	52661	. CLAMP-BLOCK, GROMMET, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1	BN	PAOBZ
	- 34	4071644	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 35	4071645	52661	.. CLAMP HALF-BLOCK, GROMMET, 2 HOLE	1		XA
	- 36	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION WHEN EXH USE ST1540-04	1	BP/FN	PAOZZ
		ST1540-04	52661	. CLAMP-LOOP, CUSHION	1	BP/FP	PAOZZ
	- 37	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1	BP	PAOZZ
	- 38	4077582	52661	. SPACER-CLAMP WHEN EXH USE 4079778	1	BP/FN	PAOZZ
		4079778	52661	. CHANNEL-LOOP CLAMP MAY BE USED WITH ST2439-04	1	BP/FP	PAOZZ
	- 39	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION WHEN EXH USE ST1540-04	1		PAOZZ
		ST1540-04	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	- 40	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
R	- 41	DELETED		...			
R	- 41A	4082241-01	52661	. TUBE-PT6, DEEC, ASSY OF	1		PAOFF
R	- 41B	4081482-01	52661	. MANIFOLD-PT6, DEEC, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
	- 42	360715	52661	.. WIRE-THRUST 0.078 DIA X 1.590 IN. LONG	1		PAFZZ
	- 43	ST2121-06	52661	.. NUT-TUBE COUPLING, THRUST WIRE 0.5625-18UNJF-3B X 0.375 IN. TUBE OD	1		XA
	- 44	MS9483-04	96906	.. FERRULE	1		PAFZZ
	- 45	MS9198-04	96906	.. NUT	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	37 - 46	4081569-01	52661	. TUBE-PT6, WATER TRAP TO DEEC, ASSY OF	1		PAOFF
	- 47	MS9314-05	96906	. CAP	2		PAOZZ
R	- 48	DELETED					
R	- 48A	4081547	52661	. TRAP-MOISTURE, PT6, ASSY OF	1		PAOBZ
R	- 48B	MS9100-04	96906	. NUT	1		PAOZZ
	- 49	4011411	52661	. PLATE-RETAINING, LOCK	1		PAOZZ
	- 50	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	3		PAOZZ
	- 51	4011410	52661	. LOCK-TRANSFER TUBE	1		PAOBZ
	- 52	MS9386-115	96906	. PACKING	1		PAOZZ
	- 53	ST2284-06	52661	. GASKET OPTION .... SEE OPTION TABLE	1		PAOZZ
	- 54	4071605	52661	. TUBE-TRANSFER, PACKING .... 0.4375-20UNJF-3A X 0.5625-18UNJF-3A X 2.952 IN. LONG	1		PAOFF
	- 55	MS9386-126	96906	. PACKING	1		PAOZZ
	- 56	4011412	52661	. HOUSING-TRANSFER TUBE LOCK, ASSY OF ...... PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
	- 57	4011891	52661	.. PIN-SHOULDER, HEADLESS .... 0.09325 DIA X 0.110 X 0.295 IN. LONG	1		PAFZZ
	- 58	4066423	52661	. PROBE-TOTAL PRESSURE, ASSY OF	1		PAOFF
	- 59	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	3		PAOZZ
R	- 60	4023115	52661	. NUT OPTION .... SEE OPTION TABLE	1		PAOZZ
R	- 61	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG	1		PAOZZ
R	- 62	ST1540-04	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ

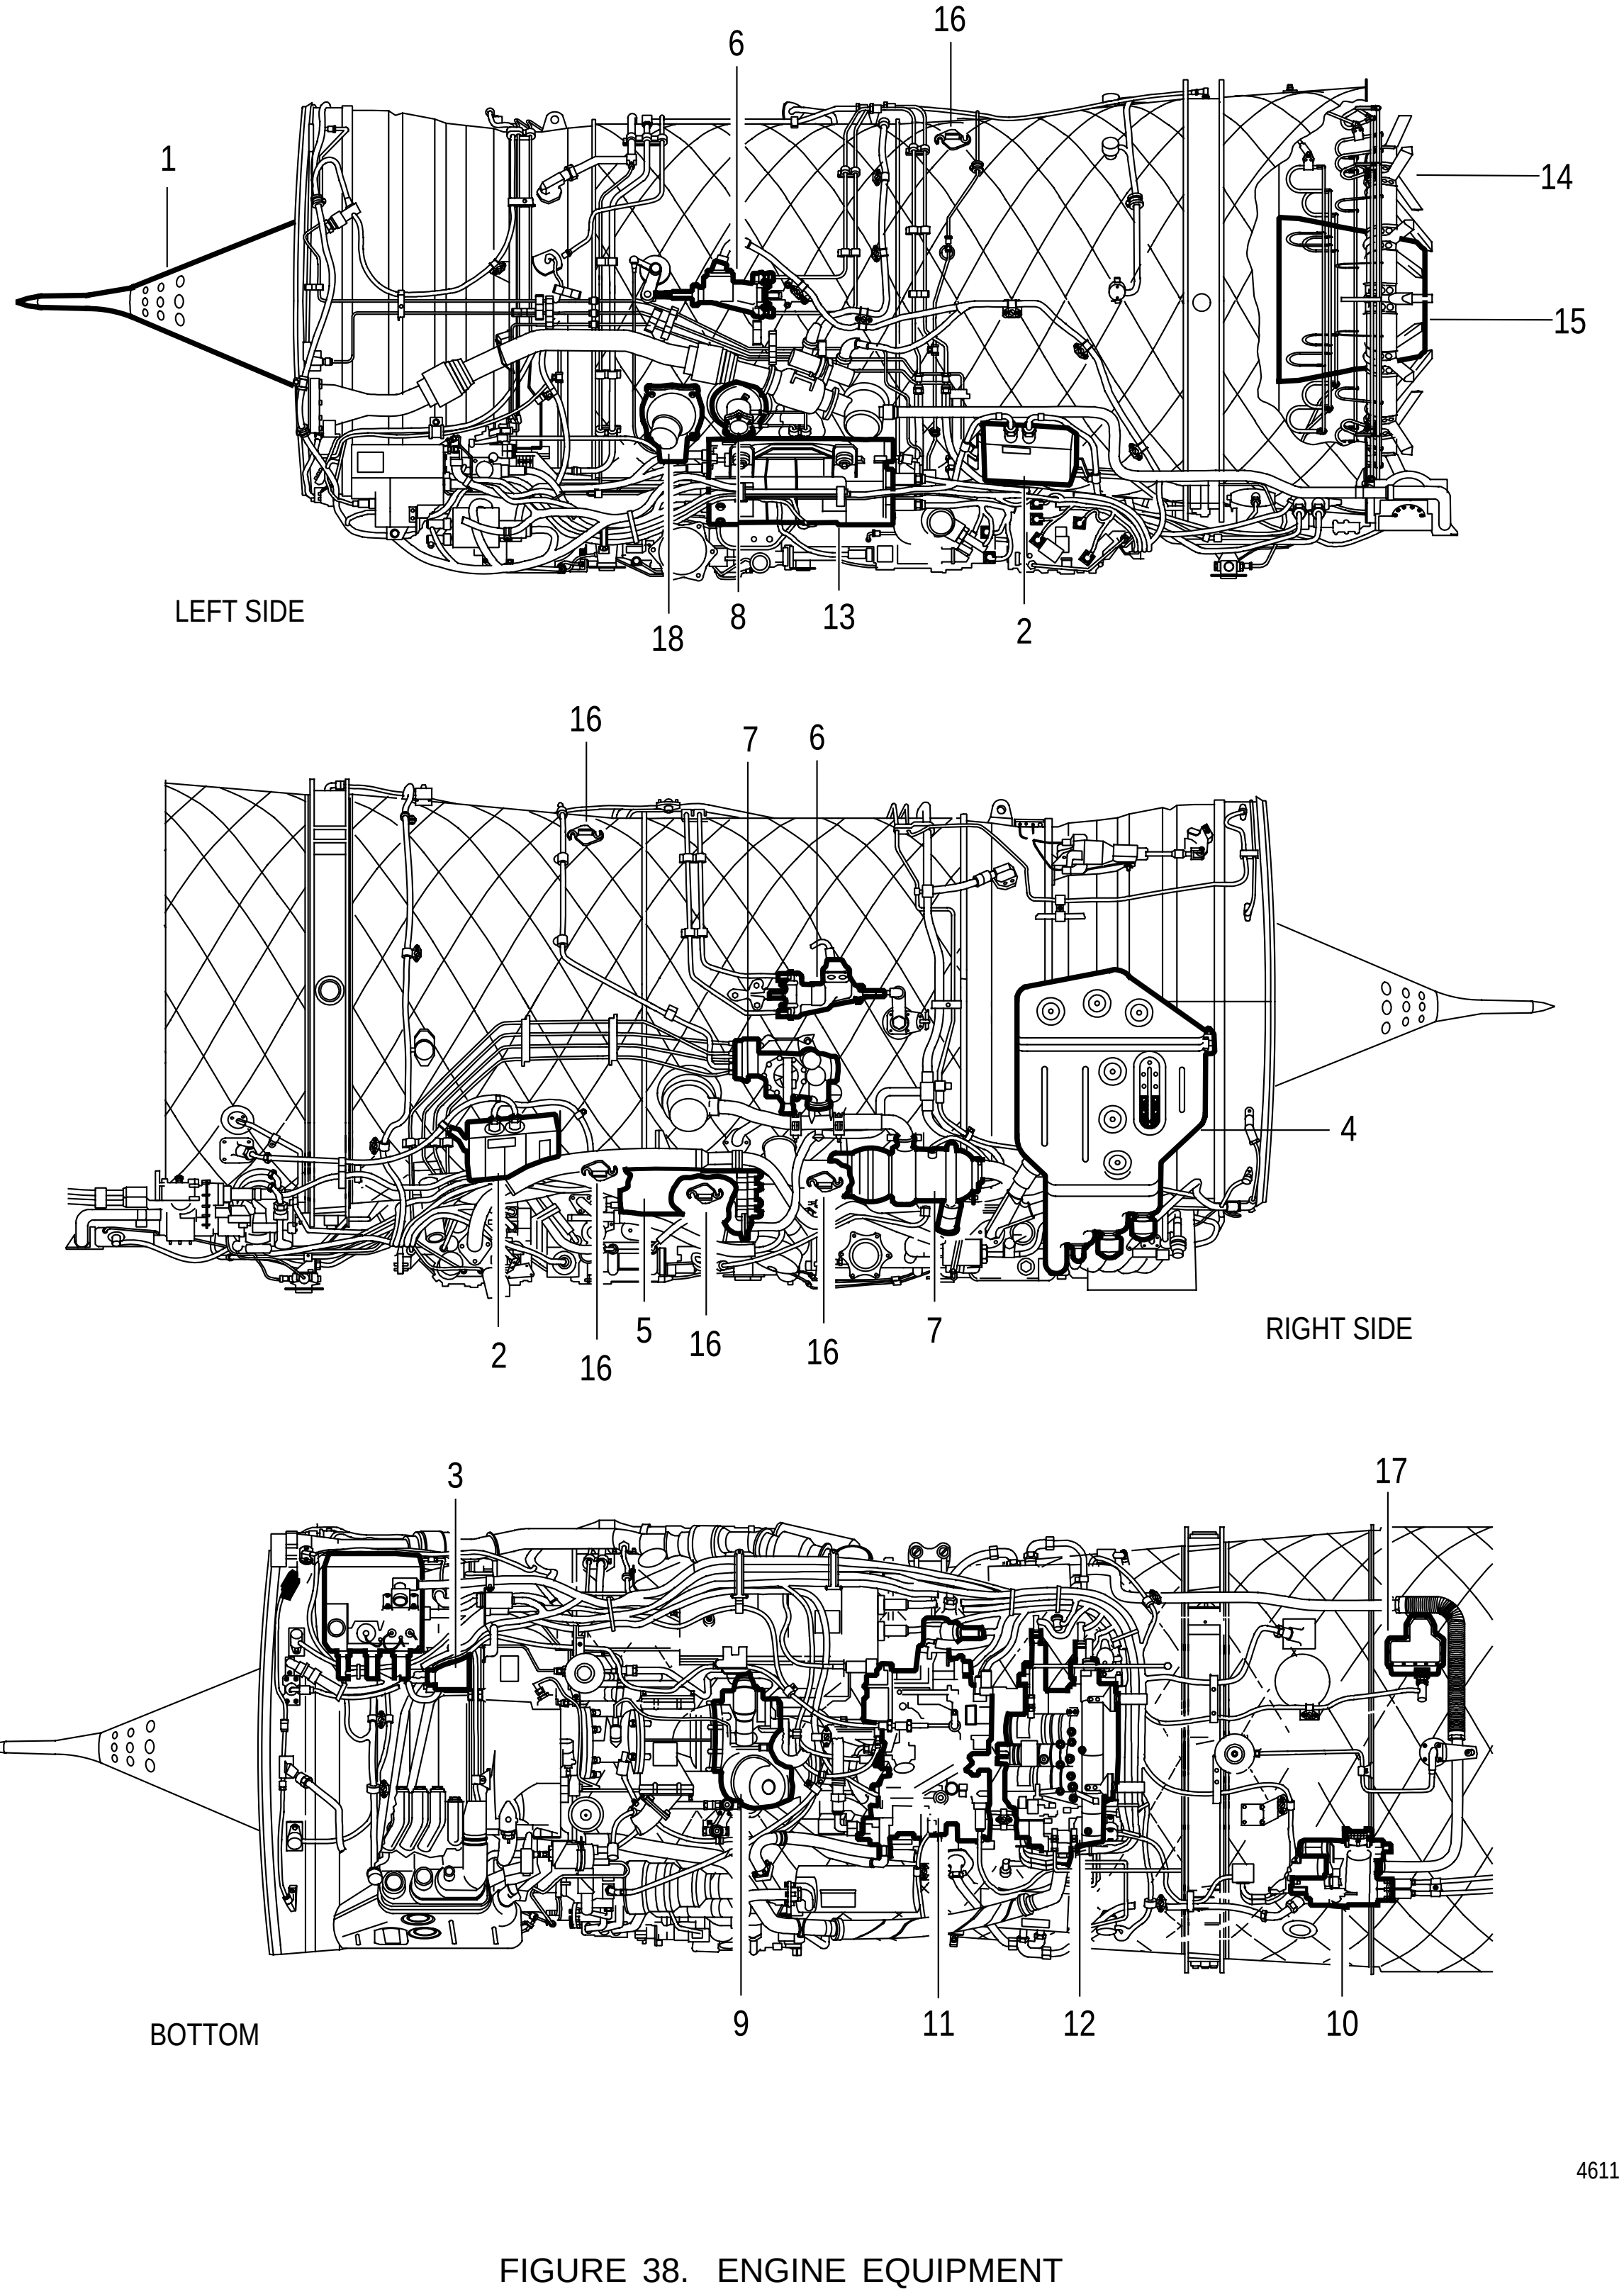


FIGURE 38. ENGINE EQUIPMENT

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
38	NO NUMBER		ENGINE EQUIPMENT . . . . SEE FIG. 1-9 FOR NHA	REF		
- 1	NO NUMBER		. ANTI-ICING CONE, PS2 PROBE, AND TURBINE . . . . LOCK SHAFT SEE FIG. 39 FOR DETAIL PARTS	REF		
- 2	NO NUMBER		. IGNITERS AND DUAL IGNITION EXCITERS . . . . SEE FIG. 40 FOR DETAIL PARTS	REF		
- 3	NO NUMBER		. GENERATOR ROTOR, GENERATOR STATOR, ... AND EDU SEE FIG. 41 FOR DETAIL PARTS	REF		
- 4	NO NUMBER		. OIL TANK AND BRACKETS . . . . SEE FIG. 42 FOR DETAIL PARTS	REF		
- 5	NO NUMBER		. OIL COOLER AND FUEL PRESSURIZING AND . . . . . DUMP VALVE SEE FIG. 43 FOR DETAIL PARTS	REF		
- 6	NO NUMBER		. RCVV ACTUATORS AND CONTROLS . . . . SEE FIG. 44 FOR DETAIL PARTS	REF		
- 7	NO NUMBER		. AUGMENTOR FUEL PUMP AND FUEL PUMP . . . . . . CONTROLLER SEE FIG. 45 FOR DETAIL PARTS	REF		
- 8	NO NUMBER		. LINEAR COMPRESSOR BLEED ACTUATING . . . . CYLINDER SEE FIG. 46 FOR DETAIL PARTS	REF		
- 9	NO NUMBER		. MAIN FUEL GEAR PUMP . . . . SEE FIG. 47 FOR DETAIL PARTS	REF		
- 10	NO NUMBER		. CONVERGENT EXHAUST NOZZLE CONTROL, ... VENT TUBE, AND ACTUATOR SHAFT SEE FIG. 48 FOR DETAIL PARTS	REF		
- 11	NO NUMBER		. MAIN FUEL CONTROL . . . . SEE FIG. 49 FOR DETAIL PARTS	REF		
- 12	NO NUMBER		. AUGMENTOR FUEL CONTROL . . . . SEE FIG. 50 FOR DETAIL PARTS	REF		
- 13	NO NUMBER		. DIGITAL ELECTRONIC ENGINE CONTROL . . . . SEE FIG. 51 FOR DETAIL PARTS	REF		
- 14	NO NUMBER		. AUGMENTOR FLAMEHOLDER AND AUGMENTOR . SPRAY MANIFOLD ASSEMBLIES SEE FIG. 53 FOR DETAIL PARTS	REF		
- 15	NO NUMBER		. NO. 5 BEARING SUPPORT RODS, INTERNAL OIL . . TUBING, HEAT SHIELD, AND TURBINE EXHAUST CONE SEE FIG. 55 FOR DETAIL PARTS	REF		
- 16	NO NUMBER		. BORESCOPE PLUGS . . . . SEE FIG. 56 FOR DETAIL PARTS	REF		
- 17	NO NUMBER		. LIGHT OFF DETECTOR . . . . SEE FIG. 52 FOR DETAIL PARTS	REF		
- 18	NO NUMBER		. FAN AIR BLEED . . . . SEE FIG. 57 FOR DETAIL PARTS	REF		

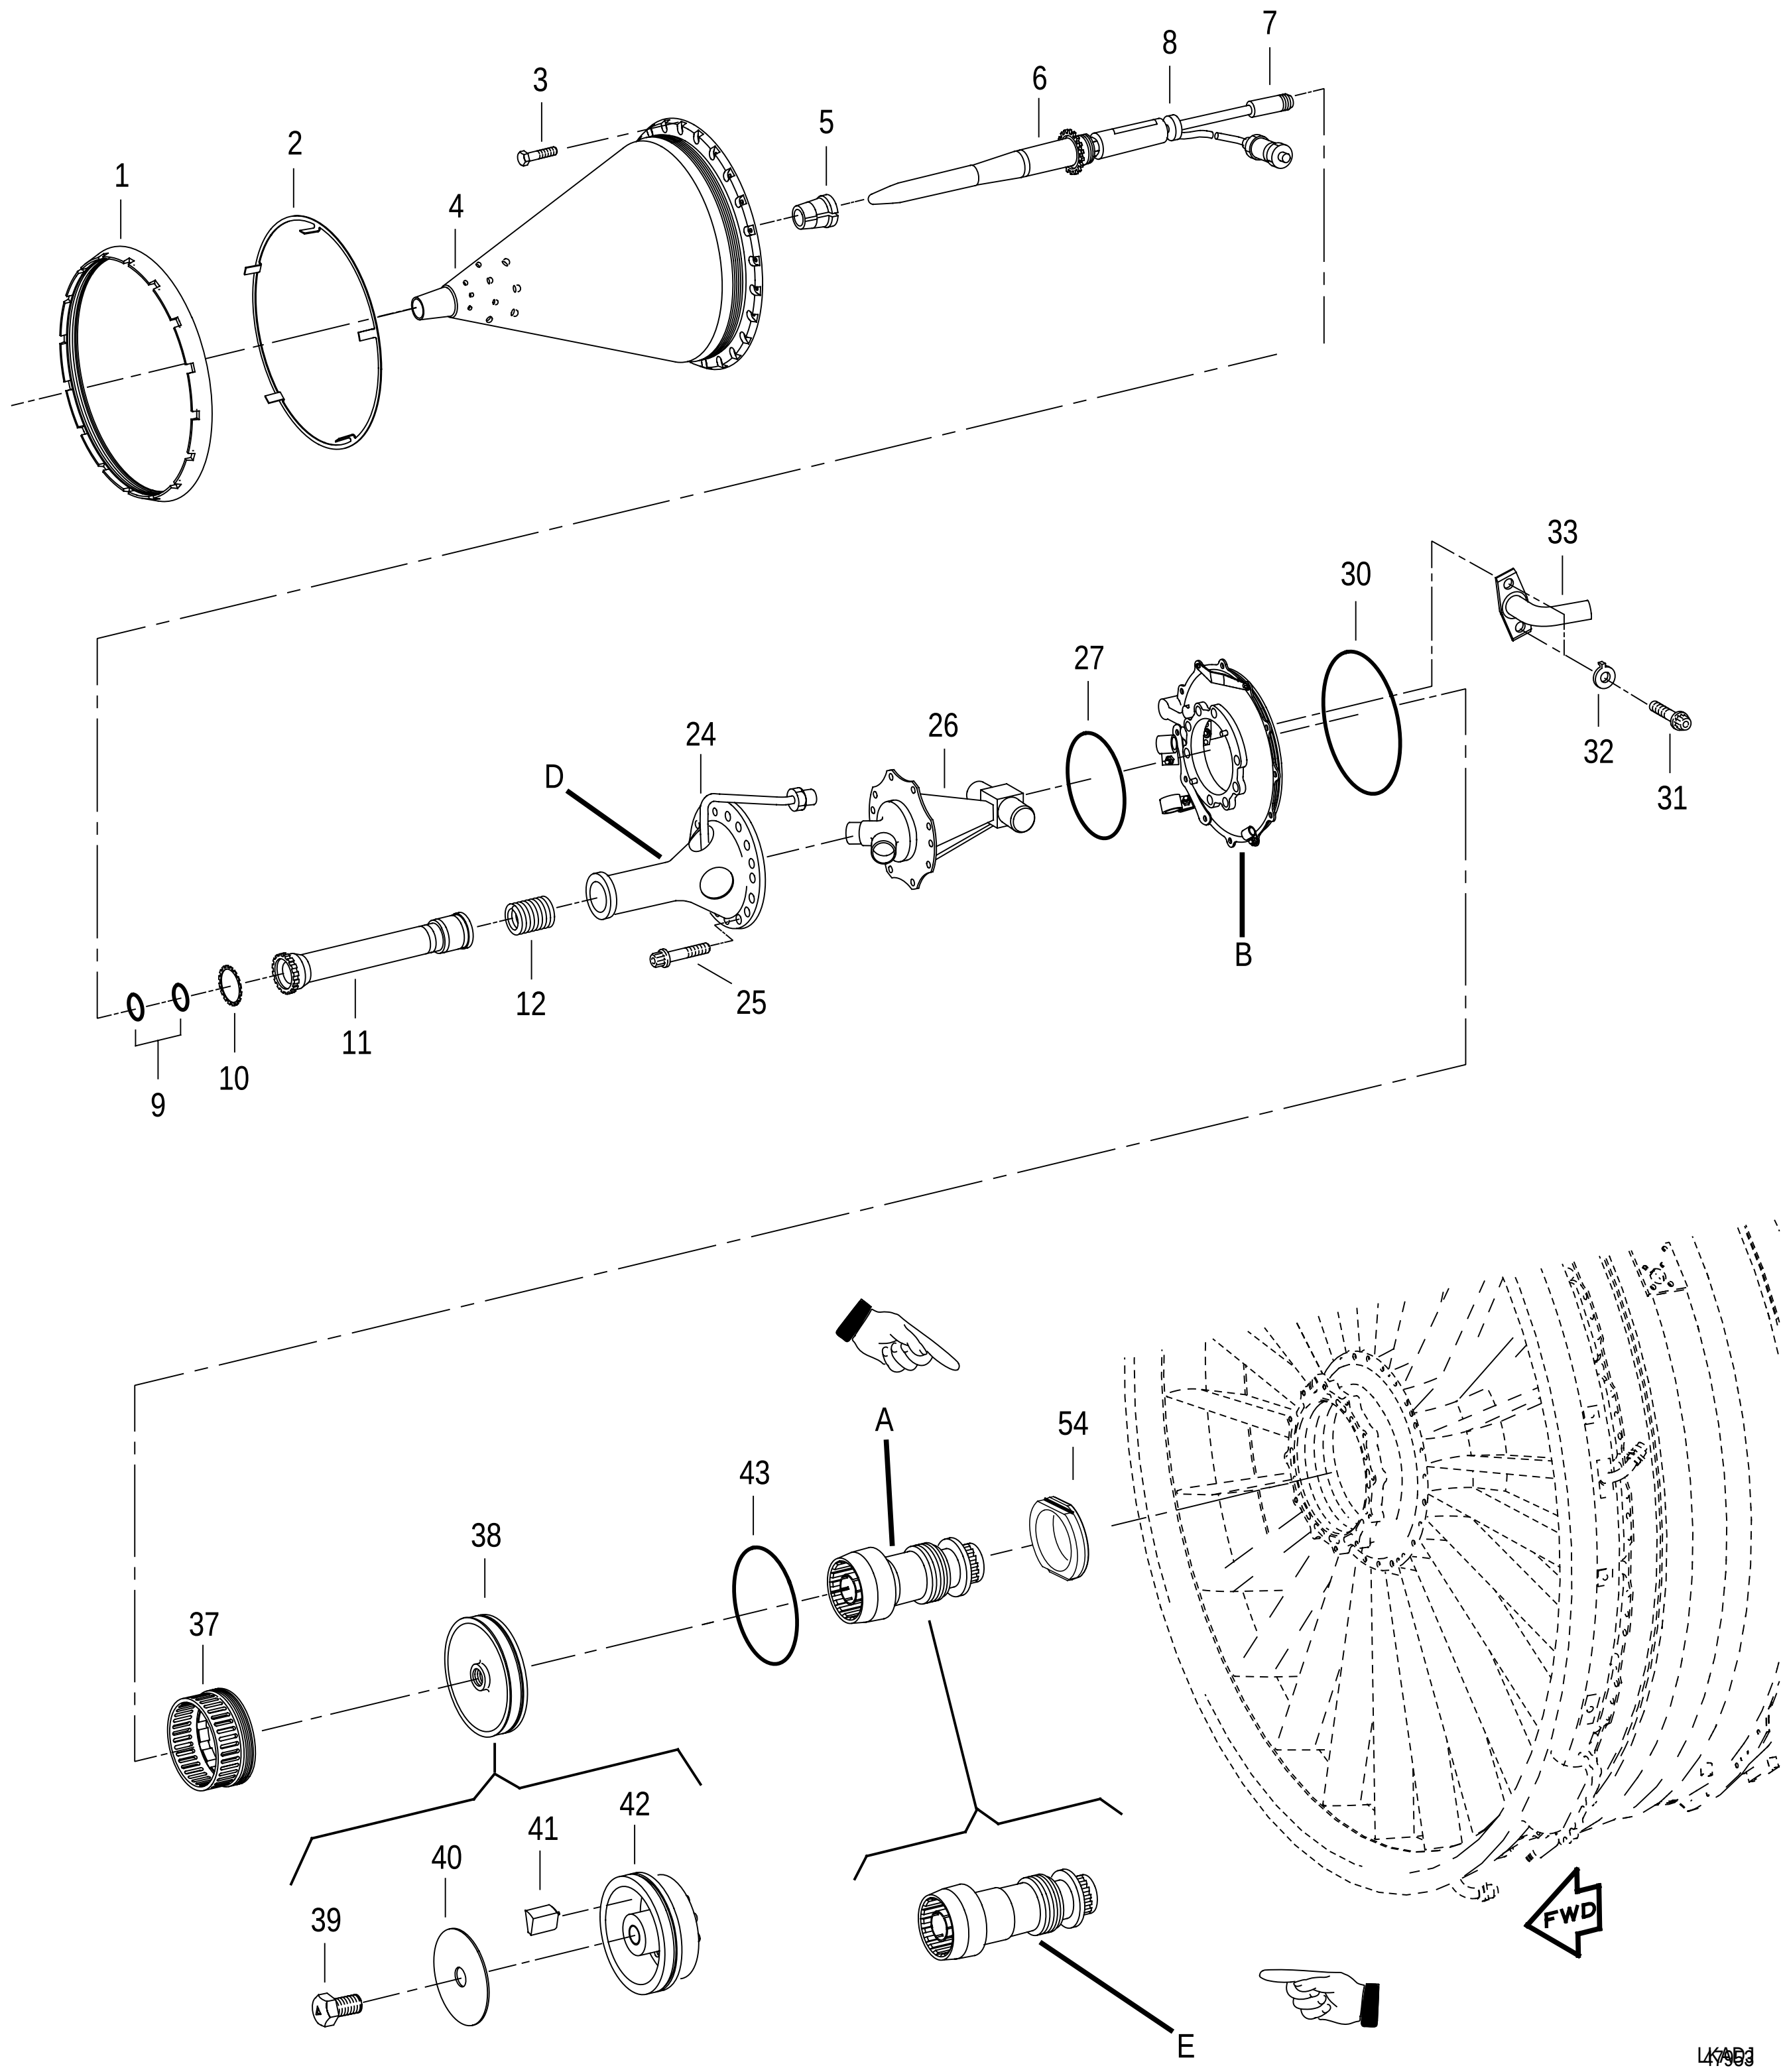


FIGURE 39. ANTI-ICING CONE, PS2 PROBE, AND TURBINE LOCK SHAFT
(SHEET 1 OF 2)

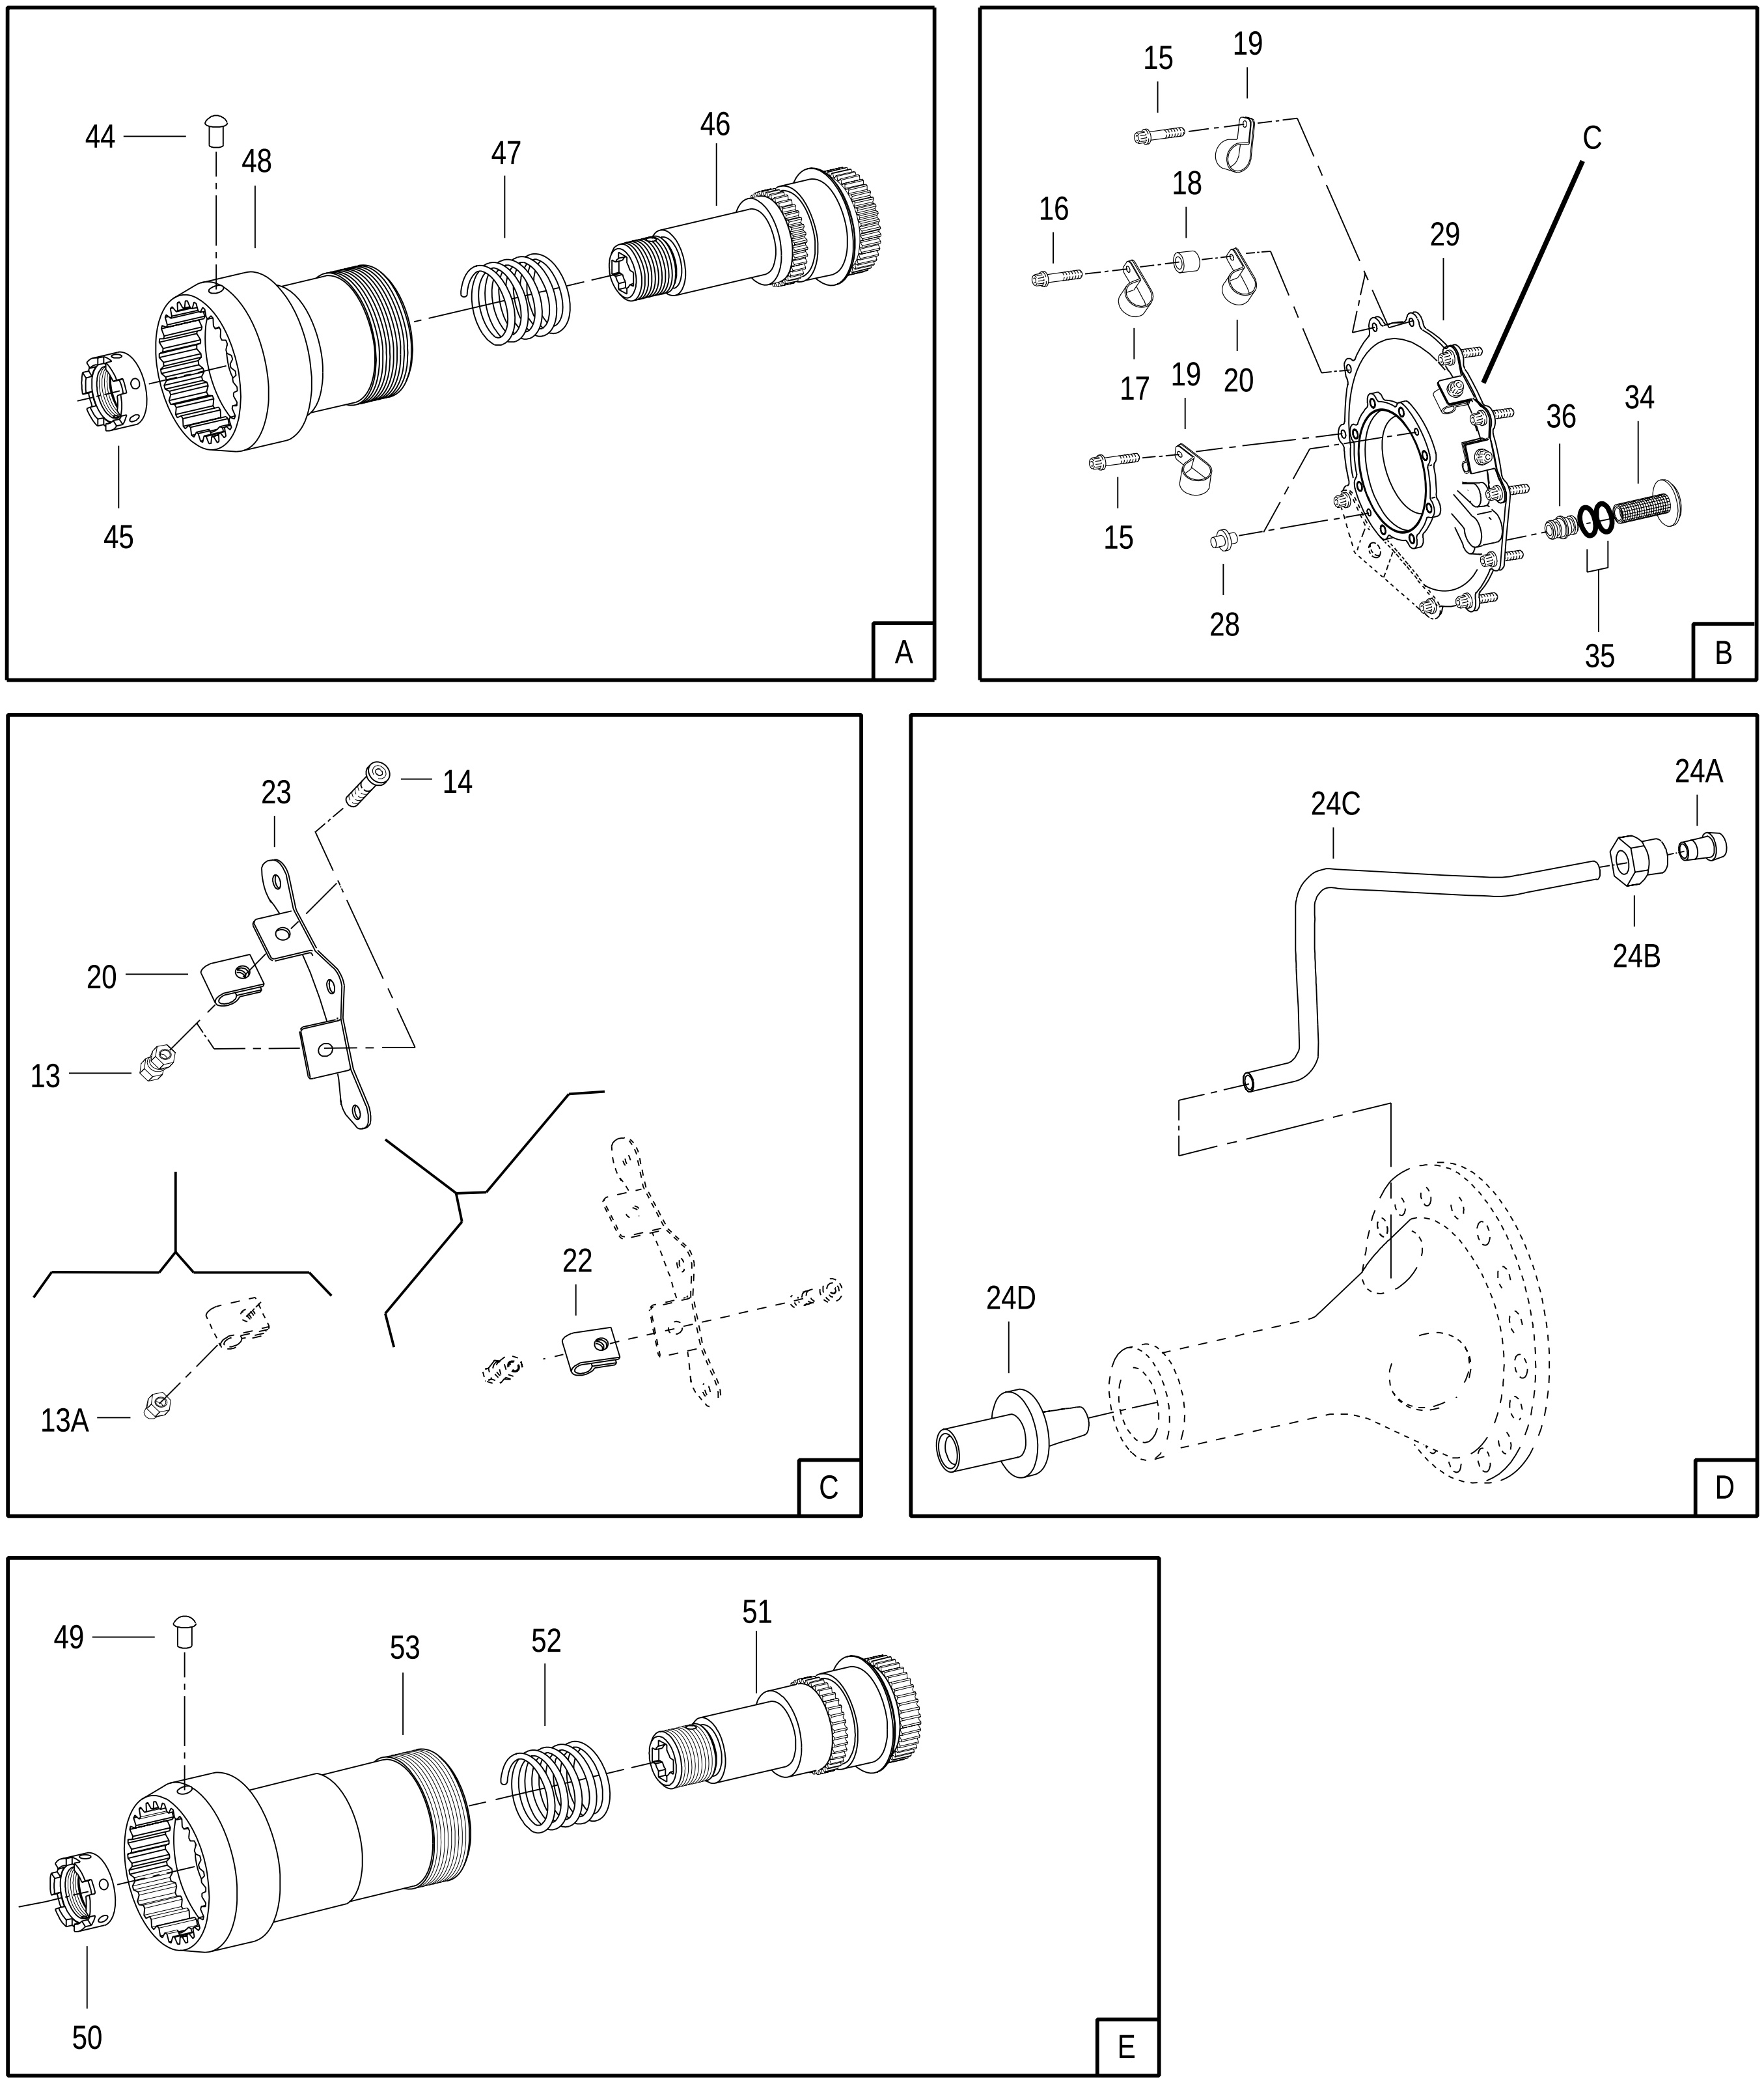


FIGURE 39. ANTI-ICING CONE, PS2 PROBE, AND TURBINE LOCK SHAFT
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
39	NO NUMBER		ANTI-ICING CONE, PS2 PROBE, AND TURBINE LOCK SHAFT SEE FIG. 38-1 FOR NHA	REF		
- 1	4067110	52661	. NUT-PLAIN, ROUND 8.875-16UNJ-3B X 0.690 IN. THK	1		PAOZZ
- 2	4064164	52661	. WASHER-KEY 9.010 ID X 0.037 IN. THK	1		PAOZZ
- 3	ST2015-018	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.562 IN. LONG REPLACES ST2015-016	25		PAFZZ
- 4	4079144	52661	. CONE-ANTI-ICING, ASSY OF	1		PAODD
- 5	4061881	52661	. SPACER-PS2 PROBE	1		PAOZZ
- 6	0855GA	59885	. PROBE-PS2 P&W PART NO. 4073980 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 7	00855-1500-0001	59885	.. FITTING-AIR, PS2 PROBE	1		PADZZ
- 8	00855-1502-0001	59885	.. SPACER-PS2 PROBE	1		PADZZ
R - 9	= AS3209-009	81343	. PACKING	2		PAFZZ
R	= M83248/1-009	81349	. PACKING	2		PAFZZ
- 10	4061880	52661	. WASHER-KEY 1.250 OD X 0.031 IN. THK	1		PAOZZ
- 11	4076102	52661	. TUBE-PS2 PROBE, ASSY OF	1		PAOZZ
- 12	4061887	52661	. SPRING-HELICAL COMPRESSION 1.000 OD X 0.149 DIA WIRE X 8.044 COILS	1		PAFZZ
- 13	HL599KF-5	56878 73197	. COLLAR-PIN-RIVET, THREADED, SELF-LOCKING 0.164-32UNJC-3B X 0.490 IN. LONG P&W PART NO. 4061774 SUPERSEDED BY H54475-08 AND 76467-832	2		PAFZZ
- 13A	= H54475-08	15653	. NUT-SELF-LOCKING, HEX P&W PART NO. 4082753-01 SUPERSEDES HL599KF-5	2		PAFZZ
	= 76467-832	56878	. NUT-SELF-LOCKING, HEX P&W PART NO. 4082753-01 SUPERSEDES HL599KF-5	2		PAFZZ
- 14	HL244-5-3	06725 56878 73197 92215	. PIN-RIVET-THREADED, FLAT 0.164-32UNJC-3A X 0.500 IN. LONG P&W PART NO. ST2273-03	2		PAFZZ
- 15	ST2016-016	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG	11		PAOZZ
- 16	ST2016-030	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.190-32UNJF-3A X 0.938 IN. LONG	1		PAOZZ
- 17	MS122903	96906	. CLAMP	1		PAOZZ
- 18	ST2108-10	52661	. SPACER-SLEEVE 0.203 ID X 0.406 ID X 0.312 IN. LONG	1		PAOZZ
- 19	MS122903	96906	. CLAMP	3		PAOZZ
- 20	= MS122902	96906	. CLAMP	1		PAOZZ
	= MS122903	96906	. CLAMP	1		PAOZZ
	= MS122904	96906	. CLAMP	1		PAOZZ
- 21	DELETED		...			
- 22	MS122903	96906	. CLAMP	1		PAOZZ
- 23	4071765	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 24	4064162	52661	. CONE-ANTI-ICING, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOLD
- 24A	MS9483-03	96906	.. FERRULE	1		XA
- 24B	MS9198-03	96906	.. NUT	1		XA

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
39 - 24C		4064163	52661	.. TUBE-PS2 PROBE	1		XA
- 24D		4061889	52661	.. SUPPORT-PS2 PROBE TUBE	1		XA
- 25		ST2016-016	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	8		PAOZZ
- 26		473452	36536	. SENSOR-ELECTRICAL, QUAD N1 P&WA PART NO. 4061499	1		PAOBZ
- 27		AS3209-150	81343	. PACKING-PREFORMED	1		PAOZZ
		4064153	52661	. SUPPORT-COMPRESSOR INLET CONE, ASSY OF	1	EU	PAODD
		4077227	52661	. SUPPORT-COMPRESSOR INLET CONE, ASSY OF	1	EV	PAODD
- 28		4019254	52661	.. PIN-SHOULDER, HEADLESS 0.09325 DIA AND 0.1855 DIA X 0.200 IN. LONG	2		PAFZZ
- 29		4064154	52661	.. COVER-NO. 1 BEARING HOUSING USE ONLY ON 4064153	1		XA
		4077228	52661	.. COVER-NO. 1 BEARING HOUSING USE ONLY ON 4077227	1		XA
- 30	=	AS3209-165	81343	. PACKING-PREFORM	1		PAFZZ
	=	M83248/1-165	81349	. PACKING AF ASSIGNED APPLICATION	1		PAFZZ
- 31		MS9676-06	96906	. BOLT	2	EU	PAFZZ
		MS9676-04	96906	. BOLT MAY BE USED WITH 4064153	2	EV	PAFZZ
- 32		MS9880-09	96906	. WASHER	2		PAFZZ
- 33		4064156	52661	. TUBE-PRESSURE, NO. 1 BEARING, ASSY OF	1		PAFFF
- 34		4055105-01	52661	. STRAINER ELEMENT-SLEEVE, NO. 1 BEARING	1		PAFBZ
- 35		AS3209-110	81343	. PACKING-PREFORM	2		PAFZZ
- 36		4064155	52661	. TUBE-TRANSFER, PACKING 0.316 ID X 0.560 OD X 0.860 IN. LONG	1		PAFFF
- 37	=	4075402	52661	. NUT OPTION SEE OPTION TABLE	1		PAFDD
	=	4080377	52661	. NUT OPTION SEE OPTION TABLE	1		PAFDD
- 38		4077357	52661	. COVER-COMPRESSOR DISK AND HUB	1	W	PAFZZ
- 39		4075120	52661	. BOLT-SELF-LOCKING, HEX 0.500-20UNJF-3A X 1.000 IN. LONG	1	X	PAFZZ
- 40		4075124	52661	. COVER-COUNTERWEIGHT HOUSING	1	X	XA
- 41	%	4075126	52661	. COUNTERWEIGHT-COMPRESSOR	AR	X	XA
		4075127	52661	. COUNTERWEIGHT-COMPRESSOR	AR		XA
		4075128	52661	. COUNTERWEIGHT-COMPRESSOR	AR		XA
		4075129	52661	. COUNTERWEIGHT-COMPRESSOR	AR		XA
- 42		4075125	52661	. HOUSING-COUNTERWEIGHT	1	X	XA
- 43		AS3209-042	81343	. PACKING-PREFORMED	1		PAFZZ
		4010242	52661	. NUT-TURBINE SHAFT, ASSY OF	1	RN	PAFDD
- 44		AN123321	88044	.. RIVET	1		PAFZZ
- 45		4001793	52661	.. NUT-PLAIN, ROUND 1.000-16UNJ-3B X 0.500 IN. THK	1		PAFZZ
- 46		4010241	52661	.. LOCK-TURBINE SHAFT NUT	1		PADZZ
- 47		4001794	52661	.. SPRING-HELICAL COMPRESSION 1.469 X 0.144 X 7 COILS	1		PADZZ
- 48		4010240	52661	.. NUT-TURBINE SHAFT	1		PADZZ
		4081427	52661	. NUT-TURBINE SHAFT, ASSY OF	1	RP	PAFFF
- 49		AN123321	88044	.. RIVET	1		PAFZZ
- 50		4001793	52661	.. NUT-PLAIN, ROUND 1.000-16UNJ-3B X 0.500 IN. THK	1		PAFZZ
- 51		4081459	52661	.. LOCK-TURBINE SHAFT NUT	1		XA
- 52		4001794	52661	.. SPRING-HELICAL COMPRESSION 1.469 X 0.144 X 7 COILS	1		PADZZ
- 53		4081458	52661	.. NUT-TURBINE SHAFT	1		XA
- 54		4081428	52661	. WASHER-TURBINE SHAFT NUT	1	RP	PADZZ



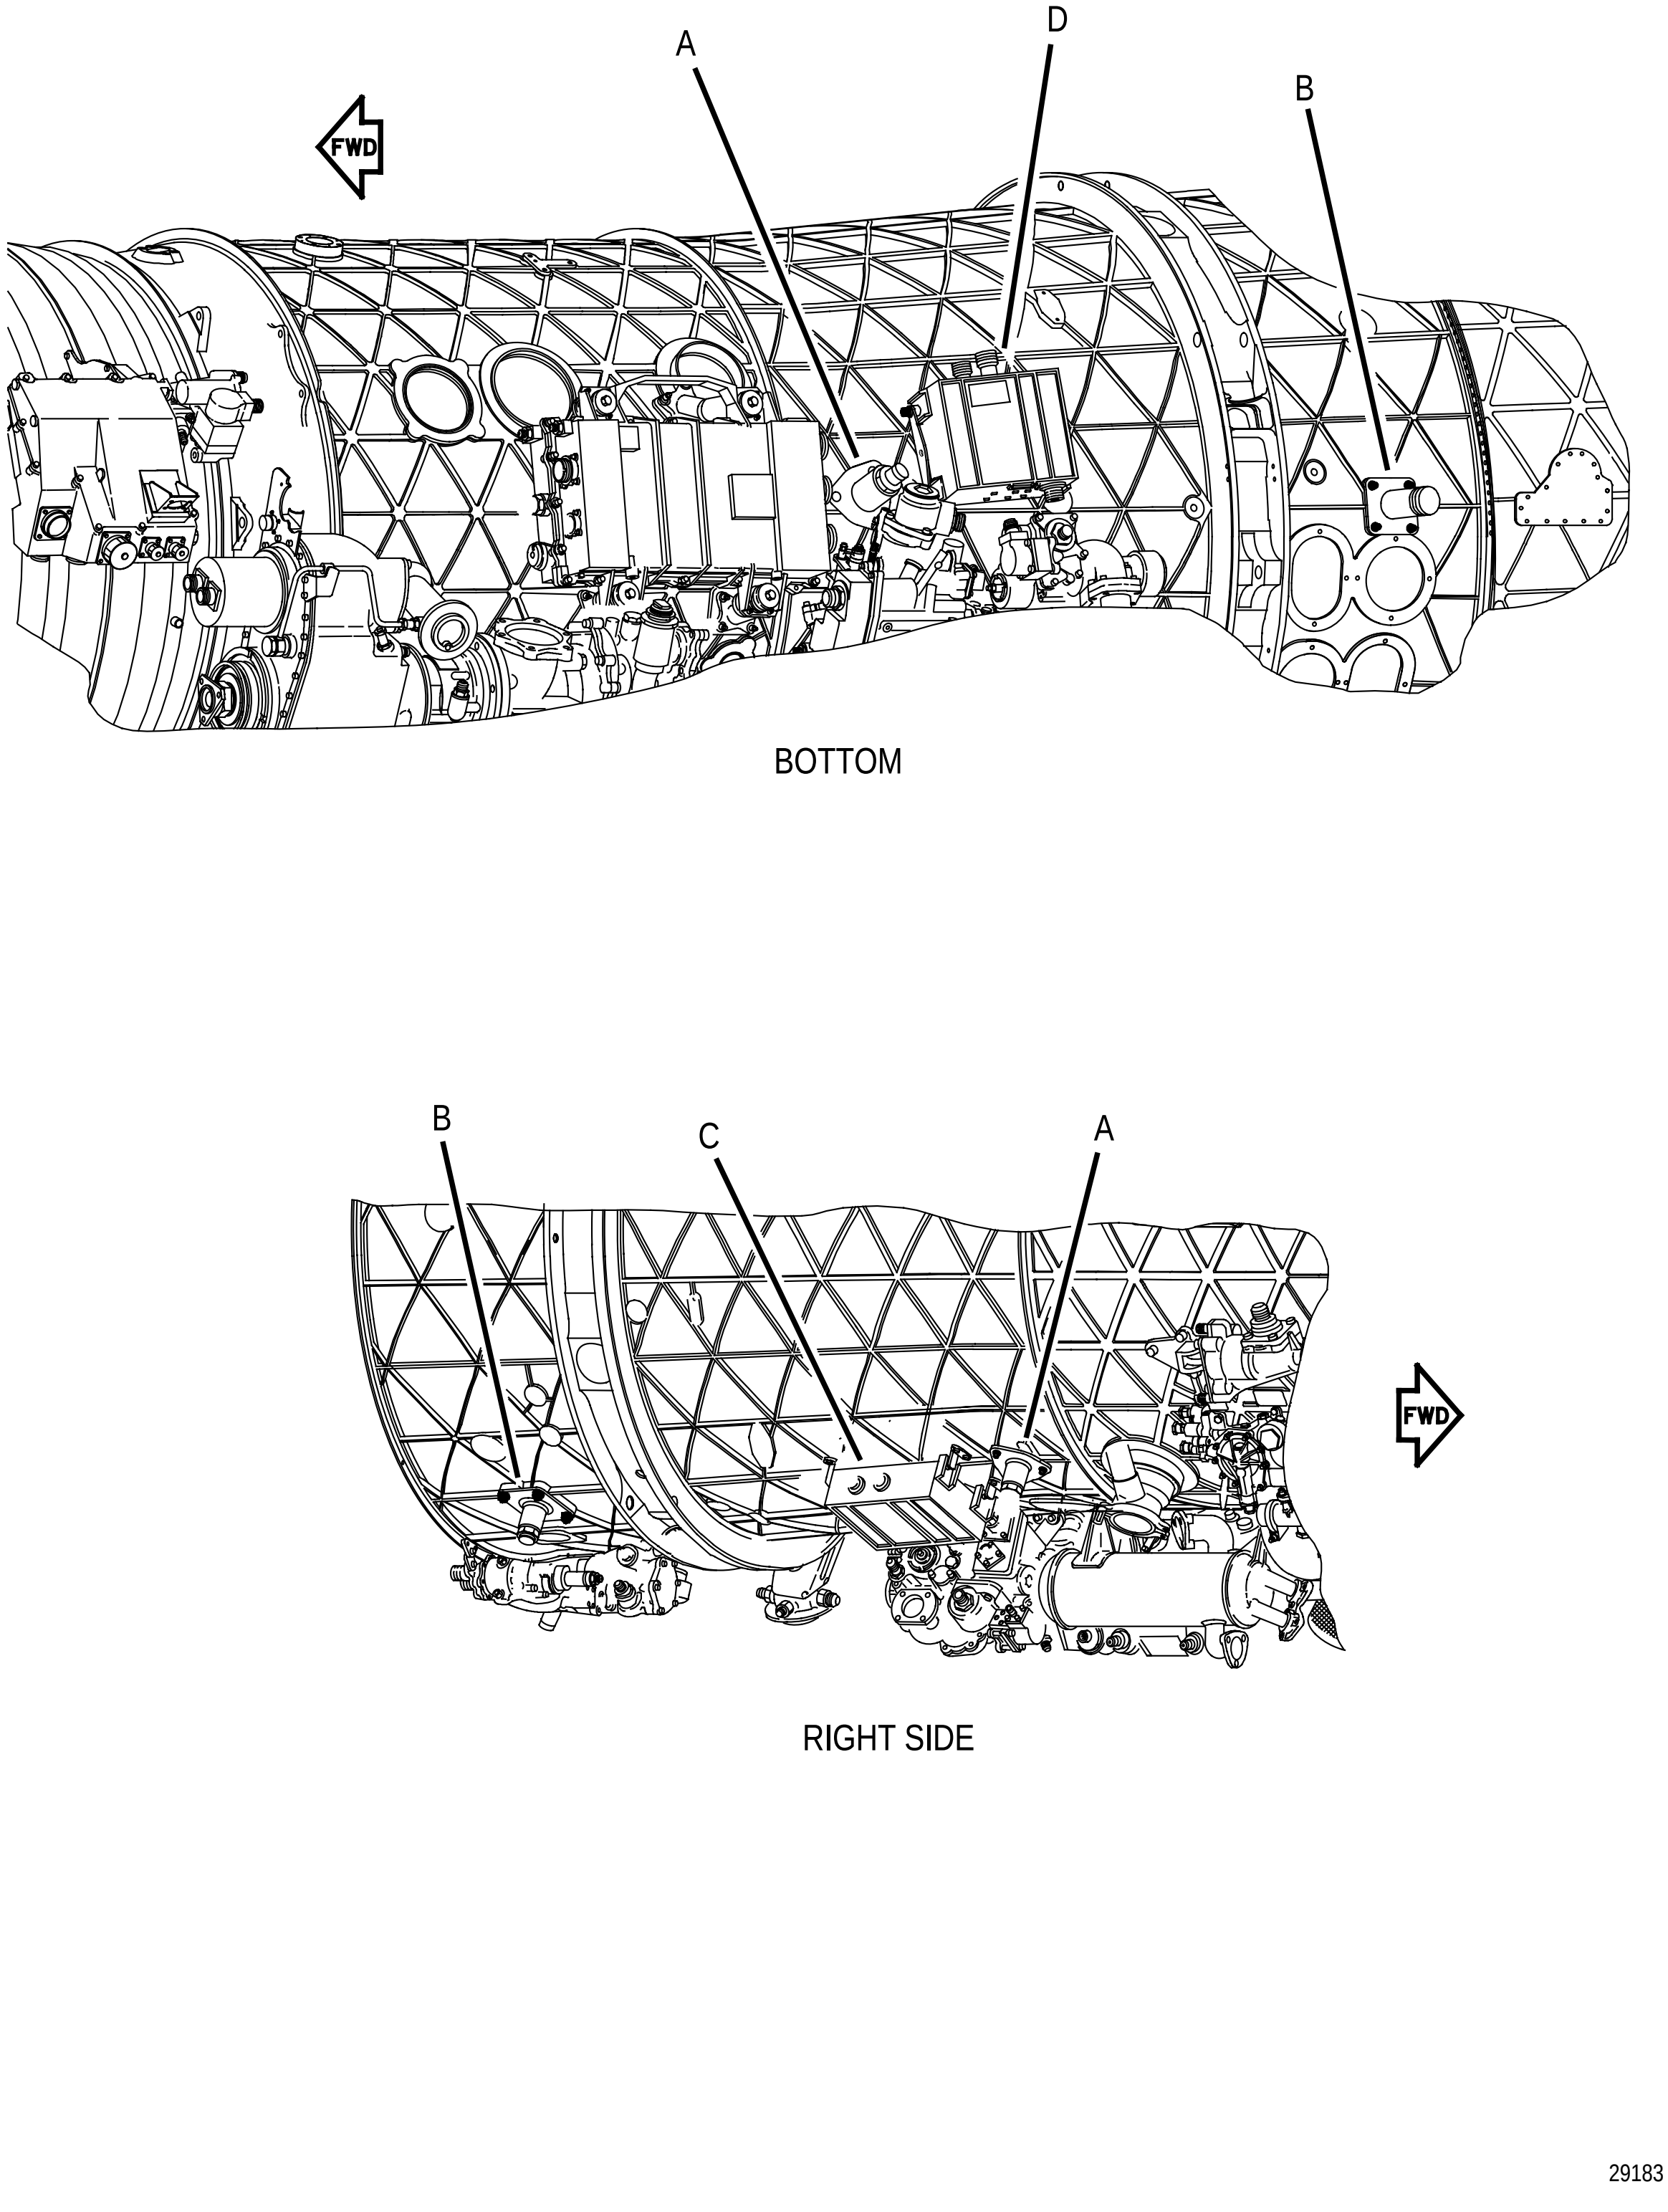



FIGURE 40. IGNITERS AND DUAL IGNITION EXCITERS
(SHEET 1 OF 3)

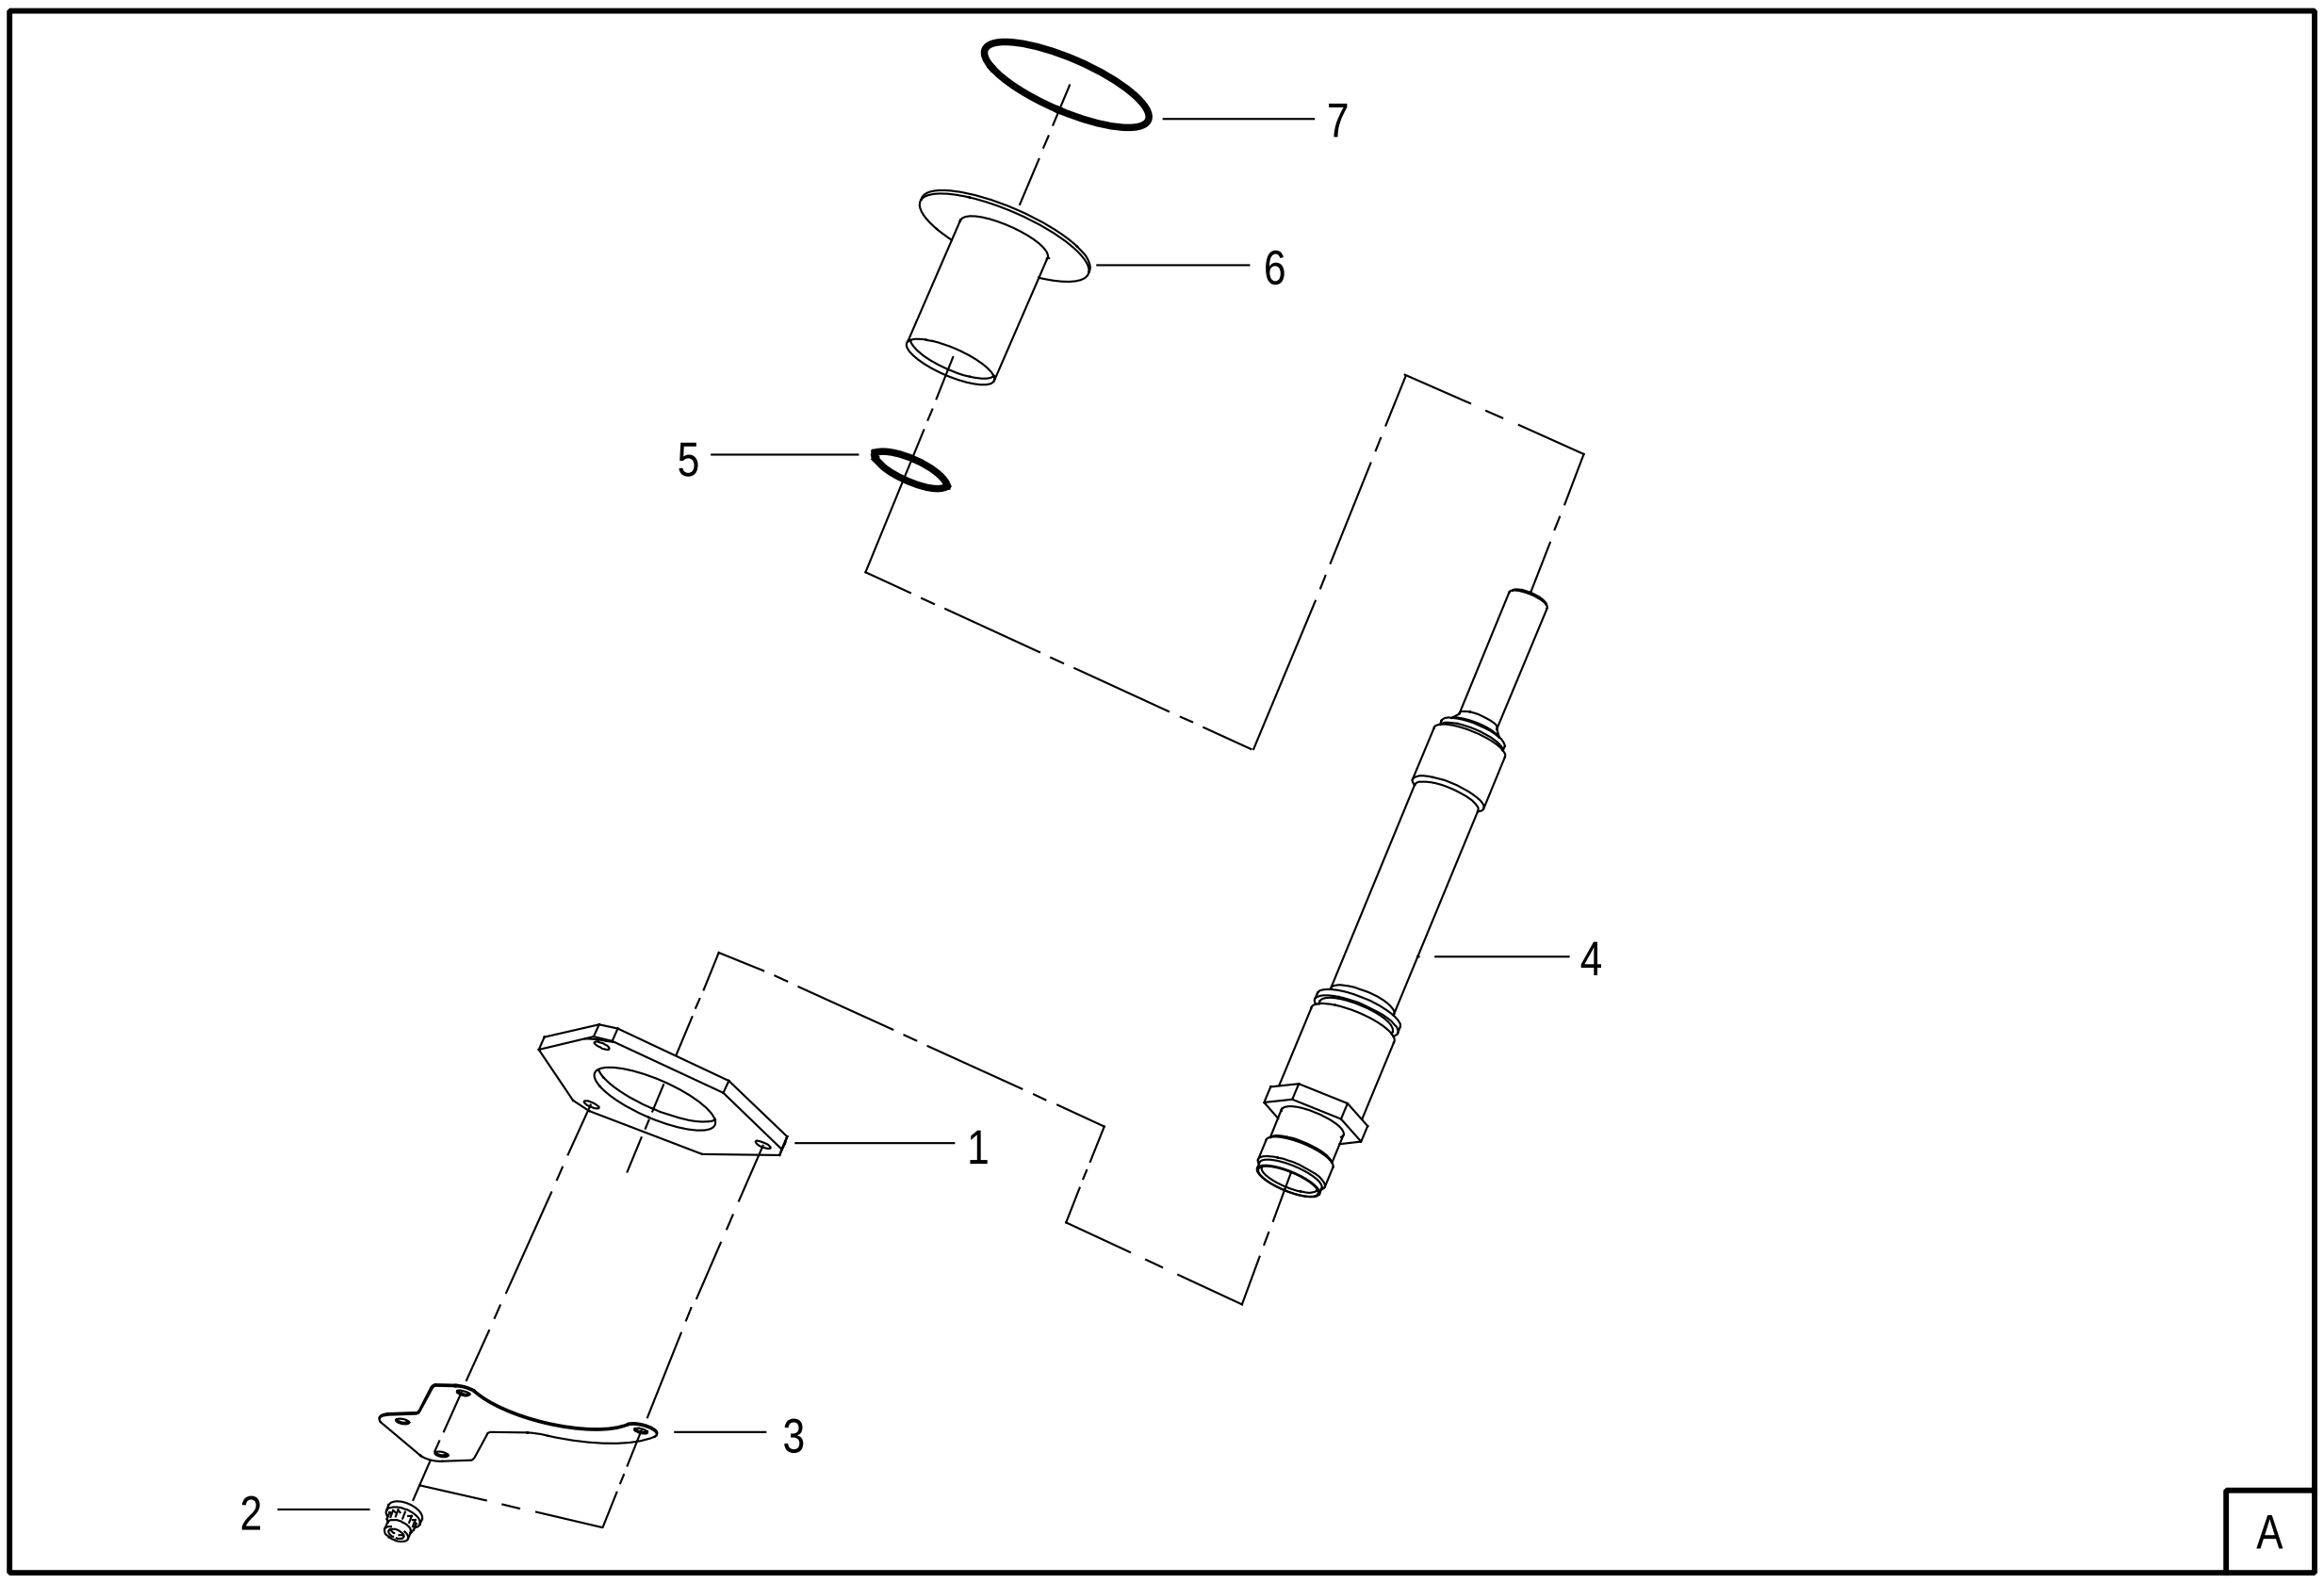


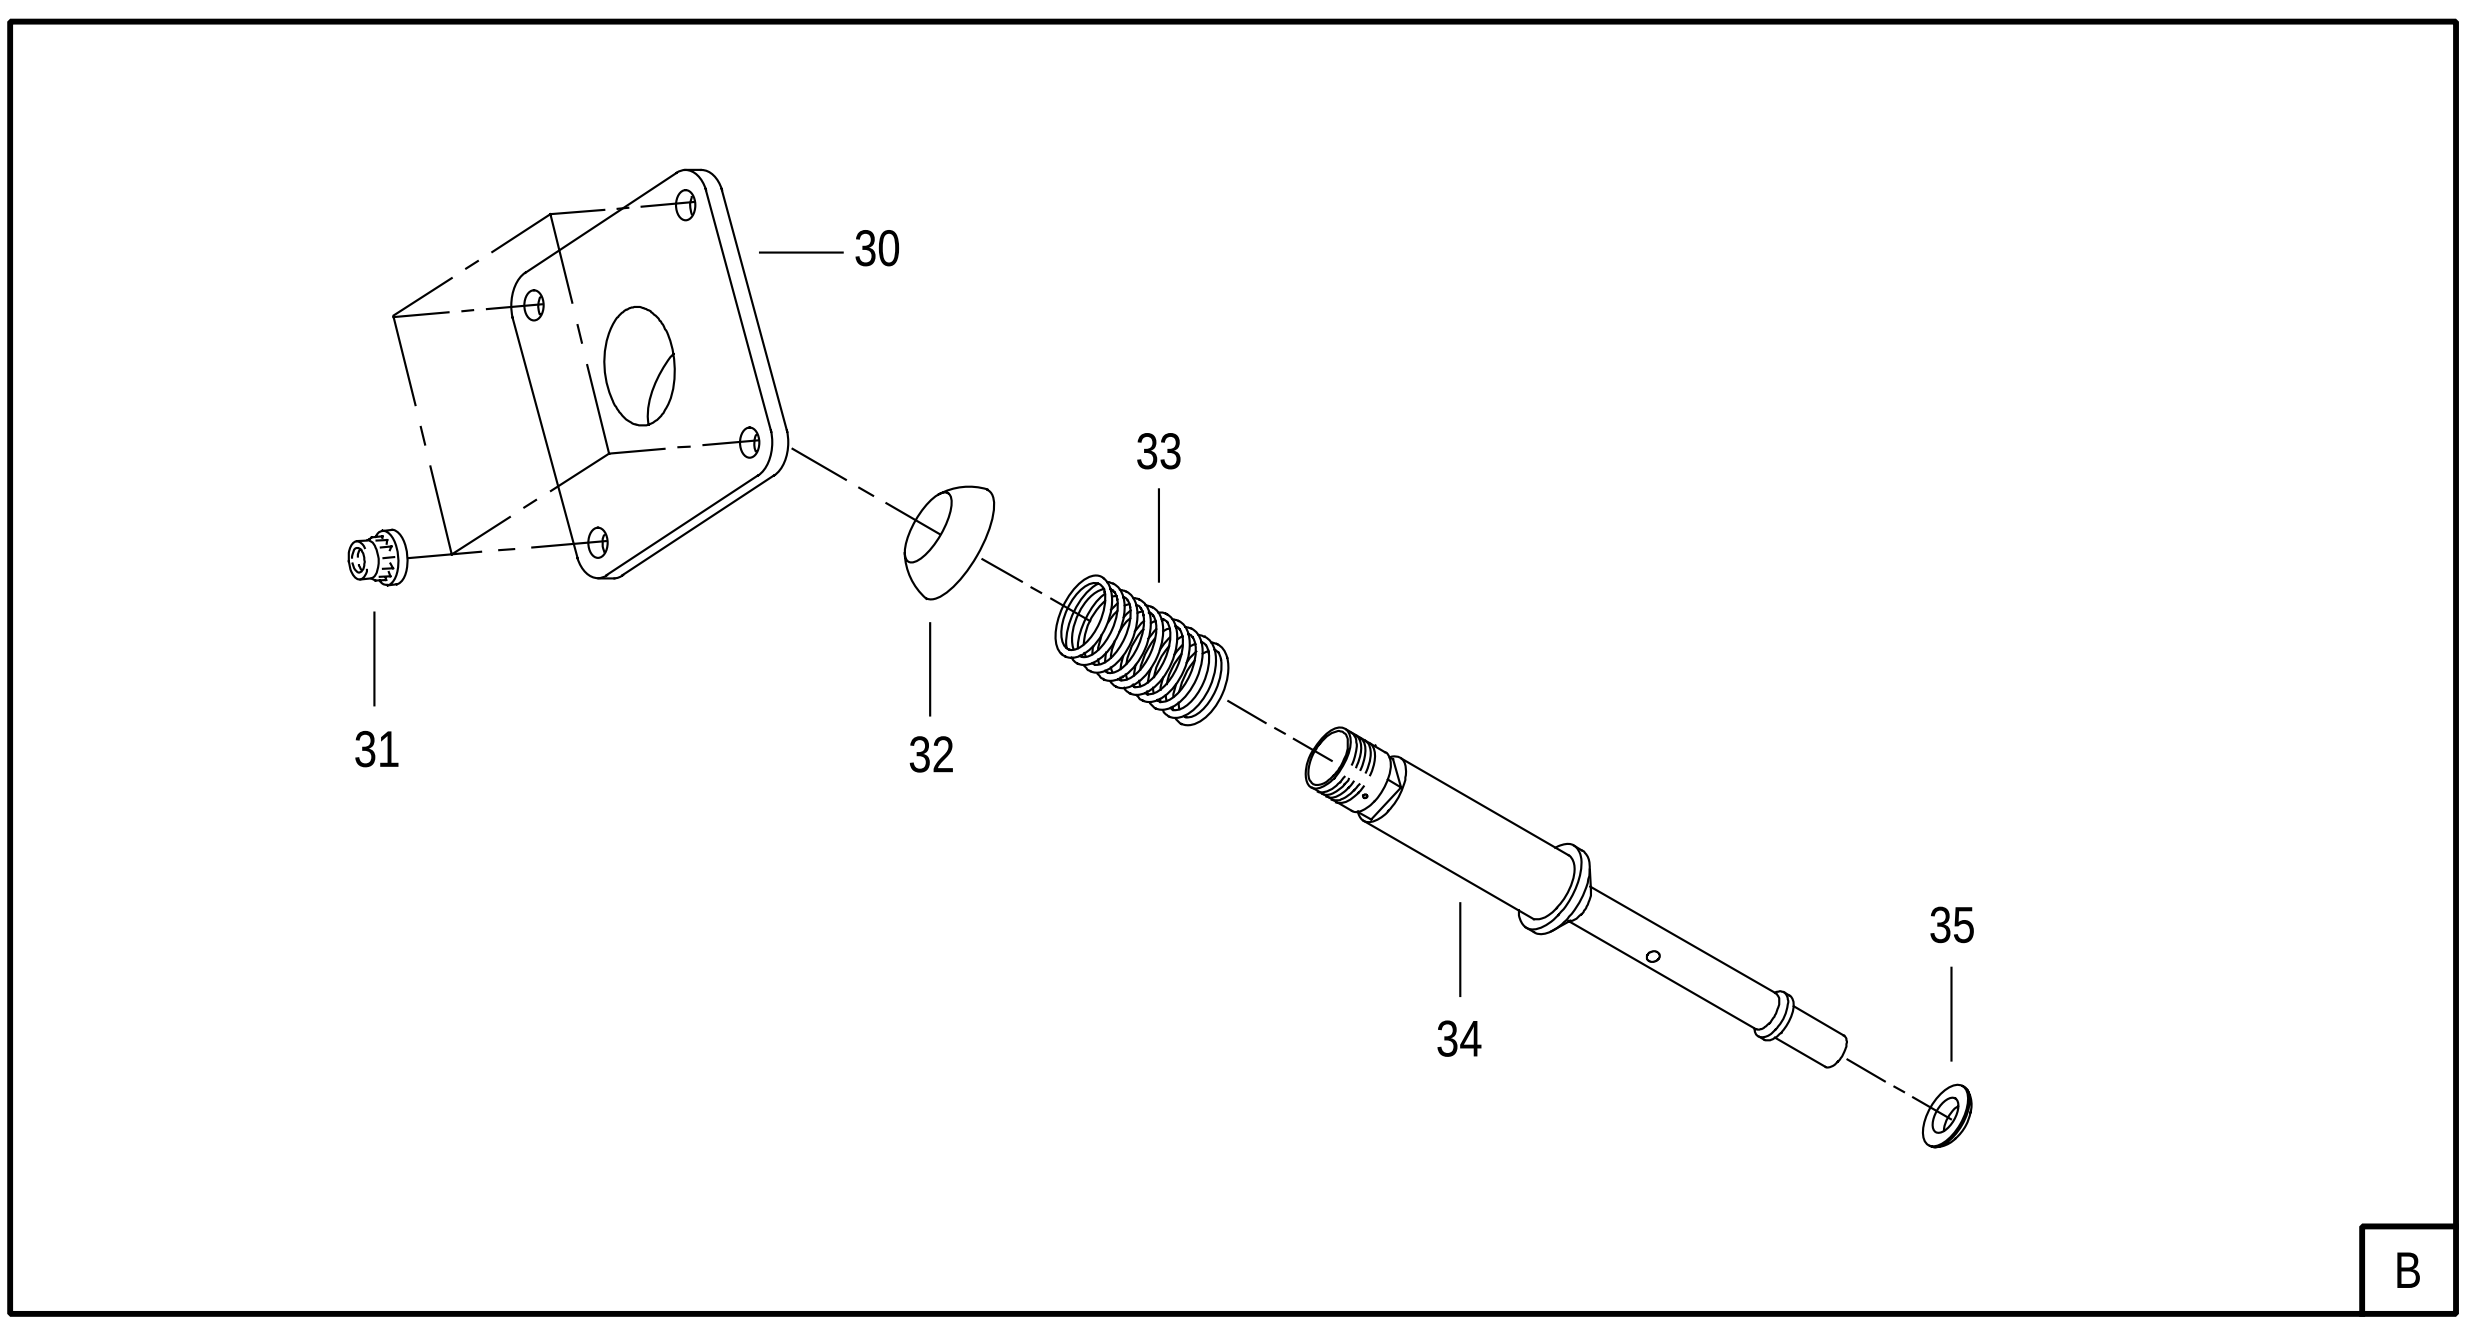

29184

FIGURE 40. IGNITERS AND DUAL IGNITION EXCITERS
(SHEET 2 OF 3)

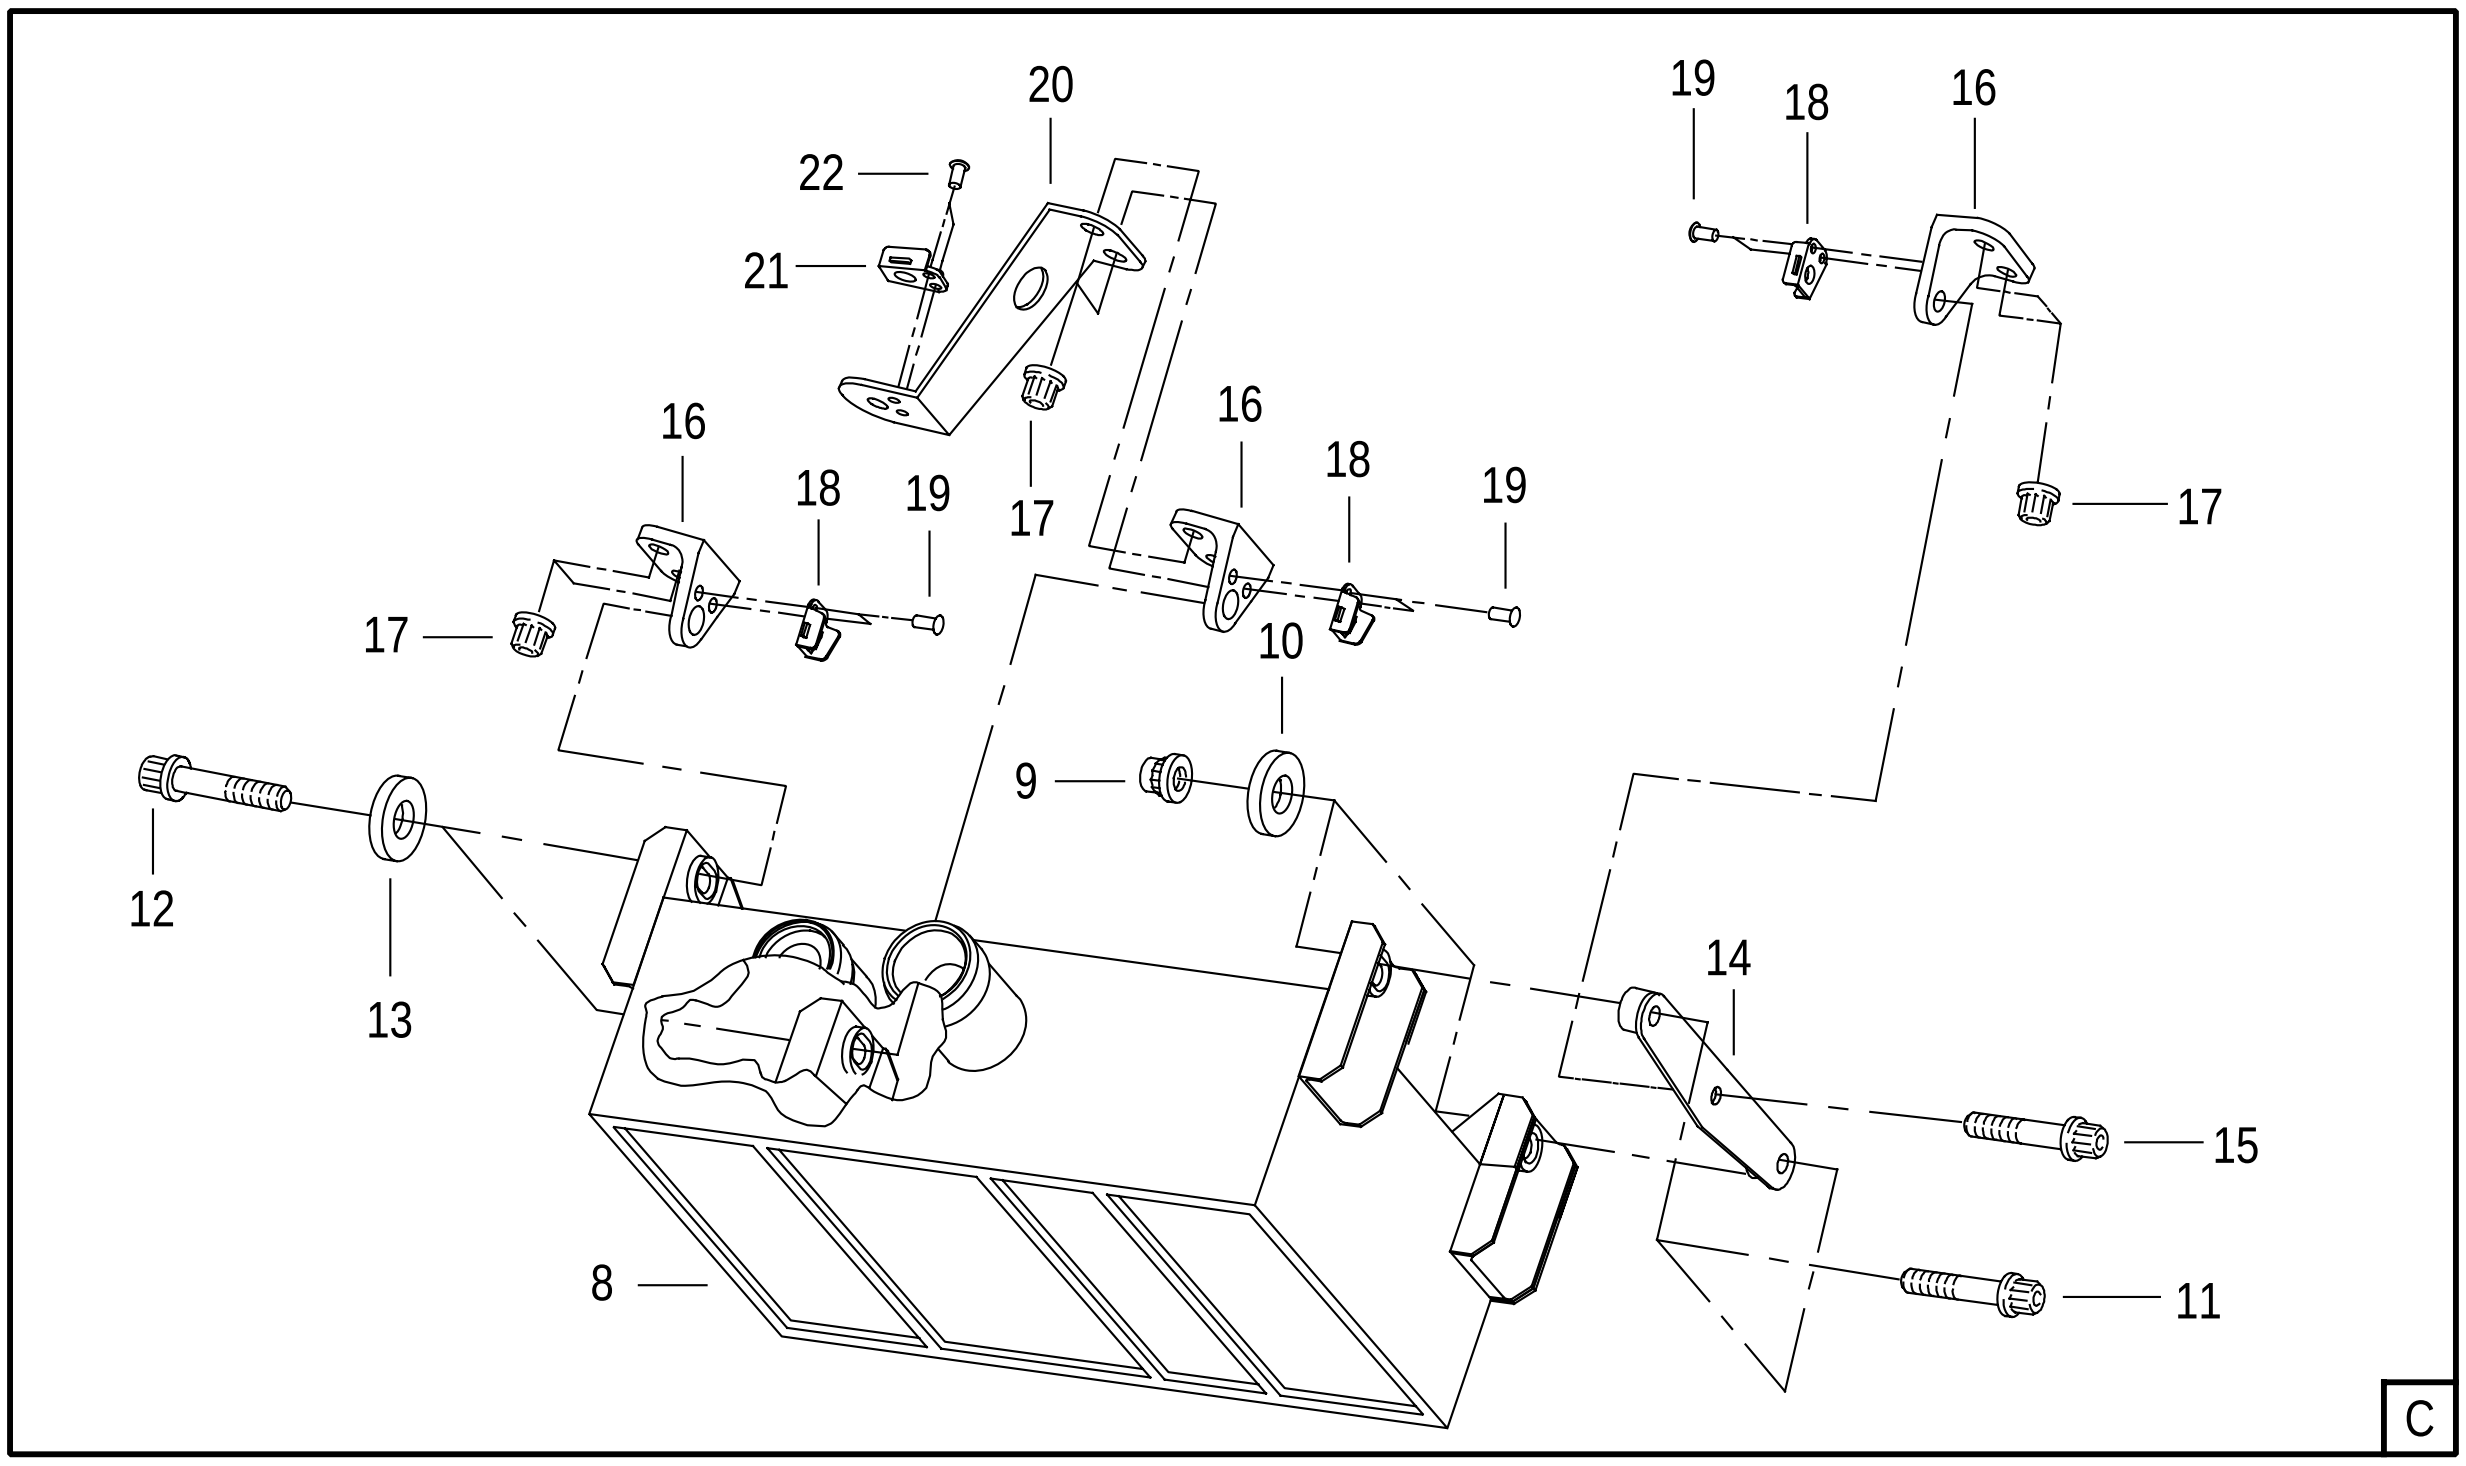

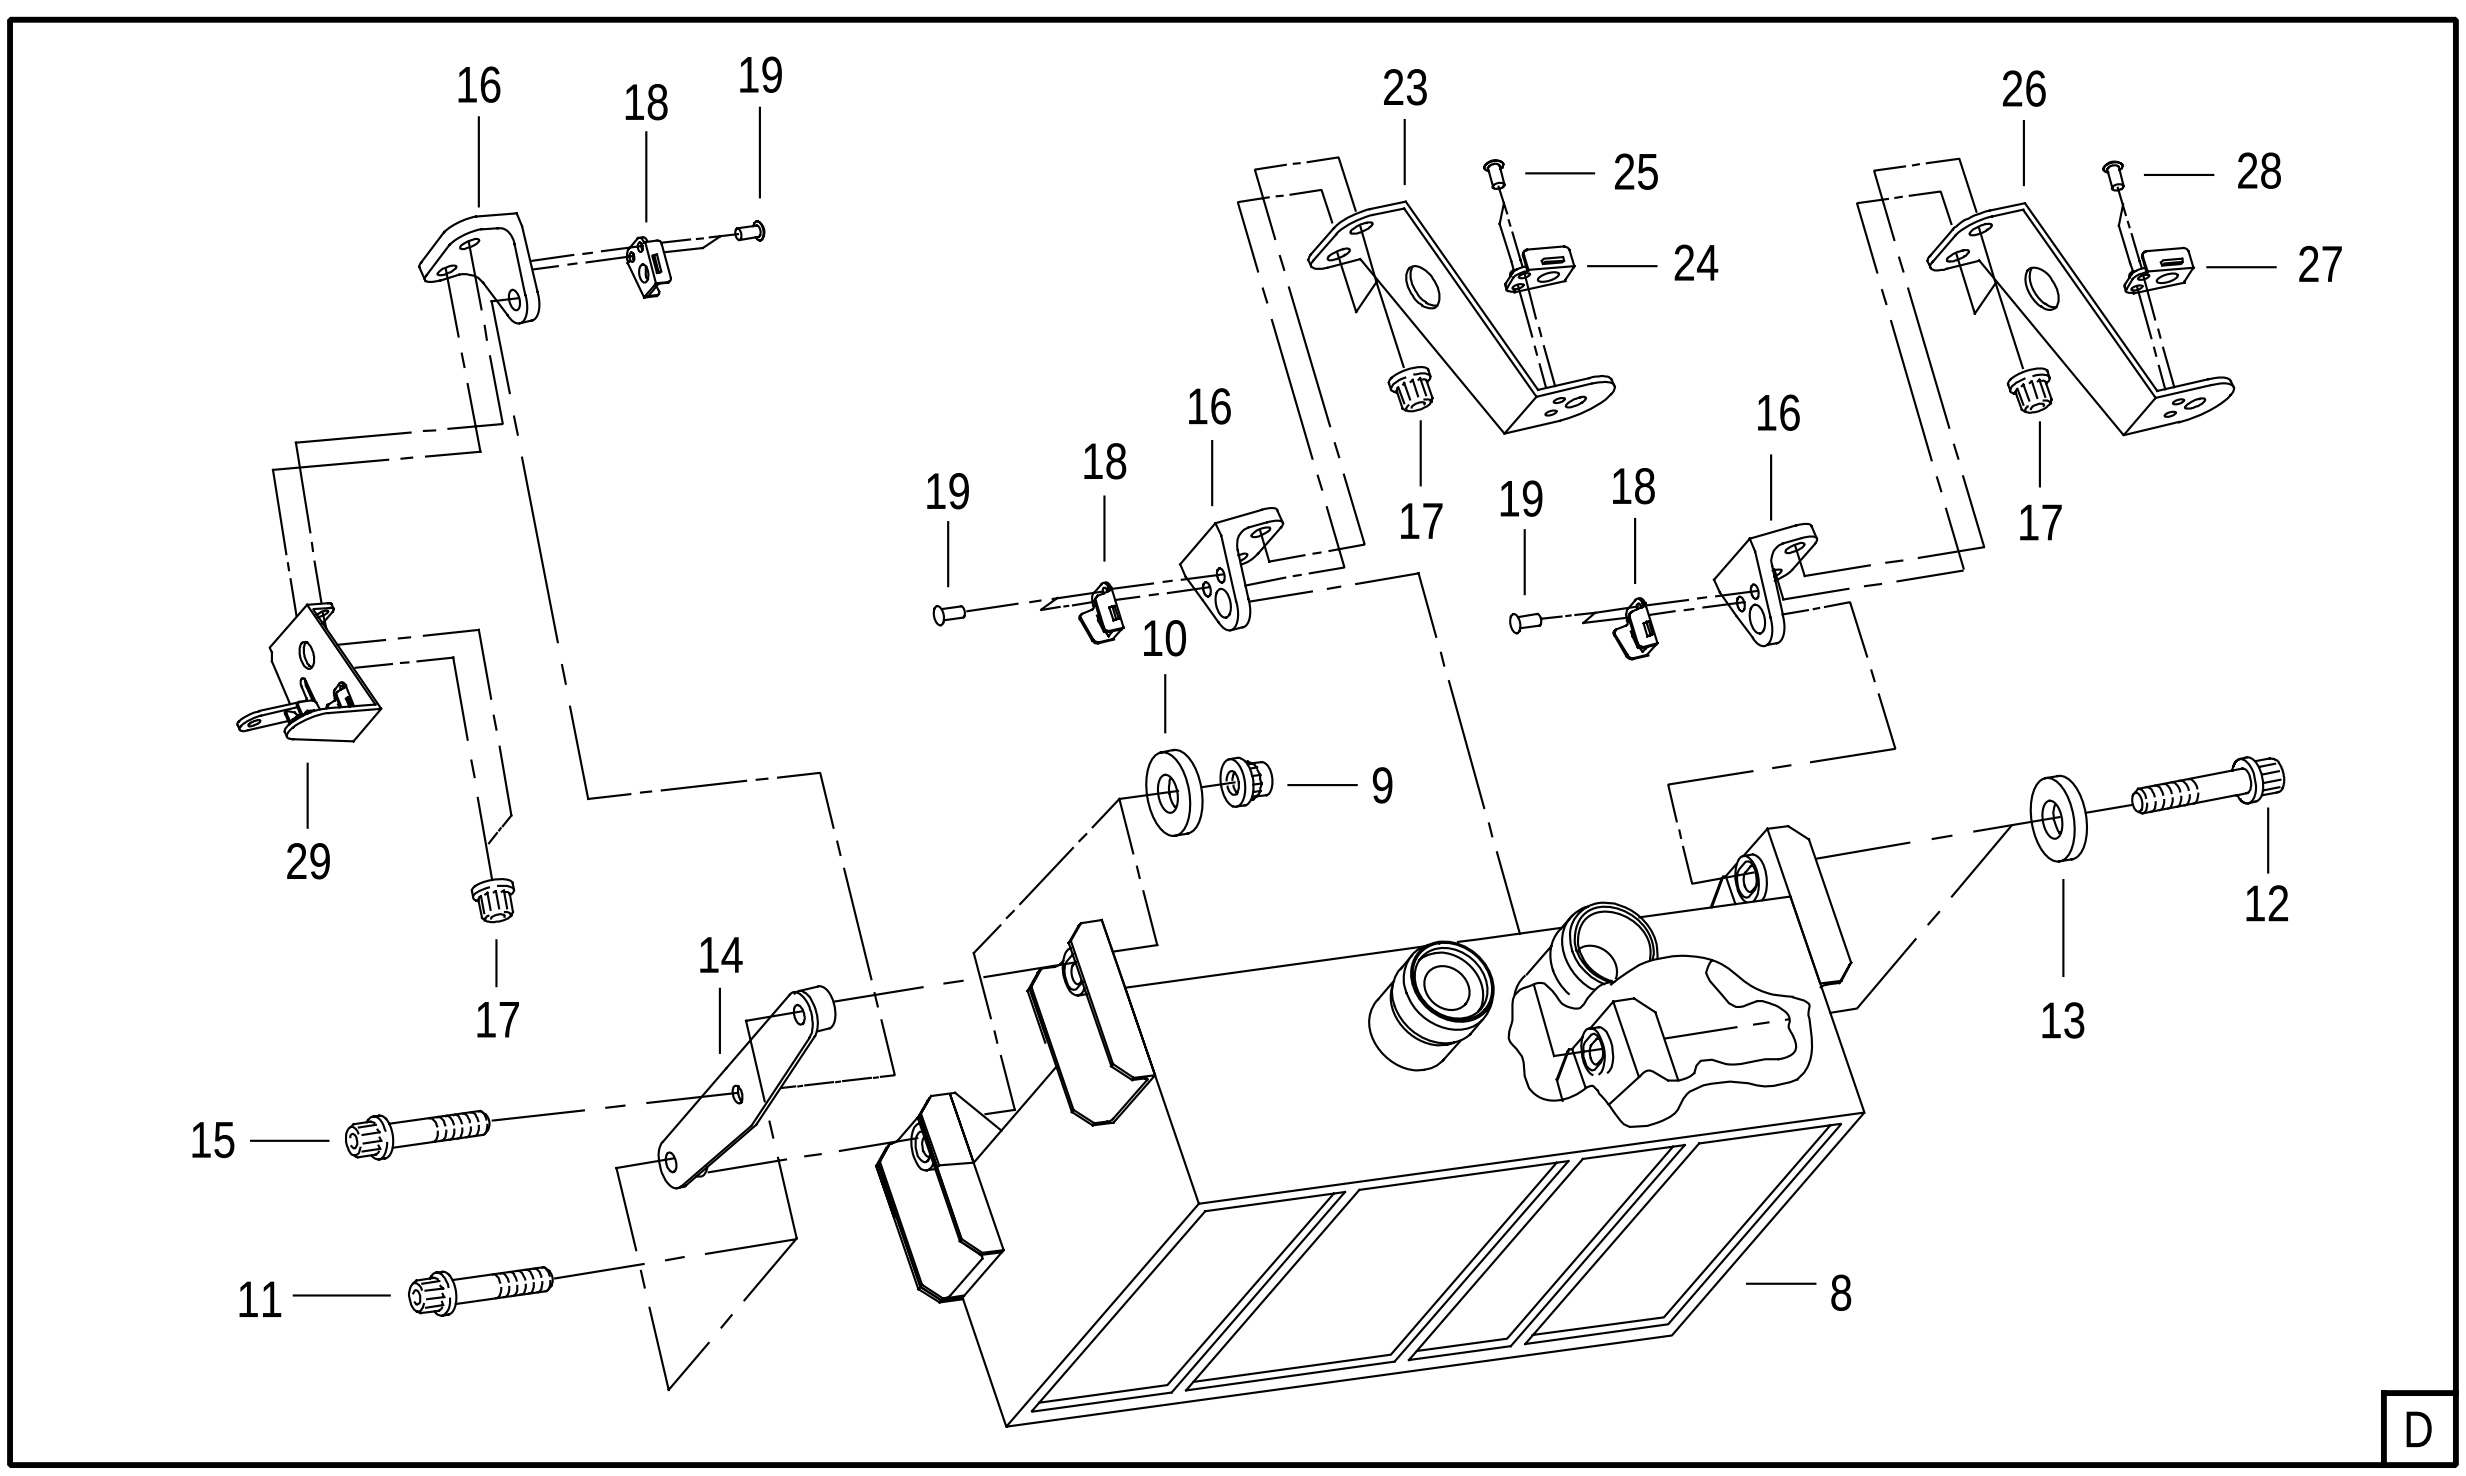

29185

FIGURE 40. IGNITERS AND DUAL IGNITION EXCITERS
(SHEET 3 OF 3)

	FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	40		NO NUMBER			IGNITERS AND DUAL IGNITION EXCITERS .... SEE FIG. 38-2 FOR NHA	REF		
	- 1		4018156		52661	. PLATE-RETAINING, SEAT SLEEVE, 3 HOLE	2		PAOZZ
	- 2		4023115		52661	. NUT OPTION (AP) .... SEE OPTION TABLE	3		PAOZZ
	- 3		4075940		52661	. BRACKET-LOOP CLAMP .... USE ONLY ON RH	1		PAOZZ
	- 4	=	AA124S-2	#	0AFL4	. IGNITER-SPARK, GAS TURBINE ENGINE, MAIN .... P&W PART NO. 4038430	2		PAOBZ
		=	9044505-1		59501	. IGNITER-SPARK, GAS TURBINE ENGINE, MAIN .... P&W PART NO. 4038430	2		PAOBZ
	- 5		MS9386-121		96906	. PACKING	2		PAOZZ
	- 6		4072143		52661	. SEAT-SEALING	2		PAOZZ
	- 7		MS9386-133		96906	. PACKING	2		PAOZZ
	- 8		47418	#	83311	. EXCITER-IGNITION, DUAL .... P&W PART NO. 4060998 SUPERSEDED BY 46470	2		PAOLD
R			46470	#	59501	. EXCITER-IGNITION, DUAL .... P&W PART NO. 4080687 SUPERSEDES 47418	2		PAOLD
	- 9		4023115		52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
	- 10		4028045		52661	. WASHER-FLAT .... 0.221 X 0.4925 X 0.041 IN. THK (AP)	2		PAOZZ
	- 11		ST2015-040		52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 1.250 IN. LONG (AP)	2		PAOZZ
	- 12		ST2015-028		52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.825 IN. LONG (AP)	2		PAOZZ
	- 13		4028045		52661	. WASHER-FLAT .... 0.221 X 0.4925 X 0.041 IN. THK (AP)	2		PAOZZ
	- 14		4075647		52661	. PLATE-RETAINING, IGNITION EXCITER, ASSY OF ..	2		PAOZZ
	- 15		ST2015-024		52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.750 IN. LONG (AP)	1		PAOZZ
	- 16		4075645		52661	. BRACKET-ANGLE, ASSY OF	6		PAOBZ
	- 17		4023115		52661	. NUT OPTION (AP) .... SEE OPTION TABLE PARTIAL BREAKDOWN FOLLOWS	2		PAOZZ
	- 18	=	4046367		52661	.. NUT OPTION .... SEE OPTION TABLE	1		PAFZZ
		=	ST5030-09		52661	.. NUT OPTION .... SEE OPTION TABLE	1		PAFZZ
	- 19		AN124972		88044	.. RIVET (AP)	2		PAOZZ
	- 20		4072786		52661	. BRACKET-LOOP CLAMP, ASSY OF .... PARTIAL BREAKDOWN FOLLOWS	1		PAOZZ
	- 21	=	4046367		52661	.. NUT OPTION .... SEE OPTION TABLE	1		PAFZZ
		=	ST5030-09		52661	.. NUT OPTION .... SEE OPTION TABLE	1		PAFZZ
	- 22		AN123469		88044	.. RIVET (AP)	2		PAOZZ
	- 23		4072787		52661	. BRACKET-LOOP CLAMP, ASSY OF	1	BN	PAOZZ
			4072786		52661	. BRACKET-LOOP CLAMP, ASSY OF .... PARTIAL BREAKDOWN FOLLOWS	1	BP	PAOZZ

FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
40 - 24	=	4046367		52661	.. NUT OPTION . . . . SEE OPTION TABLE	1		PAFZZ
	=	ST5030-09		52661	.. NUT OPTION . . . . SEE OPTION TABLE	1		PAFZZ
- 25		AN123469		88044	.. RIVET (AP)	2		PAOZZ
- 26		4072786		52661	. BRACKET-LOOP CLAMP, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1	BP	PAOZZ
- 27	=	4046367		52661	.. NUT OPTION . . . . SEE OPTION TABLE	1		PAFZZ
	=	ST5030-09		52661	.. NUT OPTION . . . . SEE OPTION TABLE	1		PAFZZ
- 28		AN123469		88044	.. RIVET (AP)	2		PAOZZ
- 29		4076411		52661	. BRACKET-LOOP CLAMP, ASSY OF	1		PAOBZ
- 30		4069578		52661	. SEAT-BALL SOCKET, IGNITER PLUG	2		PAOZZ
- 31		4023116		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	4		PAOZZ
- 32		4023661		52661	. SPACER-AUGMENTOR IGNITER PLUG	2		PAOZZ
- 33		4074756		52661	. SPRING-HELICAL, COMPRESSION . . . . 1.445 X 0.160 X 5 COILS	2		PADZZ
- 34	=	AA125S-5	#	0AFL4	. IGNITER-SPARK, GAS TURBINE ENGINE . . . . AUGMENTOR P&WA PART NO. 4038431	2		PAOBZ
	=	9044510-1		59501	. IGNITER-SPARK, GAS TURBINE ENGINE, ... AUGMENTOR P&WA PART NO. 4038431	2		PAOBZ
- 35		4023660		52661	. SEAT-BALL SOCKET, AUGMENTOR IGNITER PLUG	2		PAOZZ

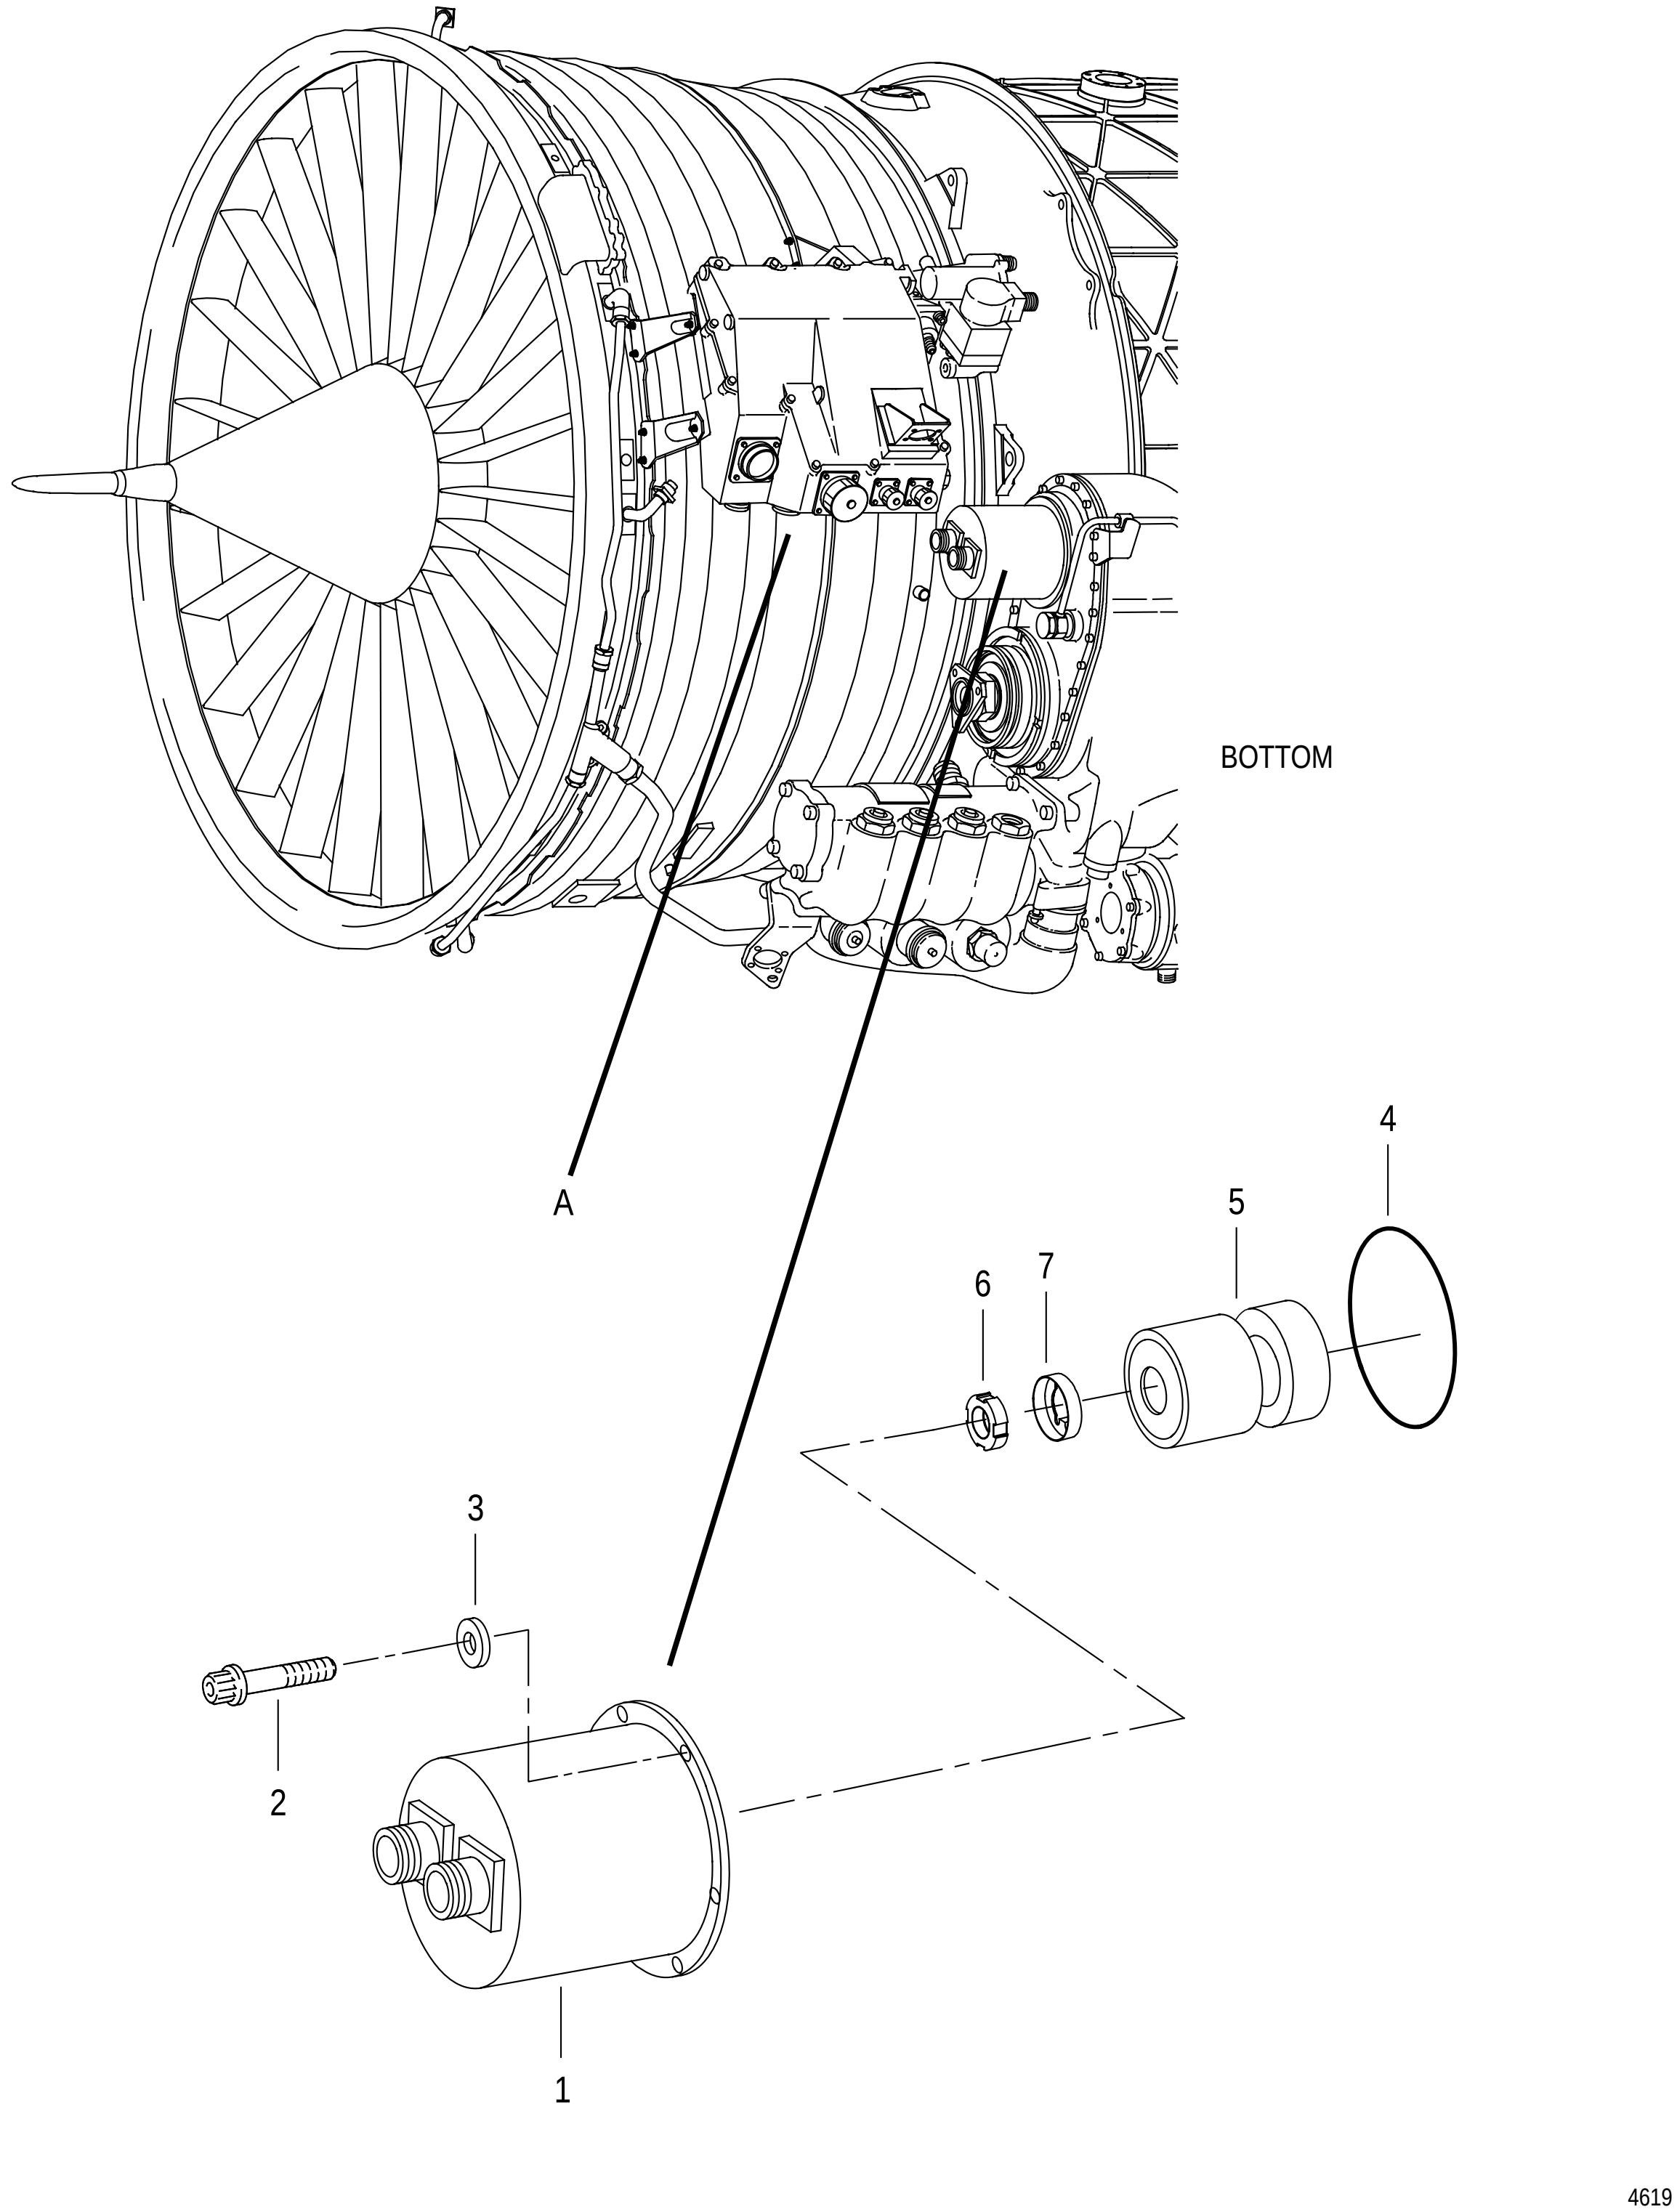


FIGURE 41. GENERATOR ROTOR, GENERATOR STATOR, AND EDU
(SHEET 1 OF 4)

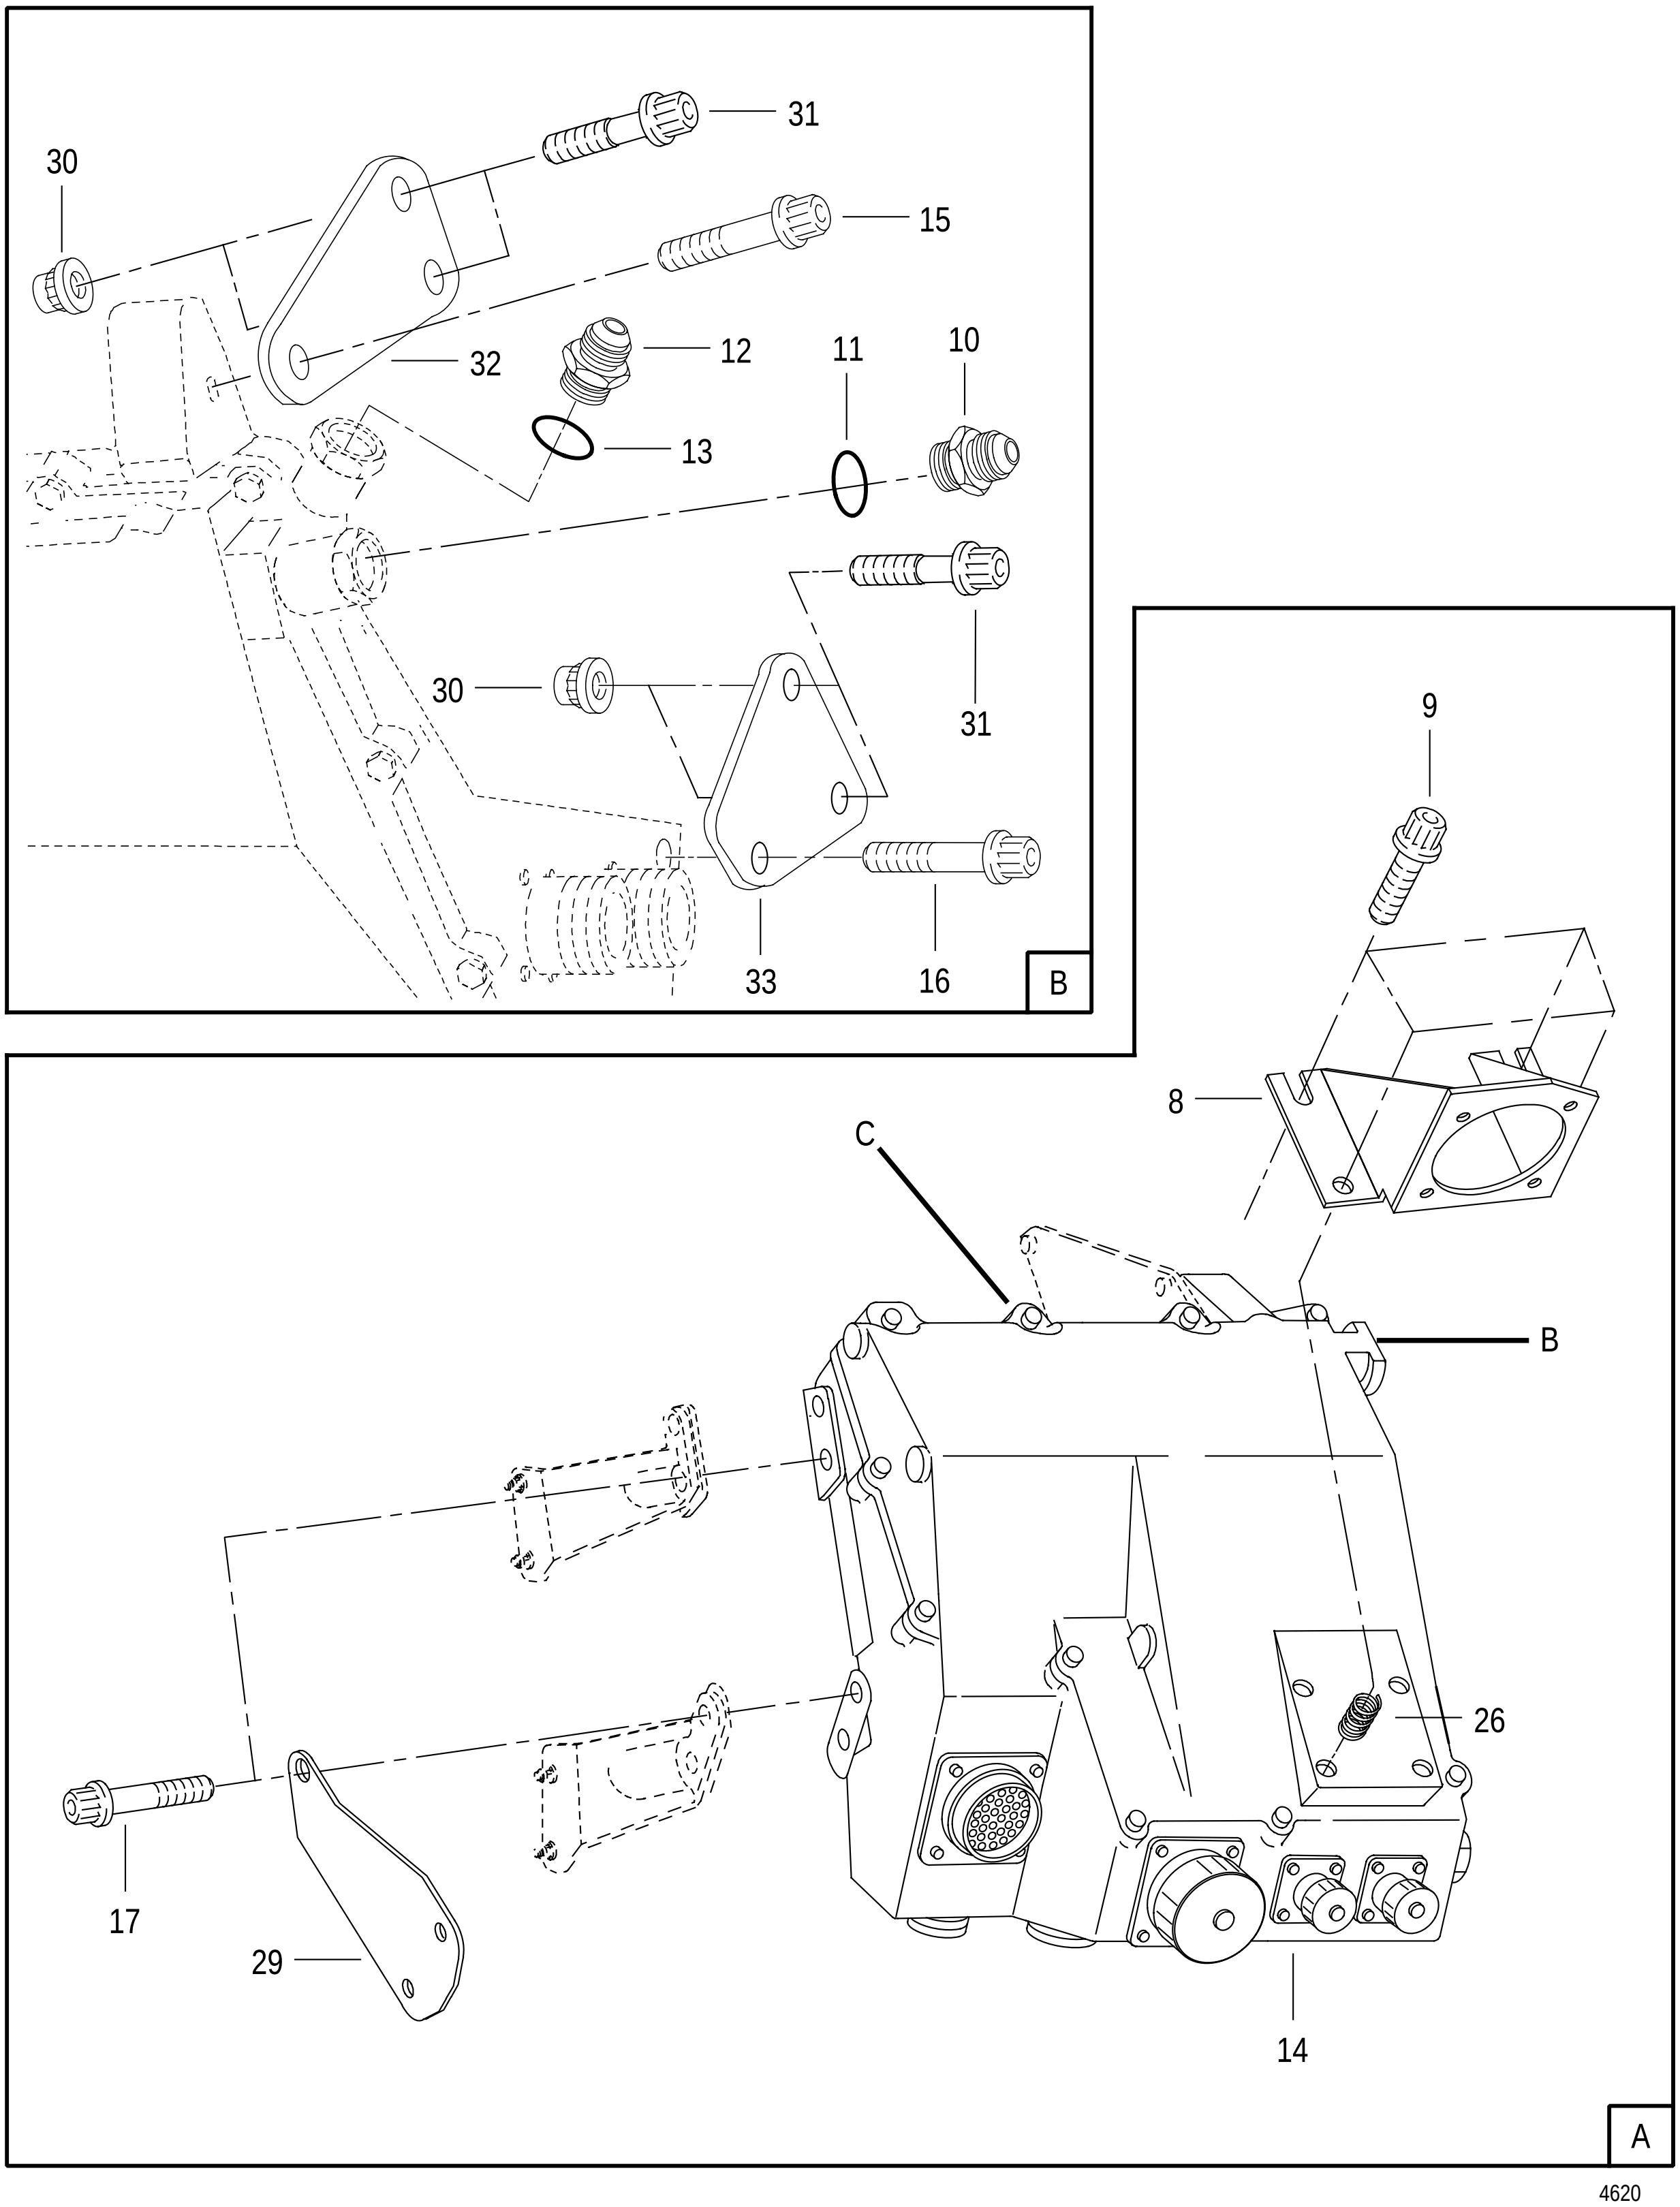


FIGURE 41. GENERATOR ROTOR, GENERATOR STATOR, AND EDU
(SHEET 2 OF 4)


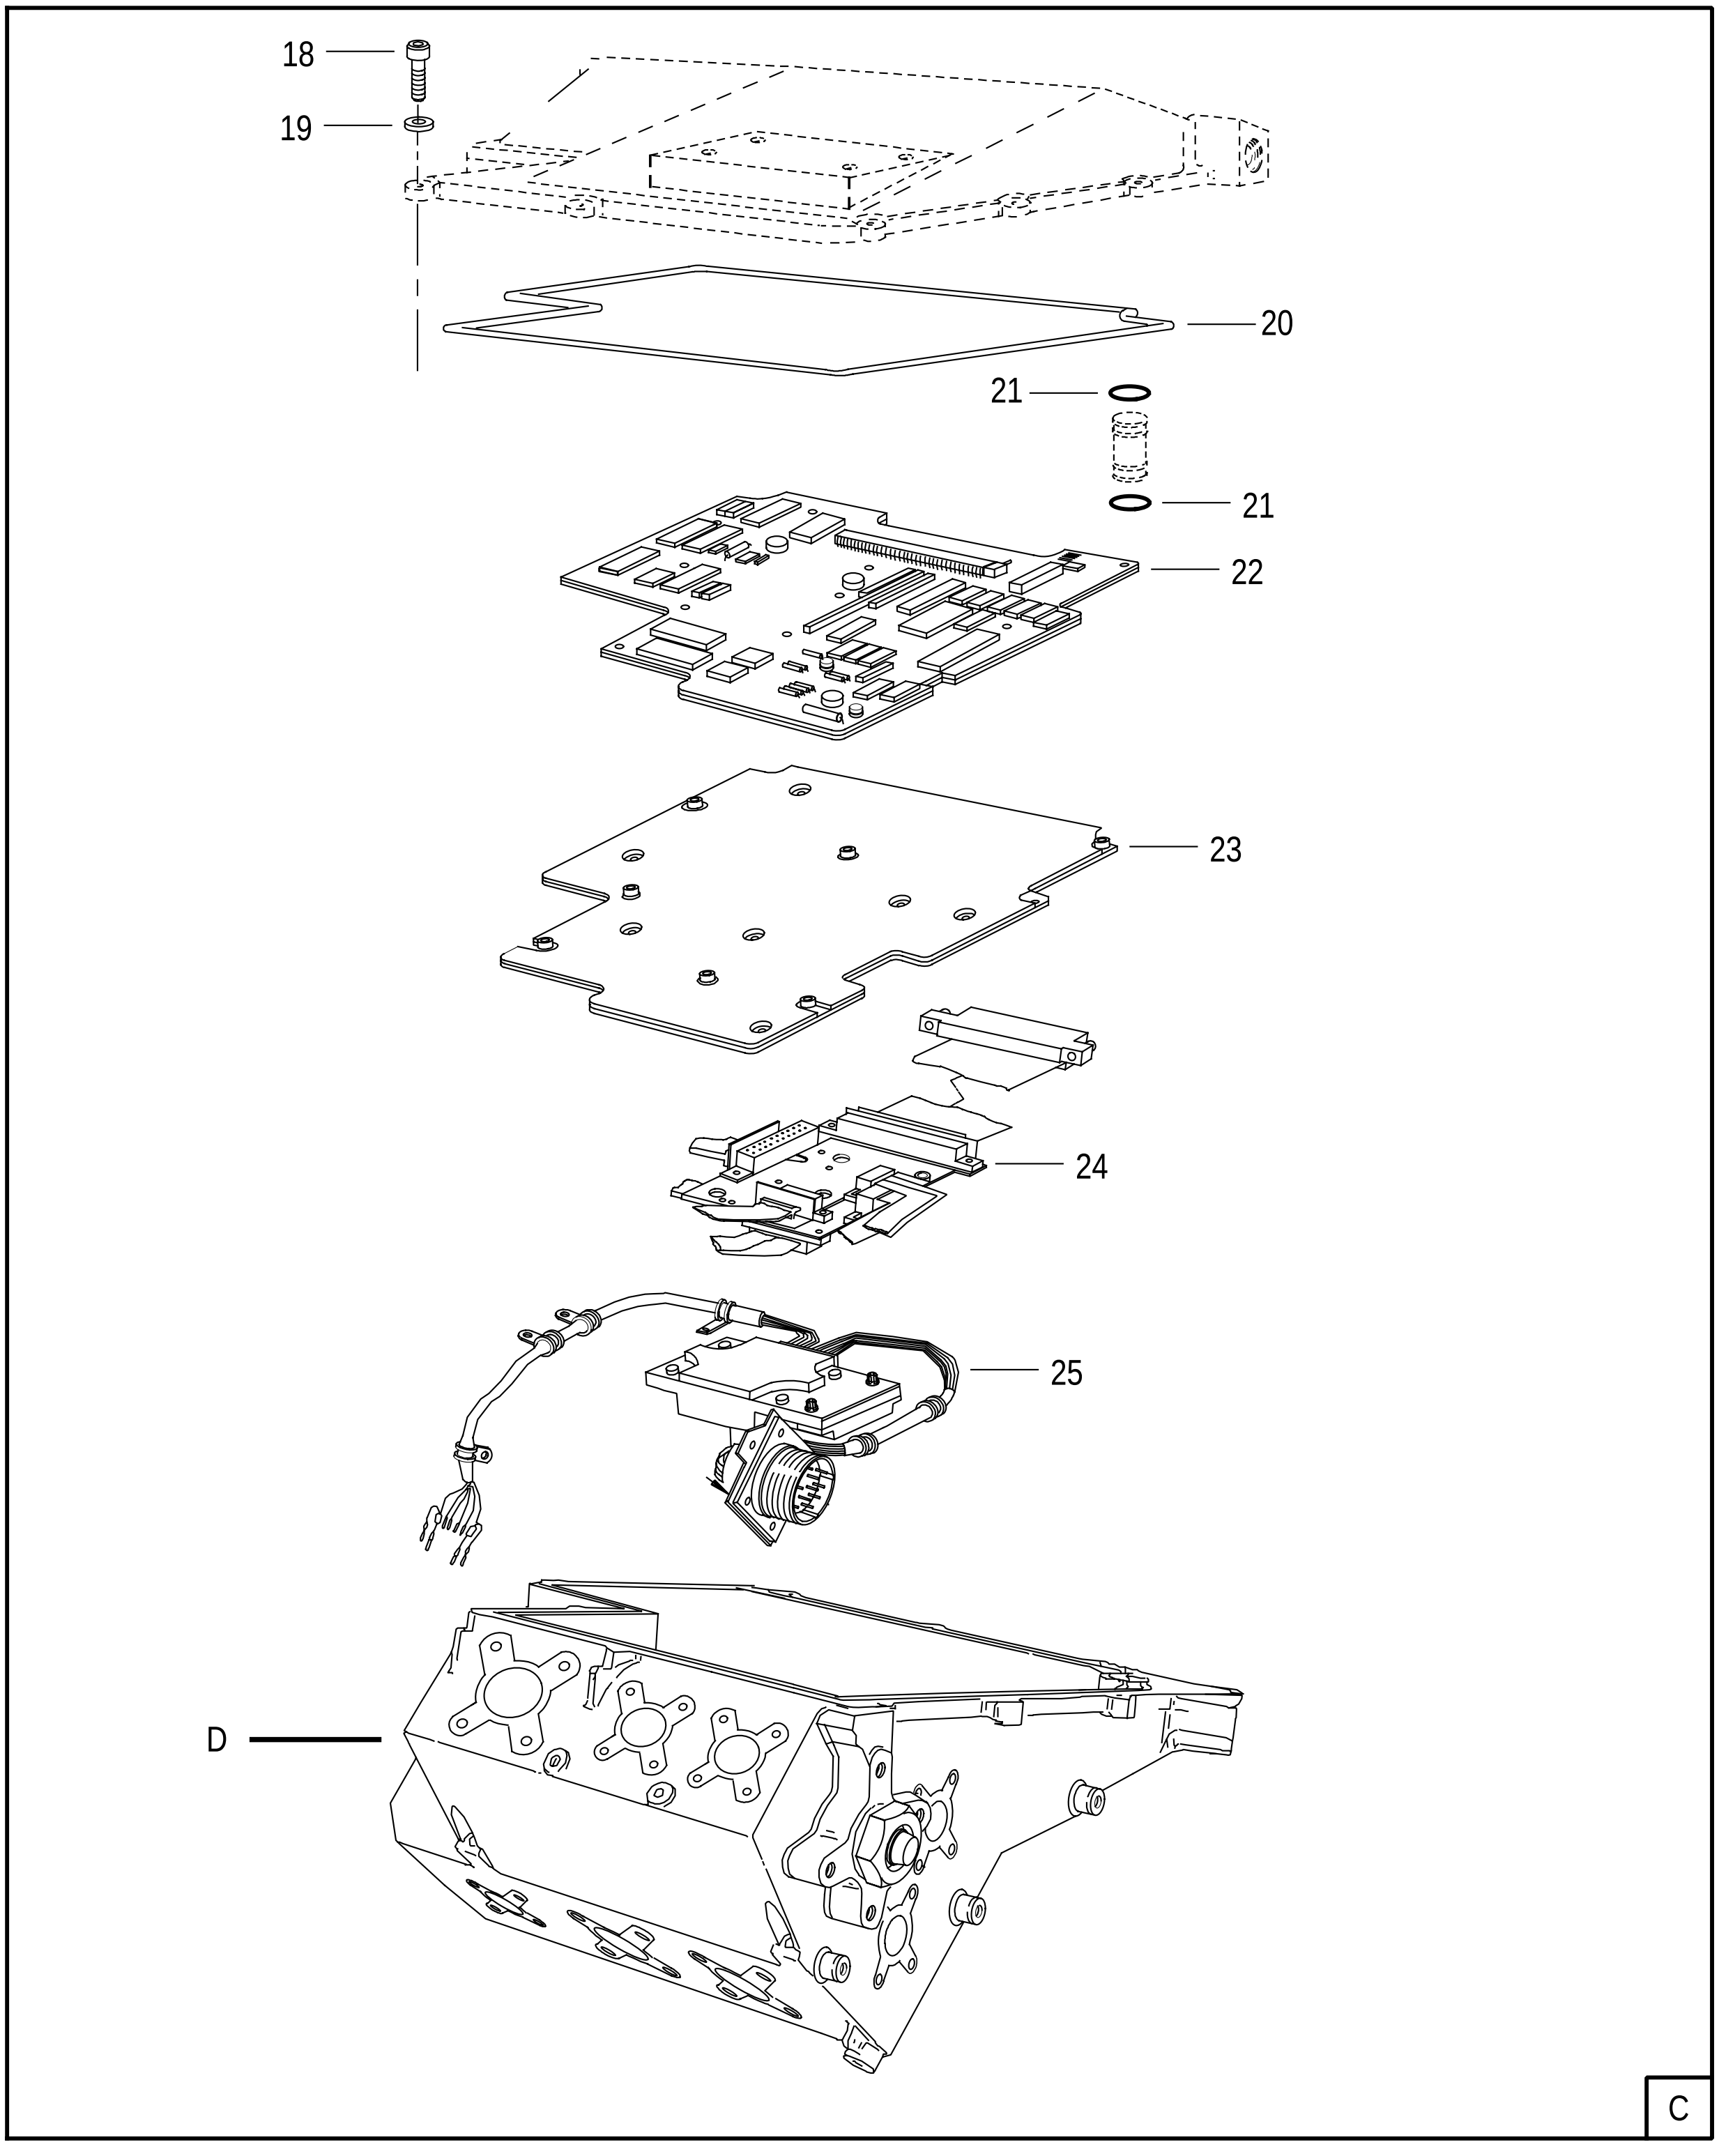


FIGURE 41. GENERATOR ROTOR, GENERATOR STATOR, AND EDU
(SHEET 3 OF 4)

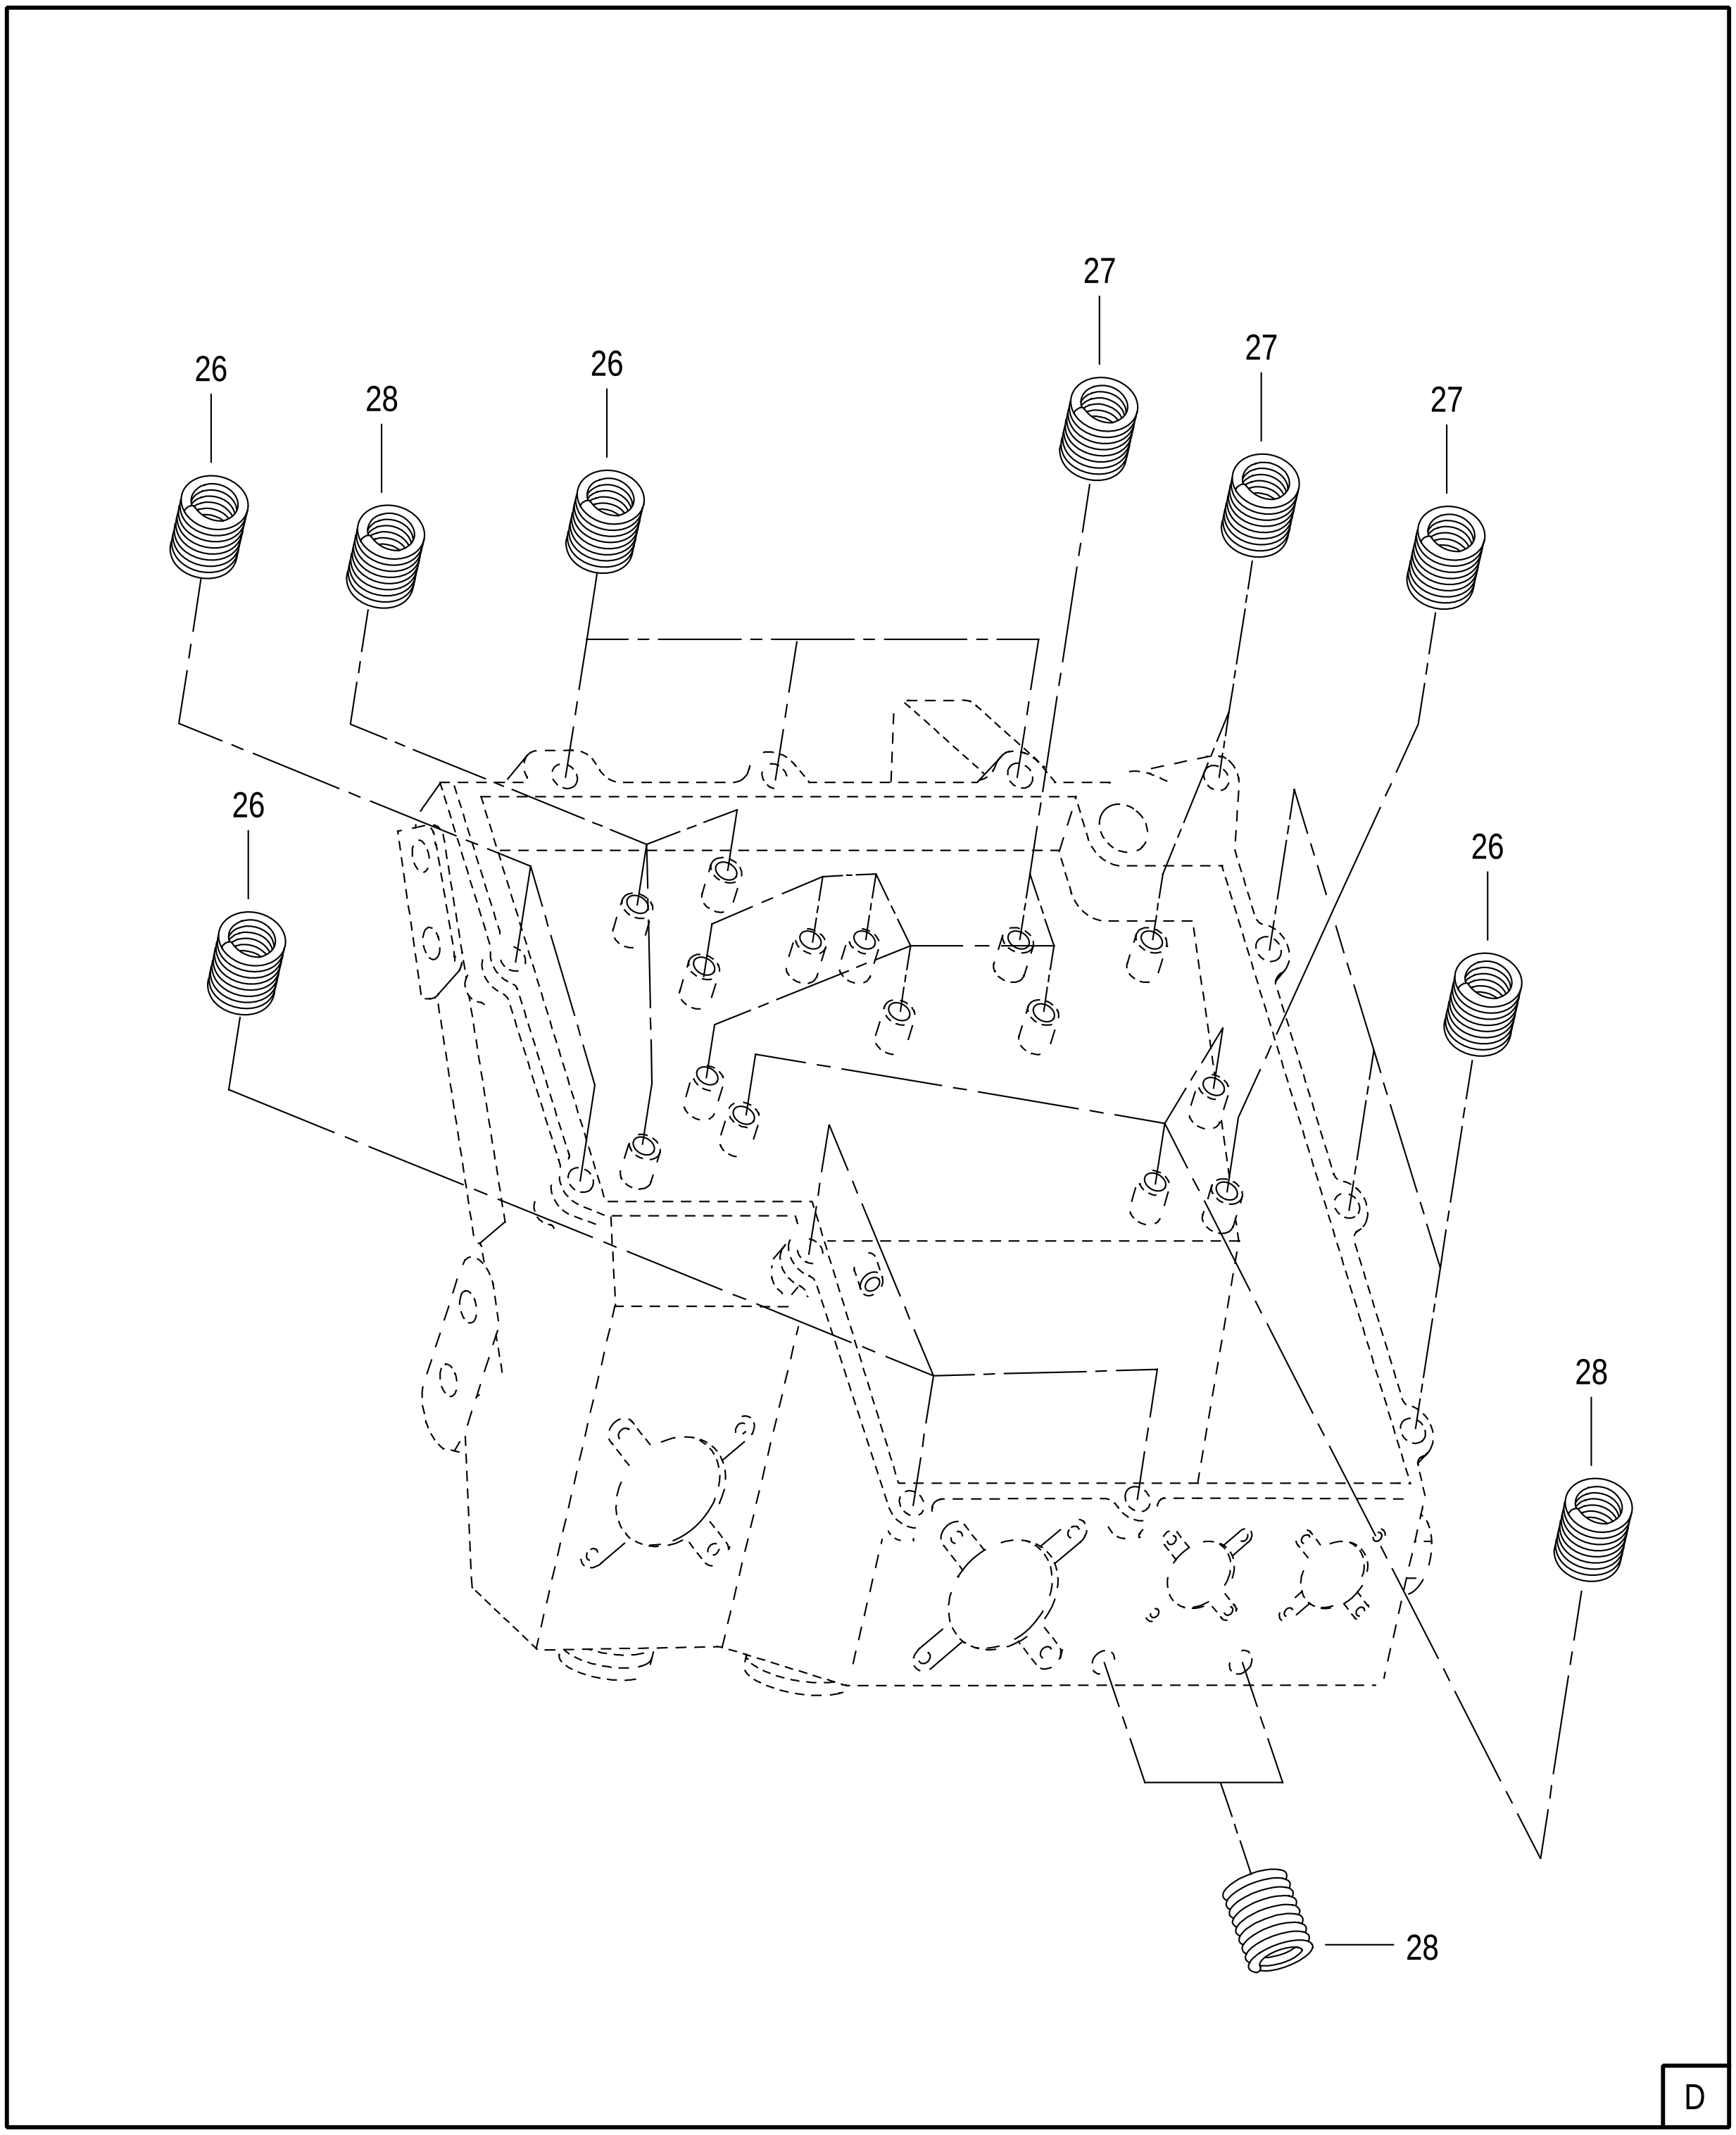

4622

FIGURE 41. GENERATOR ROTOR, GENERATOR STATOR, AND EDU
(SHEET 4 OF 4)

FIGURE & INDEX NUMBER	PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
41	NO NUMBER			GENERATOR ROTOR, GENERATOR STATOR, AND . . EDU SEE FIG. 38-3 FOR NHA	REF		
- 1	44838	#	83311	. STATOR-GENERATOR P&WA PART NO. 4057416	1		PAOLD
- 2	ST2151-020		52661	. BOLT-MACHINE, DRILLED DOUBLE HEX 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	6		PAFZZ
- 3	MS9321-09		96906	. WASHER (AP)	6		PAOZZ
- 4	MS9388-154		96906	. PACKING	1		PAOZZ
- 5	46122		83311	. ROTOR-GENERATOR P&WA PART NO. 4059985	1		PAOBZ
- 6	2147888		52661	. NUT-PLAIN, ROUND 0.625-24UNJF-3B X 0.300 IN. THK (AP)	1		PAOZZ
- 7	2147889		52661	. WASHER-KEY 0.690 ID X 1.140 DIA X 0.031 IN. THK (AP)	1		PAOZZ
- 8	4076309		52661	. BRACKET-CABLE	1		PAOZZ
- 9	4054210		52661	. SCREW-MACHINE, DOUBLE HEX 0.164-32UNJC-3A X 0.312 IN. LONG (AP)	4		PAOBZ
- 10	ST2091-041		52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.4375-20UNJF-3A X 0.250 IN. TUBE OD	1		PAOZZ
- 11	MS9966-05		96906	. PACKING	1		PAOZZ
- 12	ST2000-04		52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.437-20UNJF-3A X 0.250 IN. TUBE OD	1		PAOZZ
- 13	MS9966-04		96906	. PACKING	1		PAOZZ
- 14	789940H04D06	#	3L184	. DIAGNOSTIC UNIT-ENGINE P&WA PART NO. 4077075D06	1	LE	PAOLD
	789940H05D07	#	3L184	. DIAGNOSTIC UNIT-ENGINE P&WA PART NO. 4077524D07	1	LF/AAX	PAOLD
R	789940H06D08	#	3L184	. DIAGNOSTIC UNIT-ENGINE P&WA PART NO. 4084728D08	1	AAY	PAODD
	= 808094		3L184	. DIAGNOSTIC UNIT-ENGINE FOR SERVICE EVALUATION ONLY P&WA PART NO. 4074688	1		PAOLD
	= 809498		3L184	. DIAGNOSTIC UNIT-ENGINE FOR SERVICE EVALUATION ONLY P&WA PART NO. 4080141	1		PAOLD
- 15	ST2018-016		52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 16	4076285		52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A (AP)	1		PAOZZ
- 17	ST2018-024		52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.750 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	2		PAOZZ
- 18	NAS5902-8		80205	.. SCREW	12		PAFZZ
- 19	NAS620-8		80205	.. WASHER	12		PAFZZ
- 20	786249-1		3L184	.. PACKING-PREFORMED	1		PAFZZ
- 21	M25988/1-011		81349	.. PACKING	2		PAFZZ
- 22	791884-2-004		3L184	.. BOARD ASSY-PROCESSOR, EDU	1		PAFLD
- 23	785214-2		3L184	.. BOARD ASSY-POWER SUPPLY, EDU	1		PAFLD
- 24	785212-4		3L184	.. BOARD ASSY-INTERCONNECTOR, EDU	1		PAFLD
- 25	786246-2		3L184	.. BLOCK AND CABLE ASSY-JUNCTION, EDU	1		PAFZZ
- 26	MS21209C0815		96906	.. INSERT	15		PAFZZ
- 27	MS21209C0610		96906	.. INSERT	11		PAFZZ
- 28	MS21209C0415		96906	.. INSERT	8		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	41 - 29	4076290	52661	. BRACKET-SUPPORT, HARNESS	1		PAFZZ
R	- 30	4023115	52661	. NUT OPTION .... SEE OPTION TABLE	4		PAOZZ
R	- 31	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG	4		PAOZZ
R	- 32	4076482	52661	. BRACKET-ENGINE DIAGNOSTIC UNIT, UPPER ..... REAR	1		PAOBZ
R	- 33	4069485	52661	. BRACKET-ENGINE DIAGNOSTIC UNIT, LOWER .... REAR	1		PAOBZ

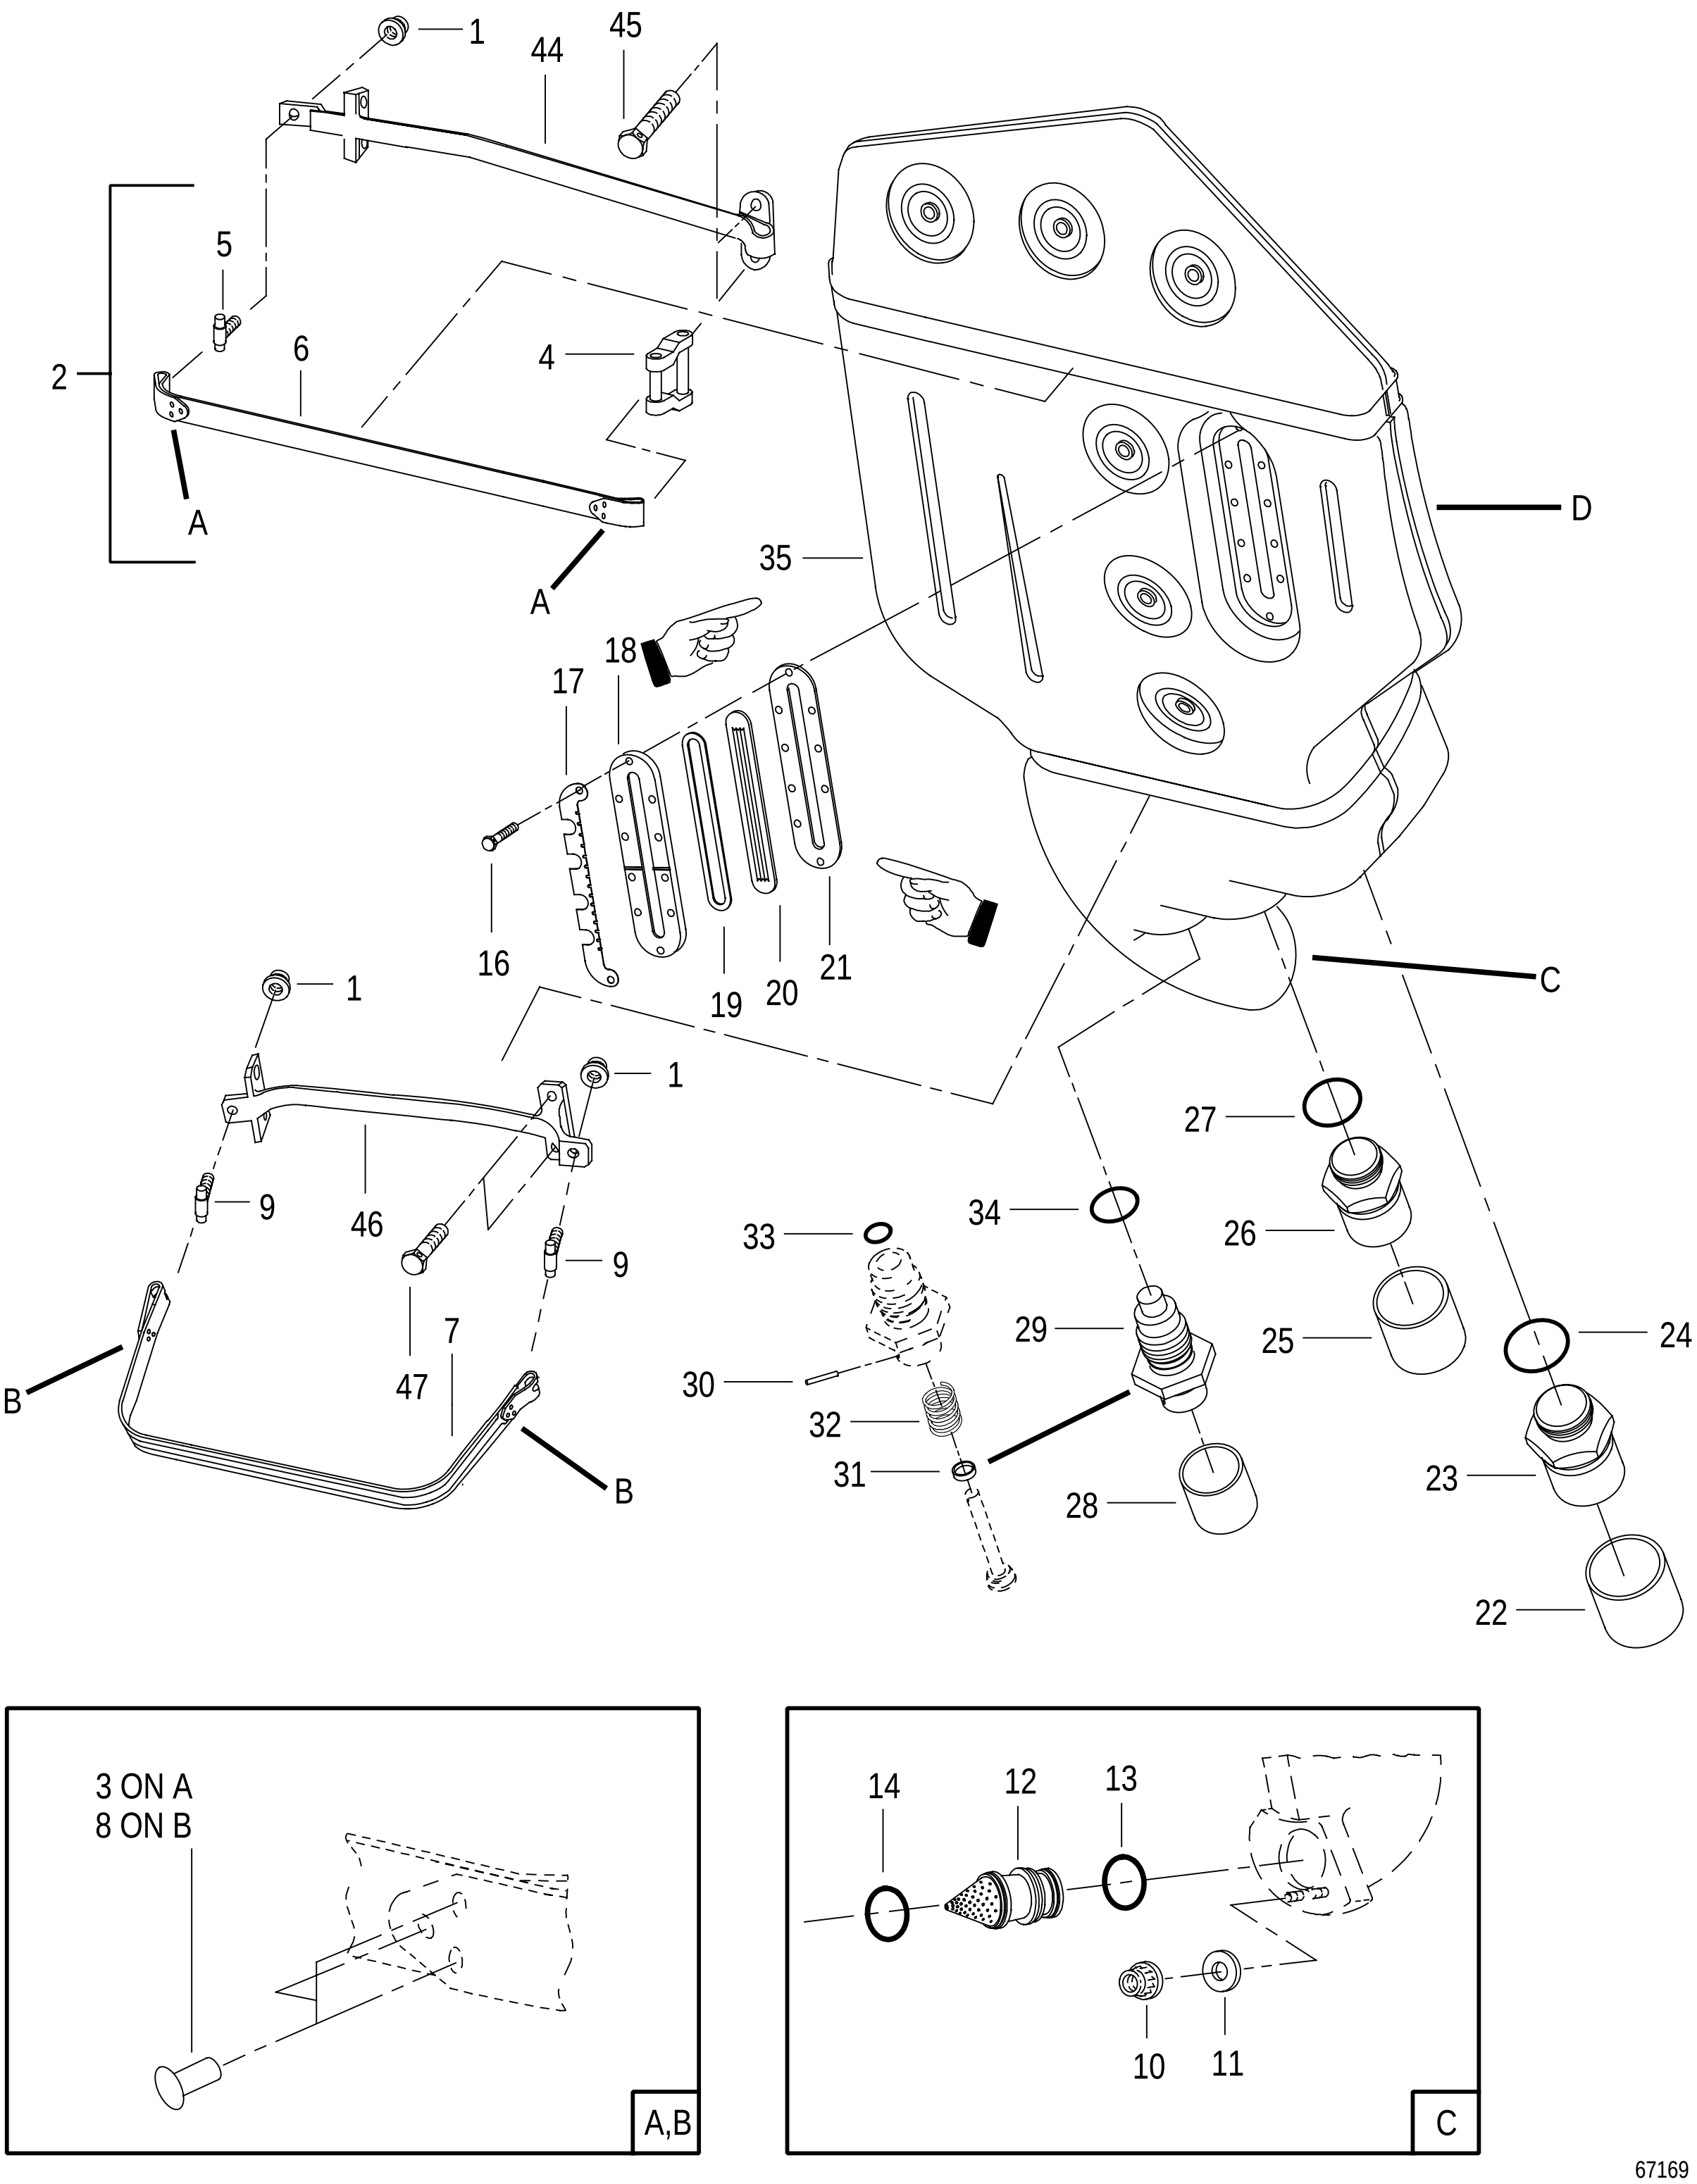


FIGURE 42. OIL TANK AND BRACKETS
(SHEET 1 OF 2)

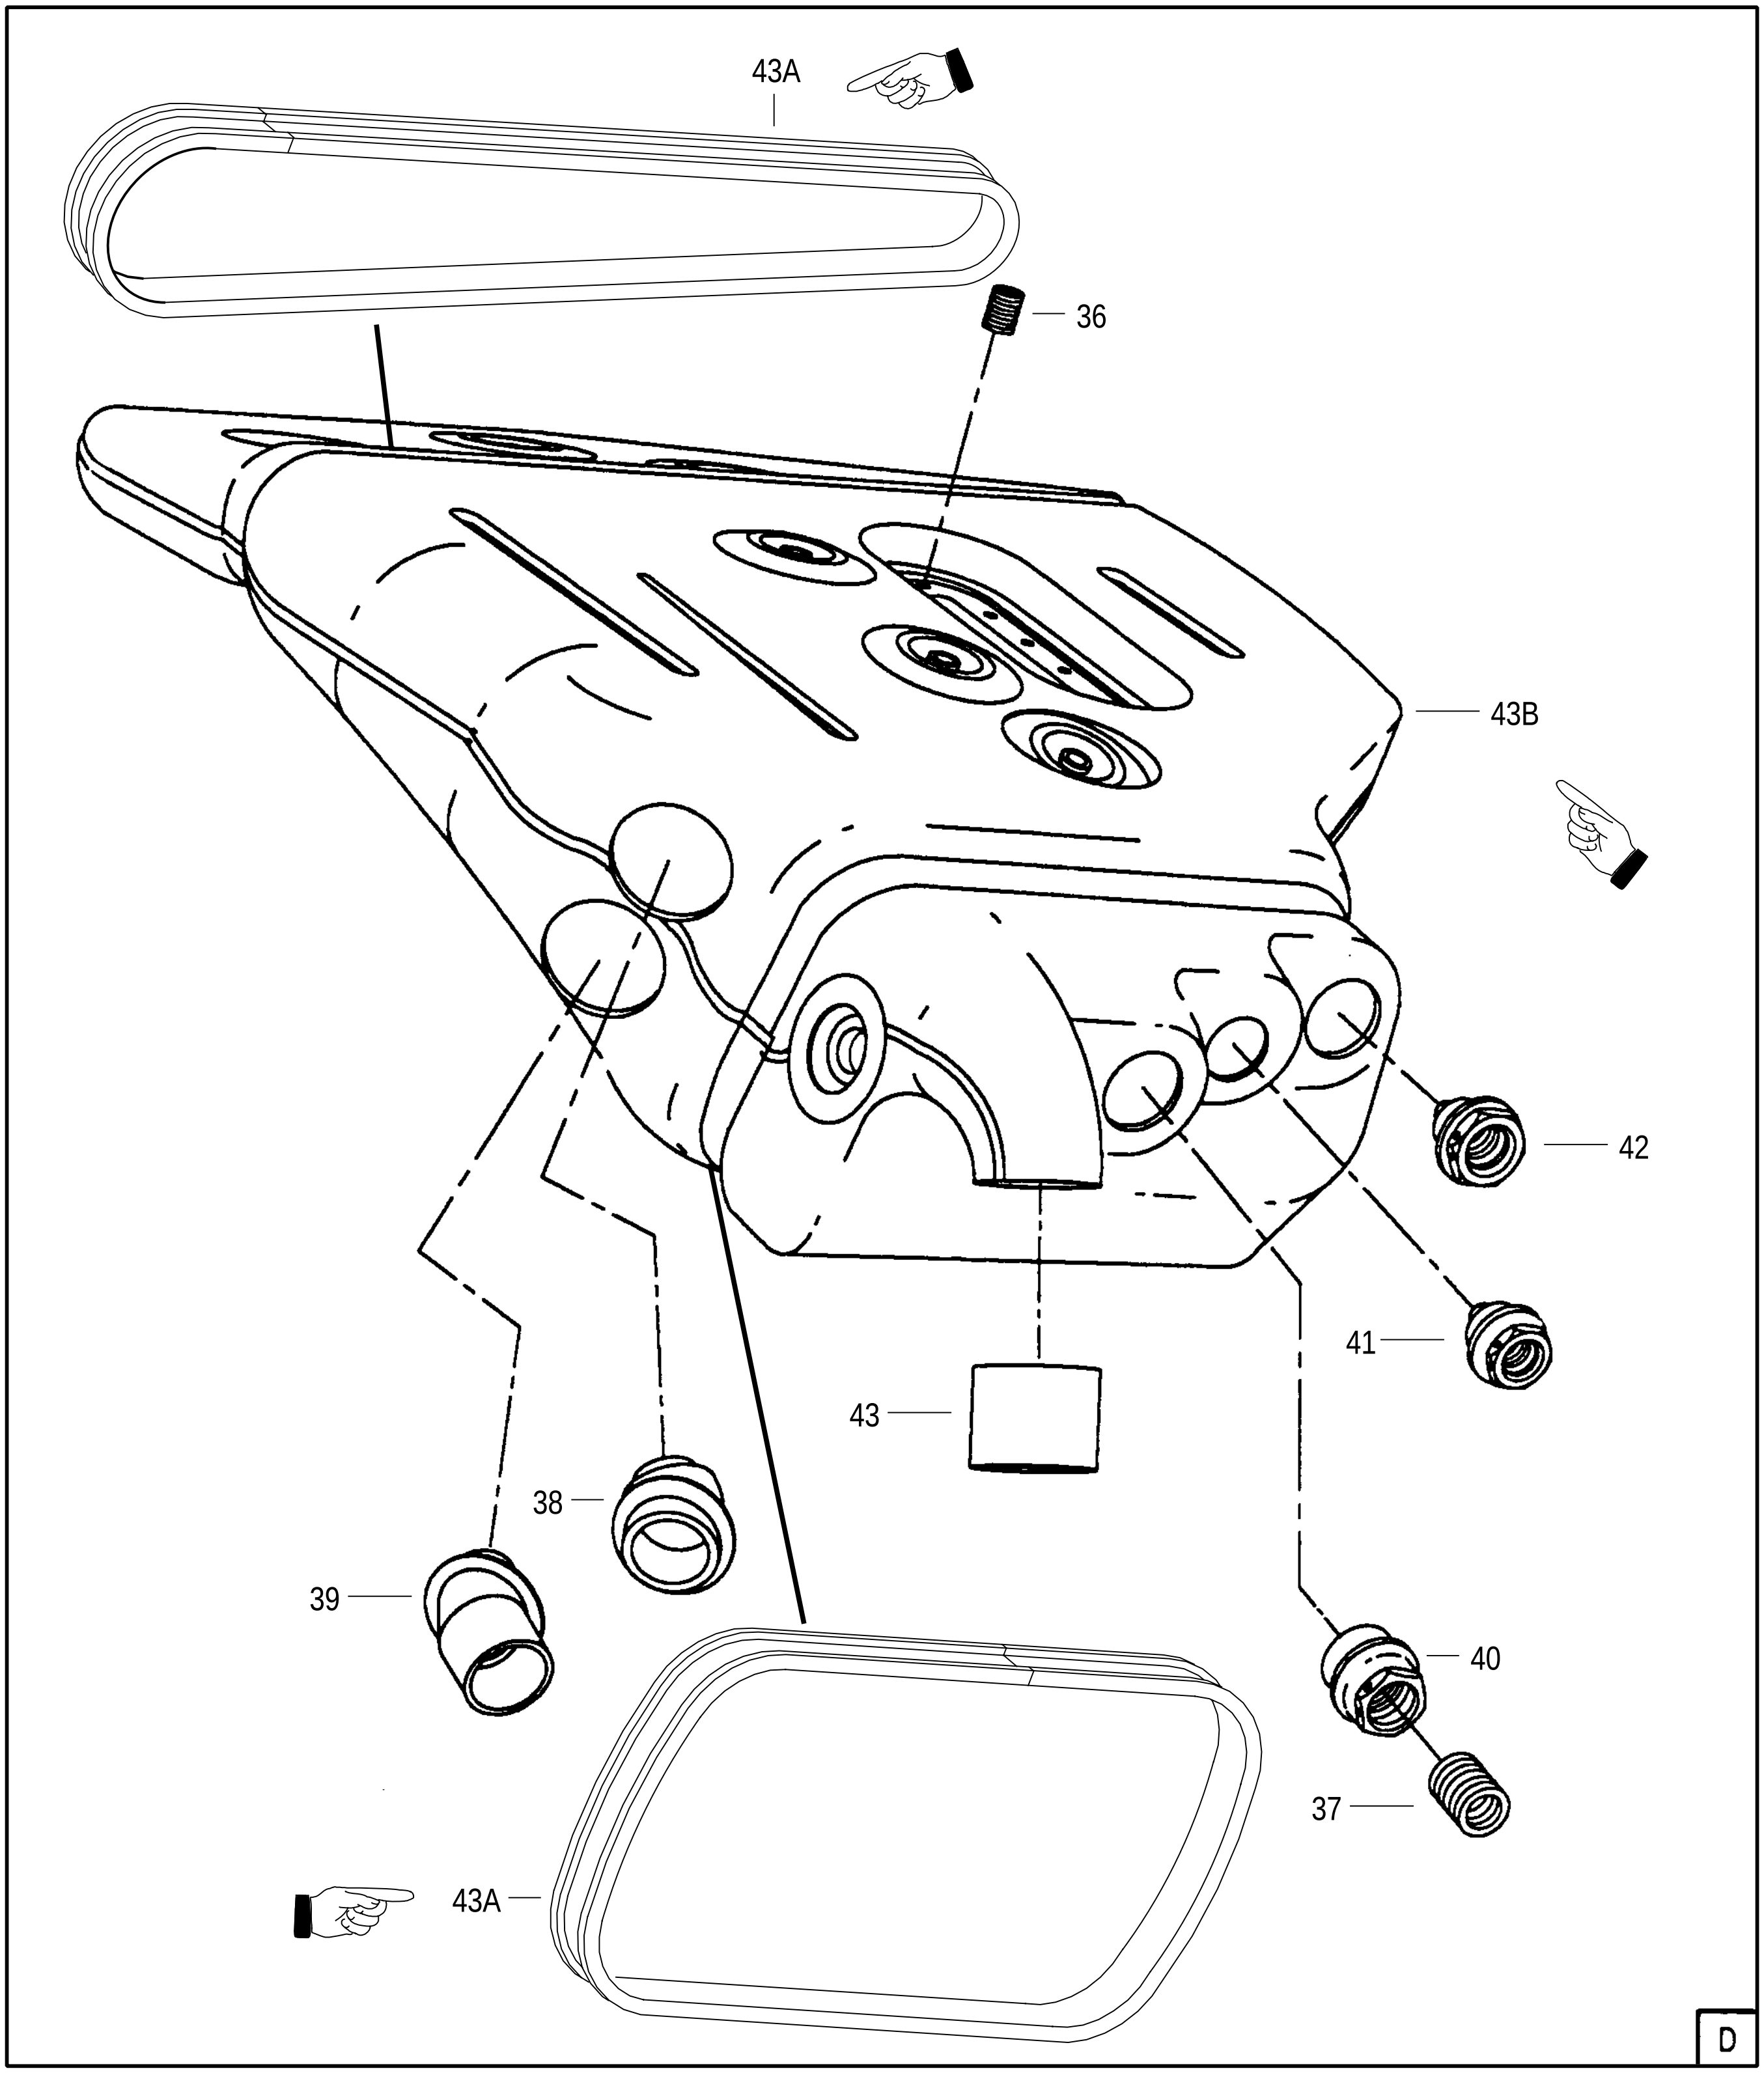


FIGURE 42. OIL TANK AND BRACKETS
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
42	NO NUMBER		OIL TANK AND BRACKETS SEE FIG. 38-4 FOR NHA	REF		
- 1	4023116	52661	. NUT OPTION SEE OPTION TABLE	3		PAOZZ
- 2	4080782	52661	. STRAP ASSY-OIL TANK, UPPER PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 3	MS9318-098	96906	.. RIVET	6		PAFZZ
- 4	4069580	52661	.. LINK-STRAP, UPPER USE ONLY ON 4069573 WHEN EXH USE 4072178-01	1		PAFZZ
	4072178-01	52661	.. LINK-STRAP, OIL TANK, UPPER, ASSY OF	1		PAFZZ
- 5	4069579	52661	.. BOLT-STRAP 0.250-28UNJF-3A X 1.550 IN. LONG	1		XA
- 6	4069575	52661	.. STRAP-OIL TANK, UPPER	1		XA
- 7	4080783	52661	. STRAP ASSY-OIL TANK, LOWER PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 8	MS9318-098	96906	.. RIVET	6		PAFZZ
- 9	4069579	52661	.. BOLT-STRAP 0.250-28UNJF-3A X 1.550 IN. LONG	2		XA
- 10	4023115	52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
- 11	4028970	52661	. WASHER-FLAT 0.225 ID X 0.750 OD X 0.080 IN. THK	1		PAOZZ
- 12	4058013	52661	. STRAINER ELEMENT-CONE, OIL TANK, ASSY OF	1		PAOBZ
- 13	ST1000-128	52661	. PACKING-PREFORMED 1.487 ID X 0.103 IN. DIA ROUND	1		PAOZZ
- 14	ST1000-131	52661	. PACKING-PREFORMED 1.674 ID X 0.103 IN. DIA ROUND	1		PAOZZ
- 15	< 4066724-700 #	52661	. TANK ASSY-LUBRICATING OIL PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 16	4033174	52661	.. BOLT-MACHINE, DRILLED HEX 0.190-24UNJC-3A X 0.688 IN. LONG	10		PAOZZ
- 17	4057440	52661	.. TEMPLATE-GAGE, OIL TANK LEVEL	1		PAOZZ
- 18	17351	97484	.. FRAME-OIL TANK INDICATOR P&WA PART NO. 4049242	1		PAOZZ
- 19	17337	97484	.. GASKET-OIL TANK INDICATOR P&WA PART NO. 4049245	1		PAOZZ
- 20	17335	97484	.. GASKET-OIL TANK INDICATOR P&WA PART NO. 4049244	1		PAOZZ
- 21	17338	97484	.. LENS-OIL TANK INDICATOR P&WA PART NO. 4049243	1		PAOZZ
- 22	4073606	52661	.. CAP OPTION SEE OPTION TABLE	1		PAOFF
- 23	4064470	52661	.. ADAPTER OPTION SEE OPTION TABLE	1		PAOBZ
- 24	ST1051-12	52661	.. PACKING-PREFORMED, BOSS 0.924 ID X 0.116 IN. DIA ROUND	1		PAOZZ
- 25	4073607	52661	.. CAP OPTION SEE OPTION TABLE	1		PAOFF
- 26	4064471	52661	.. ADAPTER OPTION SEE OPTION TABLE	1		PAOBZ
- 27	ST1051-08	52661	.. PACKING-PREFORMED 0.644 ID X 0.087 IN. DIA ROUND	1		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
42 - 28	4073605	52661	.. COVER OPTION .... SEE OPTION TABLE	1		PAOFF
- 29	4010497	52661	.. VALVE ASSY-OIL TANK, DRAIN AND SAMPLING ... PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 30	4010520	52661	... PIN-STRAIGHT, HEADLESS...................... 0.06375 X 0.290 IN. LONG	1		PAFZZ
- 31	4010496	52661	... SEAT-HELICAL COMPRESSION SPRING..........	1		PAFZZ
- 32	4010519	52661	... SPRING-HELICAL COMPRESSION .... 0.292 OD X 0.022 DIA WIRE X 11 COILS	1		PAFZZ
- 33	ST1000-011	52661	... PACKING-PREFORMED .... 0.301 OD X 0.070 IN. DIA ROUND	1		PAFZZ
- 34	ST1051-10	52661	.. PACKING-PREFORMED, BOSS .... 0.755 ID X 0.097 IN. DIA ROUND	1		PAOZZ
- 35	4077275	52661	.. TANK-LUBRICATING OIL, ASSY OF .... USE ONLY ON 4077274-700	1		XA
	4066275	52661	.. TANK-LUBRICATING OIL, ASSY OF .... USE ONLY ON 4066724-700 PARTIAL BREAKDOWN FOLLOWS	1		XA
- 36	MS122120	96906	... INSERT	10		PAFZZ
- 37	MS124663	96906	... INSERT	1		PAFZZ
- 38	4046559	52661	... BOSS-OIL TANK	1		PAFZZ
- 39	4046560	52661	... BOSS-OIL TANK	1		PAFZZ
- 40	4042095	52661	... BOSS-OIL TANK	1		PAFZZ
- 41	4042096	52661	... BOSS-OIL TANK	1		PAFZZ
- 42	4042098	52661	... BOSS-OIL TANK	1		PAFZZ
- 43	4042076	52661	... FERRULE-TUBE, OIL TANK	1		PAFZZ
- 43A	4071815	52661	... INSULATION-OIL TANK STRAP..................	AR		PAFZZ
- 43B	4046561	52661	... TANK SEGMENT-OIL	1		PAODD
- 44	4071502	52661	. BRACKET ASSY-OIL TANK, UPPER	1	BS	PAOZZ
	4079922	52661	. BRACKET ASSY-OIL TANK, UPPER	1	BT	PAOZZ
	4079898	52661	. BRACKET ASSY-OIL TANK, UPPER	1		PAOZZ
- 45	ST2155-012	52661	. BOLT-MACHINE, DRILLED, HEX .... 0.250-28UNJF-3A X 0.375 IN. LONG (AP)	2		PAFZZ
- 46	4071503	52661	. BRACKET ASSY-OIL TANK, LOWER	1	BS	PAOZZ
	4079923	52661	. BRACKET ASSY-OIL TANK, LOWER	1	BT	PAOZZ
	4079899	52661	. BRACKET ASSY-OIL TANK, LOWER	1		PAOZZ
- 47	ST2155-016	52661	. BOLT-MACHINE, DRILLED, HEX .... 0.250-28UNJF-3A X 0.500 IN. LONG (AP)	2		PAFZZ

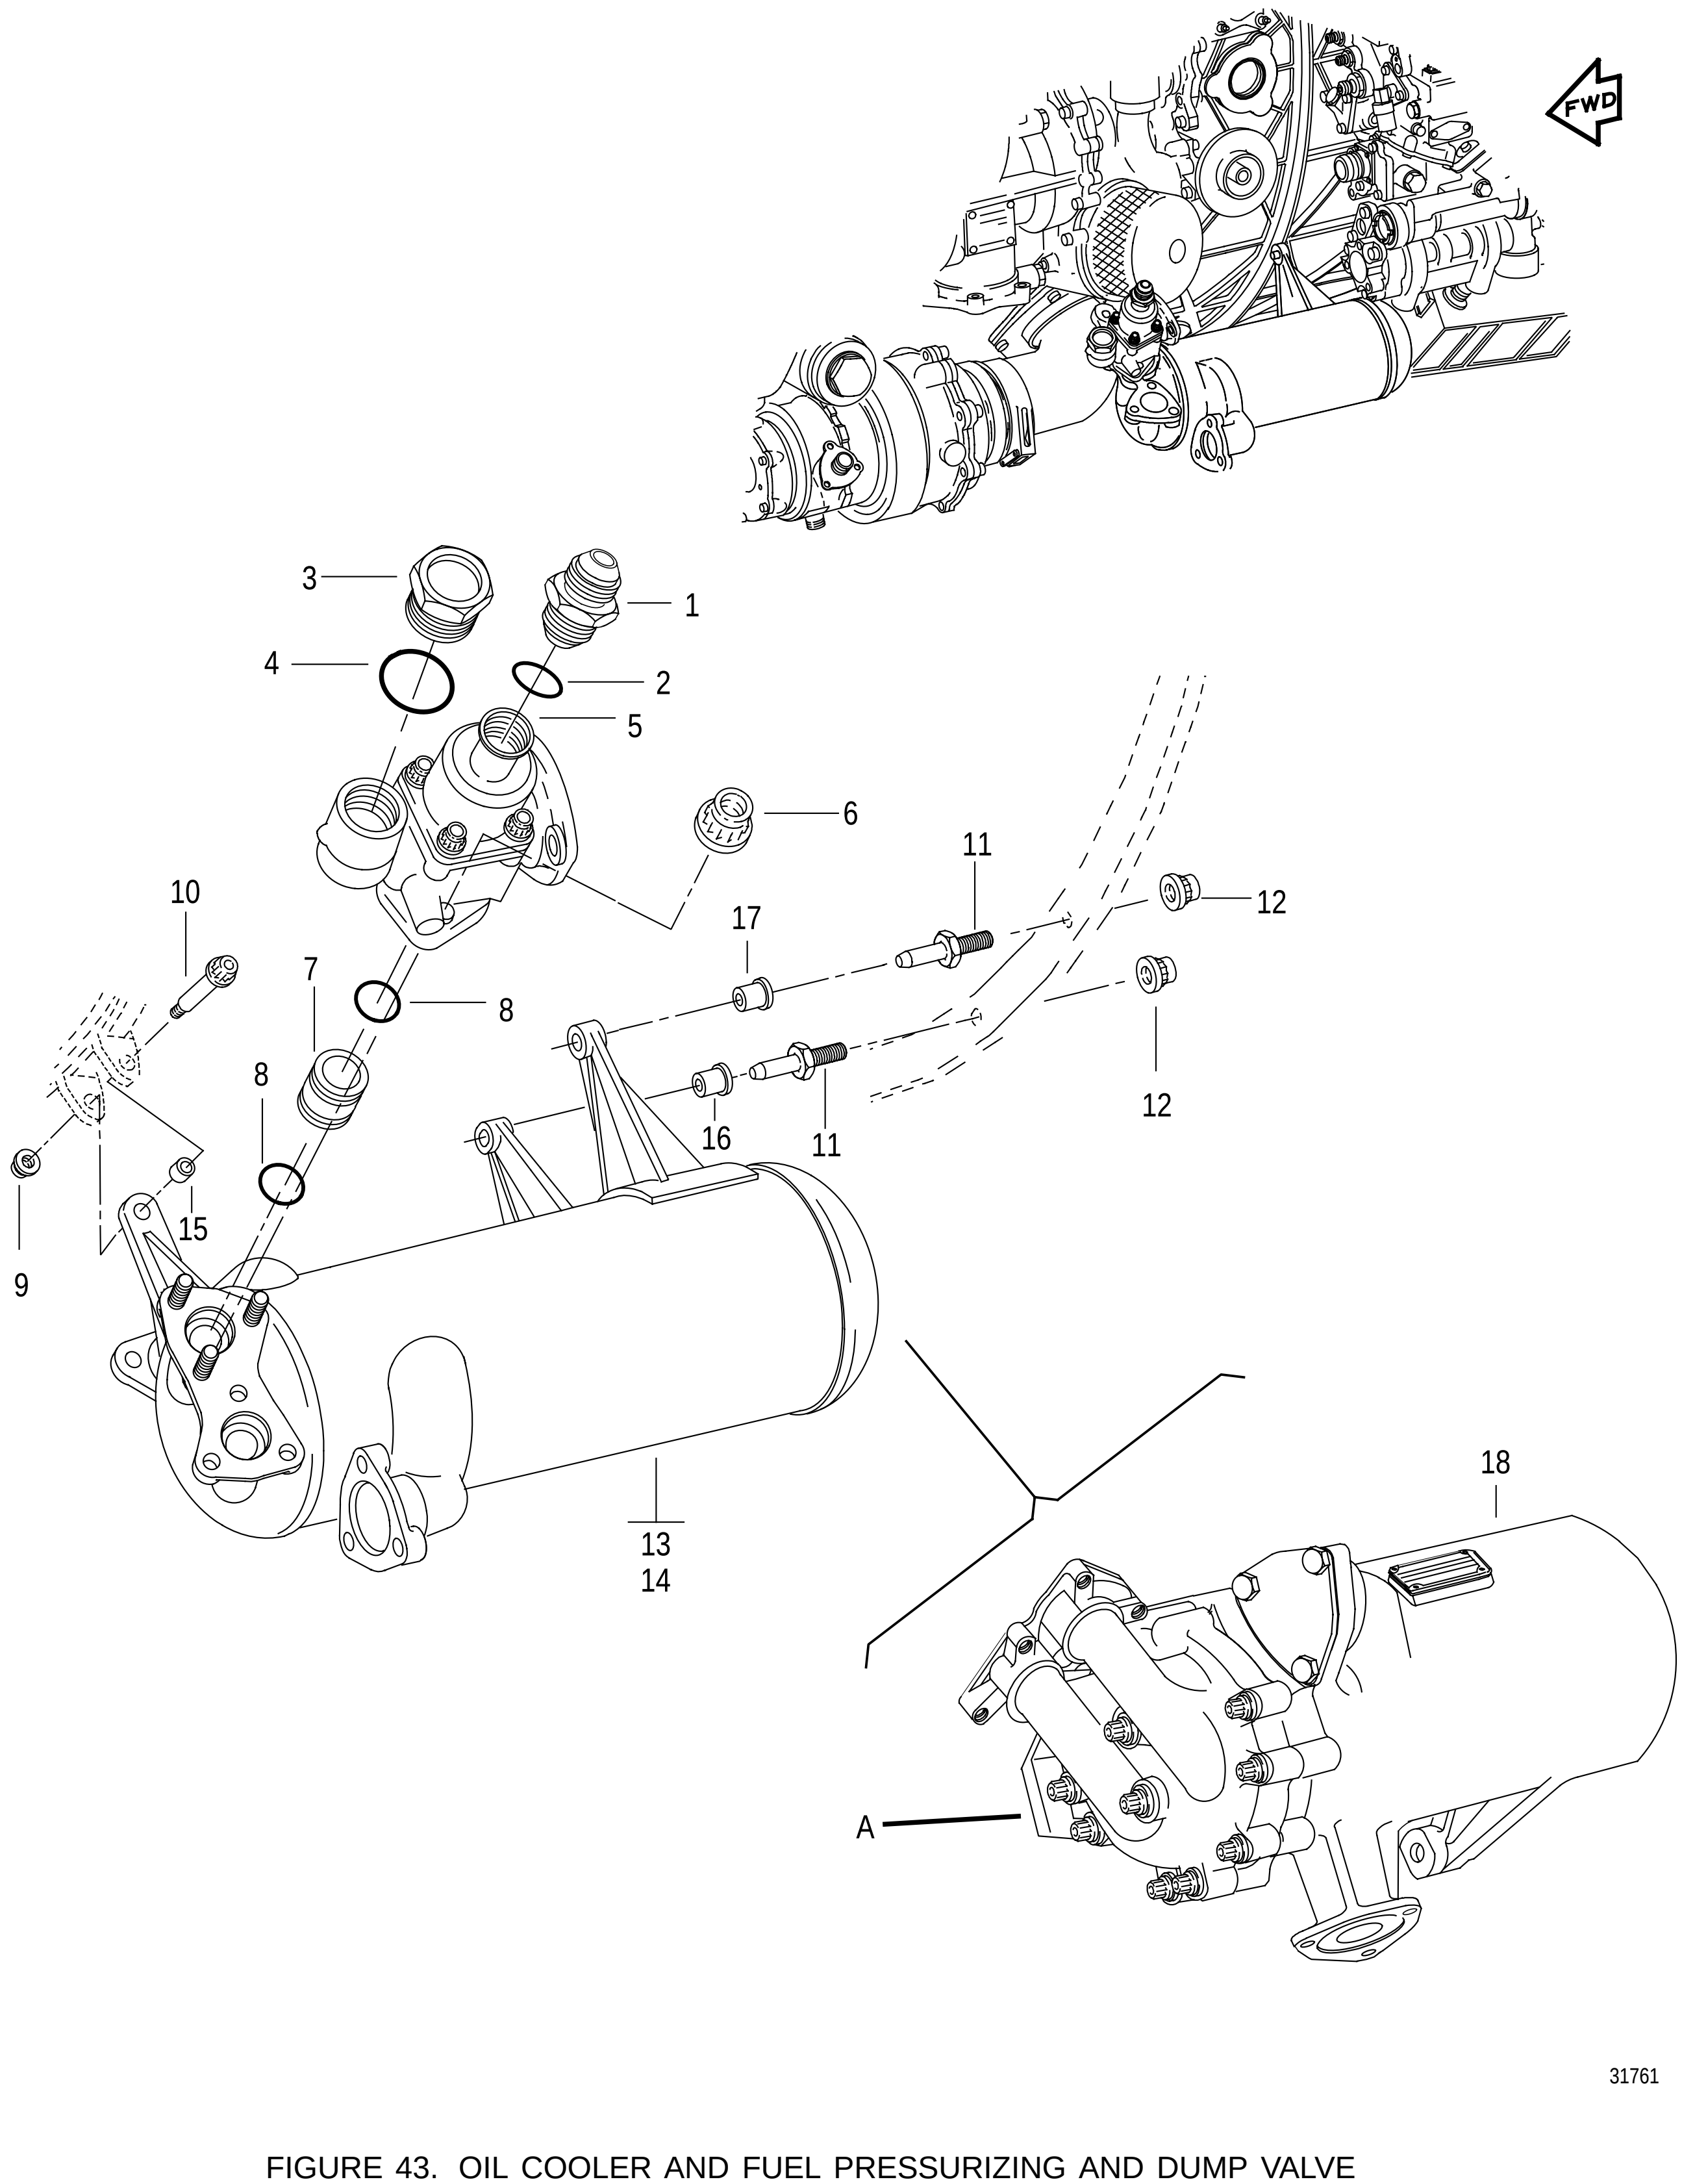


FIGURE 43. OIL COOLER AND FUEL PRESSURIZING AND DUMP VALVE
(SHEET 1 OF 2)

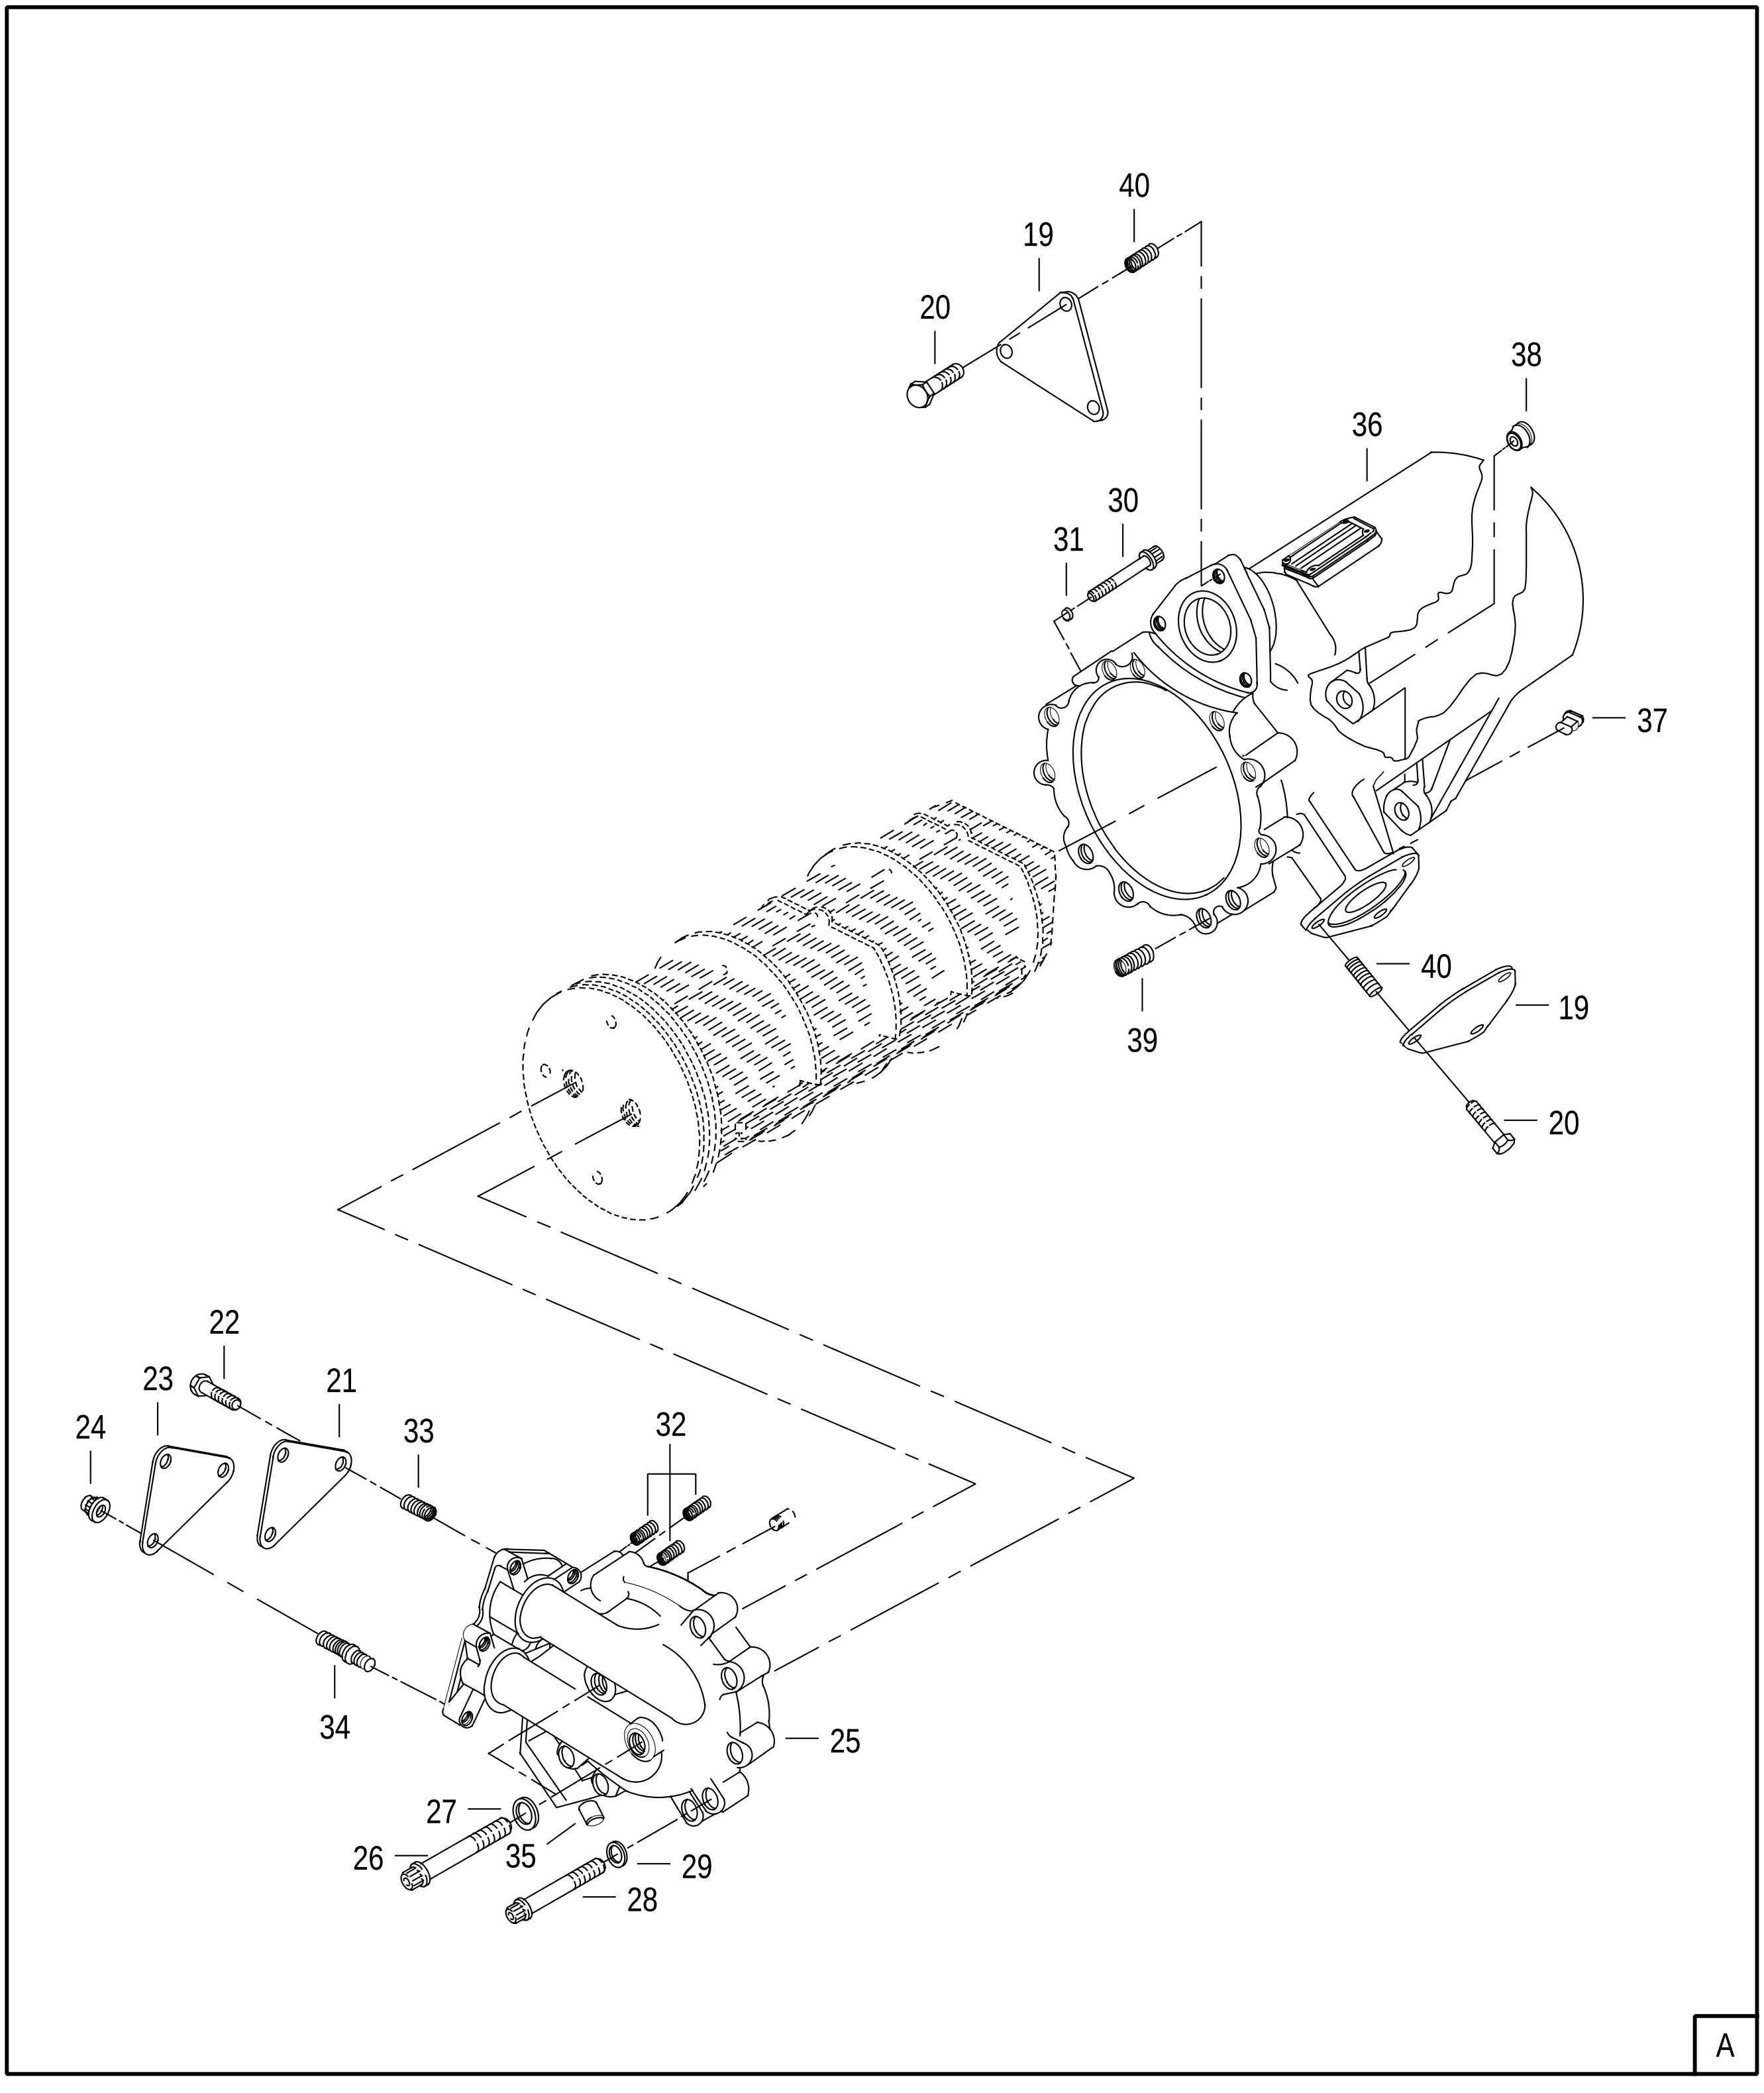


FIGURE 43. OIL COOLER AND FUEL PRESSURIZING AND DUMP VALVE
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
43	NO NUMBER		OIL COOLER AND FUEL PRESSURIZING AND ...... DUMP VALVE SEE FIG. 38-5 FOR NHA	REF		
- 1	4061267	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS	1		PAOZZ
- 2	MS9966-06	96906	. PACKING	1		PAOZZ
- 3	MS9902-08	96906	. PLUG	1		PAOZZ
- 4	MS9966-08	96906	. PACKING	1		PAOZZ
- 5	70035 #	99643	. VALVE-FUEL PRESSURIZING AND DUMP P&WA PART NO. 4062056	1		PAOLD
- 6	4023116	52661	. NUT OPTION (AP) SEE OPTION TABLE	3		PAOZZ
- 7	4032949	52661	. TUBE-TRANSFER, PACKING 0.680 ID X 0.909 OD X 0.740 IN. LONG	1		PAOZZ
- 8	MS9966-10	96906	. PACKING	2		PAOZZ
- 9	4023115	52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
- 10	4032947	52661	. BOLT-SHOULDER, DOUBLE HEX 0.190-32UNJF-3A X 1.000 IN. LONG	1		PAOZZ
- 11	4032948	52661	. PIN-SHOULDER, HEADLESS 0.2505 DIA X 0.250-28UNJF-3A X 1.625 IN. LONG	2		PAOZZ
- 12	4023116	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
	4076474	52661	. COOLER OPTION-OIL PROCUREMENT NO. CONSISTS OF	1		PAODD
- 13	UA539800-2 #	78943	.. COOLER ASSY-OIL P&WA PART NO. 4069429 OPTIONAL TO 45731-1341 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 14	U539833	78943	... FUEL-OIL COOLER MASTER ASSY PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 15	U535845	78943	.... BUSHING-MOUNTING LUG	1		PAFZZ
- 16	U535846	78943	.... BUSHING-UPPER MOUNT, AFT	1		PAFZZ
- 17	U536058	78943	.... BUSHING-LOWER MOUNT, AFT	1		PAFZZ
- 18	45731-1341 #	U1841	.. COOLER ASSY-OIL P&WA PART NO. 4069430 OPTIONAL TO UA539800-2 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 19	93715	U1841	... COVER-PROTECTION	2		PAOZZ
- 20	93707	U1841	... BOLT-HEX HD (AP)	3		PAOZZ
- 21	93714	U1841	... COVER-PROTECTION	1		PAOZZ
- 22	93707	U1841	... BOLT-HEX HD (AP)	3		PAOZZ
- 23	93714	U1841	... COVER-PROTECTION	1		PAOZZ
- 24	93712	U1841	... NUT-HEX HD (AP)	3		PAOZZ
- 25	37536-1351	U1841	... COVER ASSY-END	1		PAFDD
- 26	32558-5007	U1841	... BOLT-12 POINT (AP)	2		PADZZ
- 27	= AGS1186-A	05906	... WASHER (AP)	2		PADZZ
	= 23556-2508	U1841	... WASHER (AP)	2		PADZZ
- 28	= AS20925	05906	... BOLT (AP)	10		PADZZ
	= 22876-2162	U1841	... BOLT (AP)	10		PADZZ
- 29	= SP14-C	05906	... WASHER (AP)	10		PADZZ
	= 22182-0327	U1841	... WASHER (AP)	10		PADZZ
- 30	= AS20948	05906	... BOLT (AP)	1		PADZZ
	= 22876-2190	U1841	... BOLT (AP)	1		PADZZ
- 31	= SP14-C	05906	... WASHER (AP)	1		PADZZ
	= 22182-0327	U1841	... WASHER (AP) PARTIAL BREAKDOWN FOLLOWS	1		PADZZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
43 - 32	=	AGS3781	NONE6	.... INSERT	3		PAFZZ
	=	22881-1034	U1841	.... INSERT	3		PAFZZ
- 33	=	AGS3732	NONE6	.... INSERT	3		PAFZZ
	=	22881-1042	U1841	.... INSERT	3		PAFZZ
- 34	=	SFC-250SUM-9	71826 83324	.... STUD	3		PAFZZ
	=	22896-3151	U1841	.... STUD	3		PAFZZ
- 35		32322-7010	U1841	.... BUSHING	1		PAFZZ
- 36		34831-1613	U1841	... CASE ASSY PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 37		32323-1002	U1841	.... BUSHING	1		PAFZZ
- 38		32323-1003	U1841	.... BUSHING	1		PAFZZ
- 39	=	AGS3781	NONE6	.... INSERT	8		PAFZZ
	=	22881-1034	U1841	.... INSERT	8		PAFZZ
- 40	=	AGS3732	NONE6	.... INSERT	6		PAFZZ
	=	22881-1042	U1841	.... INSERT	6		PAFZZ
- 41	<	29812-0201	U1841	... SEAL-WIRE LOCKING	1		PAOZZ

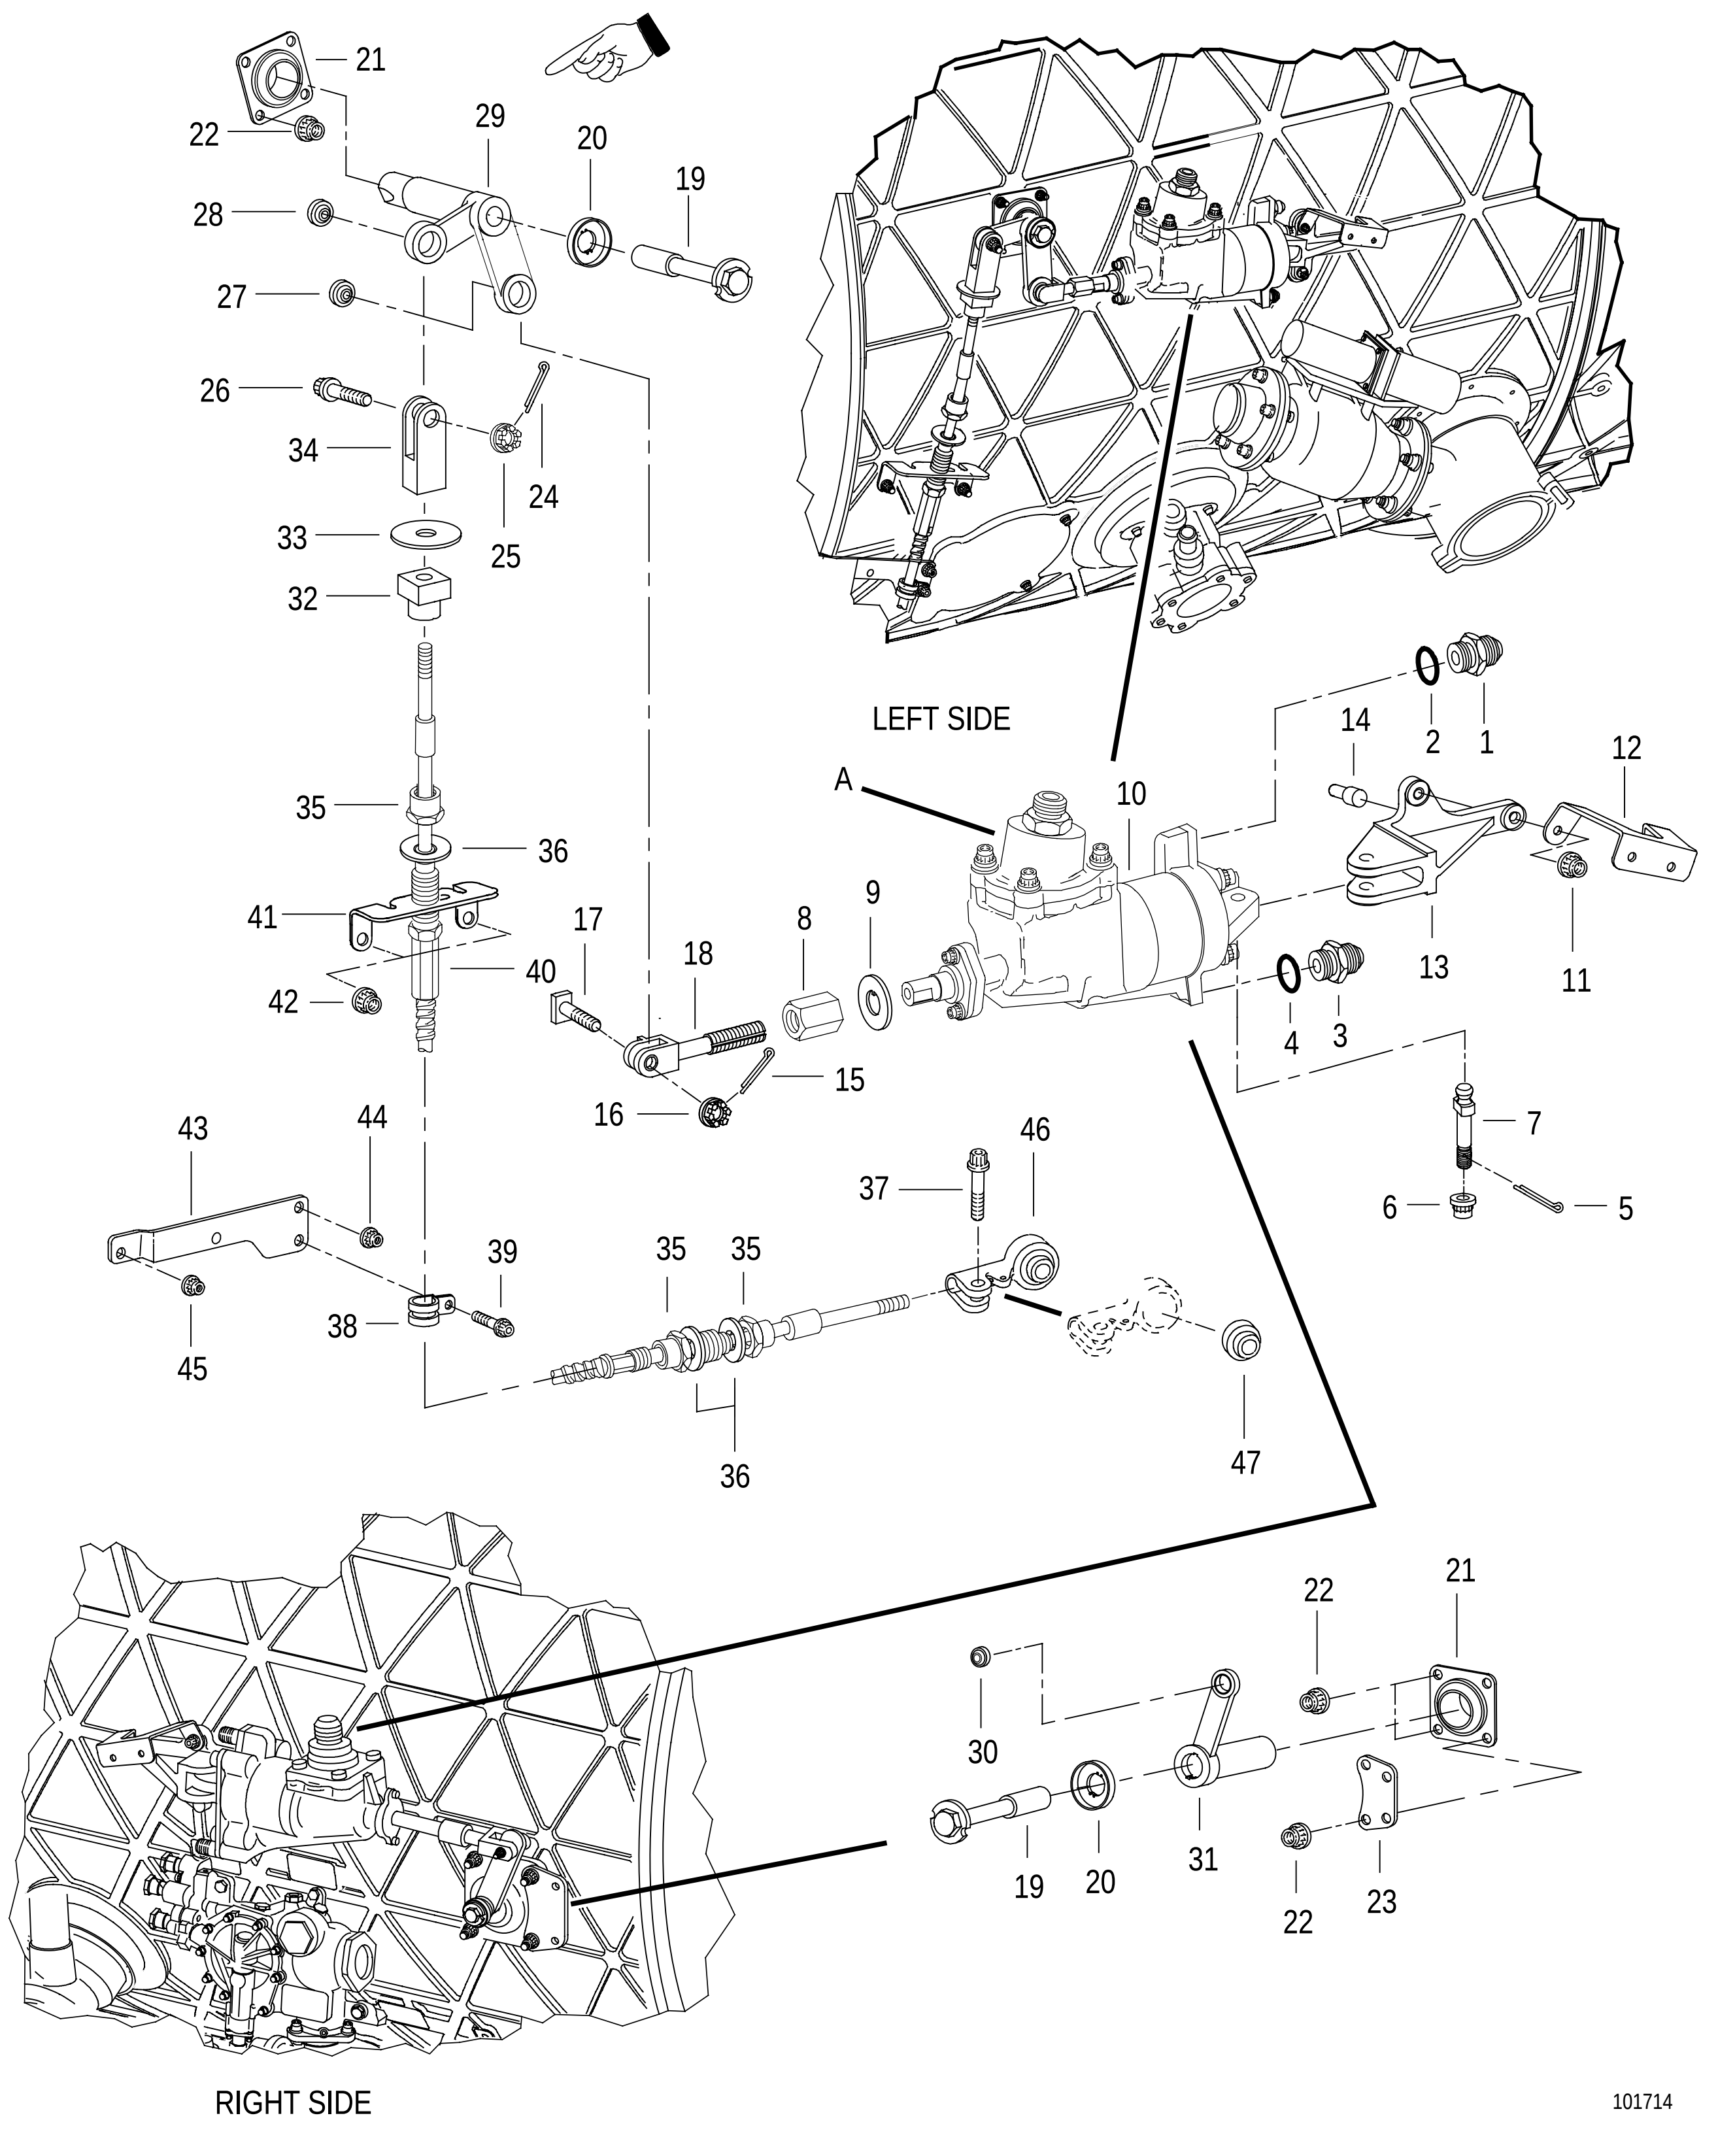


FIGURE 44. RCVV ACTUATORS AND CONTROLS
(SHEET 1 OF 2)

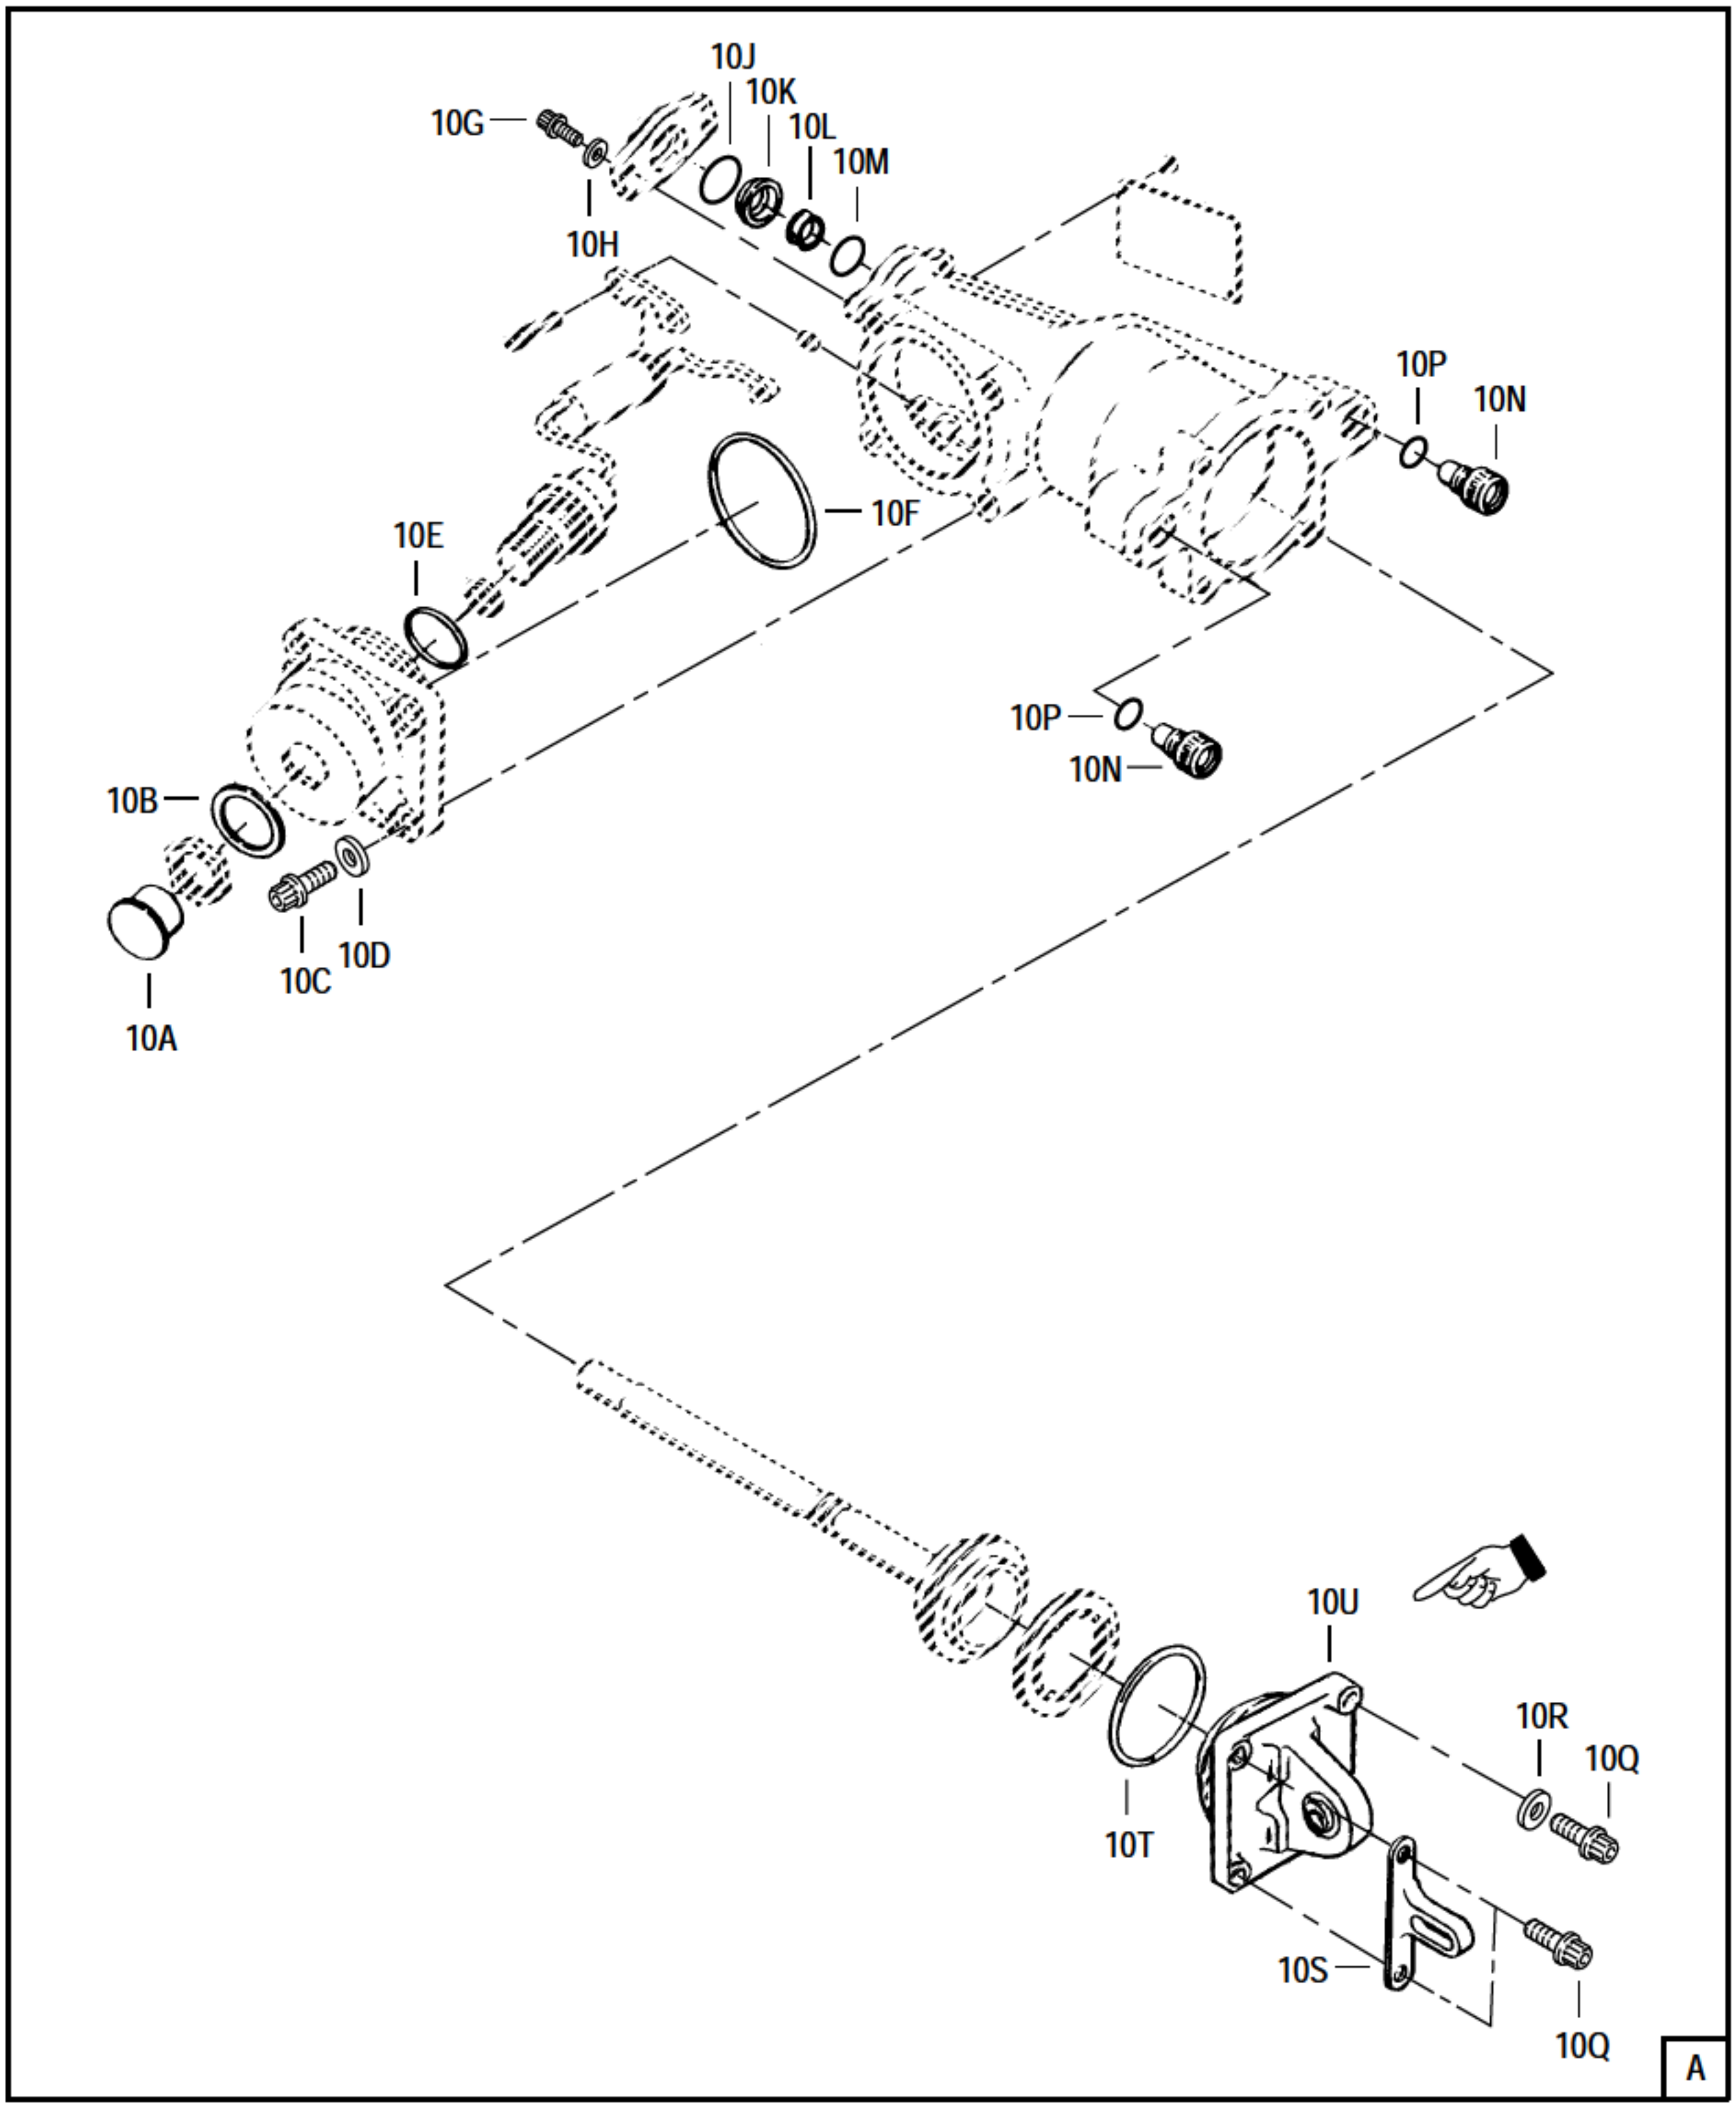


FIGURE 44. RCVV ACTUATORS AND CONTROLS
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
44	NO NUMBER		RCVV ACTUATORS AND CONTROLS . . . . SEE FIG. 38-6 FOR NHA	REF		
- 1	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.437-20UNJF-3A X 0.250 IN. TUBE OD	2	ES	PAOZZ
	ST2000-05	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.500-20UNJF-3A X 0.312 IN. TUBE OD	2	ET	PAOZZ
- 2	MS9966-04	96906	. PACKING	2	ES	PAOZZ
	MS9966-05	96906	. PACKING	2	ET	PAOZZ
- 3	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.437-20UNJF-3A X 0.250 IN. TUBE OD	2		PAOZZ
- 4	MS9966-04	96906	. PACKING	2		PAOZZ
- 5	MS9245-24	96906	. PIN	2		PAOZZ
- 6	4022709	52661	. NUT OPTION . . . . SEE OPTION TABLE	2		PAOZZ
- 7	4033743	52661	. BOLT-COMPRESSOR STATOR CYLINDER . . . . 0.250-28UNJF-3A X 1.125 IN. LONG	2		PAOZZ
- 8	4068404	52661	. NUT-SLEEVE . . . . 0.375-24UNJF-3A X 0.450 IN. THK	2		PAOZZ
- 9	4004816	52661	. WASHER-KEY . . . . 0.381 ID X 0.037 IN. THK	2		PAOZZ
- 10	441293 #	99877	. CYLINDER-ACTUATING, LINEAR, VARIABLE . . . . VANE, REAR COMPRESSOR P&WA PART NO. 4061378	2	ES	PAOLD
	441720 #	99877	. CYLINDER-ACTUATING, LINEAR, VARIABLE . . . . VANE, REAR COMPRESSOR P&WA PART NO. 4071524 PARTIAL BREAKDOWN FOLLOWS	2	ET	PAOLD
- 10A	NAS813-12	80205	.. CAP-PROTECTIVE	1		PAOZZ
- 10B	2663863	99877	.. WASHER-CONNECTOR	1		PAFZZ
- 10C	953528-191	99877	.. SCREW-MACHINE, 12 POINT	4		PAFZZ
- 10D	AN960C416L	88044	.. WASHER-FLAT	4		PAFZZ
- 10E	2666850-22	99877	.. PACKING-PREFORMED	1		PAFZZ
- 10F	2666850-134	99877	.. PACKING-PREFORMED	1		PAFZZ
- 10G	953528-86	99877	.. SCREW-MACHINE, 12 POINT	2		PAFZZ
- 10H	AN960C6	88044	.. WASHER-FLAT	2		PAFZZ
- 10J	2666850-114	99877	.. PACKING-PREFORMED	1		PAFZZ
- 10K	2649313	99877	.. RING-WIPER	1		PAFZZ
- 10L	2649314	99877	.. RING-PISTON	1		PAFZZ
- 10M	2666850-113	99877	.. PACKING-PREFORMED	1		PAFZZ
- 10N	2663787-004	99877	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL .	2		PAOZZ
- 10P	557-S-4	99877	.. PACKING-PREFORMED	2		PAOZZ
- 10Q	953528-191	99877	.. SCREW-MACHINE, 12 POINT	4		PAFZZ
- 10R	AN960C6	88044	.. WASHER-FLAT	2		PAFZZ
- 10S	2663848	99877	.. BRACKET-TORQUE	1		PAOZZ
- 10T	2666850-134	99877	.. PACKING-PREFORMED	1		PAFZZ
R - 10U	2671270	99877	.. COVER ASSY-PIVOT	1		PAFLD
- 11	4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	6		PAOZZ
- 12	4075943	52661	. BRACKET-LOOP CLAMP	2		PAFZZ
- 13	4073009	52661	. SUPPORT ASSY-COMPRESSOR STATOR . . . . CYLINDER PARTIAL BREAKDOWN FOLLOWS	2		PAOFF
- 14	4016599	52661	.. PIN-STRAIGHT, HEADED . . . . 0.18705 DIA X 0.350 IN. LONG	1		PAOZZ
- 15	MS9245-24	96906	. PIN	2		PAOZZ
- 16	4062289	52661	. NUT OPTION . . . . SEE OPTION TABLE	2		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
44 - 17	4062286	52661	. BOLT-MACHINE, SLAB, DRILLED 0.250-28UNJF-3A X 1.060 IN. LONG	2		PAOZZ
- 18	4080888	52661	. CLEVIS-ROD END 0.375-24UNJF-3A X 2.375 IN. LONG SUPERSEDES 4062340	2		PAFZZ
- 19	4066807	52661	. NUT-SLEEVE 0.3125-24UNJF-3B X 2.650 IN. LONG, HEX	2		PAOZZ
- 20	4062432	52661	. WASHER-KEY 0.510 ID X 1.050 DIA X 0.0295 IN. THK	2		PAOZZ
- 21	4069473	52661	. BEARING OPTION SEE OPTION TABLE	2		XA
- 22	4023116	52661	. NUT OPTION (AP) SEE OPTION TABLE	4		PAOZZ
- 23	4077351	52661	. BRACKET-FLAT	1		PAFZZ
- 24	MS9245-24	96906	. PIN	1		PAOZZ
- 25	4062489	52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
- 26	4062511	52661	. BOLT-MACHINE, HEX, DRILLED 0.190-32UNJF X 0.915 IN. LONG	1		PAOZZ
	4066831	52661	. ARM-COMPRESSOR STATOR LINKAGE, ASSY OF, LH	1		PAODD
- 27	4062497	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
- 28	4062498	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
- 29	4066830	52661	.. ARM-COMPRESSOR STATOR LINKAGE, LH	1		XA
	4066803	52661	. ARM-COMPRESSOR STATOR LINKAGE, ASSY OF, RH	1		PAODD
- 30	4062497	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
- 31	4066802	52661	.. ARM-COMPRESSOR STATOR LINKAGE, RH	1		XA
- 32	4018067	52661	. NUT-SLEEVE, SQUARE 0.190-32UNJF-3B X 0.400 IN. THK	1		PAOZZ
- 33	4070970	52661	. WASHER-FLAT 0.195 ID X 0.037 IN. THK	1		PAOZZ
- 34	4025712	52661	. CLEVIS-ROD END 0.190-32UNJF-3B X 1.050 IN. LONG	1		PAOZZ
- 35	4018063	52661	. NUT-SLEEVE 0.4375-20UNJF-3B X 0.219 IN. THK	3		PAOZZ
- 36	MS9549-13	96906	. WASHER	3		PAOZZ
- 37	ST2016-016	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG	1		PAOZZ
- 38	ST2439-05	52661	. CLAMP ASSY-LOOP, CUSHION WHEN EXH USE ST1540-05	1		PAOZZ
	ST1540-05	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 39	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 40	4076418	52661	. CONTROL-PUSH-PULL, RCVV FEEDBACK	1		PAOBZ
- 41	4077294	52661	. BRACKET-PUSH-PULL CONTROL	1		PAOZZ
- 42	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
- 43	4081590-01	52661	. BRACKET-LOOP CLAMP, ASSY OF REPLACES 4079071-01	1		PAOZZ
- 44	4023116	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
44 - 45	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 46	4057788	52661	. ROD END-PLAIN BEARING, PUSH-PULL . . . . CONTROL, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 47	4061173	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	1		PAFZZ

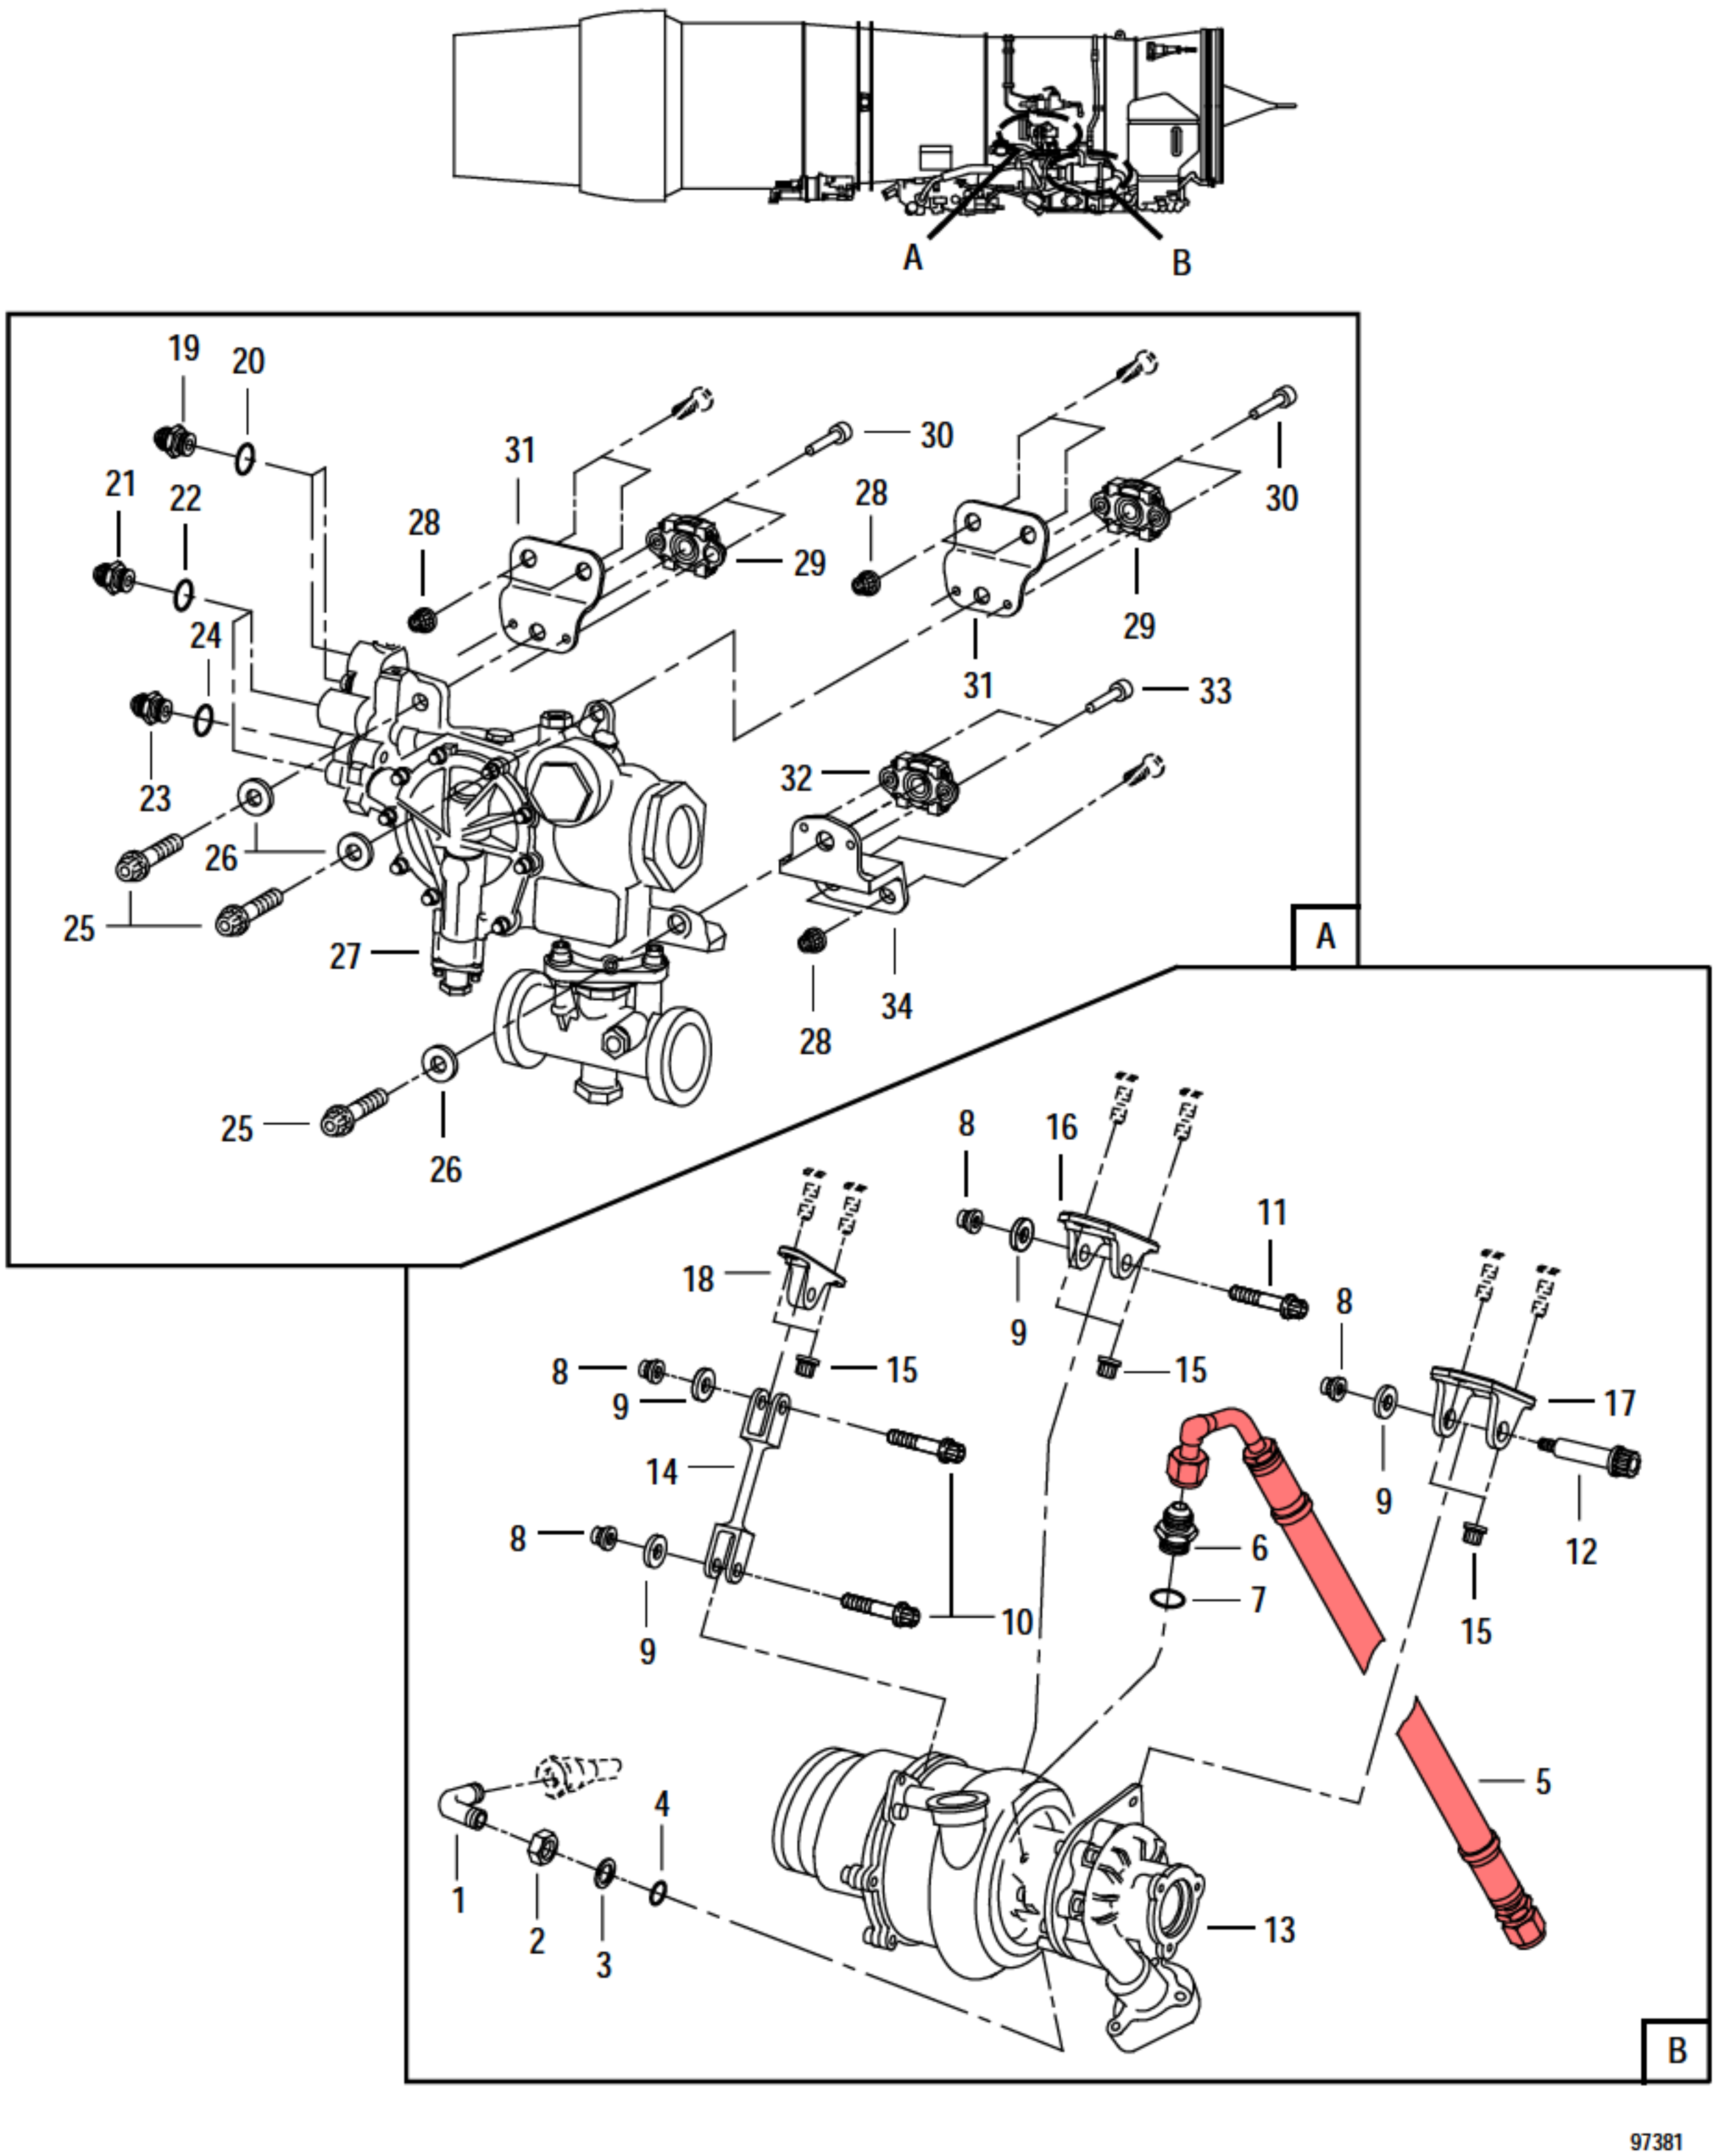


FIGURE 45. AUGMENTOR FUEL PUMP AND FUEL PUMP CONTROLLER

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	45	NO NUMBER		AUGMENTOR FUEL PUMP AND FUEL PUMP	REF		
				CONTROLLER			
				SEE FIG. 38-7 FOR NHA			
	- 1	ST2129-06	52661	. ELBOW-TUBE TO BOSS, 90 DEG	1		PAOZZ
	- 2	MS9100-06	96906	. NUT	1		PAOZZ
	- 3	627998	52661	. RETAINER-PACKING..............................	1		PAOZZ
				0.478 X 0.121 X 0.033 IN. THK			
	- 4	MS9967-112	96906	. PACKING	1		PAOZZ
R	- 5	= 4072120	52661	. HOSE OPTION	1		PAOZZ
				SEE OPTION TABLE			
R		= A9164-1	98441	. HOSE-NONMETALLIC	1		PAOZZ
R				0.313 IN.			
R				P&WA PART NO. 4085049			
	- 6	ST2000-06	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS	1		PAOZZ
				0.562-18UNJF-3A X 0.375 IN. TUBE OD			
	- 7	MS9967-112	96906	. PACKING	1		PAOZZ
	- 8	4023116	52661	. NUT OPTION....................................	4		PAOZZ
				SEE OPTION TABLE			
	- 9	MS9320-10	96906	. WASHER	4		PAOZZ
	- 10	MS9111-11	96906	. BOLT	2		PAOZZ
	- 11	MS9111-13	96906	. BOLT	1		PAOZZ
	- 12	4069549	52661	. BOLT-SHOULDER	1		PAOZZ
				0.250-28UNJF-3A X 1.687 IN. LONG			
	- 13	792840 #	3L184	. PUMP-FUEL, AUGMENTOR	1		PAOLD
				P&WA PART NO. 4071353			
	- 14	4069547	52661	. CLEVIS-LINK, AUGMENTOR PUMP	1		PAOZZ
	- 15	4023116	52661	. NUT OPTION....................................	6		PAOZZ
				SEE OPTION TABLE			
	- 16	4069545	52661	. CLEVIS-LINK, AUGMENTOR PUMP	1		PAOZZ
	- 17	4069546	52661	. CLEVIS-LINK, AUGMENTOR PUMP	1		PAOZZ
	- 18	4069548	52661	. CLEVIS-LINK, AUGMENTOR PUMP	1		PAOZZ
	- 19	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS	2		PAOZZ
				0.437-20UNJF-3A X 0.250 IN. TUBE OD			
	- 20	MS9966-04	96906	. PACKING	2		PAOZZ
	- 21	ST2000-05	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS	2		PAOZZ
				0.500-20UNJF-3A X 0.312 IN. TUBE OD			
	- 22	MS9966-05	96906	. PACKING	2		PAOZZ
	- 23	ST2000-06	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS	1		PAOZZ
				0.562-18UNJF-3A X 0.375 IN. TUBE OD			
	- 24	MS9966-06	96906	. PACKING	1		PAOZZ
	- 25	MS9557-12	96906	. BOLT	3		PAOZZ
	- 26	MS9320-10	96906	. WASHER	3		PAOZZ
	- 27	441441 #	06848	. CONTROLLER-FUEL PUMP, AUGMENTOR	1		PAOLD
				P&WA PART NO. 4070461			
	- 28	4023116	52661	. NUT OPTION....................................	6		PAOZZ
				SEE OPTION TABLE			
		4069558	52661	. BRACKET ASSY-DOUBLE ANGLE	2		PAOBZ
	- 29	4034529	52661	.. NUT OPTION	1		PAFZZ
				SEE OPTION TABLE			
	- 30	AN123620	88044	.. RIVET (AP)	2		PAFZZ
	- 31	4069553	52661	.. BRACKET-DOUBLE ANGLE.......................	1		XA
		4069554	52661	. BRACKET ASSY-DOUBLE ANGLE	1		PAOBZ
	- 32	4034529	52661	.. NUT OPTION	1		PAFZZ
				SEE OPTION TABLE			
	- 33	AN123620	88044	.. RIVET (AP)	2		PAFZZ
	- 34	4069555	52661	.. BRACKET-DOUBLE ANGLE.......................	1		XA

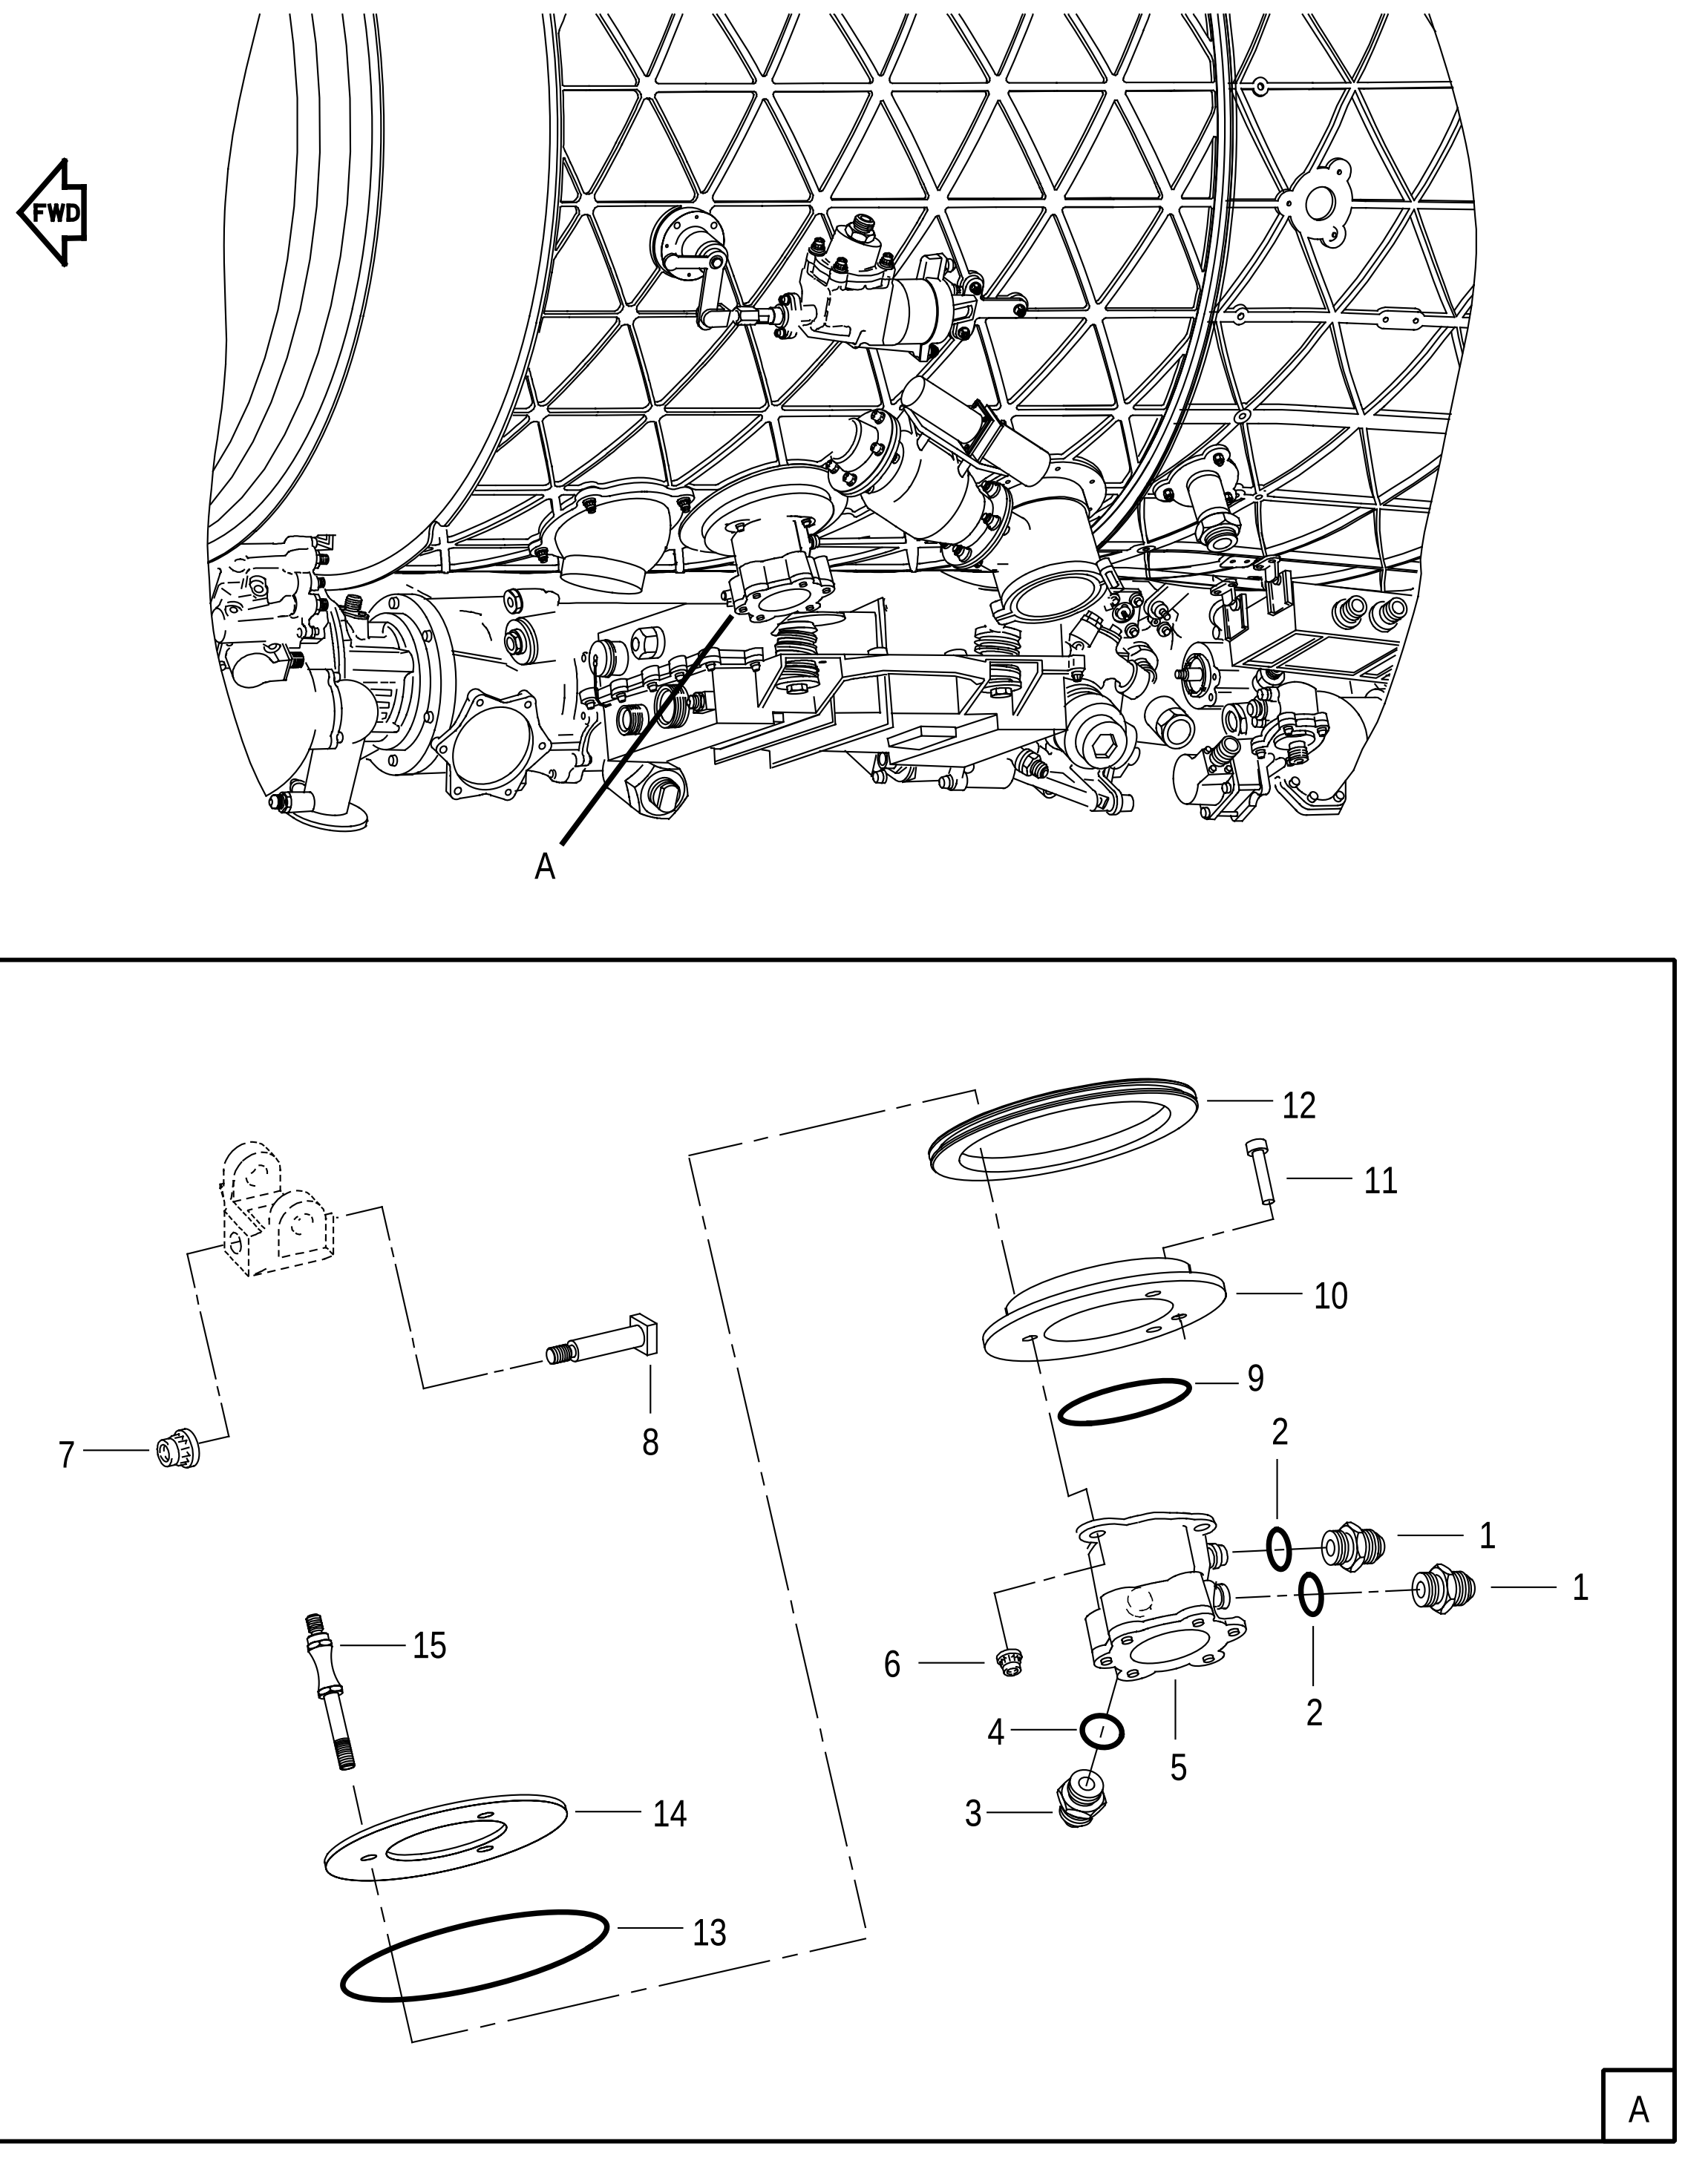


FIGURE 46. LINEAR COMPRESSOR BLEED ACTUATING CYLINDER

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
46	NO NUMBER		LINEAR COMPRESSOR BLEED ACTUATING CYLINDER SEE FIG. 38-8 FOR NHA	REF		
- 1	ST2091-042	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.4375-20UNJF-3A X 0.250 IN. TUBE OD	2		PAOZZ
- 2	MS9966-06	96906	. PACKING	2		PAOZZ
- 3	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.437-20UNJF-3A X 0.250 IN. TUBE OD	1		PAOZZ
- 4	MS9966-04	96906	. PACKING	1		PAOZZ
- 5	441481	06848	. CYLINDER-ACTUATING, LINEAR COMPRESSOR BLEED P&WA PART NO. 4069243	1		PAOLD
- 6	4026550	52661	. NUT OPTION (AP) SEE OPTION TABLE	3		PAOZZ
- 7	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
- 8	4069286	52661	. BOLT-SHOULDER, SQUARE 0.190-32UNJF-3A X 1.212 IN. LONG (AP)	1		PAOZZ
- 9	MS9386-226	96906	. PACKING	1		PAOZZ
- 10	4076730	52661	. RETAINER ASSY-SEAL RING HOLDER PARTIAL BREAKDOWN FOLLOWS	1		PAOZZ
- 11	4076731	52661	.. PIN-STRAIGHT, HEADED, FLAT 0.125 X 0.920 IN. LONG	1		PAOZZ
- 12	4073900	52661	. SEAL RING HOLDER-BLEED VALVE STRAP CYLINDER SUPPORT	1		PAOZZ
- 13	4007133	52661	. SEAL RING-METAL 4.822 OD X 0.1250 IN. THK	1		PAOZZ
- 14	4073902	52661	. PLATE-SEAL RING HOLDER	1		PAOZZ
- 15	4076797	52661	. SUPPORT-BLEED VALVE STRAP CYLINDER	3		PAOZZ



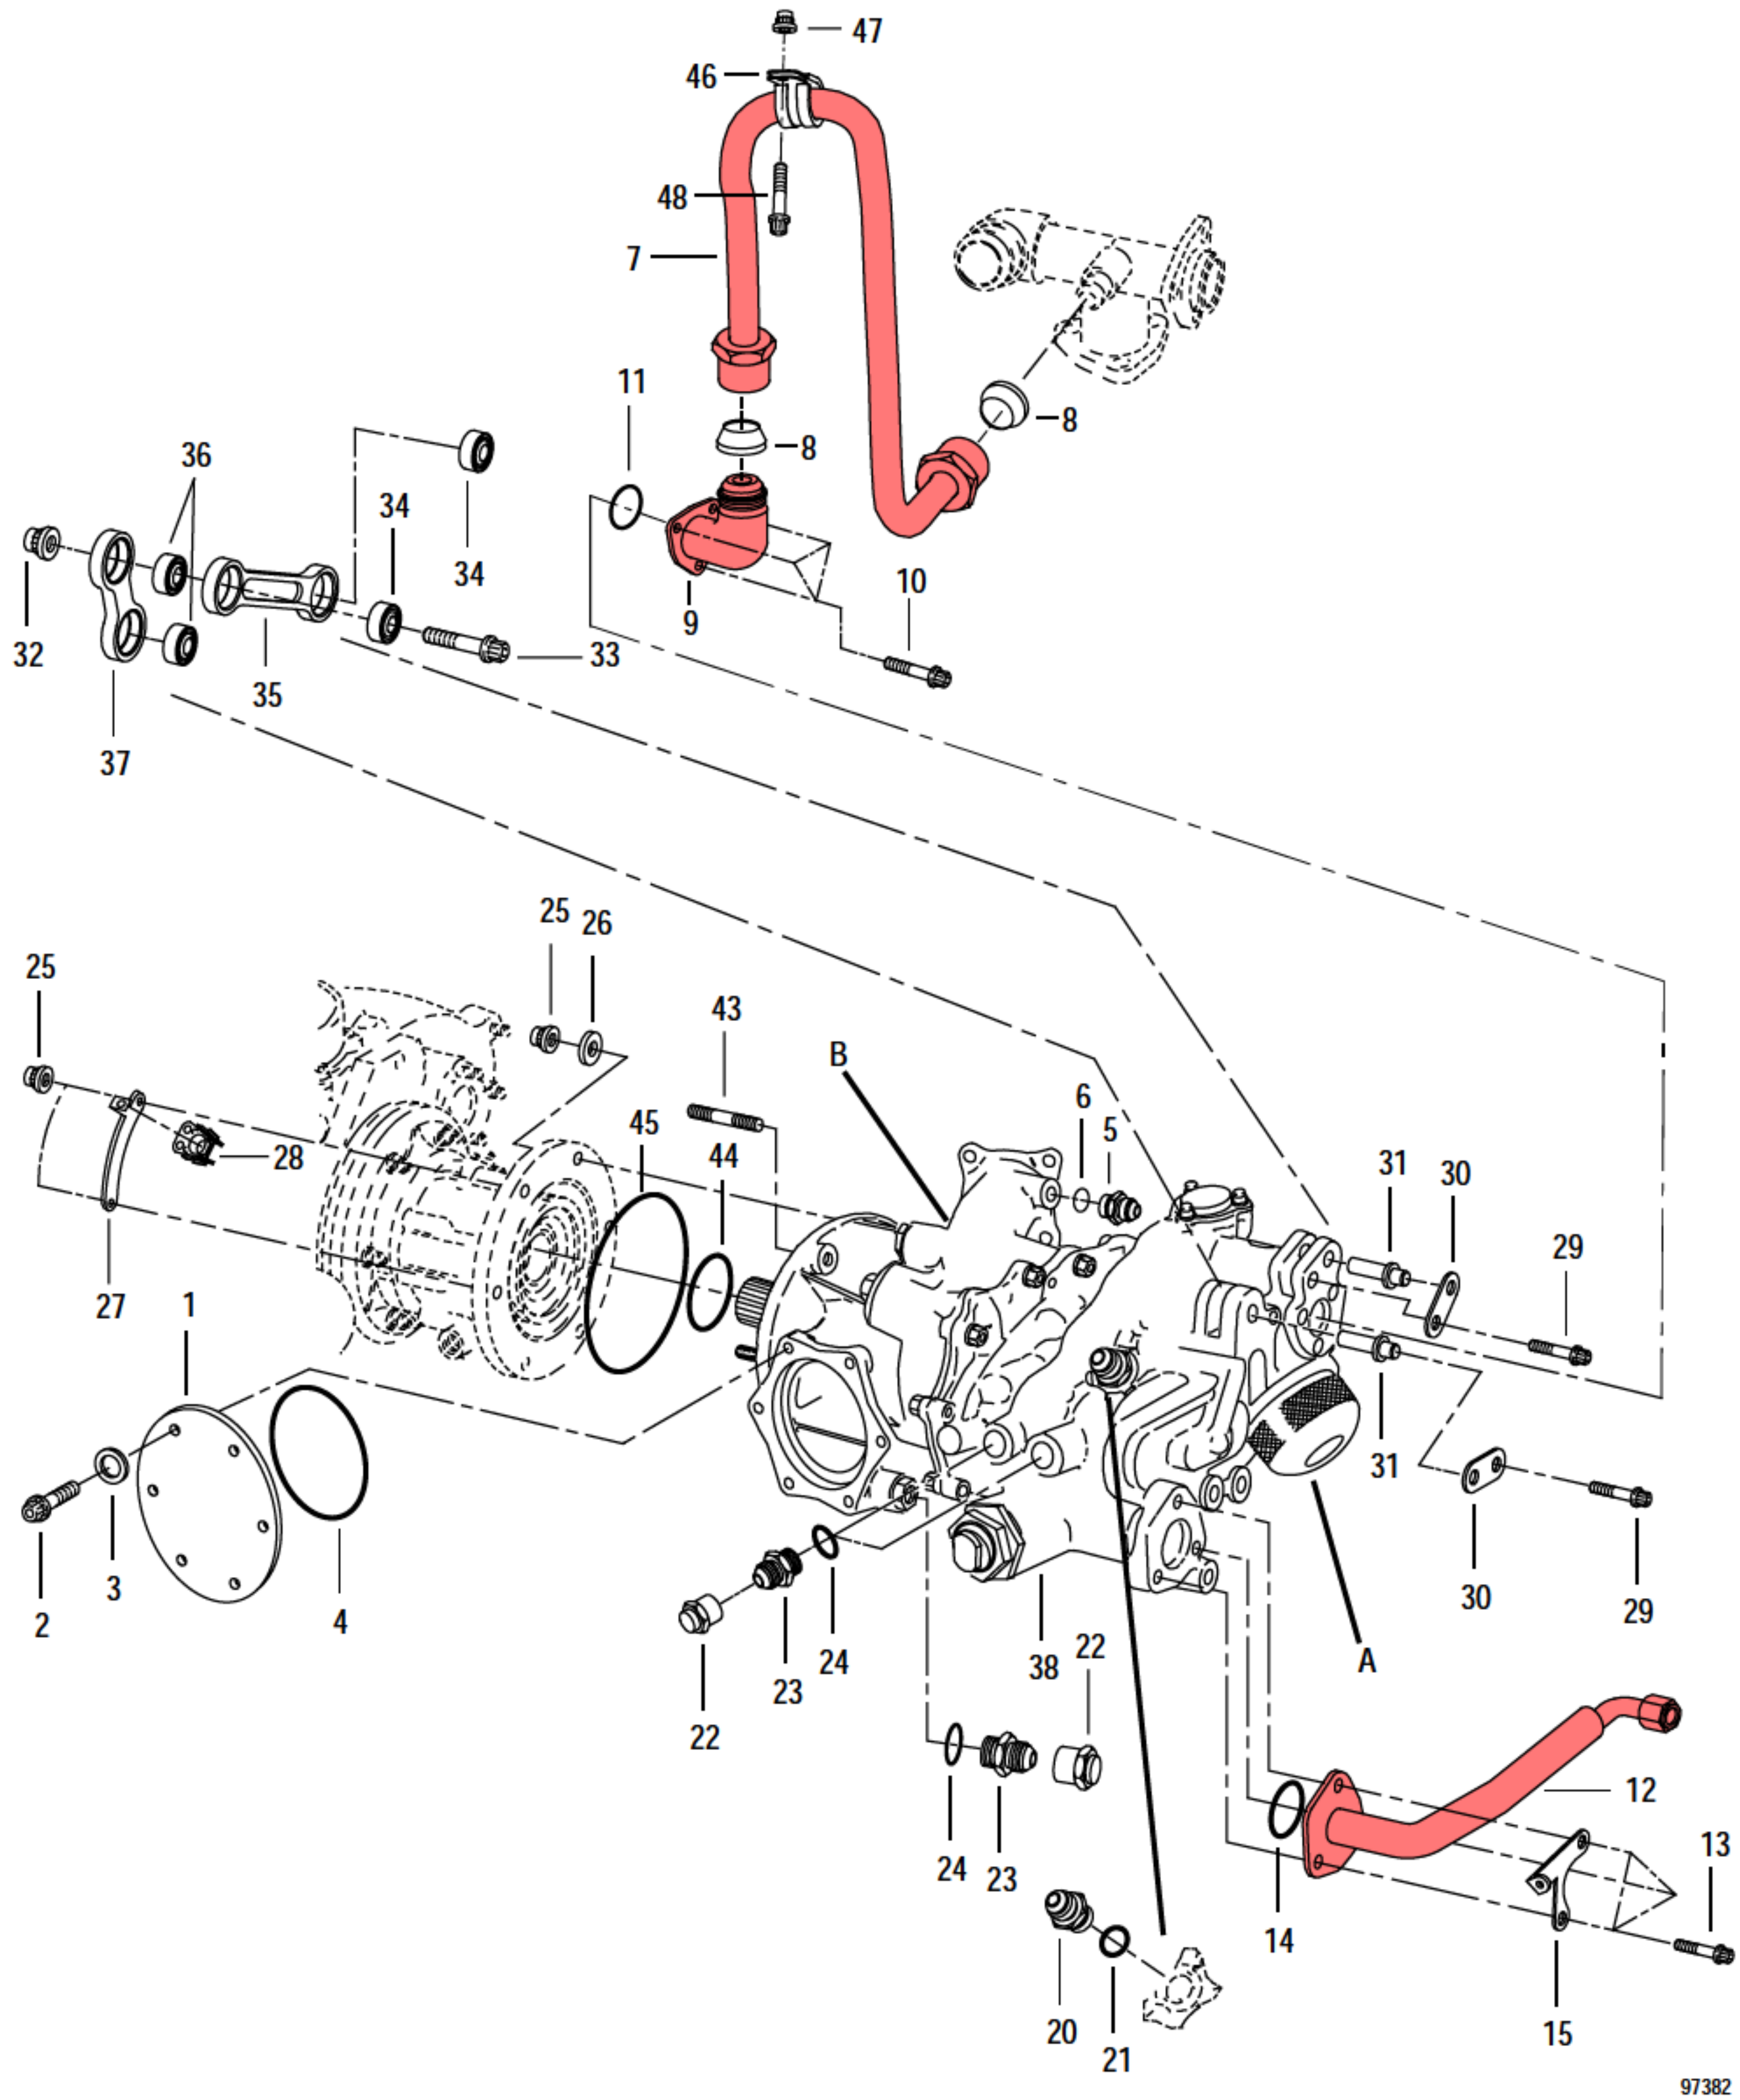


FIGURE 47. MAIN FUEL GEAR PUMP
(SHEET 1 OF 2)

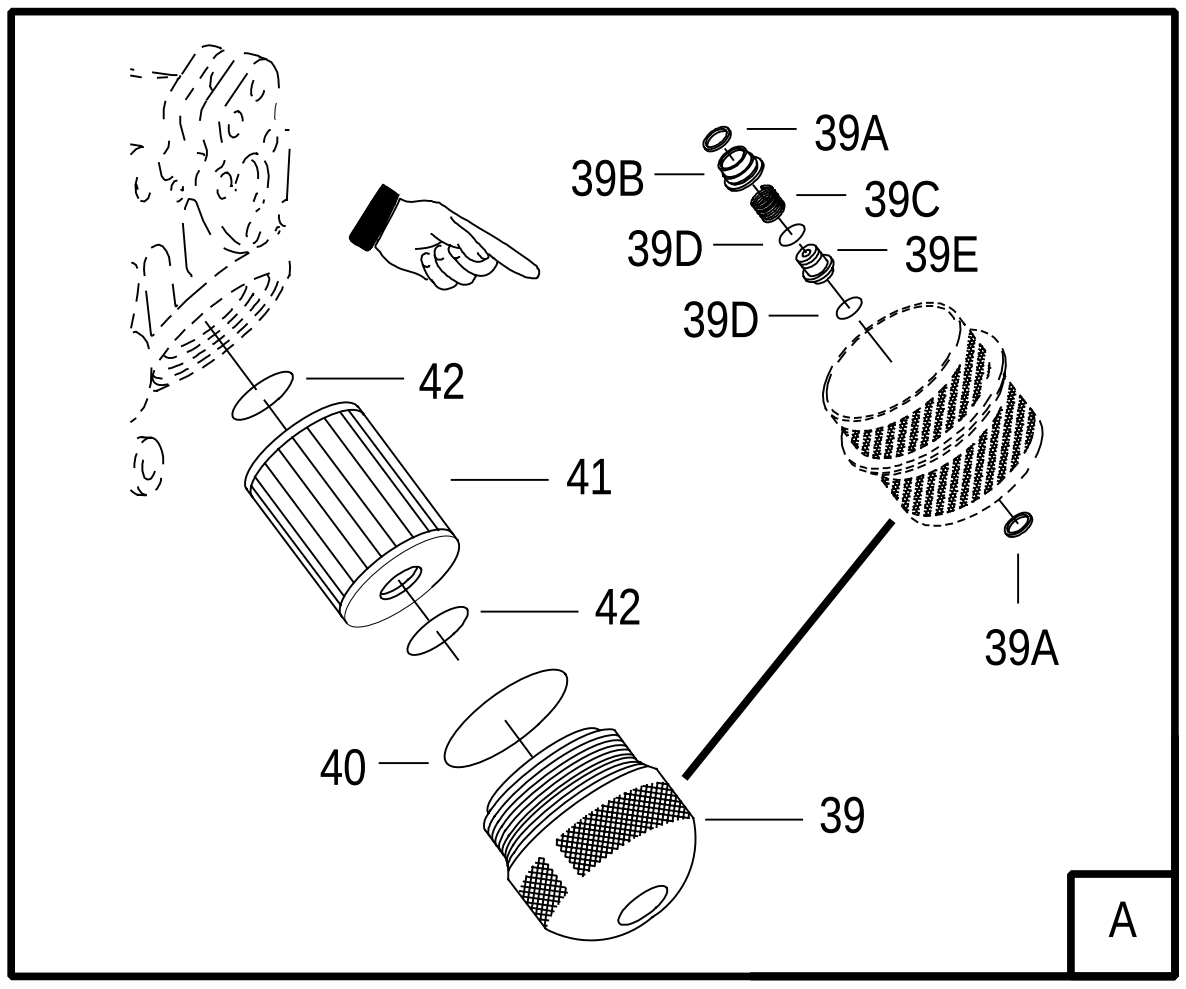

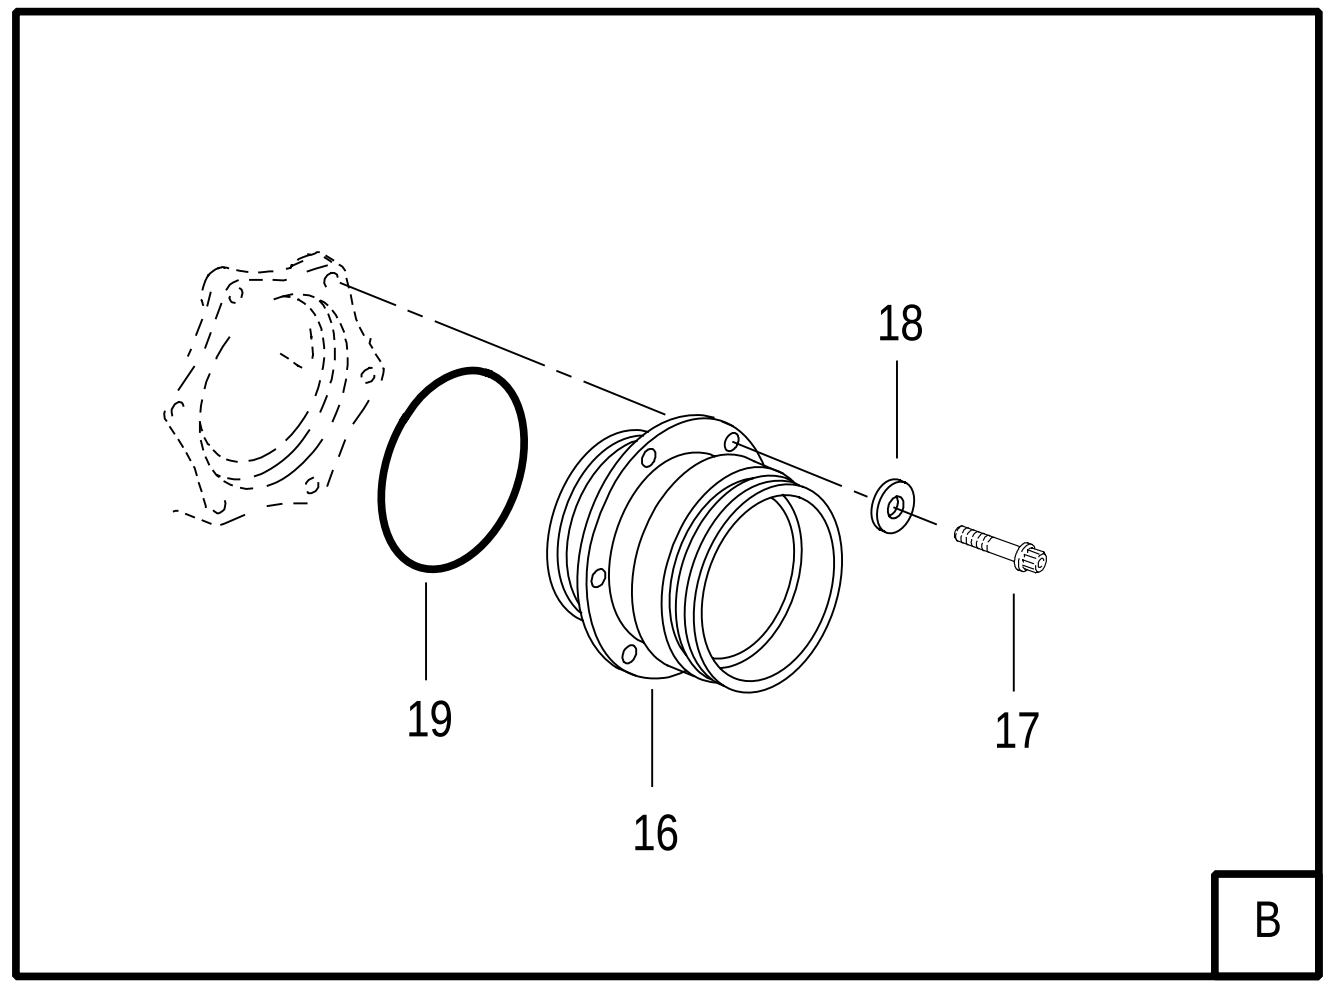

76818

FIGURE 47. MAIN FUEL GEAR PUMP
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
47		NO NUMBER		MAIN FUEL GEAR PUMP .... SEE FIG. 38-9 FOR NHA	REF		
- 1		4034519	52661	. COVER-MAIN FUEL PUMP	1		PAOZZ
- 2		ST1420-10	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.750 IN. LONG (AP)	6		PAOZZ
- 3		ST2159-10	52661	. WASHER-FLAT .... 0.276 X 0.500 IN. DIA X 0.032 IN. THK	6		PAOZZ
- 4		MS9967-235	96906	. PACKING	1		PAOZZ
- 5		ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS .... 0.437-20UNJF-3A X 0.250 IN. TUBE OD	1		PAOZZ
- 6		MS9966-04	96906	. PACKING	1		PAOZZ
- 7		4066687-01	52661	. TUBE-PF1, GAS GENERATOR BYPASS TO MAIN ... FUEL PUMP, ASSY OF	1		PAOBZ
- 8		ST2284-16	52661	. GASKET OPTION................................ SEE OPTION TABLE	2		PAFZZ
- 9		4067518	52661	. ELBOW-TUBE TO BOSS, 90 DEG, 3 HOLE	1		PAOZZ
- 10		ST1420-10	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.750 IN. LONG (AP)	3		PAOZZ
- 11		MS9967-214	96906	. PACKING	1		PAOZZ
- 12	=	4072115	52661	. HOSE OPTION .... SEE OPTION TABLE	1		PAOZZ
	=	4073030	52661	. HOSE OPTION .... SEE OPTION TABLE	1		PAOZZ
R R R	=	A9157-1	98441	. HOSE-NONMETALLIC............................. 0.625 IN. P&WA PART NO. 4085036	1		PAOZZ
- 13		ST1420-10	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.750 IN. LONG (AP)	3		PAOZZ
- 14		MS9967-214	96906	. PACKING	1		PAOZZ
- 15		4076251	52661	. BRACKET-LOOP CLAMP, ASSY OF	1		PAFZZ
- 16		4039184	52661	. COUPLING HALF-QUICK DISCONNECT, RATCHET . LOCK	1		PAOBZ
- 17		ST1420-10	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.750 IN. LONG (AP)	6		PAOZZ
- 18		ST2159-10	52661	. WASHER-FLAT .... 0.276 X 0.500 IN. DIA X 0.032 IN. THK (AP)	6		PAOZZ
- 19		MS9967-235	96906	. PACKING	1		PAOZZ
- 20		ST2000-08	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS .... 0.750-16UNJF-3A X 0.500 IN. TUBE OD	1		PAOZZ
- 21		MS9966-08	96906	. PACKING	1		PAOZZ
- 22		MS9314-04	96906	. CAP ASSY	3		PAOZZ
- 23		ST2091-042	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS .... 0.4375-20UNJF-3A X 0.250 IN. TUBE OD	3		PAOZZ
- 24		MS9966-06	96906	. PACKING	3		PAOZZ
- 25		73916-624	56878	. NUT-SELF-LOCKING, DOUBLE HEX .... 0.375-24UNJF-3B X 0.395 IN. THK P&WA PART NO. ST2113-12	6		PAOZZ

FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
47 - 26		539418		52661	. WASHER-FLAT 0.406 ID X 0.625 OD X 0.078 IN. THK	4		PAOZZ
- 27		4074471		52661	. BRACKET-LOOP CLAMP, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOBZ
- 28	=	4046367		52661	.. NUT OPTION SEE OPTION TABLE	1		PAFZZ
	=	ST5030-09		52661	.. NUT OPTION SEE OPTION TABLE	1		PAFZZ
- 29		ST1420-10		52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.750 IN. LONG	2		PAOZZ
- 30		4066763		52661	. RETAINER-GEAR PUMP LINKAGE	2		PAFZZ
- 31		4066762		52661	. PIN-SHOULDER 0.300 DIA X 2.200 IN. LONG	2		PAFZZ
- 32		4023116		52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
- 33		4062671		52661	. BOLT-SHOULDER, DOUBLE HEX 0.250-28UNJF-3A X 1.750 IN. LONG	1		PAOZZ
		4062666		52661	. LINK-MAIN GEAR FUEL PUMP SUPPORT, ASSY OF	1		PAOZZ
- 34		4074224		52661	.. BEARING OPTION SEE OPTION TABLE	2		PAFZZ
- 35		4062667		52661	.. LINK-MAIN GEAR FUEL PUMP SUPPORT	1		XA
		4062668		52661	. LINK-ASSY OF, MAIN GEAR FUEL PUMP SUPPORT	1		PAOBZ
- 36		4074224		52661	.. BEARING OPTION SEE OPTION TABLE	2		PAFZZ
- 37		4062669		52661	.. LINK-MAIN GEAR FUEL PUMP SUPPORT	1		XA
- 38		708500	#	59875	. PUMP-GEAR, MAIN FUEL P&WA PART NO. 4065756 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 39		217408-1		59875	.. COVER-FUEL FILTER PARTIAL BREAKDOWN FOLLOWS	1		PAOOO
- 39A		93149-21		59875	... RING-RETAINER	2		PAOZZ
- 39B		217139		59875	... HOUSING-DIFFERENTIAL, PRESSURE	1		PAOZZ
- 39C		217325		59875	... SPRING-COMPRESSION, FILTER PRELOAD	1		PAOZZ
- 39D		M25988/1-117		81349	... PACKING	2		PAOZZ
- 39E		217137		59875	... INDICATOR-DIFFERENTIAL PRESSURE	1		PAOZZ
- 40	=	92446-42		59875	.. PACKING	1		PAOZZ
	=	M25988/1-242		81349	.. PACKING	1		PAOZZ
R - 41		217380		59875	.. FILTER ELEMENT-FUEL	1		PAOZZ
- 42	=	92445-32		59875	.. PACKING	2		PAOZZ
	=	M25988/1-132		81349	.. PACKING	2		PAOZZ
- 43	%	217117-1		59875	. STUD-PUMP MOUNTING 0.3750-16UNJF	6		PAOZZ
		217117-2		59875	. STUD-PUMP MOUNTING (OVERSIZE)	AR		PAOZZ
		217117-3		59875	. STUD-PUMP MOUNTING (OVERSIZE)	AR		PAOZZ
		217117-4		59875	. STUD-PUMP MOUNTING (OVERSIZE)	AR		PAOZZ
		217117-5		59875	. STUD-PUMP MOUNTING (OVERSIZE)	AR		PAOZZ
- 44		ST1000-215		52661	. PACKING-PREFORMED 1.046 ID X 0.139 IN. DIA ROUND	1		PAOZZ
- 45		ST1000-241		52661	. PACKING-PREFORMED 3.859 ID X 0.139 IN. DIA ROUND	1		PAOZZ
- 46		ST1540-16		52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
- 47		4023115		52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
- 48		ST2015-020		52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	1		PAOZZ

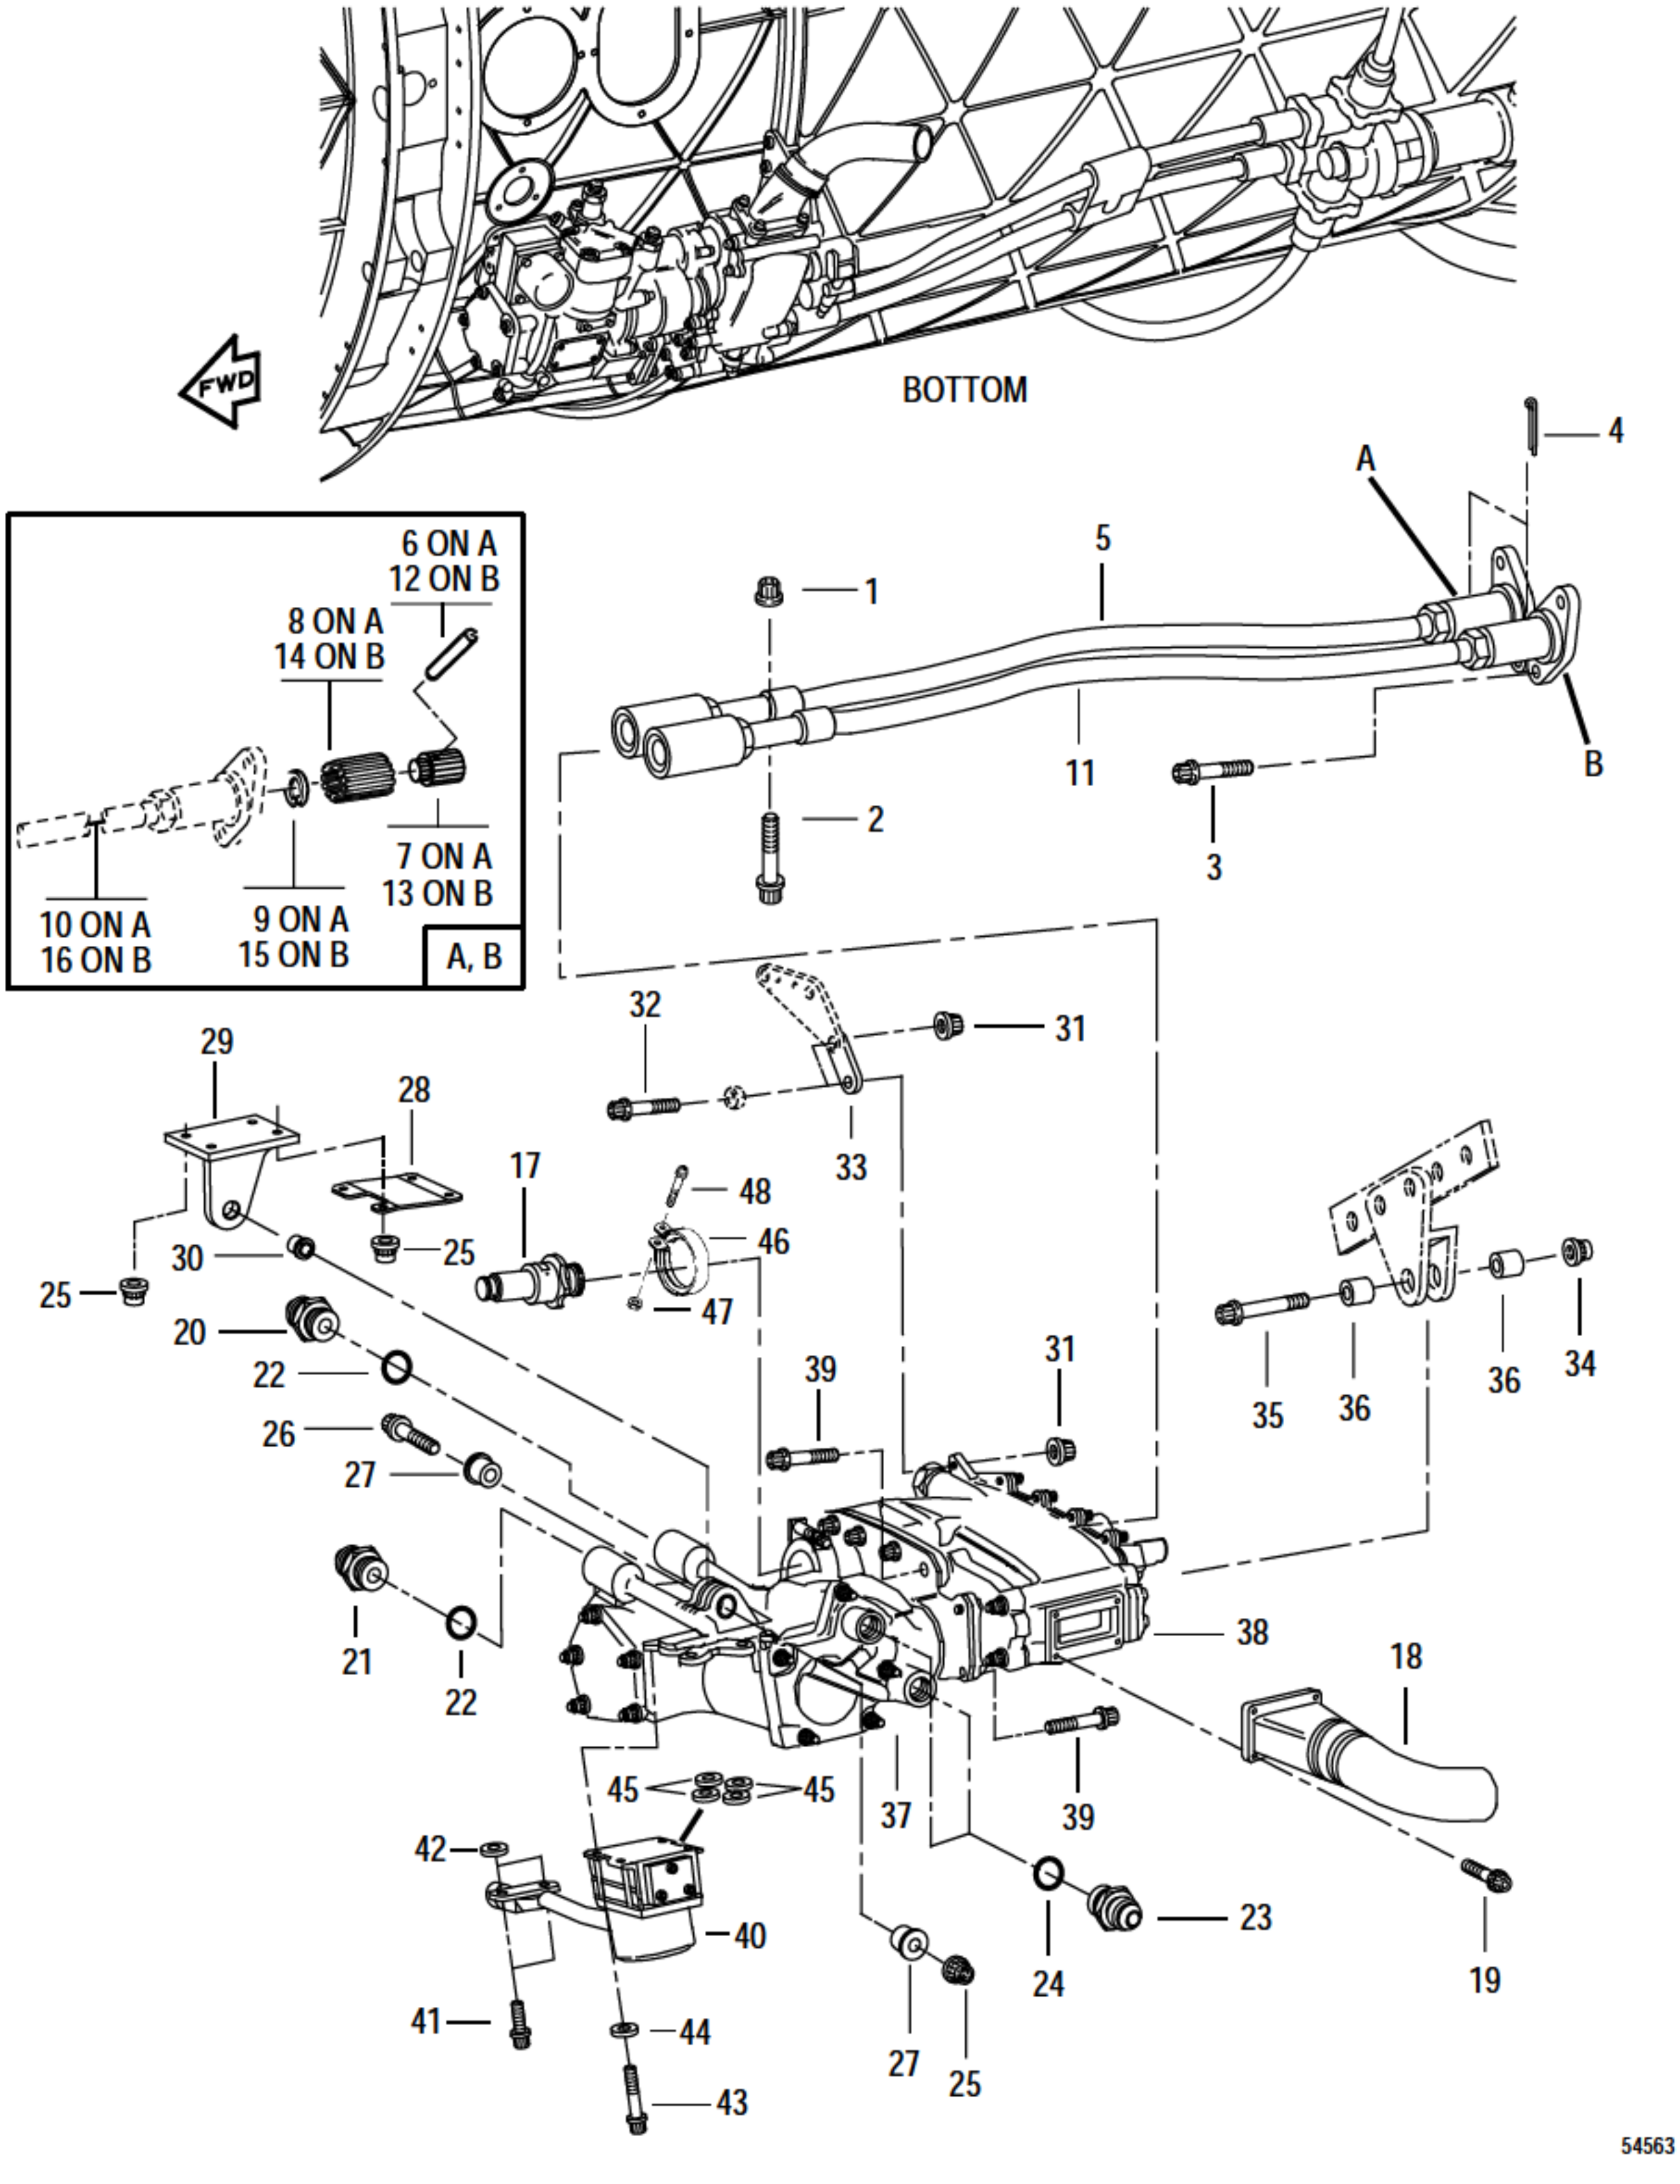


FIGURE 48. CONVERGENT EXHAUST NOZZLE CONTROL, VENT TUBE, AND ACTUATOR SHAFT

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
48	NO NUMBER		CONVERGENT EXHAUST NOZZLE CONTROL, VENT TUBE, AND ACTUATOR SHAFT SEE FIG. 38-10 FOR NHA	REF		
- 1	4023115	52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
- 2	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.625 IN. LONG	1		PAOZZ
- 3	4012006	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.164-32UNJF-3A X 0.625 IN. LONG	4		PAOZZ
- 4	MS9245-28	96906	. PIN	2		PAOZZ
- 5	441451	99877	. SHAFT-FLEXIBLE, PRIMARY ACTUATOR, CONVERGENT NOZZLE, RIGHT P&WA PART NO. 4059848 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
	2676714	99877	.. SHAFT ASSY-PRIMARY ACTUATOR, CONVERGENT NOZZLE	1		PAOOO
- 6	909281-K35	99877	... PIN-SPRING	1		PAOZZ
- 7	2646526	99877	... DRIVER	1		PAOZZ
- 8	2649820	99877	... COUPLING-SHAFT, RIGID	1		PAOZZ
- 9	2646556	99877	... RING-RETAINER	1		PAOZZ
- 10	2673931	99877	... CABLE ASSY-MAIN DRIVE	1		XA
- 11	441452	99877	. SHAFT-FLEXIBLE, PRIMARY ACTUATOR, CONVERGENT NOZZLE, LEFT P&WA PART NO. 4059849 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
	2676714	99877	.. SHAFT ASSY-PRIMARY ACTUATOR, CONVERGENT NOZZLE	1		PAOOO
- 12	909281-K35	99877	... PIN-SPRING	1		PAOZZ
- 13	2646526	99877	... DRIVER	1		PAOZZ
- 14	2649820	99877	... COUPLING-SHAFT, RIGID	1		PAOZZ
- 15	2646556	99877	... RING-RETAINER	1		PAOZZ
- 16	2673931	99877	... CABLE ASSY-MAIN DRIVE	1		XA
- 17	18-1937 #	1P767	. TRANSMITTER-POSITION, NOZZLE P&WA PART NO. 4057374	1		PAOLD
- 18	4053893	52661	. TUBE-AIR VENT, CONVERGENT EXHAUST NOZZLE CONTROL, ASSY OF	1		PAOZZ
- 19	ST2151-012	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX 0.190-32UNJF-3A X 0.375 IN. LONG (AP)	4		PAOZZ
- 20	ST2091-042	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.4375-20UNJF-3A X 0.250 IN. TUBE OD	1		PAOZZ
- 21	ST2000-06	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.562-18UNJF-3A X 0.375 IN. TUBE OD	1		PAOZZ
- 22	MS9966-06	96906	. PACKING	2		PAOZZ
- 23	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.437-20UNJF-3A X 0.250 IN. TUBE OD	2		PAOZZ
- 24	MS9966-04	96906	. PACKING	2		PAOZZ
- 25	4023115	52661	. NUT OPTION SEE OPTION TABLE	5		PAOZZ
- 26	4069129	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 1.750 IN. LONG	1		PAOZZ
- 27	4071777	52661	. BUSHING-SLEEVE, FLANGED 0.1905 ID X 0.3725 OD X 0.504 IN. LONG	2		PAOZZ
- 28	4075930	52661	. BRACKET-LOOP CLAMP	1		PAFZZ
- 29	4071778	52661	. BRACKET-CONVERGENT EXHAUST NOZZLE CONTROL, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 30	4070899	52661	.. BEARING-PLAIN, SELF-ALIGNING, FLANGED 0.190 X 0.5825	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	48 - 31	4023115	52661	. NUT OPTION	2		PAOZZ
				SEE OPTION TABLE			
	- 32	ST2015-028	52661	. BOLT-MACHINE, DOUBLE HEX	2		PAOZZ
				0.190-32UNJF-3A X 0.825 IN. LONG			
	- 33	4077358	52661	. LINK-CONVERGENT EXHAUST NOZZLE CONTROL .	1		PAOZZ
	- 34	4023115	52661	. NUT OPTION	1		PAOZZ
				SEE OPTION TABLE			
	- 35	4069129	52661	. BOLT-MACHINE, DOUBLE HEX	1		PAOZZ
				0.190-32UNJF-3A X 1.750 IN. LONG			
	- 36	4071776	52661	. SPACER-SLEEVE	2		PAOZZ
				0.1925 ID X 0.360 OD X 0.570 IN. LONG			
R	- 37	441612 #	99877	. CONTROL-EXHAUST NOZZLE, CONVERGENT	1	TW	PAODD
				P&WA PART NO. 4076322			
R		441944 #	99877	. CONTROL-EXHAUST NOZZLE, CONVERGENT	1	TX	PAODD
R				P&WA PART NO. 4083219			
R				PARTIAL BREAKDOWN FOLLOWS			
R	- 38	2678089	99877	.. DRIVE ASSY-PNEUMATIC, CENC	1		PADLD
R				USE ONLY ON 441612			
R		2684928	99877	.. DRIVE ASSY-PNEUMATIC, CENC	1		PAFLD
R				USE ONLY ON 441944			
	- 39	953528-481	99877	.. SCREW-MACHINE, 12 POINT (AP)	12		PAFZZ
	- 40	2718129	99877	.. SERVOVALVE ASSY-ELECTRO HYDRAULIC, ...	1		KF
				CENC			
				ALSO A DETAIL OF KIT P/N 351015A			
	- 41	953527-121	99877	.. SCREW-MACHINE, 12 POINT (AP)	2		PAOZZ
				ALSO A DETAIL OF KIT P/N 351015A			
	- 42	% 2642752	99877	.. SHIM	2		PAOZZ
				0.008 IN. THK (AP)			
				ALSO A DETAIL OF KIT P/N 351015A			
		2642753	99877	.. SHIM	2		PAOZZ
				0.010 IN. THK (AP)			
		2642754	99877	.. SHIM	2		PAOZZ
				0.012 IN. THK (AP)			
	- 43	953527-121	99877	.. SCREW-MACHINE, 12 POINT (AP)	4		PAOZZ
				ALSO A DETAIL OF KIT P/N 351015A			
	- 44	P-15108	99877	.. WASHER (AP)	4		PAOZZ
				ALSO A DETAIL OF KIT P/N 351015A			
	- 45	2666850-11	99877	.. PACKING-PREFORMED	4		PAOZZ
				ALSO A DETAIL OF KIT P/N 351015A			
	- 46	2651925	99877	.. RETAINER-EXHAUST NOZZLE POSITION	1		PAOZZ
				TRANSMITTER			
	- 47	339S19	99877	.. NUT-PLAIN, HEX (AP)	1		PAOZZ
	- 48	953528-494	99877	.. SCREW-MACHINE (AP)	1		PAOZZ
R	- 49	DELETED					
	- 50	< 351015A	99877	. KIT-MODULE, SERVOVALVE ASSY, ...	1		PAOLD
				ELECTROHYDRAULIC, CENC			
				SEE FIG. 48B FOR DETAIL PARTS			

All data on pages 2-168.1 through 2-168.3, including Figure 48A, deleted.

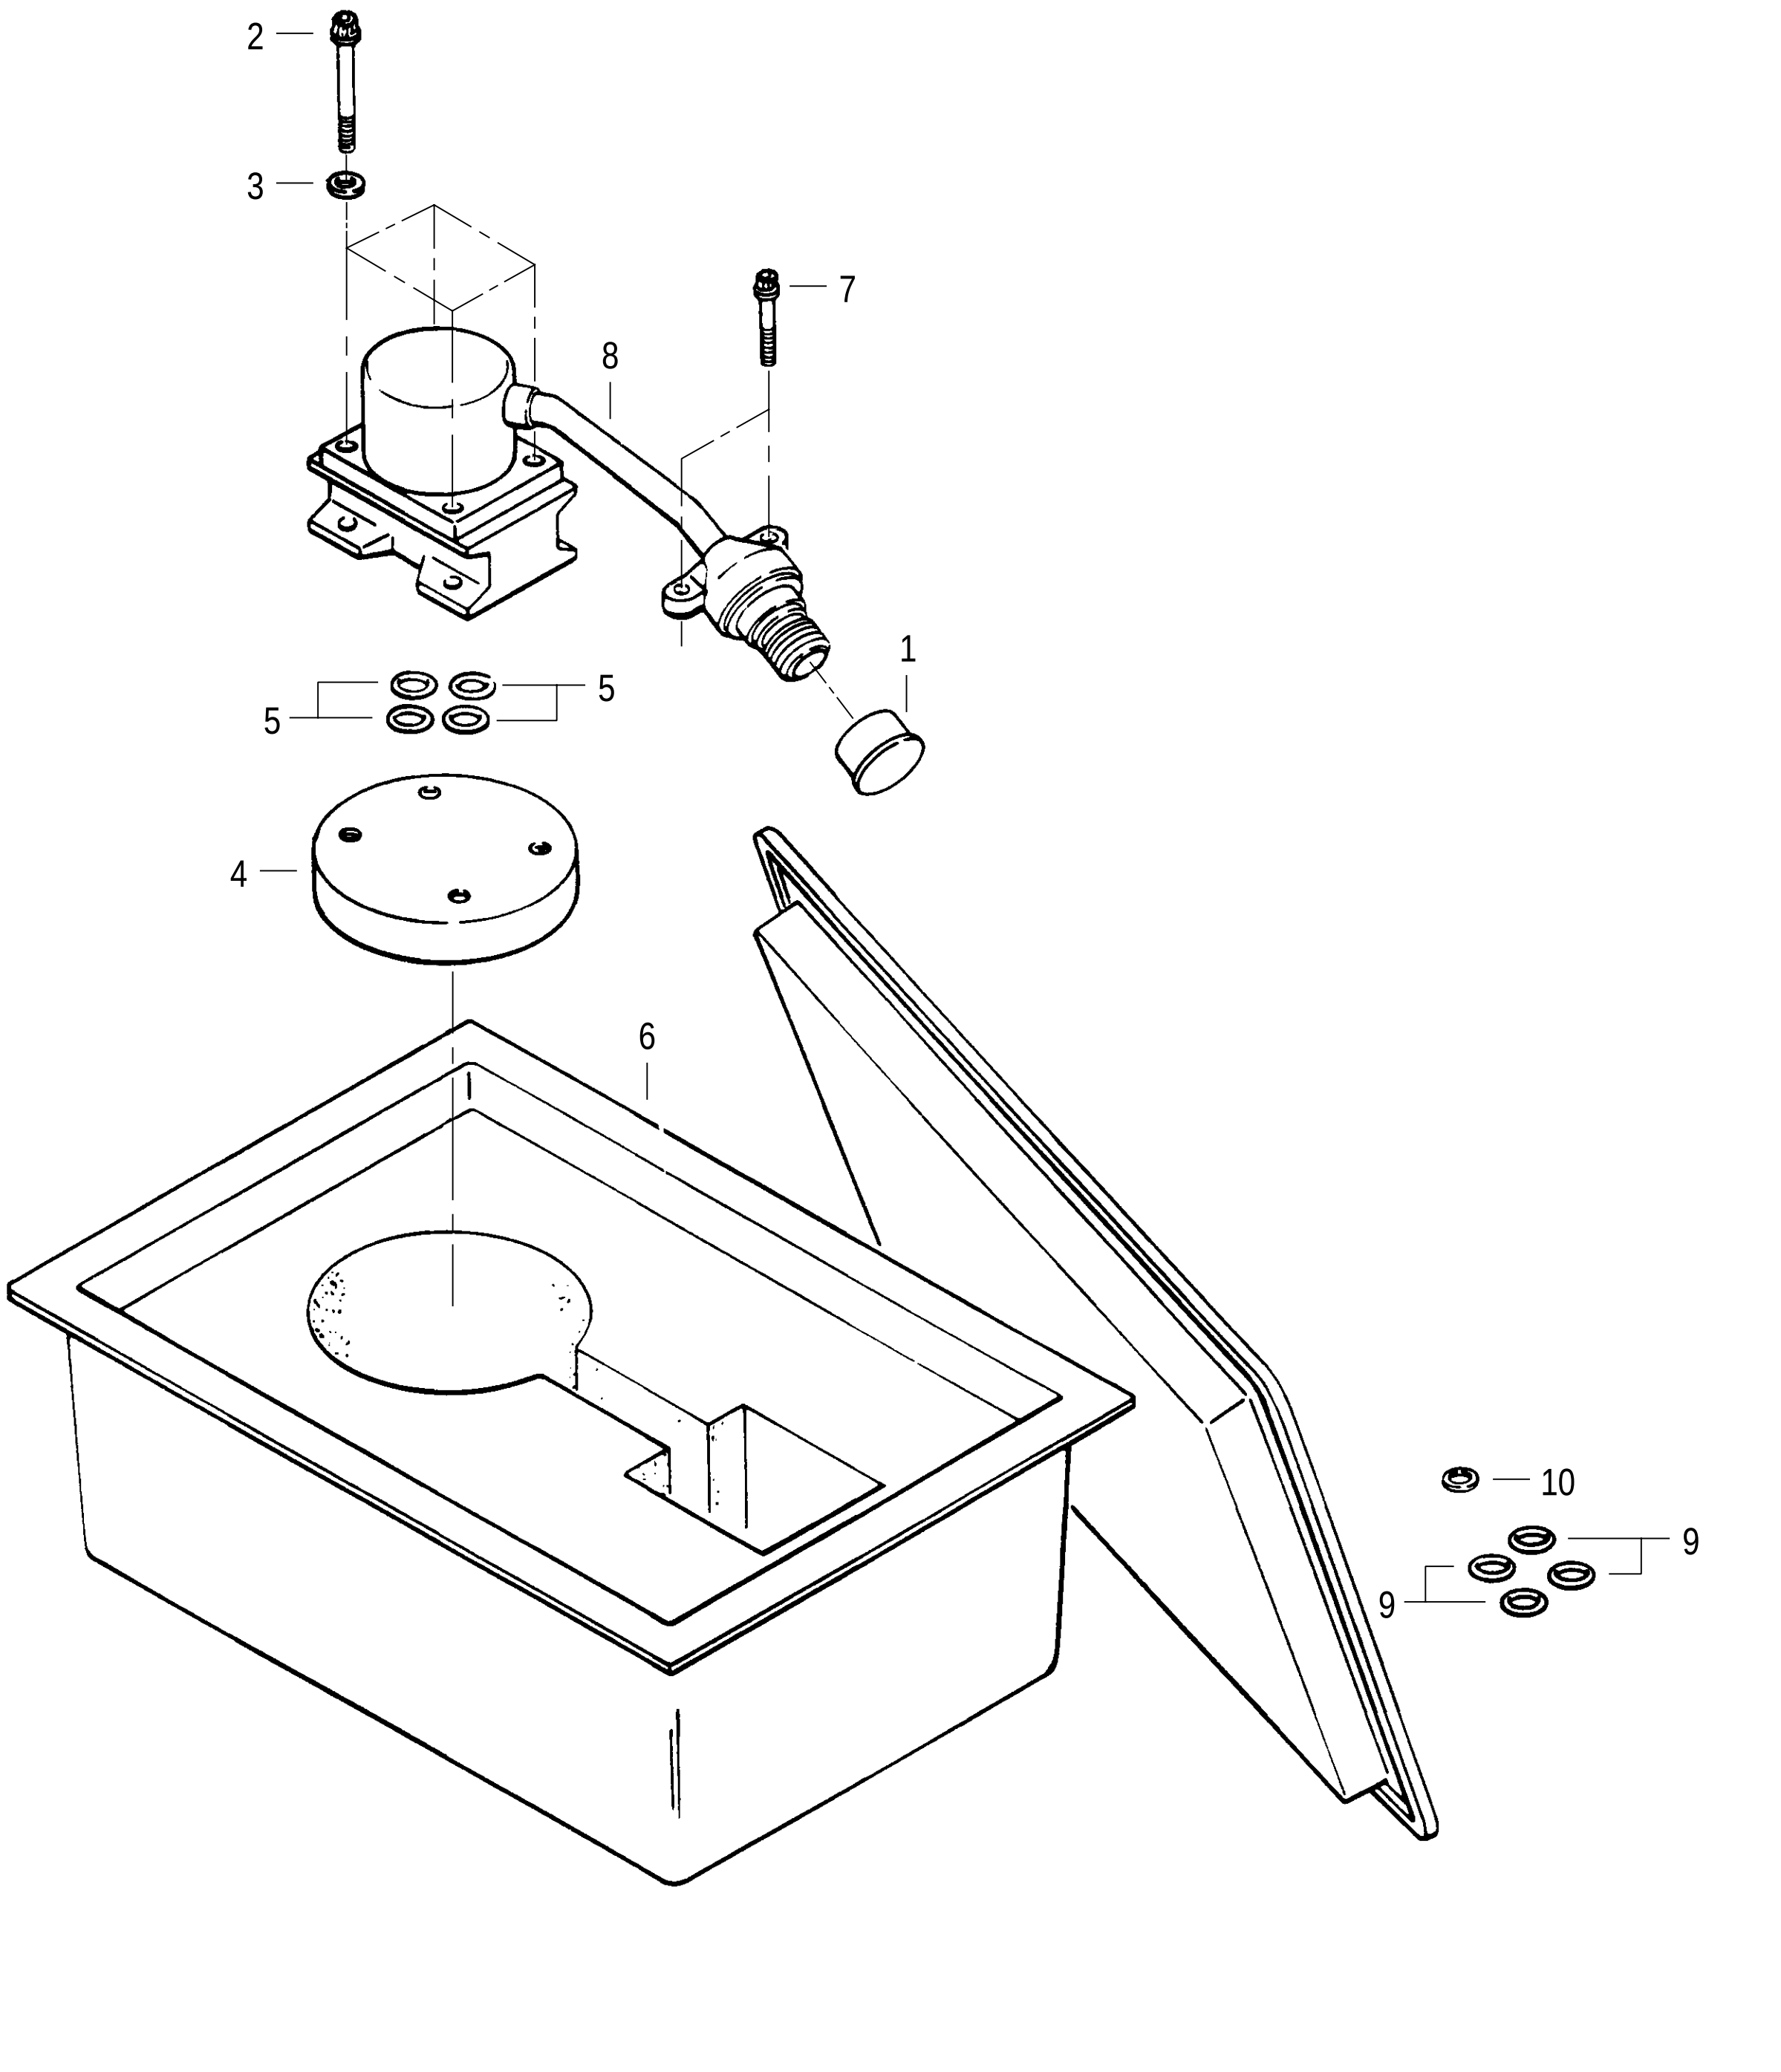


FIGURE 48B. CONVERGENT EXHAUST NOZZLE CONTROL ELECTROHYDRAULIC SERVOVALVE ASSY MODULE KIT

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
48B	351015A	99877	KIT-MODULE, SERVOVALVE ASSY, ELECTROHYDRAULIC, CENC SEE FIG. 48-50 FOR NHA	1		PAOLD
	351027A	99877	. KIT-CLOSURE, ELECTROHYDRAULIC SERVOVALVE MODULE, CENC	1		PAOZZ
- 1	175682	99877	.. CAP-PROTECTIVE	1		PAOZZ
- 2	953527-500	99877	.. SCREW-MACHINE, 12 POINT	4		PAOZZ
- 3	P-15108	99877	.. WASHER	4		PAOZZ
- 4	2672298	99877	.. COVER-PROTECTIVE, SERVOVALVE	1		
- 5	2666850-11	99877	.. PACKING-PREFORMED	4		PAOZZ
- 6	2672301	99877	.. CONTAINER ASSY-SERVOVALVE	1		PAOZZ
- 7	953527-121	99877	. SCREW-MACHINE, 12 POINT	2		PAOZZ
- 8	2718129	99877	. SERVOVALVE ASSY-ELECTRO HYDRAULIC, CENC	1		KF
- 9	2666850-11	99877	. PACKING-PREFORMED	4		PAOZZ
- 10	% 2642752	99877	. SHIM 0.008 IN. THK	2		PAOZZ
	2642753	99877	. SHIM 0.010 IN. THK	2		PAOZZ
	2642754	99877	. SHIM 0.012 IN. THK	2		PAOZZ

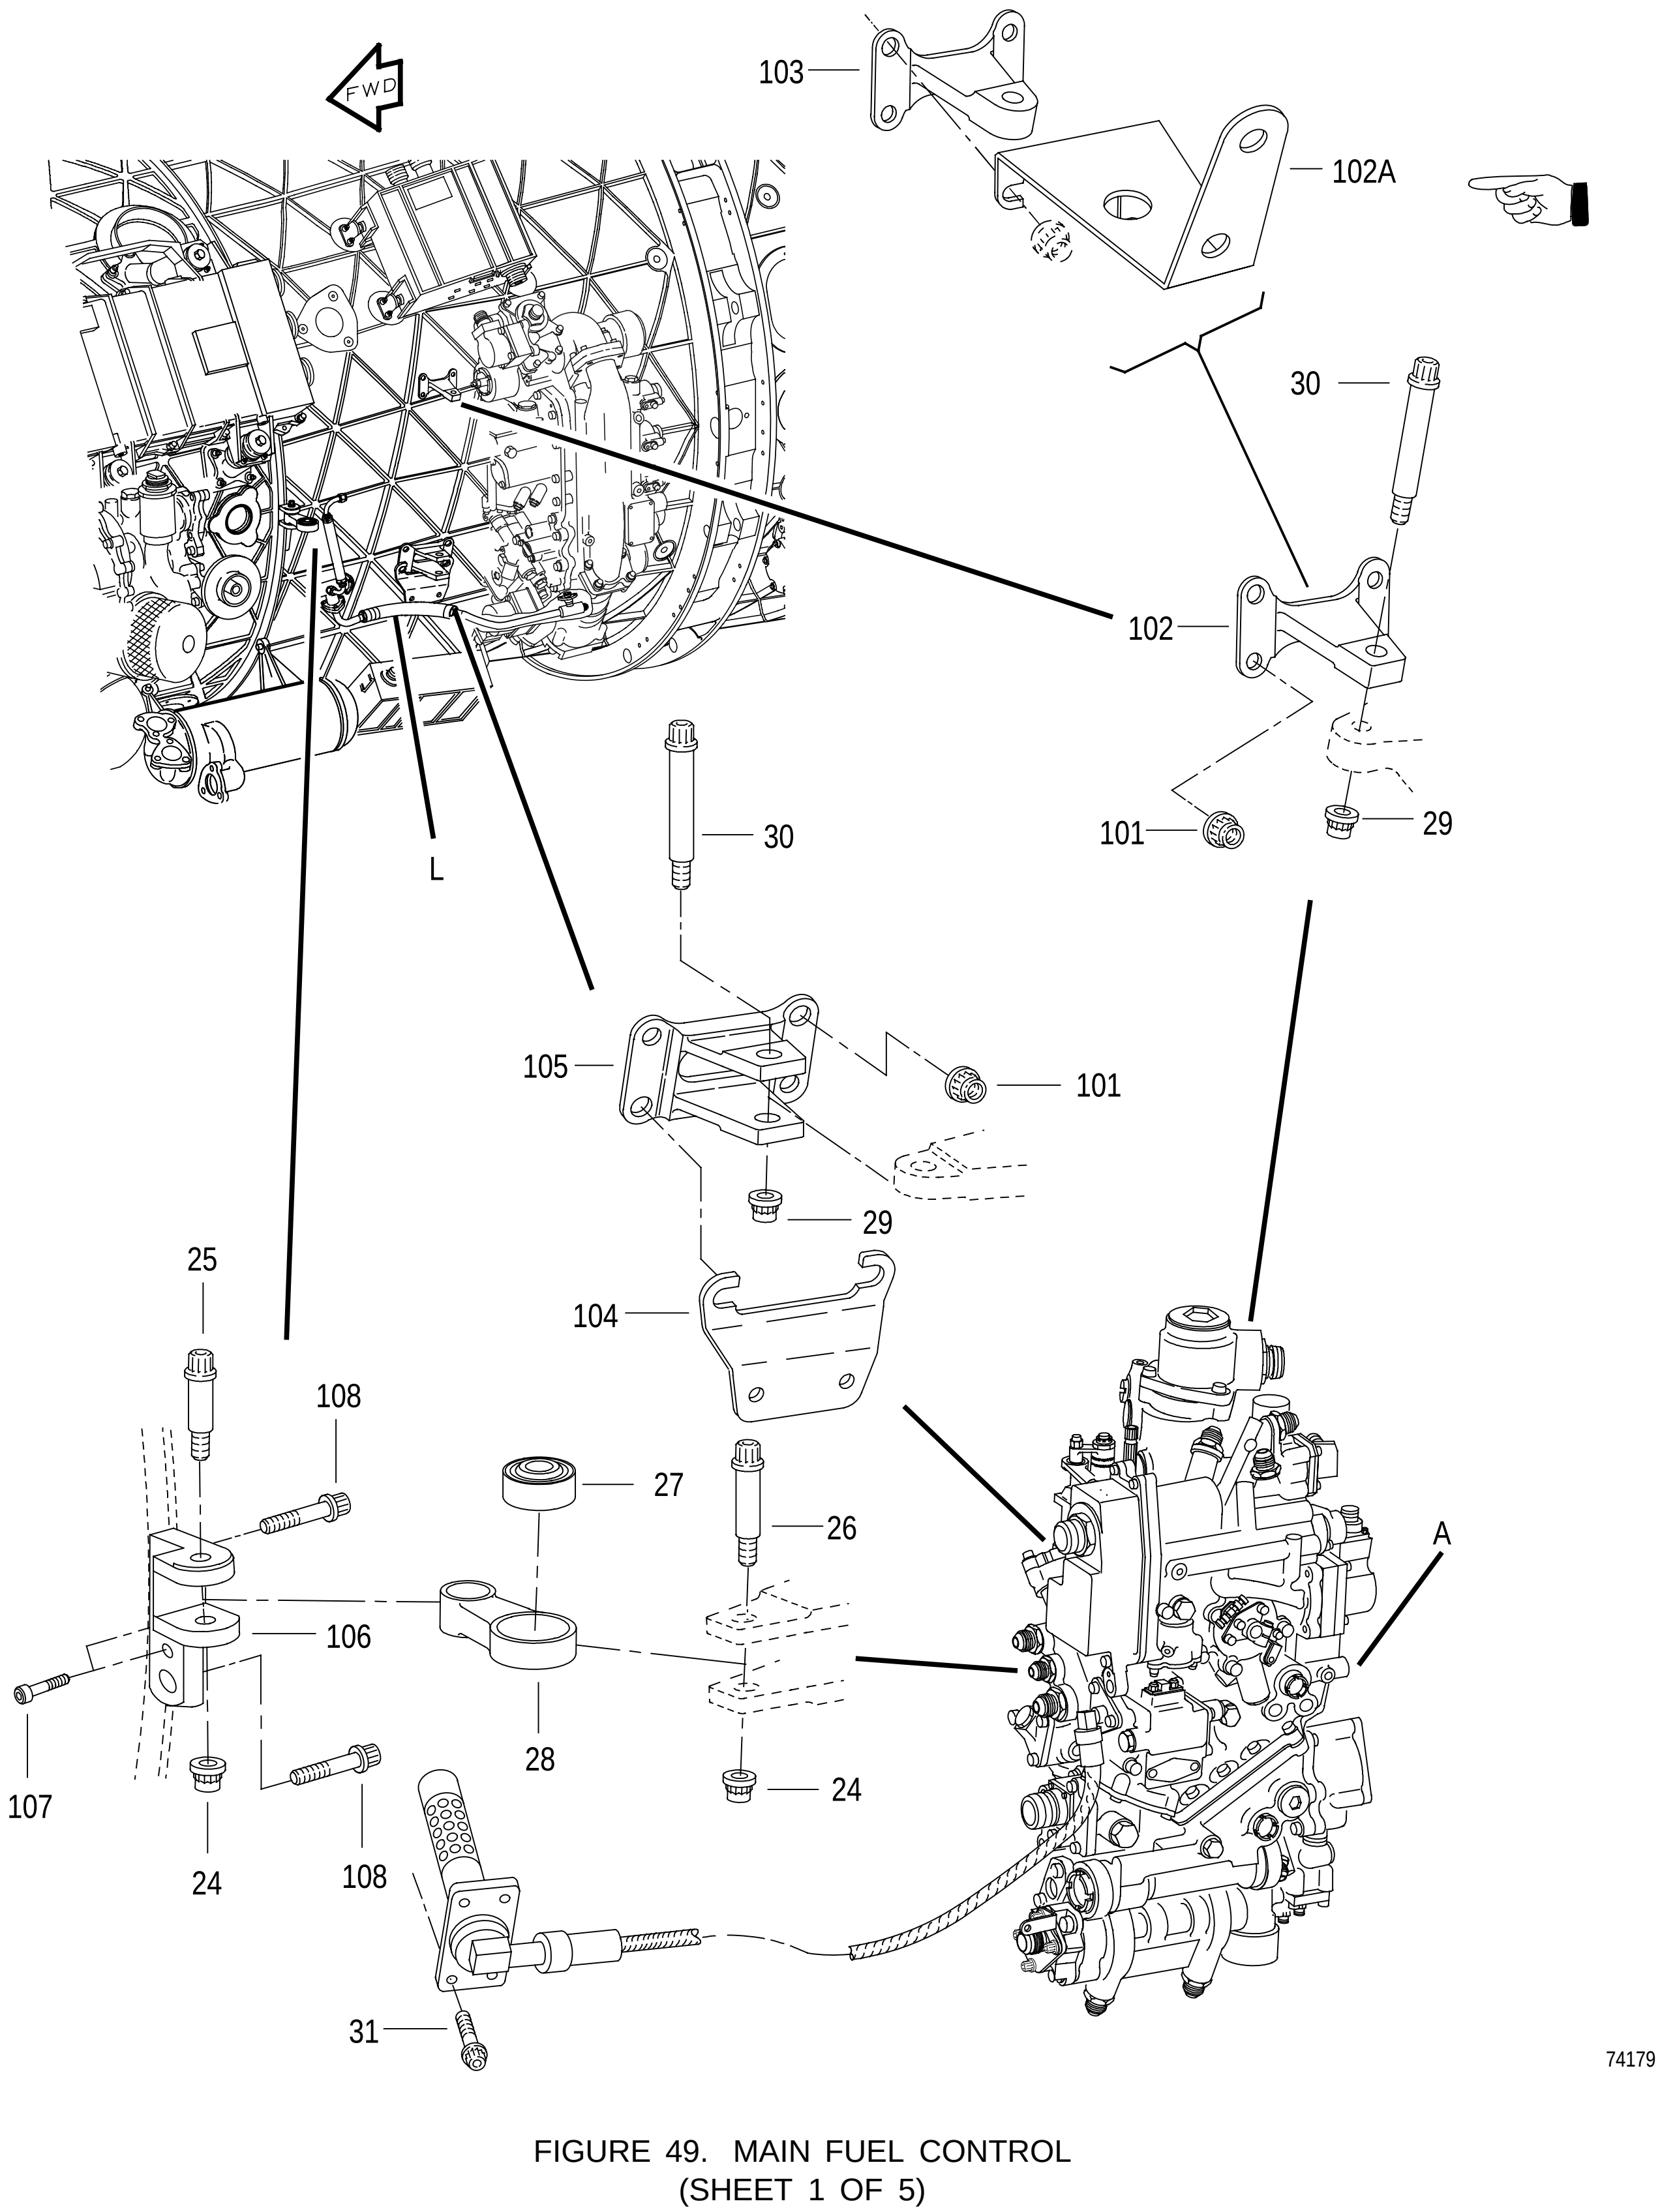


FIGURE 49. MAIN FUEL CONTROL
(SHEET 1 OF 5)

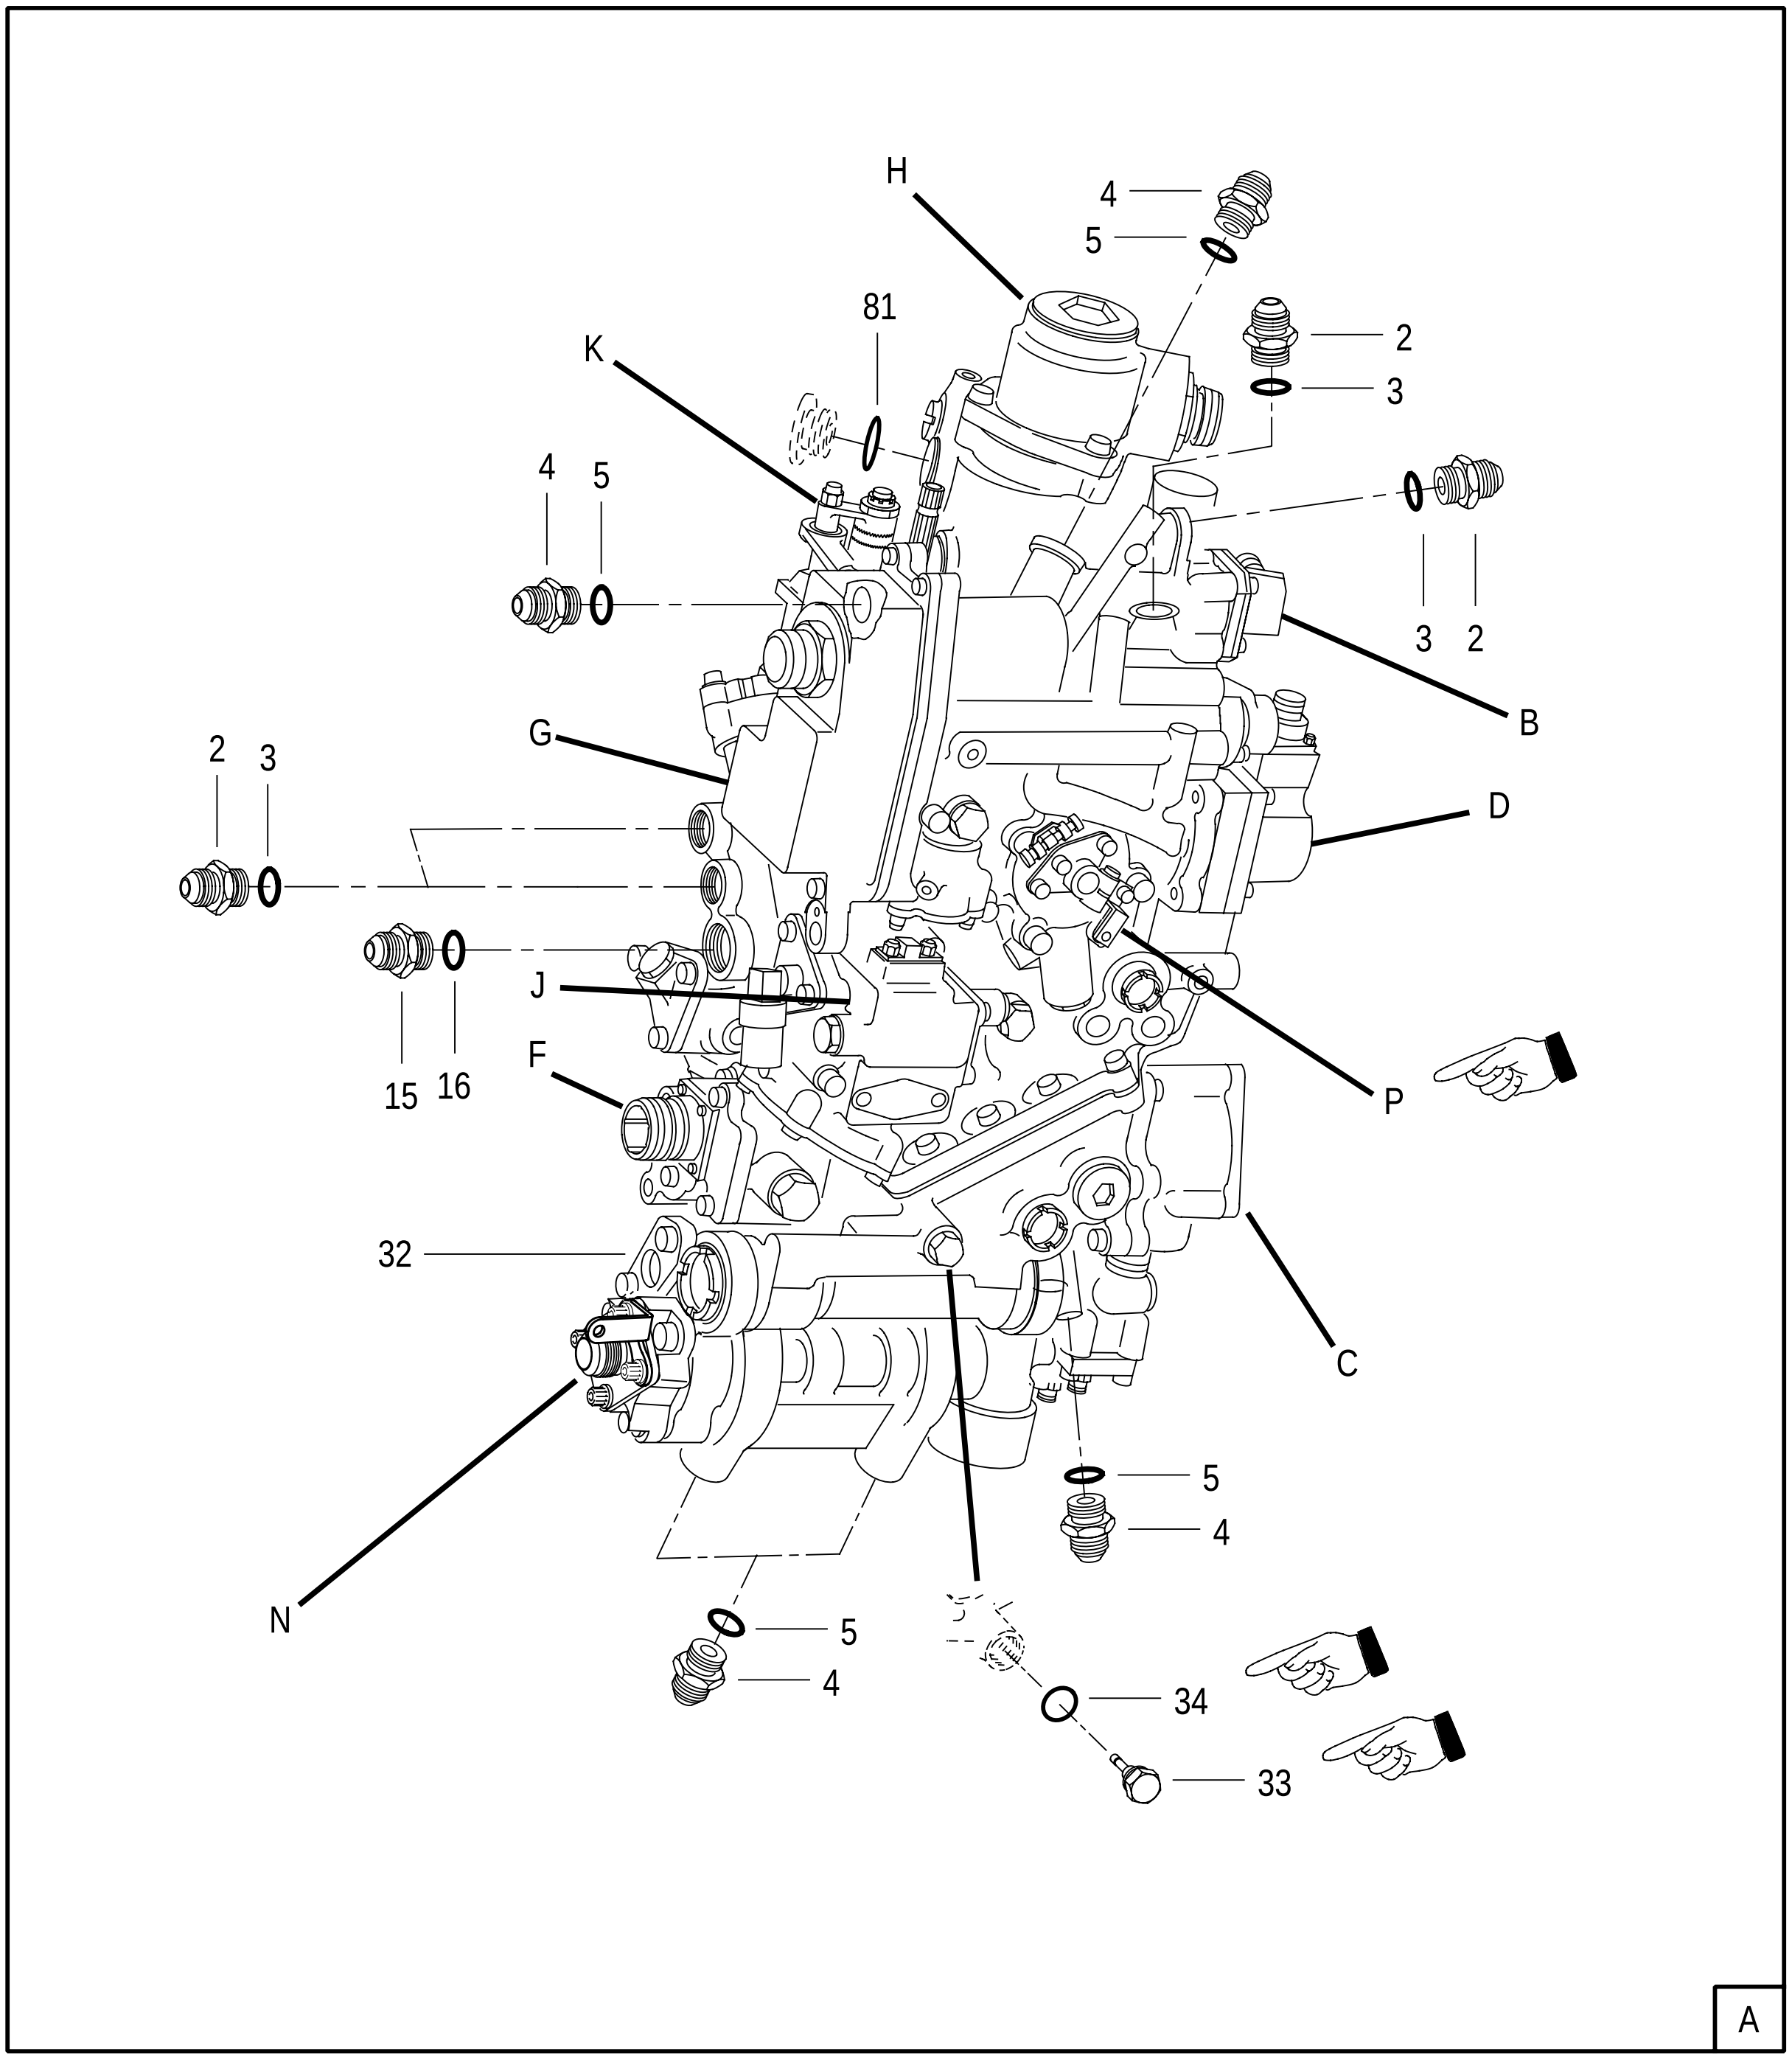


FIGURE 49. MAIN FUEL CONTROL
(SHEET 2 OF 5)

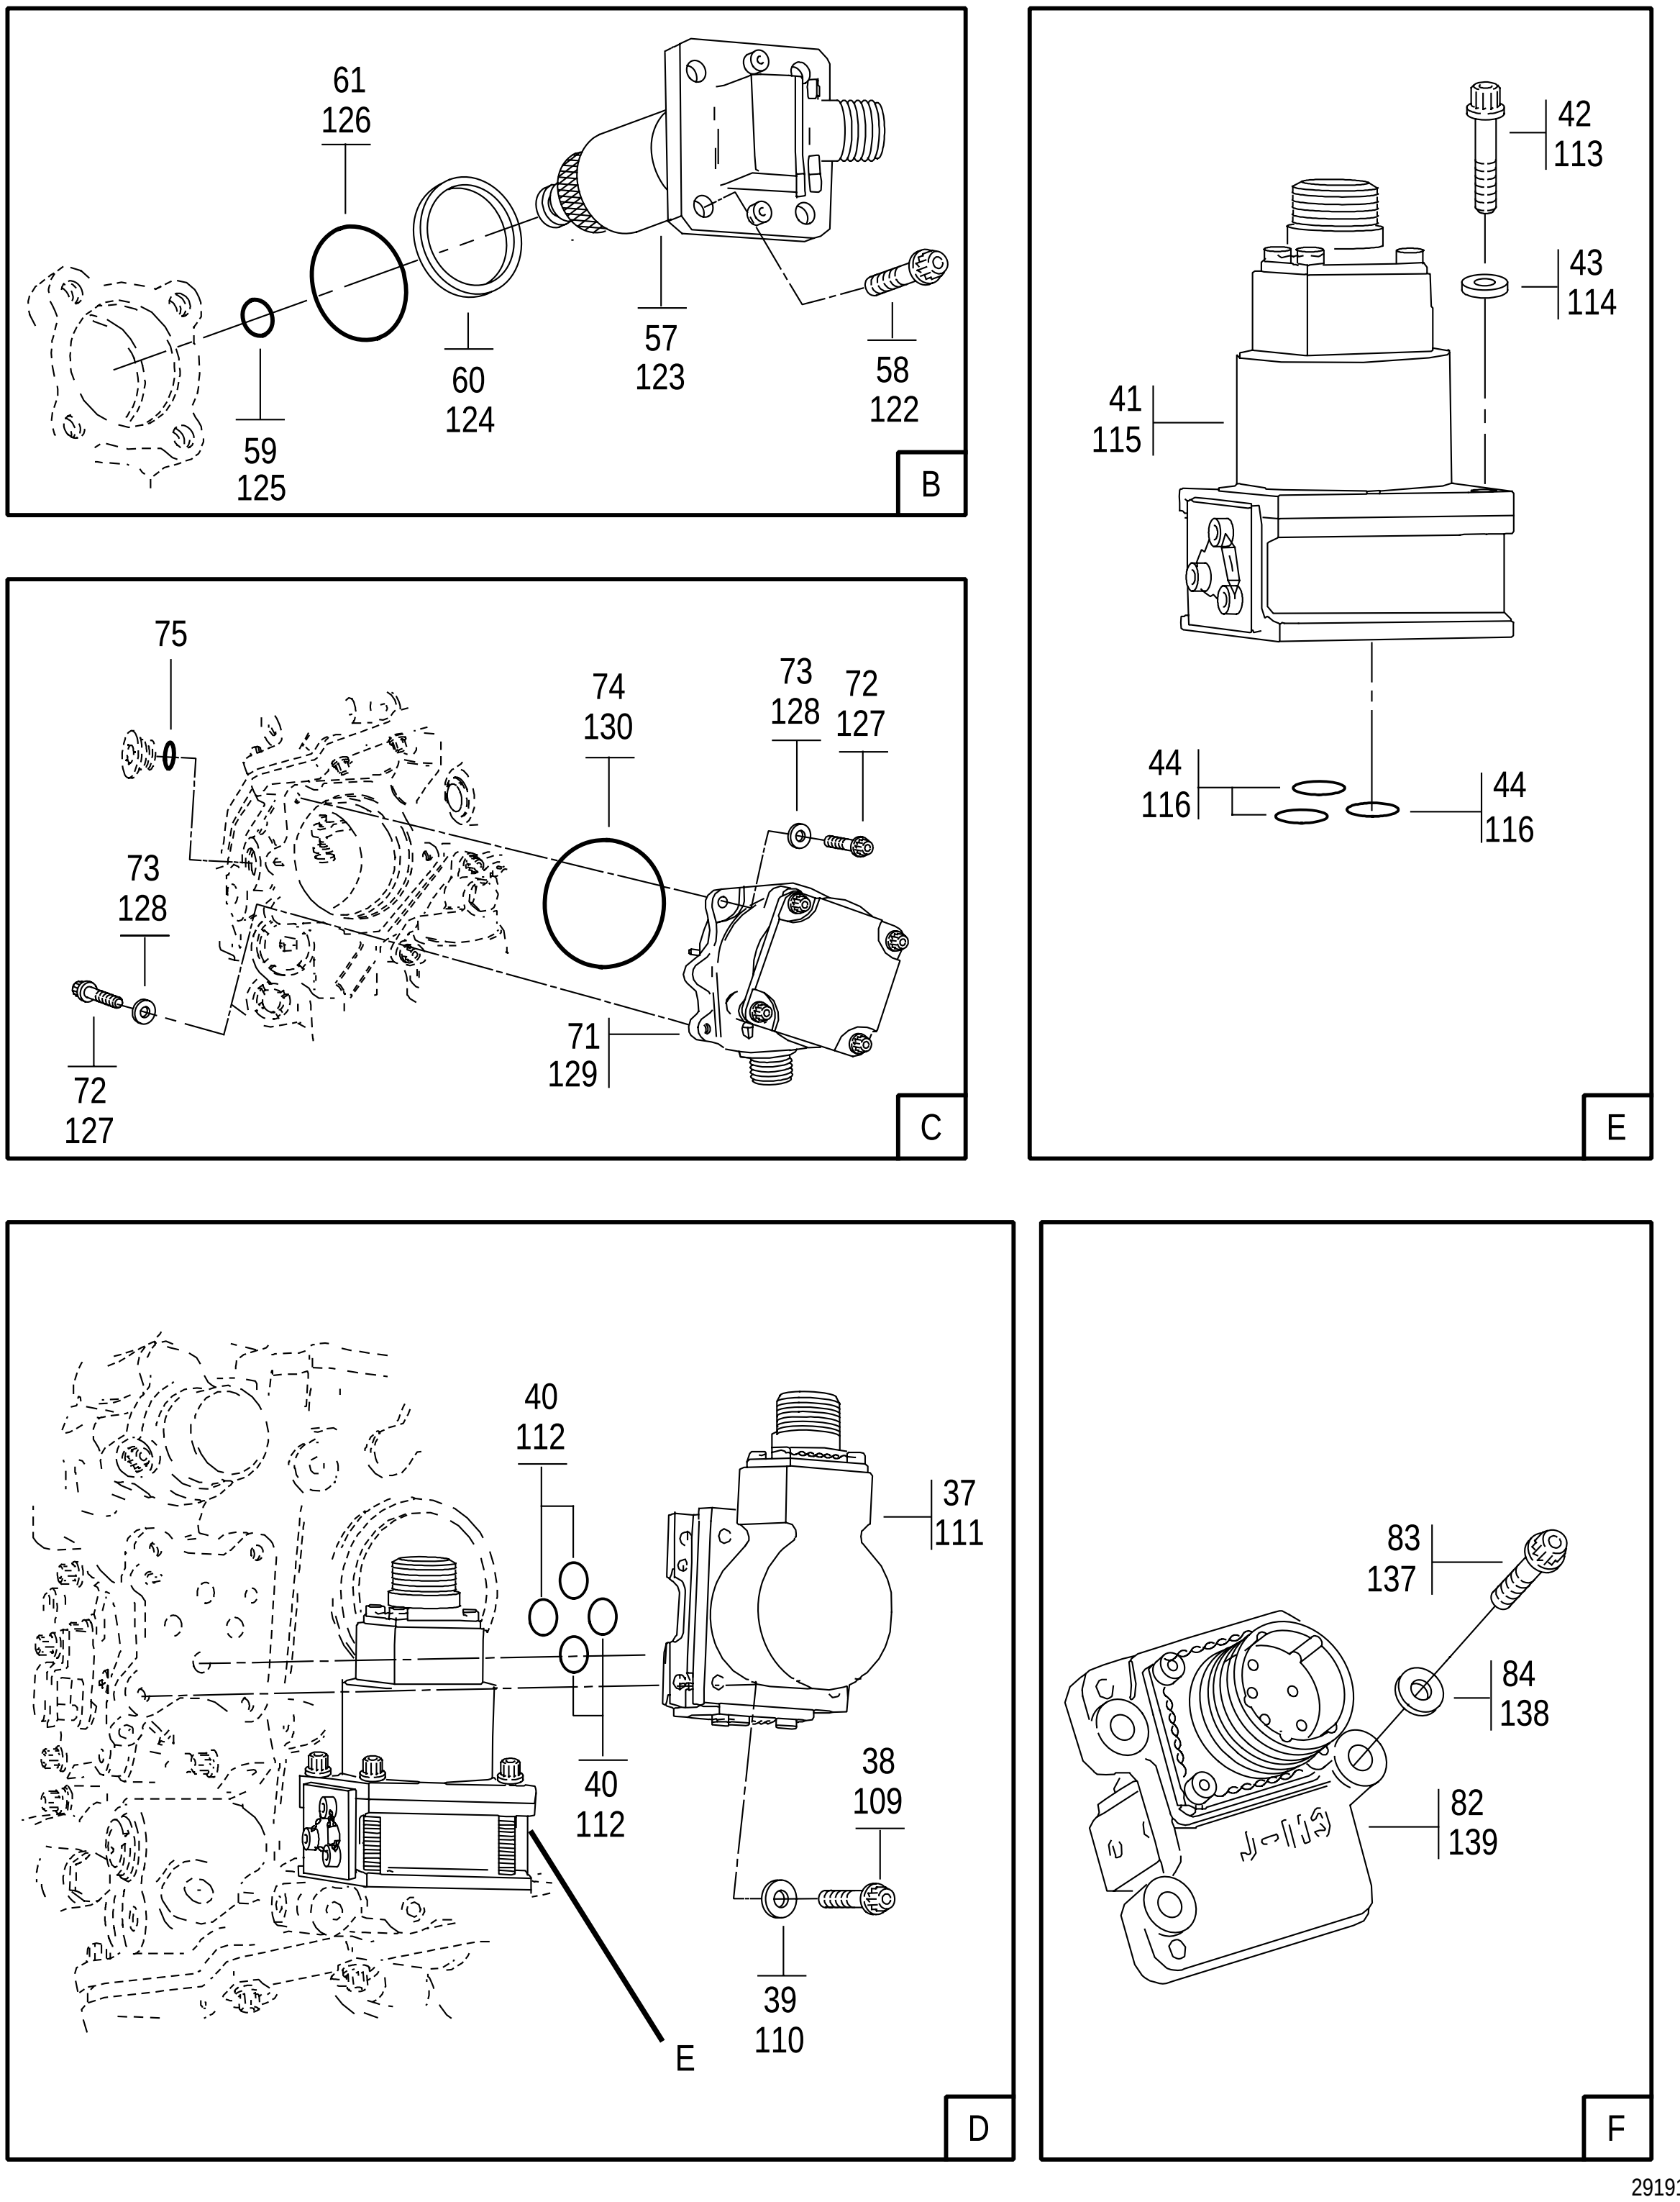


FIGURE 49. MAIN FUEL CONTROL
(SHEET 3 OF 5)




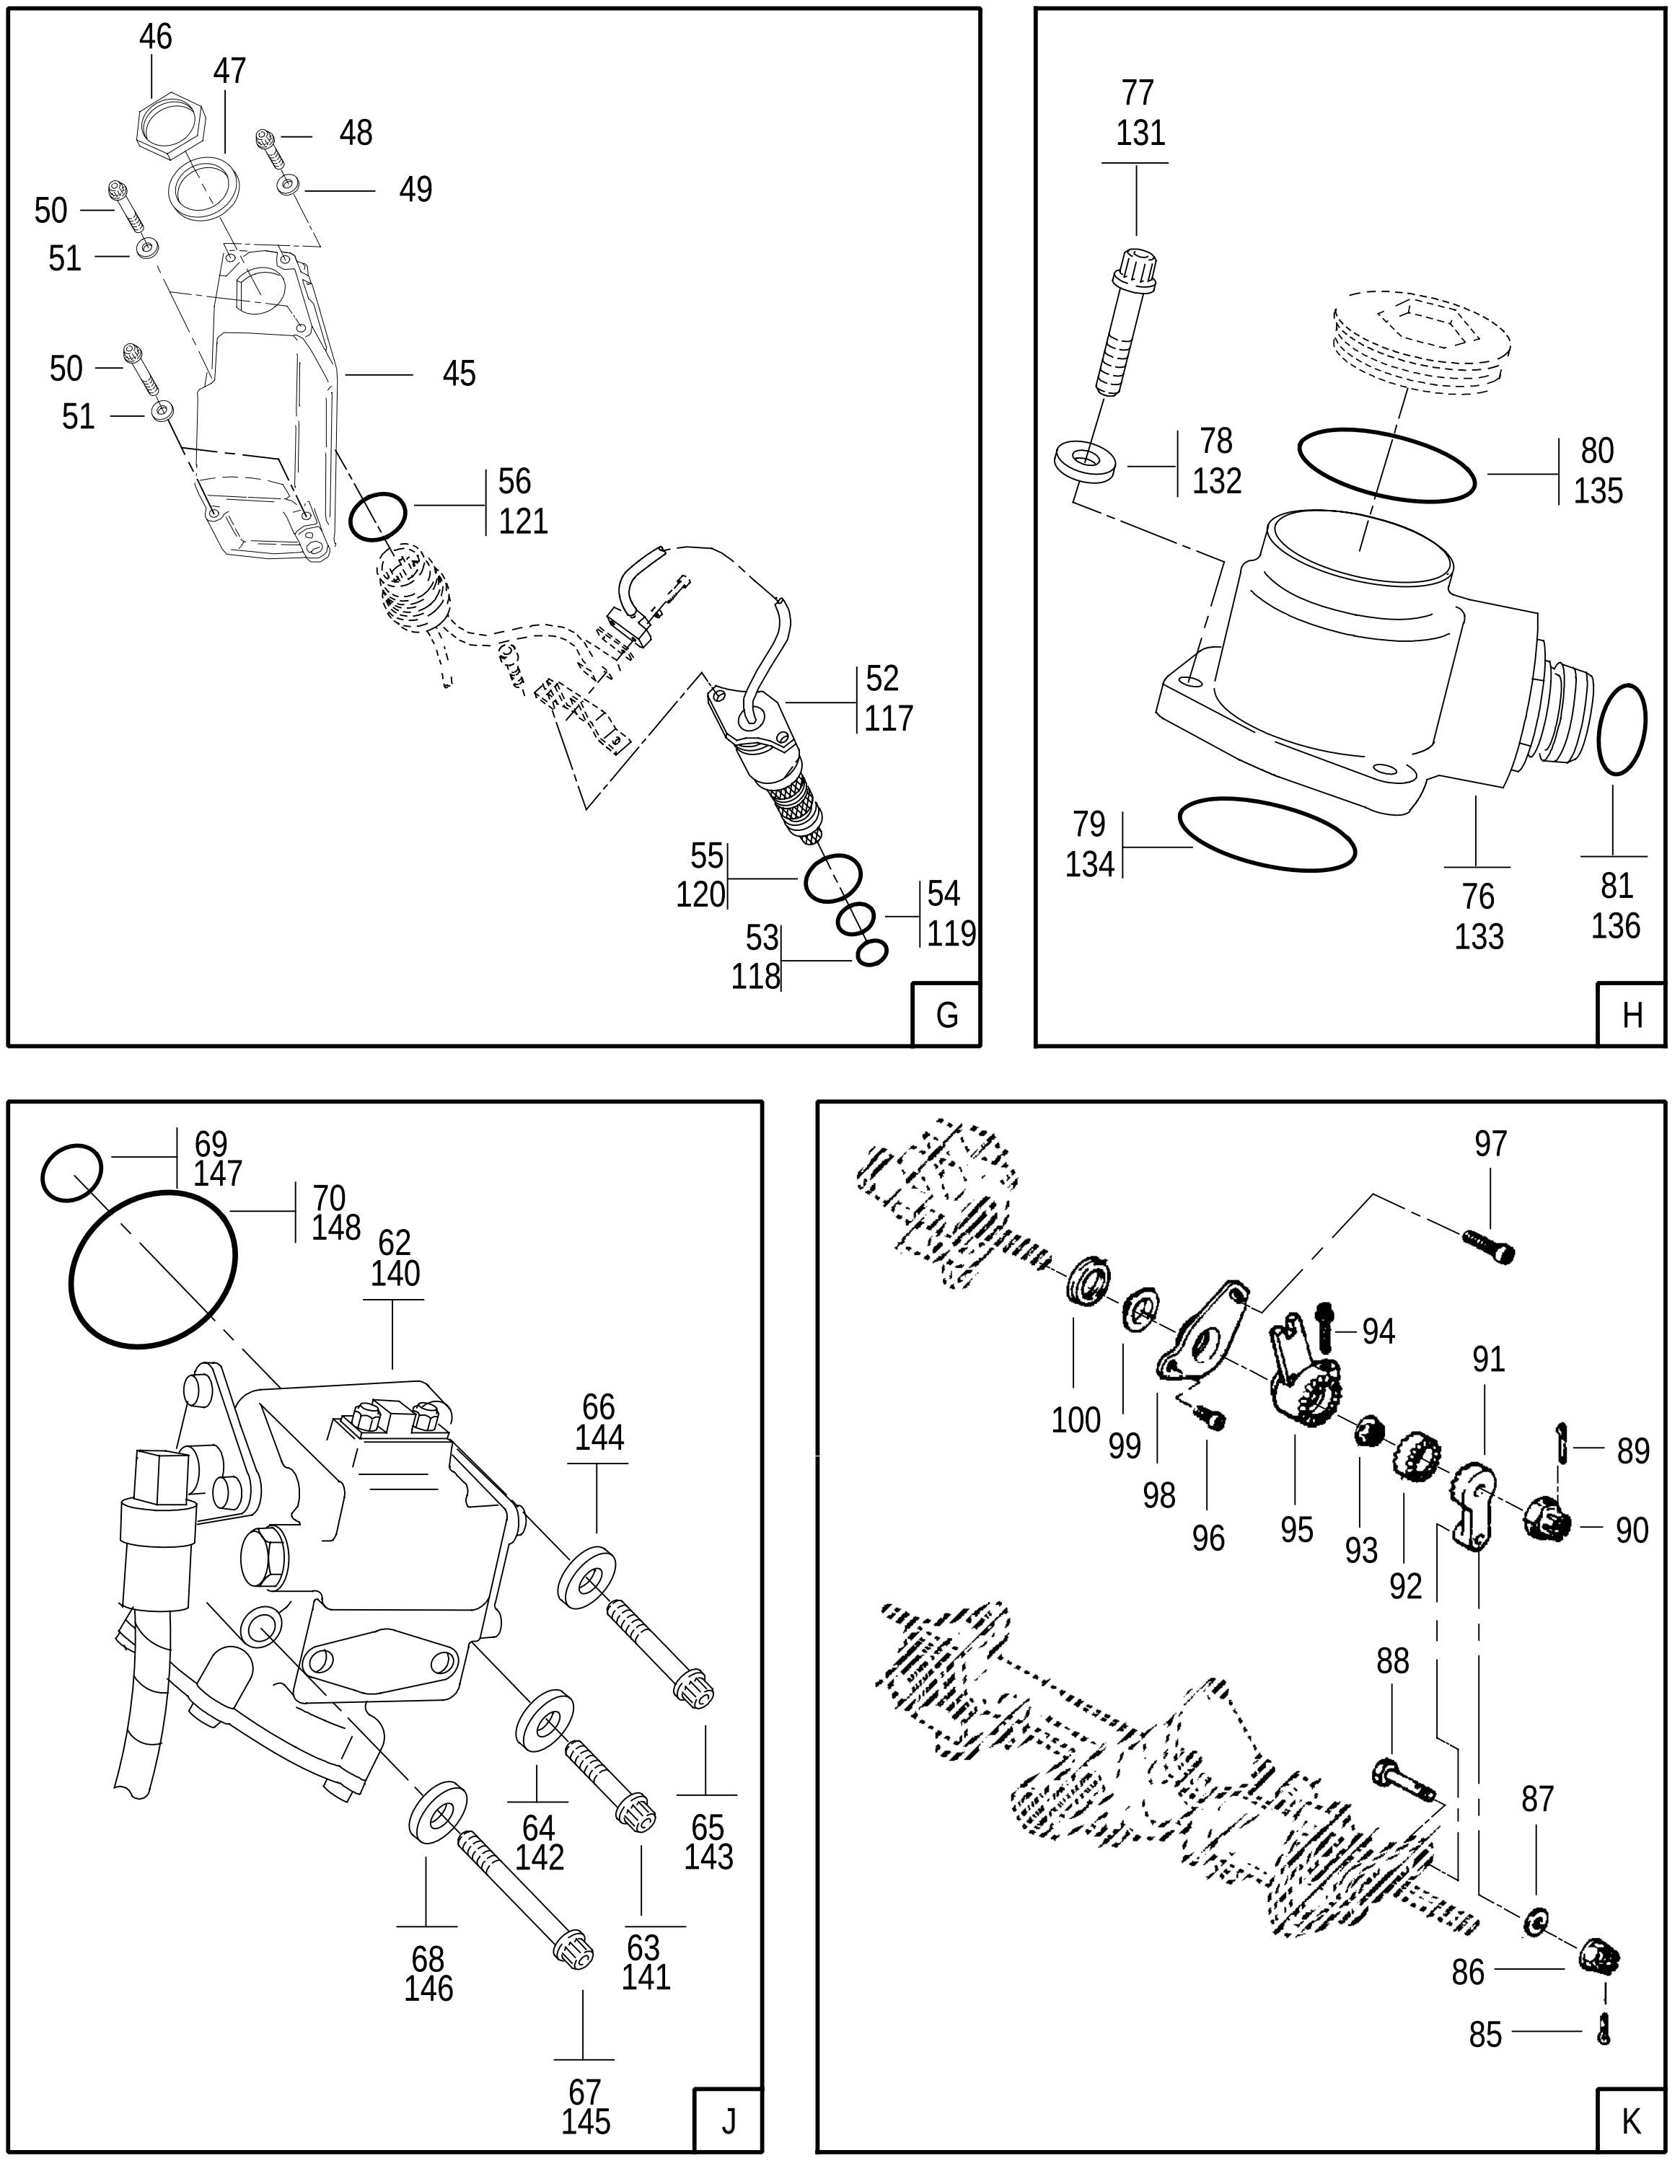


FIGURE 49. MAIN FUEL CONTROL
(SHEET 4 OF 5)

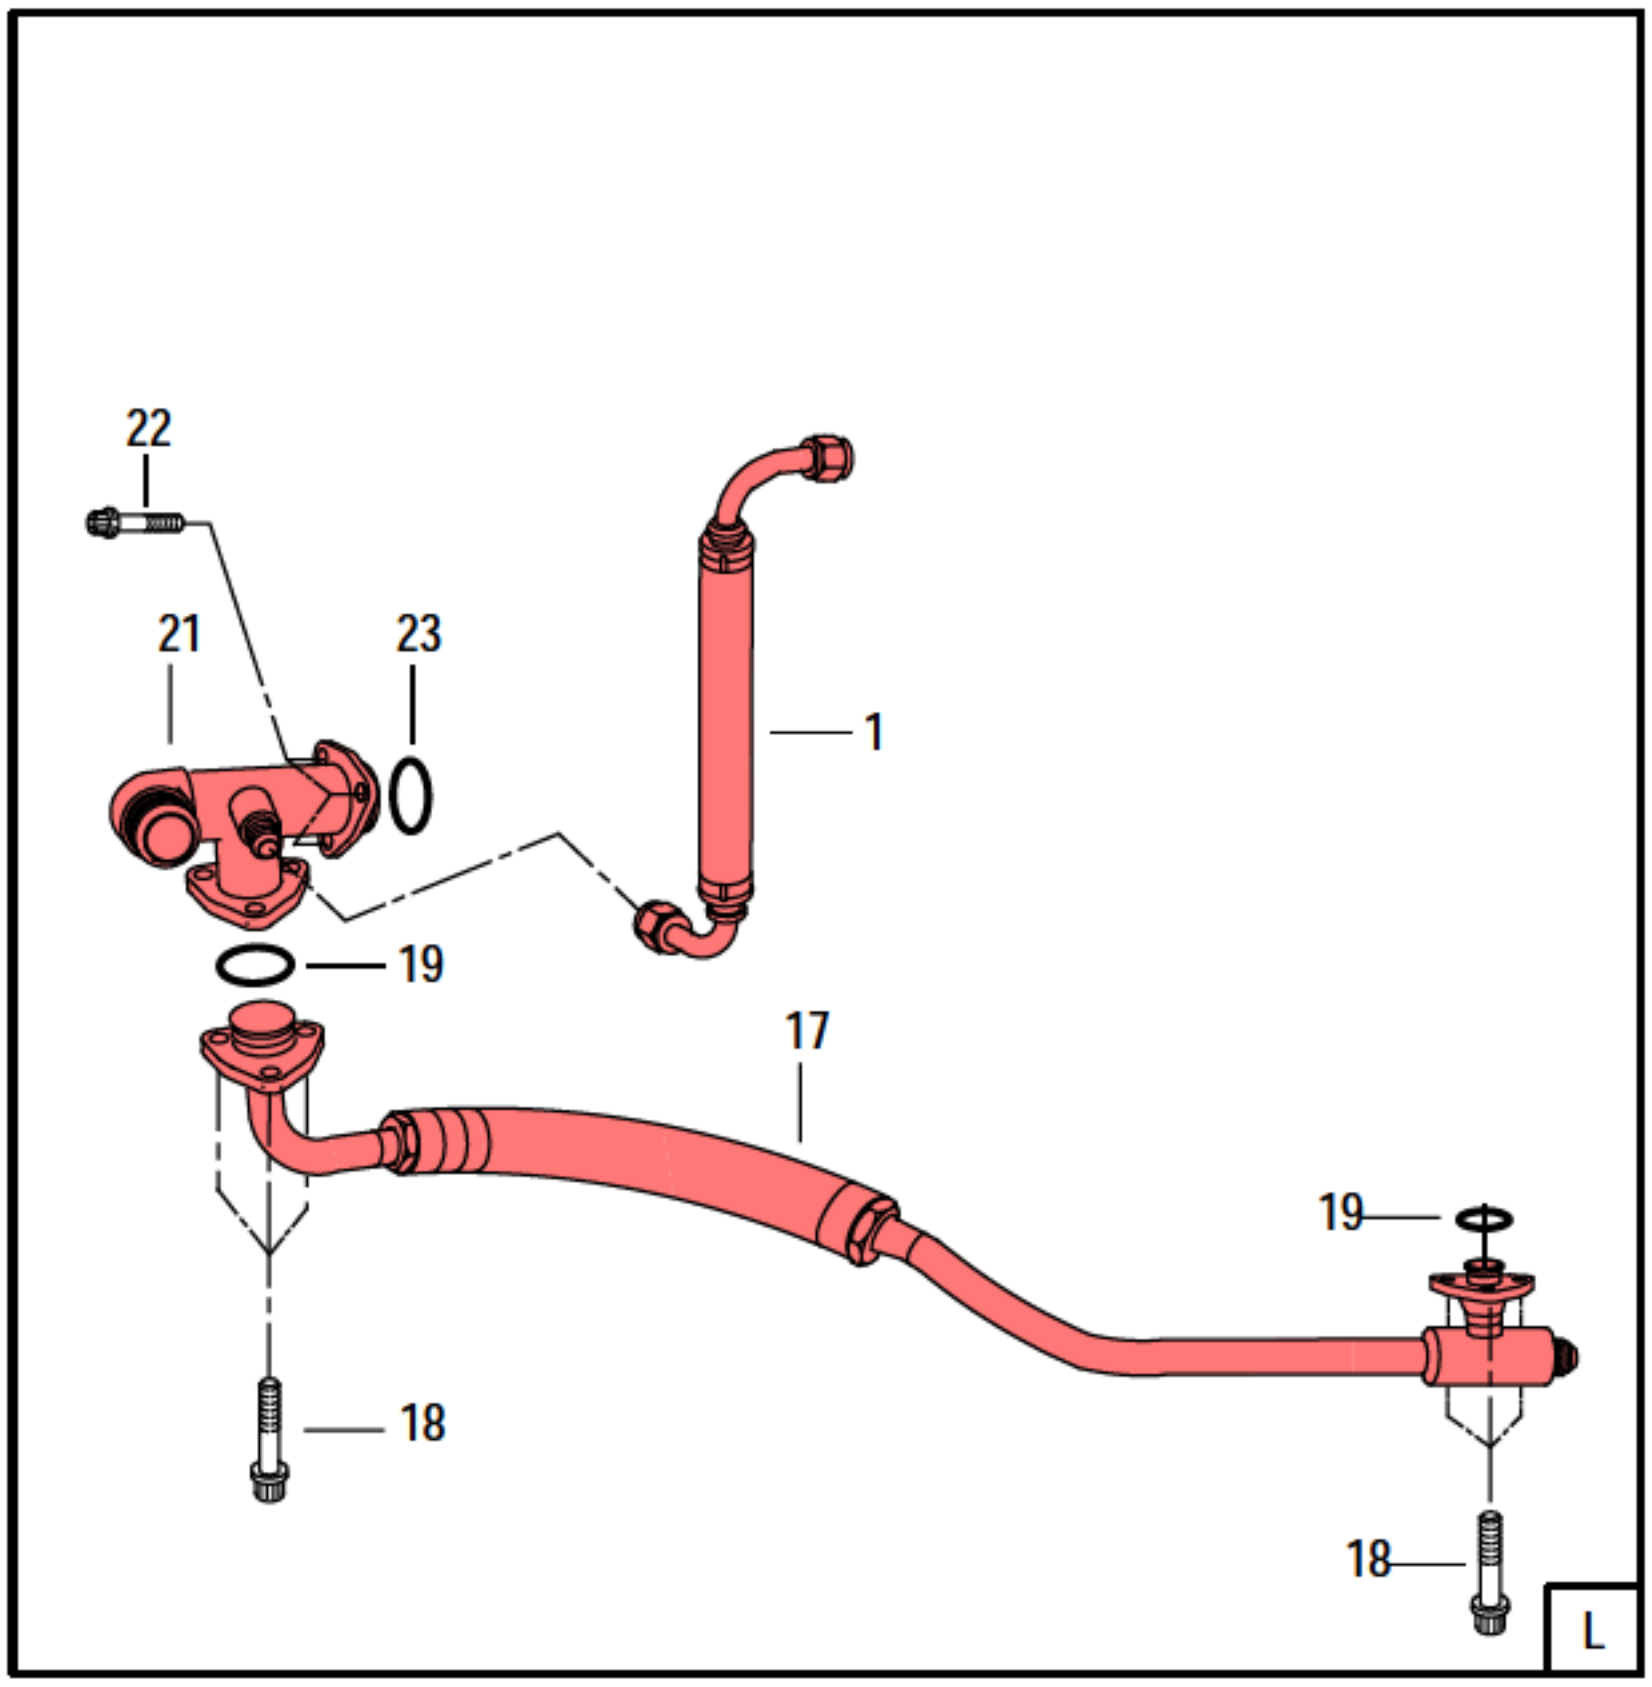

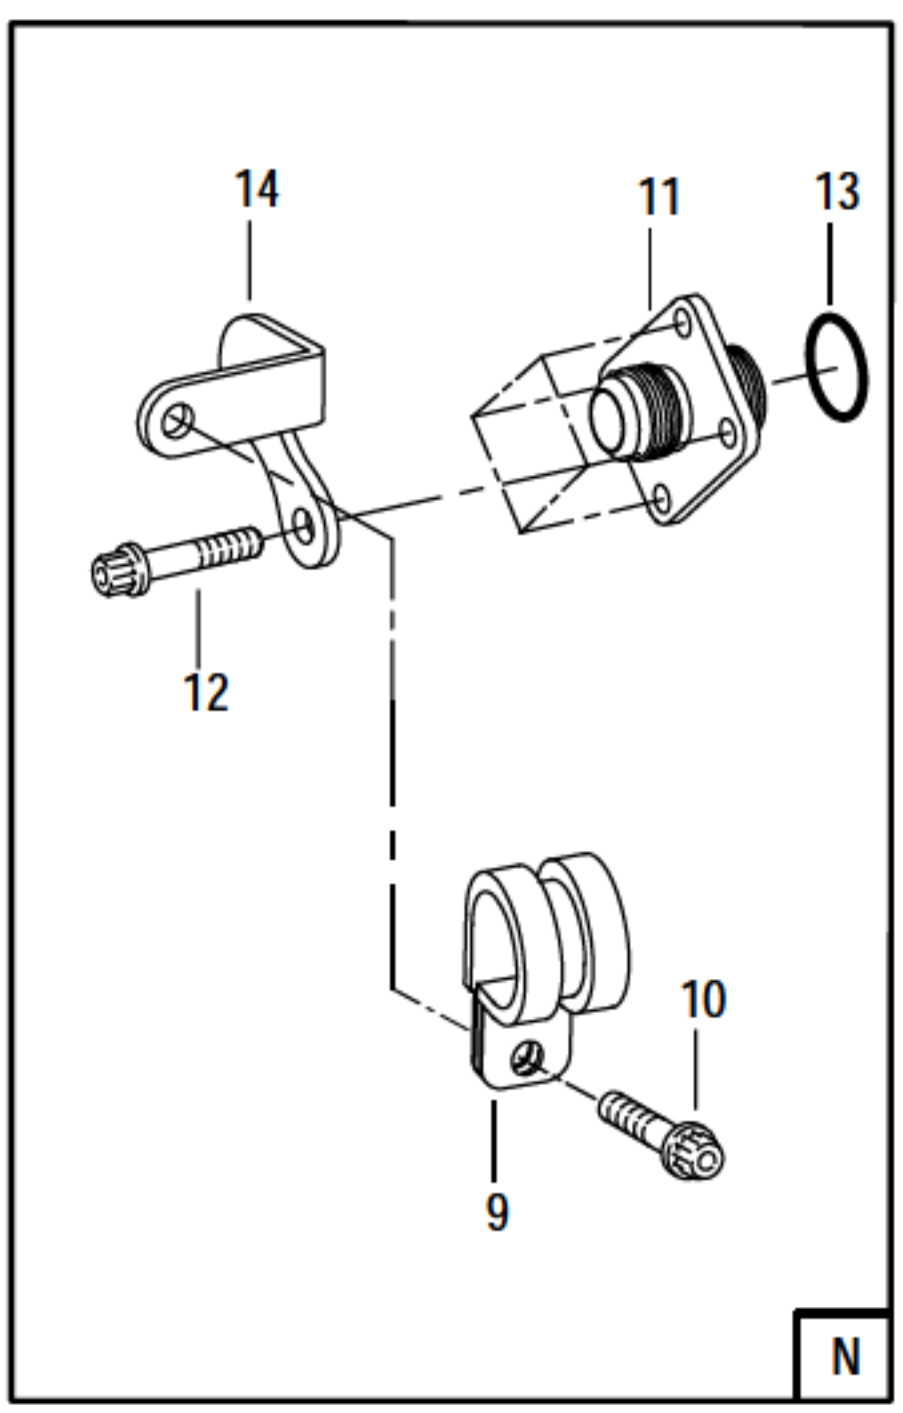

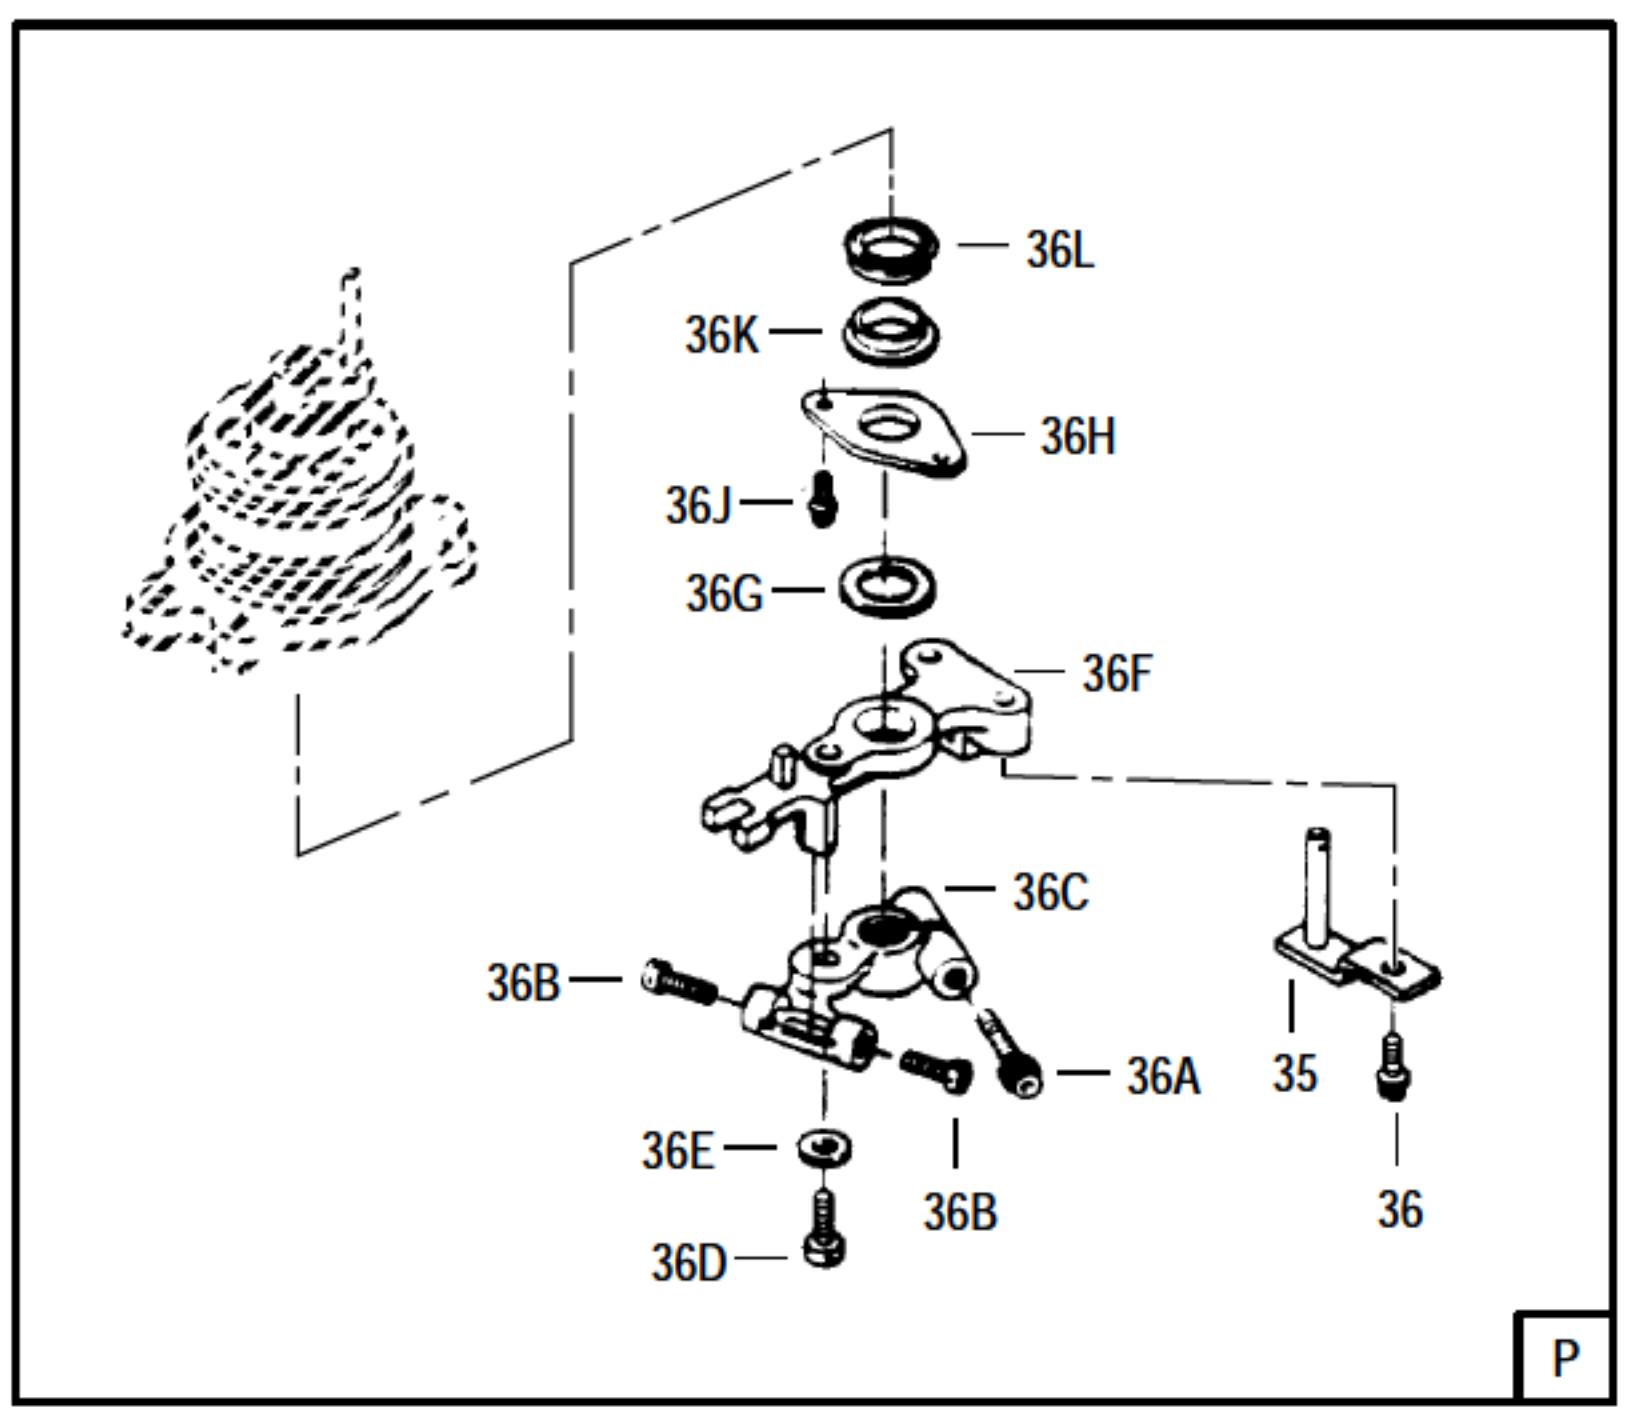

97383

FIGURE 49. MAIN FUEL CONTROL
(SHEET 5 OF 5)

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	49		NO NUMBER		MAIN FUEL CONTROL SEE FIG. 38-11 FOR NHA	REF		
R	- 1	=	4072107	52661	. HOSE OPTION SEE OPTION TABLE	1		PAOZZ
R R R		=	A9161-1	98441	. HOSE-NONMETALLIC 0.406 IN. P&WA PART NO. 4085050	1		PAOZZ
	- 2		ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.437-20UNJF-3A X 0.250 IN. TUBE OD	4		PAOZZ
	- 3		MS9966-04	96906	. PACKING	4		PAOZZ
	- 4		ST2000-06	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.562-18UNJF-3A X 0.375 IN. TUBE OD	5		PAOZZ
	- 5		MS9966-06	96906	. PACKING	5		PAOZZ
	- 6		DELETED		...			
	- 7		DELETED		...			
	- 8		DELETED		...			
	- 9		ST2439-04	52661	CLAMP ASSY-LOOP, CUSHION WHEN EXH USE ST1540-04	1		PAOZZ
			ST1540-04	52661	CLAMP-LOOP, CUSHION	1		PAOZZ
	- 10		ST2015-016	52661	BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
	- 11		4068080	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS, 4 HOLE 1.187-12	1		PAOZZ
	- 12	=	ST1420-10	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.750 IN. LONG (AP)	4		PAOZZ
		=	ST1420-08	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.625 IN. LONG (AP) AF ASSIGNED APPLICATION	4		PAOZZ
	- 13		MS9967-214	96906	. PACKING	1		PAOZZ
	- 14		4060474-01	52661	. BRACKET-LOOP CLAMP, ASSY OF	1		PAOZZ
	- 15		ST2091-062	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.5625-18UNJF-3A X 0.375 IN. TUBE OD	1		PAOZZ
	- 16		MS9967-018	96906	. PACKING	1		PAOZZ
R	- 17	=	4072112	52661	. HOSE OPTION SEE OPTION TABLE	1		PAOZZ
R R R		=	A9162-1	98441	. HOSE-NONMETALLIC 0.625 IN. P&WA PART NO. 4085044	1		PAOZZ
	- 18		ST2017-020	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	6		PAOZZ
	- 19		MS9966-10	96906	. PACKING	2		PAOZZ
	- 20		DELETED		...			
	- 21		4060492	52661	. CONNECTOR-TUBE	1		PAOZZ
	- 22	=	ST1420-10	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.750 IN. LONG (AP)	3		PAOZZ
		=	ST1420-08	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.625 IN. LONG (AP) AF ASSIGNED APPLICATION	3		PAOZZ
	- 23		MS9967-214	96906	. PACKING	1		PAOZZ
	- 24		4023115	52661	. NUT OPTION SEE OPTION TABLE	2		PAOZZ
	- 25		4053915	52661	. BOLT-SHOULDER, DOUBLE HEX 0.190-32UNJF-3A X 1.090 IN. LONG	1		PAOZZ
	- 26		4053916	52661	. BOLT-SHOULDER, DOUBLE HEX 0.190-32UNJF-3A X 1.470 IN. LONG	1		PAOZZ
			4065416	52661	. LINK-DIGITAL ELECTRONIC ENGINE CONTROL SUPPORT, ASSY OF	1		PAOFF
	- 27		4062497	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
	- 28		4065417	52661	.. LINK-DIGITAL ELECTRONIC ENGINE CONTROL SUPPORT	1		XA
	- 29		4023116	52661	. NUT OPTION SEE OPTION TABLE	2		PAOZZ
	- 30		4053917	52661	. BOLT-SHOULDER, DOUBLE HEX 0.250-28UNJF-3A X 1.545 IN. LONG	2	AE	PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
49 - 30	4080202	52661	. BOLT-SHOULDER, DOUBLE HEX .... 0.250-28UNJF-3A X 1.680 IN. LONG	2	AF	PAOZZ
- 31	ST2016-024	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX .... 0.190-32UNJF-3A X 0.750 IN. LONG	4		PAOZZ
- 32	441579 #	99877	. FUEL CONTROL-MAIN .... P&WA PART NO. 4070897	1	SC	PAODD
	441721 #	52661	. FUEL CONTROL-MAIN .... P&WA PART NO. 4071523 PARTIAL BREAKDOWN FOLLOWS	1	SD	PAODD
- 33	2666107	99877	.. PLUG-PURGE AND DRAIN	1		PAOZZ
- 34	2670890-5	99877	.. PACKING-PREFORMED	1		PAOZZ
- 35	2666429	99877	.. PIN AND PLATE ASSY	1		PAOZZ
- 36	953527-84	99877	.. SCREW-MACHINE, 12 POINT (AP)	1		PAOZZ
- 36A	953528-123	99877	.. SCREW-MACHINE, 12 POINT	1		PAOZZ
- 36B	953536-118	99877	.. SCREW-CAP, HEX SOCKET HD	2		PAOZZ
- 36C	2666423	99877	.. LEVER-ADJUSTING, RCVV FEEDBACK	1		PAOZZ
- 36D	953536-120	99877	.. SCREW-CAP, HEX SOCKET HD (AP)	1		PAOZZ
- 36E	AN960C8	88044	.. WASHER-FLAT (AP)	1		PAOZZ
- 36F	2666420	99877	.. LEVER ASSY-RCVV FEEDBACK	1		PAOZZ
- 36G	2666425	99877	.. WASHER-THRUST	1		PAOZZ
- 36H	2666431	99877	.. RETAINER-SEAL	1		PAOZZ
- 36J	953527-84	99877	.. SCREW-MACHINE, 12 POINT (AP)	2		PAOZZ
- 36K	2638218	99877	.. SUPPORT-SHAFT SEAL	1		PAOZZ
- 36L	2638219	99877	.. SEAL-SHAFT	1		PAOZZ
- 37	2718183	99877	.. SERVOVALVE-ELECTRO HYDRAULIC, CIVV/RCVV . ALSO A DETAIL OF KIT P/N 351005A	1		KF
- 38	953527-500	99877	.. SCREW-MACHINE, 12 POINT (AP) .... ALSO A DETAIL OF KIT P/N 351005A	4		PAOZZ
- 39	P-15108	99877	.. WASHER (AP) .... ALSO A DETAIL OF KIT P/N 351005A	4		PAOZZ
- 40	2666850-12	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351005A	4		PAOZZ
- 41	2718247	99877	.. SERVOVALVE-ELECTRO HYDRAULIC, ... METERING VALVE ALSO A DETAIL OF KIT P/N 351044A	1		KF
- 42	953527-500	99877	.. SCREW-MACHINE, 12 POINT (AP) .... ALSO A DETAIL OF KIT P/N 351044A	4		PAOZZ
- 43	P-15108	99877	.. WASHER (AP) .... ALSO A DETAIL OF KIT P/N 351044A	4		PAOZZ
- 44	2666850-11	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351044A	3		PAOZZ
- 45	2670868	99877	.. COVER-SWITCH, MODE AND DIAGNOSTIC	1		PAOZZ
- 46	2670426-15	99877	.. NUT-CONNECTOR MOUNTING (AP)	1		PAOZZ
- 47	2664763	99877	.. WASHER-FLAT (AP)	1		PAOZZ
- 48	953528-120	99877	.. SCREW-MACHINE, 12 POINT (AP)	2		PAOZZ
- 49	AN960C8	88044	.. WASHER-FLAT (AP)	2		PAOZZ
- 50	953528-141	99877	.. SCREW-MACHINE, 12 POINT (AP)	4		PAOZZ
- 51	AN960C8	88044	.. WASHER-FLAT (AP)	4		PAOZZ
- 52	2667765	99877	.. MODE SOLENOID AND SCREEN ASSY .... ALSO A DETAIL OF KIT P/N 351002A	1		KF
- 53	2667998-15	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351002A	1		PAOZZ
- 54	2667998-17	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351002A	1		PAOZZ
- 55	2667998-26	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351002A	1		PAOZZ
- 56	2666850-27	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351002A	1		PAOZZ
- 57	2667590	99877	.. VALVE AND SCREEN ASSY, START BLEED .... SOLENOID ALSO A DETAIL OF KIT P/N 351001A	1		KF
- 58	953527-122	99877	.. SCREW-MACHINE, 12 POINT (AP) .... ALSO A DETAIL OF KIT P/N 351001A	4		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
49 - 59	2667999-8	06848	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351001A	1		PAOZZ
- 60	910728	99877	.. RING-BACKUP, PACKING .... ALSO A DETAIL OF KIT P/N 351001A	1		PAOZZ
- 61	2666850-23	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351001A	1		PAOZZ
- 62	2672571	99877	.. SENSOR ASSY-TT2 .... ALSO A DETAIL OF KIT P/N 351000A	1		KF
- 63	953527-486	99877	.. SCREW-MACHINE, 12 POINT (AP) .... ALSO A DETAIL OF KIT P/N 351000A	1		PAOZZ
- 64	911290	99877	.. WASHER (AP) .... ALSO A DETAIL OF KIT P/N 351000A	1		PAOZZ
- 65	953527-500	99877	.. SCREW-MACHINE, 12 POINT (AP) .... ALSO A DETAIL OF KIT P/N 351000A	1		PAOZZ
- 66	911290	99877	.. WASHER (AP) .... ALSO A DETAIL OF KIT P/N 351000A	1		PAOZZ
- 67	953527-505	99877	.. SCREW (AP) .... ALSO A DETAIL OF KIT P/N 351000A	1		PAOZZ
- 68	911290	99877	.. WASHER (AP) .... ALSO A DETAIL OF KIT P/N 351000A	1		PAOZZ
- 69	2666850-10	99877	.. PACKING .... ALSO A DETAIL OF KIT P/N 351000A	1		PAOZZ
- 70	2666850-136	99877	.. PACKING .... ALSO A DETAIL OF KIT P/N 351000A	1		PAOZZ
- 71	2669873	99877	.. RESOLVER AND HOUSING ASSY-METERING ..... VALVE ALSO A DETAIL OF KIT P/N 351007A	1		KF
- 72	953527-484	99877	.. SCREW-MACHINE, 12 POINT (AP) .... ALSO A DETAIL OF KIT P/N 351007A	3		PAOZZ
- 73	911290	99877	.. WASHER (AP) .... ALSO A DETAIL OF KIT P/N 351007A	3		PAOZZ
- 74	2666850-145	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351007A	1		PAOZZ
- 75	2670890-8	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351007A	1		PAOZZ
- 76	2672058	99877	.. RESOLVER AND COVER ASSY-PLA .... ALSO A DETAIL OF KIT P/N 351006A	1		KF
- 77	953527-486	99877	.. SCREW-MACHINE, 12 POINT (AP) .... ALSO A DETAIL OF KIT P/N 351006A	3		PAOZZ
- 78	911290	99877	.. WASHER (AP) .... ALSO A DETAIL OF KIT P/N 351006A	3		PAOZZ
- 79	2666850-140	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351006A	1		PAOZZ
- 80	2670980-20	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351006A	1		PAOZZ
- 81	2670890-10	99877	.. PACKING-PREFORMED .... ALSO A DETAIL OF KIT P/N 351006A	2		PAOZZ
- 82	2718230	99877	.. HARNESS ASSY-WIRING, IGNITION SWITCH ...... ALSO A DETAIL OF KIT P/N 351003A	1		KF
- 83	953527-122	99877	.. SCREW-MACHINE, 12 POINT (AP) .... ALSO A DETAIL OF KIT P/N 351003A	3		PAOZZ
- 84	911289	99877	.. WASHER-FLAT (AP)............................ ALSO A DETAIL OF KIT P/N 351003A	3		PAOZZ
- 85	MS24665-151	96906	.. PIN	1		PAOZZ
- 86	2648982	99877	.. NUT-HEX, SPLINED	1		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
49 - 87	% 198900	06848	.. SHIM 0.020 IN. THK	AR		PAOZZ
	198901	06848	.. SHIM 0.023 IN. THK	AR		PAOZZ
	198902	06848	.. SHIM 0.026 IN. THK	AR		PAOZZ
	198903	06848	.. SHIM 0.029 IN. THK	AR		PAOZZ
	198904	06848	.. SHIM 0.032 IN. THK	AR		PAOZZ
	198905	06848	.. SHIM 0.035 IN. THK	AR		PAOZZ
	198906	06848	.. SHIM 0.038 IN. THK	AR		PAOZZ
- 88	2648983	06848	.. BOLT-SELF-RETAINING	1		PAOZZ
- 89	MS24665-153	96906	.. PIN	1		PAFZZ
- 90	2643993	06848	.. NUT-HEX, SPECIAL	1		PAOZZ
- 91	2670036	06848	.. LEVER-PLA INPUT	1		PAOZZ
- 92	344137	06848	.. ADAPTER-COUPLING	1		PAOZZ
- 93	MS21043-5	96906	.. NUT	1		PAOZZ
- 94	953528-120	06848	.. SCREW-MACHINE, 12 POINT	1		PAOZZ
- 95	2670032	06848	.. LEVER-PLA RIGGING	1		PAOZZ
- 96	953534-118	06848	.. SCREW-CAP, HEX SOCKET HD	1		PAOZZ
- 97	953534-124	06848	.. SCREW-CAP, HEX SOCKET HD	1		PAOZZ
- 98	2670128	06848	.. COVER-SEAL	1		PAOZZ
- 99	2638218	06848	.. SUPPORT-SHAFT SEAL	1		PAOZZ
- 100	2638219	06848	.. SEAL-SHAFT	1		PAOZZ
- 101	4023116	52661	. NUT OPTION SEE OPTION TABLE	8		PAOZZ
- 102	4075194	52661	. BRACKET-FAN DUCT, MAIN FUEL CONTROL	1	AE	PAOZZ
R - 102A	4081548-01	52661	. BRACKET-MOISTURE TRAP, ASSY OF	1		PAFZZ
- 103	4078223	52661	. BRACKET-FAN DUCT, MAIN FUEL CONTROL	1	AF	PAOZZ
- 104	4075934	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 105	4075232	52661	. CLEVIS-FAN DUCT, MAIN FUEL CONTROL	1		PAOZZ
- 106	4062651	52661	. BRACKET ASSY-ENGINE ELECTRONIC CONTROL SUPPORT LINK	1		PAFBZ
- 107	645795	52661	. SCREW-MACHINE, COUNTERSUNK 0.190-32UNJF-3A X 0.445 IN. LONG (AP)	2		PAFZZ
- 108	ST2018-032	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 1.000 IN. LONG (AP)	2		PAOZZ
	351005A	06848	KIT-MODULE, CIVV CONTROLLER EHSV	1		PAODD
- 109	953527-500	06848	. SCREW-MACHINE, 12 POINT	4		PAOZZ
- 110	P-15108	06848	. WASHER	4		PAOZZ
- 111	2718183	06848	. SERVOVALVE-ELECTROHYDRAULIC, CIVV	1		KF
- 112	2666850-12	06848	. PACKING-PREFORMED	4		PAOZZ
	351044A	06848	KIT-MODULE, METERING VALVE ELECTRO HYDRAULIC SERVOVALVE	1		PAODD
- 113	953527-500	06848	. SCREW-MACHINE, 12 POINT	4		PAOZZ
- 114	P-15108	06848	. WASHER	4		PAOZZ
- 115	2718247	06848	. SERVOVALVE-ELECTRO HYDRAULIC, METERING VALVE	1		KF
- 116	2666850-11	06848	. PACKING-PREFORMED	3		PAOZZ
	351002A	06848	KIT-MODULE, MODE SOLENOID AND SCREEN ASSEMBLY	1		PAODD
- 117	2667765	06848	. MODE SOLENOID AND SCREEN ASSY	1		KF
- 118	2667998-15	06848	. PACKING-PREFORMED	1		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
49 - 119	2667998-17	99877	. PACKING-PREFORMED	1		PAOZZ
- 120	2667998-26	99877	. PACKING-PREFORMED	1		PAOZZ
- 121	2666850-27	99877	. PACKING-PREFORMED	1		PAOZZ
	351001A	99877	KIT-MODULE, START BLEED SOLENOID VALVE AND SCREEN ASSY	1		PAODD
- 122	953527-122	99877	. SCREW-MACHINE, 12 POINT	4		PAOZZ
- 123	2667590	99877	. VALVE AND SCREEN ASSY, START BLEED SOLENOID	1		KF
- 124	910728	99877	. RING-BACKUP, PACKING	1		PAOZZ
- 125	2667999-8	06848	. PACKING-PREFORMED	1		PAOZZ
- 126	2666850-23	99877	. PACKING-PREFORMED	1		PAOZZ
	351007A	99877	KIT-MODULE, METERING VALVE RESOLVER AND HOUSING ASSY	1		PAODD
- 127	953527-484	99877	. SCREW-MACHINE, 12 POINT	3		PAOZZ
- 128	911290	99877	. WASHER	3		PAOZZ
- 129	2669873	99877	. RESOLVER AND HOUSING ASSY-METERING VALVE	1		KF
- 130	2666850-145	99877	. PACKING-PREFORMED	1		PAOZZ
	351006A	99877	KIT-MODULE, PLA RESOLVER AND COVER	1		PAODD
- 131	953527-486	99877	. SCREW-MACHINE, 12 POINT	3		PAOZZ
- 132	911290	99877	. WASHER	3		PAOZZ
- 133	2672058	99877	. RESOLVER AND COVER ASSY-PLA	1		KF
- 134	2666850-140	99877	. PACKING-PREFORMED	1		PAOZZ
- 135	2670980-20	99877	. PACKING-PREFORMED	1		PAOZZ
- 136	2670890-10	99877	. PACKING-PREFORMED	1		PAOZZ
	351003A	99877	KIT-MODULE, IGNITION SWITCH WIRING HARNESS ASSY	1		PAODD
- 137	953527-122	99877	. SCREW-MACHINE, 12 POINT	3		PAOZZ
- 138	911289	99877	. WASHER-FLAT	3		PAOZZ
- 139	2718230	99877	. HARNESS ASSY-WIRING, IGNITION SWITCH	1		KF
	351000A	99877	KIT-MODULE, TT2 SENSOR ASSY	1		PAODD
- 140	2672571	99877	. SENSOR ASSY-TT2	1		KF
- 141	953527-486	99877	. SCREW-MACHINE, 12 POINT (AP)	1		PAOZZ
- 142	911290	99877	. WASHER (AP)	1		PAOZZ
- 143	953527-500	99877	. SCREW-MACHINE, 12 POINT (AP)	1		PAOZZ
- 144	911290	99877	. WASHER (AP)	1		PAOZZ
- 145	953527-505	99877	. SCREW (AP)	1		PAOZZ
- 146	911290	99877	. WASHER (AP)	1		PAOZZ
- 147	2666850-10	99877	. PACKING	1		PAOZZ
- 148	2666850-136	99877	. PACKING	1		PAOZZ



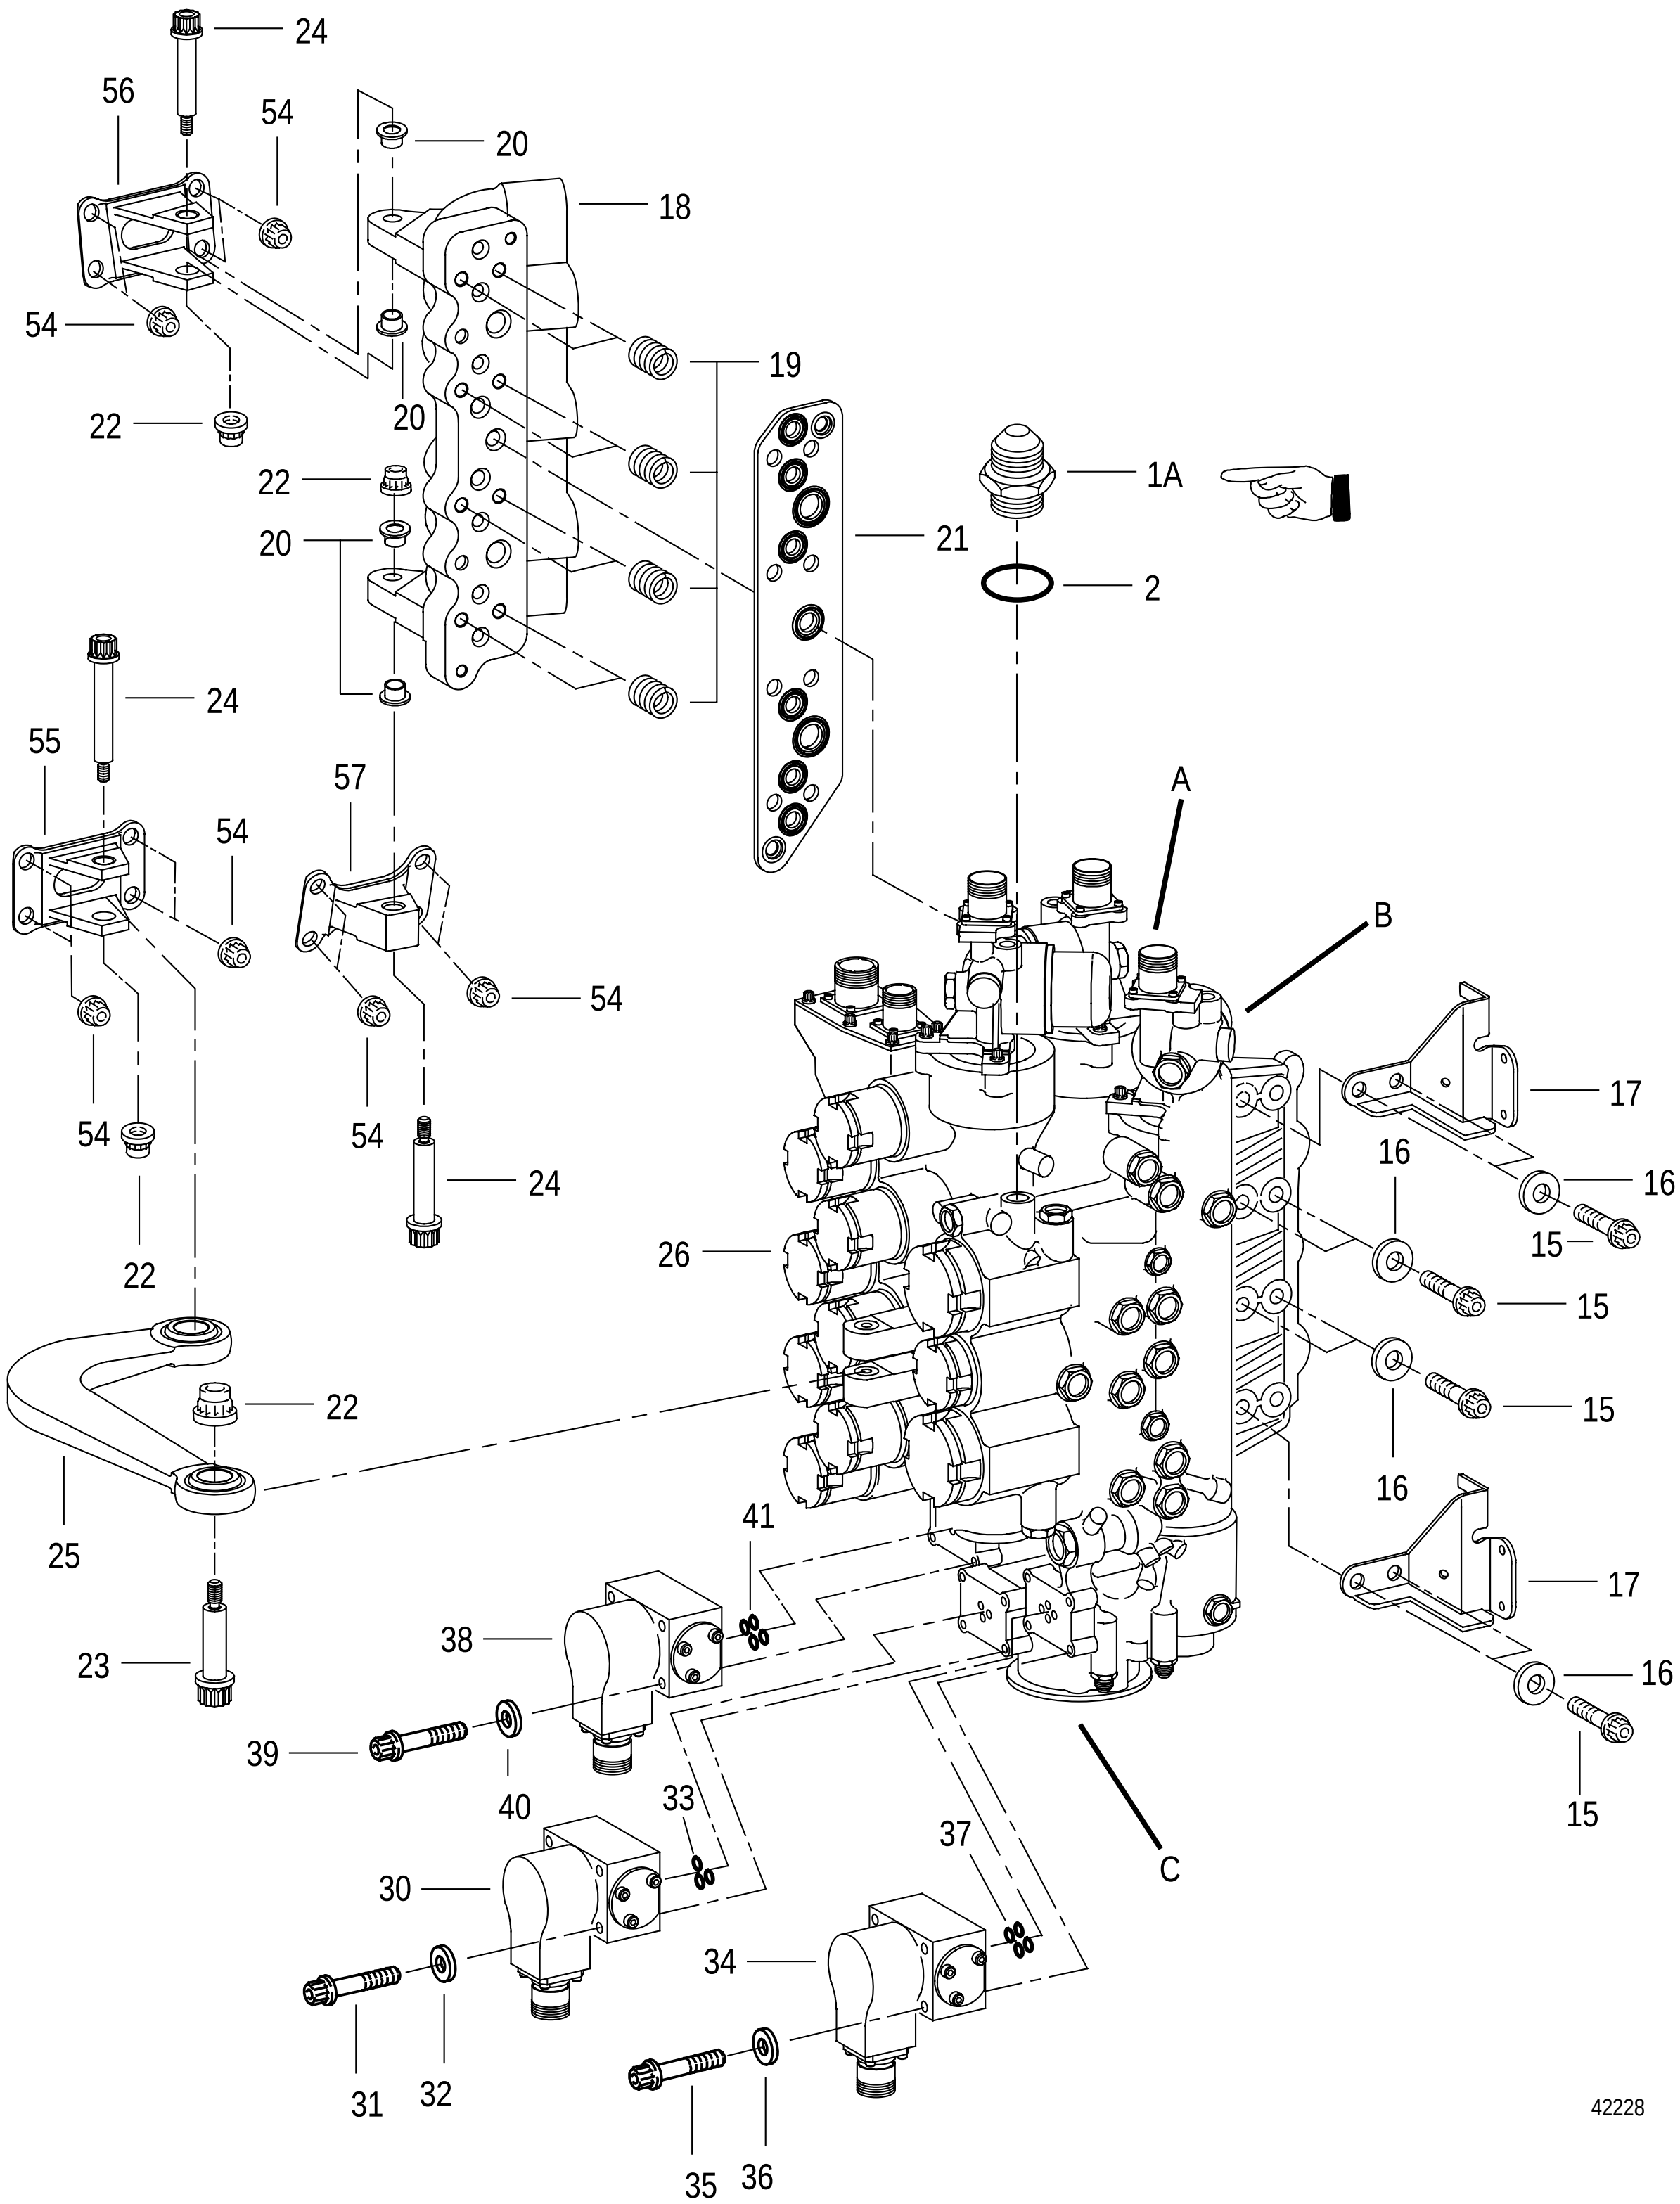



FIGURE 50. AUGMENTOR FUEL CONTROL
(SHEET 1 OF 3)

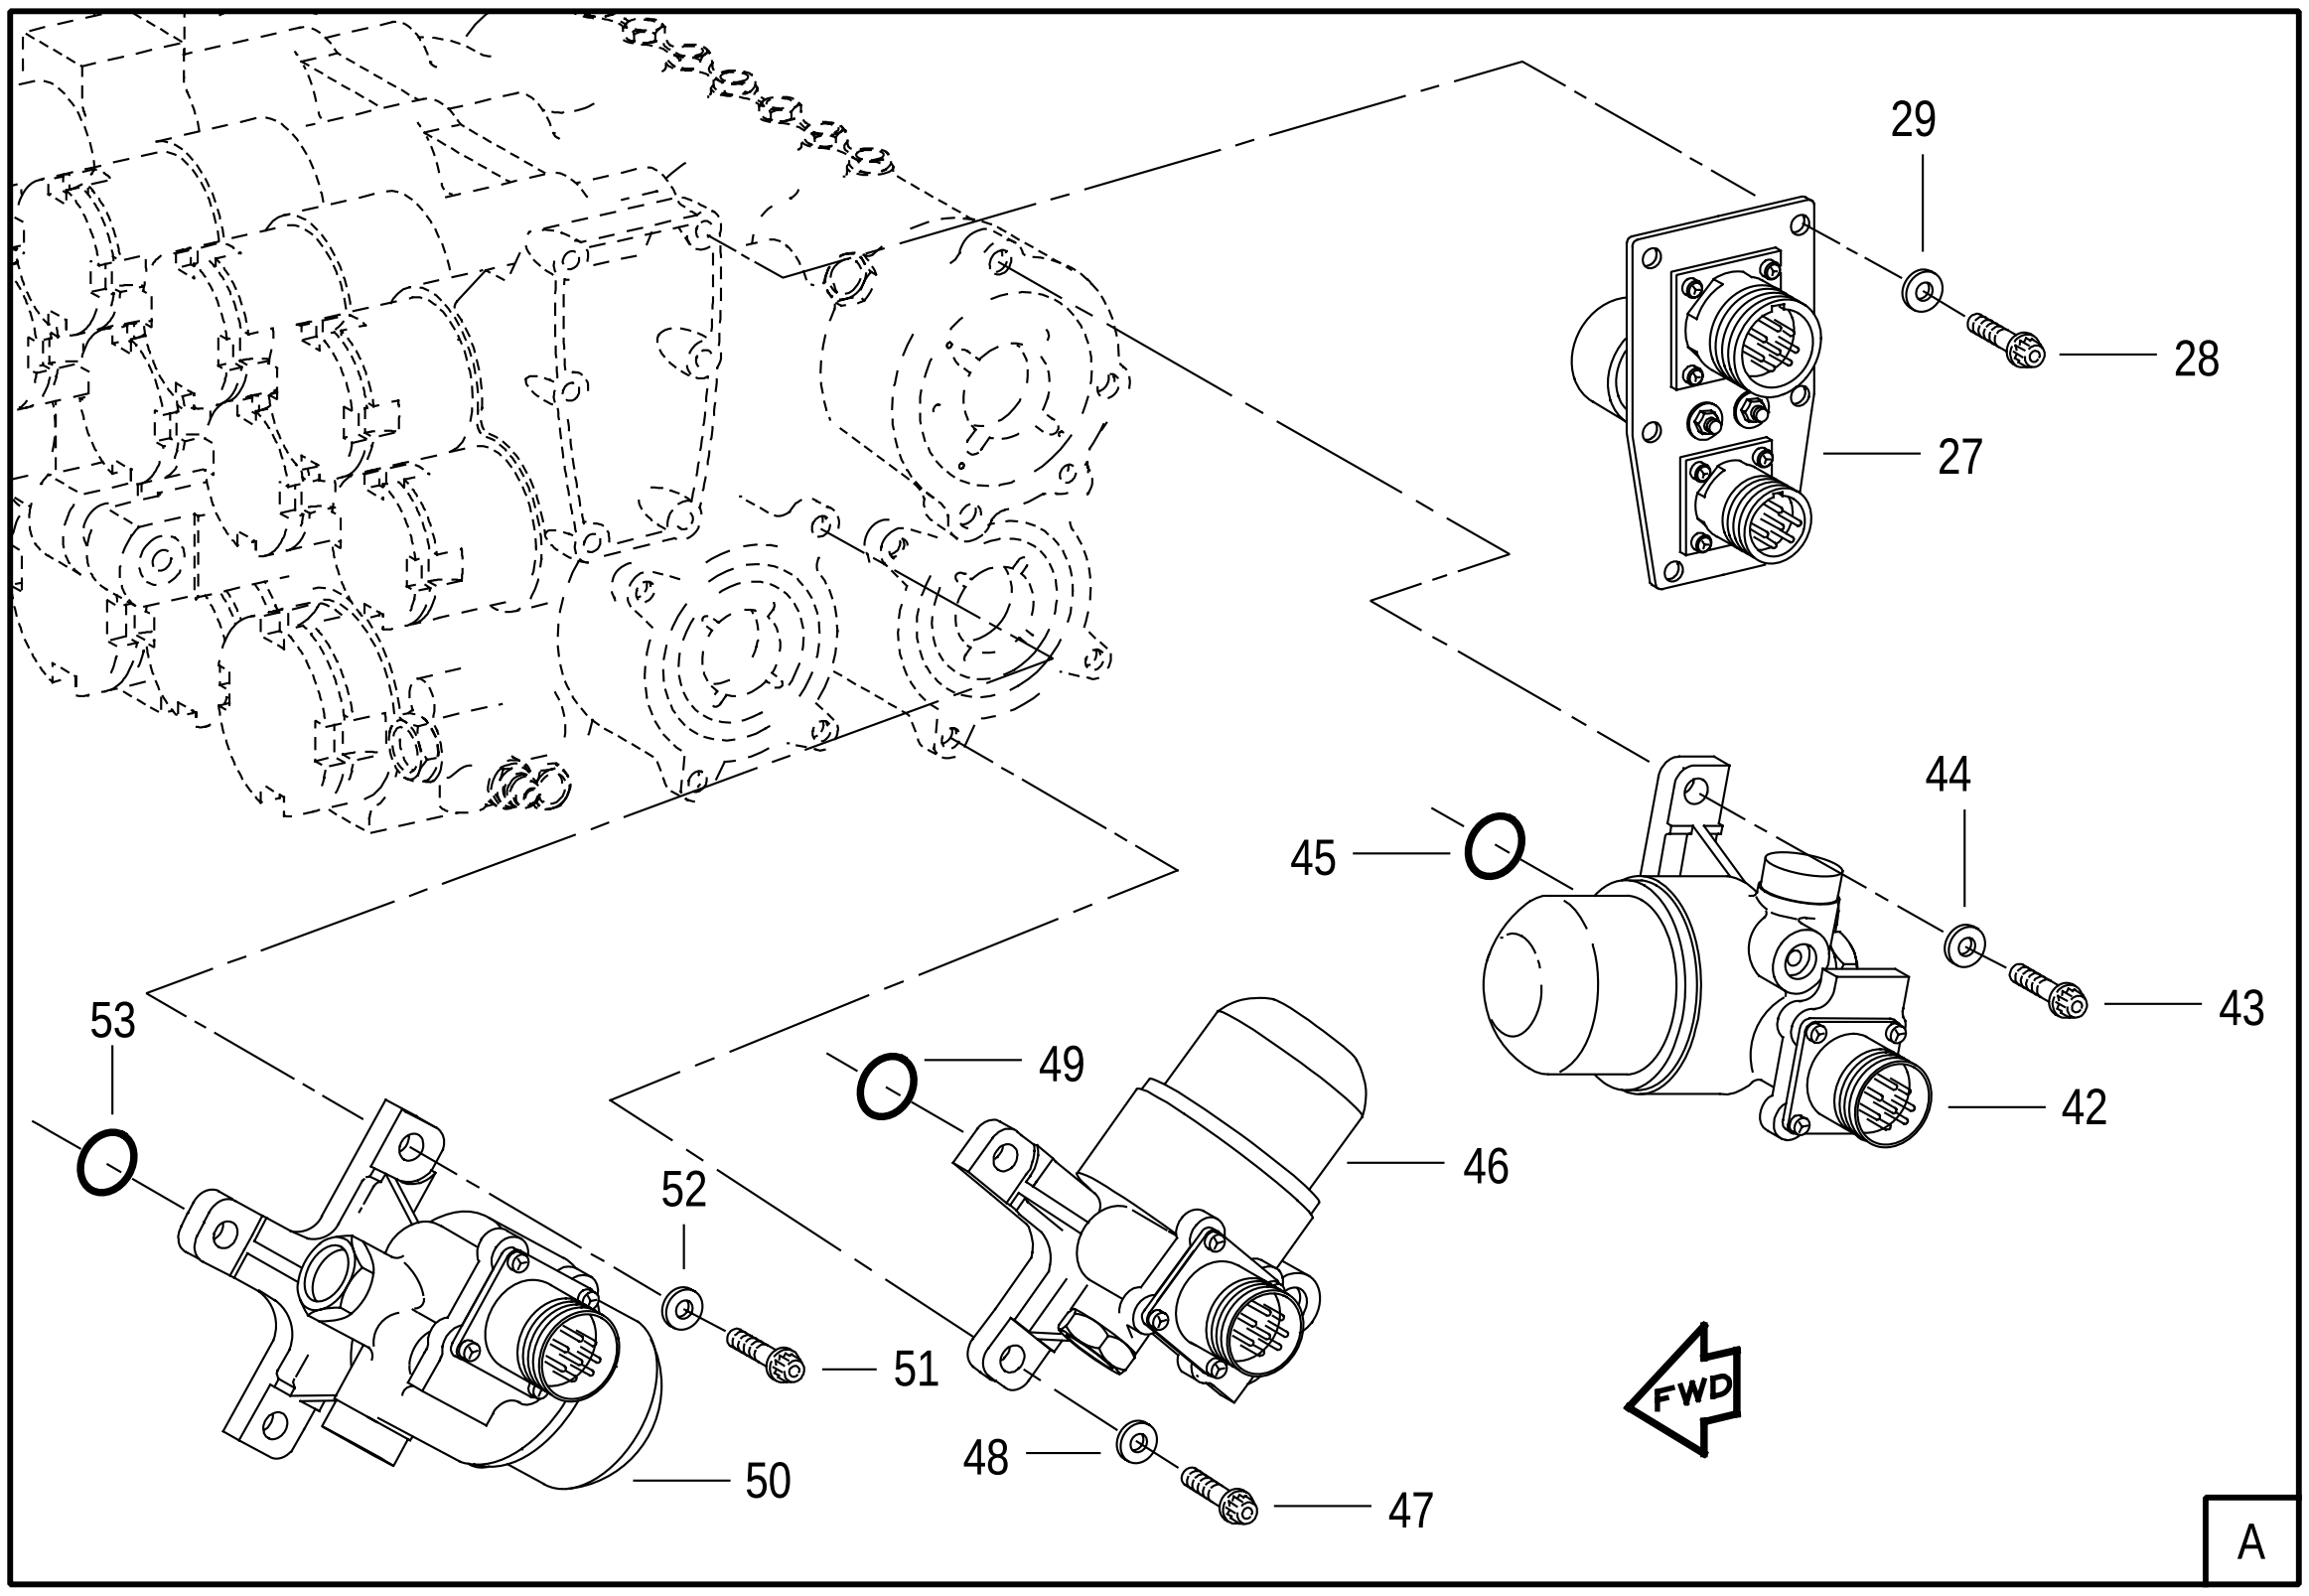

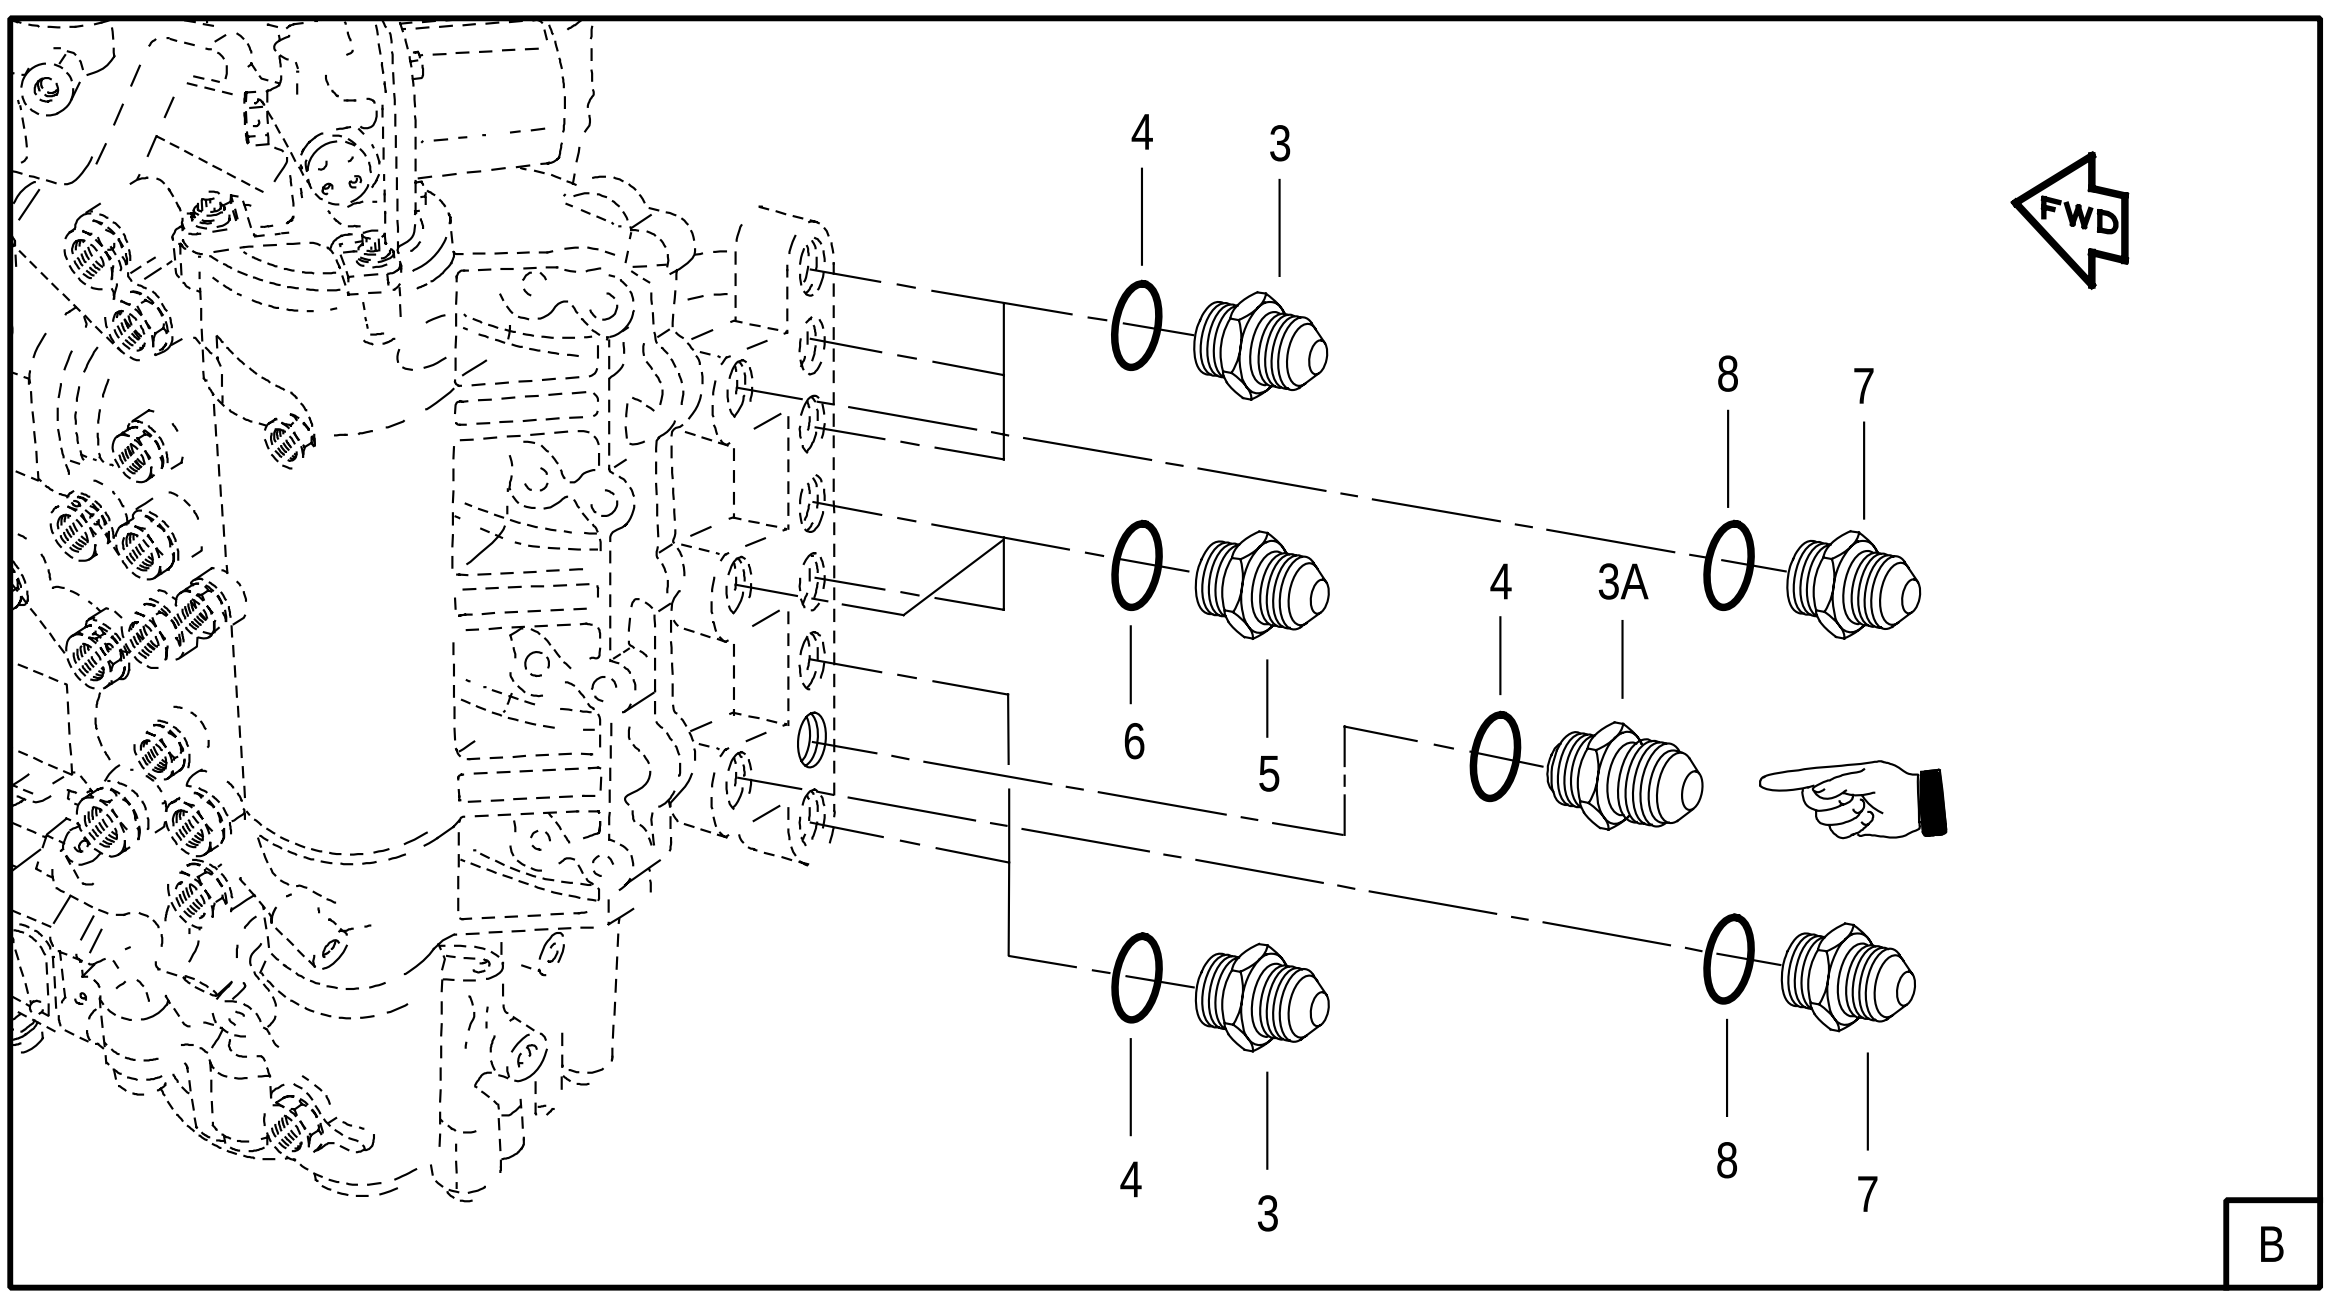

42229

FIGURE 50. AUGMENTOR FUEL CONTROL
(SHEET 2 OF 3)

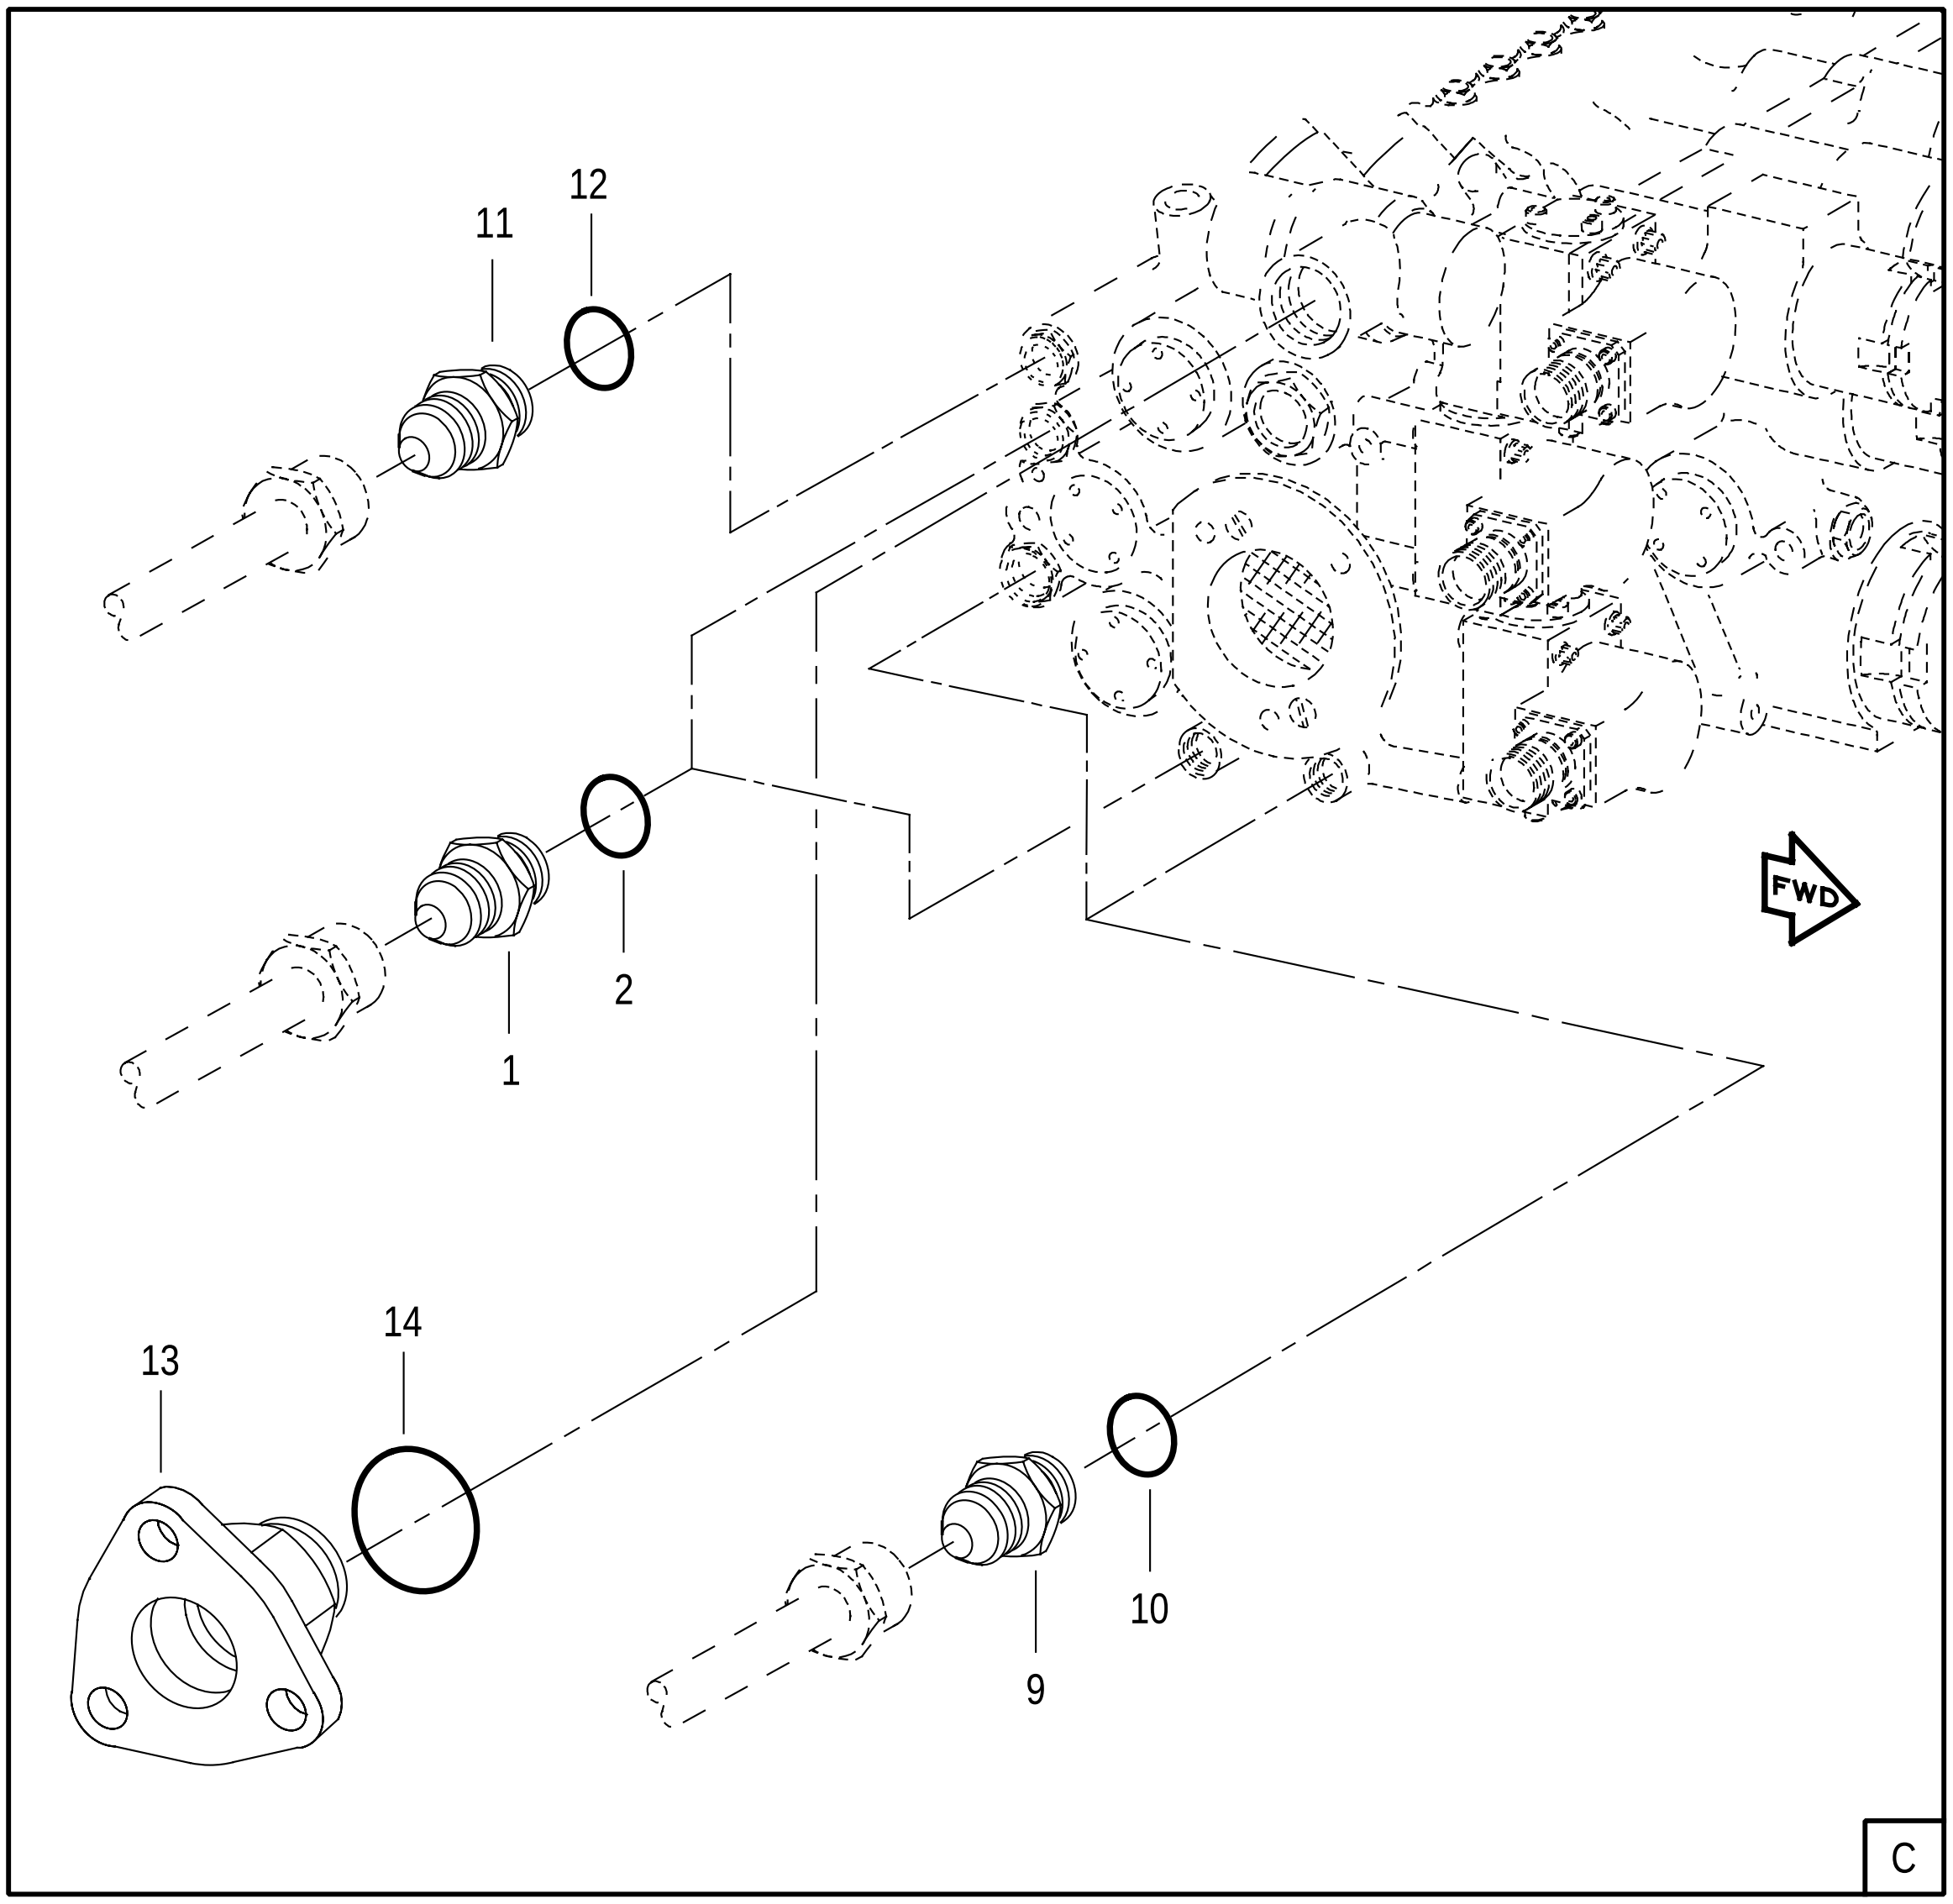

4644

FIGURE 50. AUGMENTOR FUEL CONTROL
(SHEET 3 OF 3)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
50	NO NUMBER		AUGMENTOR FUEL CONTROL . . . . SEE FIG. 38-12 FOR NHA	REF		
- 1	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.437-20UNJF-3A X 0.250 IN. TUBE OD	2		PAOZZ
- 1A	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.437-20UNJF-3A X 0.250 IN. TUBE OD	1	RC	PAOZZ
	ST2101-051	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.4375-20UNJF-3A X 0.312 IN. TUBE OD	1	RD	PAOZZ
- 2	MS9966-04	96906	. PACKING	3		PAOZZ
- 3	ST2000-05	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.500-20UNJF-3A X 0.312 IN. TUBE OD	5		PAOZZ
- 3A	ST2000-05	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.500-20UNJF-3A X 0.312 IN. TUBE OD	1	AJ	PAOZZ
	ST2101-061	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.5625-18UNJF-3A X 0.375 IN. TUBE OD	1	AK	PAOZZ
- 4	MS9966-05	96906	. PACKING	6		PAOZZ
- 5	ST2000-06	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.562-18UNJF-3A X 0.375 IN. TUBE OD	3		PAOZZ
- 6	MS9966-06	96906	. PACKING	3		PAOZZ
- 7	ST2000-08	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.750-16UNJF-3A X 0.500 IN. TUBE OD	2		PAOZZ
- 8	MS9966-08	96906	. PACKING	2		PAOZZ
- 9	ST2091-041	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.4375-20UNJF-3A X 0.250 IN. TUBE OD	2		PAOZZ
- 10	MS9966-05	96906	. PACKING	2		PAOZZ
- 11	ST2101-061	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.5625-18UNJF-3A X 0.375 IN. TUBE OD	1		PAOZZ
- 12	MS9966-05	96906	. PACKING	1		PAOZZ
- 13	4074137	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS, 3 HOLE	1		PAOZZ
- 14	MS9966-10	96906	. PACKING . . . . SUPERSEDES MS9967-018	1		PAOZZ
- 15	ST1421-22	52661	. BOLT-MACHINE . . . . 0.3125-24UNJF-3A X 1.625 IN. LONG	8		PAOZZ
- 16	MS9549-11	96906	. WASHER	8		PAOZZ
- 17	4075966-01	52661	. BRACKET-LOOP CLAMP, ASSY OF	2		PAOZZ
- 18	4069875	52661	. MANIFOLD-FUEL CONTROL OUTLET, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 19	ST1076-25	52661	.. INSERT-SCREW THREAD, SELF-LOCKING . . . . 0.3125-24 X 0.469 IN. NOMINAL LENGTH	8		PAFZZ
- 20	4069879	52661	.. BUSHING-SLEEVE, FLANGED . . . . 0.313 X 0.38025 X 0.280	4		PAFZZ
- 21	4075770	52661	. GASKET OPTION . . . . SEE OPTION TABLE	1		PAOZZ
- 22	4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	4		PAOZZ
- 23	4060146	52661	. BOLT-SHOULDER, DOUBLE HEX . . . . 0.250-28UNJF-3A X 2.385 IN. LONG	1		PAOZZ
- 24	4062062	52661	. BOLT-SHOULDER, DOUBLE HEX . . . . 0.250-28UNJF-3A X 1.680 IN. LONG	3	AE	PAOZZ
	4080202	52661	. BOLT-SHOULDER, DOUBLE HEX . . . . 0.250-28UNJF-3A X 1.680 IN. LONG	3	AF	PAOZZ
- 25	4069877	52661	. LINK-FUEL CONTROL SUPPORT, ASSY OF	1		PAOZZ
- 26	790100 #	3L184	. FUEL CONTROL-AUGMENTOR . . . . P&WA PART NO. 4070290 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
R - 27	798840-1	3L184	.. RELAY ASSY-IGNITION	1		PAOZZ
- 28	69336-254	3L184	.. BOLT-MACHINE, 12 POINT (AP)	6		PAOZZ
- 29	MS9768-09	96906	.. WASHER (AP)	6		PAOZZ
- 30	788374-2	3L184	.. SERVOVALVE-ELECTRO HYDRAULIC, SEGMENT . SEQUENCING	1		PAOLD
- 31	69336-262	3L184	.. BOLT-MACHINE, 12 POINT (AP)	4		PAOZZ
- 32	NAS620C10L	80205	.. WASHER (AP)	4		PAOZZ
- 33	M25988/2-011	81349	.. PACKING	3		PAOZZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	50 - 34		788373-2	3L184	.. SERVOVALVE-ELECTRO HYDRAULIC, DUCT METERING	1		PAOLD
	- 35		69336-262	3L184	.. BOLT-MACHINE, 12 POINT (AP)	4		PAOZZ
	- 36		NAS620C10L	80205	.. WASHER (AP)	4		PAOZZ
	- 37		M25988/2-011	81349	.. PACKING	4		PAOZZ
	- 38		788372-2	3L184	.. SERVOVALVE-ELECTRO HYDRAULIC, CORE METERING VALVE	1		PAOLD
	- 39		69336-262	3L184	.. BOLT-MACHINE, 12 POINT (AP)	4		PAOZZ
	- 40		NAS620C10L	80205	.. WASHER (AP)	4		PAOZZ
	- 41		M25988/2-011	81349	.. PACKING	4		PAOZZ
	- 42		801032-2	3L184	.. RESOLVER ASSY-CORE METERING VALVE	1		PAOLD
	- 43		69336-256	3L184	.. BOLT-MACHINE, 12 POINT (AP)	3		PAOZZ
	- 44		MS9768-09	96906	.. WASHER (AP)	3		PAOZZ
	- 45		M83248/1-20	81349	.. PACKING	1		PAOZZ
	- 46		801032-1	3L184	.. RESOLVER ASSY-DUCT METERING VALVE	1		PAOLD
	- 47		69336-256	3L184	.. BOLT-MACHINE, 12 POINT (AP)	3		PAOZZ
	- 48		MS9768-09	96906	.. WASHER (AP)	3		PAOZZ
	- 49		M83248/1-20	81349	.. PACKING	1		PAOZZ
	- 50		801032-3	3L184	.. RESOLVER ASSY-SEGMENT SELECT	1		PAOLD
	- 51		69336-256	3L184	.. BOLT-MACHINE, 12 POINT (AP)	3		PAOZZ
	- 52		MS9768-09	96906	.. WASHER (AP)	3		PAOZZ
	- 53		M83248/1-20	81349	.. PACKING	1		PAOZZ
	- 54		4023116	52661	. NUT OPTION SEE OPTION TABLE	12		PAOZZ
	- 55		4075231	52661	. CLEVIS-FAN DUCT	1		PAOZZ
	- 56		4075230	52661	. CLEVIS-FAN DUCT, AUGMENTOR FUEL MANIFOLD	1		PAOZZ
	- 57		4075248	52661	. BRACKET-FAN DUCT, AUGMENTOR MANIFOLD	1		PAOZZ
R R	- 58	<	GS23962-1	73030	CLOSURE PARTS KIT SEE FIG. 50A FOR DETAIL PARTS	1		PAFZZ

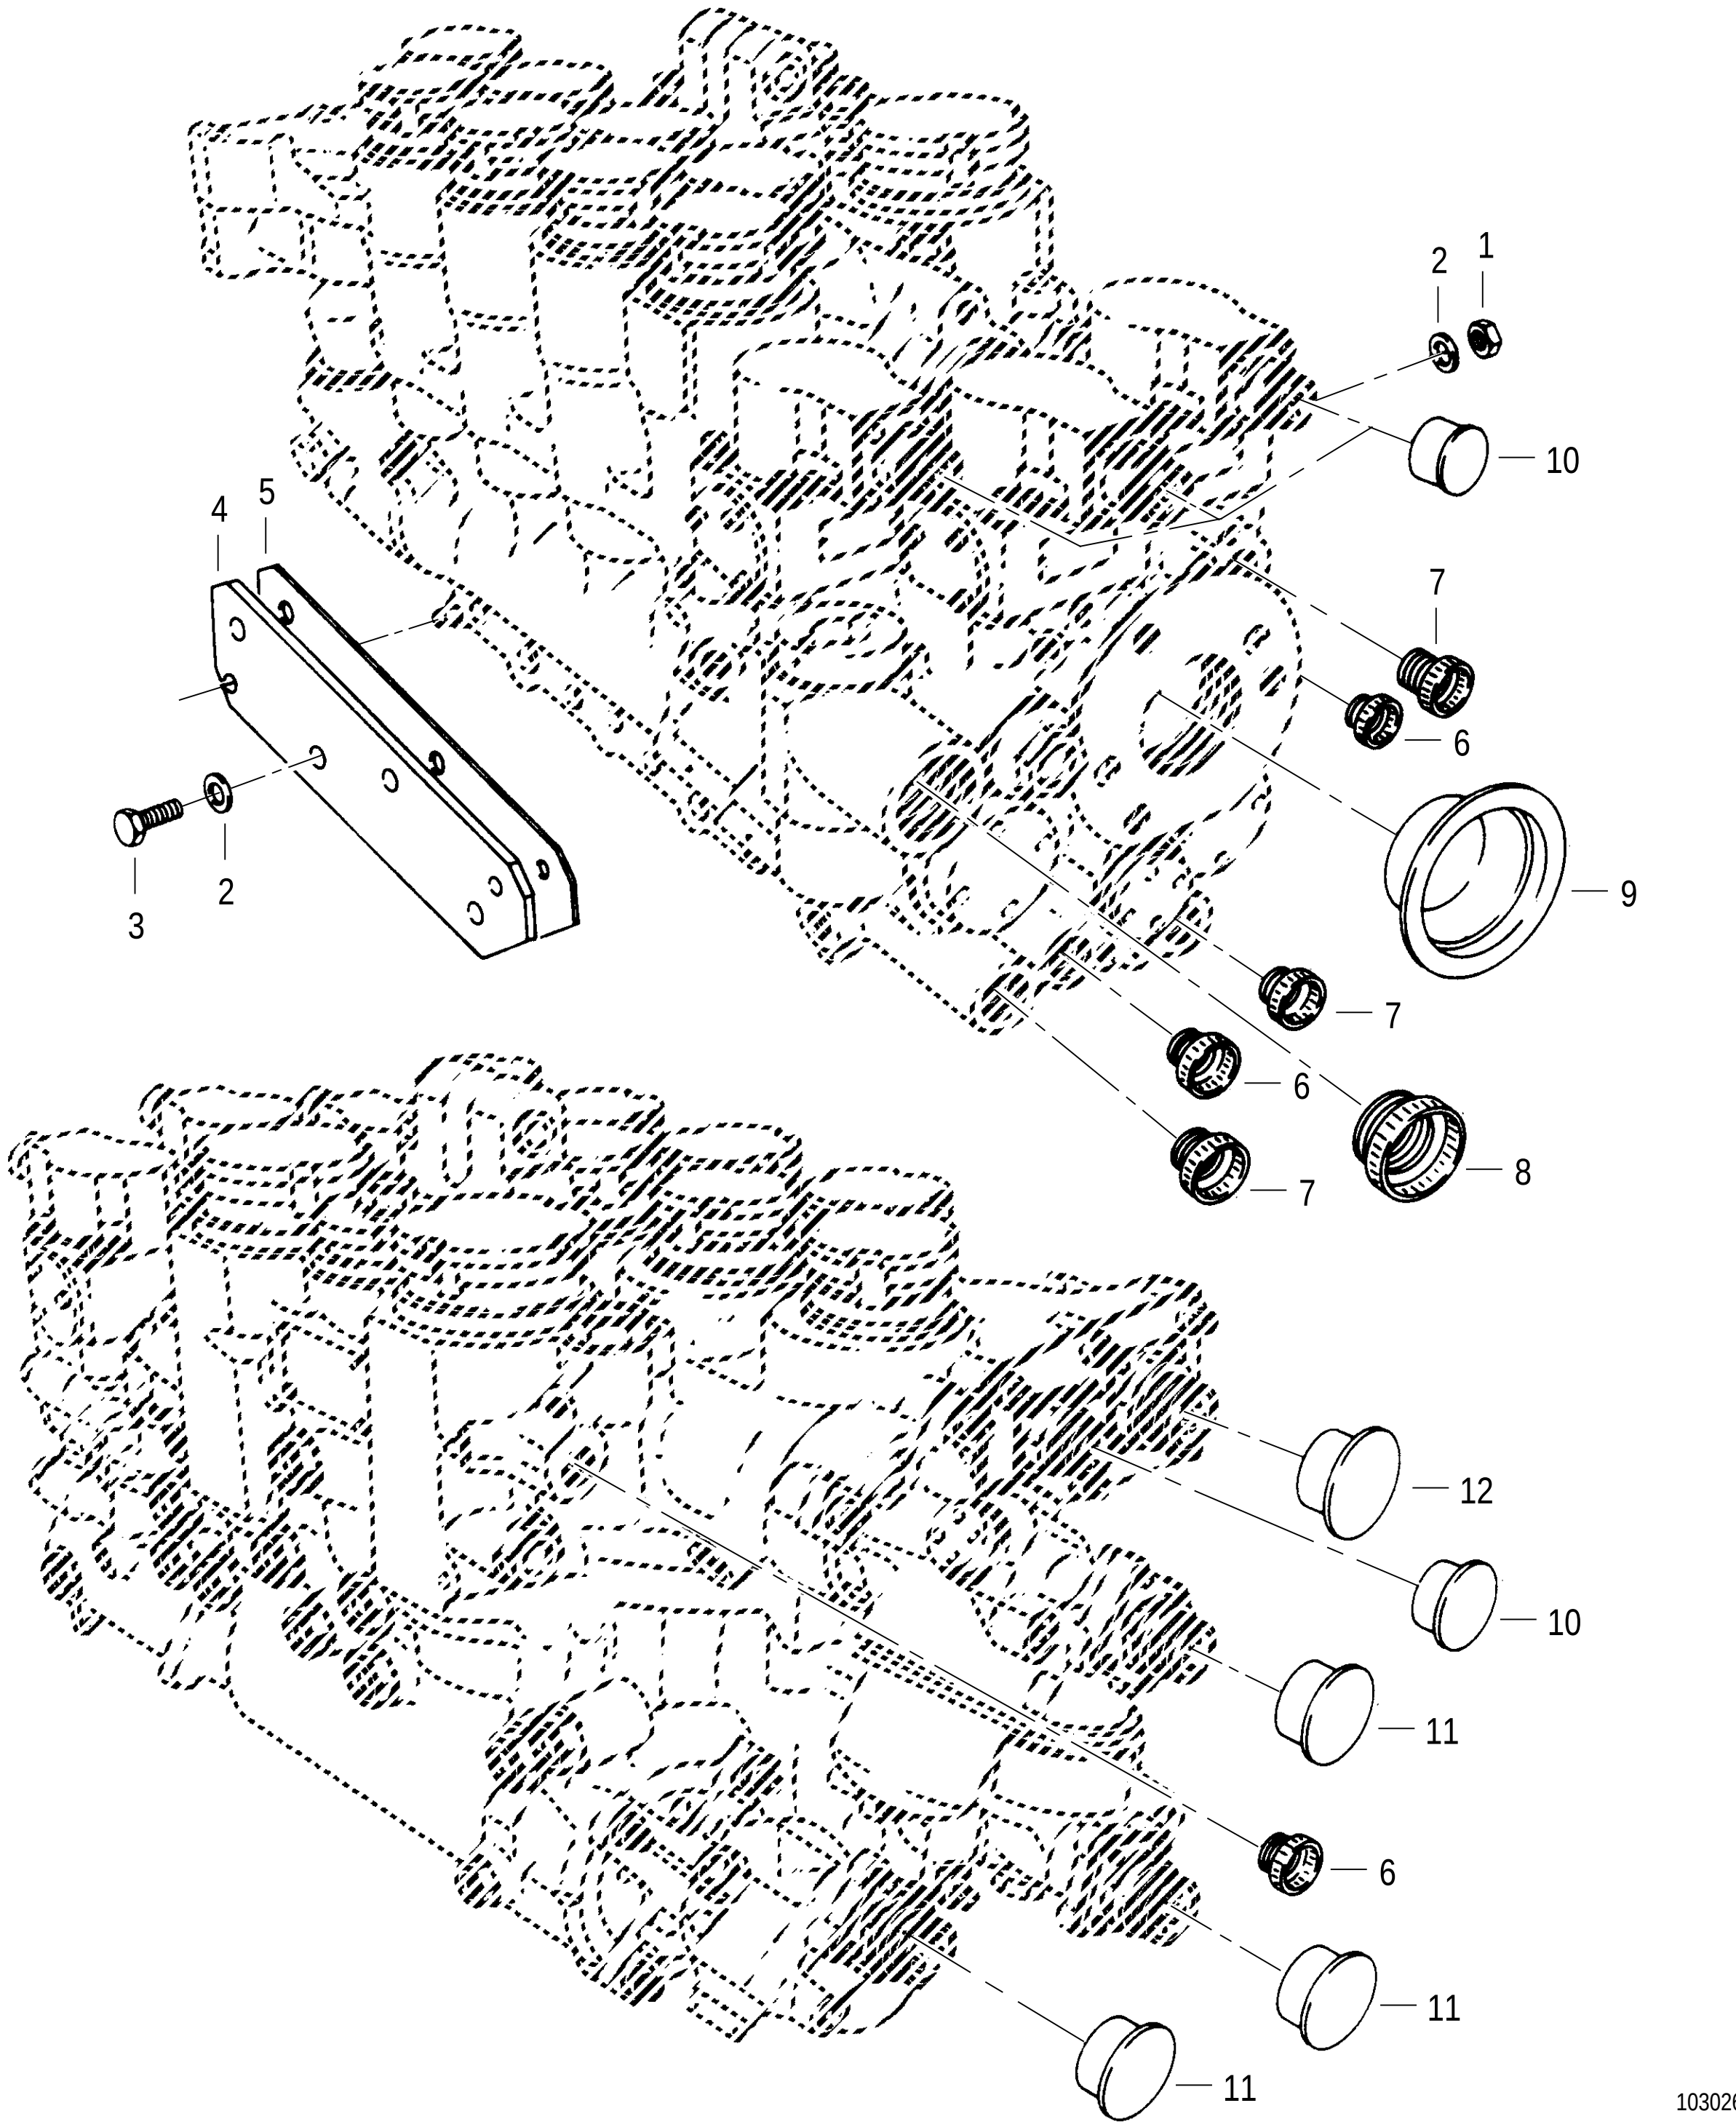


FIGURE 50A. CLOSURE PARTS KIT

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	50A	GS23962-1	73030	CLOSURE PARTS KIT	1		PAFZZ
R				SEE FIG. 50-58 FOR NHA			
R	- 1	AN315-5R	88044	. NUT	4		PAFZZ
R	- 2	AN960C516L	88044	. WASHER	8		PAFZZ
R	- 3	MS9491-27	96906	. BOLT	4		KF
R	- 4	GS22282-1	73030	. PLATE-SHIPPING	1		KF
R	- 5	GS22283-1	73030	. GASKET-SHIPPING	1		KF
R	- 6	GS10414-3	73030	. PLUG	3		PAFZZ
R	- 7	GS10414-4	73030	. PLUG	3		PAFZZ
R	- 8	GS10414-8	73030	. PLUG	1		KF
R	- 9	GS10431-30	73030	. CAP-PROTECTIVE	1		PAFZZ
R	- 10	GS10578-3	73030	. CAP	4		KF
R	- 11	GS10578-4	73030	. CAP	3		PAFZZ
R	- 12	GS10578-7	73030	. CAP	1		KF

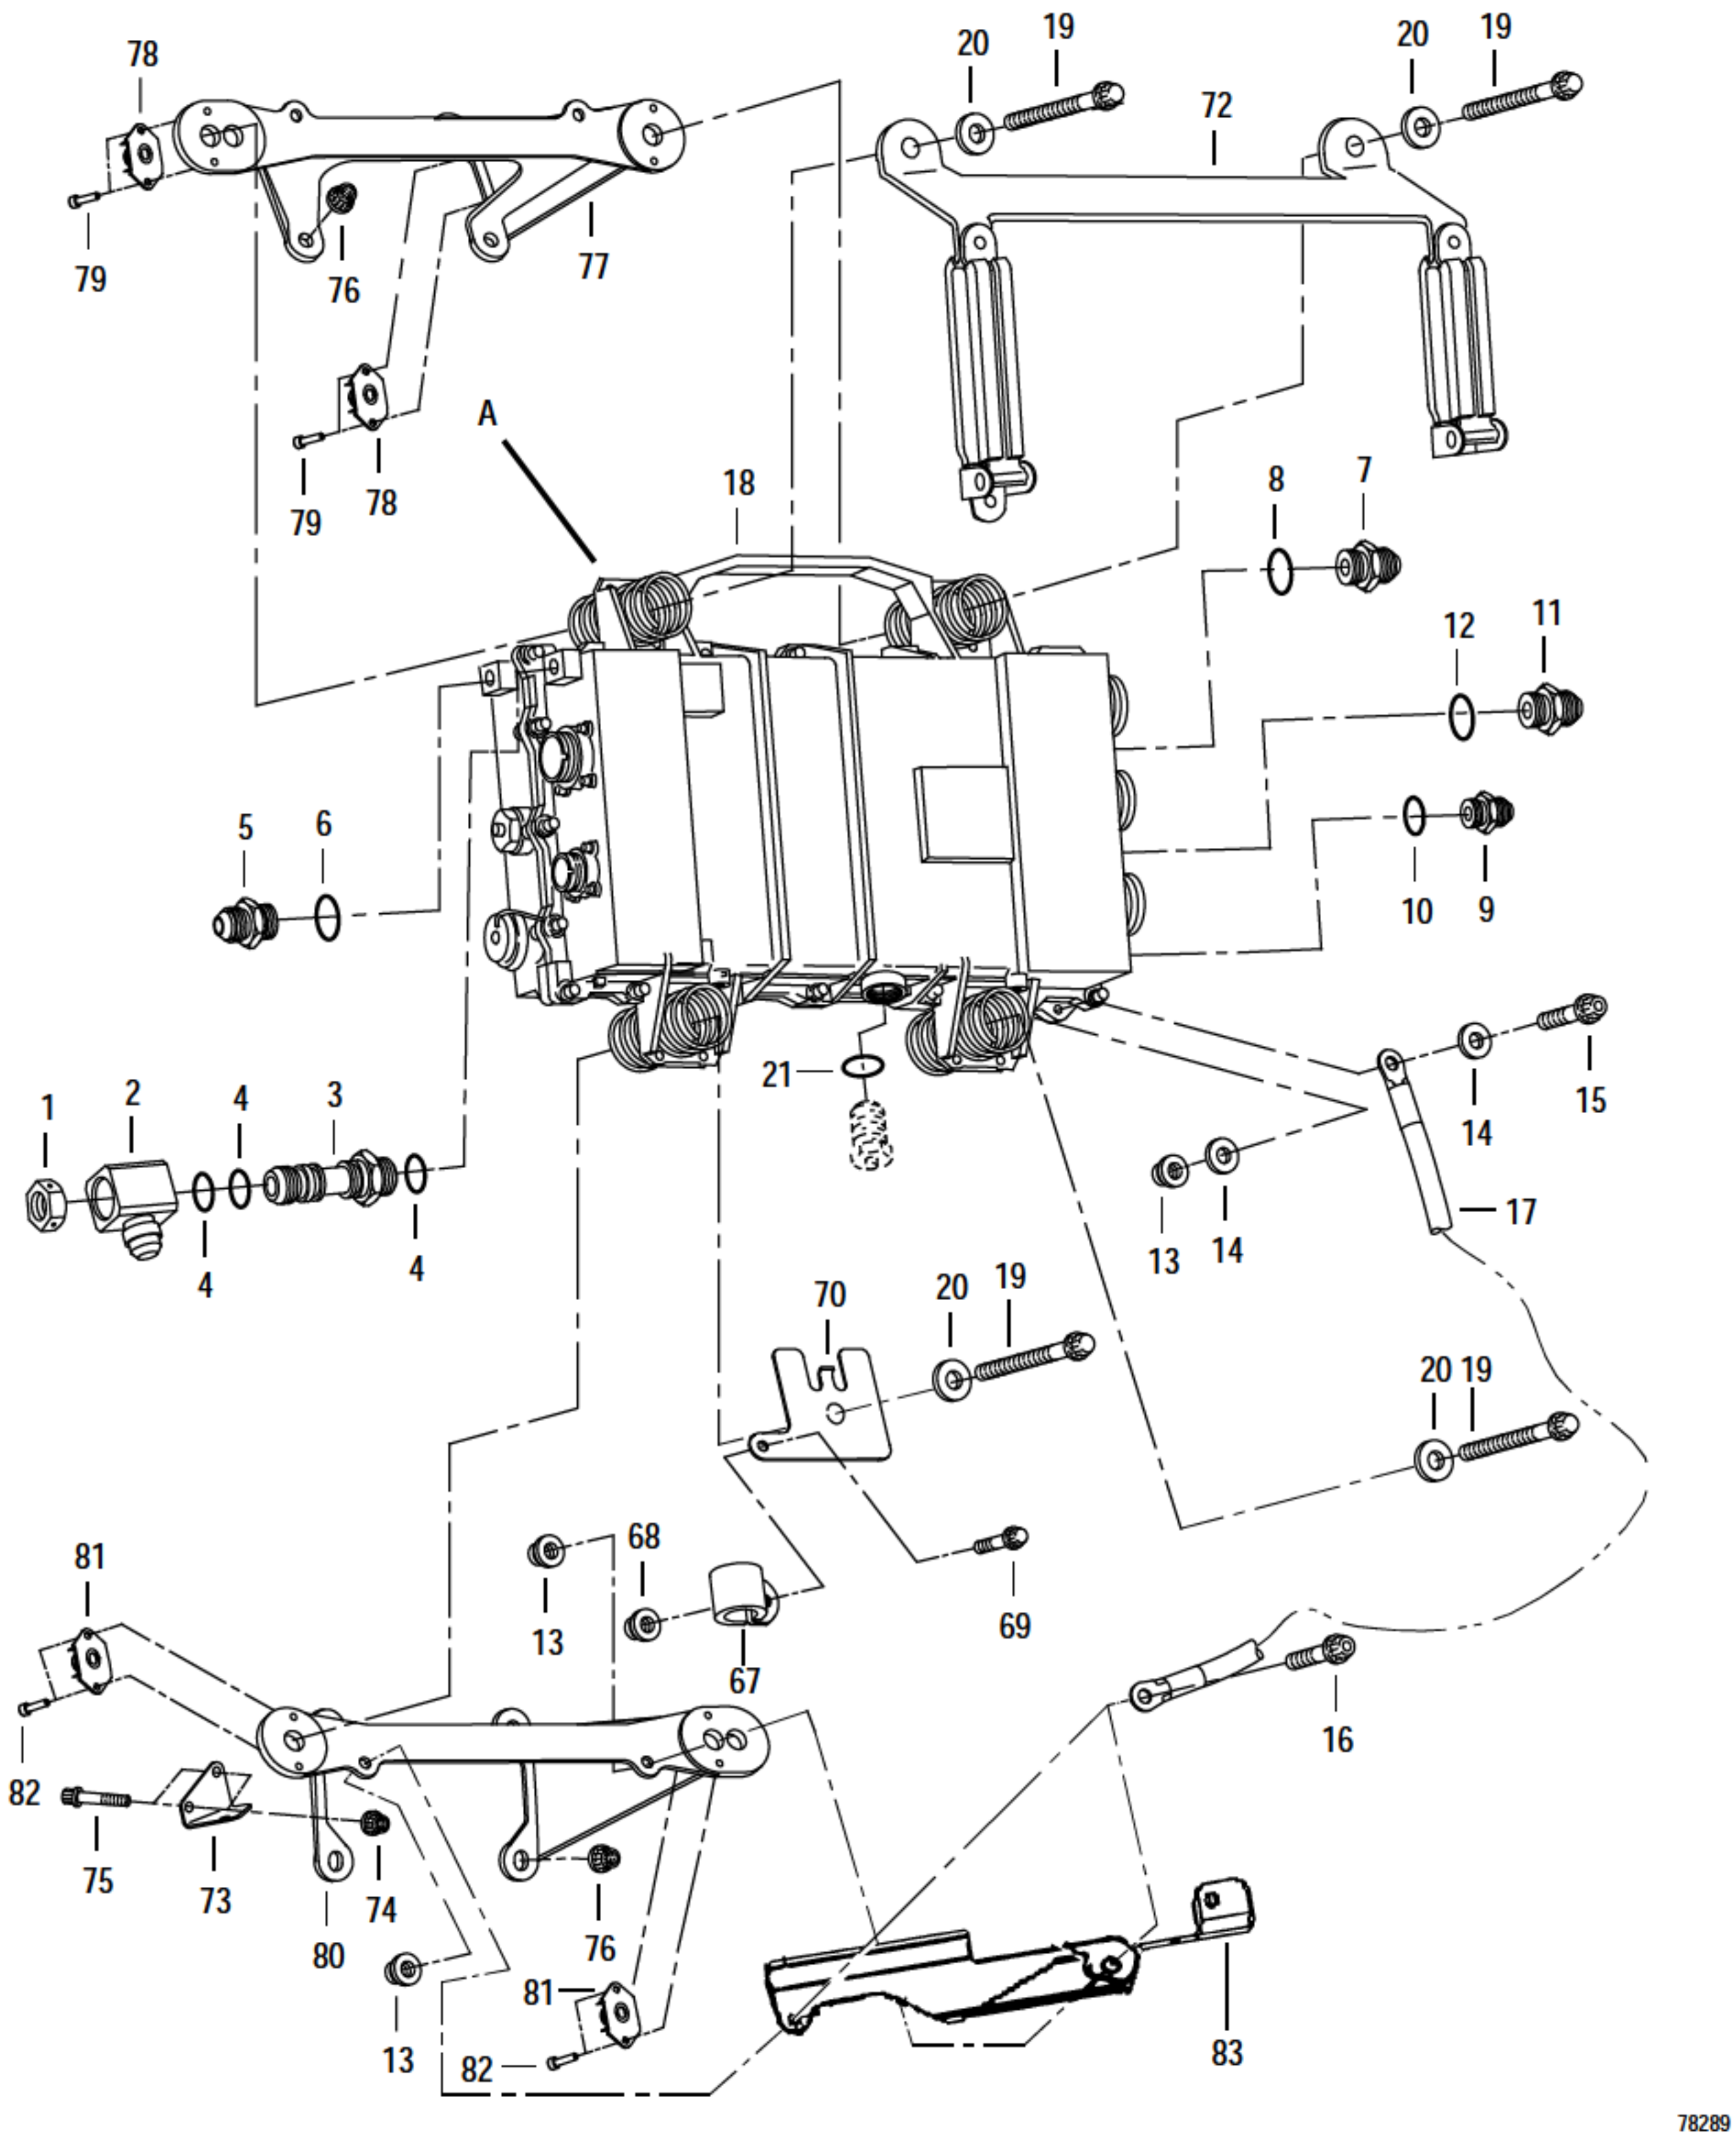


FIGURE 51. DIGITAL ELECTRONIC ENGINE CONTROL
(SHEET 1 OF 4)

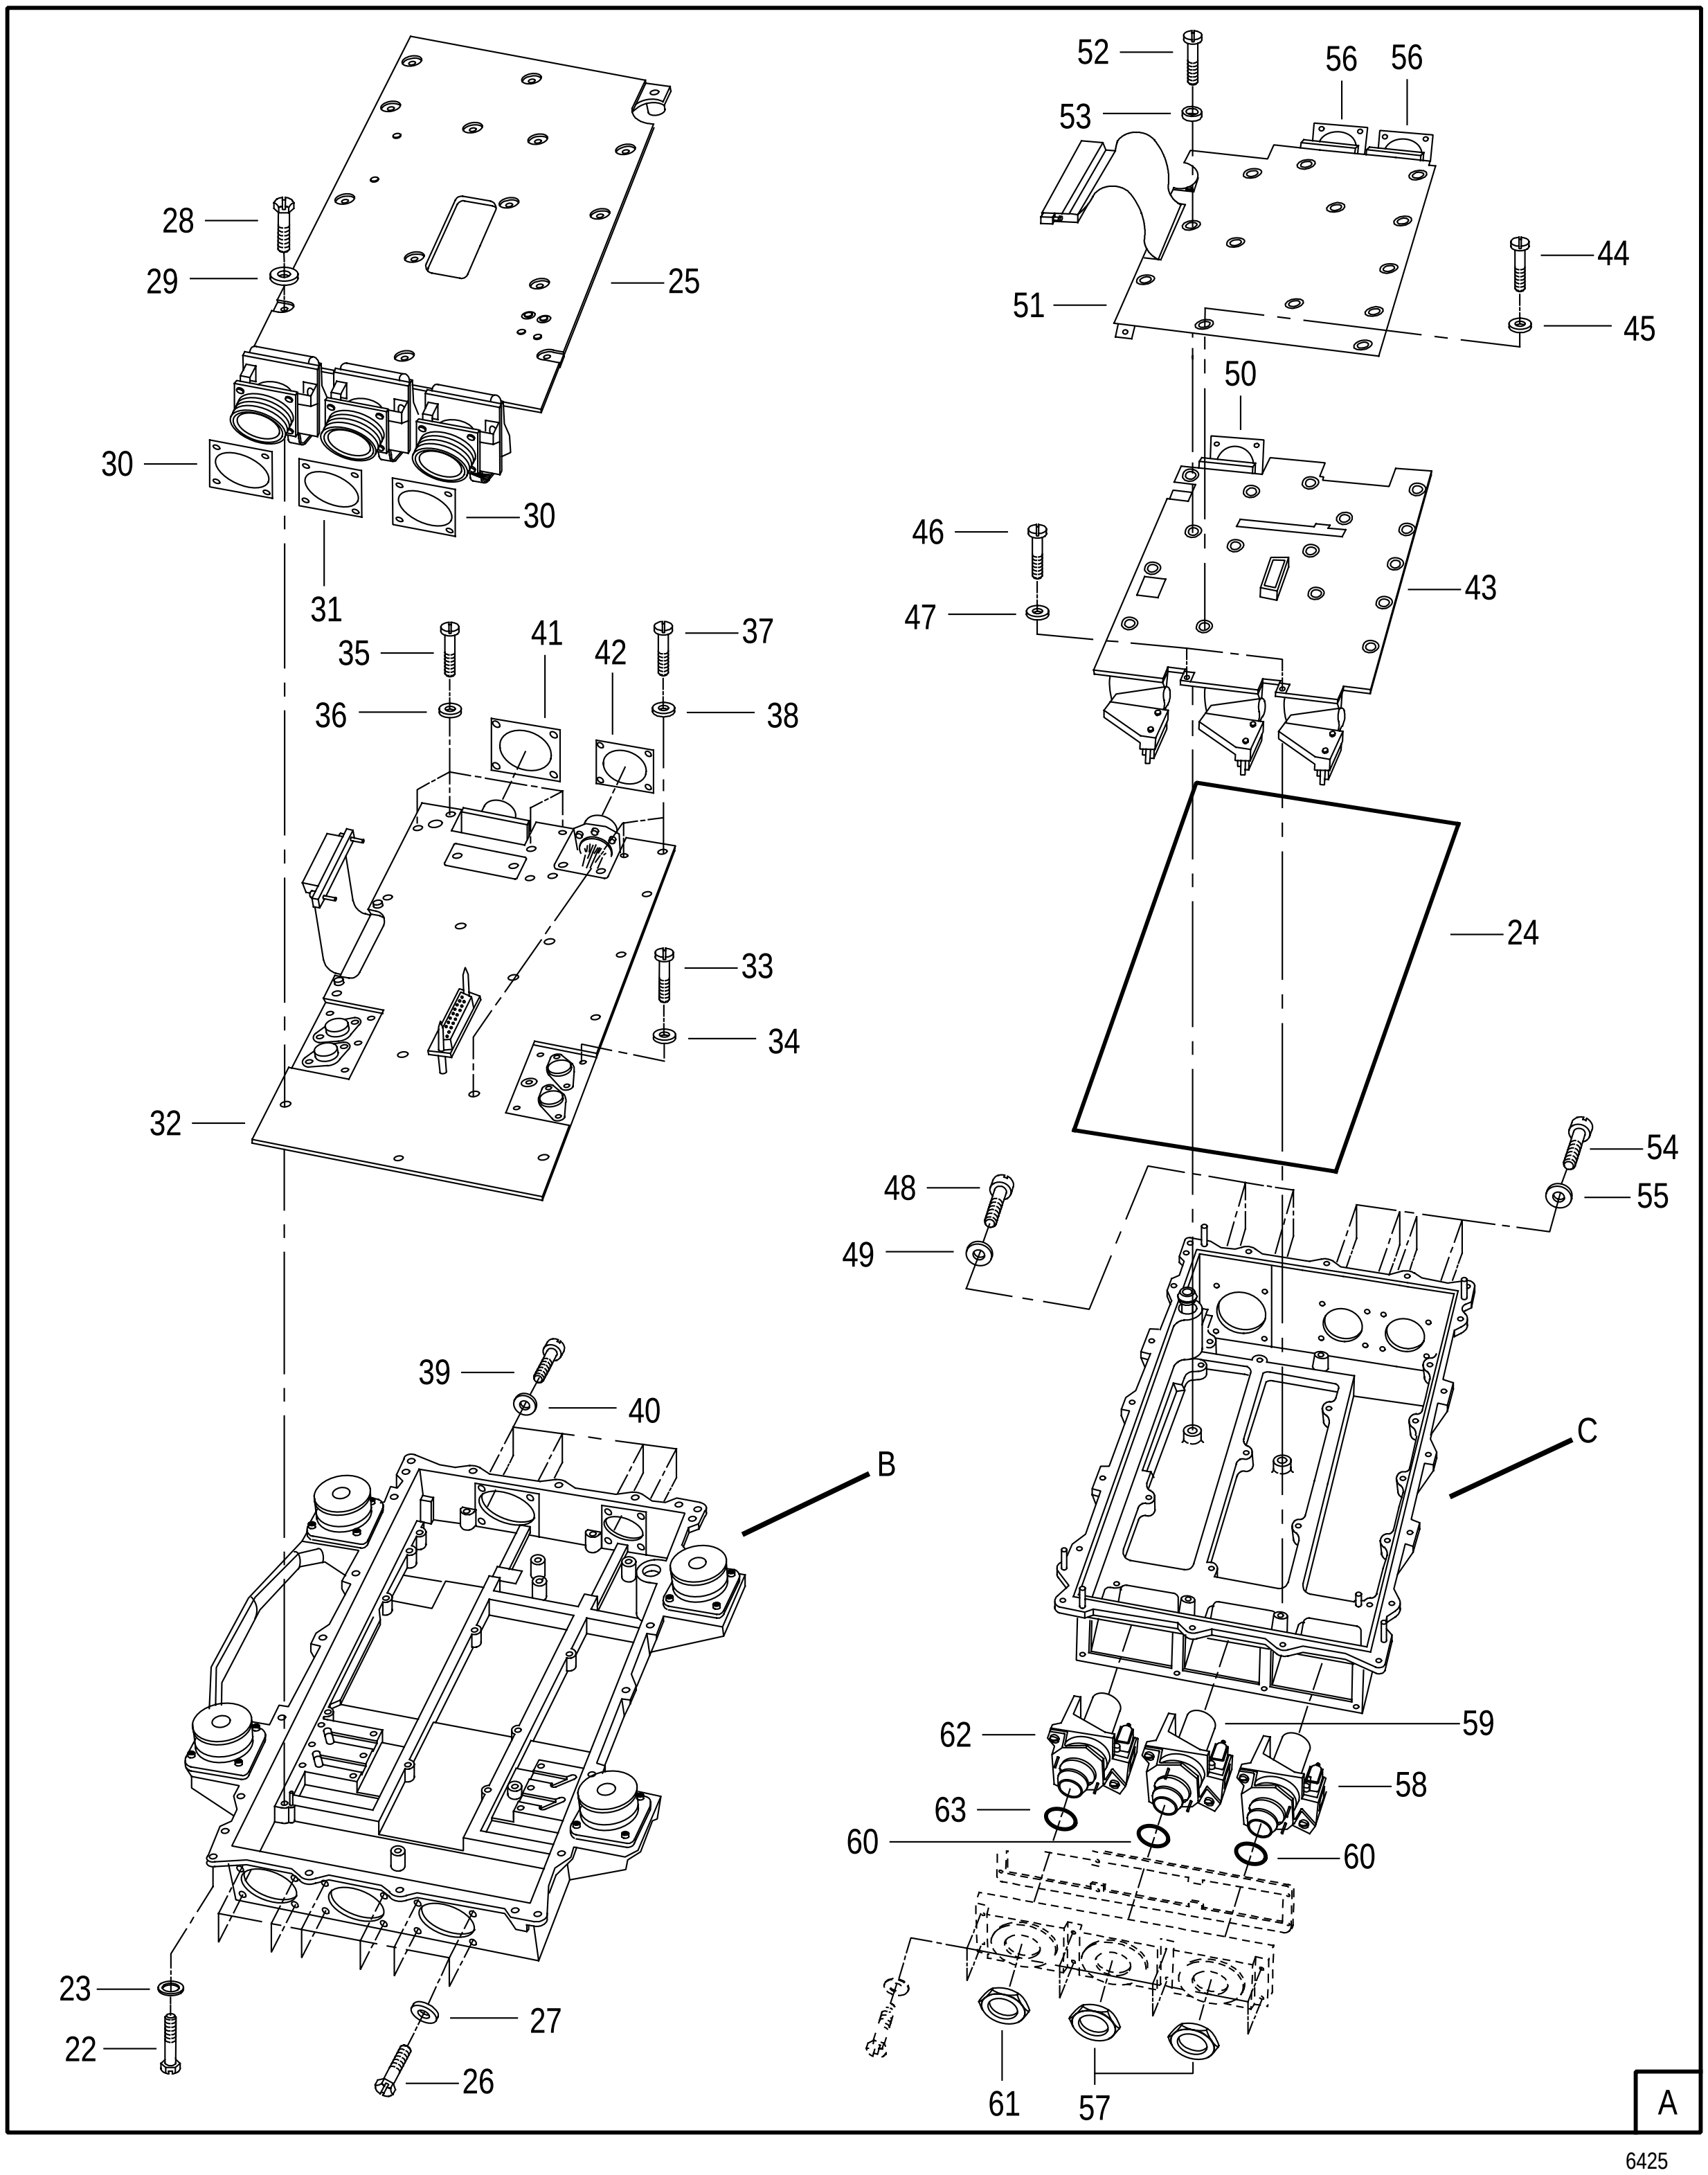


FIGURE 51. DIGITAL ELECTRONIC ENGINE CONTROL
(SHEET 2 OF 4)

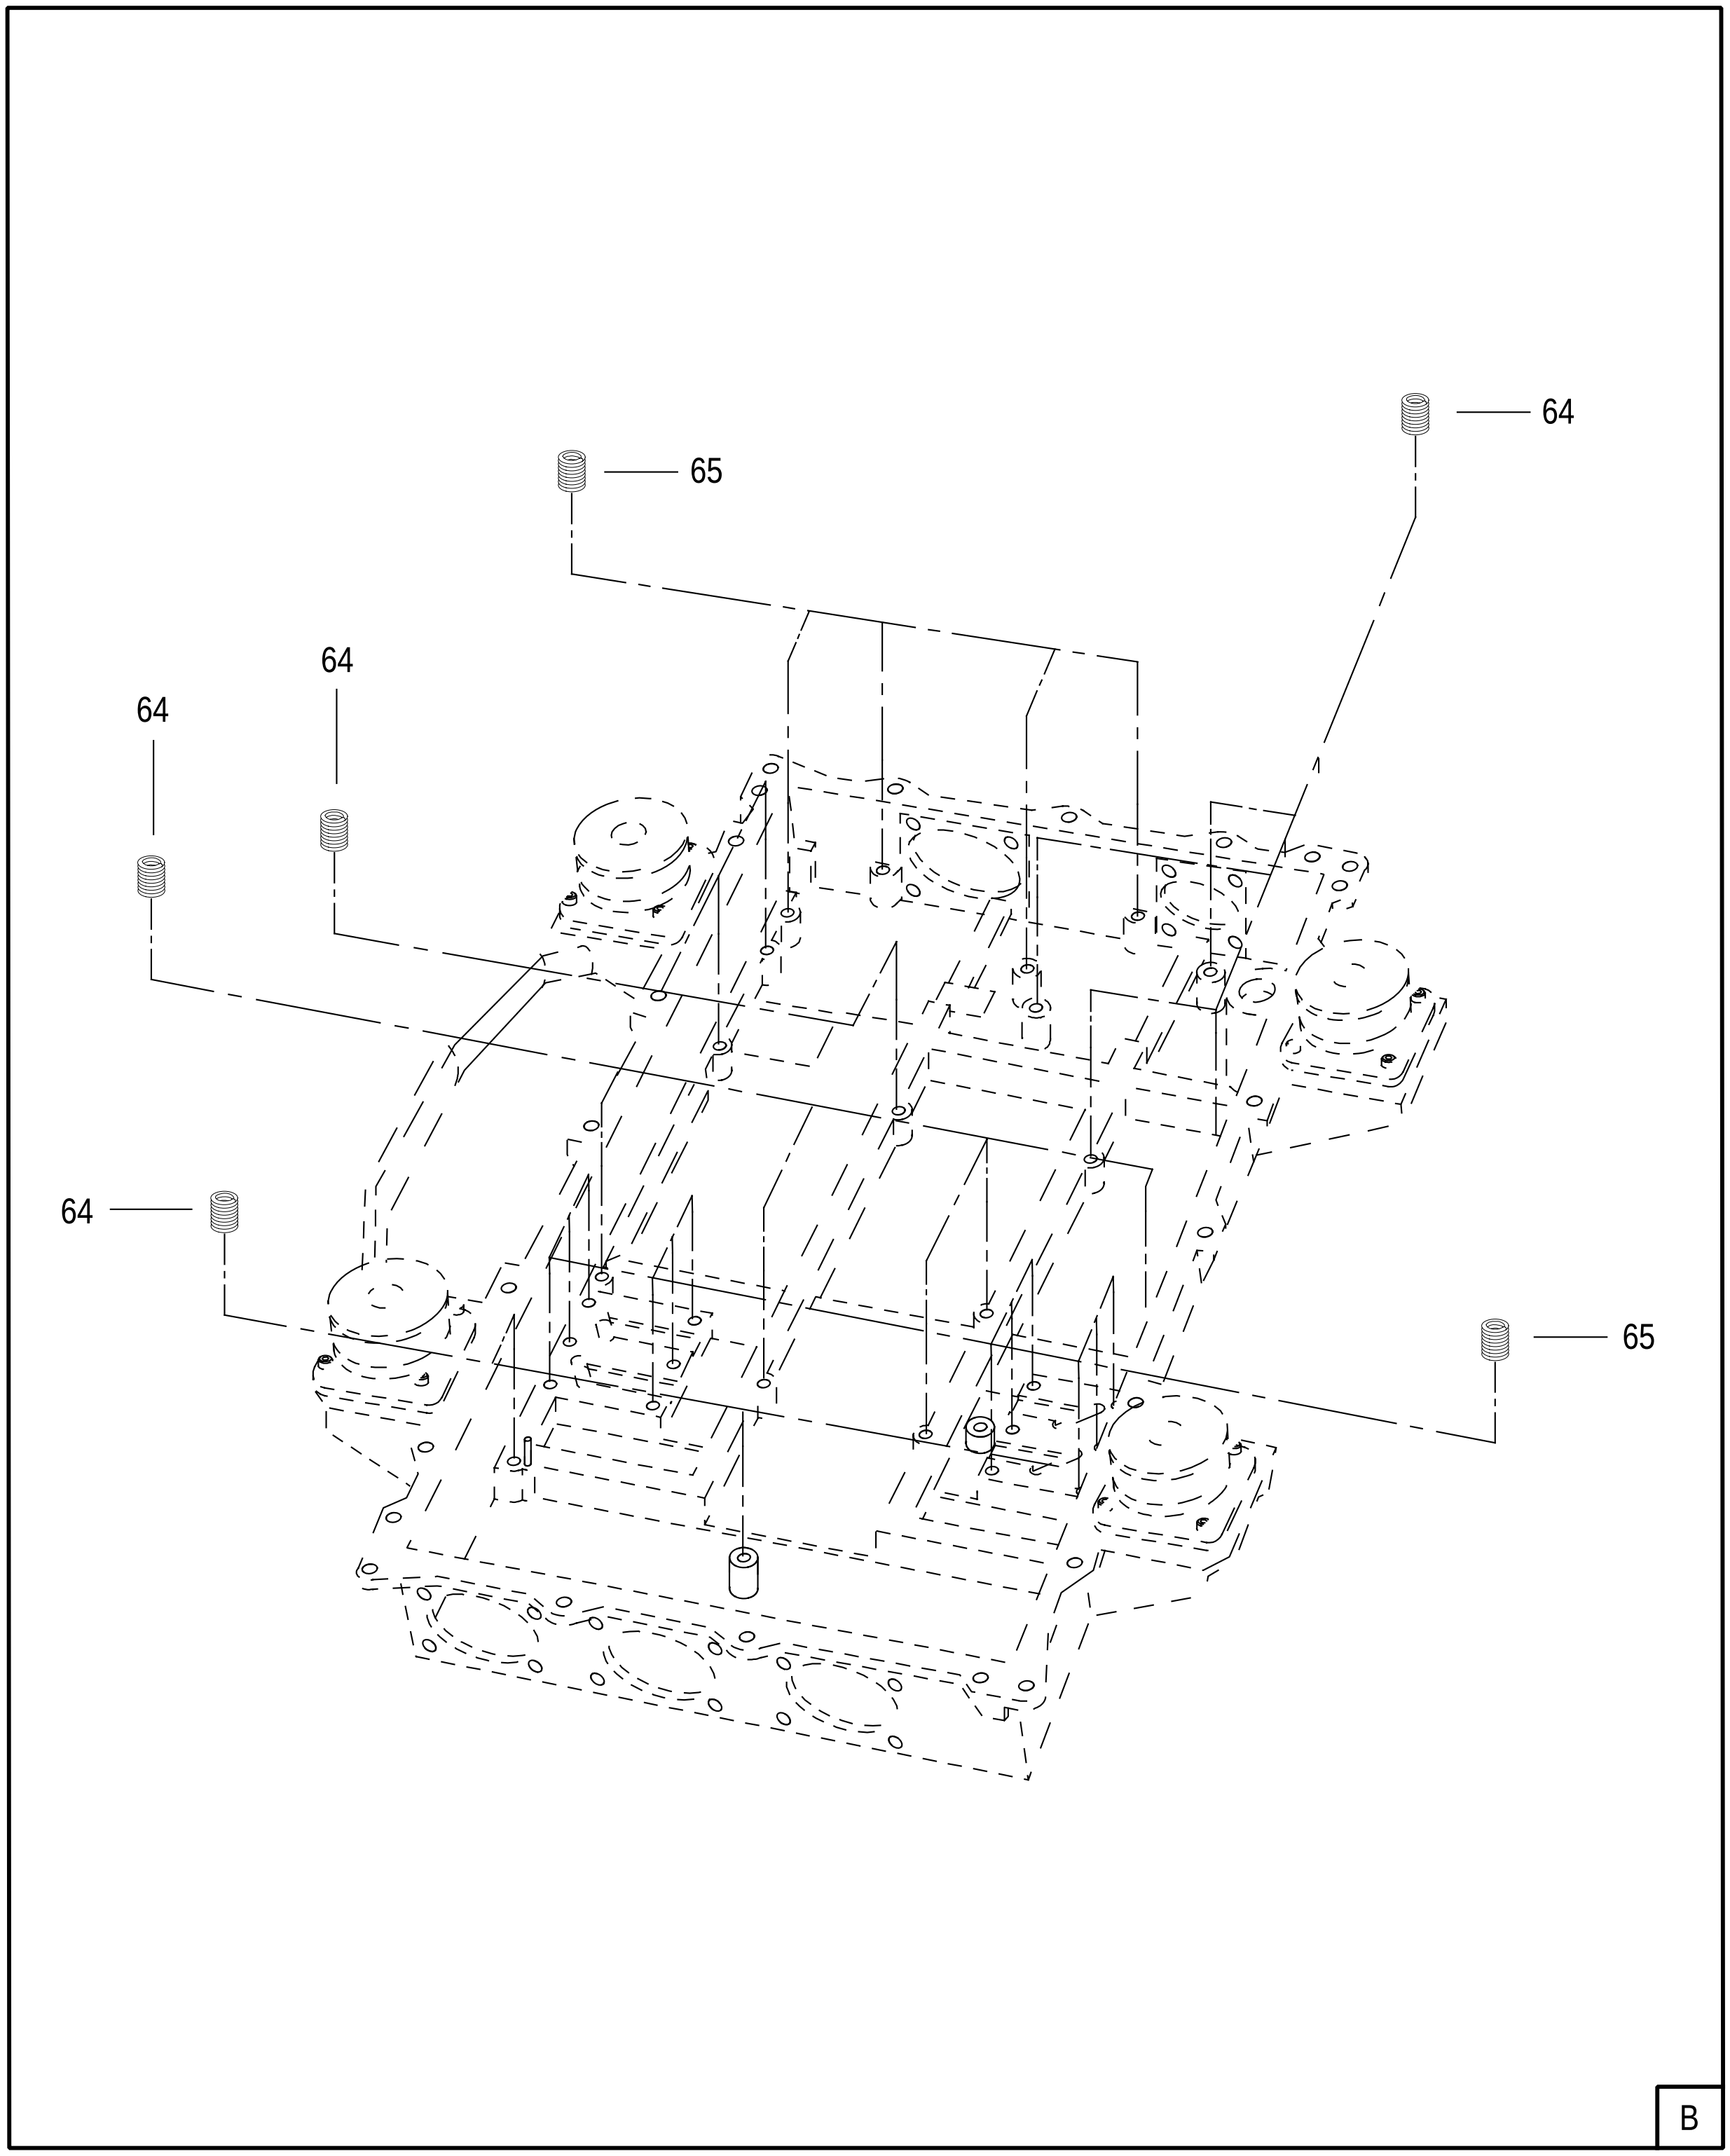


FIGURE 51. DIGITAL ELECTRONIC ENGINE CONTROL
(SHEET 3 OF 4)

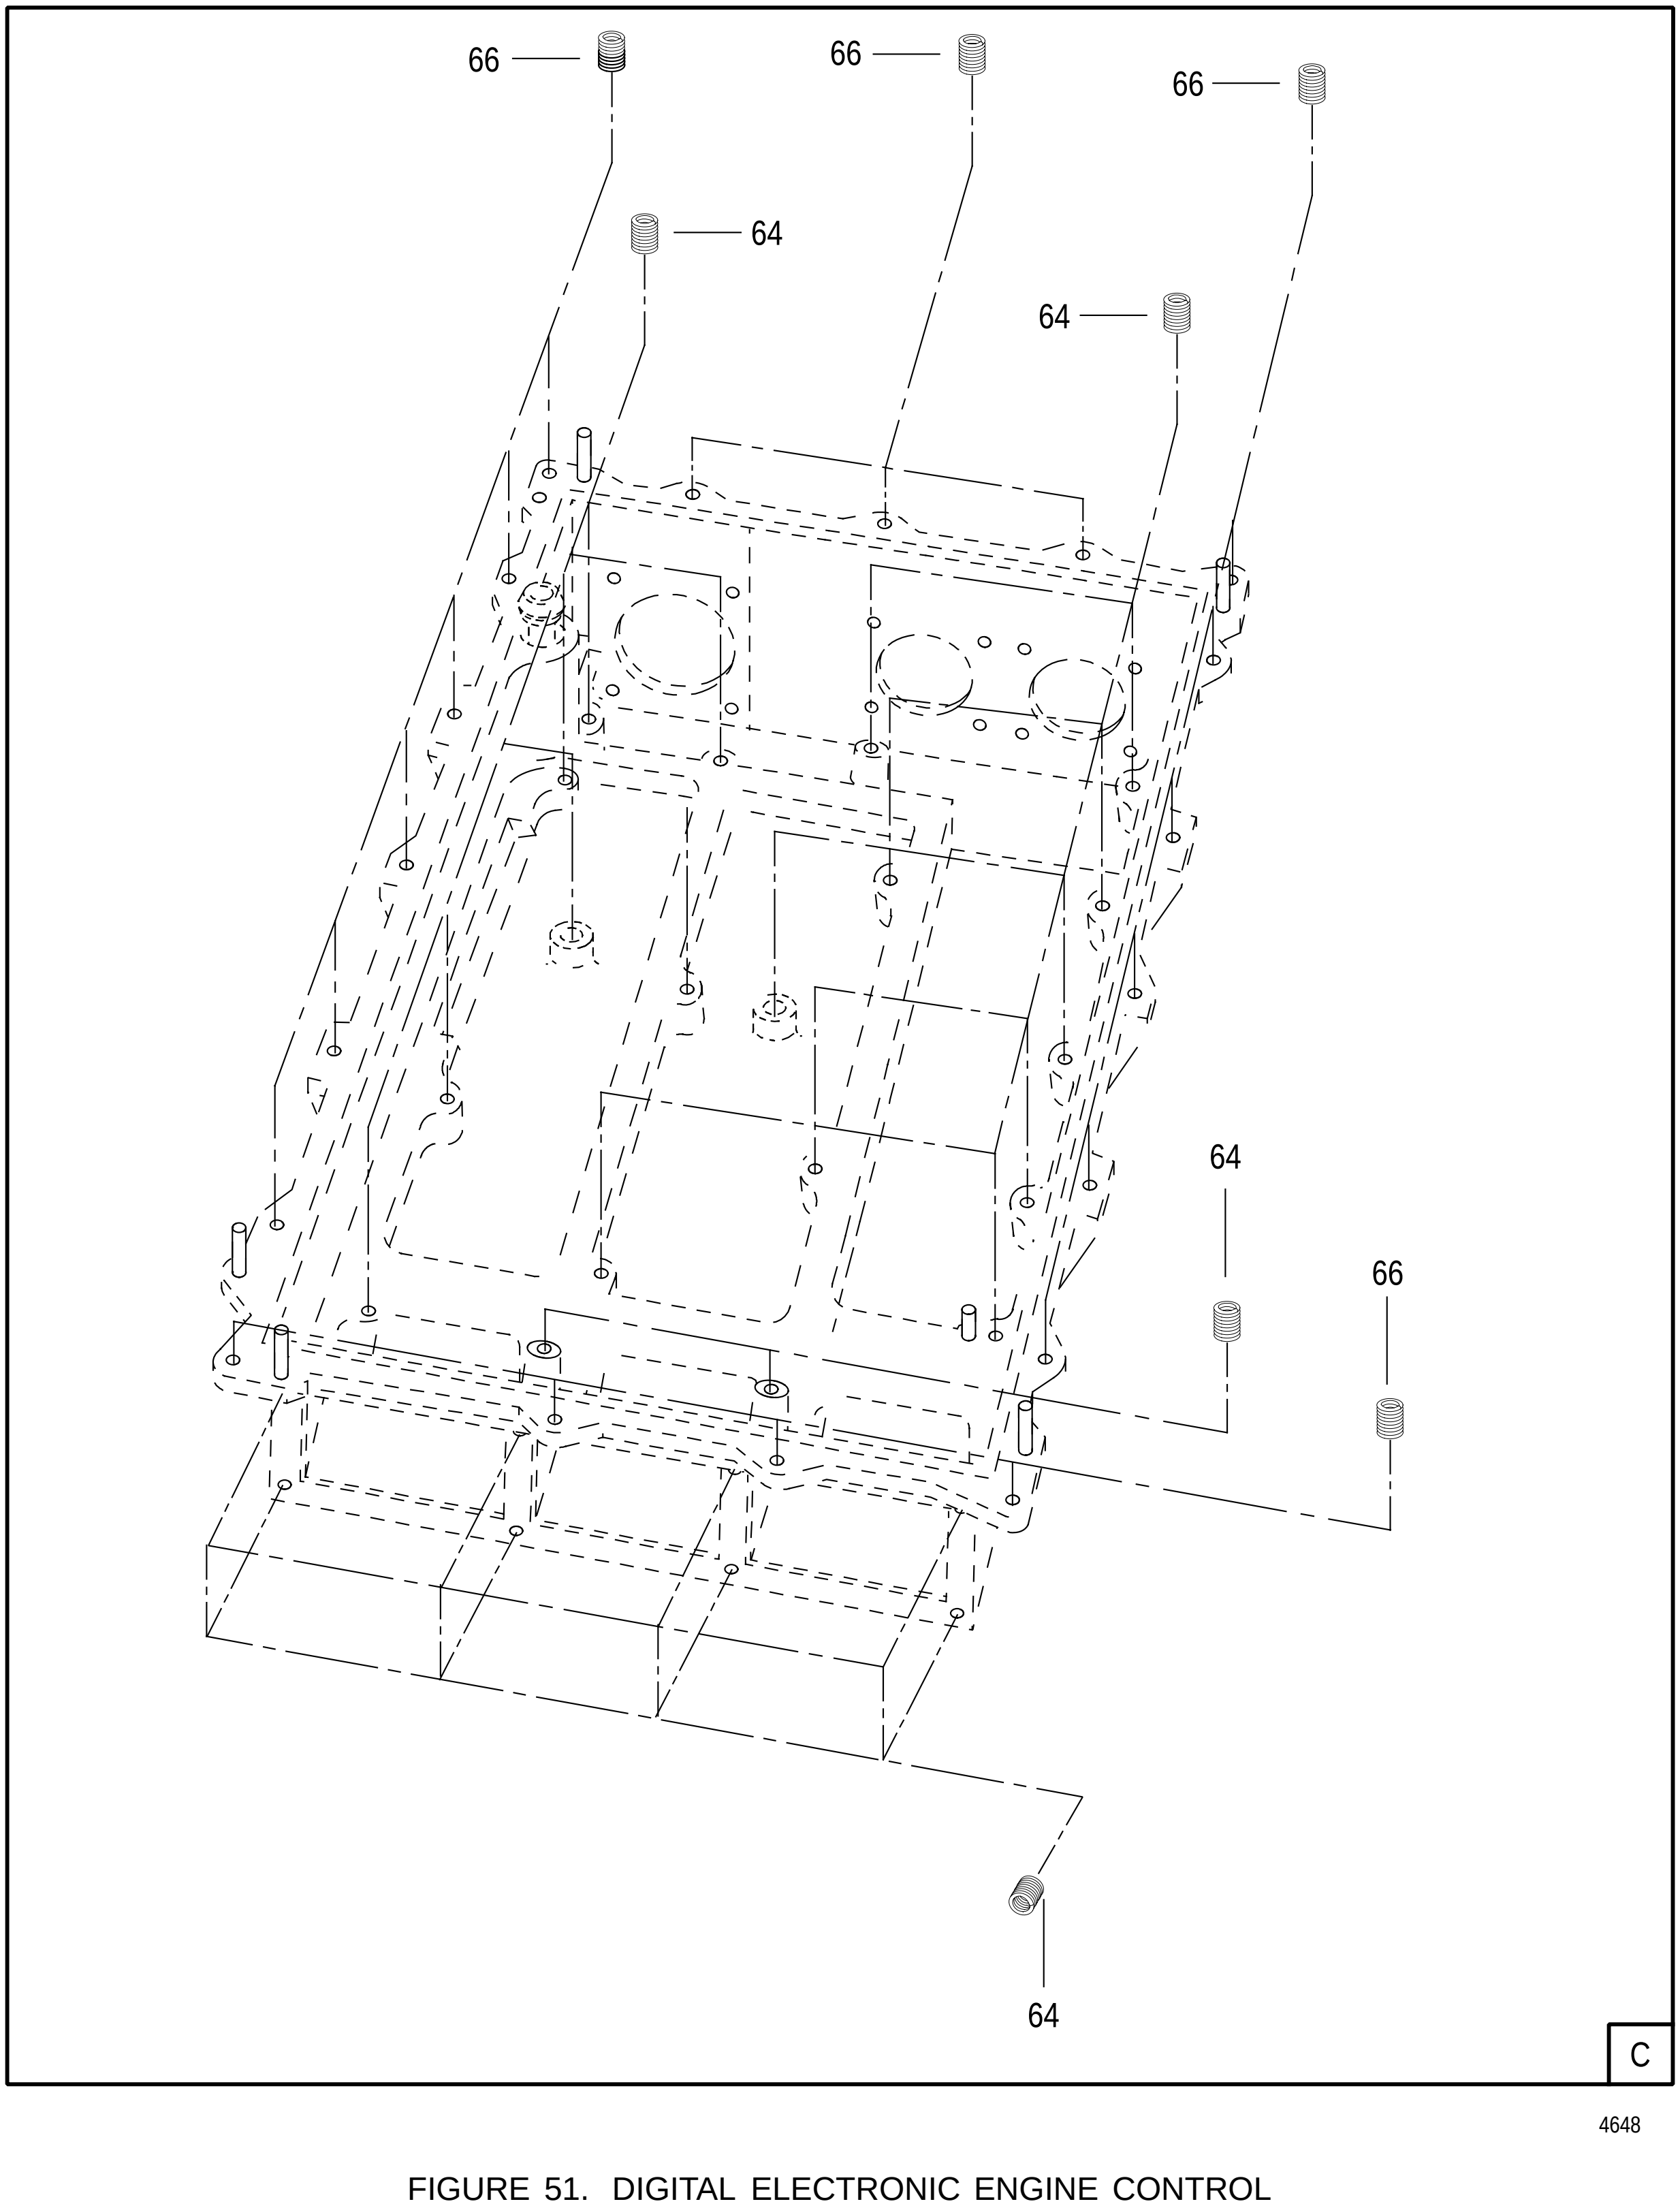


FIGURE 51. DIGITAL ELECTRONIC ENGINE CONTROL
(SHEET 4 OF 4)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
51	NO NUMBER		DIGITAL ELECTRONIC ENGINE CONTROL . . . . SEE FIG. 38-13 FOR NHA	REF		
- 1	ST2080-05	52661	. NUT-PLAIN, HEX, DRILLED . . . . 0.500-18UNJF-3B X 0.375 IN. TUBE OD	1		PAOZZ
- 2	4072815	52661	. CONNECTOR-MULTIPLE, FLUID PRESSURE LINE . . 0.5625-18UNJF-3A X 1.000 IN. LONG	1		PAOFF
- 3	4072814	52661	. BOLT-FLUID PASSAGE, DRILLED HEX 0.5625-18UNJF-3A 1.520	1		PAOZZ
- 4	MS9966-06	96906	. PACKING	3		PAOZZ
- 5	ST2000-06	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.562-18UNJF-3A X 0.375 IN. TUBE OD	1		PAOZZ
- 6	MS9966-06	96906	. PACKING	1		PAOZZ
- 7	4074599	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.562-18-18	1		PAOZZ
- 8	MS9966-06	96906	. PACKING	1		PAOZZ
- 9	4074636	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.437-20-20	1		PAOZZ
- 10	MS9966-04	96906	. PACKING	1		PAOZZ
- 11	ST2000-05	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS . . . . 0.500-20UNJF-3A X 0.312 IN. TUBE OD	1		PAOZZ
- 12	MS9966-06	96906	. PACKING	1		PAOZZ
- 13	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	3		PAOZZ
- 14	MS9549-09	96906	. WASHER	2		PAOZZ
- 15	ST2015-024	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.750 IN. LONG	1		PAOZZ
- 16	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	2		PAOZZ
- 17	4054347	52661	. LEAD-ELECTRICAL, ASSY OF . . . . 0.1635 DIA X 8.000 IN. LONG	1		PAOBZ
R - 18	796521H06D05 #	3L184	. CONTROL-ENGINE, DIGITAL ELECTRONIC . . . . P&W PART NO. 4082600D05	1	LE	PAOLD
	796521H07D06 #	3L184	. CONTROL-ENGINE, DIGITAL ELECTRONIC . . . . P&W PART NO. 4083900D06	1	LF/AAX	PAOLD
	796521H08D07 #	3L184	. CONTROL-ENGINE, DIGITAL ELECTRONIC . . . . P&W PART NO. 4084428D07	1	AAY	PAODD
- 19	ST2154-096	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.3125-24UNJF-3A X 3.000 IN. LONG (AP)	4		PAOZZ
- 20	MS9549-11	96906	. WASHER (AP) . . . . PARTIAL BREAKDOWN FOLLOWS	4		PAOZZ
- 21	M25988/1-019	81349	.. PACKING	1		PAFZZ
- 22	69336-255	3L184	.. SCREW	19		PAOZZ
- 23	NAS620C10	80205	.. WASHER	19		PAFZZ
- 24	783263-2	3L184	.. PACKING-PREFORMED	1		PAOZZ
- 25	796344-1	3L184	.. BOARD ASSY-ENGINE INTERFACE, DEEC	1		PAFLD
- 26	MS16997-11	96906	.. SCREW (AP)	12		PAFZZ
- 27	MS27183-3	96906	.. WASHER (AP)	12		PAFZZ
- 28	NAS5901-20	80205	.. SCREW (AP)	15		PAFZZ
- 29	AN960-6	88044	.. WASHER-FLAT (AP)	15		PAFZZ
- 30	773635-9	3L184	.. GASKET	2		PAOZZ
- 31	773635-10	3L184	.. GASKET	1		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
51 - 32	796346-3	3L184	.. BOARD ASSY-AIRCRAFT INTERFACE, DEEC ...... REPLACES 796346-2	1		PAFLD
- 33	MS16997-11	96906	.. SCREW (AP)	12		PAFZZ
- 34	NAS620-4	80205	.. WASHER (AP)	12		PAFZZ
- 35	MS16997-10	96906	.. SCREW (AP)	4		PAFZZ
- 36	AN960-4	88044	.. WASHER-FLAT (AP).............................	4		PAFZZ
- 37	MS16997-19	96906	.. SCREW (AP)	3		PAFZZ
- 38	AN960-6	88044	.. WASHER-FLAT (AP).............................	3		PAFZZ
- 39	MS16997-11	96906	.. SCREW (AP)	8		PAFZZ
- 40	MS27183-3	96906	.. WASHER (AP)	8		PAFZZ
- 41	773635-10	3L184	.. GASKET	1		PAOZZ
- 42	773635-11	3L184	.. GASKET	1		PAOZZ
- 43	796348-2	3L184	.. BOARD ASSY-CONVERTER, DEEC .... SUPERSEDES 796348-1	1		PAFLD
- 44	NAS5901-2B	80205	.. SCREW (AP)	16		PAFZZ
- 45	ED743989D02A1 4	3L184	.. SPACER (AP)..................................	16		PAFZZ
- 46	MS16997-19	96906	.. SCREW (AP)	2		PAFZZ
- 47	AN960-6	88044	.. WASHER-FLAT (AP).............................	2		PAFZZ
- 48	MS16997-11	96906	.. SCREW (AP)	4		PAFZZ
- 49	MS27183-3	96906	.. WASHER (AP)	4		PAFZZ
- 50	773635-8	3L184	.. GASKET-COVER, DEEC..........................	1		PAOZZ
- 51	796520-4-013	3L184	.. BOARD ASSY-PROCESSOR AND MEMORY, DEEC USE ONLY ON 796521H06D05	1		PAFLD
	796520-4-014	3L184	.. BOARD ASSY-PROCESSOR AND MEMORY, DEEC USE ONLY ON 796521H07D06	1		PAFLD
	796520-4-015	3L184	.. BOARD ASSY-PROCESSOR AND MEMORY, DEEC USE ONLY ON 796521H08D07	1		PAFLD
- 52	MS16997-19	96906	.. SCREW (AP)	1		PAFZZ
- 53	AN960-6	88044	.. WASHER-FLAT (AP).............................	1		PAFZZ
- 54	MS16997-11	96906	.. SCREW (AP)	8		PAFZZ
- 55	MS27183-3	96906	.. WASHER (AP)	8		PAFZZ
- 56	773635-8	3L184	.. GASKET-COVER, DEEC..........................	2		PAOZZ
- 57	3186-44	3L184	.. NUT	2		PAFZZ
- 58	796598-2	3L184	.. TRANSDUCER-PRESSURE, DEEC (P2)............	1		PAFZZ
- 59	798151-2	3L184	.. TRANSDUCER-PRESSURE, DEEC (P3)............	1		PAFZZ
- 60	M25988/1-118	81349	.. PACKING	2		PAFZZ
- 61	MS3186-50	96906	.. NUT	1		PAFZZ
- 62	796585-2	3L184	.. TRANSDUCER-PRESSURE, DEEC (P6)............	1		PAFZZ
- 63	M25988/1-122	81349	.. PACKING	1		PAFZZ
- 64	MS21209C0615	96906	.. INSERT	45		PAFZZ
- 65	MS21209C0415	96906	.. INSERT	18		PAFZZ
- 66	AS3094-03	81343	.. INSERT	19		PAFZZ
- 67	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION.................... WHEN EXH USE ST1540-04	1		PAOZZ
	ST1540-04	52661	. CLAMP-LOOP, CUSHION..........................	1		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
51 - 68	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 69	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAOZZ
- 70	4074470	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 71	DELETED					
- 72	4075799	52661	. BRACKET-LOOP CLAMP, ASSY OF	1		PAOBZ
- 73	4072710	52661	. BRACKET-ANGLE	1		PAFZZ
- 74	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 75	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 76	4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	8		PAOZZ
- 77	4069432	52661	. SUPPORT-DEEC, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
- 78	4063522	52661	.. NUT OPTION . . . . SEE OPTION TABLE	2		PAFZZ
- 79	MS9318-104	96906	.. RIVET (AP)	2		PAOZZ
- 80	4069433	52661	. SUPPORT-DEEC, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
- 81	4063522	52661	.. NUT OPTION . . . . SEE OPTION TABLE	2		PAFZZ
- 82	MS9318-104	96906	.. RIVET (AP)	2		PAOZZ
- 83	4082813	52661	. BRACKET-LOOP CLAMP	1		PAFZZ

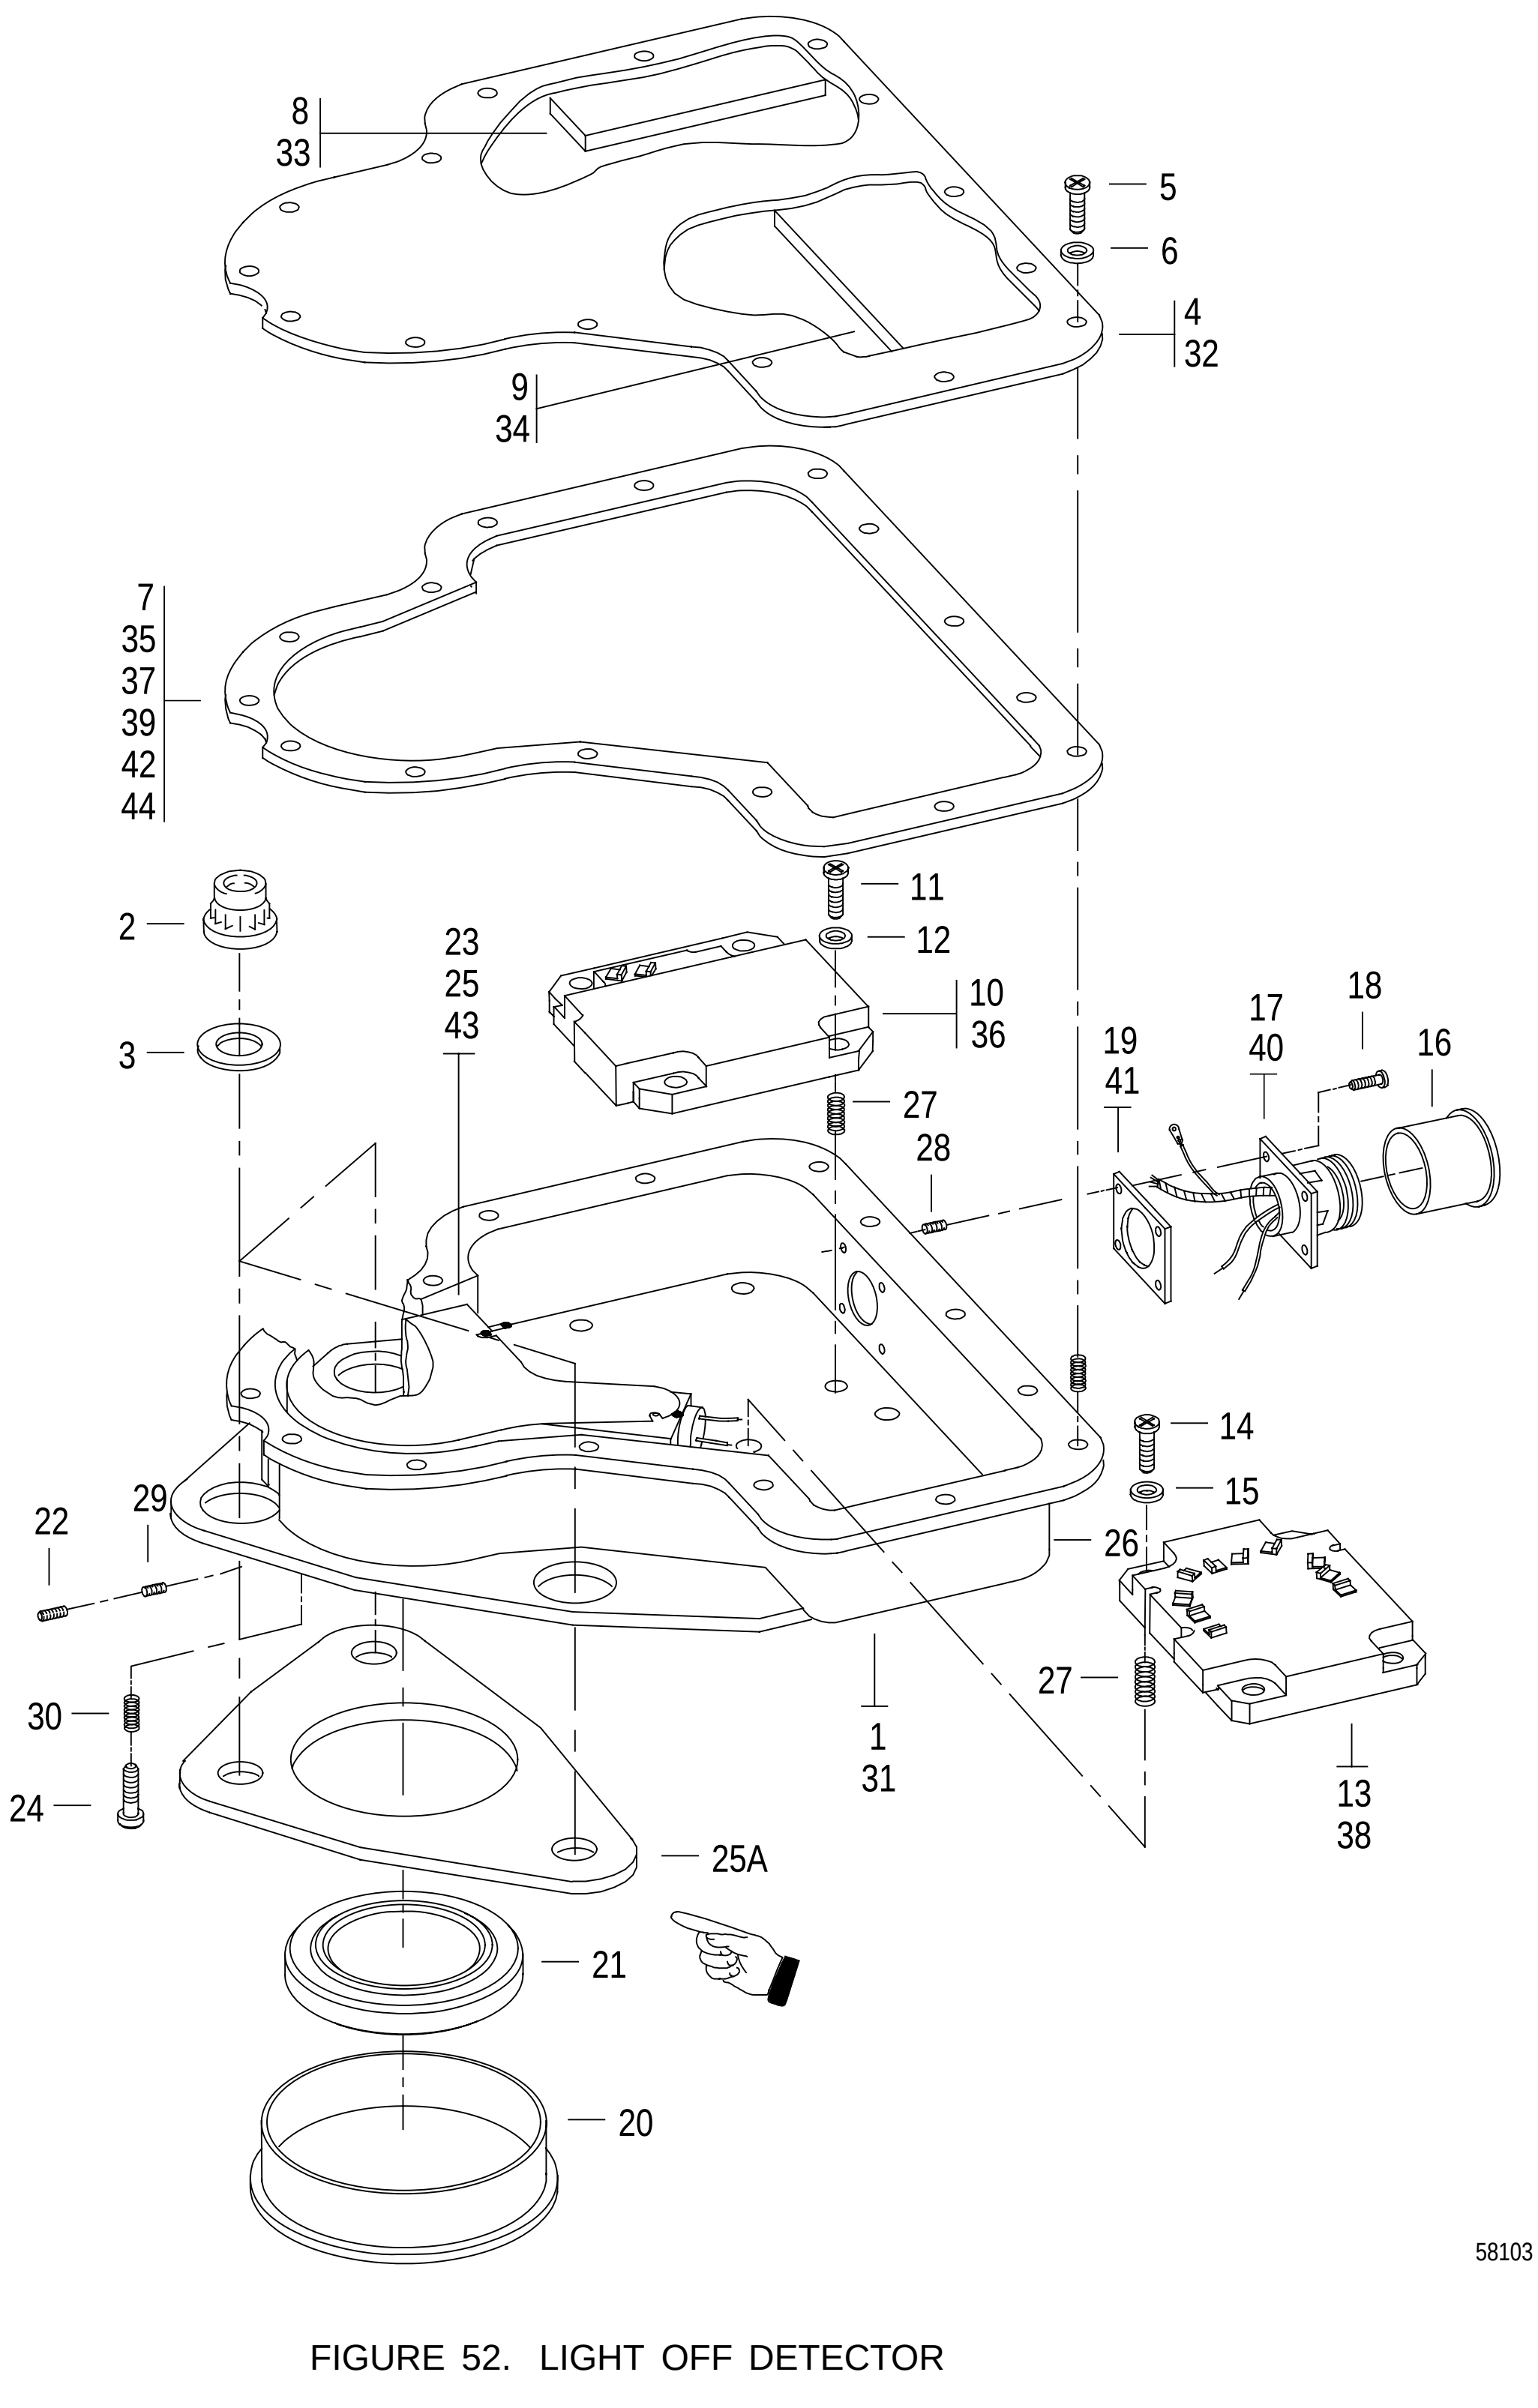


FIGURE 52. LIGHT OFF DETECTOR

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
52	NO NUMBER		LIGHT OFF DETECTOR	REF		
			SEE FIG. 38-17 FOR NHA			
- 1	910094	58880	. DETECTOR-LIGHT OFF, AUGMENTOR	1		PAOFF
			P&WA PART NO. 4071424			
- 2	4023116	52661	. NUT OPTION (AP)	3		PAOZZ
			SEE OPTION TABLE			
- 3	4018614	52661	. WASHER-FLAT	3		PAOZZ
			0.278 ID X 0.500 OD X 0.032 IN. THK (AP)			
			PARTIAL BREAKDOWN FOLLOWS			
- 4	910093111	58880	.. COVER-MACHINING	1		PAFZZ
			ALSO A DETAIL OF KIT P/N 8001018			
- 5	MS51957-28	96906	.. SCREW (AP)	15		PADZZ
- 6	3551014-02	58880	.. WASHER-BELLEVILLE NO. 6 (AP)	15		PAFZZ
- 7	910093102	58880	.. GASKET-COVER, LOD	1		XA
			ALSO A DETAIL OF KIT P/N 8001014, 8001015, 8001016, 8001017, AND 8001018			
- 8	910094106-01	58880	.. PAD-RUBBER, T1	1		PAFZZ
			ALSO A DETAIL OF KIT P/N 8001018			
- 9	910094106-02	58880	.. PAD-RUBBER, T2	1		PAFZZ
			ALSO A DETAIL OF KIT P/N 8001018			
- 10	910094004	58880	.. MODULE ASSY-T1, LOD	1		PAFZZ
			ALSO A DETAIL OF KIT P/N 8001015			
- 11	MS51957-33	96906	.. SCREW (AP)	4		PAFZZ
- 12	3551014-02	58880	.. WASHER-BELLEVILLE NO. 6 (AP)	4		PAFZZ
- 13	910094005	58880	.. MODULE ASSY-T2, LOD	1		PAFZZ
			ALSO A DETAIL OF KIT P/N 8001016			
- 14	MS51957-33	96906	.. SCREW (AP)	4		PAFZZ
- 15	3551014-02	58880	.. WASHER-BELLEVILLE NO. 6 (AP)	4		PAFZZ
- 16	6071001-01	58880	.. CAP-PROTECTIVE	1		PAOZZ
- 17	910094008	58880	.. CONNECTOR ASSY-LOD	1		XA
			ALSO A DETAIL OF KIT P/N 8001017			
- 18	MS51957-14	96906	.. SCREW (AP)	4		PAFZZ
- 19	910092117-01	58880	.. GASKET-CONNECTOR, LOD	1		XA
			ALSO A DETAIL OF KIT P/N 8001017			
- 20	6071001-02	58880	.. CAP-PROTECTIVE	1		PAOZZ
- 21	910094009	58880	.. LENS AND BEZEL ASSY-LOD	1		PAFZZ
- 22	MS51021-3	96906	.. SETSCREW (AP)	2		PAFZZ
- 23	910094007	58880	.. SENSOR/SOURCE ASSY-LOD	1		XA
			ALSO A DETAIL OF KIT P/N 8001014			
- 24	MS35275-228	96906	.. SCREW (AP)	4		PAFZZ
- 25	910093113	58880	.. CUSHION-SENSOR/SOURCE	1		PAFZZ
- 25A	910090127	58880	.. GASKET-HOUSING, LOD	1		PAFZZ
	910093002	58880	.. HOUSING INSERT ASSY, LOD	1		PAFFF
- 26	MS21209-C0615	96906	... INSERT	15		PAFZZ
- 27	MS21209-C0620	96906	... INSERT	8		PAFZZ
- 28	MS21209-C0415	96906	... INSERT	4		PAFZZ
- 29	MS21209-C0210	96906	... INSERT	2		PAFZZ
- 30	MS21209F1-10	96906	... INSERT	4		PAFZZ
- 31	910093112	58880	... HOUSING-MACHINED	1		XA
	8001018	58880	. INSTALLATION KIT-COVER ASSY, SPARE PART	1		PAOZZ
- 32	910093111	58880	.. COVER-MACHINING	1		PAFZZ
- 33	910094106-01	58880	.. PAD-RUBBER, T1	1		PAFZZ
- 34	910094106-02	58880	.. PAD-RUBBER, T2	1		PAFZZ
- 35	910093102	58880	.. GASKET-COVER, LOD	1		XA
	8001015	58880	. INSTALLATION KIT-T1 MODULE, TESTED	1		PAFZZ
			PARTIAL BREAKDOWN FOLLOWS			
- 36	910094004	58880	.. MODULE ASSY-T1, LOD	1		PAFZZ
- 37	910093102	58880	.. GASKET-COVER, LOD	1		XA

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
52 - 37	8001016	58880	. INSTALLATION KIT-T2 MODULE, TESTED .... PARTIAL BREAKDOWN FOLLOWS	1		PAFZZ
- 38	910094005	58880	.. MODULE ASSY-T2, LOD	1		PAFZZ
- 39	910093102	58880	.. GASKET-COVER, LOD	1		XA
	8001017	58880	. INSTALLATION KIT-CONNECTOR MODULE, ... TESTED PARTIAL BREAKDOWN FOLLOWS	1		PAFZZ
- 40	910094008	58880	.. CONNECTOR ASSY-LOD	1		XA
- 41	910092117-01	58880	.. GASKET-CONNECTOR, LOD	1		XA
- 42	910093102	58880	.. GASKET-COVER, LOD	1		XA
	8001014	58880	. INSTALLATION KIT-SENSOR/SOURCE MODULE, ... TESTED PARTIAL BREAKDOWN FOLLOWS	1		PAFZZ
- 43	910094007	58880	.. SENSOR/SOURCE ASSY-LOD	1		XA
- 44	910093102	58880	.. GASKET-COVER, LOD	1		XA


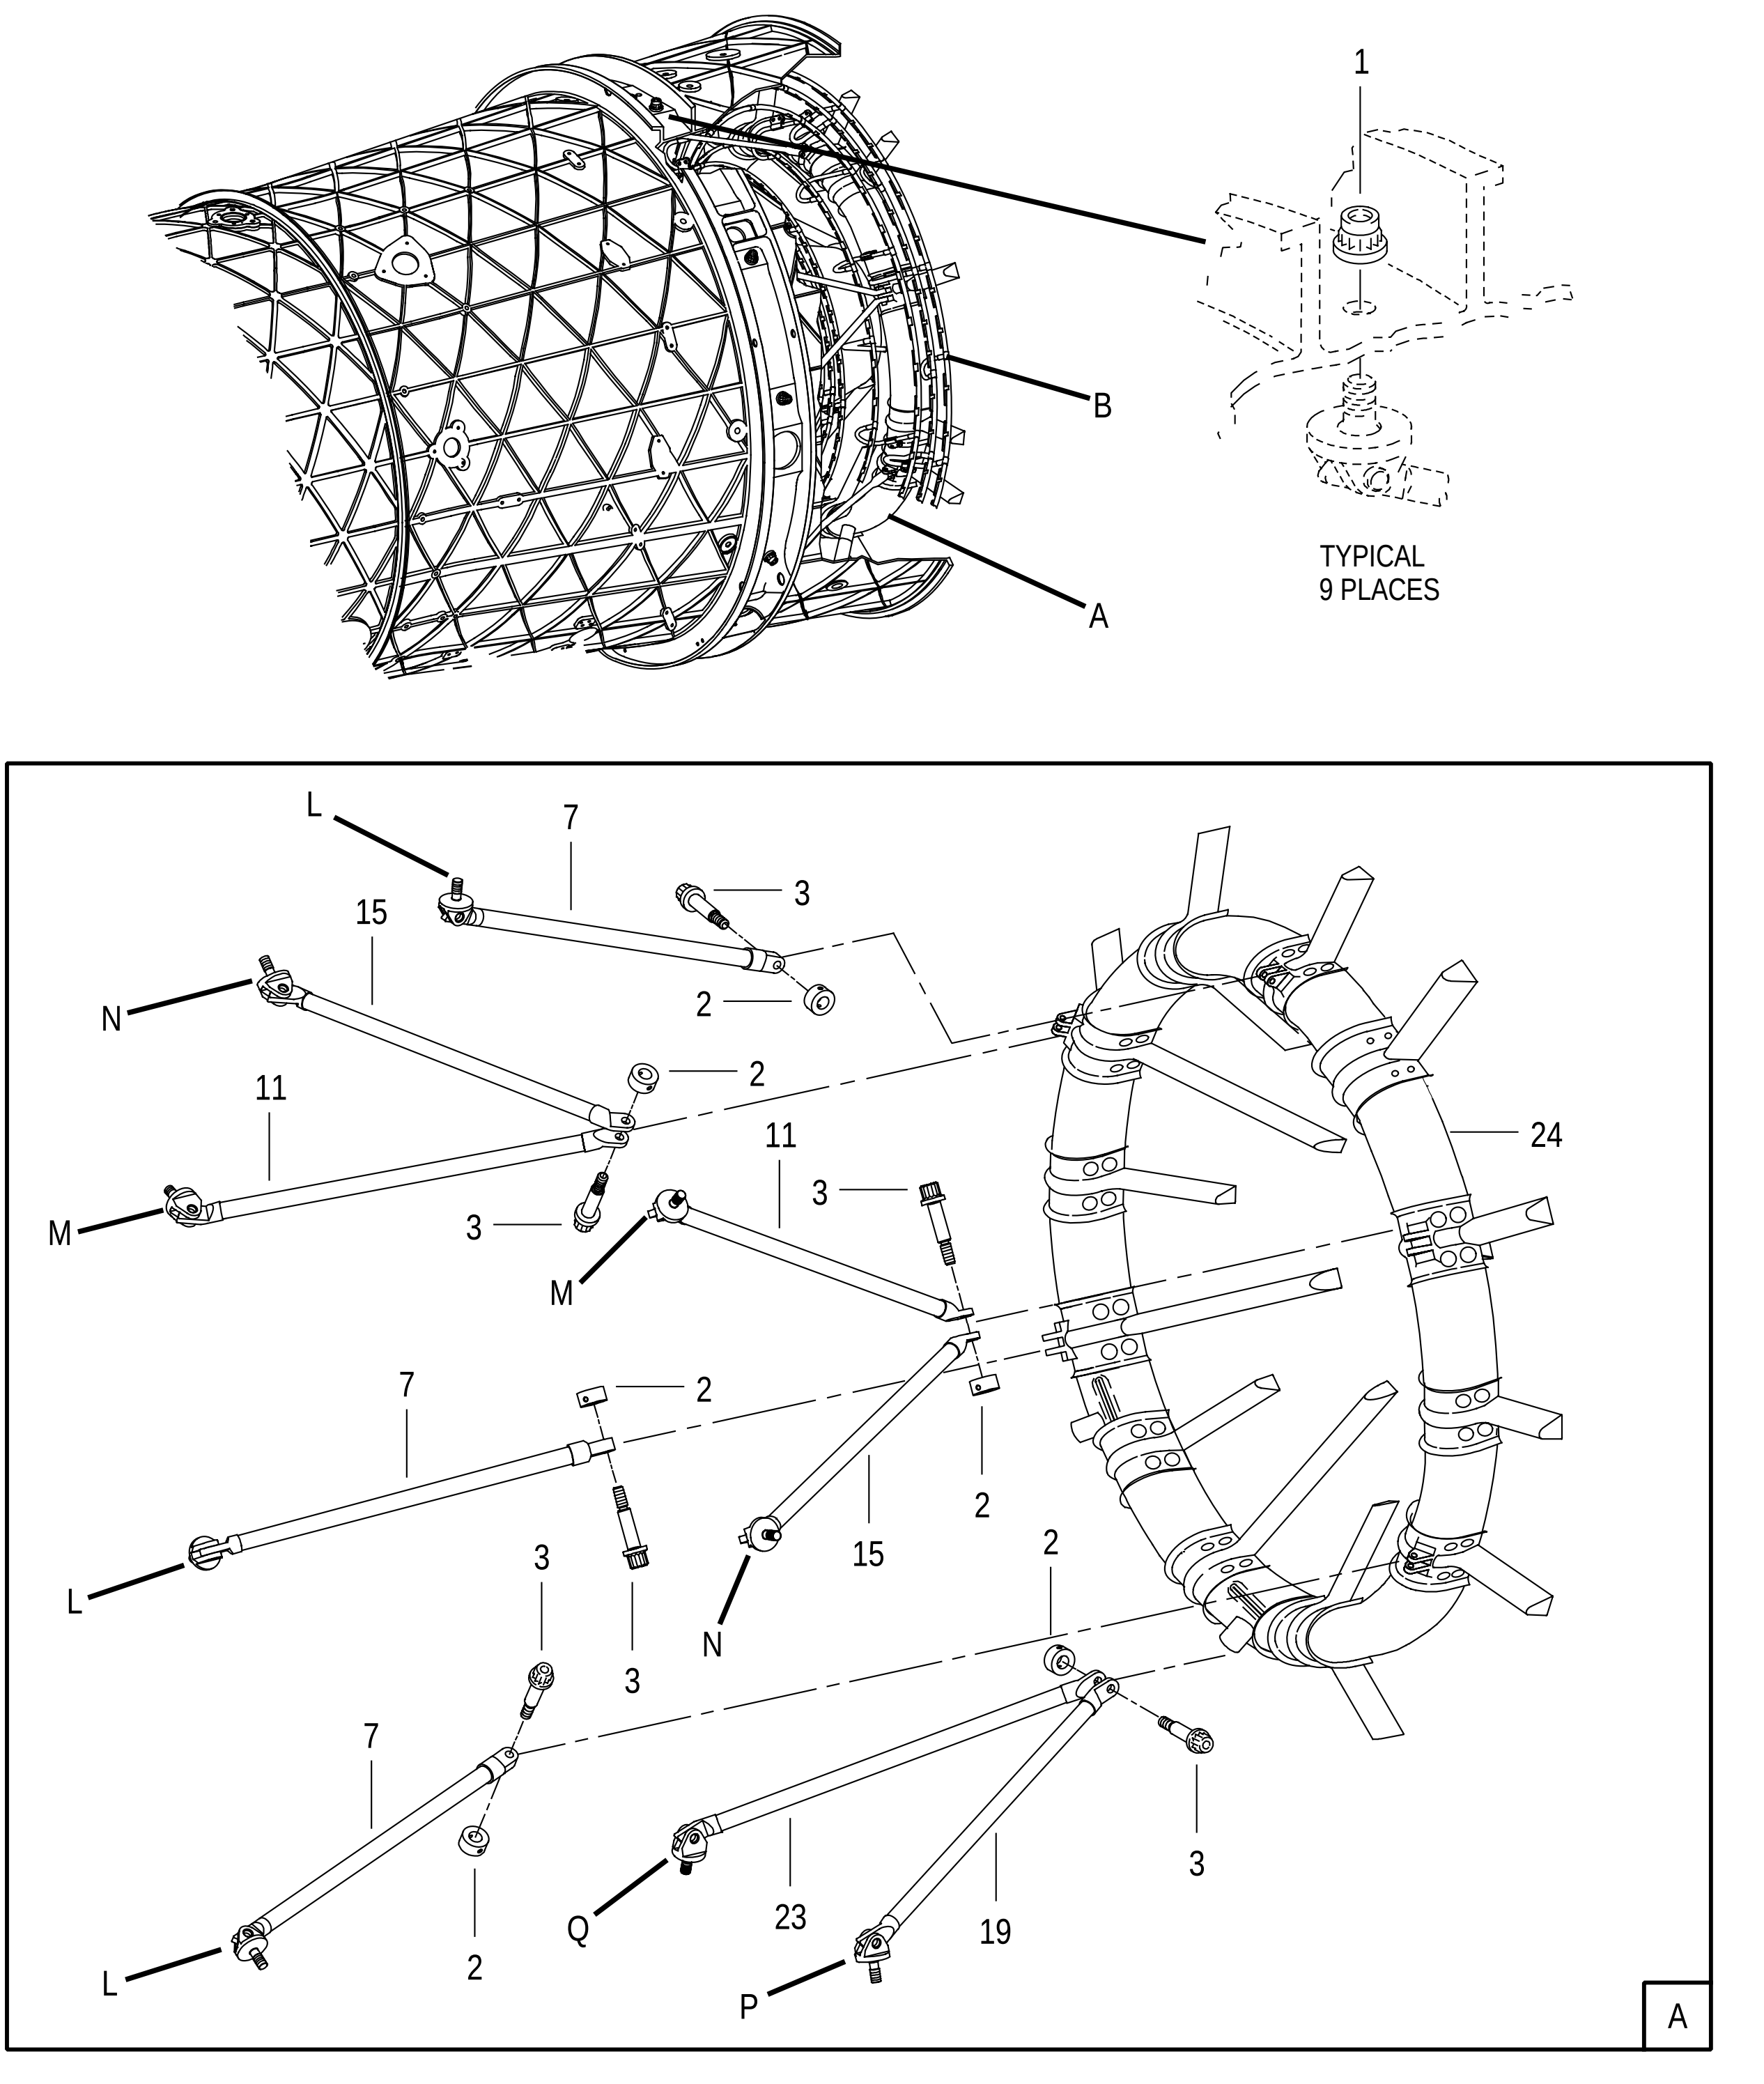


FIGURE 53. AUGMENTOR FLAMEHOLDER AND AUGMENTOR SPRAY MANIFOLD ASSEMBLIES
(SHEET 1 OF 4)

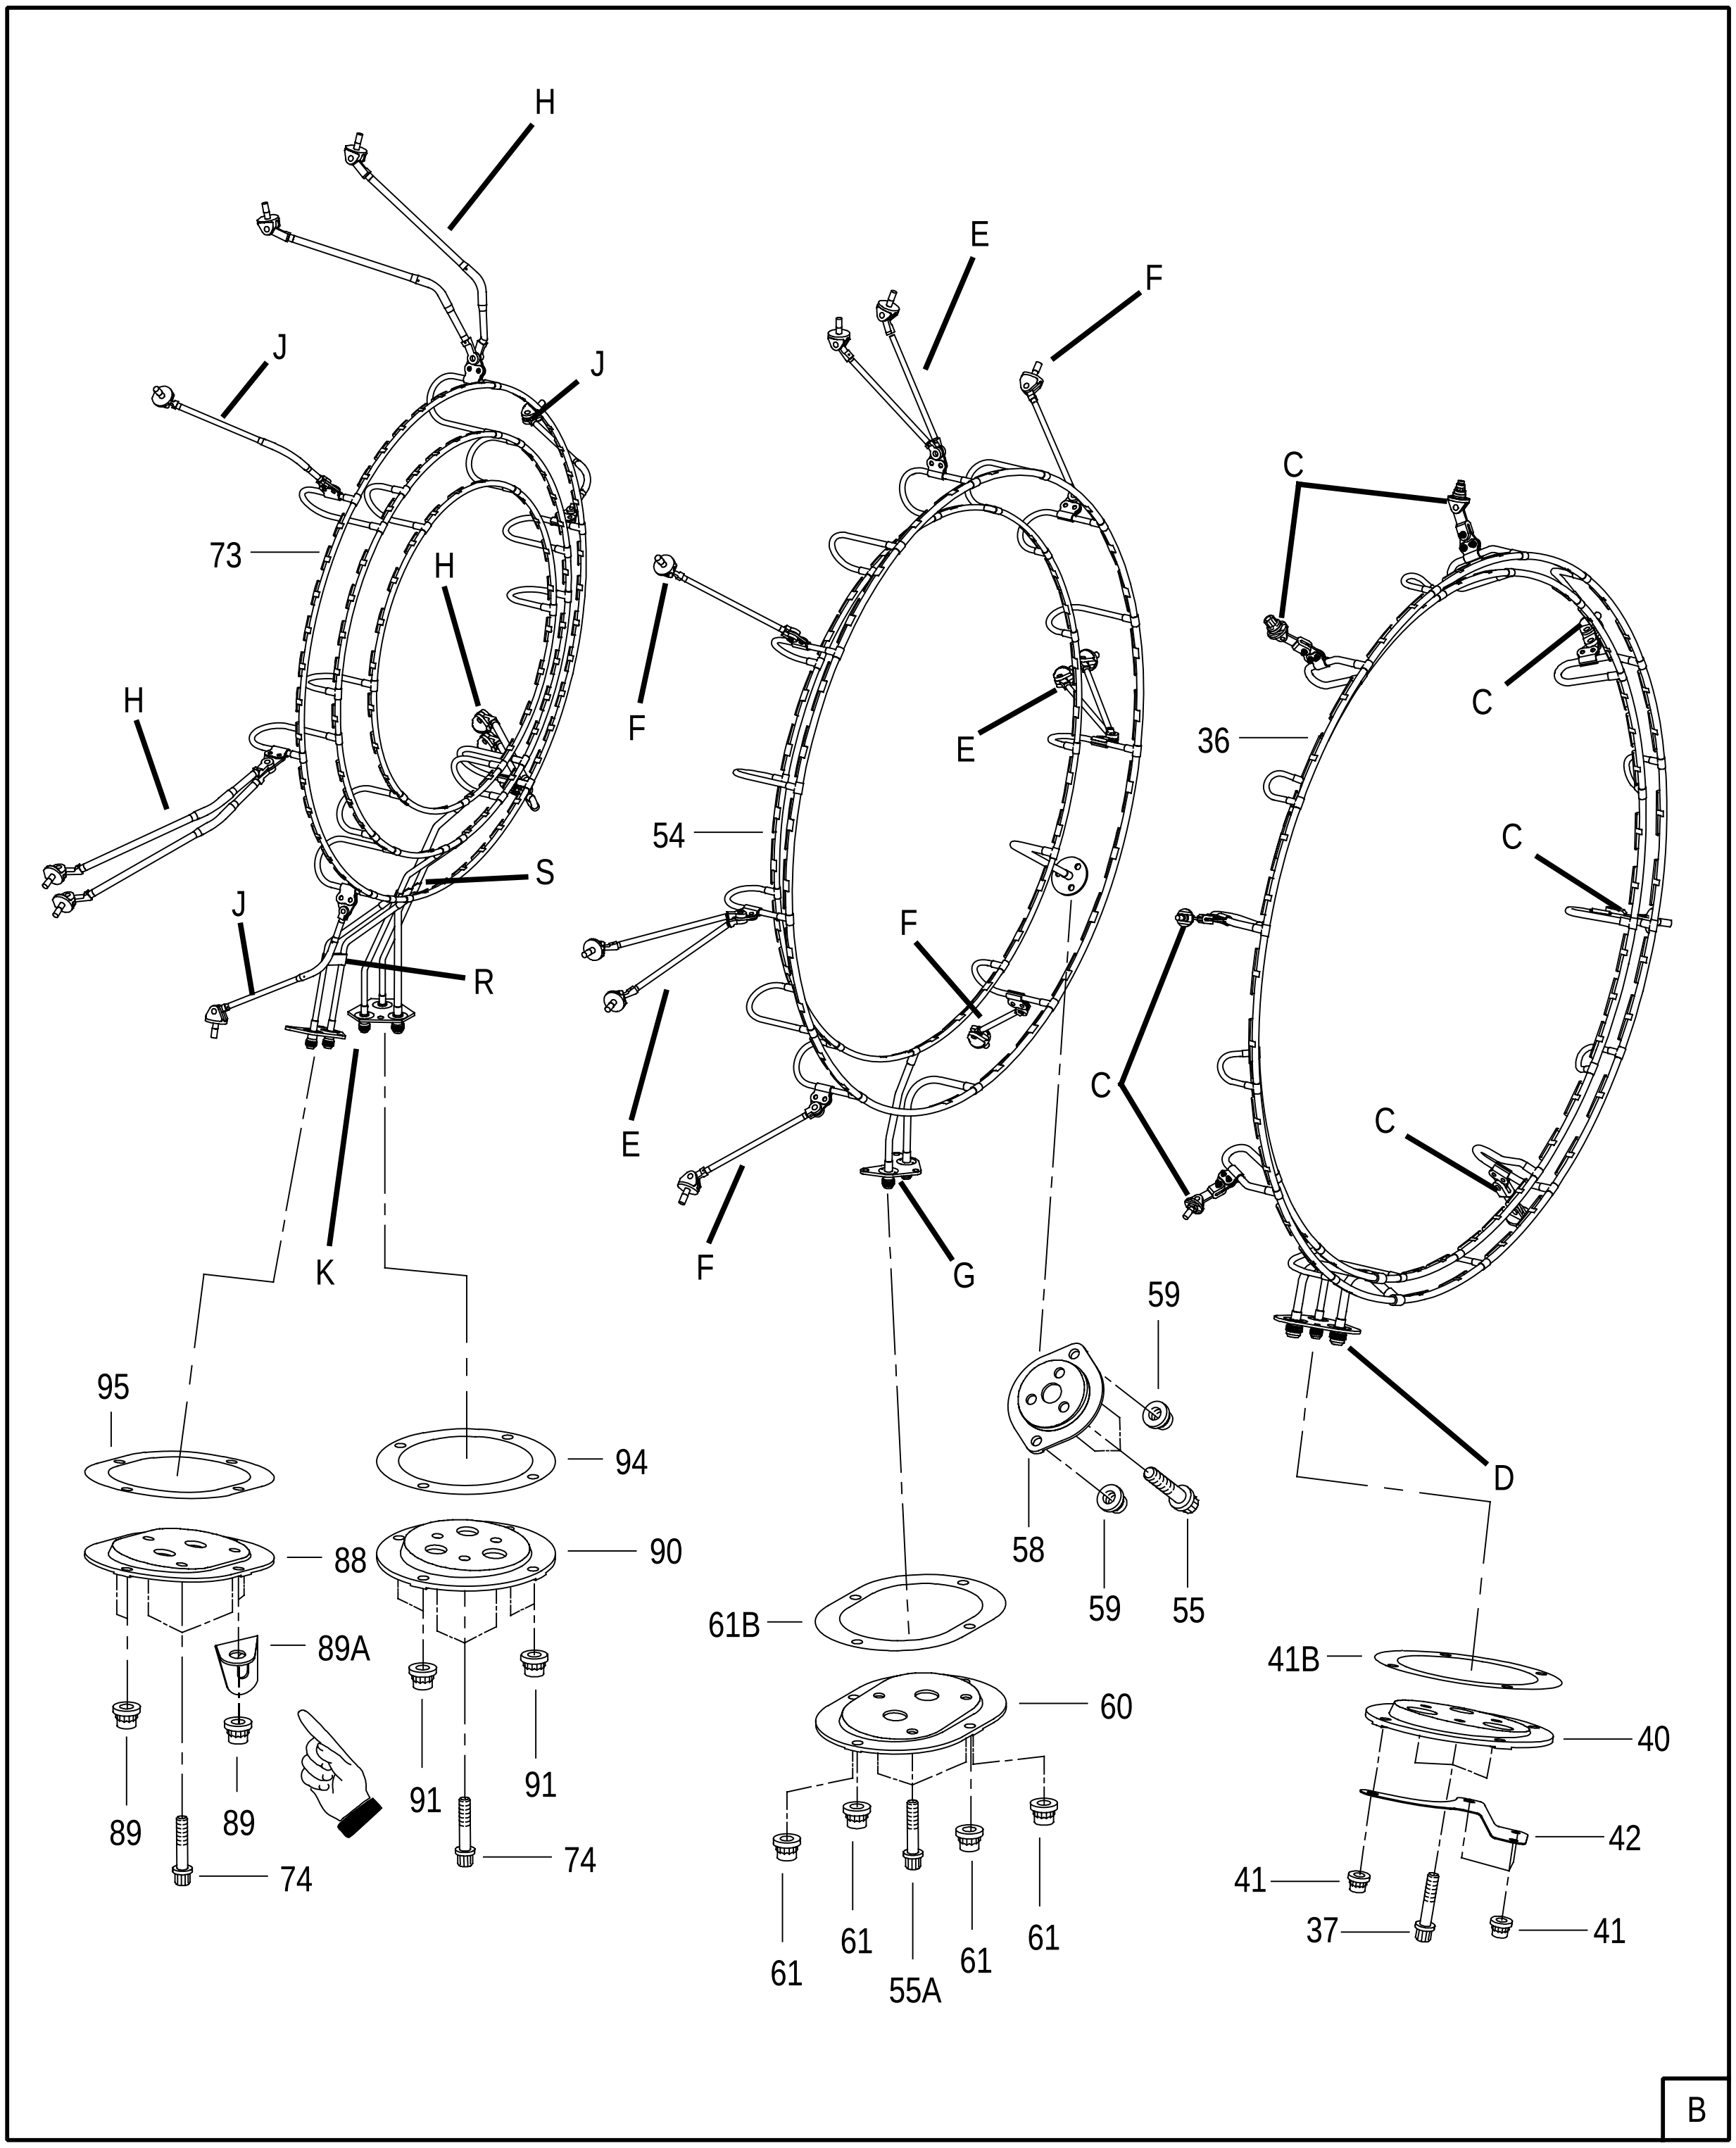

74180

FIGURE 53. AUGMENTOR FLAMEHOLDER AND AUGMENTOR SPRAY MANIFOLD ASSEMBLIES
(SHEET 2 OF 4)


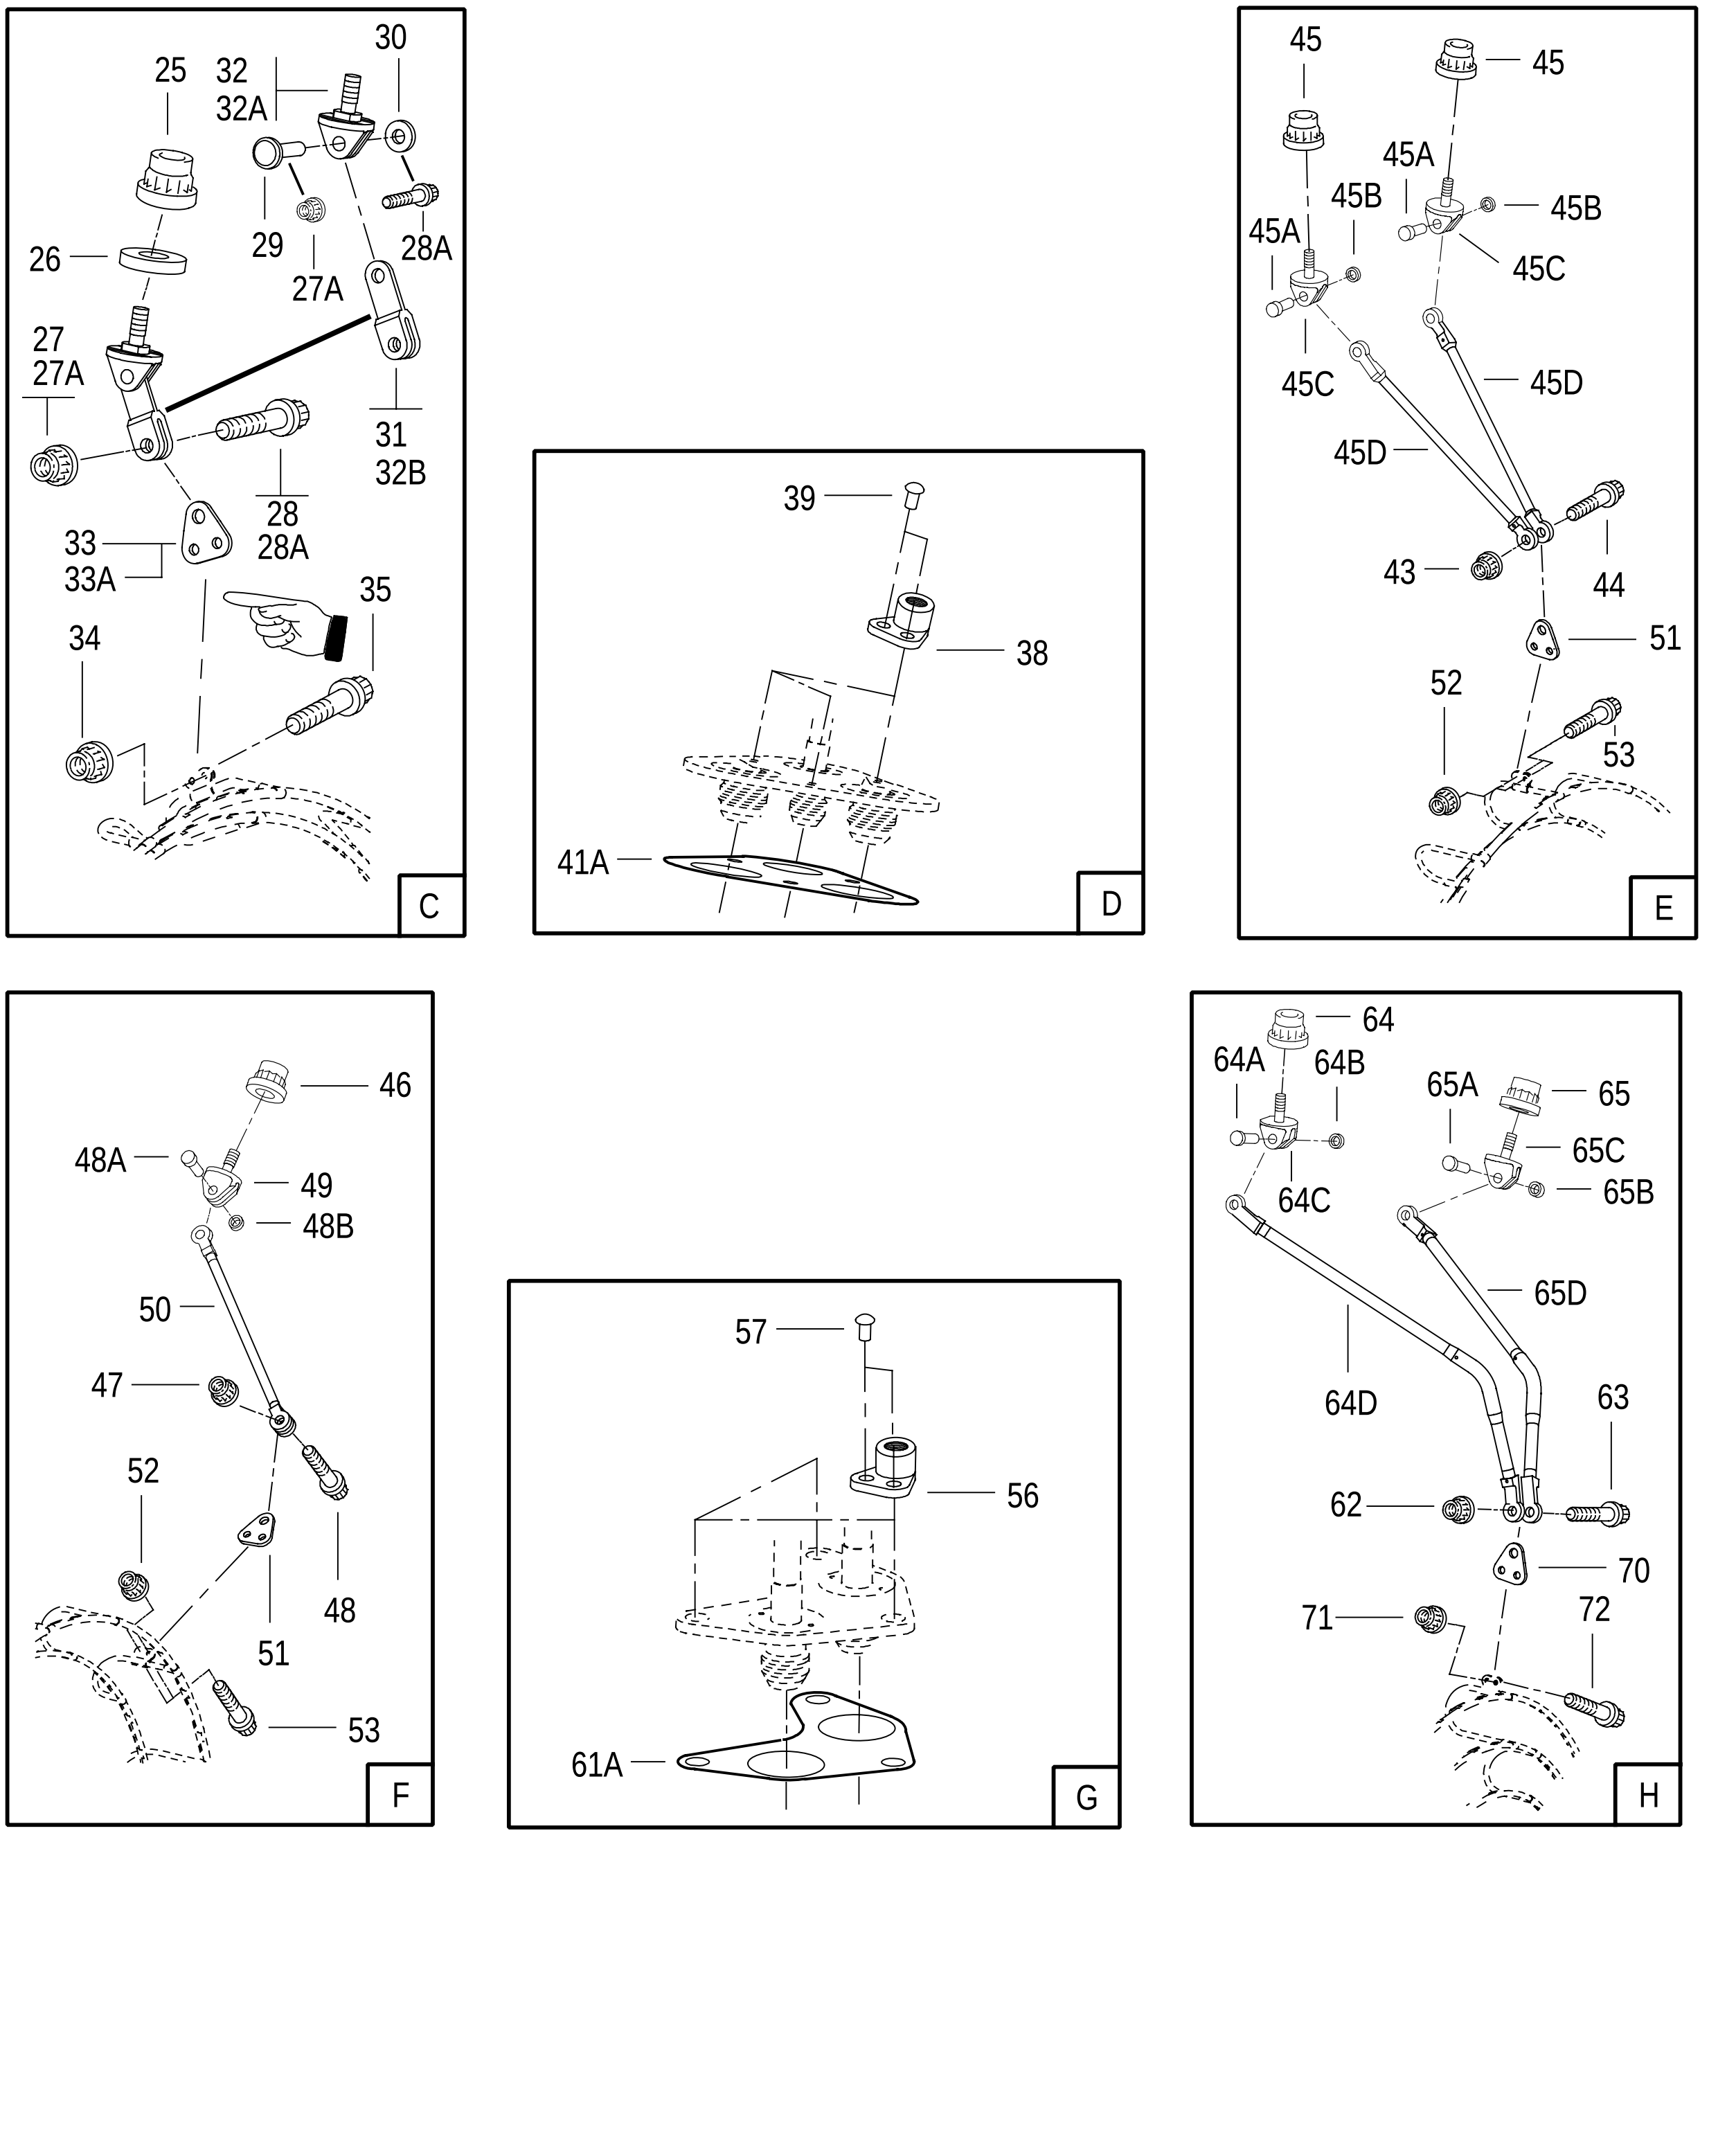


FIGURE 53. AUGMENTOR FLAMEHOLDER AND AUGMENTOR SPRAY MANIFOLD ASSEMBLIES
(SHEET 3 OF 4)

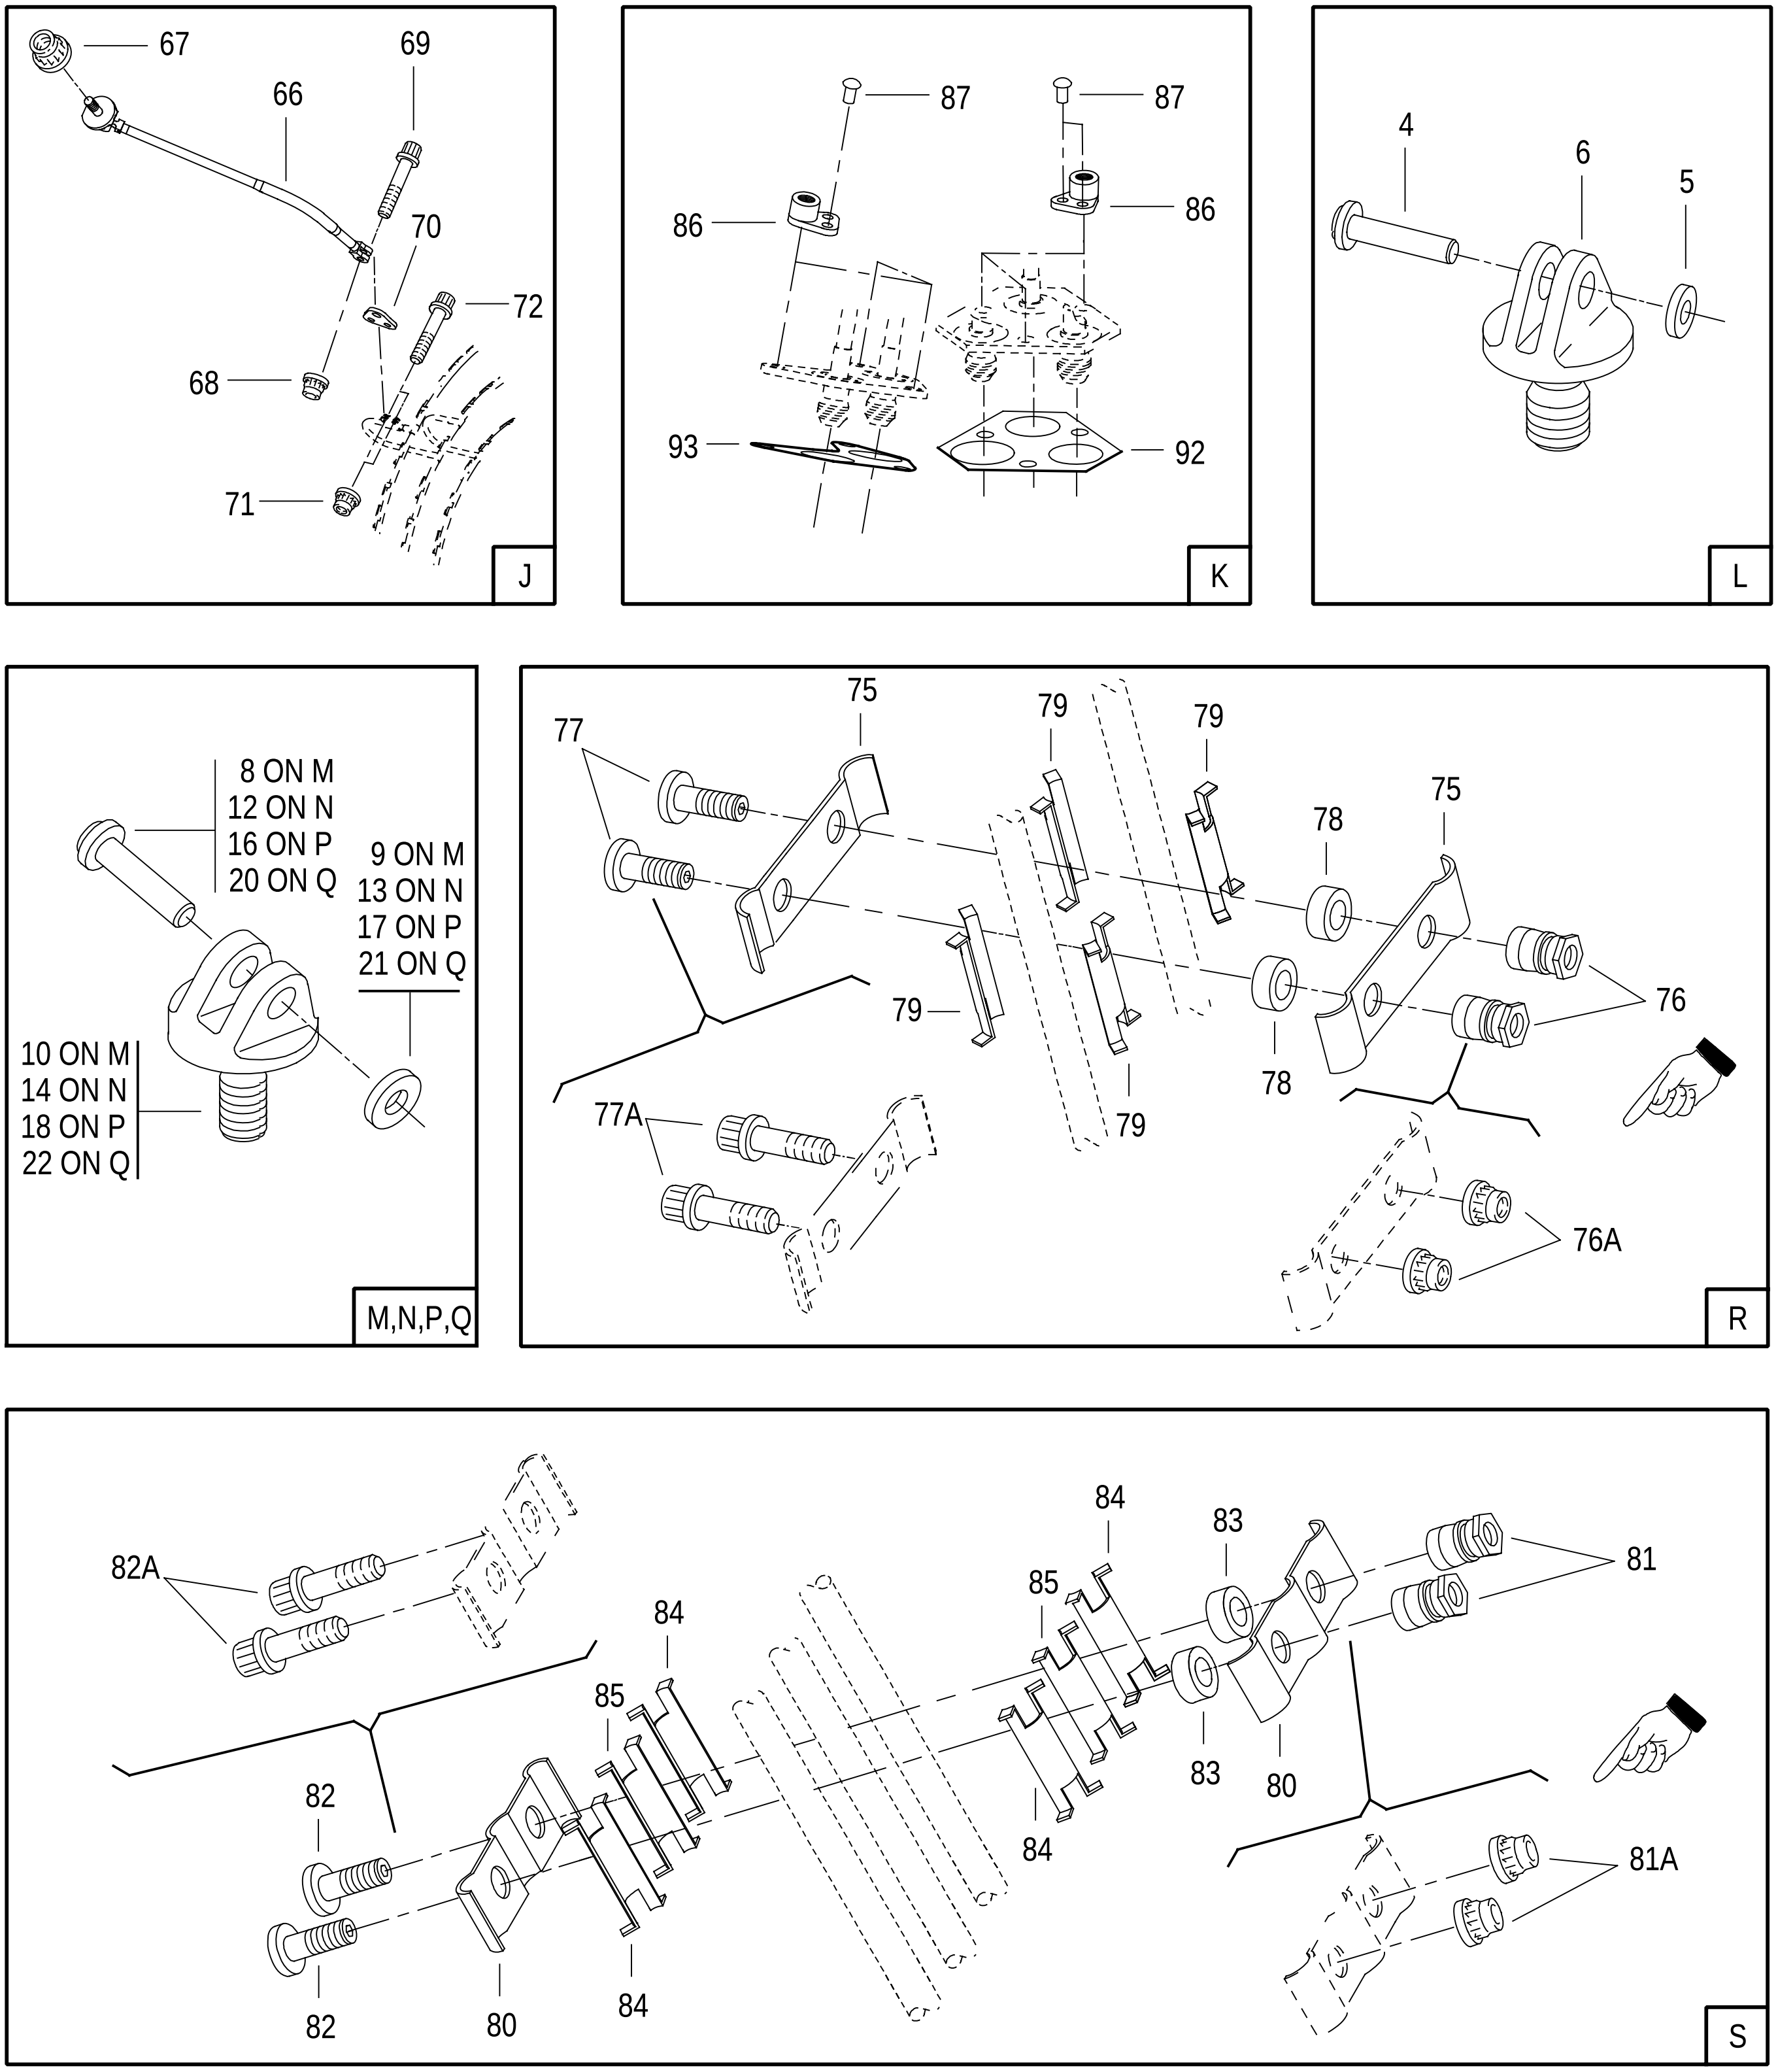

58104

FIGURE 53. AUGMENTOR FLAMEHOLDER AND AUGMENTOR SPRAY MANIFOLD ASSEMBLIES (SHEET 4 OF 4)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
53	NO NUMBER		AUGMENTOR FLAMEHOLDER AND AUGMENTOR . . SPRAY MANIFOLD ASSEMBLIES SEE FIG. 38-14 FOR NHA	REF		
- 1	ST2169-02	52661	. NUT OPTION . . . . SEE OPTION TABLE	9		PAFZZ
- 2	4046363	52661	. NUT OPTION . . . . SEE OPTION TABLE	6		PAOZZ
- 3	4060574	52661	. BOLT-SHOULDER, DOUBLE HEX . . . . 0.190-32 X 1.17 IN. LONG	6		PAOZZ
	4071196	52661	. CLEVIS AND ROD-AUGMENTOR IGNITER FLAME . . HOLDER, ASSY OF	3		PAFFF
- 4	4072898	52661	.. RIVET-TUBULAR, UNIVERSAL . . . . 0.250 X 0.670	1		PAFZZ
- 5	4002886	52661	.. WASHER-FLAT . . . . 0.260 X 0.450 X 0.125 IN. THK	1		PAOZZ
- 6	4072885	52661	.. CLEVIS-ROD END . . . . 0.3125-24 X 1.130 IN. LONG	1		PAFZZ
- 7	4071197-01	52661	.. ROD-AUGMENTOR IGNITER, FLAME HOLDER, . . . ASSY OF	1		PAFZZ
	4071214	52661	. CLEVIS AND ROD-AUGMENTOR IGNITER FLAME . . HOLDER, ASSY OF	2		PAFFF
- 8	4072898	52661	.. RIVET-TUBULAR, UNIVERSAL . . . . 0.250 X 0.670	1		PAFZZ
- 9	4002886	52661	.. WASHER-FLAT . . . . 0.260 X 0.450 X 0.125 IN. THK	1		PAOZZ
- 10	4071218	52661	.. CLEVIS-ROD END . . . . 0.3125-24 X 1.280 IN. LONG	1		PAFZZ
- 11	4071215-01	52661	.. ROD-AUGMENTOR IGNITER, FLAME HOLDER, . . . ASSY OF	1		PAFZZ
	4071216	52661	. CLEVIS AND ROD-AUGMENTOR IGNITER FLAME . . HOLDER, ASSY OF	2		PAFFF
- 12	4072898	52661	.. RIVET-TUBULAR, UNIVERSAL . . . . 0.250 X 0.670	1		PAFZZ
- 13	4002886	52661	.. WASHER-FLAT . . . . 0.260 X 0.450 X 0.125 IN. THK	1		PAOZZ
- 14	4071218	52661	.. CLEVIS-ROD END . . . . 0.3125-24 X 1.280 IN. LONG	1		PAFZZ
- 15	4071217-01	52661	.. ROD-AUGMENTOR IGNITER, FLAME HOLDER, . . . ASSY OF	1		PAFZZ
	4071192	52661	. CLEVIS AND ROD-AUGMENTOR IGNITER FLAME . . HOLDER, ASSY OF	1		PAFFF
- 16	4072898	52661	.. RIVET-TUBULAR, UNIVERSAL . . . . 0.250 X 0.670	1		PAFZZ
- 17	4002886	52661	.. WASHER-FLAT . . . . 0.260 X 0.450 X 0.125 IN. THK	1		PAOZZ
- 18	4071221	52661	.. CLEVIS-ROD END . . . . 0.3125-24 X 1.250 IN. LONG	1		PAFZZ
- 19	4071194-01	52661	.. ROD-AUGMENTOR IGNITER, FLAME HOLDER, . . . ASSY OF	1		PAFZZ
	4071232	52661	. CLEVIS AND ROD-AUGMENTOR IGNITER FLAME . . HOLDER, ASSY OF	1		PAFFF
- 20	4072898	52661	.. RIVET-TUBULAR, UNIVERSAL . . . . 0.250 X 0.670	1		PAFZZ
- 21	4002886	52661	.. WASHER-FLAT . . . . 0.260 X 0.450 X 0.125 IN. THK	1		PAOZZ
- 22	4071221	52661	.. CLEVIS-ROD END . . . . 0.3125-24 X 1.250 IN. LONG	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	53 - 23	4071186-01	52661	.. ROD-AUGMENTOR IGNITER, FLAME HOLDER, ... ASSY OF	1		PAFZZ
	- 24	4071179-01	52661	. FLAME HOLDER-AUGMENTOR IGNITER, ASSY OF . SEE FIG. 54 FOR DETAIL PARTS	1		PAODD
	- 25	ST2169-02	52661	. NUT OPTION . . . . SEE OPTION TABLE	7		PAFZZ
	- 26	MS9321-11	96906	. WASHER	7		PAOZZ
	- 27	4046363	52661	. NUT OPTION . . . . SEE OPTION TABLE	7	MK	PAOZZ
	- 27A	ST2785-10	52661	. NUT OPTION . . . . SEE OPTION TABLE	14	ML	PAOZZ
	- 28	4075598	52661	. BOLT-SHOULDER, DOUBLE HEX . . . . 0.190-32 X 0.875 IN. LONG	7	MK	PAOZZ
	- 28A	4082897	52661	. BOLT-SHOULDER . . . . 0.250-28 X 0.925 IN.	14	ML	PAOZZ
		4075596	52661	. CLEVIS-AUGMENTOR SPRAY MANIFOLD, ASSY . . . OF	7	MK	PAFZZ
	- 29	4072871	52661	.. RIVET-TUBULAR, UNIVERSAL . . . . 0.250 X 0.460	1		PAFZZ
	- 30	4002886	52661	.. WASHER-FLAT . . . . 0.260 X 0.450 X 0.125 IN. THK	1		PAOZZ
	- 31	4075597	52661	.. LINK-AUGMENTOR SPRAY MANIFOLD	1		PAFZZ
	- 32	4072896	52661	.. CLEVIS-AUGMENTOR SPRAY MANIFOLD	1		PAFZZ
	- 32A	4082894	52661	. CLEVIS-AUGMENTOR SPRAY MANIFOLD	7	ML	PAFZZ
	- 32B	4082895	52661	. LINK-AUGMENTOR SPRAY MANIFOLD	7	ML	PAFZZ
	- 33	4075578	52661	. PLATE-WEAR, AUGMENTOR SPRAY MANIFOLD	7	MK	PAOZZ
	- 33A	4082896	52661	. PLATE-WEAR, AUGMENTOR SPRAY MANIFOLD	7	ML	PAOZZ
	- 34	4046363	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
	- 35	MS9696-08	96906	. BOLT (AP)	2		PAFZZ
	- 36	4075541-01 #	52661	. MANIFOLD-SPRAY, AUGMENTOR, ASSY OF	1	YH	PAFDD
		= 4083223-01 #	52661	. MANIFOLD-SPRAY, AUGMENTOR, ASSY OF . . . . REOP AND REID OF 4075541-01 DO NOT PROCURE FROM P&W	1	YJ	PAOZZ
		= 4082793-01 #	52661	. MANIFOLD-SPRAY, AUGMENTOR, ASSY OF	1	YJ	PAFDD
	- 37	ST2018-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	3	MY	PAOZZ
		ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.750 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	3	MZ	PAOZZ
	- 38	4072405	52661	.. NUT OPTION . . . . SEE OPTION TABLE	3		PAFZZ
	- 39	AN123620	88044	.. RIVET (AP)	2		PAFZZ
	- 40	4072742	52661	. SUPPORT-COVER, PAD 65	1	WT	PAOZZ
		4083510	52661	. SUPPORT-COVER, PAD 65	1	WU	PAOZZ
	- 41	4023116	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	4	MY	PAOZZ
		704342	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	4	MZ	PAOZZ
   R	- 41A	4080956	52661	. GASKET-AUGMENTOR MANIFOLD COLLAR, TUBE . CONNECTION SUPERSEDES 4082518 SUPERSEDED BY 4086427	1	MZ	PAOZZ
R R R		4086427	52661	. GASKET-AUGMENTOR MANIFOLD COLLAR, TUBE . CONNECTION SUPERSEDES 4080956	1		PAOZZ
  R	- 41B	4080949	52661	. GASKET-4.500 BOLT CIRCLE, 4 HOLES . . . . SUPERSEDES 4082513 SUPERSEDED BY 4086421	1	MZ	PAOZZ
R R		4086421	52661	. GASKET-4.500 BOLT CIRCLE, 4 HOLES . . . . SUPERSEDES 4080949	1		PAOZZ
	- 42	4075935	52661	. BRACKET-LOOP CLAMP	1		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
53 - 43	4046363		52661	. NUT OPTION . . . . SEE OPTION TABLE	6		PAOZZ
- 44	4075598		52661	. BOLT-SHOULDER, DOUBLE HEX . . . . . . 0.190-32 X 0.875 IN. LONG	6		PAOZZ
	4075591		52661	. CLEVIS-AUGMENTOR SPRAY MANIFOLD, ASSY . . . OF	6		PAFFF
- 45	ST2169-02		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAFZZ
- 45A	4072899		52661	.. RIVET-TUBULAR, UNIVERSAL . . . . . . 0.250 IN. DIA X 0.630 IN. LONG	1		PAFZZ
- 45B	4002886		52661	.. WASHER-FLAT . . . . 0.260 X 0.450 X 0.125 IN. THK	1		PAOZZ
- 45C	4075593		52661	.. CLEVIS-AUGMENTOR SPRAY MANIFOLD	1		PAFZZ
- 45D	4075592-01		52661	.. ROD-AUGMENTOR SPRAY MANIFOLD, ASSY OF . .	1		PAFZZ
	4075588		52661	. CLEVIS-AUGMENTOR SPRAY MANIFOLD, ASSY . . . OF	4		PAFFF
- 46	ST2169-02		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAFZZ
- 47	4046363		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
- 48	4075598		52661	. BOLT-SHOULDER, DOUBLE HEX . . . . . . 0.190-32 X 0.875 IN. LONG (AP)	1		PAOZZ
- 48A	4072899		52661	.. RIVET-TUBULAR, UNIVERSAL . . . . . . 0.250 IN. DIA X 0.630 IN. LONG	1		PAFZZ
- 48B	4002886		52661	.. WASHER-FLAT . . . . 0.260 X 0.450 X 0.125 IN. THK	1		PAOZZ
- 49	4075590		52661	.. CLEVIS-AUGMENTOR SPRAY MANIFOLD	1		PAFZZ
- 50	4075589-01		52661	.. ROD-AUGMENTOR SPRAY MANIFOLD, ASSY OF . .	1		PAFZZ
- 51	4075578		52661	. PLATE-WEAR, AUGMENTOR SPRAY MANIFOLD	7		PAOZZ
- 52	4046363		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 53	MS9696-08		96906	. BOLT (AP)	2		PAFZZ
- 54	4075542-01	#	52661	. MANIFOLD-SPRAY, AUGMENTOR, ASSY OF . . . . SUPERSEDED BY 4080672-01	1		PAOFF
	4080672-01	#	52661	. MANIFOLD-SPRAY, AUGMENTOR, ASSY OF . . . . SUPERSEDES 4075542-01	1		PAOFF
- 55	ST2018-020		52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	3		PAOZZ
- 55A	ST2018-020		52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	3	MY	PAOZZ
	ST2018-024		52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.750 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	3	MZ	PAOZZ
- 56	4072405		52661	.. NUT OPTION . . . . SEE OPTION TABLE	6		PAFZZ
- 57	AN123620		88044	.. RIVET (AP)	2		PAFZZ
- 58	4072744		52661	. SUPPORT-COVER, PAD 53	1		PAOZZ
- 59	4023116		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 60	4072745		52661	. SUPPORT-COVER, PAD 66	1		PAOZZ
- 61	4023116		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	4	MY	PAOZZ
	704342		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	4	MZ	PAOZZ
- 61A	4080955		52661	. GASKET-AUGMENTOR MANIFOLD COLLAR, TUBE . CONNECTION SUPERSEDES 4082517 SUPERSEDED BY 4086426 (R)	1	MZ	PAOZZ
	4086426 (R)		52661	. GASKET-AUGMENTOR MANIFOLD COLLAR, TUBE . CONNECTION SUPERSEDES 4080955 (R)	1		PAOZZ

	FIGURE & INDEX NUMBER	PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	53 - 61B	4080951		52661	. GASKET-REAR FAN DUCT BOSS . . . . SUPERSEDES 4082515 SUPERSEDED BY 4086424	1	MZ	PAOZZ
R R R		4086424		52661	. GASKET-REAR FAN DUCT BOSS . . . . SUPERSEDES 4080951	1		PAOZZ
	- 62	4046363		52661	. NUT OPTION . . . . SEE OPTION TABLE	3		PAOZZ
	- 63	4075598		52661	. BOLT-SHOULDER, DOUBLE HEX . . . . 0.190-32 X 0.875 IN. LONG	3		PAOZZ
		4075585		52661	. CLEVIS-AUGMENTOR SPRAY MANIFOLD, ASSY . . . OF	3		PAFFF
	- 64	ST2169-02		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAFZZ
	- 64A	4072899		52661	.. RIVET-TUBULAR, UNIVERSAL . . . . 0.250 IN. DIA X 0.630 IN. LONG	1		PAFZZ
	- 64B	4002886		52661	.. WASHER-FLAT . . . . 0.260 X 0.450 X 0.125 IN. THK	1		PAOZZ
	- 64C	4075587		52661	.. CLEVIS-AUGMENTOR SPRAY MANIFOLD	1		PAFZZ
	- 64D	4075586-01		52661	.. ROD-AUGMENTOR SPRAY MANIFOLD, ASSY OF . .	1		PAFZZ
		4075582		52661	. CLEVIS-AUGMENTOR SPRAY MANIFOLD, ASSY . . . OF	3		PAFFF
	- 65	ST2169-02		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAFZZ
	- 65A	4072899		52661	.. RIVET-TUBULAR, UNIVERSAL . . . . 0.250 IN. DIA X 0.630 IN. LONG	1		PAFZZ
	- 65B	4002886		52661	.. WASHER-FLAT . . . . 0.260 X 0.450 X 0.125 IN. THK	1		PAOZZ
	- 65C	4075584		52661	.. CLEVIS-AUGMENTOR SPRAY MANIFOLD	1		PAFZZ
	- 65D	4075583-01		52661	.. ROD-AUGMENTOR SPRAY MANIFOLD, ASSY OF . .	1		PAFZZ
	- 66	4075579		52661	. CLEVIS-AUGMENTOR SPRAY MANIFOLD, ASSY . . . OF	3		PAFBZ
	- 67	ST2169-02		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAFZZ
	- 68	4046363		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 69	4075598		52661	. BOLT-SHOULDER, DOUBLE HEX . . . . 0.190-32 X 0.875 IN. LONG (AP)	1		PAOZZ
	- 70	4075578		52661	. PLATE-WEAR, AUGMENTOR SPRAY MANIFOLD	6		PAOZZ
	- 71	4046363		52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
	- 72	MS9696-08		96906	. BOLT (AP)	2		PAFZZ
	- 73	4075726-01	#	52661	. MANIFOLD-SPRAY, AUGMENTOR, ASSY OF . . . . SUPERSEDED BY 4080670-01	1		PAOFF
		4080670-01	#	52661	. MANIFOLD-SPRAY, AUGMENTOR, ASSY OF . . . . SUPERSEDES 4075726-01	1		PAOFF
	- 74	ST2018-020		52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	6	MY	PAOZZ
		ST2018-024		52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.750 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	6	MZ	PAOZZ
	- 75	4079896		52661	.. CLAMP HALF-LOOP, 2 HOLE . . . . USE ONLY ON 4080670-01	2		XA
	- 76	HL688DU-6		56878 73197 92215	.. COLLAR-PIN-RIVET, THREADED, SELF-LOCKING . . (AP) P&W PART NO. ST2485-09 USE ONLY ON 4080670-01 SUPERSEDED BY 4071724	2		PAFZZ
	- 76A	4071724		52661	.. NUT OPTION (AP) . . . . SEE OPTION TABLE USE ONLY ON 4080670-01 SUPERSEDES HL688DU-6	2		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
53 - 77	HL244-6-3	56878 73197 92215	.. PIN-RIVET-THREADED, FLAT . . . . 0.190-32 X 0.188 (AP) P&W PART NO. ST2484-03 USE ONLY ON 4080670-01 SUPERSEDED BY MS9723-03 OR MS9696-09	2		PAFZZ
- 77A	= MS9723-03	96906	.. BOLT (AP) . . . . USE ONLY ON 4080670-01 SUPERSEDES HL244-6-3	2		PAFZZ
	= MS9696-09	96906	.. BOLT (AP) . . . . USE ONLY ON 4080670-01 SUPERSEDES HL244-6-3	2		PAFZZ
- 78	4079842	52661	.. SPACER-SLEEVE . . . . 0.210 X 0.375 X 0.1475 IN. THK (AP) USE ONLY ON 4080670-01	2		PAFZZ
- 79	4079894	52661	.. SLEEVE HALF-REINFORCING, TUBE . . . . USE ONLY ON 4080670-01	4		PAFZZ
- 80	4079830	52661	.. CLAMP HALF-LOOP . . . . USE ONLY ON 4080670-01	2		XA
- 81	HL688DU-6	56878 73197 92215	.. COLLAR-PIN-RIVET, THREADED, SELF-LOCKING . . (AP) P&W PART NO. ST2485-09 USE ONLY ON 4080670-01 SUPERSEDED BY 4071724	2		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	53 - 81A	4071724	52661	.. NUT OPTION (AP)	2		PAOZZ
				SEE OPTION TABLE			
				USE ONLY ON 4080670-01			
				SUPERSEDES HL688DU-6			
	- 82	HL244-6-3	56878	.. PIN-RIVET-THREADED, FLAT	2		PAFZZ
			73197	0.190-32 X 0.188 (AP)			
			92215	P&W PART NO. ST2484-03			
				USE ONLY ON 4080670-01			
				SUPERSEDED BY MS9723-03 OR MS9696-09			
	- 82A	= MS9723-03	96906	.. BOLT (AP)	2		PAFZZ
				USE ONLY ON 4080670-01			
				SUPERSEDES HL244-6-3			
		= MS9696-09	96906	.. BOLT (AP)	2		PAFZZ
				USE ONLY ON 4080670-01			
				SUPERSEDES HL244-6-3			
	- 83	4079842	52661	.. SPACER-SLEEVE	2		PAFZZ
				0.210 X 0.375 X 0.1475 IN. THK (AP)			
				USE ONLY ON 4080670-01			
	- 84	4079894	52661	.. SLEEVE HALF-REINFORCING, TUBE	4		PAFZZ
				USE ONLY ON 4080670-01			
	- 85	4079895	52661	.. SLEEVE HALF-REINFORCING, TUBE	2		PAFZZ
				USE ONLY ON 4080670-01			
	- 86	4072405	52661	.. NUT OPTION	6		PAFZZ
				SEE OPTION TABLE			
	- 87	AN123620	88044	.. RIVET (AP)	2		PAFZZ
	- 88	4072746	52661	. SUPPORT-COVER, PAD 71	1		PAOZZ
	- 89	4023116	52661	. NUT OPTION (AP)	4	MY	PAOZZ
				SEE OPTION TABLE			
		704342	52661	. NUT OPTION (AP)	4	MZ	PAOZZ
				SEE OPTION TABLE			
	- 89A	4081284	52661	. BRACKET-LOOP CLAMP	1		
	- 90	4072743	52661	. SUPPORT-COVER, PAD 72	1		PAOZZ
	- 91	4023116	52661	. NUT OPTION (AP)	4	MY	PAOZZ
				SEE OPTION TABLE			
		704342	52661	. NUT OPTION (AP)	4	MZ	PAOZZ
				SEE OPTION TABLE			
	- 92	4080954	52661	. GASKET-AUGMENTOR MANIFOLD COLLAR, TUBE	1	MZ	PAOZZ
				CONNECTION			
				SUPERSEDES 4082516			
R				SUPERSEDED BY 4086425			
R		4086425	52661	. GASKET-AUGMENTOR MANIFOLD COLLAR, TUBE	1		PAOZZ
R				CONNECTION			
R				SUPERSEDES 4080954			
	- 93	4080955	52661	. GASKET-AUGMENTOR MANIFOLD COLLAR, TUBE	1	MZ	PAOZZ
				CONNECTION			
				SUPERSEDES 4082517			
R				SUPERSEDED BY 4086426			
R		4086426	52661	. GASKET-AUGMENTOR MANIFOLD COLLAR, TUBE	1		PAOZZ
R				CONNECTION			
R				SUPERSEDES 4080955			
	- 94	4080950	52661	. GASKET-4.2 BOLT CIRCLE, 4 HOLES	1	MZ	PAOZZ
				SUPERSEDES 4082514			
R				SUPERSEDED BY 4086423			
R		4086423	52661	. GASKET-4.200 BOLT CIRCLE, 4 HOLES	1		PAOZZ
R				SUPERSEDES 4080950			
	- 95	4080951	52661	. GASKET-REAR FAN DUCT BOSS	1	MZ	PAOZZ
				SUPERSEDES 4082515			
R				SUPERSEDED BY 4086424			
R		4086424	52661	. GASKET-REAR FAN DUCT BOSS	1		PAOZZ
R				SUPERSEDES 4080951			

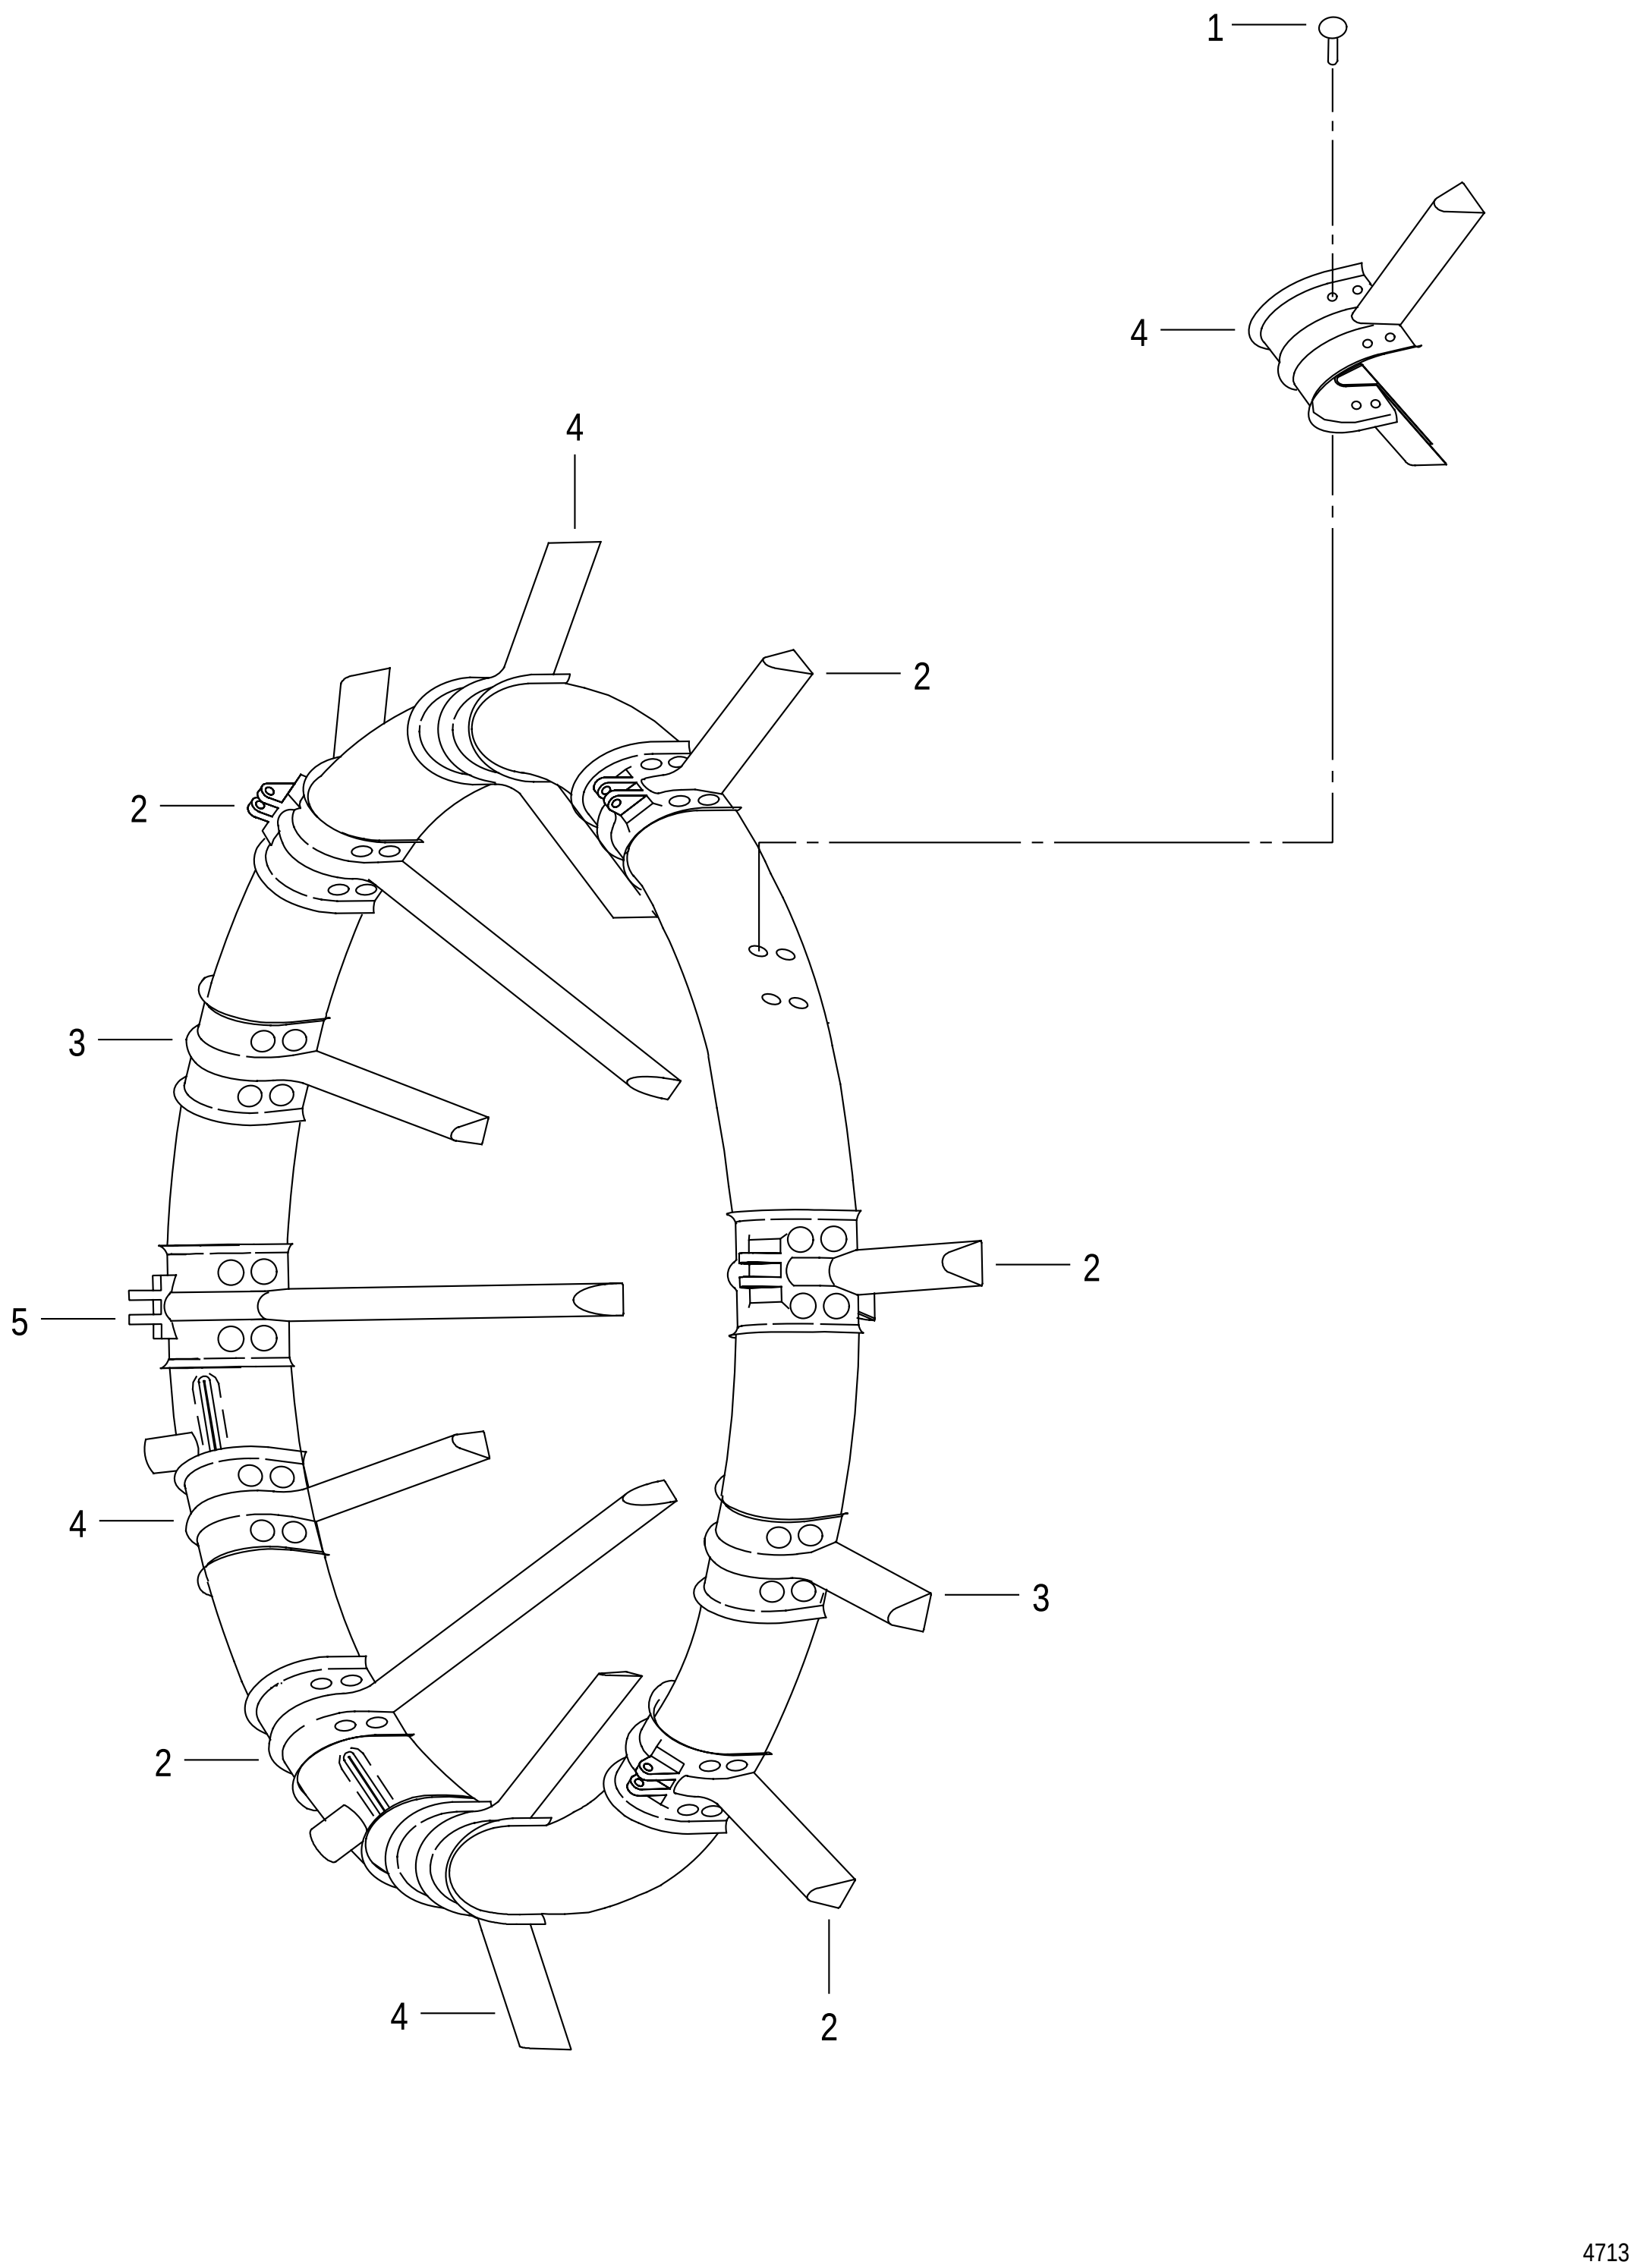


FIGURE 54. AUGMENTOR IGNITER FLAME HOLDER

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
54	4071179-01	52661	FLAME HOLDER-AUGMENTOR IGNITER, ASSY OF . . SEE FIG. 53-24 FOR NHA PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 1	ST1219-108	52661	. RIVET-SOLID, UNIVERSAL . . . . 0.125 DIA X 0.375 IN. LONG	96		PAFZZ
- 2	4071180-01	52661	. FLAME HOLDER SEGMENT-AUGMENTOR, ASSY . . OF	5		PAFFF
- 3	4071181-01	52661	. FLAME HOLDER SEGMENT-AUGMENTOR, ASSY . . OF	2		PAFFF
- 4	4071182-01	52661	. FLAME HOLDER SEGMENT-AUGMENTOR, ASSY . . OF	4		PAFFF
- 5	4077256-01	52661	. FLAME HOLDER SEGMENT-AUGMENTOR, ASSY . . OF	1		PAFFF


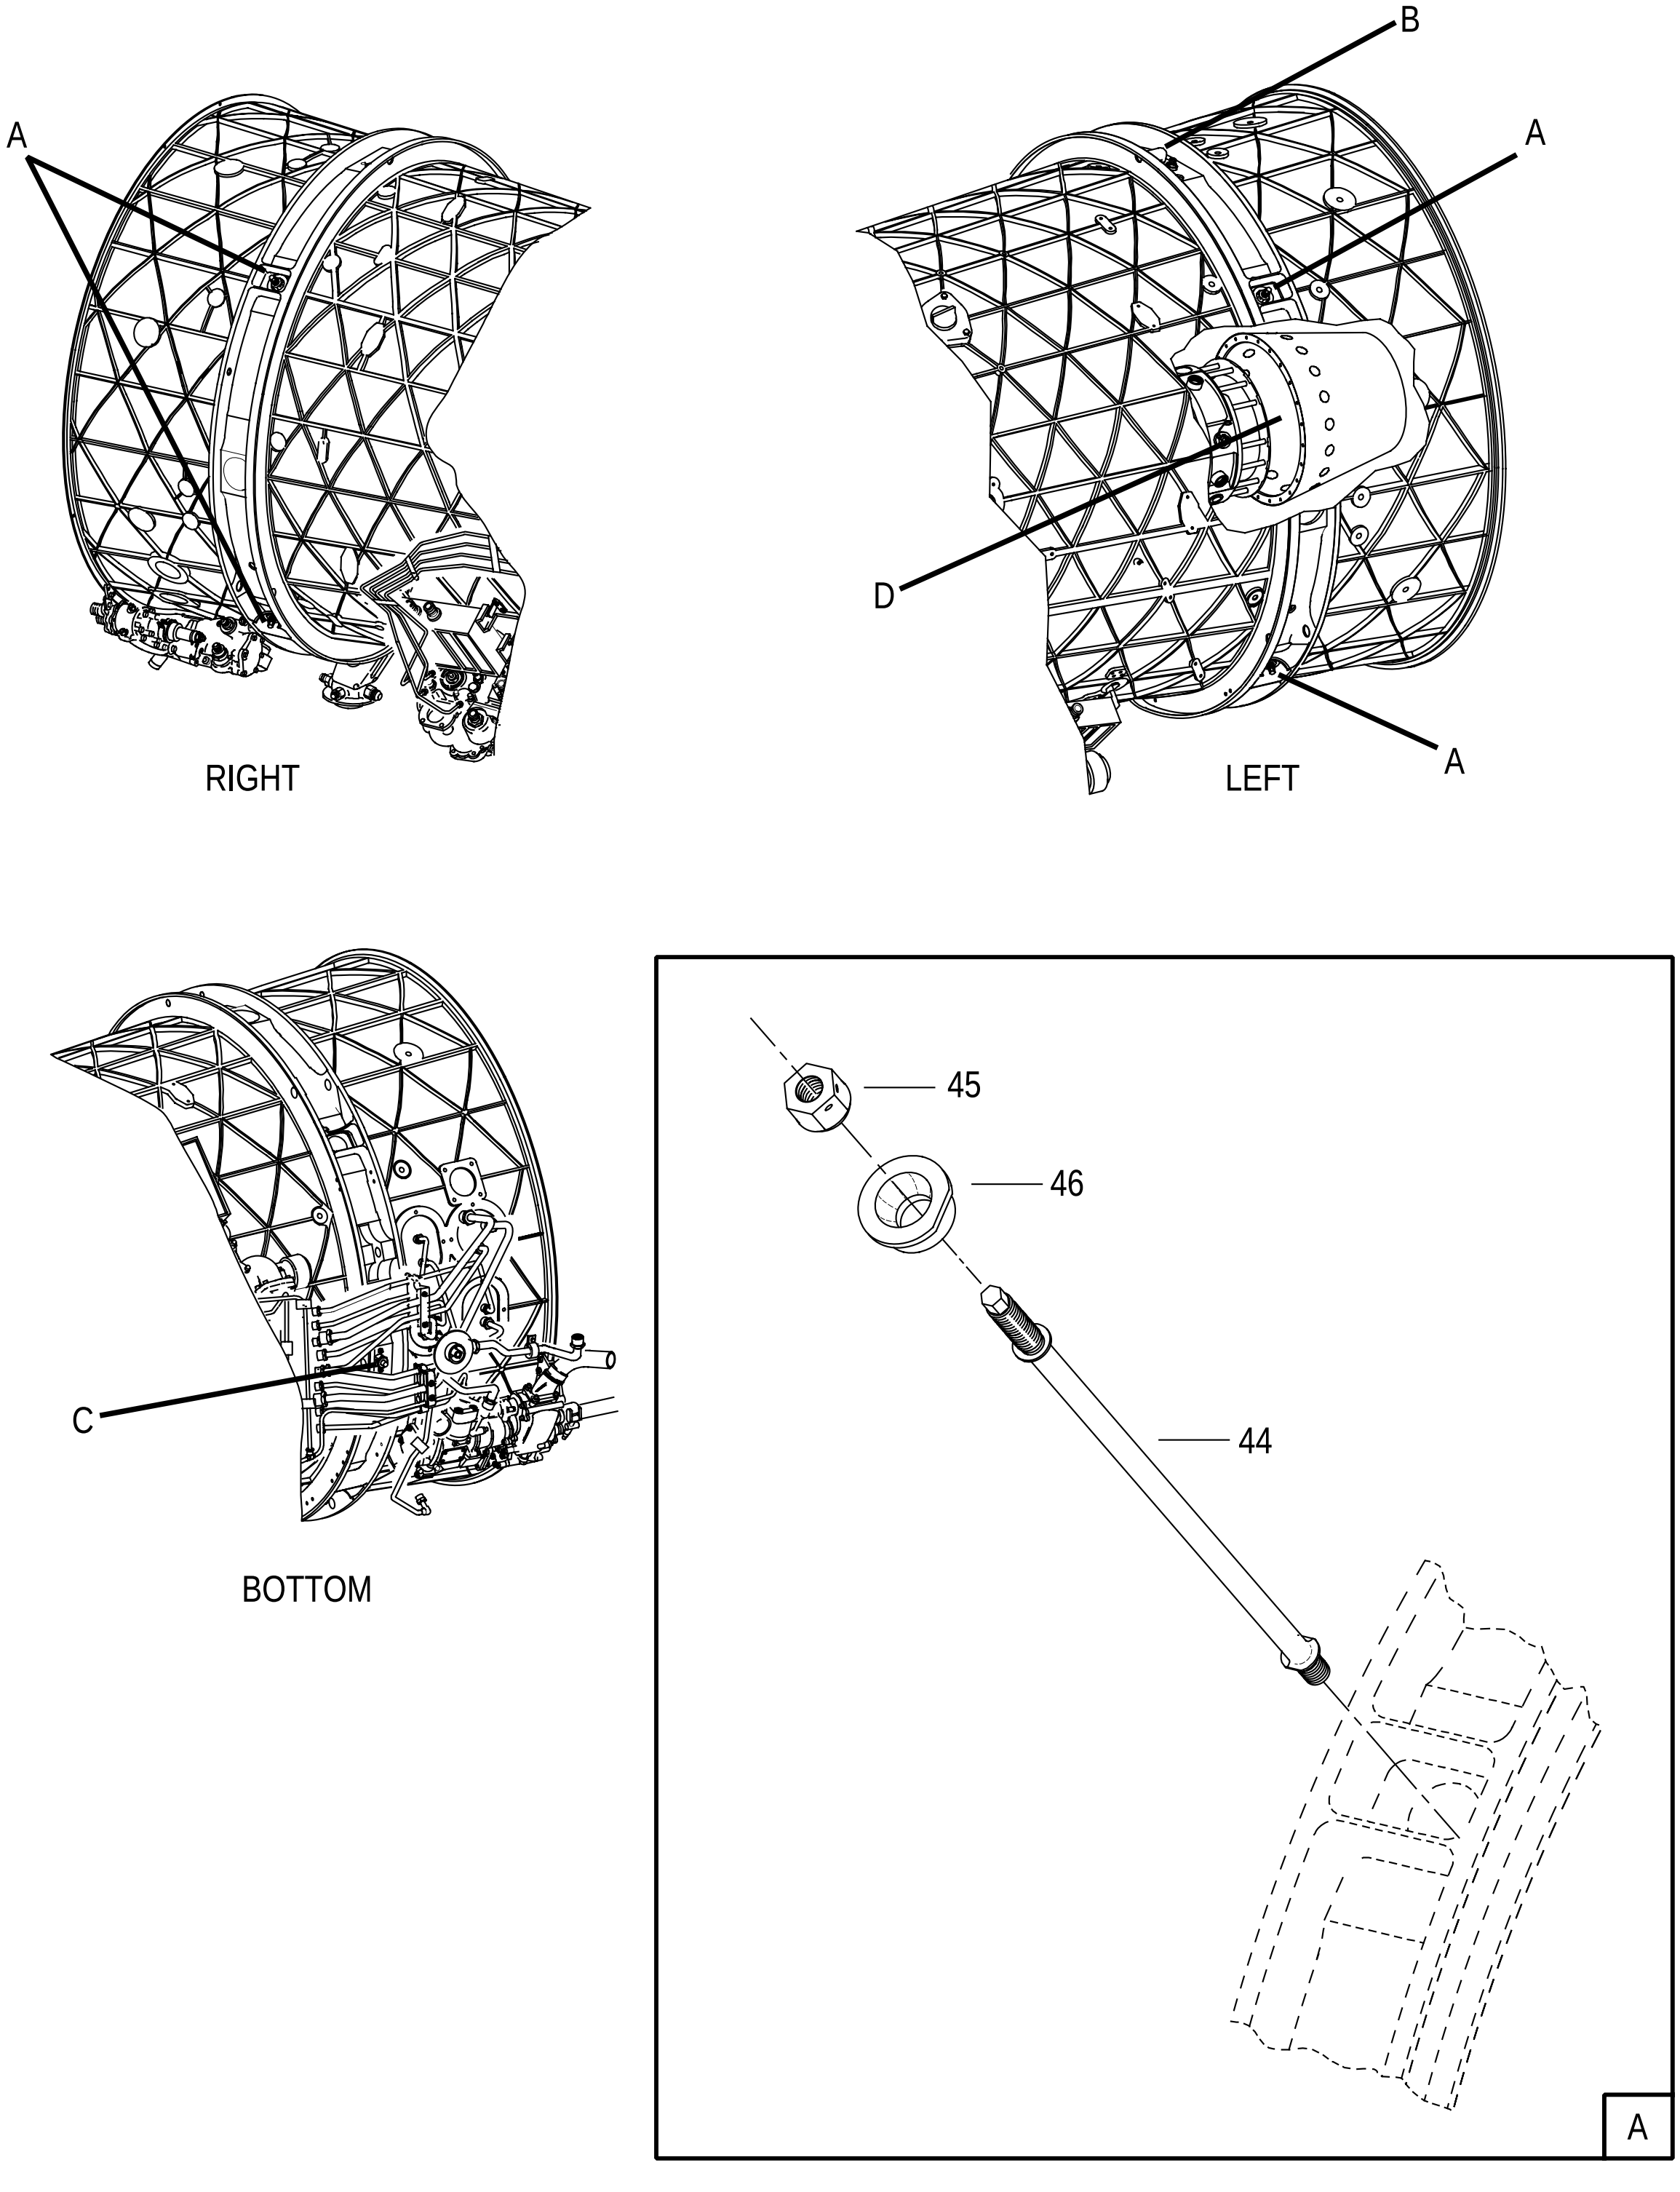


FIGURE 55. NO. 5 BEARING SUPPORT RODS, INTERNAL OIL TUBING, HEAT SHIELD, AND TURBINE EXHAUST CONE
(SHEET 1 OF 2)

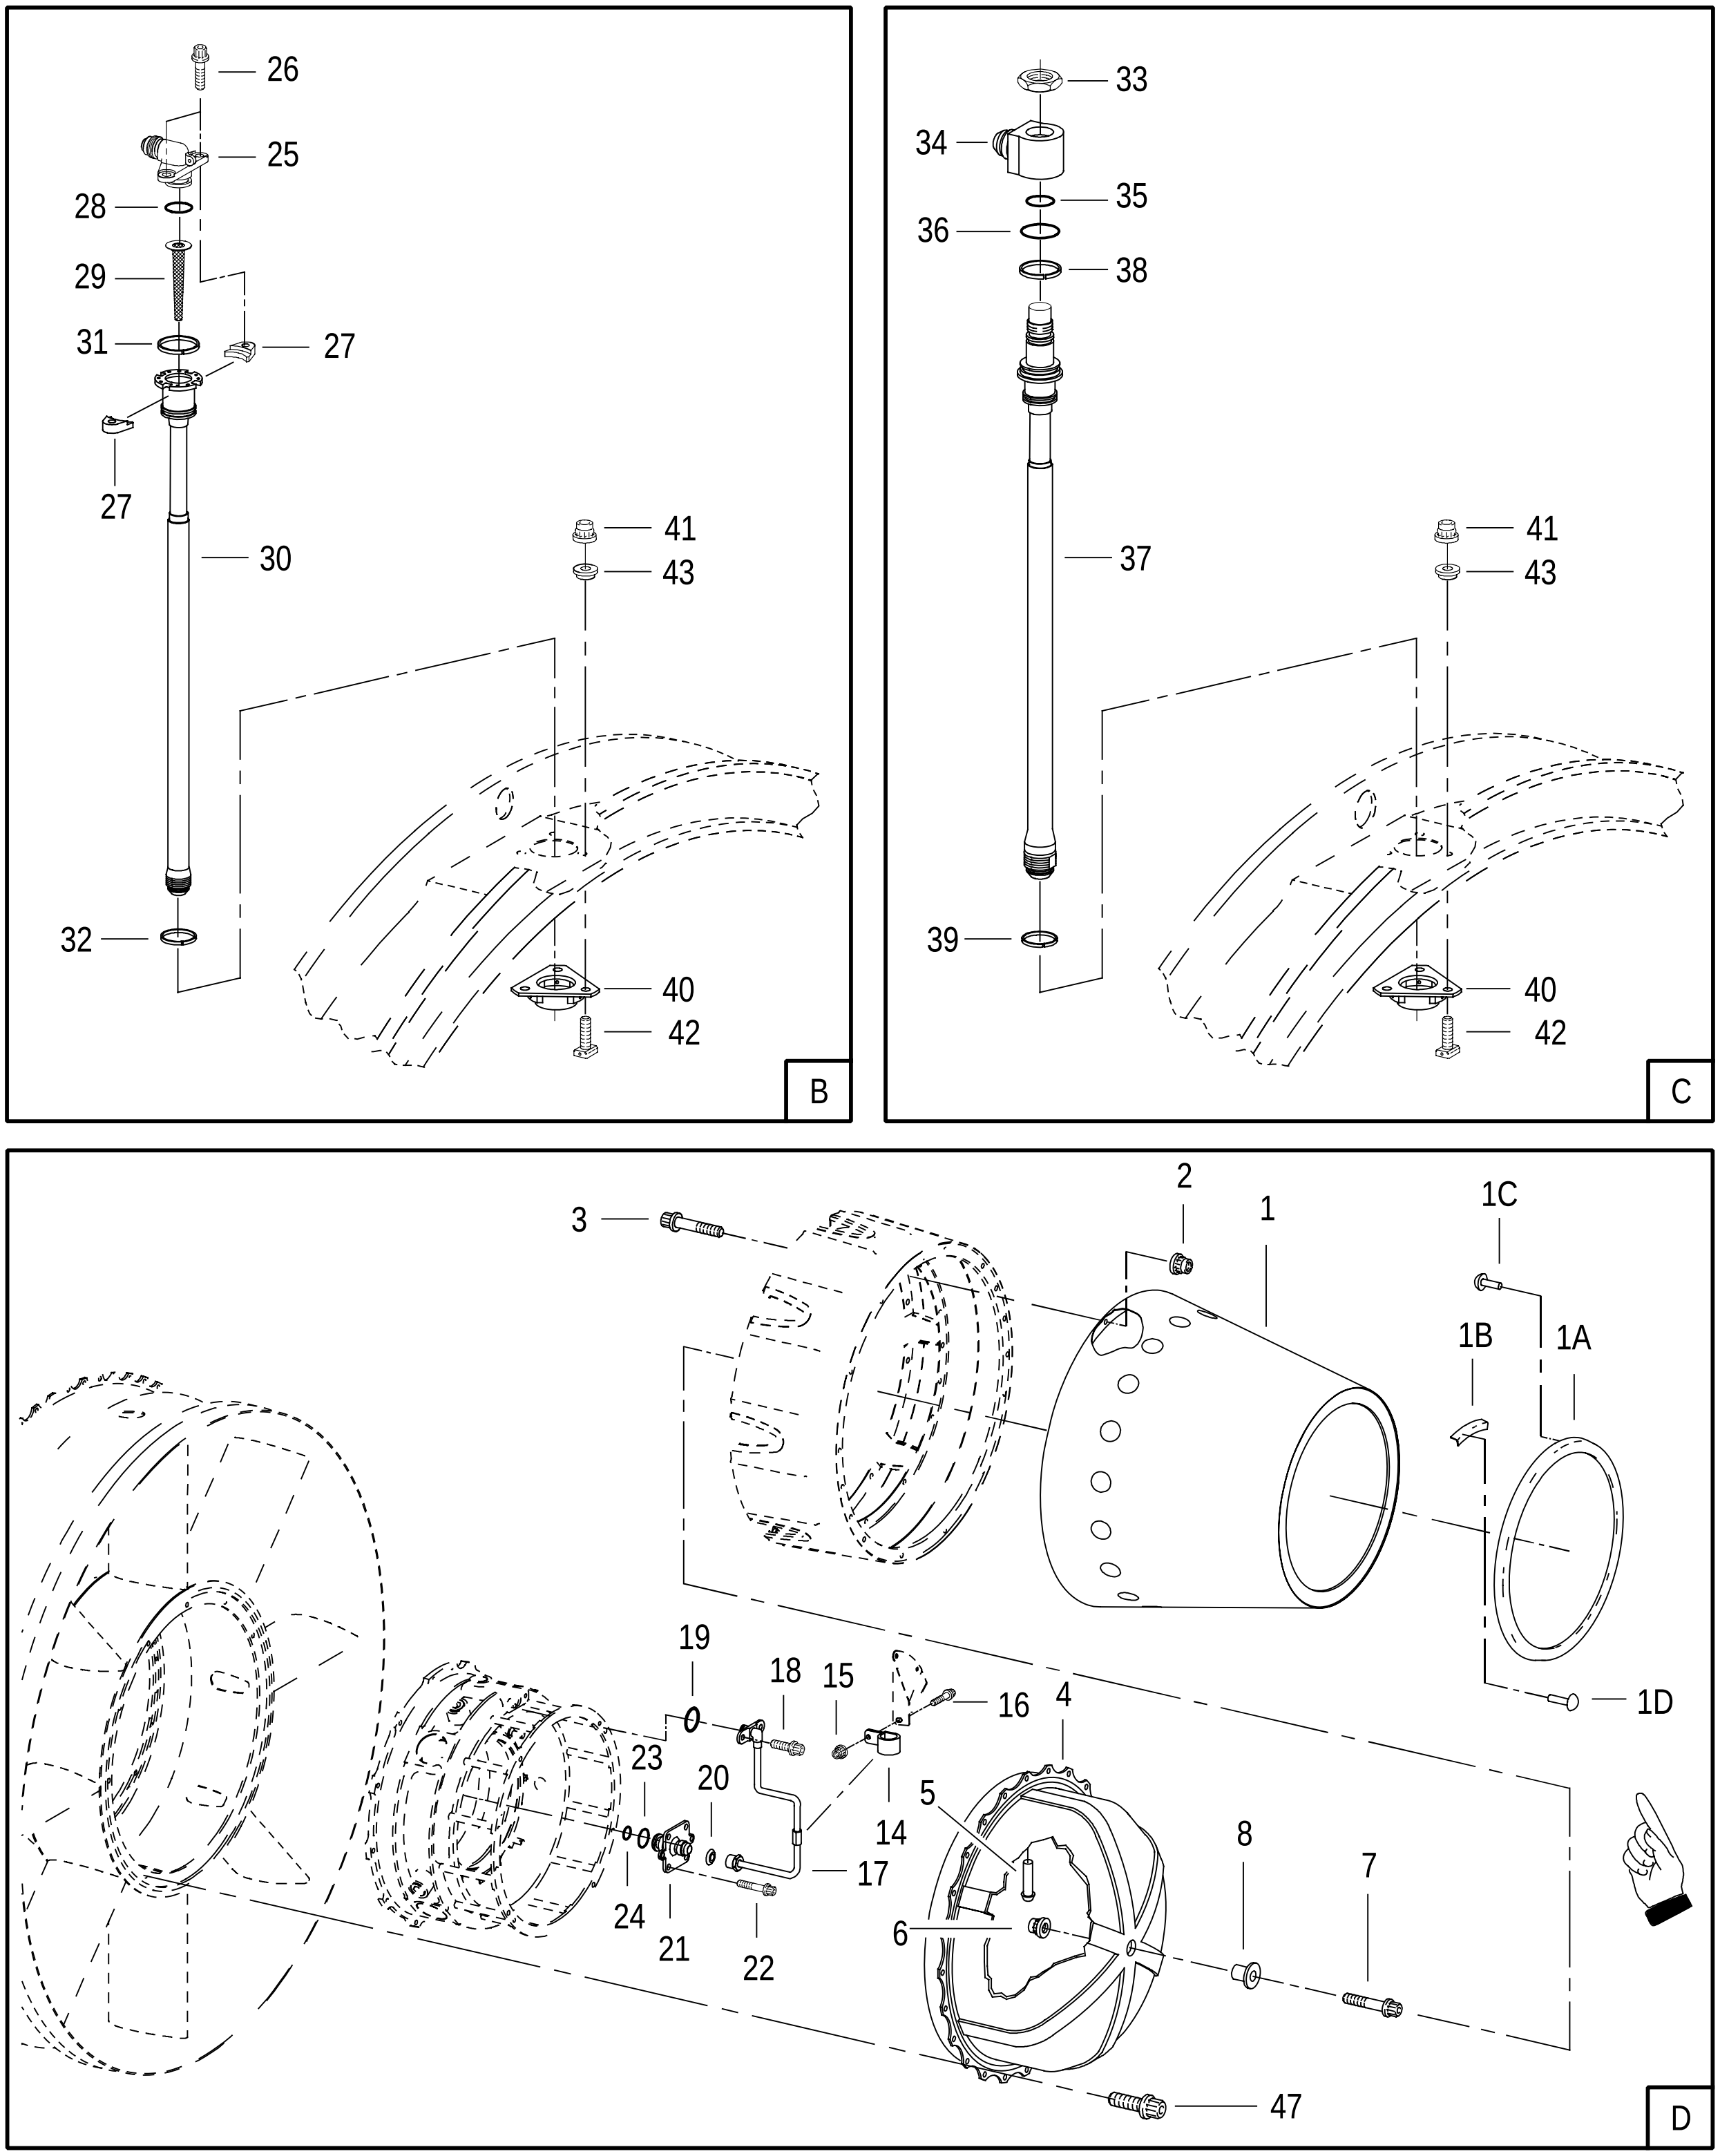


96596


FIGURE 55. NO. 5 BEARING SUPPORT RODS, INTERNAL OIL TUBING, HEAT SHIELD, AND TURBINE EXHAUST CONE
(SHEET 2 OF 2)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	55	NO NUMBER		NO. 5 BEARING SUPPORT RODS, INTERNAL OIL . . . TUBING, HEAT SHIELD, AND TURBINE EXHAUST CONE SEE FIG. 38-15 FOR NHA	REF		
	- 1	4072534-01	52661	. CONE-TURBINE EXHAUST, ASSY OF	1		PAOFF
	- 1A	4083738	52661	.. STIFFENER-TURBINE EXHAUST CONE . . . . SERVICE REPAIR PART	1		PAFZZ
	- 1B	4083739	52661	.. DOUBLER-SEGMENT, TURBINE EXHAUST CONE . . SERVICE REPAIR PART	1		PAFZZ
	- 1C	AN123398	88044	.. RIVET . . . . SERVICE REPAIR PART	26		PAFZZ
	- 1D	AN123336	88044	.. RIVET . . . . SERVICE REPAIR PART	2		PAFZZ
	- 2	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	24		PAOZZ
	- 3	MS9696-05	96906	. BOLT (AP)	24		PAFZZ
R	- 4	4071228-01	52661	. SHIELD-HEAT, NO. 5 BEARING, ASSY OF . . . . REPLACED BY 4080086-01	1		PAFFF
R		4080086-01	52661	. SHIELD-HEAT, NO. 5 BEARING, ASSY OF . . . . REPLACES 4071228-01 PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
	- 5	AN123302	88044	.. RIVET	16		PAFZZ
	- 6	H49513-3	15653	.. NUT-SELF-LOCKING, DOUBLE HEX . . . . 0.190-32UNJF-3B X 0.240 IN. THK P&W PART NO. ST2119-09 USE ONLY ON 4080086-01	1		XA
	- 7	MS9696-09	96906	.. BOLT . . . . USE ONLY ON 4080086-01	1		PAFZZ
	- 8	4076294	52661	.. BUSHING-SLEEVE, FLANGED . . . . 0.221 X 0.315 X 0.345 IN. THK USE ONLY ON 4080086-01	1		PAFZZ
	- 9	DELETED					
	- 10	DELETED					
	- 11	DELETED					
	- 12	DELETED					
	- 13	DELETED					
	- 14	4081283	52661	. CLAMP-LOOP . . . . 0.438 IN. ID	1		PAOZZ
	- 15	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAOZZ
	- 16	ST2635-016	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAFZZ
	- 17	4081294-01	52661	. TUBE-PRESSURE, NO. 5 BEARING, ASSY OF	1	DQ	PAOFF
		4084273-01	52661	. TUBE-PRESSURE, NO. 5 BEARING, ASSY OF	1	DR	PAOFF
	- 18	ST2635-016	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAFZZ
	- 19	ST2283-011	52661	. PACKING-PREFORMED . . . . 0.301 ID X 0.070 IN. DIA ROUND	1		PAOZZ
	- 20	ST2284-06	52661	. GASKET OPTION . . . . SEE OPTION TABLE	1		PAOZZ
	- 21	4081165	52661	. ADAPTER-NO. 5 BEARING	1	DQ	PAOBZ
		4084272	52661	. ADAPTER-NO. 5 BEARING	1	DR	PAOBZ
	- 22	ST2635-016	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	4		PAFZZ
	- 23	ST2283-122	52661	. PACKING-PREFORMED . . . . 1.112 ID X 0.103 IN. DIA ROUND	1		PAOZZ
	- 24	ST2283-205	52661	. PACKING-PREFORMED . . . . 0.421 ID. X 0.139 IN. DIA ROUND	1		PAOZZ
	- 25	4016239	52661	. ELBOW-TUBE TO BOSS, 2 HOLE, 90 DEG 0.5625-18UNJF-3A	1		PAOZZ
	- 26	ST2151-012	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.375 IN. LONG (AP)	2		PAOZZ
	- 27	4016238	52661	. NUT-PLAIN, PLATE, NO. 5 BEARING FERRULE (AP)	2		PAOBZ
	- 28	ST1000-112	52661	. PACKING-PREFORMED . . . . 0.487 ID X 0.103 IN. DIA ROUND	1		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
55 - 29	4016241	52661	. STRAINER ELEMENT-CONE, NO. 4 AND 5 BEARING	1		PAOBZ
- 30	4062739	52661	. TUBE-PRESSURE, NO. 5 BEARING, OUTER INTERNAL, ASSY OF	1	CJ	PAFBZ
	4081736	52661	. TUBE-PRESSURE, NO. 5 BEARING, OUTER INTERNAL, ASSY OF REPLACED BY 4085095	1	CK	PAFBZ
	4085095	52661	. TUBE-PRESSURE, NO. 5 BEARING, OUTER INTERNAL, ASSY OF REPLACES 4081736	1		PAFBZ
- 31	4035386	52661	. SEAL RING-METAL 0.888 X 0.0415 X 0.079 IN. THK	1		PAOZZ
- 32	ST2284-07	52661	. GASKET OPTION SEE OPTION TABLE	1		PAOZZ
- 33	4007117	52661	. NUT-PLAIN, HEX, DRILLED 0.625-18UNJF-3B X 0.314 IN. THK	1		PAOZZ
- 34	4022091	52661	. TEE-NO. 5 BEARING	1		PAOZZ
- 35	MS9388-015	96906	. PACKING	1		PAOZZ
- 36	MS9388-020	96906	. PACKING	1		PAOZZ
- 37	4062738	52661	. TUBE-SCAVENGE, NO. 5 BEARING, INNER INTERNAL, ASSY OF	1	CJ	PAFBZ
	4082679	52661	. TUBE-SCAVENGE, NO. 5 BEARING, INNER INTERNAL, ASSY OF	1	CK	PAFBZ
- 38	4035386	52661	. SEAL RING-METAL 0.888 X 0.0415 X 0.079 IN. THK	1		PAOZZ
- 39	VSF1393-N-9B	83324	. GASKET-TUBE 0.562 IN. P&W PART NO. 4061373	1		XA
- 40	4035387	52661	. SLEEVE-SEALING, REAR FAN DUCT	2		PAFBZ
- 41	4023115	52661	. NUT OPTION (AP) SEE OPTION TABLE	3		PAOZZ
- 42	4020727	52661	. BOLT-MACHINE, DRILLED SLAB 0.190-32 X 0.625 IN. LONG (AP)	3		PAFZZ
- 43	4034561	52661	. BUSHING-SLEEVE, FLANGED 0.194 X 0.362 X 0.1675	6		PAFZZ
- 44	4039906	52661	. ROD-NO. 5 BEARING SUPPORT	4		PAFBZ
- 45	4040112	52661	. BALL END-ROD, NO. 5 BEARING SUPPORT (AP)	1		PAFBZ
- 46	4033977	52661	. SEAT-BALL SOCKET, NO. 5 BEARING SUPPORT	4		PAFZZ
	4080823-801	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-802	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-803	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-804	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-805	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-806	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-807	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-808	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-809	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-810	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-811	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-812	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-813	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-814	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-815	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-816	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
	4080823-817	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R	4080823-835	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R	4080823-836	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R	4080823-837	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R	4080823-838	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R	4080823-839	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R	4080823-840	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	55 - 46	4080823-841	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-842	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-843	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-844	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-845	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-846	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-847	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-848	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-849	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-850	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-851	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
R		4080823-852	52661	FAN DRIVE TURBINE MODULE	REF	TY	PAFDD
		4080823-853	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
		4080823-854	52661	FAN DRIVE TURBINE MODULE	REF	TY/XD	PAFDD
R		4080823-872	52661	FAN DRIVE TURBINE MODULE	REF	TY/XB	PAFDD
R		4080823-873	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-874	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-875	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-876	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-877	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-878	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-879	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-880	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-881	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-882	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-883	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-884	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-885	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-886	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-887	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-888	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-889	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-890	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-891	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-892	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-893	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-894	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-895	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-896	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-897	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-898	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-899	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-900	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-901	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-902	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-903	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-904	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-905	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-906	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
R		4080823-907	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
		4080823-908	52661	FAN DRIVE TURBINE MODULE	REF	TY/XF	PAFDD
		4080823-909	52661	FAN DRIVE TURBINE MODULE	REF	TY/XB	PAFDD
		4082655-800	52661	FAN DRIVE TURBINE MODULE	REF	TY/XG	PAFDD
		4082655-801	52661	FAN DRIVE TURBINE MODULE	REF	XC/XE	PAFDD
	- 47	MS9696-09	96906	. BOLT	24		PAFZZ

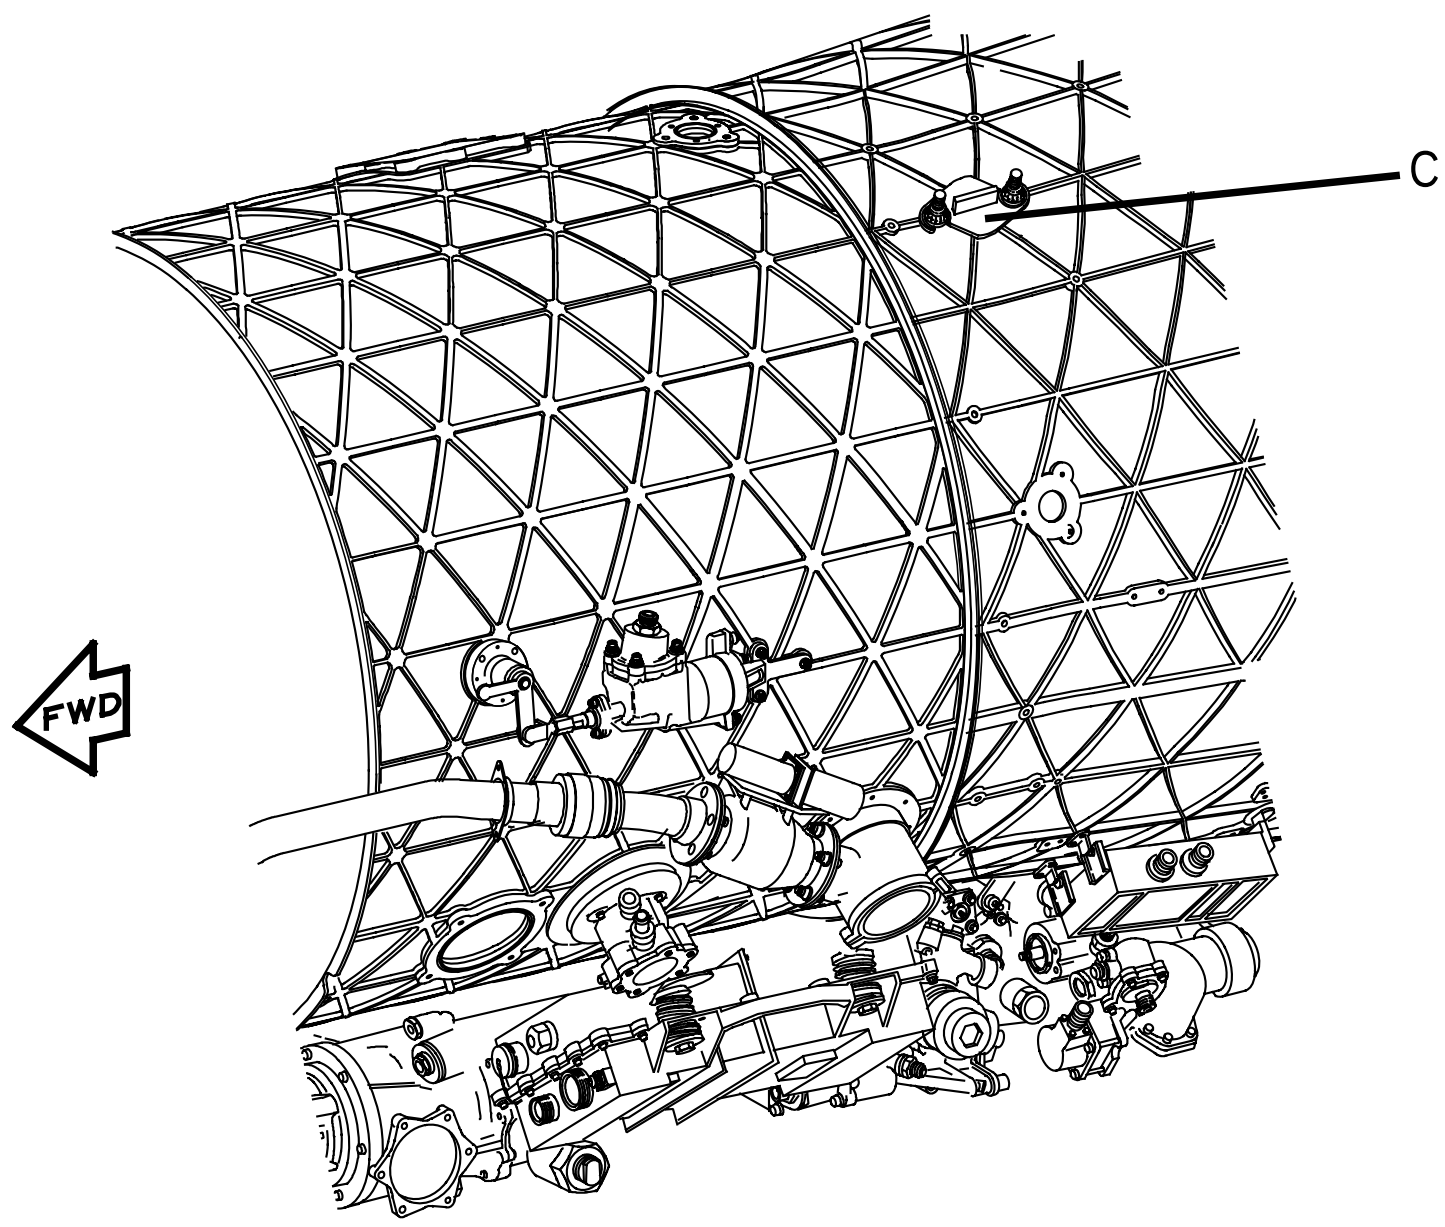

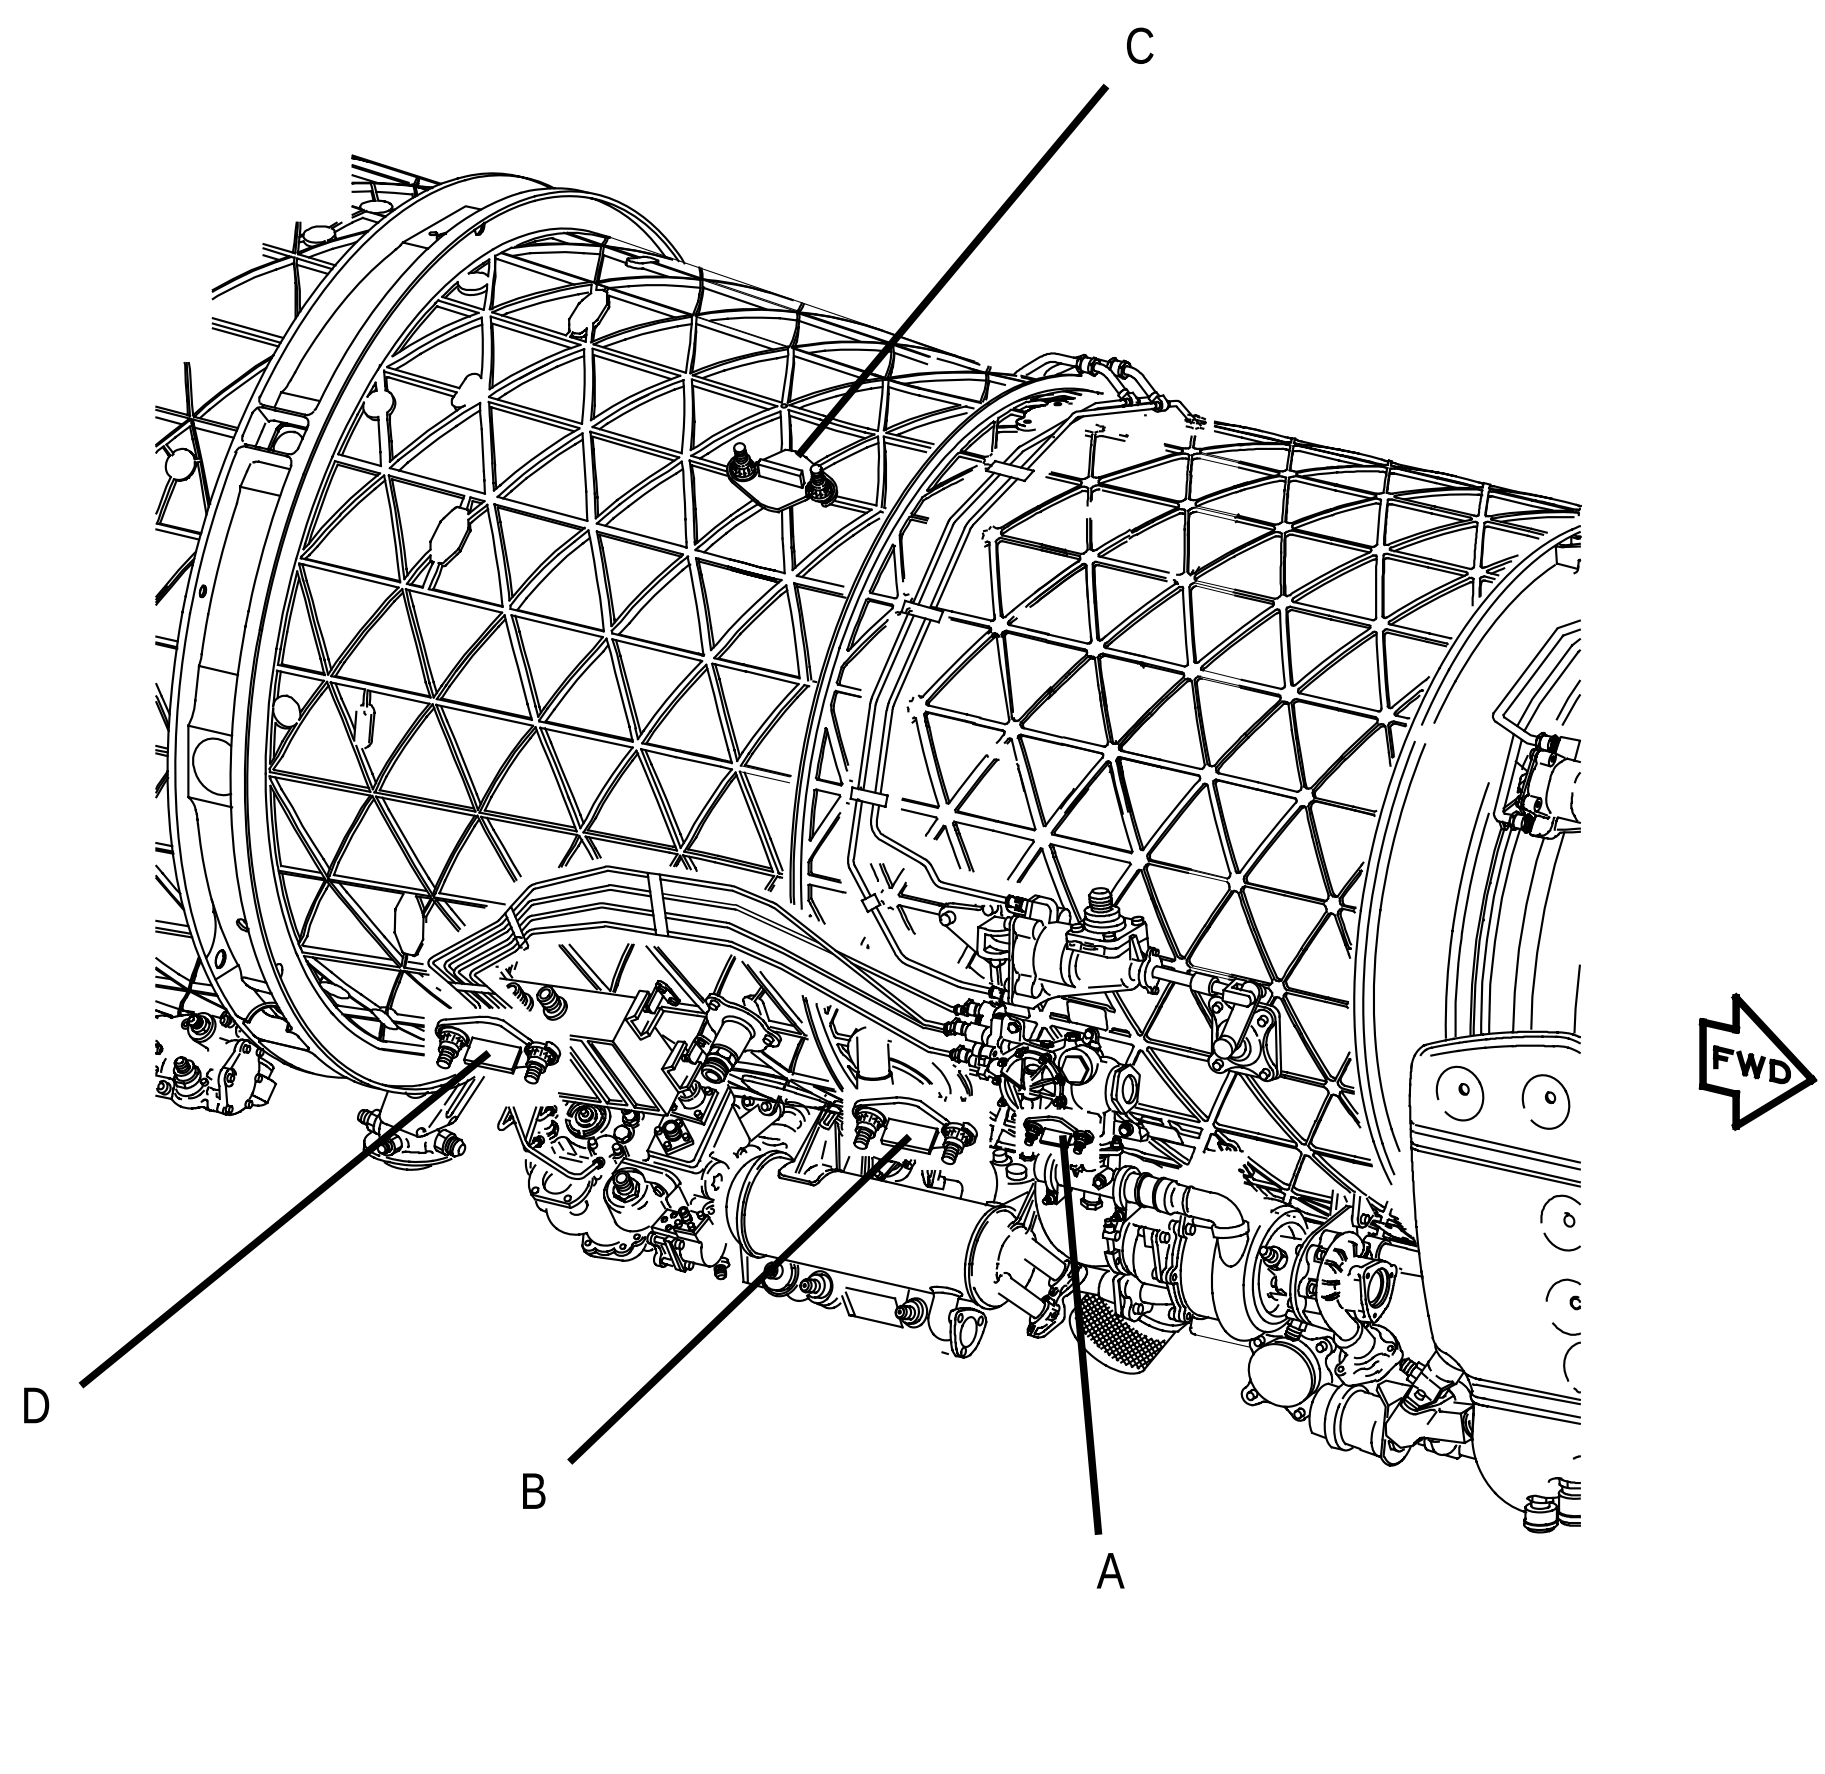

4714

FIGURE 56. BORESCOPE PLUGS
(SHEET 1 OF 2)

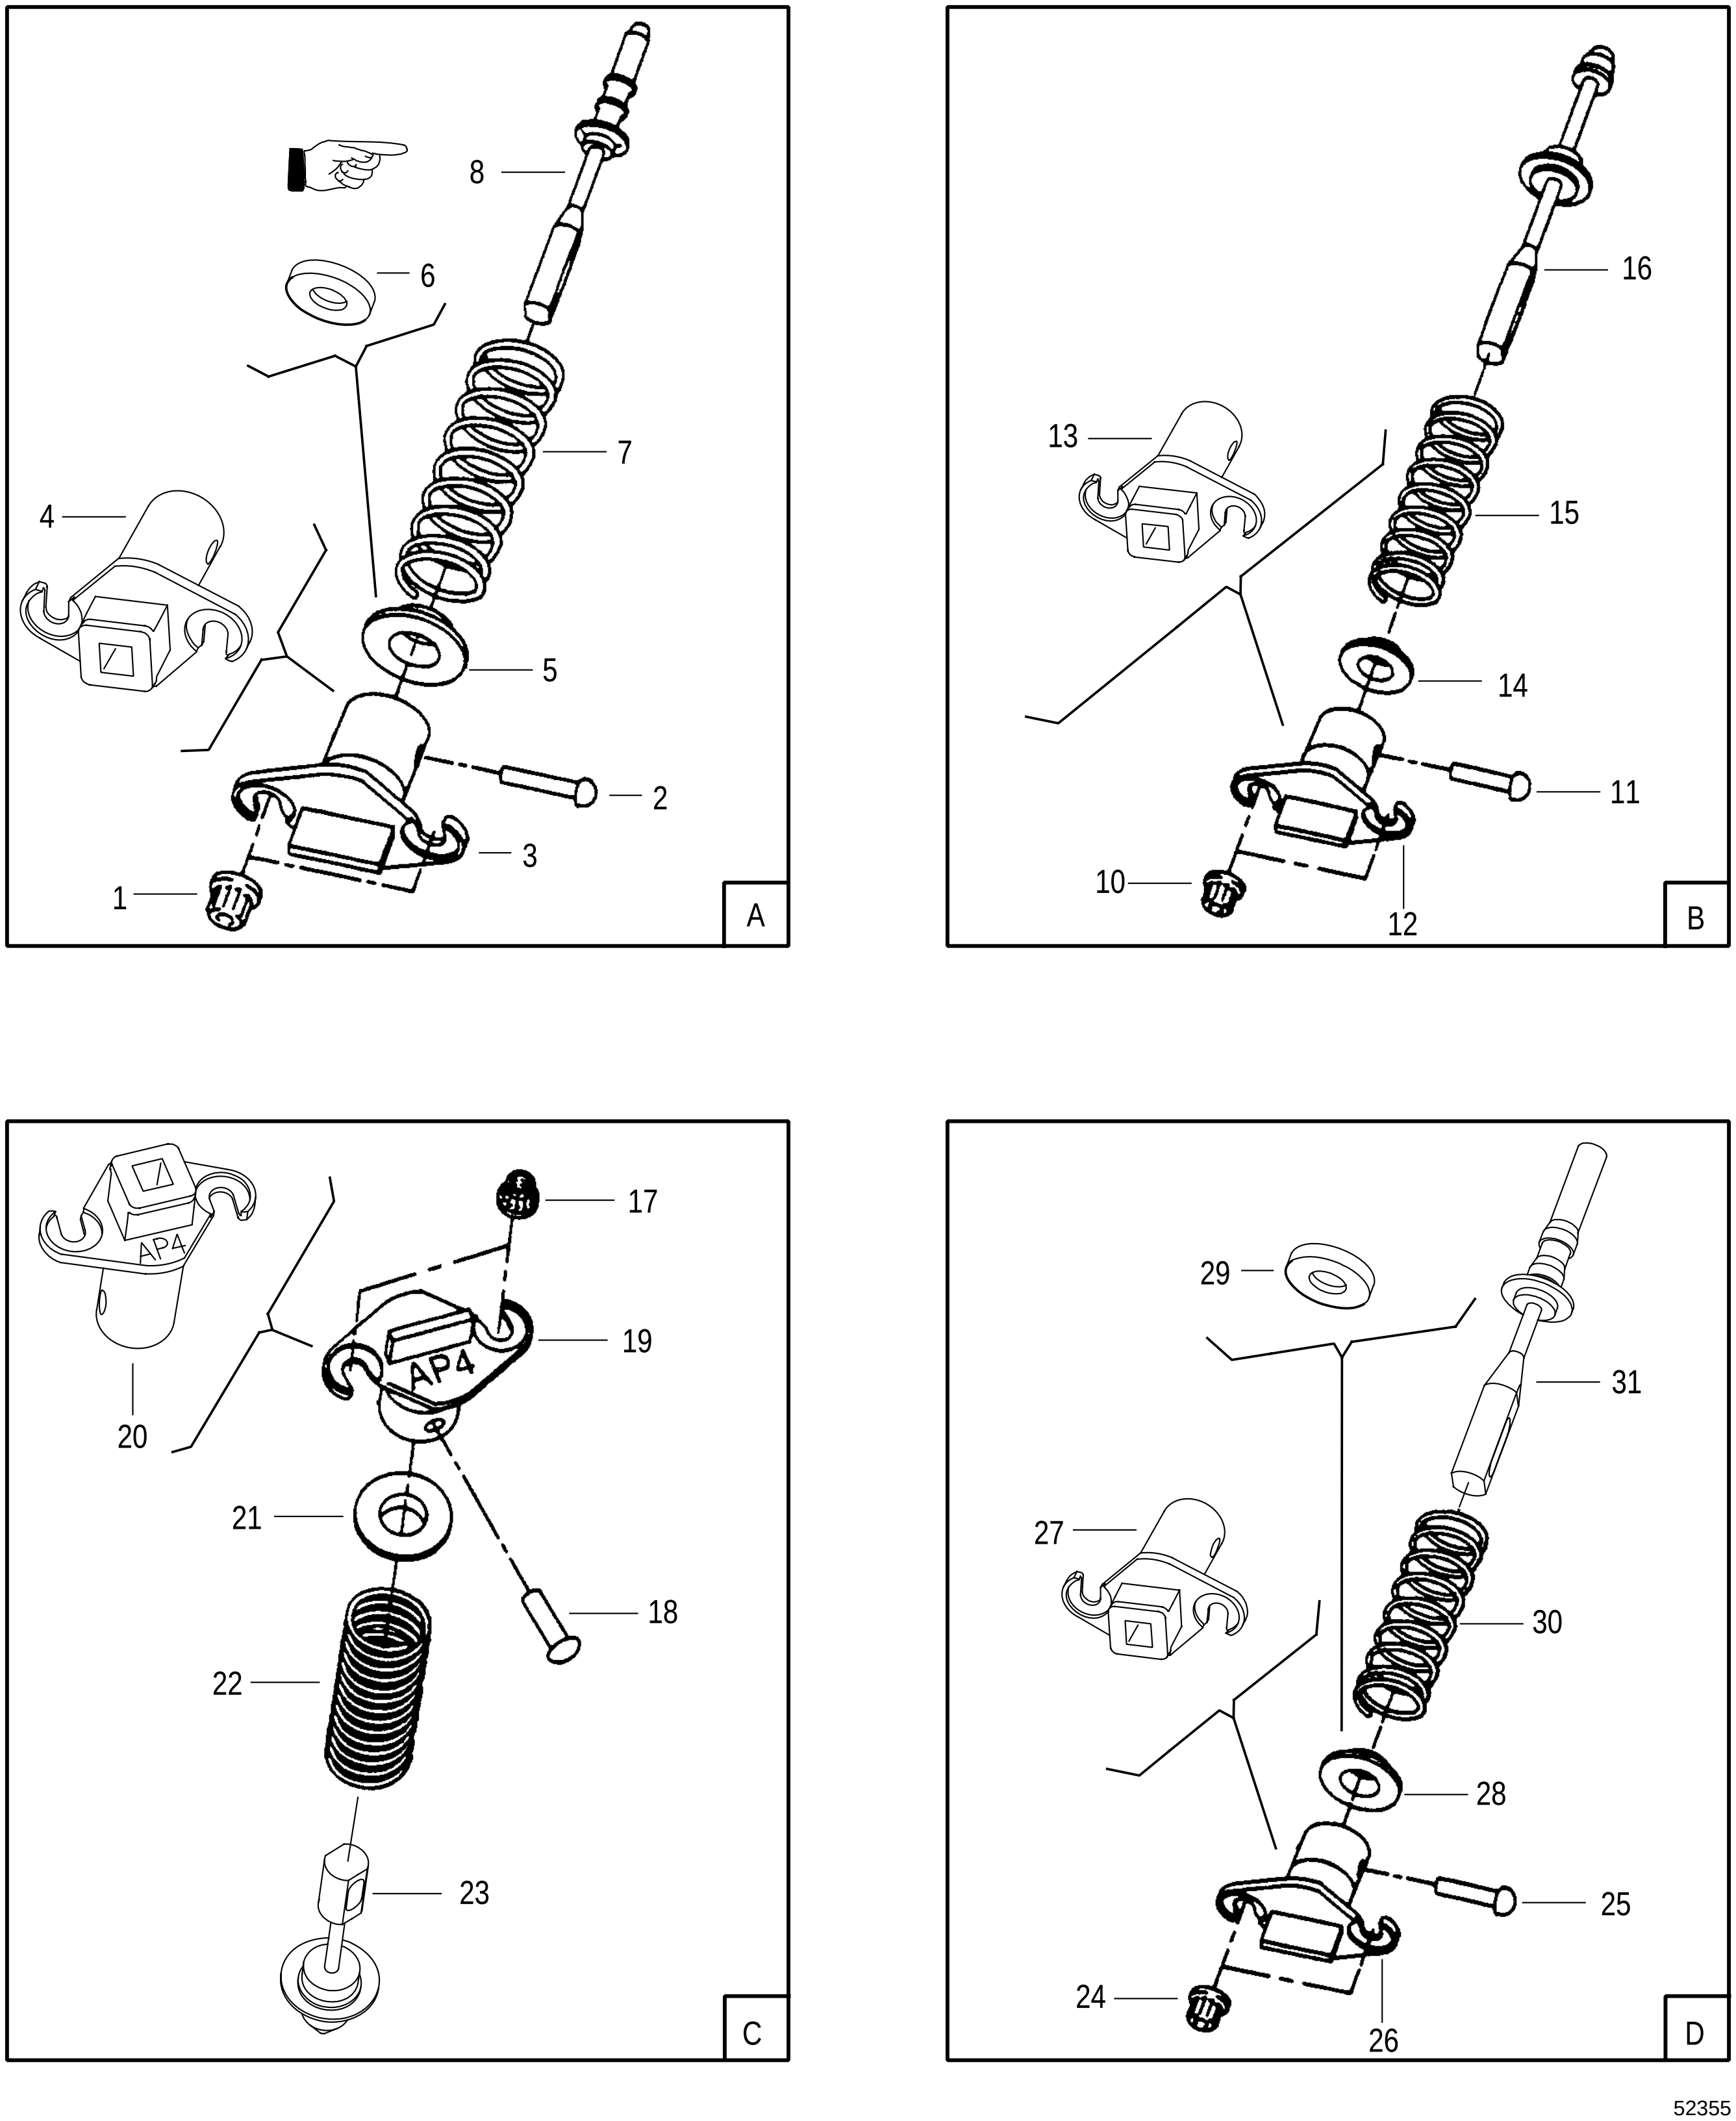


FIGURE 56. BORESCOPE PLUGS
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
56	NO NUMBER		BORESCOPE PLUGS . . . . SEE FIG. 38-16 FOR NHA	REF		
	= 4079912-01	52661	. PLUG-BORESCOPE, COMPRESSOR CASE, 7TH . . . STAGE, ASSY OF	1		PAOFF
	= 4079938-01	52661	. PLUG-BORESCOPE, COMPRESSOR CASE, 7TH . . . STAGE, ASSY OF	1		PAOFF
	= 4080176-01	52661	. PLUG-BORESCOPE, COMPRESSOR CASE, 7TH . . . STAGE, ASSY OF	1		PAOFF
- 1	4023116	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 2	MS9403-274	96906	.. RIVET . . . . REPLACED BY MS9403-278	1		PAFZZ
	MS9403-278	96906	.. RIVET . . . . REPLACES MS9403-274	1		PAFZZ
- 3	4077236-01	52661	.. COVER-BORESCOPE PLUG, COMPRESSOR . . . . . CASE, 7TH STAGE, ASSY OF USE ONLY ON 4079912-01	1		PAFBZ
	4079943	52661	.. COVER-BORESCOPE PLUG, COMPRESSOR . . . . . CASE, 7TH STAGE USE ONLY ON 4079938-01	1		PAFBZ
- 4	4080123	52661	.. COVER-BORESCOPE PLUG, COMPRESSOR . . . . . CASE, 7TH STAGE USE ONLY ON 4080176-01	1		XA
- 5	4073614	52661	.. SPACER-BORESCOPE, TURBINE CASE . . . . USE ONLY ON 4079912-01	1		XA
	4079947	52661	.. SPACER-BORESCOPE, TURBINE CASE . . . . USE ONLY ON 4079938-01 AND 4080176-01 SUPERSEDED BY 4081244	1		XA
- 6	4081244	52661	.. SPACER-BORESCOPE . . . . USE ONLY ON 4079938-01 AND 4080176-01 SUPERSEDES 4079947	1		XA
- 7	4073618	52661	.. SPRING-HELICAL, COMPRESSION . . . . 0.740 X 0.100 X 9 COILS	1		PAFZZ
- 8	4081247	52661	.. PLUG-BORESCOPE, COMPRESSOR CASE, 7TH . . STAGE USE ONLY ON 4079912-01, 4079938-01, AND 4080176-01 SUPERSEDES 4077240	1		PAFZZ
- 9	DELETED					
	= 4077245-01	52661	. PLUG-BORESCOPE, COMPRESSOR CASE, 12TH . . STAGE, ASSY OF	1		PAOFF
	= 4079939-01	52661	. PLUG-BORESCOPE, COMPRESSOR CASE, 12TH . . STAGE, ASSY OF	1		PAOFF
	= 4080177-01	52661	. PLUG-BORESCOPE, COMPRESSOR CASE, 12TH . . STAGE, ASSY OF	1		PAOFF
- 10	4023116	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 11	MS9403-274	96906	.. RIVET . . . . REPLACED BY MS9403-278	1		PAFZZ
	MS9403-278	96906	.. RIVET . . . . REPLACES MS9403-274	1		PAFZZ
- 12	4077314-01	52661	.. COVER-BORESCOPE PLUG, COMPRESSOR . . . . . CASE, 12TH STAGE, ASSY OF USE ONLY ON 4077245-01	1		PAFBZ
	4079944	52661	.. COVER-BORESCOPE PLUG, COMPRESSOR . . . . . CASE, 12TH STAGE, ASSY OF USE ONLY ON 4079939-01	1		PAFBZ
- 13	4080124	52661	.. COVER-BORESCOPE PLUG, COMPRESSOR . . . . . CASE, 12TH STAGE, ASSY OF USE ONLY ON 4080177-01	1		XA

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
56 - 14	4075571	52661	.. SPACER-BORESCOPE, DIFFUSER CASE .... USE ONLY ON 4077245-01	1		XA
	4079948	52661	.. SPACER-BORESCOPE .... USE ONLY ON 4079939-01 AND 4080177-01	1		XA
- 15	4076242	52661	.. SPRING-HELICAL, COMPRESSION .... 1.125 X 0.218 X 7 COILS	1		PAFZZ
- 16	4077238	52661	.. PLUG-BORESCOPE, COMPRESSOR CASE, 12TH . STAGE USE ONLY ON 4077245-01	1		XA
	4081248	52661	.. PLUG-BORESCOPE, COMPRESSOR CASE, 12TH . STAGE USE ONLY ON 4079939-01 AND 4080177-01 SUPERSEDES 4079949	1		XA
	= 4077376-01	52661	. PLUG-BORESCOPE, DIFFUSER CASE, ASSY OF ...	2		PAOFF
	= 4079940-01	52661	. PLUG-BORESCOPE, DIFFUSER CASE, ASSY OF ...	2		PAOFF
	= 4080180-01	52661	. PLUG-BORESCOPE, DIFFUSER CASE, ASSY OF ...	2		PAOZZ
- 17	4023116	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
- 18	MS9403-274	96906	.. RIVET .... REPLACED BY MS9403-278	1		PAFZZ
	MS9403-278	96906	.. RIVET .... REPLACES MS9403-274	1		PAFZZ
- 19	4077315-01	52661	.. COVER-BORESCOPE PLUG, DIFFUSER CASE, ... ASSY OF USE ONLY ON 4077376-01	1		PAFZZ
	4079945	52661	.. COVER-BORESCOPE PLUG, DIFFUSER CASE .... USE ONLY ON 4079940-01	1		PAFZZ
- 20	4080125	52661	.. COVER-BORESCOPE PLUG, DIFFUSER CASE .... USE ONLY ON 4080180-01	1		XA
- 21	4075571	52661	.. SPACER-BORESCOPE, DIFFUSER CASE .... USE ONLY ON 4077376-01	1		XA
	4079948	52661	.. SPACER-BORESCOPE .... USE ONLY ON 4079940-01 AND 4080180-01	1		XA
- 22	4076242	52661	.. SPRING-HELICAL, COMPRESSION .... 1.125 X 0.218 X 7 COILS	1		PAFZZ
- 23	4077243	52661	.. PLUG-BORESCOPE, DIFFUSER CASE .... USE ONLY ON 4077376-01	1		XA
	4079950	52661	.. PLUG-BORESCOPE, DIFFUSER CASE .... USE ONLY ON 4079940-01 AND 4080180-01	1		XA
	= 4077377-01	52661	. PLUG-BORESCOPE, TURBINE CASE, ASSY OF	1		PAOFF
	= 4079941-01	52661	. PLUG-BORESCOPE, TURBINE CASE, ASSY OF	1		PAOFF
	= 4080181-01	52661	. PLUG-BORESCOPE, TURBINE CASE, ASSY OF	1		PAOFF
- 24	= 4023116	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAOZZ
- 25	MS9403-274	96906	.. RIVET .... REPLACED BY MS9403-278	1		PAFZZ
	MS9403-278	96906	.. RIVET .... REPLACES MS9403-274	1		PAFZZ
- 26	4077316-01	52661	.. COVER-BORESCOPE PLUG, TURBINE CASE, ... ASSY OF USE ONLY ON 4077377-01	1		PAFZZ
	4079946	52661	.. COVER-BORESCOPE PLUG, TURBINE CASE ...... USE ONLY ON 4079941-01	1		PAFZZ
- 27	4080126	52661	.. COVER-BORESCOPE PLUG, TURBINE CASE ...... USE ONLY ON 4080181-01	1		XA
- 28	4073614	52661	.. SPACER-BORESCOPE, TURBINE CASE .... USE ONLY ON 4077377-01	1		XA
	4079947	52661	.. SPACER-BORESCOPE, TURBINE CASE .... USE ONLY ON 4079941-01 AND 4080181-01 SUPERSEDED BY 4081244	1		XA
- 29	4081244	52661	.. SPACER-BORESCOPE .... USE ONLY ON 4079941-01 AND 4080181-01 SUPERSEDES 4079947	1		XA

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
56 - 30	4073618	52661	.. SPRING-HELICAL, COMPRESSION .... 0.740 X 0.100 X 9 COILS	1		PAFZZ
- 31	4077242	52661	.. PLUG-BORESCOPE, TURBINE CASE .... USE ONLY ON 4077377-01	1		XA
	4081245	52661	.. PLUG-BORESCOPE, TURBINE CASE .... USE ONLY ON 4079941-01 SUPERSEDES 4079979	1		XA



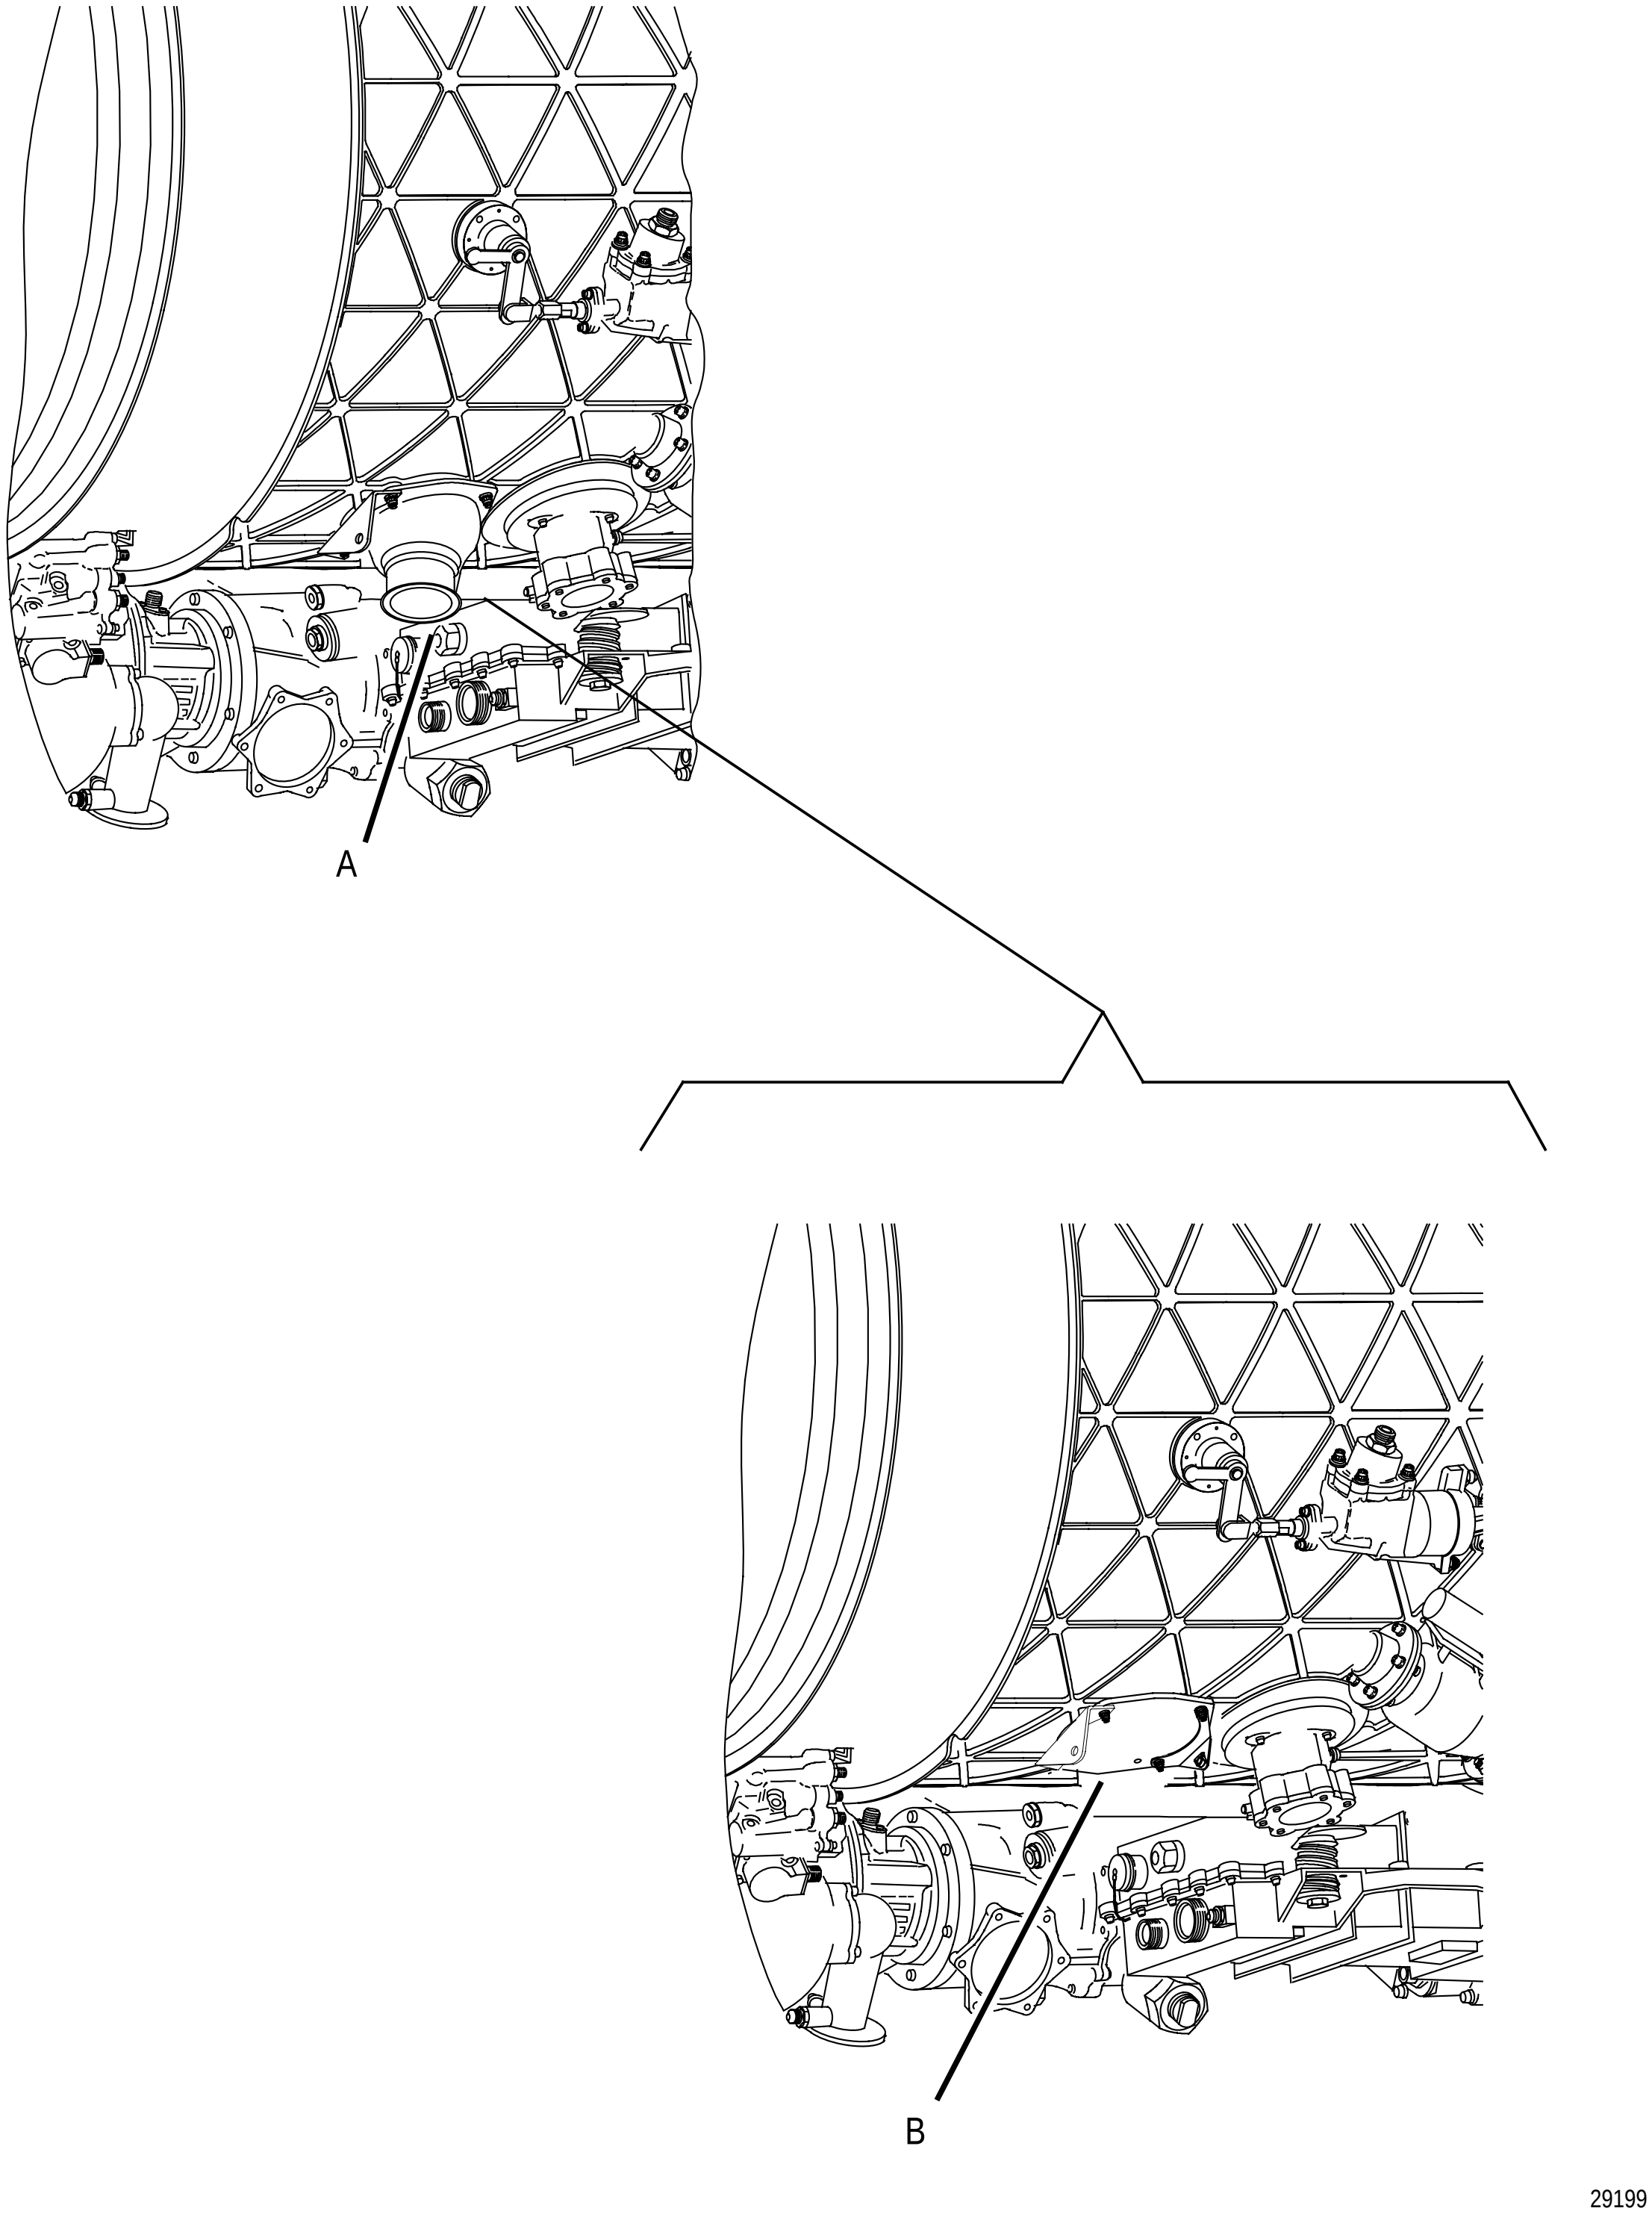


FIGURE 57. FAN AIR BLEED
(SHEET 1 OF 2)

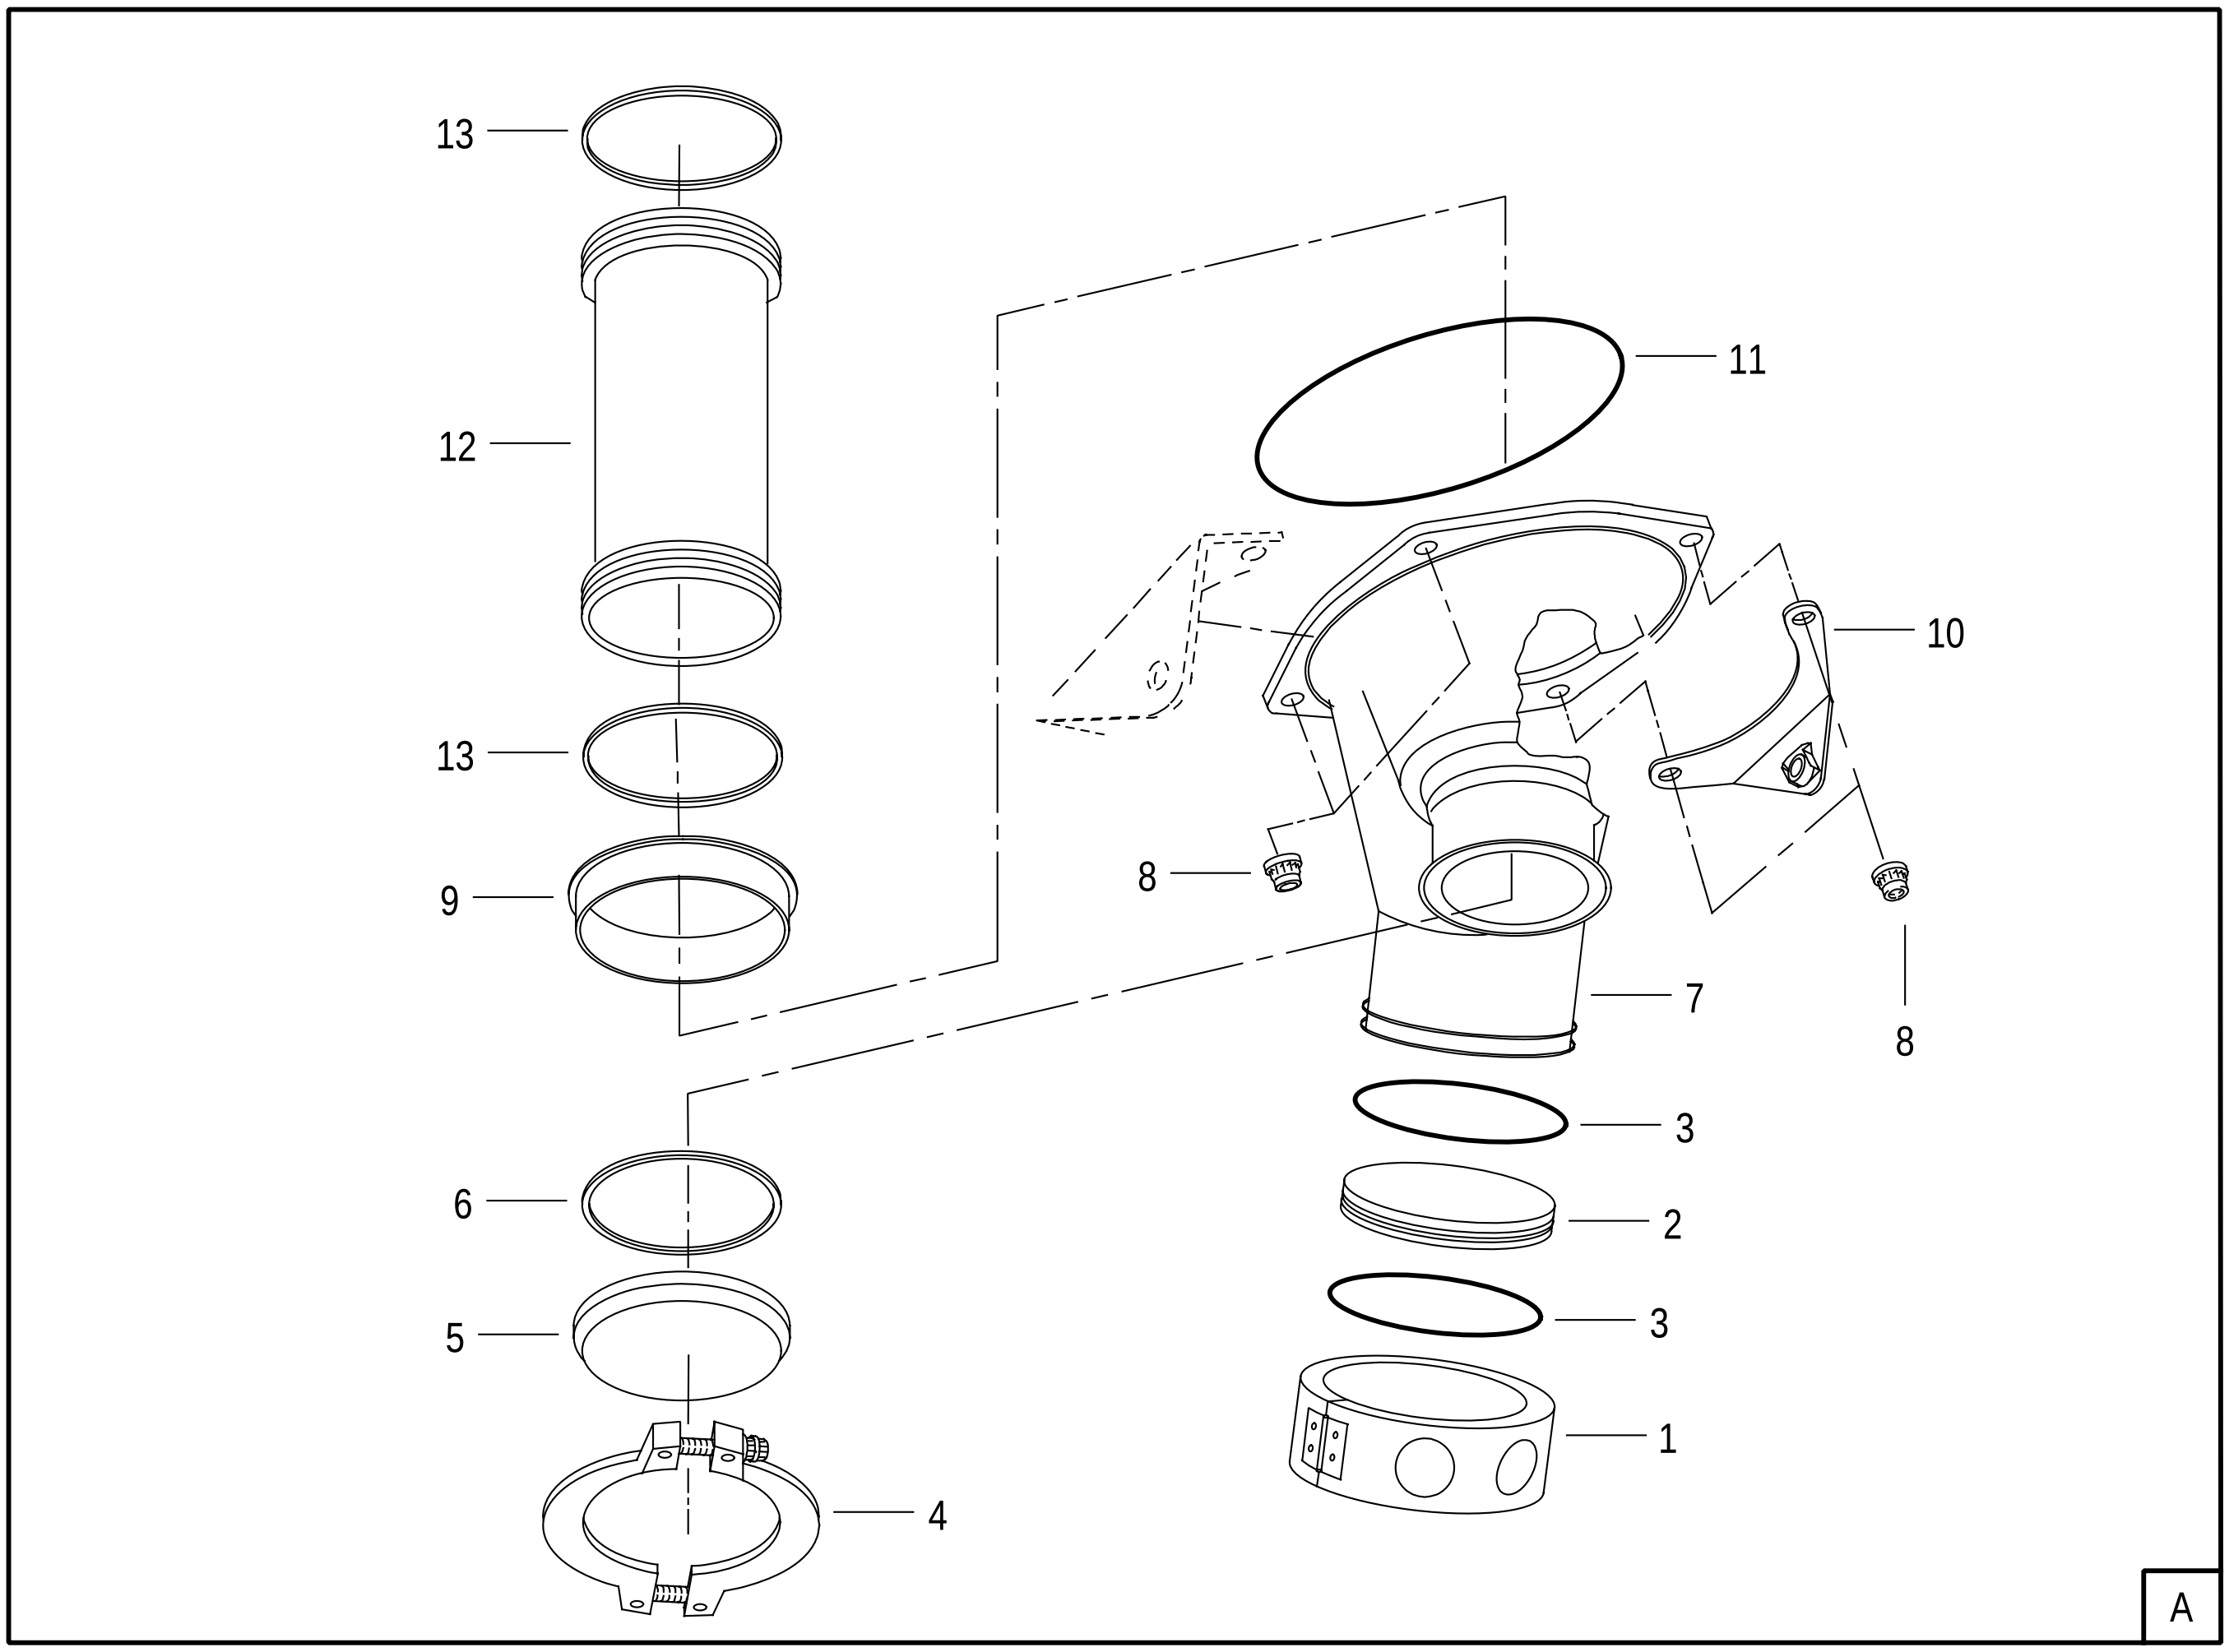

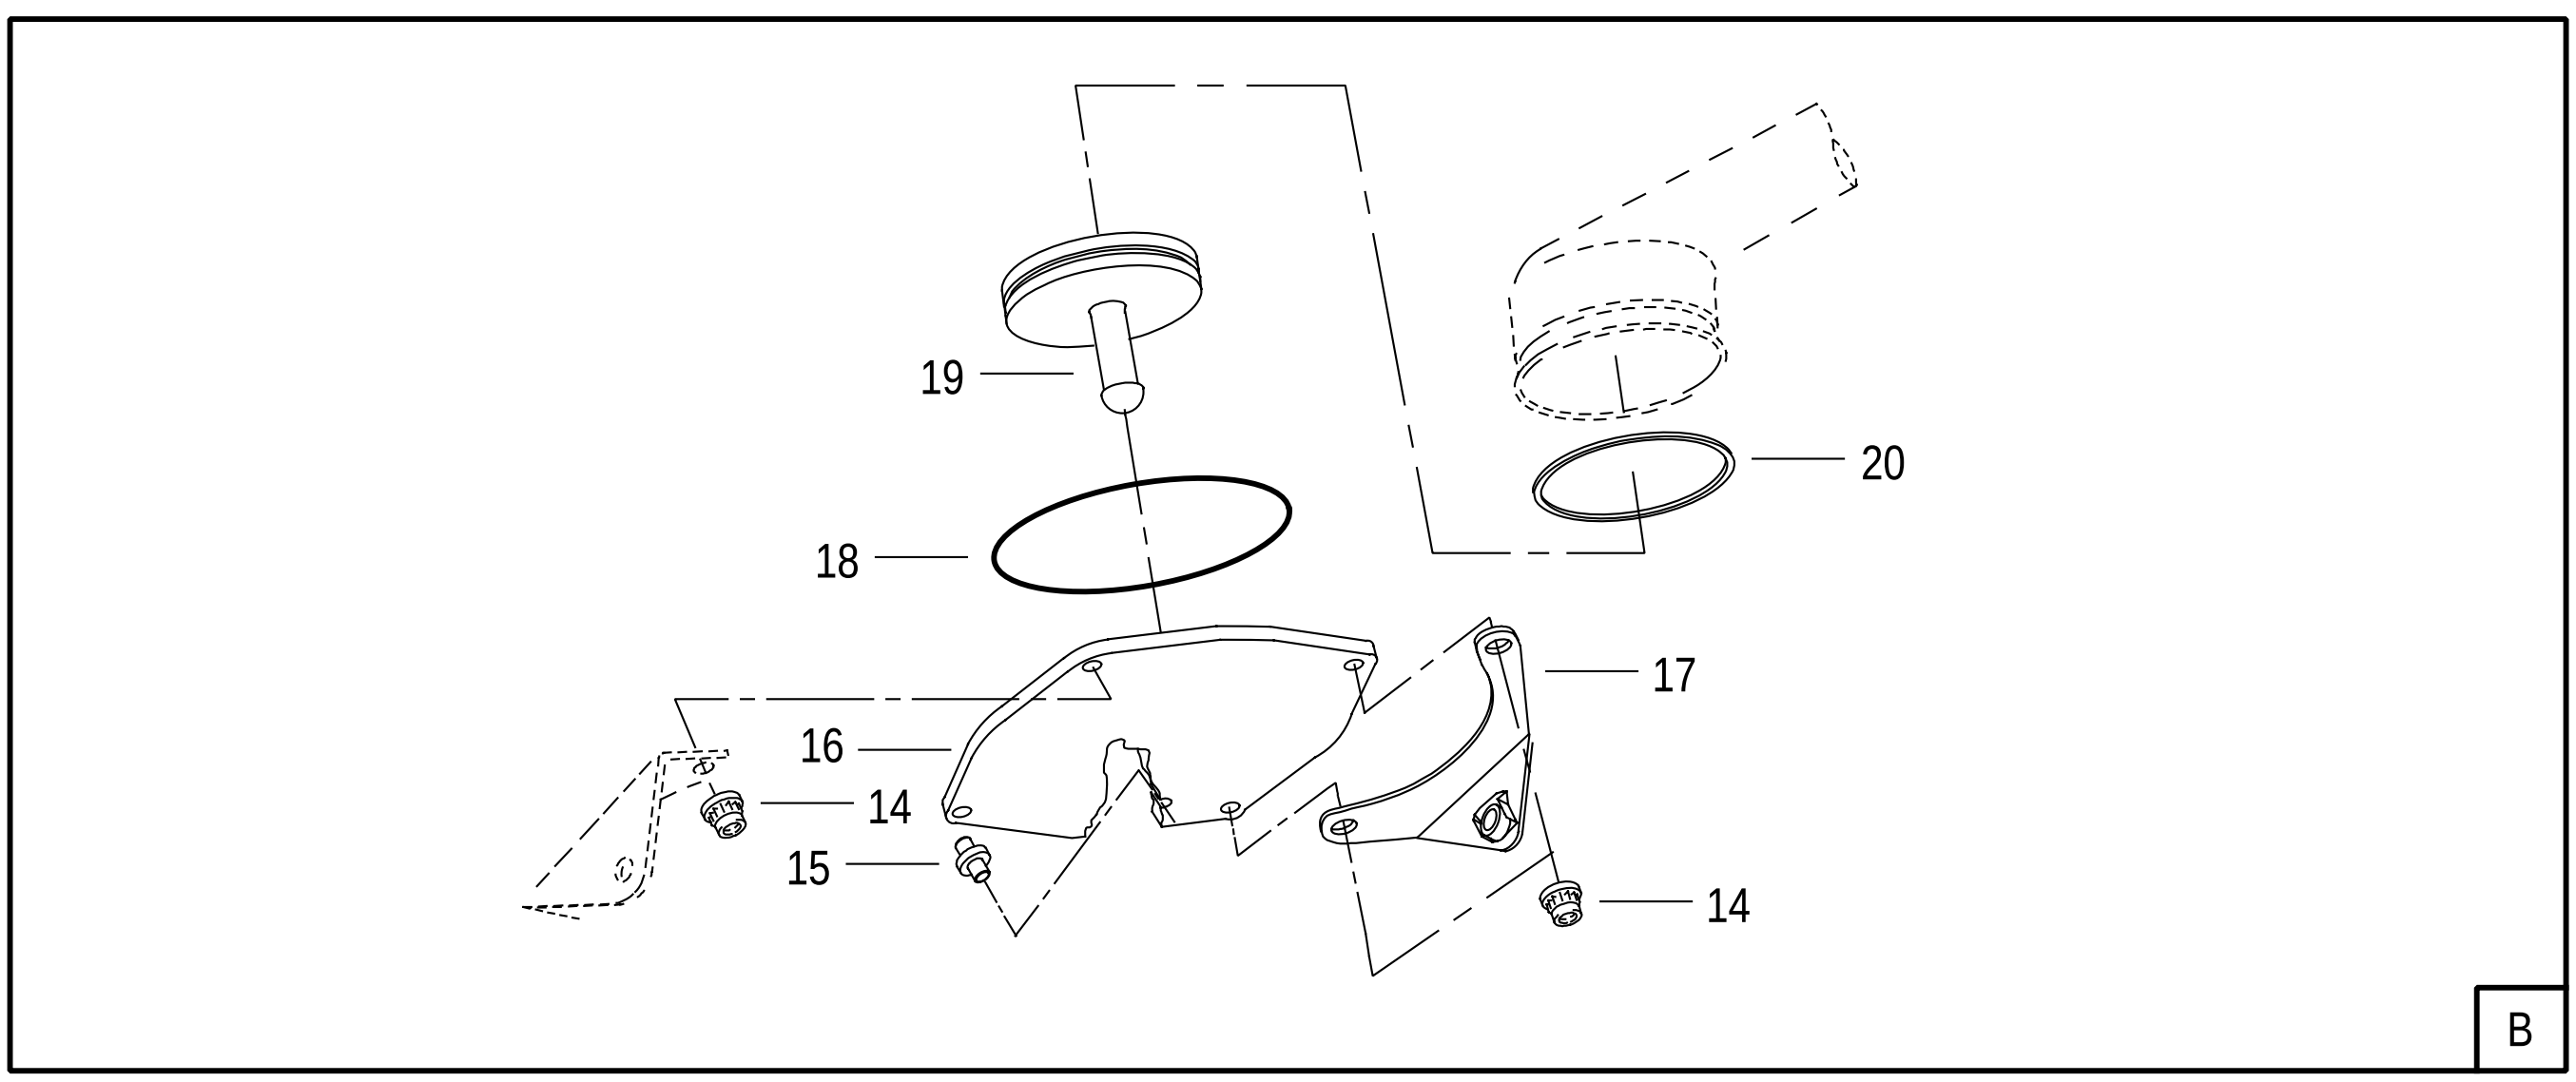

29200

FIGURE 57. FAN AIR BLEED
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
57	NO NUMBER		FAN AIR BLEED SEE FIG. 38-18 FOR NHA	REF		
- 1	4072583	52661	. COUPLING OPTION SEE OPTION TABLE	1	B	PAOFF
- 2	4073899	52661	. COVER-FAN BLEED	1	B	PAOZZ
- 3	MS9386-230	96906	. PACKING	2	B	PAOZZ
- 4	2703-200	15284	. COUPLING-CLAMP, GROOVED 2.510 IN. DIA P&WA PART NO. 4046906	1	B	PAFBZ
- 5	2710-200MB	15284	. COVER-GROOVED CLAMP COUPLING P&WA PART NO. 4046907	1	B	PAOZZ
- 6	0945	15284	. GASKET-SPRING 1.958 ID X 2.249 OD X 0.108 IN. THK P&WA PART NO. 4046908	1	B	PAOZZ
- 7	4071538	52661	. HOUSING ASSY-BLEED	1	B	PAFDD
- 8	4023116	52661	. NUT OPTION (AP) SEE OPTION TABLE	4	B	PAOZZ
- 9	4071540	52661	.. SLEEVE-HOUSING, BLEED	1	B	PADZZ
- 10	4075949	52661	. BRACKET-LOOP CLAMP, ASSY OF	1	B	PAOZZ
- 11	MS9386-155	96906	. PACKING	1	B	PAOZZ
- 12	4074019	52661	. TUBE-TRANSFER, SEAL RING 2.000 X 4.005 IN. LONG	1	B	PAOZZ
- 13	4016910	52661	. SEAL RING-METAL 2.500 OD X 0.124 IN. THK	2	B	PAOZZ
	4077060	52661	. COVER ASSY-COMPRESSOR BLEED BOSS	1	A	PAOBZ
- 14	4023116	52661	. NUT OPTION (AP) SEE OPTION TABLE	4	A	PAOZZ
- 15	567494	52661	.. PIN-SHOULDER, HEADLESS 0.1875 AND 0.281 X 0.330	1	A	PAOZZ
- 16	4071542	52661	.. COVER-COMPRESSOR BLEED BOSS	1	A	XA
- 17	4075949	52661	. BRACKET-LOOP CLAMP, ASSY OF	1	A	PAOZZ
- 18	MS9386-155	96906	. PACKING	1	A	PAOZZ
- 19	4071543	52661	. PISTON-COMPRESSOR BLEED SEAL	1	A	PAOZZ
- 20	4016910	52661	. SEAL RING-METAL 2.500 OD X 0.124 IN. THK	1	A	PAOZZ



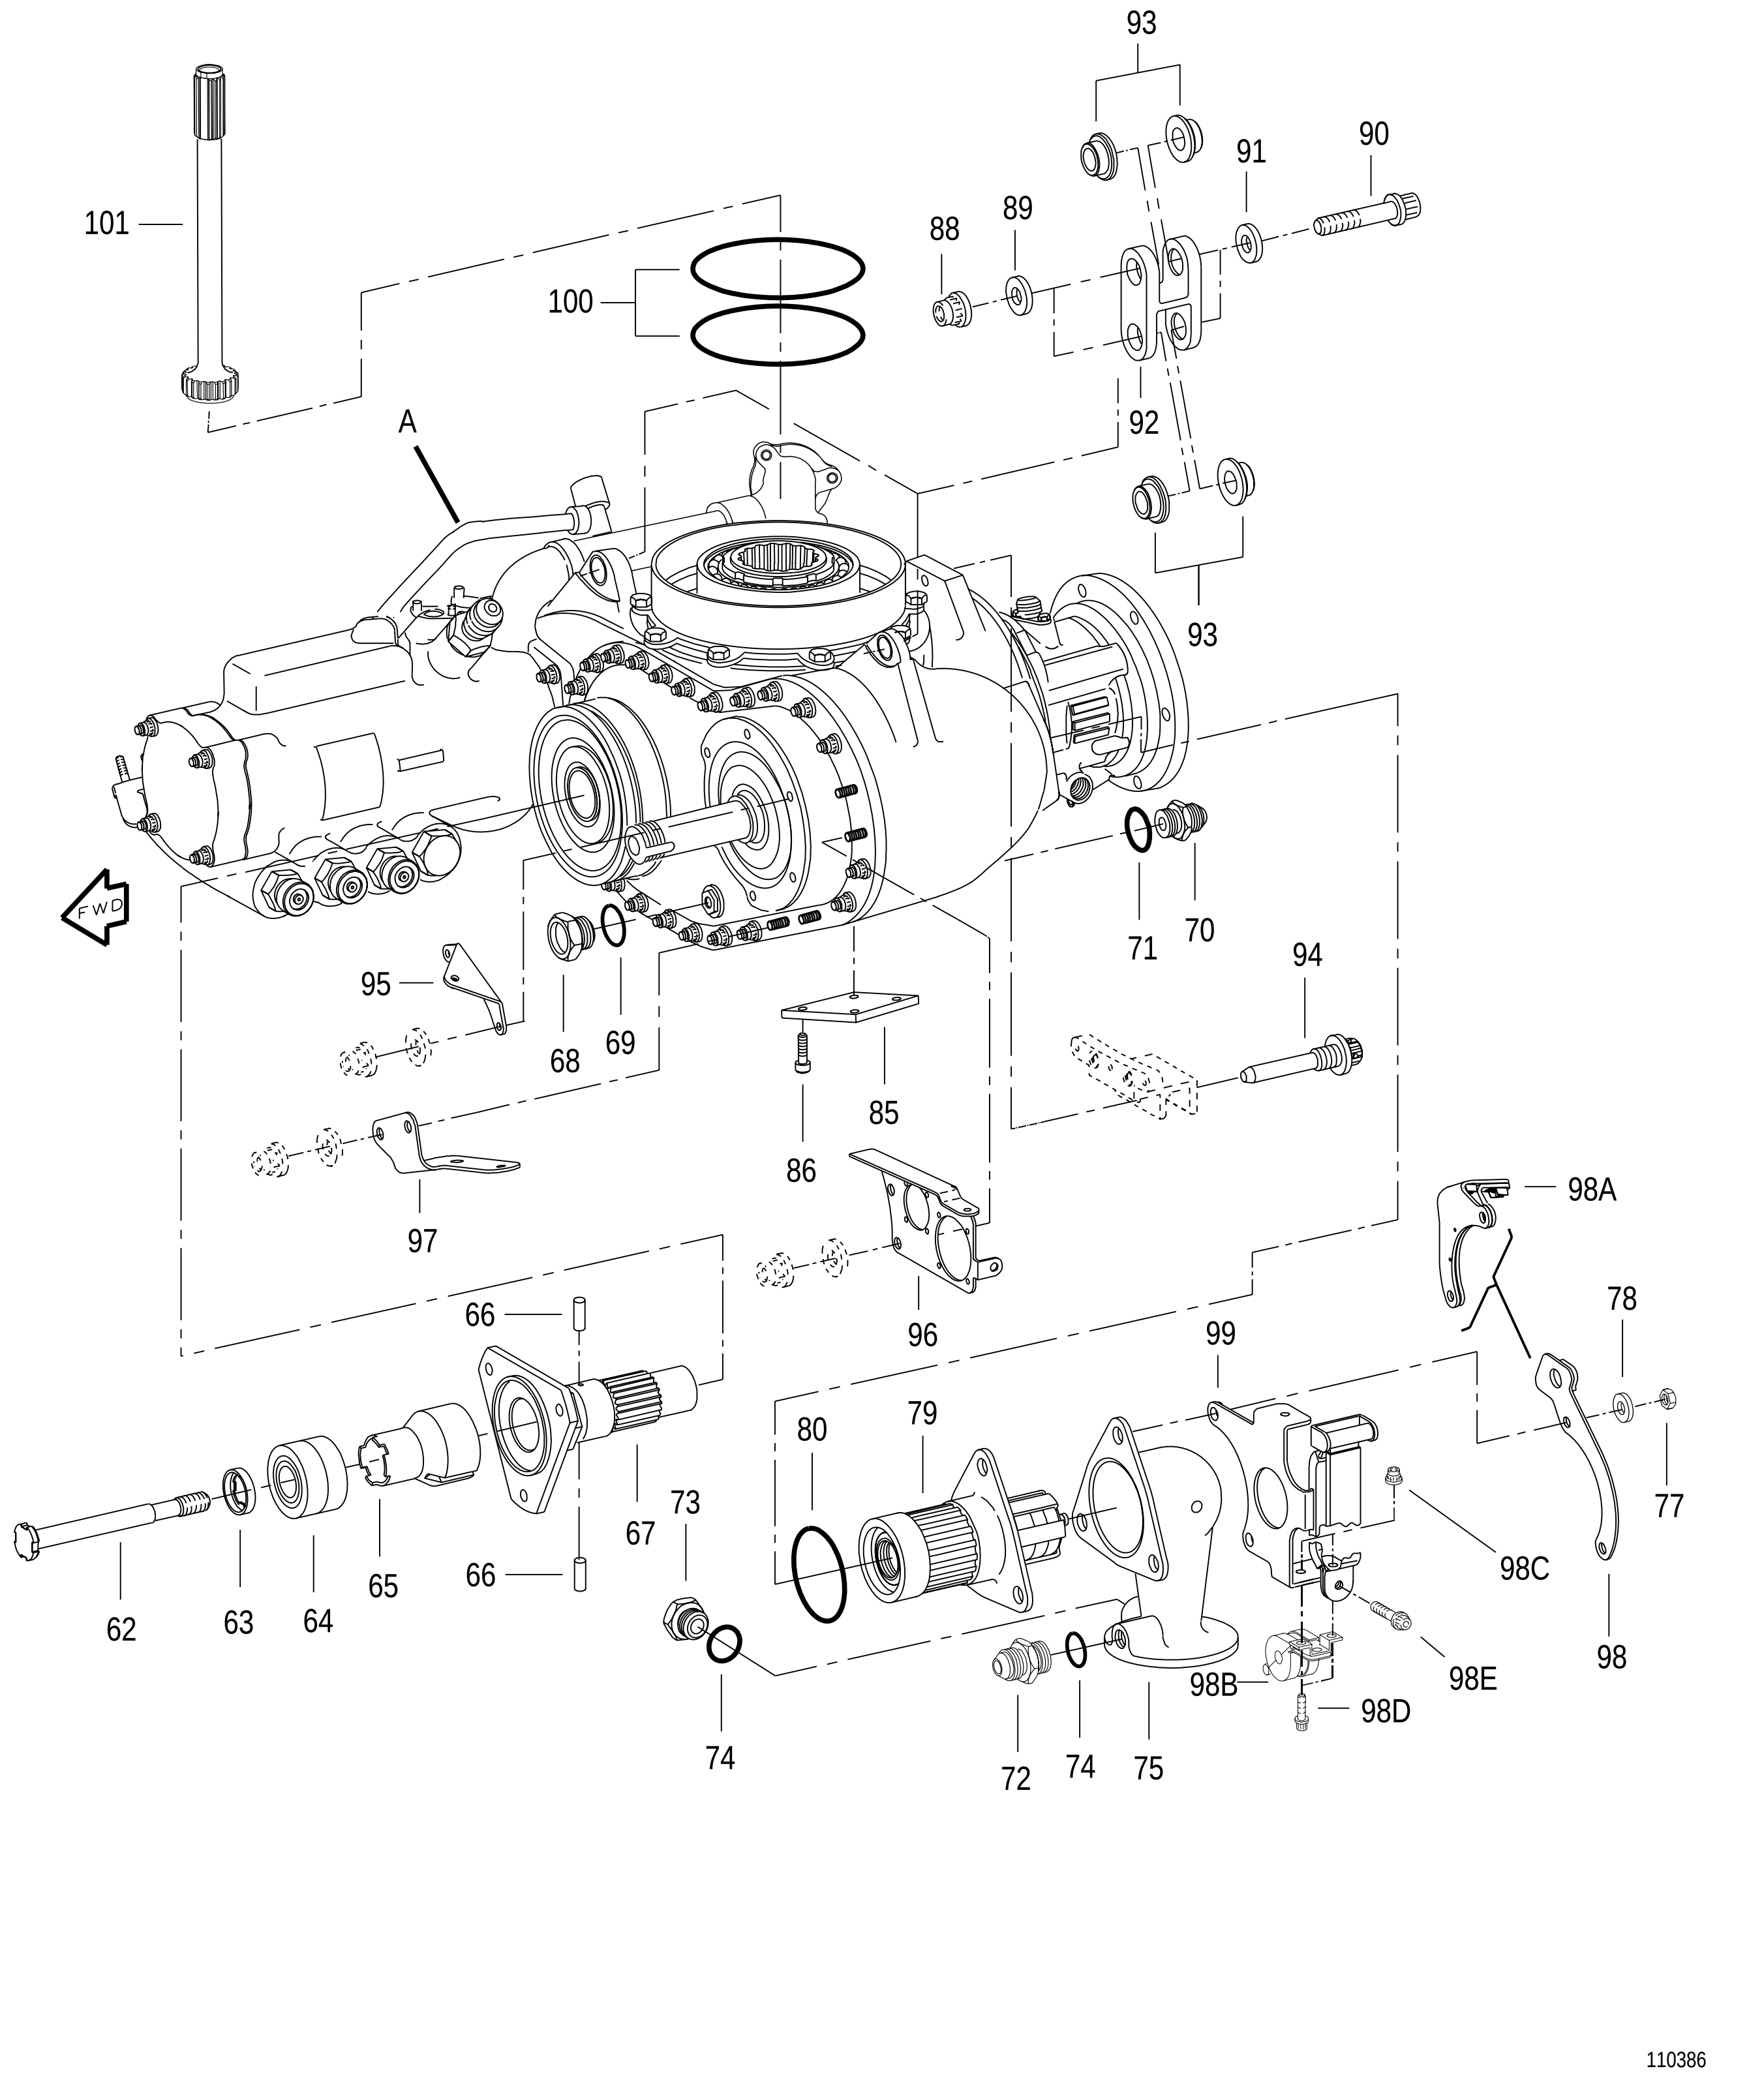



FIGURE 58. GEARBOX MODULE
(SHEET 1 OF 4)

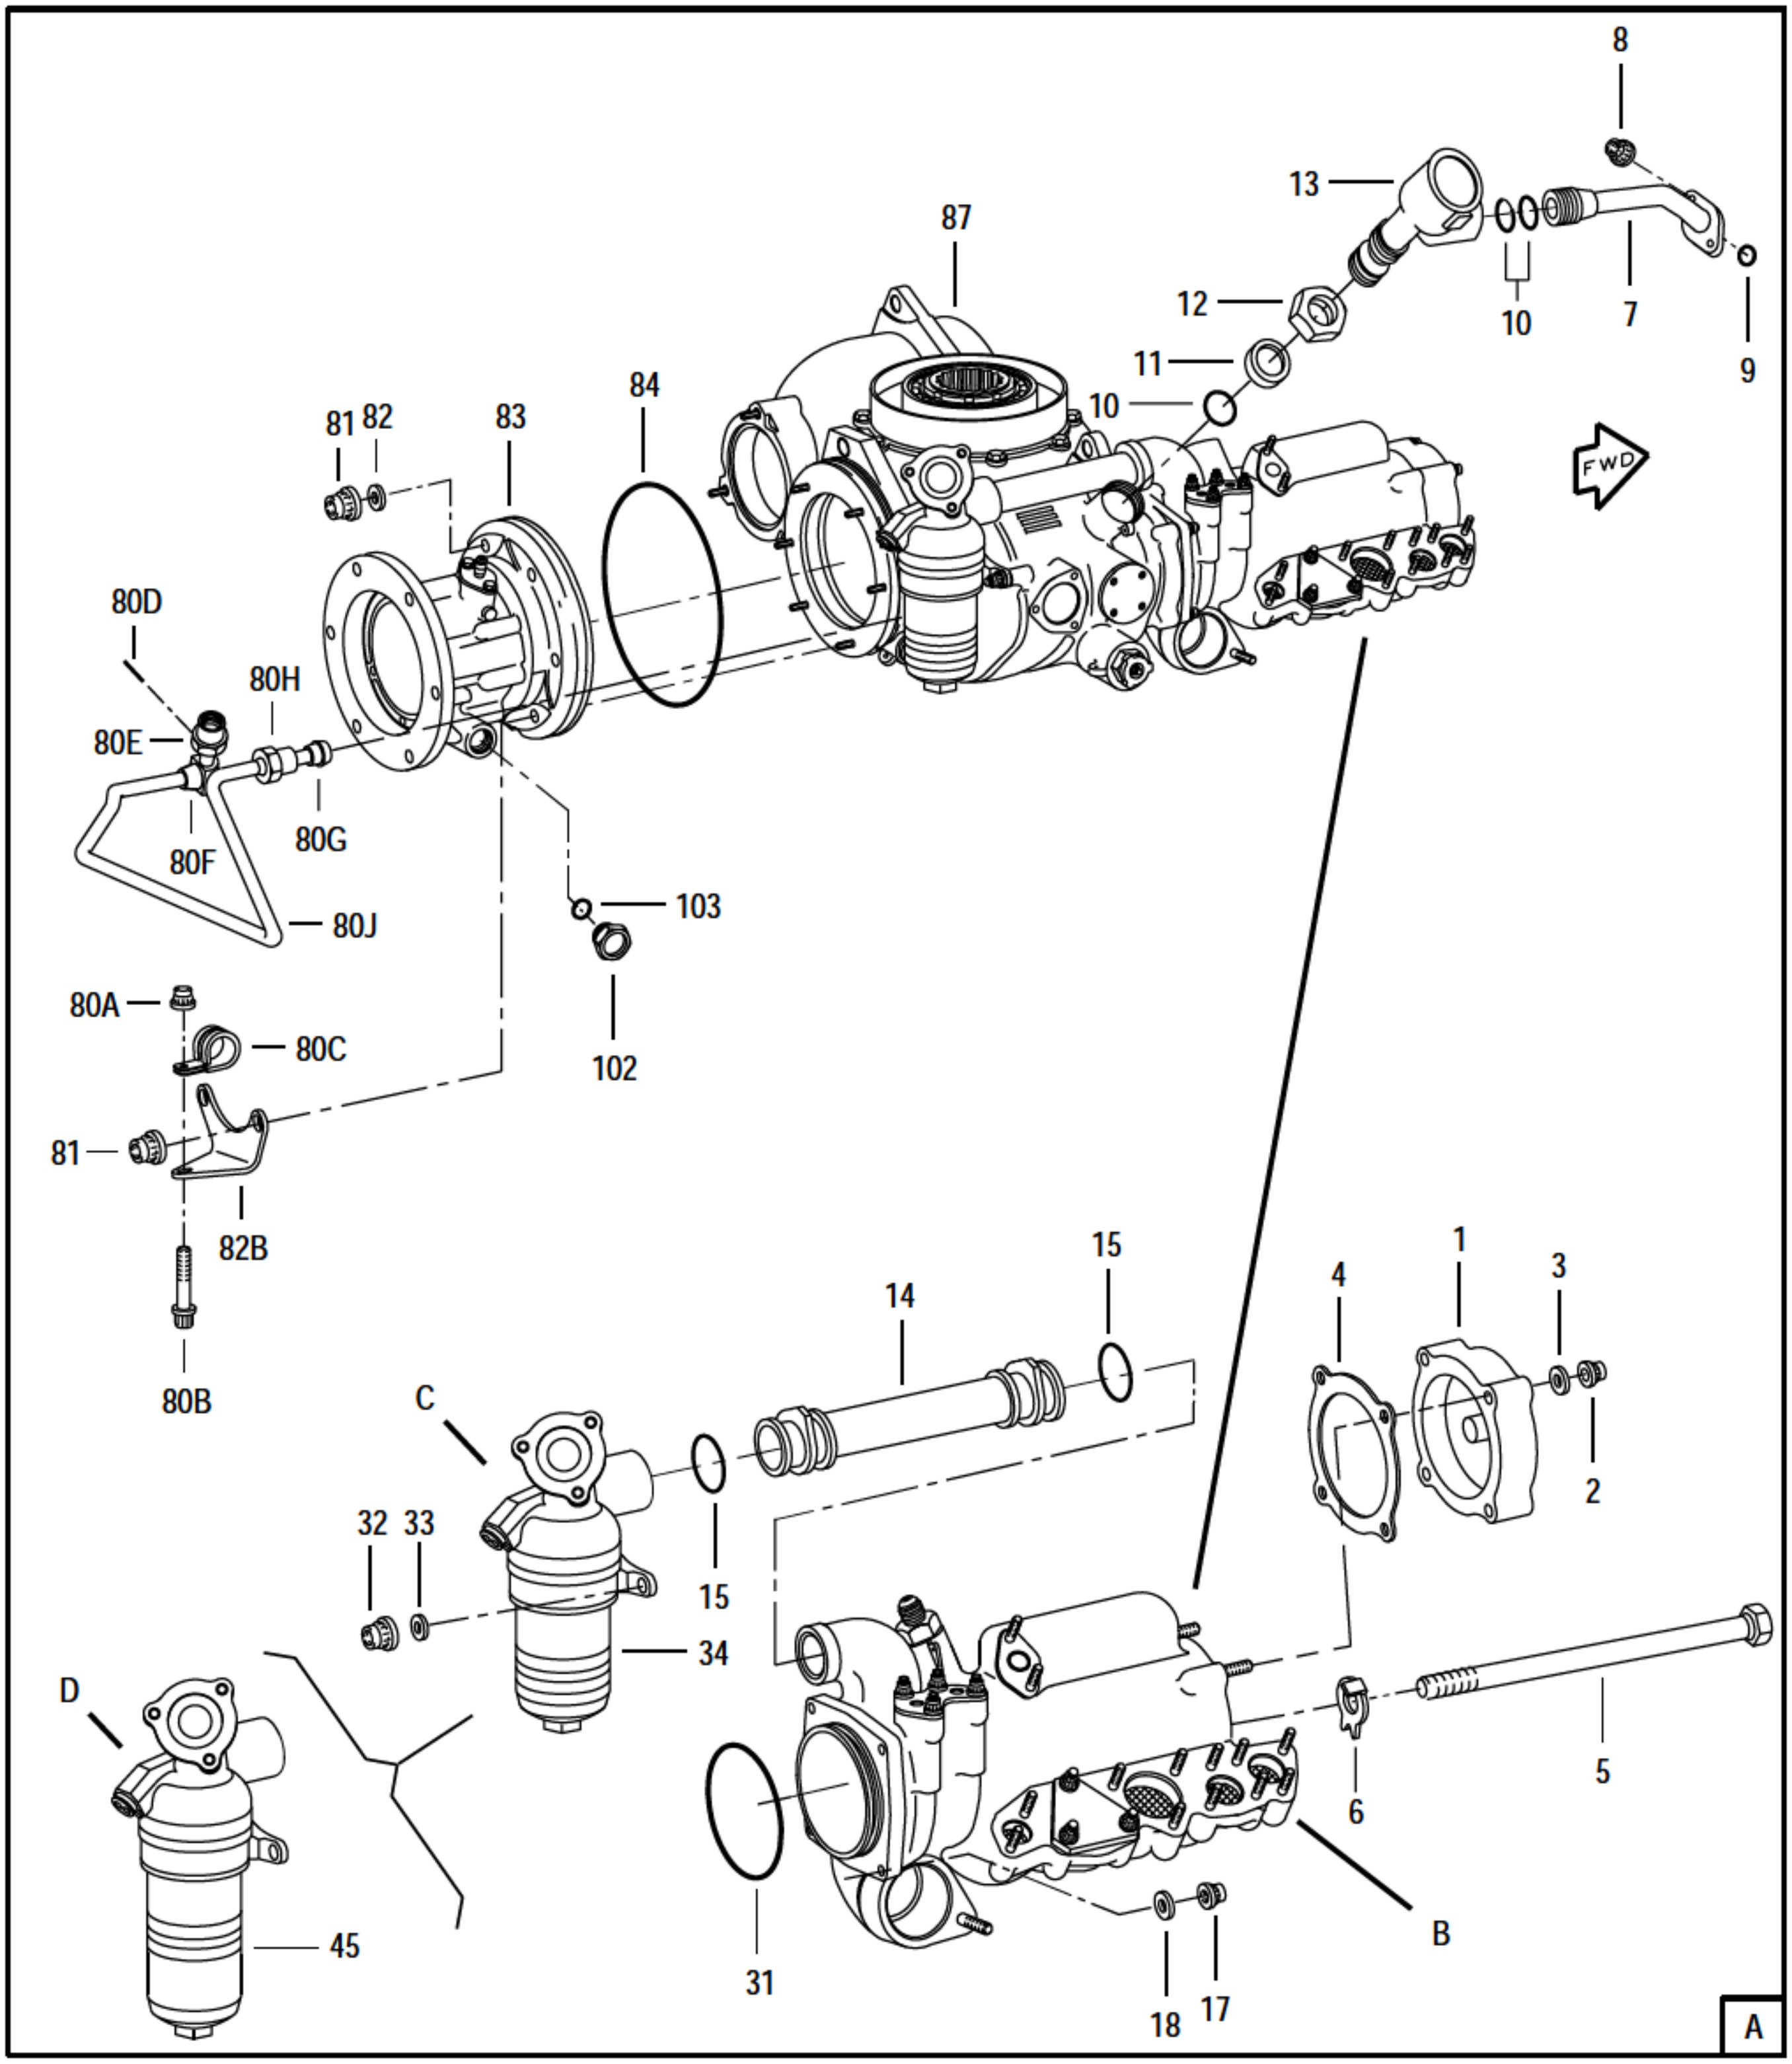


106399

FIGURE 58. GEARBOX MODULE
(SHEET 2 OF 4)

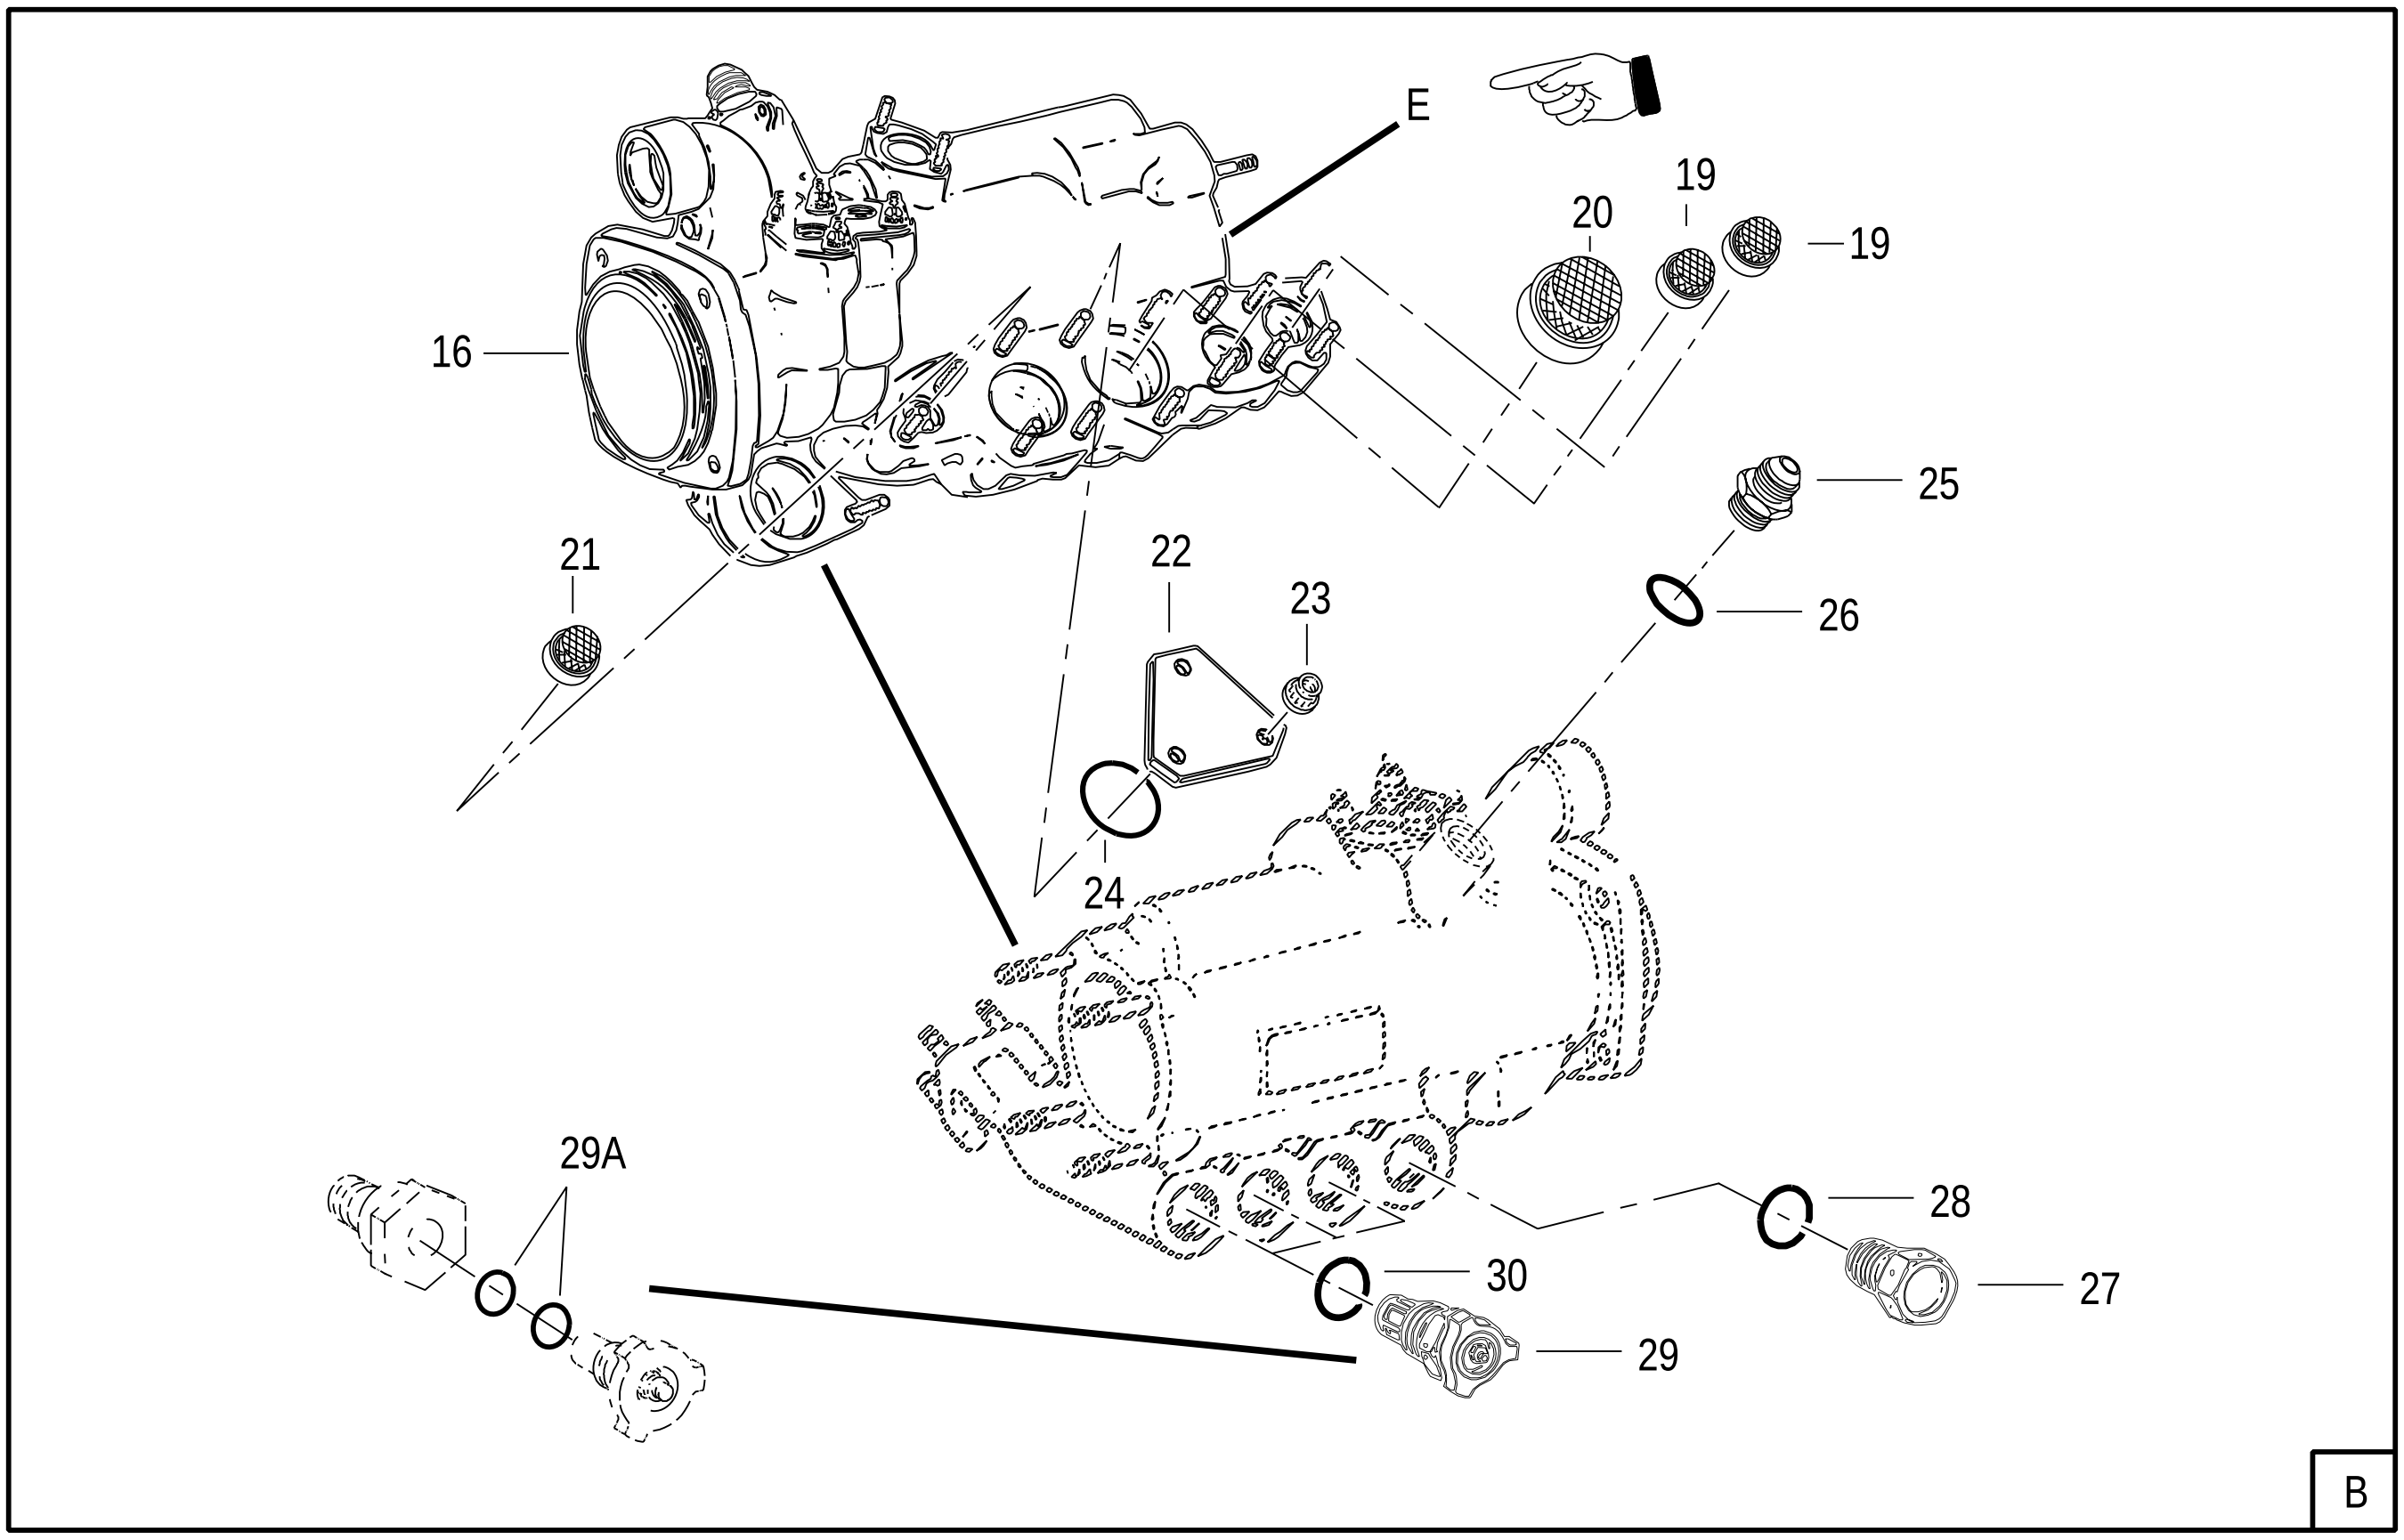

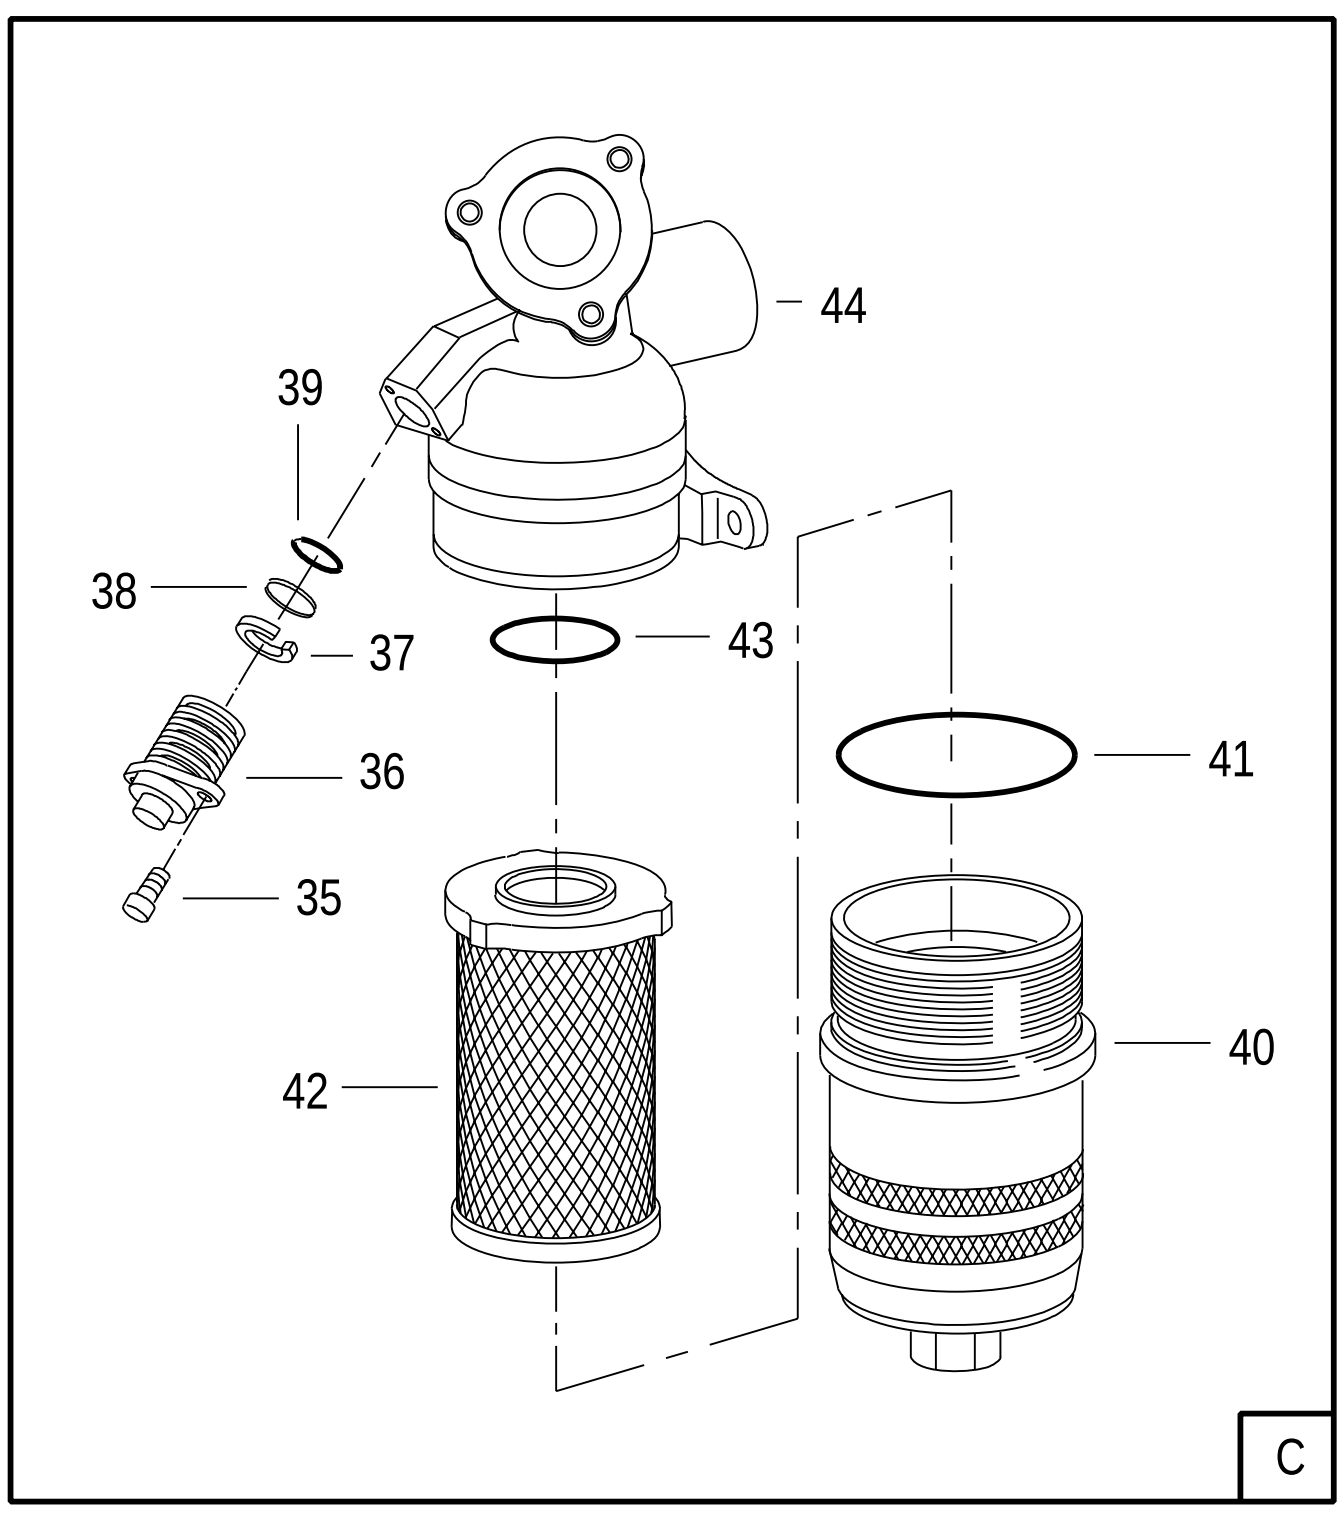

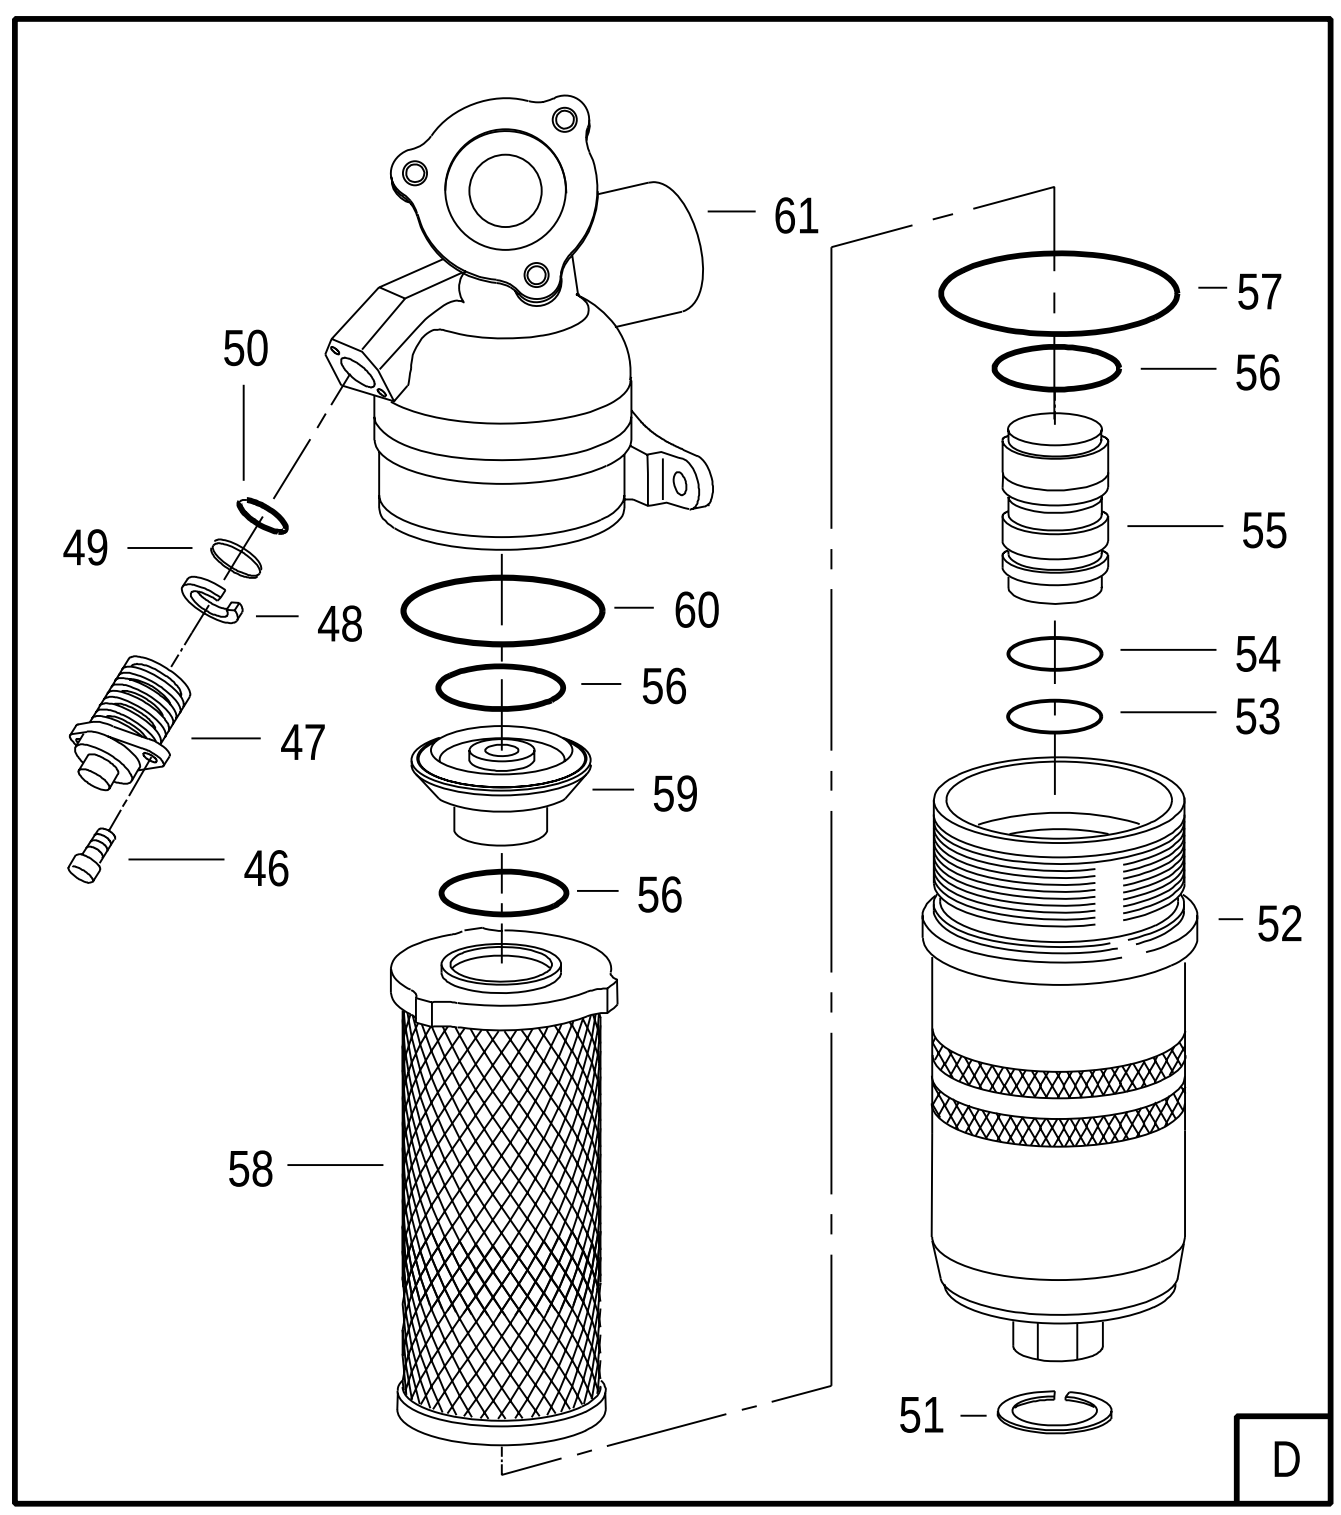

110387

FIGURE 58. GEARBOX MODULE
(SHEET 3 OF 4)

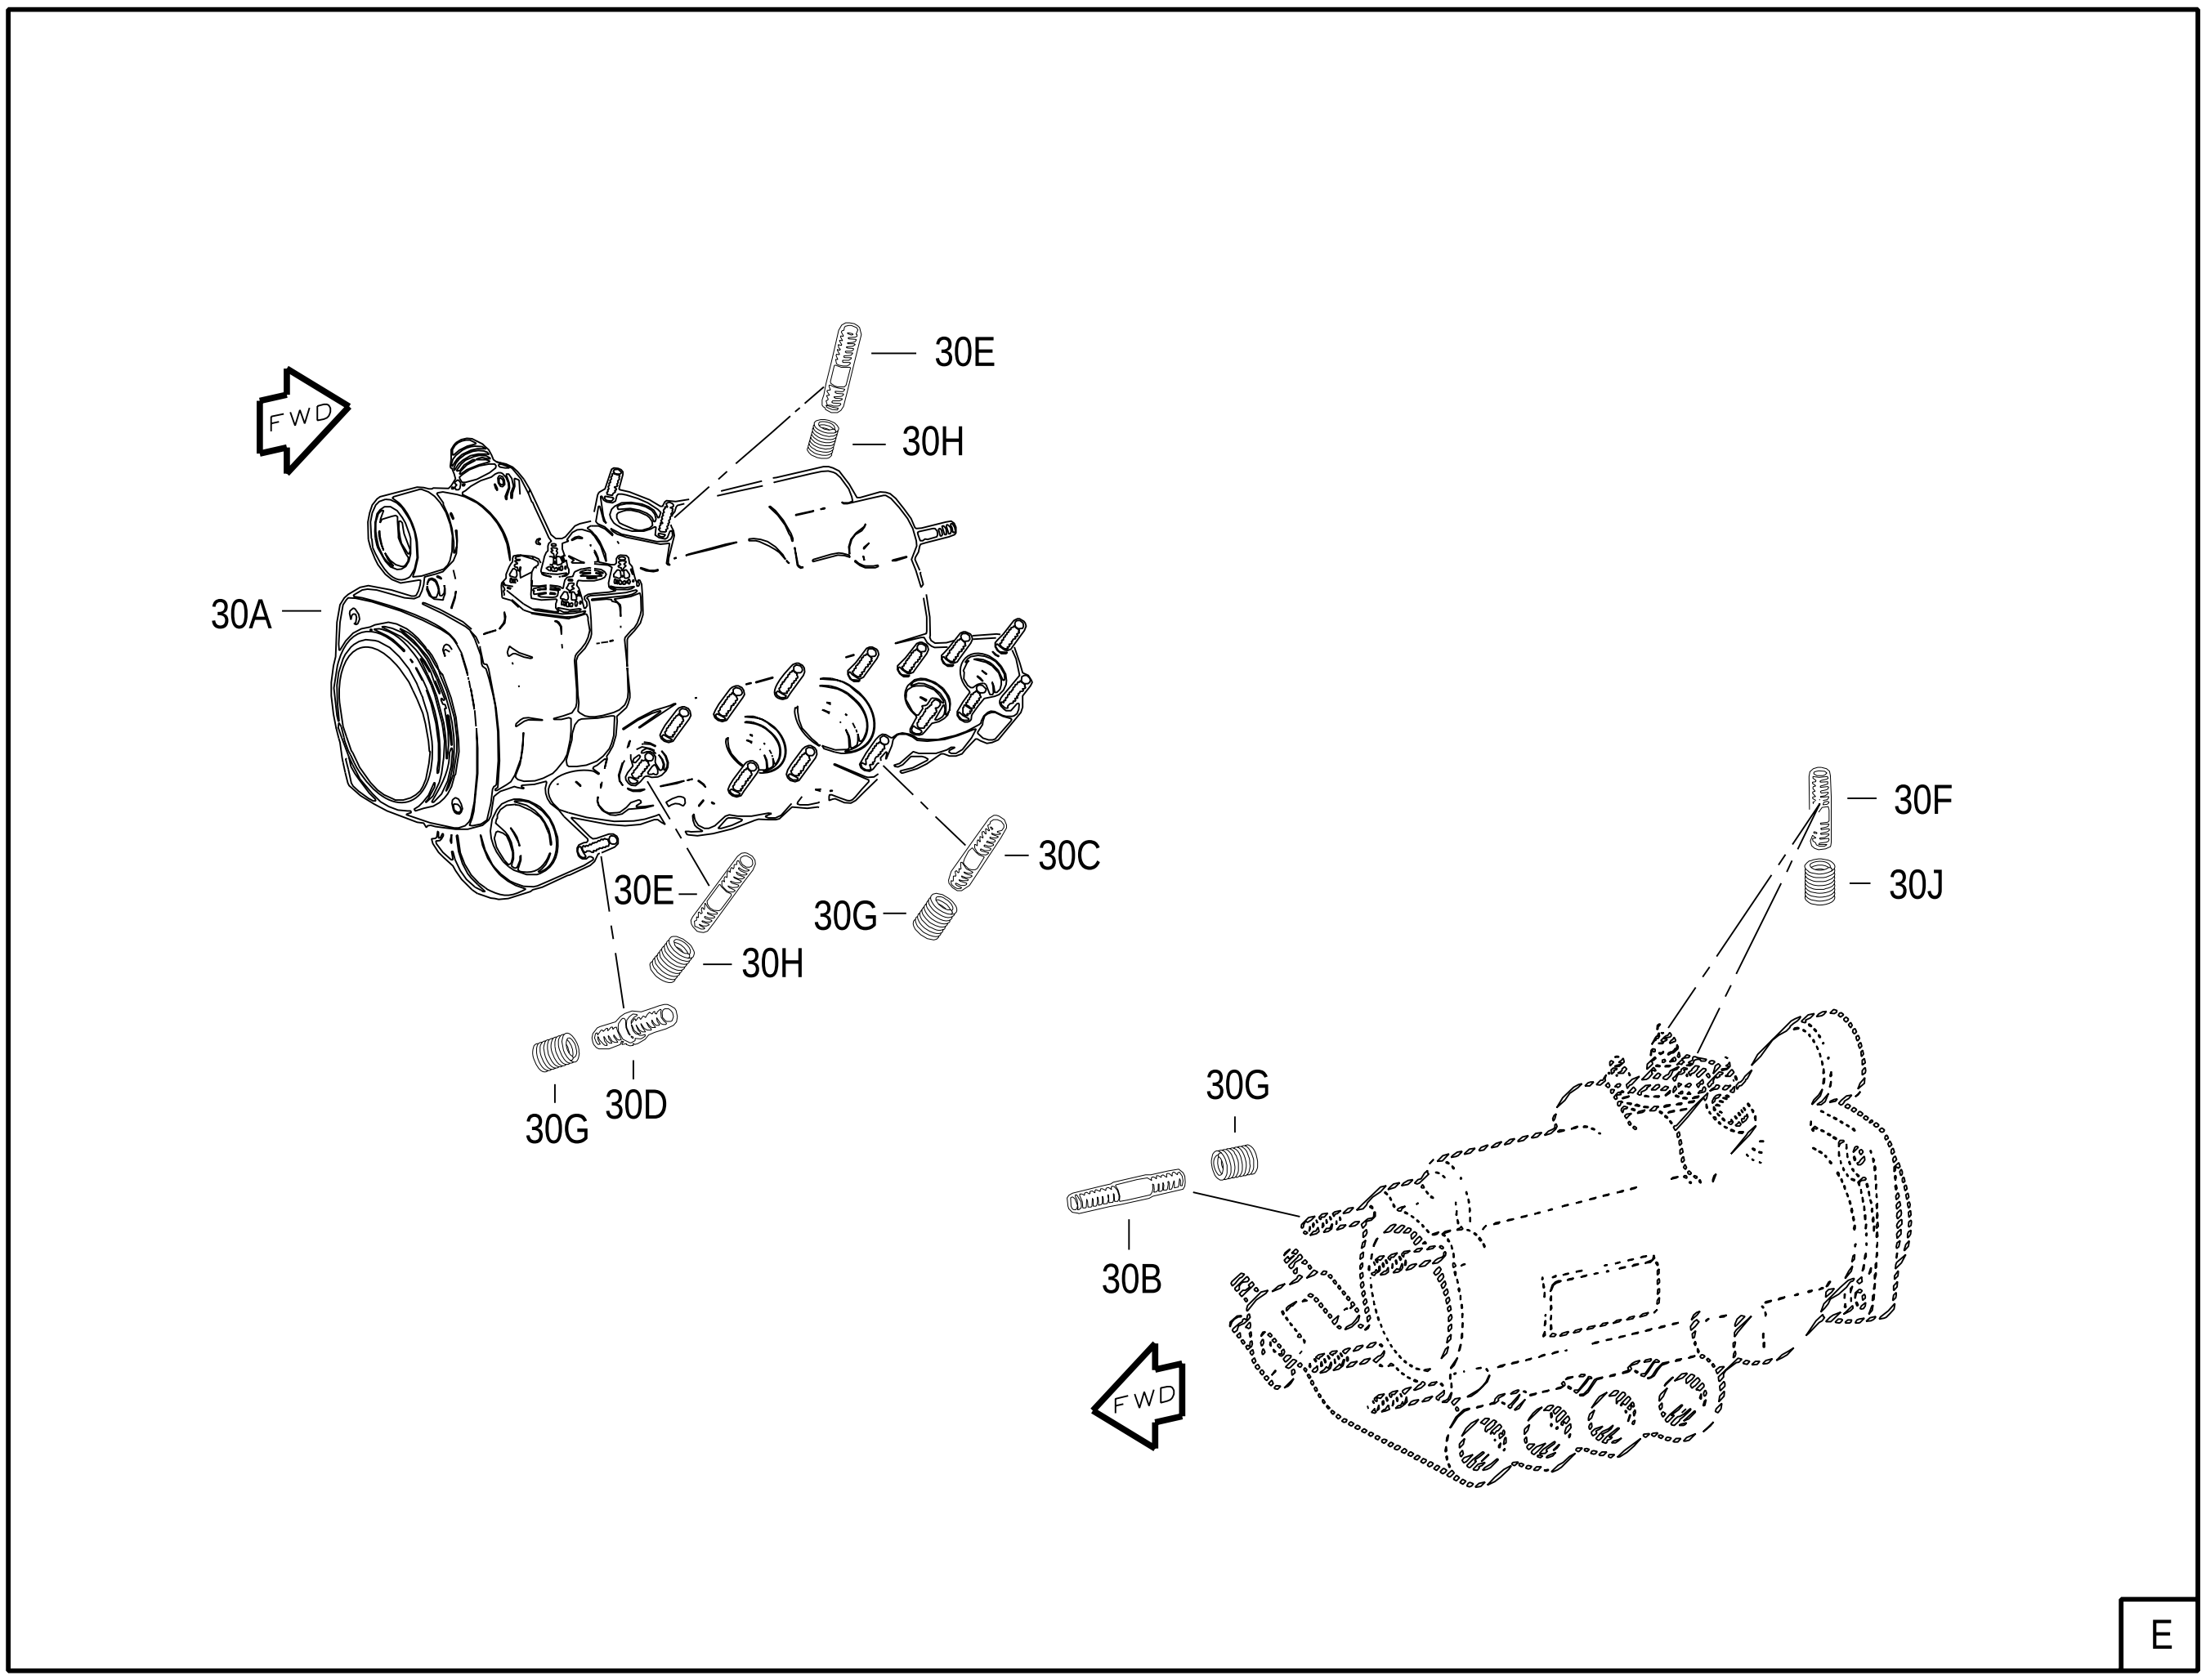


FIGURE 58. GEARBOX MODULE
(SHEET 4 OF 4)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
58	4068725-800	52661	GEARBOX MODULE .... SEE FIG. 1-10 FOR NHA	1	AC	PAFDD
	4082609-800	52661	GEARBOX MODULE .... REPLACED BY 4086325-800 SEE FIG. 1-10 FOR NHA	1	AD	PAFDD
	4086325-800	52661	GEARBOX MODULE .... REPLACES 4082609-800 SEE FIG. 1-10 FOR NHA	1		PAFDD
- 1	4015508	52661	. COVER-PLAIN, 4 HOLE .... 3.920 IN.	1		PAOZZ
- 2	4023116	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	4		PAOZZ
- 3	MS9321-10	96906	. WASHER (AP)	4		PAOZZ
- 4	4015507	52661	. GASKET, 4 HOLE................................. 3.280 IN. ID	1		PAOZZ
- 5	4028897	52661	. BOLT-MACHINE, HEX .... 0.250-28UNJF-3A X 11.250 IN. LONG	2		PAOZZ
- 6	171752	52661	. WASHER-KEY .... 0.255 ID X 0.031 IN. THK	2		PAOZZ
- 7	4045639-01	52661	. TUBE-SCAVENGE, MAIN OIL PUMP, ASSY OF......	1		PAOLD
- 8	4066226	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	2		PAFZZ
- 9	ST1050-016	52661	. PACKING-PREFORMED .... 0.614 ID X 0.070 IN. DIA	1		PAOZZ
- 10	ST1051-10	52661	. PACKING-PREFORMED, BOSS .... 0.755 ID X 0.097 IN. DIA ROUND	3		PAOZZ
- 11	628000	52661	. RETAINER-PACKING.............................. 0.769 OD X 0.131 ID X 0.045 IN. THK	1		PAOZZ
- 12	ST2130-10	52661	. LOCKNUT-TUBE FITTING .... 0.875-14UNJF-3B X 0.391 OD	1		PAOZZ
- 13	4044147	52661	. CONNECTOR-TUBE, OIL TANK SCAVENGE	1		PAOZZ
- 14	4017861	52661	. TUBE-ASSY OF, TRANSFER, PACKING .... 1.000 OD X 5.716 IN. LONG	1		PAOBZ
- 15	ST1000-214	52661	. PACKING-PREFORMED .... 0.984 ID X 0.139 IN. DIA	2		PAOZZ
- 16	4083997 #	52661	. PUMP ASSY-OIL, MAIN	1		PAODD
- 17	4023116	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	4		PAOZZ
- 18	MS9321-10	96906	. WASHER (AP) .... PARTIAL BREAKDOWN FOLLOWS	4		PAOZZ
- 19	4064496	52661	.. STRAINER ELEMENT-SCREEN, OIL PUMP	2		PAOZZ
- 20	4064498	52661	.. STRAINER ELEMENT-SCREEN, OIL PUMP	1		PAOZZ
- 21	4064497	52661	.. STRAINER ELEMENT-SCREEN, OIL PUMP	1		PAOZZ
- 22	4037945	52661	.. PLUG-NO. 4 BEARING ELBOW	1		PAOZZ
- 23	4023116	52661	.. NUT OPTION (AP) .... SEE OPTION TABLE	3		PAOZZ
- 24	ST1000-218	52661	.. PACKING-PREFORMED .... 1.234 ID X 0.139 IN. DIA	1		PAOZZ
- 25	4084017	52661	.. ADAPTER-STRAIGHT, TUBE TO BOSS 0.875-14UNJF-3A	1		PAOZZ
- 26	ST1001-10	52661	.. PACKING-PREFORMED .... 0.755 ID X 0.097 IN. DIA	1		PAOZZ
- 27	MS9954-10	96906	.. PLUG	1		PAOZZ
- 28	ST1001-10	52661	.. PACKING-PREFORMED .... 0.755 ID X 0.097 IN. DIA	1		PAOZZ
- 29	1B2368	97484	.. DETECTOR-METAL CHIP, OIL SUMP .... P&W PART NO. 4076098 PARTIAL BREAKDOWN FOLLOWS	3		PAOFF
- 29A	M83248/1-012	81349	... PACKING	2		PAFZZ
- 30	ST1001-10	52661	.. PACKING-PREFORMED .... 0.755 ID X 0.097 IN. DIA	3		PAOZZ
R - 30A	4028969	52661	.. HOUSING ASSY-MAIN PUMP .... R PARTIAL BREAKDOWN FOLLOWS	1		PADDD
R - 30B	% 4026021	52661	... STUD-PLAIN .... R 0.250-20NS-28UNJF-3A X 1.820 IN. LONG	4		XA

	FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R R	58 - 30B		4026021P3		52661	... STUD 0.003 IN. OVERSIZE	AR		PAFZZ
R R			4026021P6		52661	... STUD 0.006 IN. OVERSIZE	AR		PAFZZ
R R			4026021P9		52661	... STUD 0.009 IN. OVERSIZE	AR		PAFZZ
R R			4026021P12		52661	... STUD 0.012 IN. OVERSIZE	AR		PAFZZ
R R	- 30C	%	4027527		52661	... STUD-PLAIN 0.250-20NS-28UNJF-3A X 1.280 IN. LONG	12		XA
R R			4027527P3		52661	... STUD 0.003 IN. OVERSIZE	AR		PAFZZ
R R			4027527P6		52661	... STUD 0.006 IN. OVERSIZE	AR		PAFZZ
R R			4027527P9		52661	... STUD 0.009 IN. OVERSIZE	AR		PAFZZ
R R			4027527P12		52661	... STUD 0.012 IN. OVERSIZE	AR		PAFZZ
R R R	- 30D	%	4028971		52661	... STUD-STEPPED 0.190-32UNJF-3A X 0.250-20NS X 1.125 IN. LONG	1		XC
R R			4028971P3		52661	... STUD 0.003 IN. OVERSIZE	AR		PAFZZ
R R			4028971P6		52661	... STUD 0.006 IN. OVERSIZE	AR		PAFZZ
R R			4028971P9		52661	... STUD 0.009 IN. OVERSIZE	AR		PAFZZ
R R			4028971P12		52661	... STUD 0.012 IN. OVERSIZE	AR		PAFZZ
R R	- 30E	%	4027528		52661	... STUD-PLAIN 0.190-24NS-32UNJF-3A X 1.060 IN. LONG	4		XC
R R			4027528P3		52661	... STUD 0.003 IN. OVERSIZE	AR		PAFZZ
R R			4027528P6		52661	... STUD 0.006 IN. OVERSIZE	AR		PAFZZ
R R			4027528P9		52661	... STUD 0.009 IN. OVERSIZE	AR		PAFZZ
R R			4027528P12		52661	... STUD 0.012 IN. OVERSIZE	AR		PAFZZ
R R	- 30F	%	4026020		52661	... STUD-PLAIN 0.190-24NS-32UNJF-3A X 0.940 IN. LONG	4		XC
R R			4026020P3		52661	... STUD 0.003 IN. OVERSIZE	AR		PAFZZ
R R			4026020P6		52661	... STUD 0.006 IN. OVERSIZE	AR		PAFZZ
R R			4026020P9		52661	... STUD 0.009 IN. OVERSIZE	AR		PAFZZ
R R			4026020P12		52661	... STUD 0.012 IN. OVERSIZE	AR		PAFZZ
R R	- 30G		MS122201		96906	... INSERT SERVICE REPAIR PART	17		PAFZZ
R R	- 30H		MS122200		96906	... INSERT SERVICE REPAIR PART	4		PAFZZ
R R	- 30J		MS122160		96906	... INSERT SERVICE REPAIR PART	4		PAFZZ
	- 31		ST1000-153		52661	. PACKING-PREFORMED 3.487 ID X 0.103 IN. DIA	1		PAOZZ
	- 32		4023116		52661	. NUT OPTION SEE OPTION TABLE	3		PAOZZ
	- 33		MS9321-10		96906	. WASHER	3		PAOZZ
	- 34		AD-9348-1657	#	18350	. FILTER-OIL P&W PART NO. 4071345 PARTIAL BREAKDOWN FOLLOWS	1	JS	PAODD
	- 35		AA-2100-11D99		18350	.. SCREW-CAP, SOCKET HD	2		PAOZZ
	- 36		RC799UL090		18350	.. INDICATOR-IMPENDING BYPASS, LUBE OIL FILTER	1		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
58 - 37	MS28774-015	96906	.. RING	1		PAOZZ
- 38	M83248/1-015	81349	.. PACKING	1		PAOZZ
- 39	M83248/1-014	81349	.. PACKING	1		PAOZZ
- 40	AA-9348-1653D2	18350	.. BOWL-FILTER, LUBE OIL	1		PAOZZ
- 41	M83248/1-144	81349	.. PACKING	1		PAOZZ
- 42	AC-9348E-165	18350	.. FILTER ELEMENT-LUBE OIL	1		PAOZZ
- 43	M83248/1-023	81349	.. PACKING	1		PAOZZ
- 44	AA-9348-1657D1	18350	.. HEAD-FILTER, LUBE OIL	1		XA
- 45	AD-9348-1657Y1 #	18350	. FILTER-LUBE OIL P&W PART NO. 4077414 PARTIAL BREAKDOWN FOLLOWS	1	JT	PAODD
- 46	NAS1121E-8	80205	.. SCREW-MACHINE	2		PAOZZ
- 47	RC799UL090	18350	.. INDICATOR-IMPENDING BYPASS, LUBE OIL FILTER	1		PAOZZ
- 48	AA-990100-015	18350	.. RING-BACKUP	1		PAOZZ
- 49	M83248/1-015	81349	.. PACKING	1		PAOZZ
- 50	M83248/1-014	81349	.. PACKING	1		PAOZZ
	AD-9348BP-1657Y1	18350	.. BOWL ASSY-FILTER, LUBE OIL	1		PAOOO
- 51	AA-9500-D344	18350	... RING-RETAINING	1		PAOZZ
- 52	AD-9348-1657Y1D1A	18350	... BOWL-FILTER, LUBE OIL	1		PAOZZ
- 53	MS28774-016	96906	... RETAINER	1		PAOZZ
- 54	M83248/1-016	81349	... PACKING	1		PAOZZ
- 55	RD859UL0H7	18350	... INDICATOR-ACTUAL BYPASS, LUBE OIL FILTER	1		PAOZZ
- 56	M83248/1-024	81349	.. PACKING	3		PAOZZ
- 57	M83248/1-144	81349	.. PACKING	1		PAOZZ
- 58	AC-9348F-1630	18350	.. FILTER ELEMENT-LUBE OIL	1		PAOZZ
- 59	AC-9348RV-1656	18350	.. VALVE ASSY-ELEMENT BYPASS, LUBE OIL FILTER	1		PAOZZ
- 60	M83248/1-127	81349	.. PACKING	1		PAOZZ
- 61	AA-9348-1657Y1D1A	18350	.. HEAD-FILTER, LUBE OIL	1		XA
- 62	4067182	52661	. BOLT-REMOTE GEARBOX DRIVE COUPLING 0.4375-20UNJF-3A X 4.830 IN. LONG	1		PAOZZ
- 63	4067181	52661	. WASHER-KEY 0.966 ID X 0.105 IN. THK	1		PAOZZ
- 64	4084871	52661	. BEARING OPTION SEE OPTION TABLE REPLACES 4067178	1		PAOZZ
- 65	4067180	52661	. SPACER-REMOTE GEARBOX DRIVE SHAFT COUPLING BEARING	1		PAOZZ
	4067183	52661	. COUPLING ASSY-REMOTE GEARBOX DRIVE SHAFT	1		PAODD
- 66	4057398	52661	.. PIN-STRAIGHT, HEADLESS 0.1246 X 0.300 IN. LONG	2		PAFZZ
- 67	4067185	52661	.. COUPLING-REMOTE GEARBOX DRIVE SHAFT	1		XA
- 68	4022079	52661	. INSERT-SCREW THD, HEX 0.4375-20UNJF-3B X 0.750-16UNJF-3A X 0.400 IN. THK	1		PAOZZ
- 69	ST1001-08	52661	. PACKING-PREFORMED, BOSS 0.644 ID X 0.087 IN. DIA	1		PAOZZ
- 70	4024165	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.4375-20UNJF-3A X 0.4375-20UNJF-3A	1		PAOZZ
- 71	ST1001-04	52661	. PACKING-PREFORMED, BOSS 0.351 ID X 0.072 IN. DIA ROUND	1		PAOZZ
- 72	ST2000-04	52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.437-20UNJF-3A X 0.250 IN. TUBE OD	1		PAOZZ
- 73	MS9902-04	96906	. PLUG	1		PAOZZ
- 74	ST1001-04	52661	. PACKING-PREFORMED, BOSS 0.351 ID X 0.072 IN. DIA ROUND	2		PAOZZ
- 75	4031702	52661	. HOUSING-BREATHER PRESSURIZING VALVE	1		PAOBZ
- 76	DELETED		...			
- 77	704342	52661	. NUT OPTION (AP) SEE OPTION TABLE	3		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
58 - 78	MS9321-10	96906	. WASHER (AP) . . . . DISCARD QTY OF 2 AT LOCATIONS SECURING BRACKET IF PRESENT WHEN INSTALLING BRACKET	3		PAOZZ
- 79	4057681 #	52661	. VALVE ASSY-BREATHER PRESSURIZING	1		PAOLD
- 80	ST1050-145	52661	. PACKING-PREFORMED . . . . 2.550 ID X 0.103 IN. DIA	1		PAOZZ
- 80A	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	1		PAOZZ
- 80B	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG	1		PAOZZ
- 80C	ST1540-06	52661	. CLAMP-LOOP, CUSHION	1		PAOZZ
	4081108-01	52661	. TUBE-PRESSURE, OIL PUMP IDLER BEARING, ... ASSY OF	1		PAOBZ
- 80D	360193	52661	.. WIRE-THRUST . . . . 0.078 DIA X 1.190 IN. LONG	1		PAFZZ
- 80E	ST2121-04	52661	.. NUT-TUBE COUPLING, THRUST WIRE . . . . 0.4375-20UNJF-3B X 0.250 IN. TUBE OD	1		PAFZZ
- 80F	4081238	52661	.. ELBOW-TUBE, THRUST WIRE . . . . 0.375 OD X 0.250 ID, 10 DEG, 0.028 WALL	1		XA
- 80G	ST2045-06	52661	.. FERRULE-TUBE FITTING . . . . 0.375 TUBE OD	1		XA
- 80H	ST2006-06	52661	.. NUT-TUBE COUPLING . . . . 0.375 IN. TUBE OD X 0.5625-18UNJF-3B	1		PAOZZ
- 80J	4081108-02	52661	.. TUBE-PRESSURE, OIL PUMP IDLER BEARING	1		XA
- 81	73916-624	56878	. NUT-SELF-LOCKING, DOUBLE HEX . . . . 0.375-24UNJF-3B X 0.395 IN. THK P&W PART NO. ST2113-12	6		PAOZZ
- 82	539418	52661	. WASHER-FLAT . . . . 0.406 ID X 0.625 OD X 0.078 IN. THK	4		PAOZZ
- 82A	DELETED					
- 82B	4081239	52661	. BRACKET-ANGLE	1		PAOZZ
- 83	4066398	52661	. GEARBOX ASSY-REDUCTION . . . . SEE FIG. 59 FOR DETAIL PARTS	1		ADD
- 84	ST1000-048	52661	. PACKING-PREFORMED . . . . 4.739 ID X 0.070 IN. DIA	1		PAFZZ
- 85	4075519 *	52661	. PLATE-IDENTIFICATION, GEARBOX MODULE	1		PADZZ
- 86	PK535-4-5	45722	. SCREW-DRIVE, ROUND . . . . 0.114 DIA X 0.3125 IN. LONG (AP) P&W PART NO. 4016649	4		PADZZ
- 87	4084020	52661	. GEARBOX ASSY-MAIN . . . . SEE FIG. 60 FOR DETAIL PARTS USE ONLY ON 4082609-800	1		ADF
	4084021	52661	. GEARBOX ASSY-MAIN . . . . DO NOT PROCURE FROM P&W SEE FIG. 60 FOR DETAIL PARTS USE ONLY ON 4068725-800	1		ADF
	4084022	52661	. GEARBOX ASSY-MAIN . . . . DO NOT PROCURE FROM P&W SEE FIG. 60 FOR DETAIL PARTS USE ONLY ON 4068725-800	1		ADF
	4085170	52661	. GEARBOX ASSY-MAIN . . . . SEE FIG. 60 FOR DETAIL PARTS USE ONLY ON 4086325-800	1		ADF
	4068700	52661	ENGINE ASSY-TURBO FAN	REF	A	ADD
	4068800	52661	ENGINE ASSY-TURBO FAN	REF	B	ADD
- 88	4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	4		PAOZZ
- 89	4006660	52661	. WASHER-FLAT . . . . 0.266 ID X 0.625 OD X 0.575 IN. THK	4		PAOZZ
- 90	4006661	52661	. BOLT-SHOULDER, DOUBLE HEX . . . . 0.250-28UNJF-3A X 1.335 IN. LONG	4		PAFZZ
- 91	MS9768-12	96906	. WASHER	4		PAFZZ
- 92	4031264	52661	. LINK ASSY-GEARBOX SUPPORT . . . . PARTIAL BREAKDOWN FOLLOWS	2		PAFLD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
58 - 93	4002867	52661	.. BUSHING-SLEEVE, FLANGED . . . . 0.5015 OD X 0.180 IN. THK	4		PAFZZ
- 94	4059992	52661	. BOLT-DOWELED END, DRILLED DOUBLE HEX . . . . . 0.182 X 0.250-28 X 1.200 IN. LONG	1		PAFZZ
- 95	4075885	52661	. BRACKET-LOOP CLAMP, ASSY OF	1	AA	PAFZZ
	4078317-01	52661	. BRACKET-LOOP CLAMP, ASSY OF	1	AB	PAFZZ
- 96	4071772	52661	. BRACKET-CABLE	1		PAOZZ
- 97	4075550	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 98	4080583-01	52661	. BRACKET-SUPPORT, GEARBOX HOSE, ASSY OF . .	1	MU	PAOZZ
- 98A	4082643-01	52661	. BRACKET ASSY-OF, ANGLE	1	MV	PAOZZ
- 98B	TA107000010-04	84971	. CLAMP-LOOP, CUSHION, HINGE . . . . P&W PART NO. ST2816-04	1		PAOZZ
- 98C	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 98D	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ
- 98E	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG	1		PAOZZ
- 99	4077410	52661	. BRACKET-LOOP CLAMP, ASSY OF . . . . REPLACES 4074473	1		PAFBZ
- 100	ST1000-256	52661	. PACKING-PREFORMED . . . . 5.734 ID X 0.138 IN. DIA	2		PAFZZ
- 101	4071013	52661	. SHAFT-GEARBOX DRIVE	1		PAFFF
- 102	MS9954-06	96906	. PLUG	1		PAOZZ
- 103	MS9966-06	96906	. PACKING	1		PAOZZ

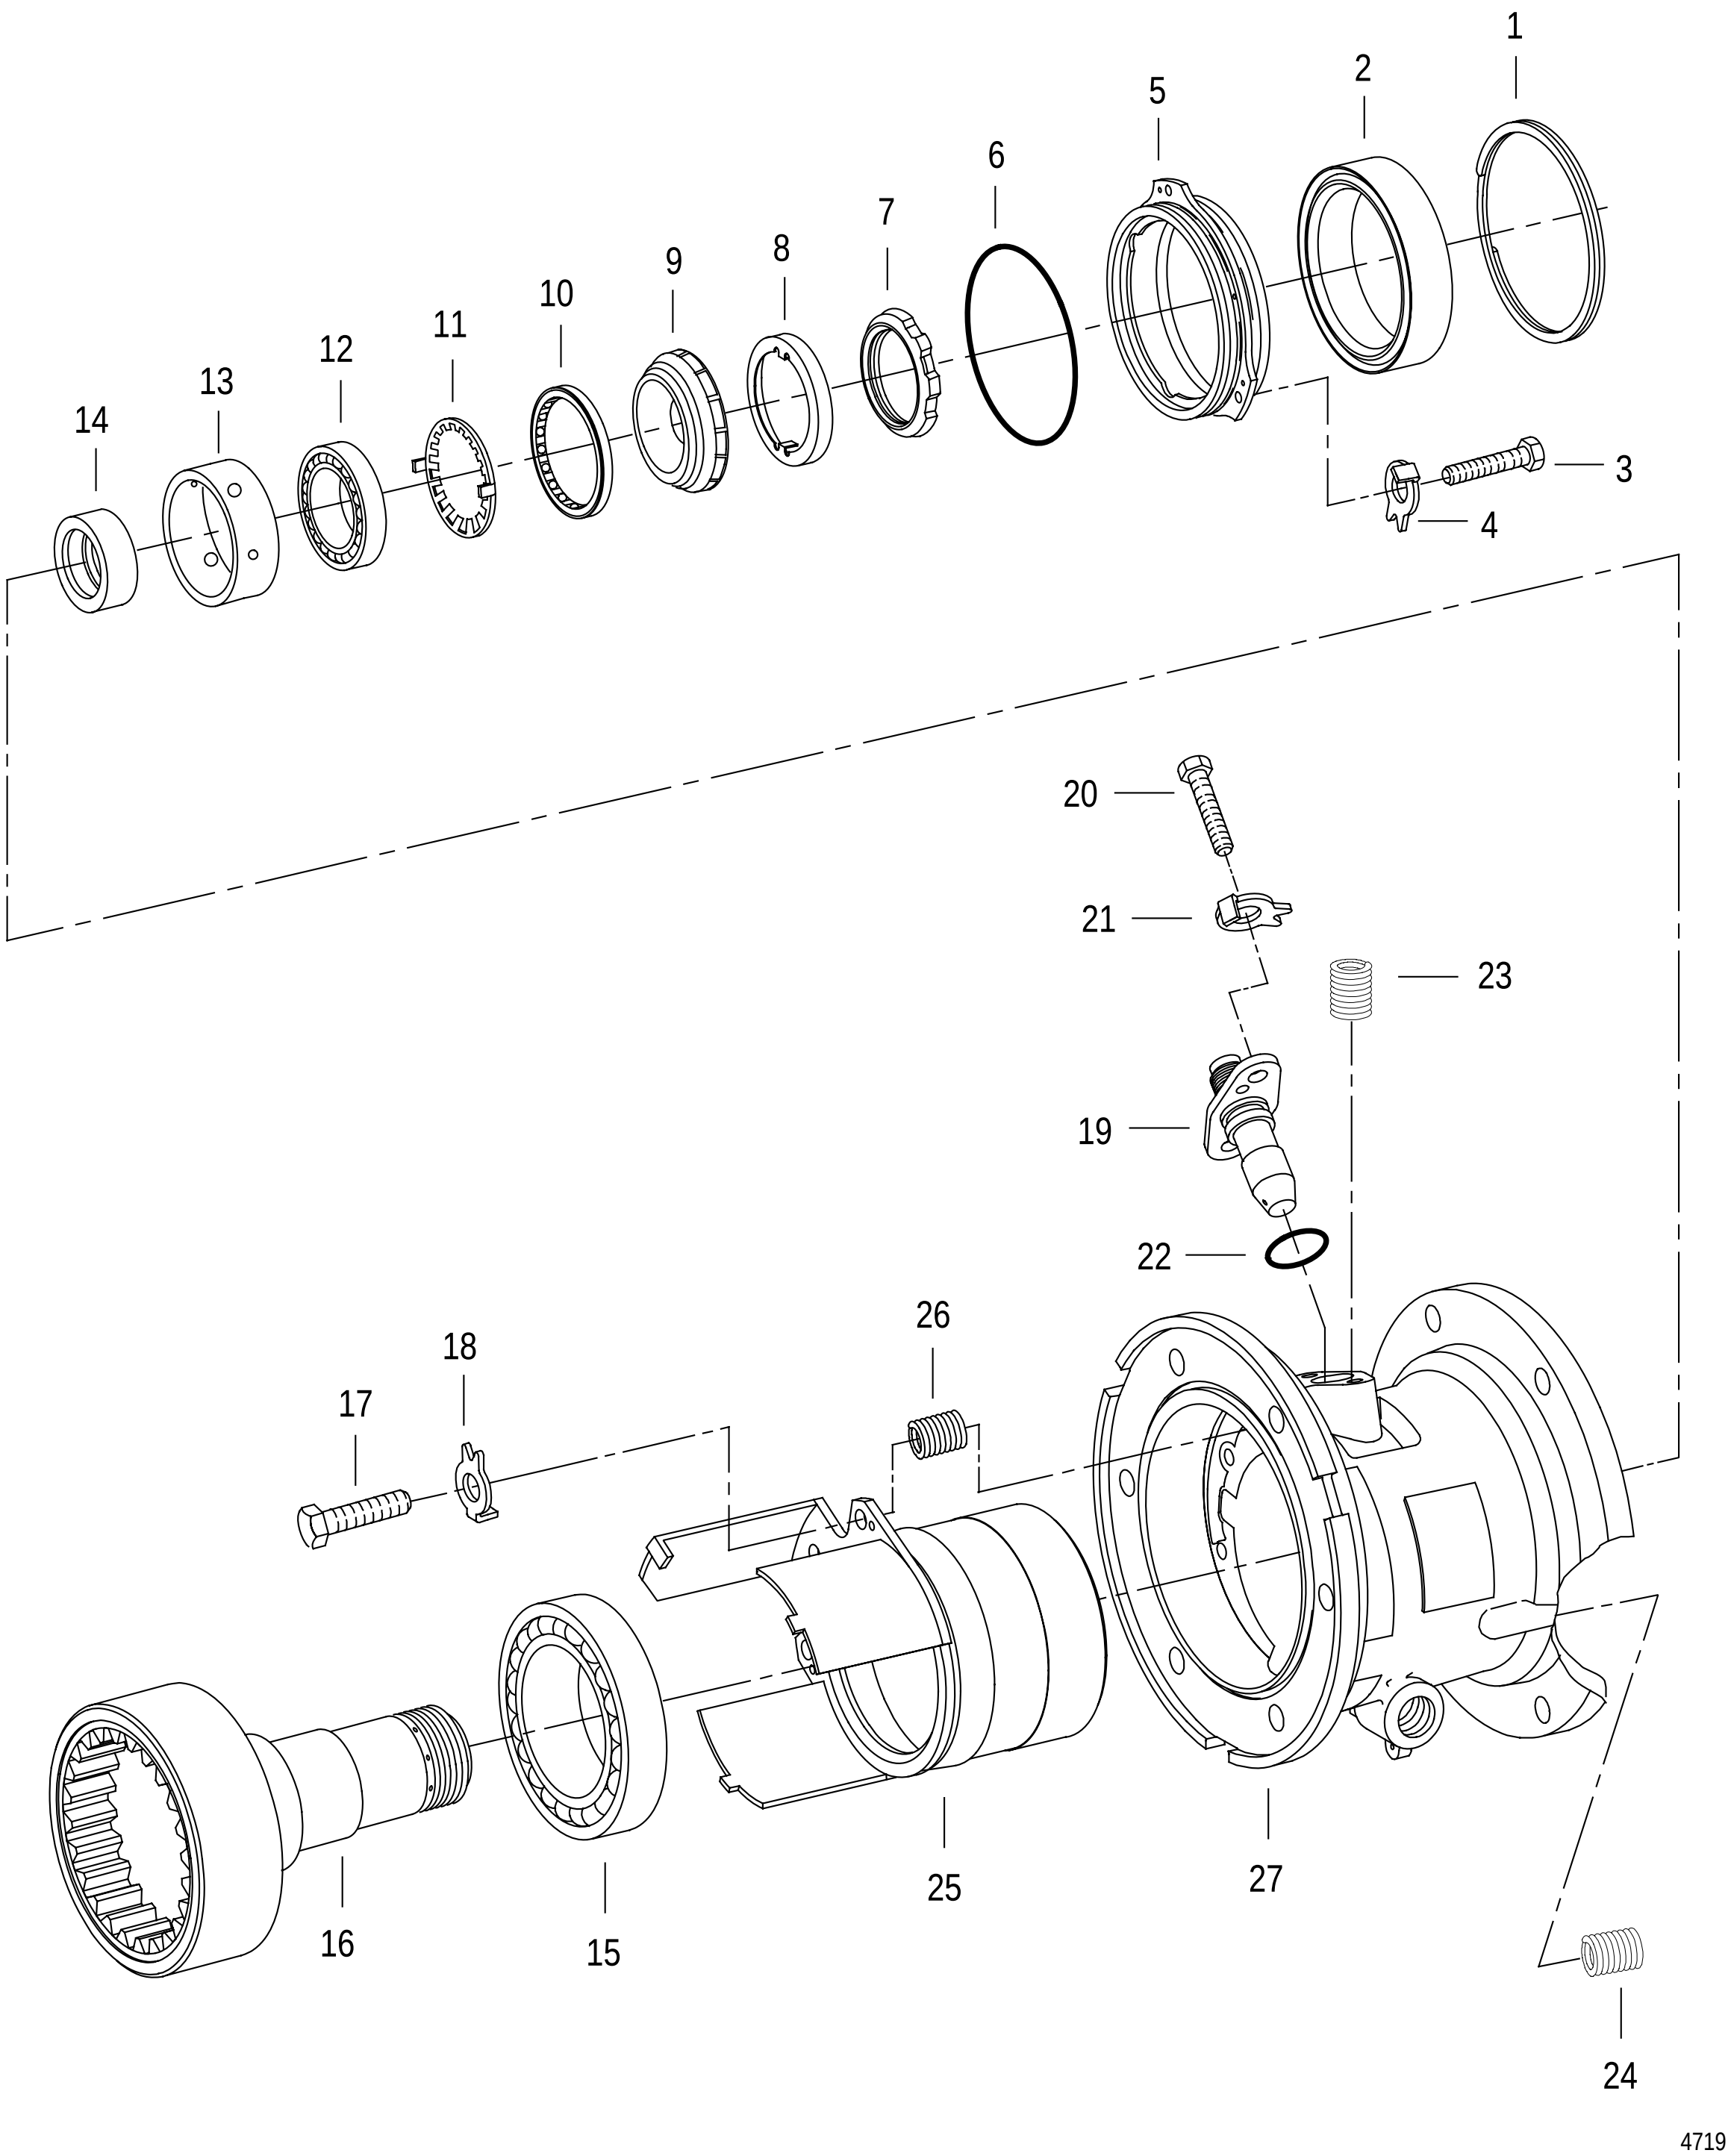


FIGURE 59. REDUCTION GEARBOX ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
59	4066398	52661	GEARBOX ASSY-REDUCTION .... SEE FIG. 58-83 FOR NHA	1		ADD
- 1	4061621	52661	. RING-RETAINING, SPIRAL .... 3.254 HOUSING DIA X 0.178 X 0.063 IN. THK	1		PAFZZ
- 2	4065386	52661	. SEAL OPTION .... SEE OPTION TABLE WHEN EXH USE 4080378	1		PAFZZ
	4080378	52661	. SEAL OPTION .... SEE OPTION TABLE	1		PAFZZ
- 3	MS9518-14	96906	. BOLT	3		PAFZZ
- 4	4014749	52661	. WASHER-KEY .... 0.2025 ID X 0.020 IN. THK	3		PAOZZ
- 5	4061082	52661	. RETAINER-OIL SEAL, GEARBOX	1		PAFZZ
- 6	ST1000-152	52661	. PACKING-PREFORMED .... 3.237 ID X 0.103 IN. DIA ROUND	1		PAFZZ
- 7	4061087	52661	. NUT-PLAIN, ROUND .... 1.6875-16UNJ-3B X 0.290 IN. THK	1		PADZZ
- 8	4061086	52661	. WASHER-KEY .... 1.700 ID X 2.150 DIA X 0.031 IN. THK	1		PADZZ
- 9	4066397	52661	. SEAT-GEARBOX BEARING SEAL	1		PADLD
- 10	4061085	52661	. INVERTED NUT-SPANNER .... 3.0625-16UNJS-3A X 0.250 IN. THK	1		PADZZ
- 11	4061084	52661	. WASHER-KEY .... 2.700 ID X 2.960 OD X 0.031 IN. THK	1		PADZZ
- 12	4062707	52661	. BEARING OPTION .... SEE OPTION TABLE	1		PADZZ
- 13	4061079	52661	. SPACER-GEARBOX BEARING, OUTER	1		PADBZ
- 14	4061080	52661	. SPACER-GEARBOX BEARING, INNER	1		PADBZ
- 15	4062708	52661	. BEARING OPTION .... SEE OPTION TABLE	1		PADZZ
- 16	4061076	52661	. GEAR-INTERNAL, MAIN FUEL PUMP DRIVE, 29 .... TEETH	1		PADBZ
- 17	MS9519-14	96906	. BOLT	3		PADZZ
- 18	171752	52661	. WASHER-KEY .... 0.255 ID X 0.031 IN. THK	3		PAOZZ
- 19	4061081	52661	. NOZZLE-GEARBOX BEARING	1		PADZZ
- 20	MS9529-08	96906	. BOLT (AP)	2		PADZZ
- 21	4014749	52661	. WASHER-KEY .... 0.2025 ID X 0.020 IN. THK (AP)	2		PAOZZ
- 22	ST1000-013	52661	. PACKING-PREFORMED .... 0.426 ID X 0.070 IN. DIA ROUND	1		PAOZZ
	4066638	52661	. HOUSING ASSY-REDUCTION GEARBOX	1		PADLD
- 23	ST1076-23	52661	.. INSERT-SCREW THREAD, SELF-LOCKING .... 0.190-32 X 0.285 IN. NOMINAL LENGTH	2		XA
R - 24	ST1322-43	52661	.. INSERT OPTION .... R SEE OPTION TABLE R SUPERSEDES ST1076-43	3		PADZZ
- 25	4066639	52661	.. PLATE-RETAINING, GEARBOX BEARING	1		XA
- 26	714099	52661	.. INSERT-SCREW THREAD, SELF-LOCKING .... 0.250-28 X 11.375 COILS	3		PAFZZ
- 27	4066640	52661	.. HOUSING-REDUCTION GEARBOX	1		XA



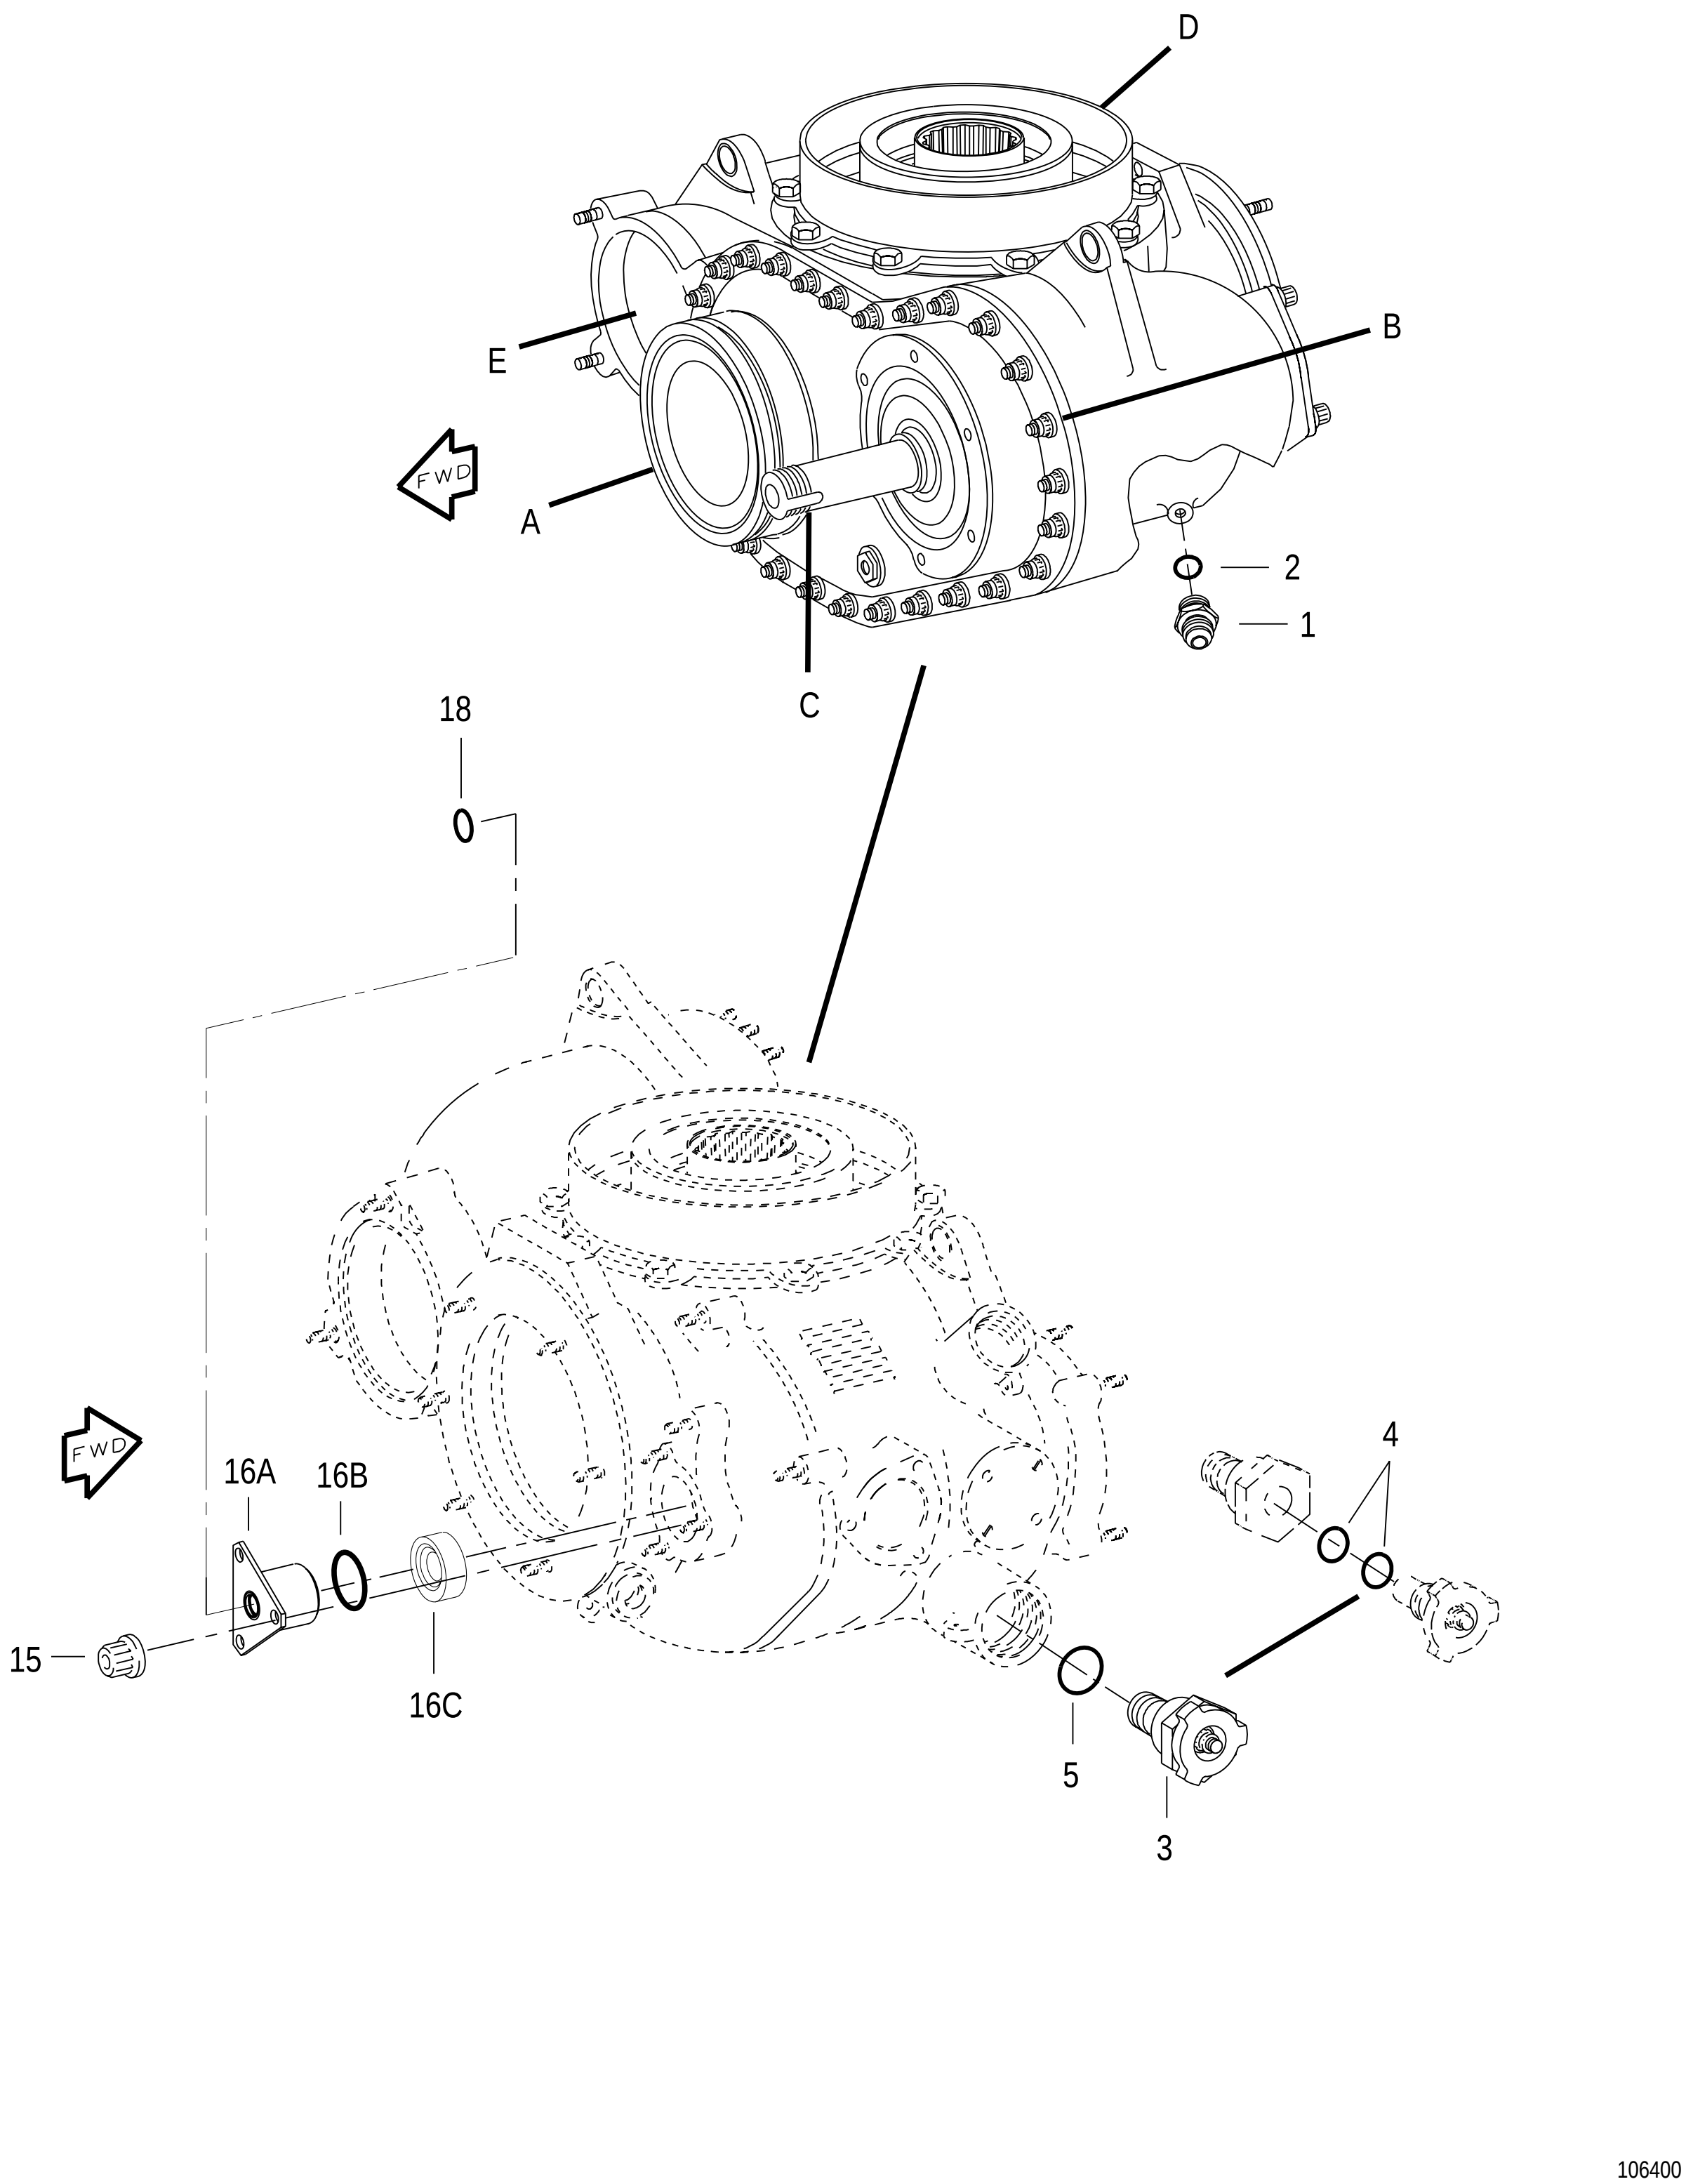


FIGURE 60. MAIN GEARBOX ASSY
(SHEET 1 OF 5)

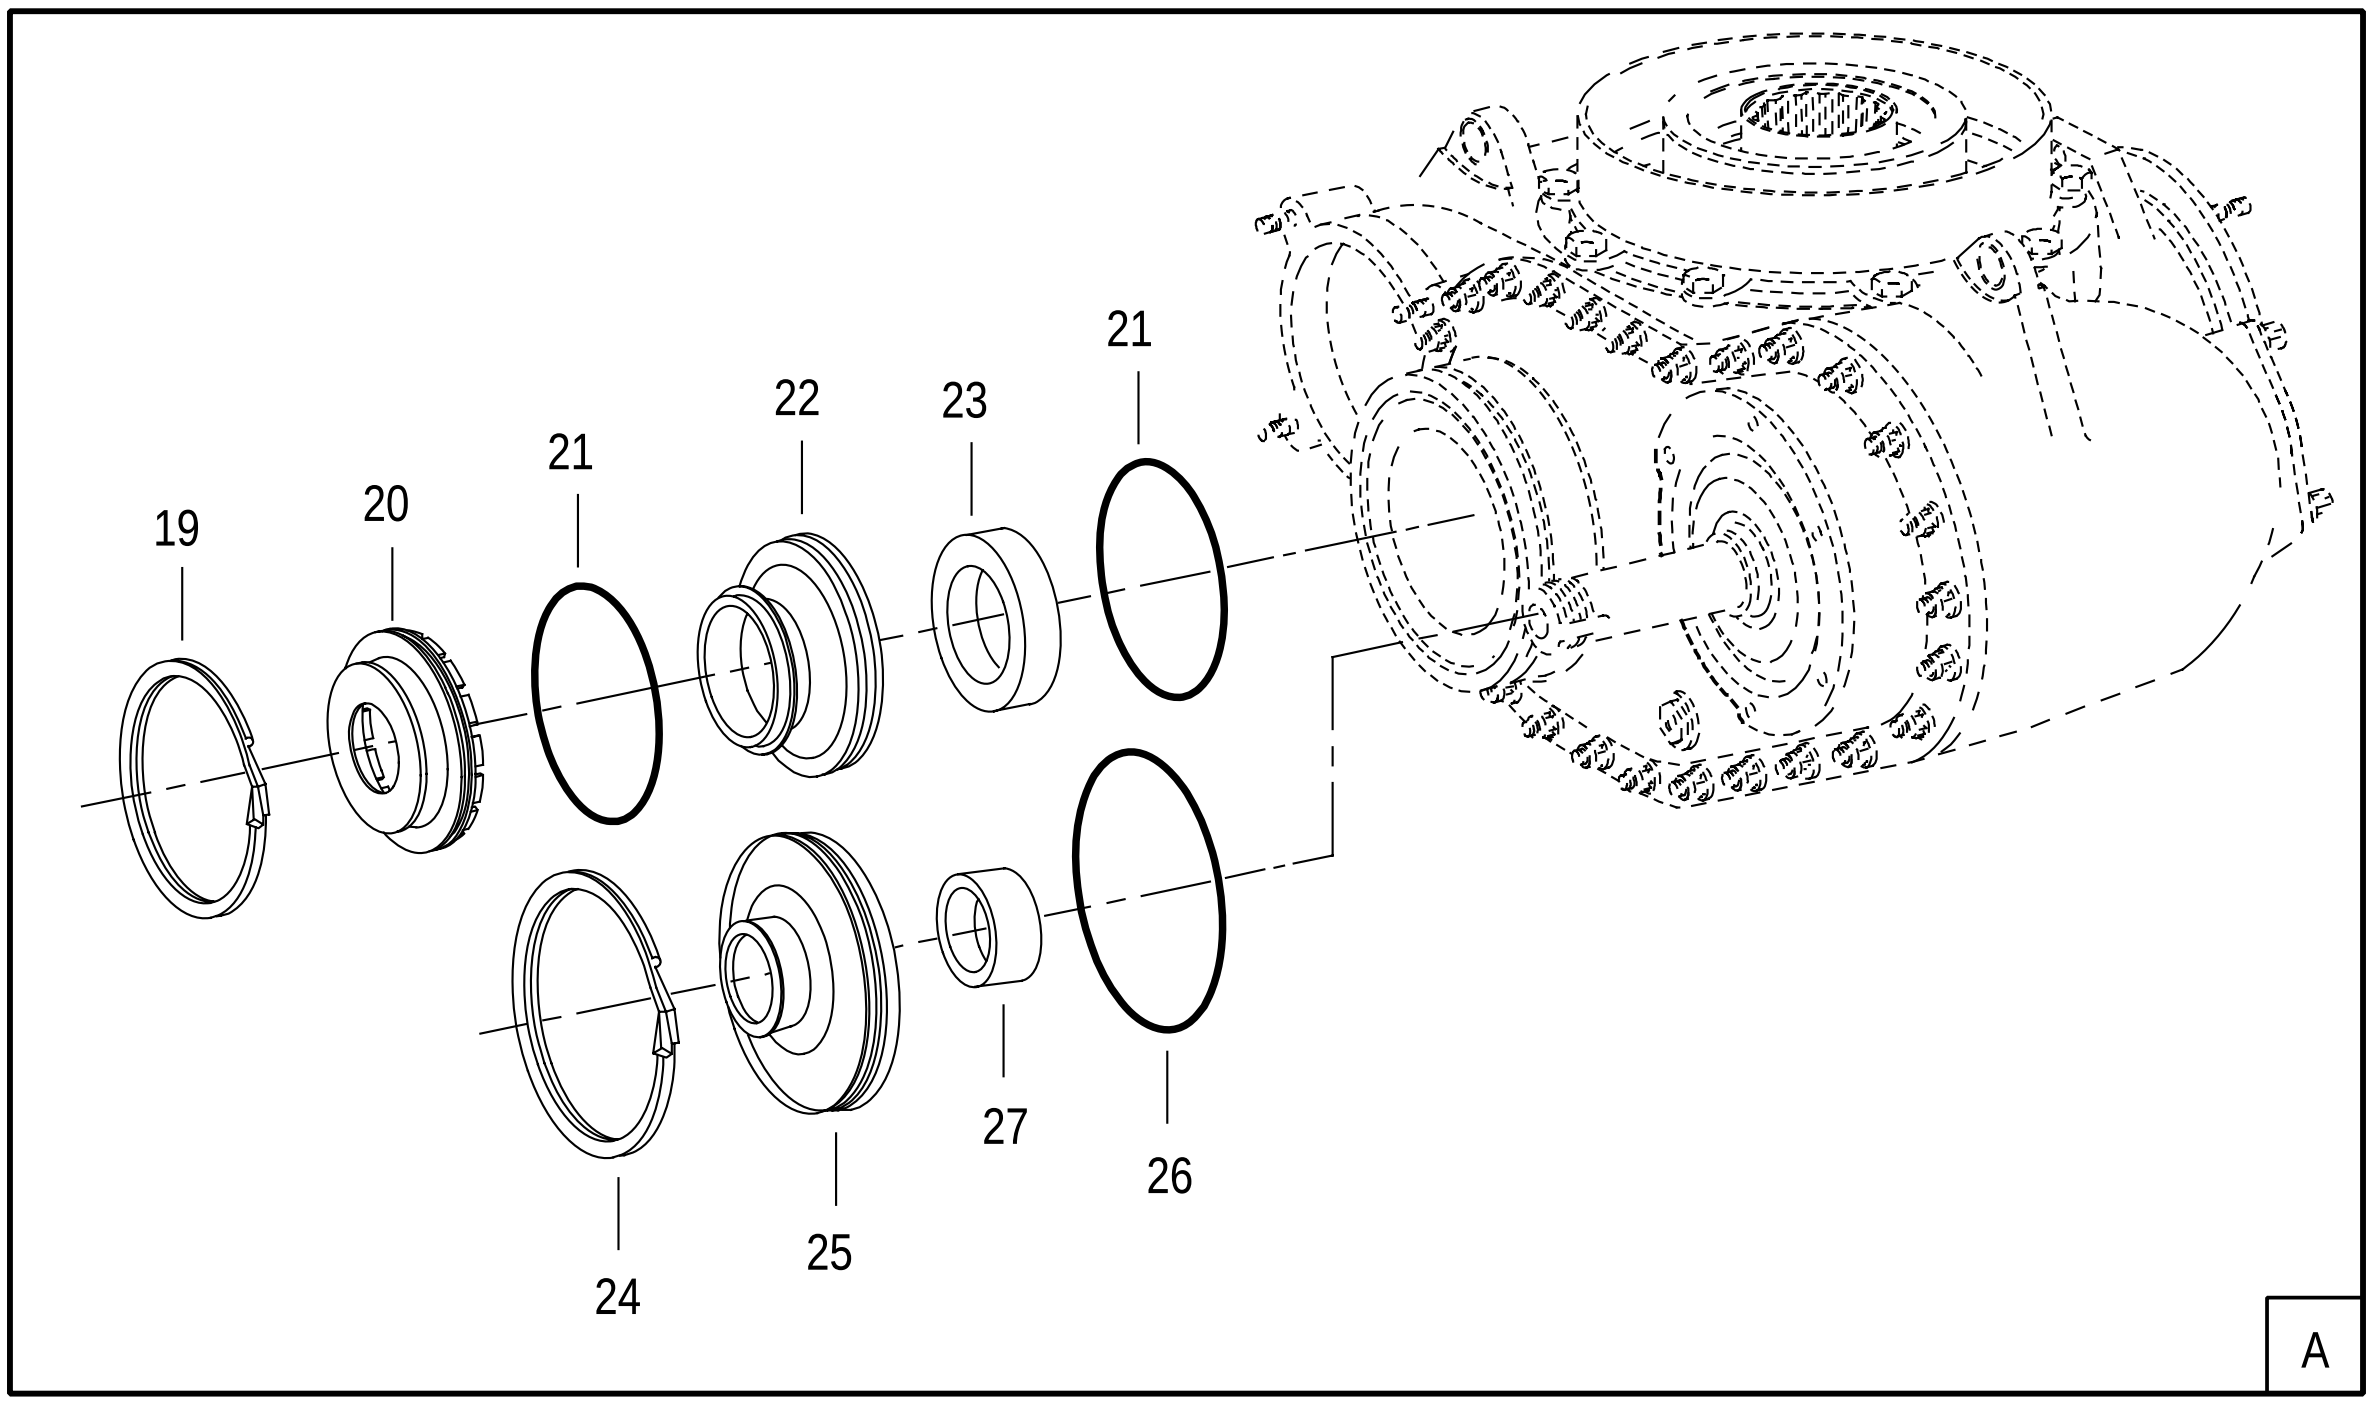

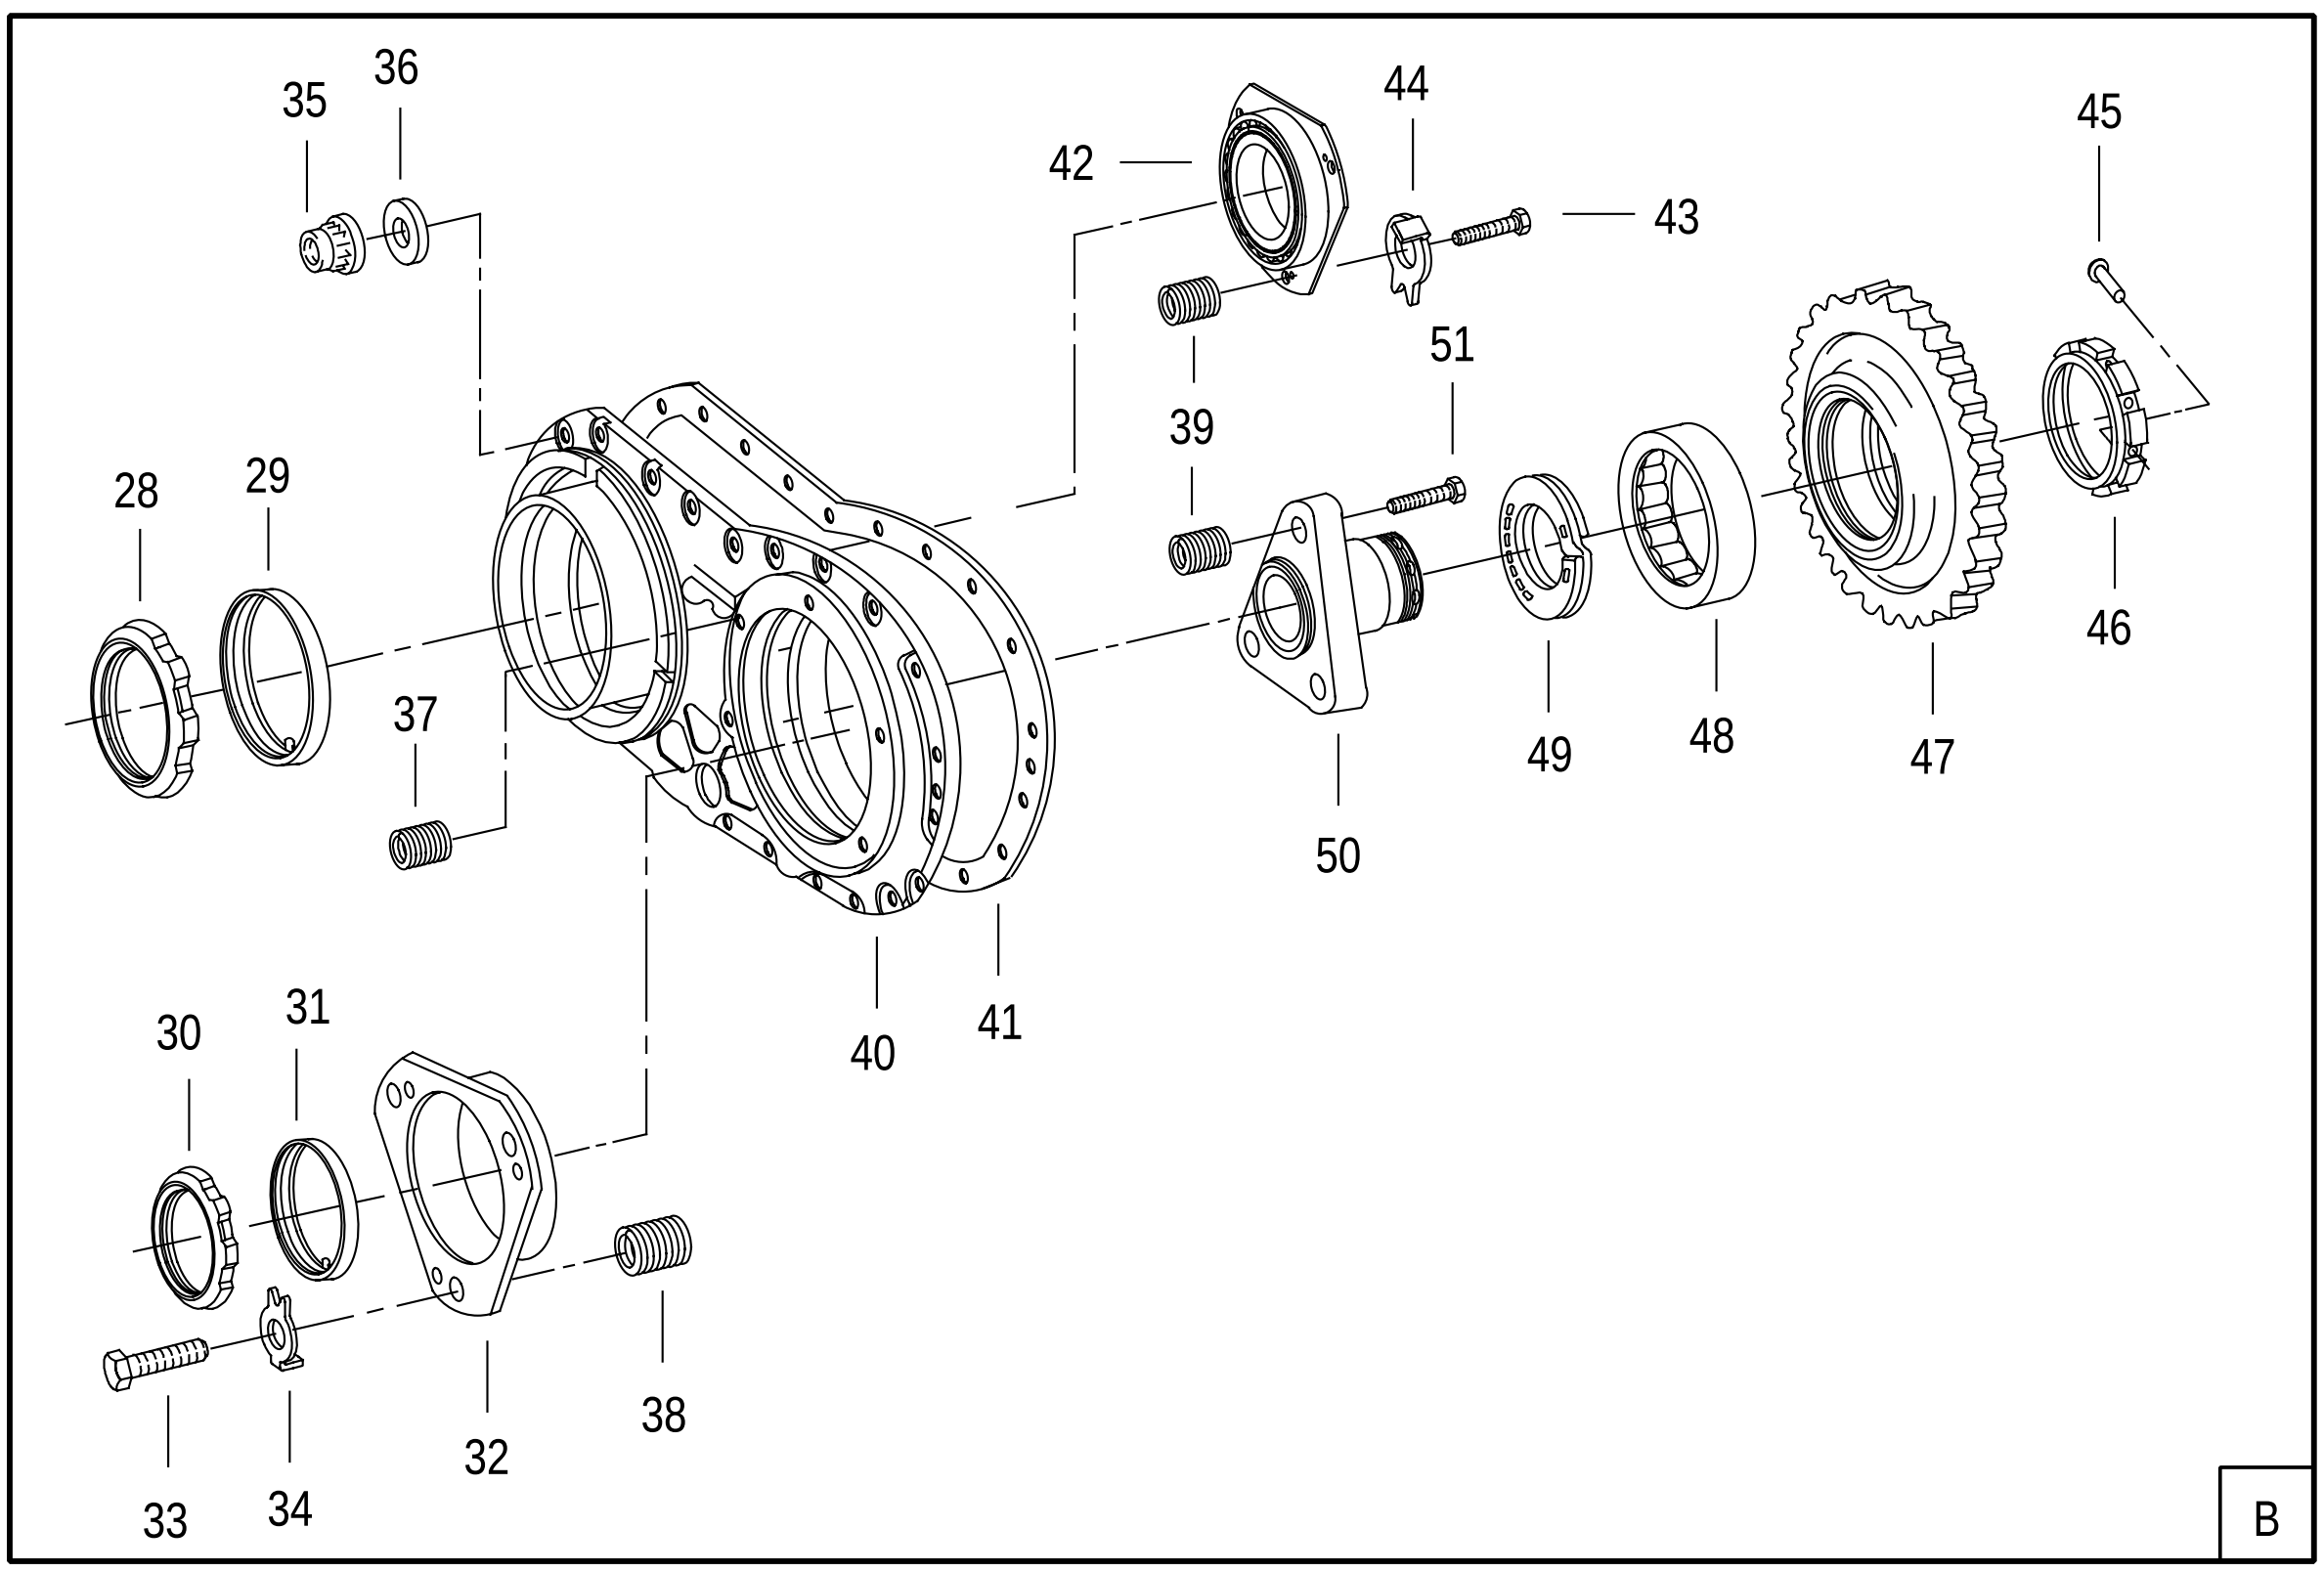

4721

FIGURE 60. MAIN GEARBOX ASSY
(SHEET 2 OF 5)

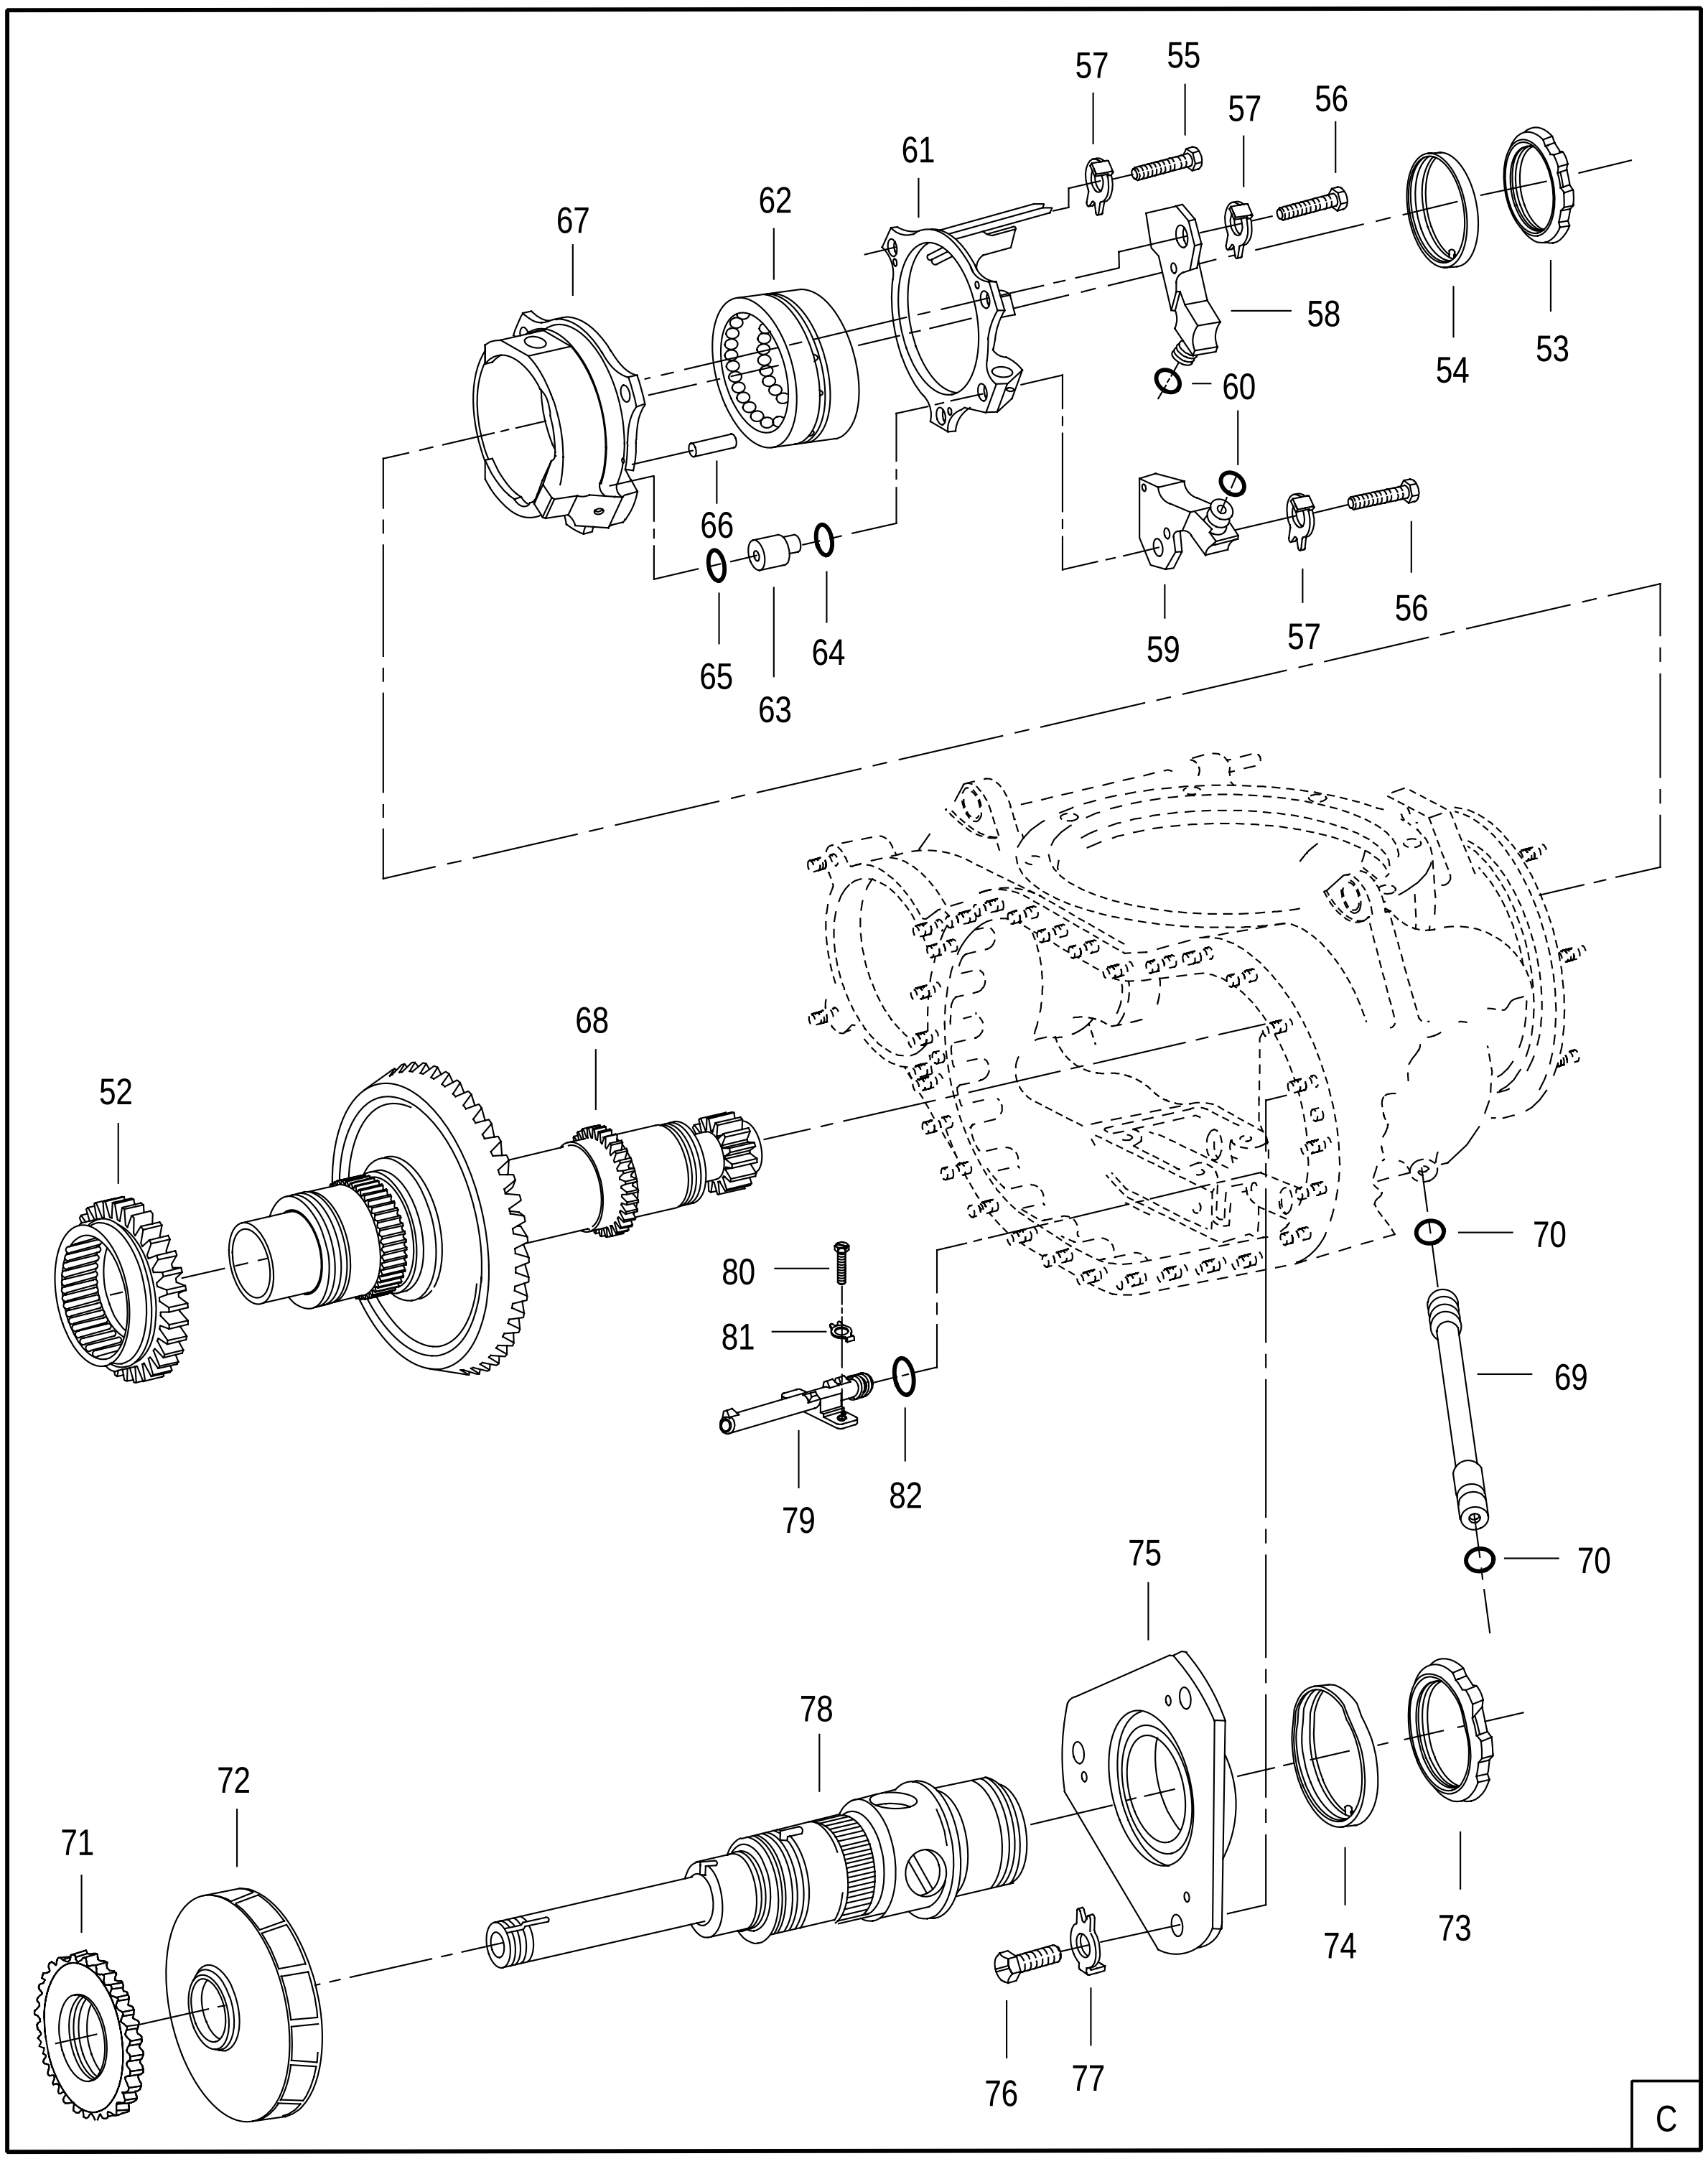


FIGURE 60. MAIN GEARBOX ASSY
(SHEET 3 OF 5)

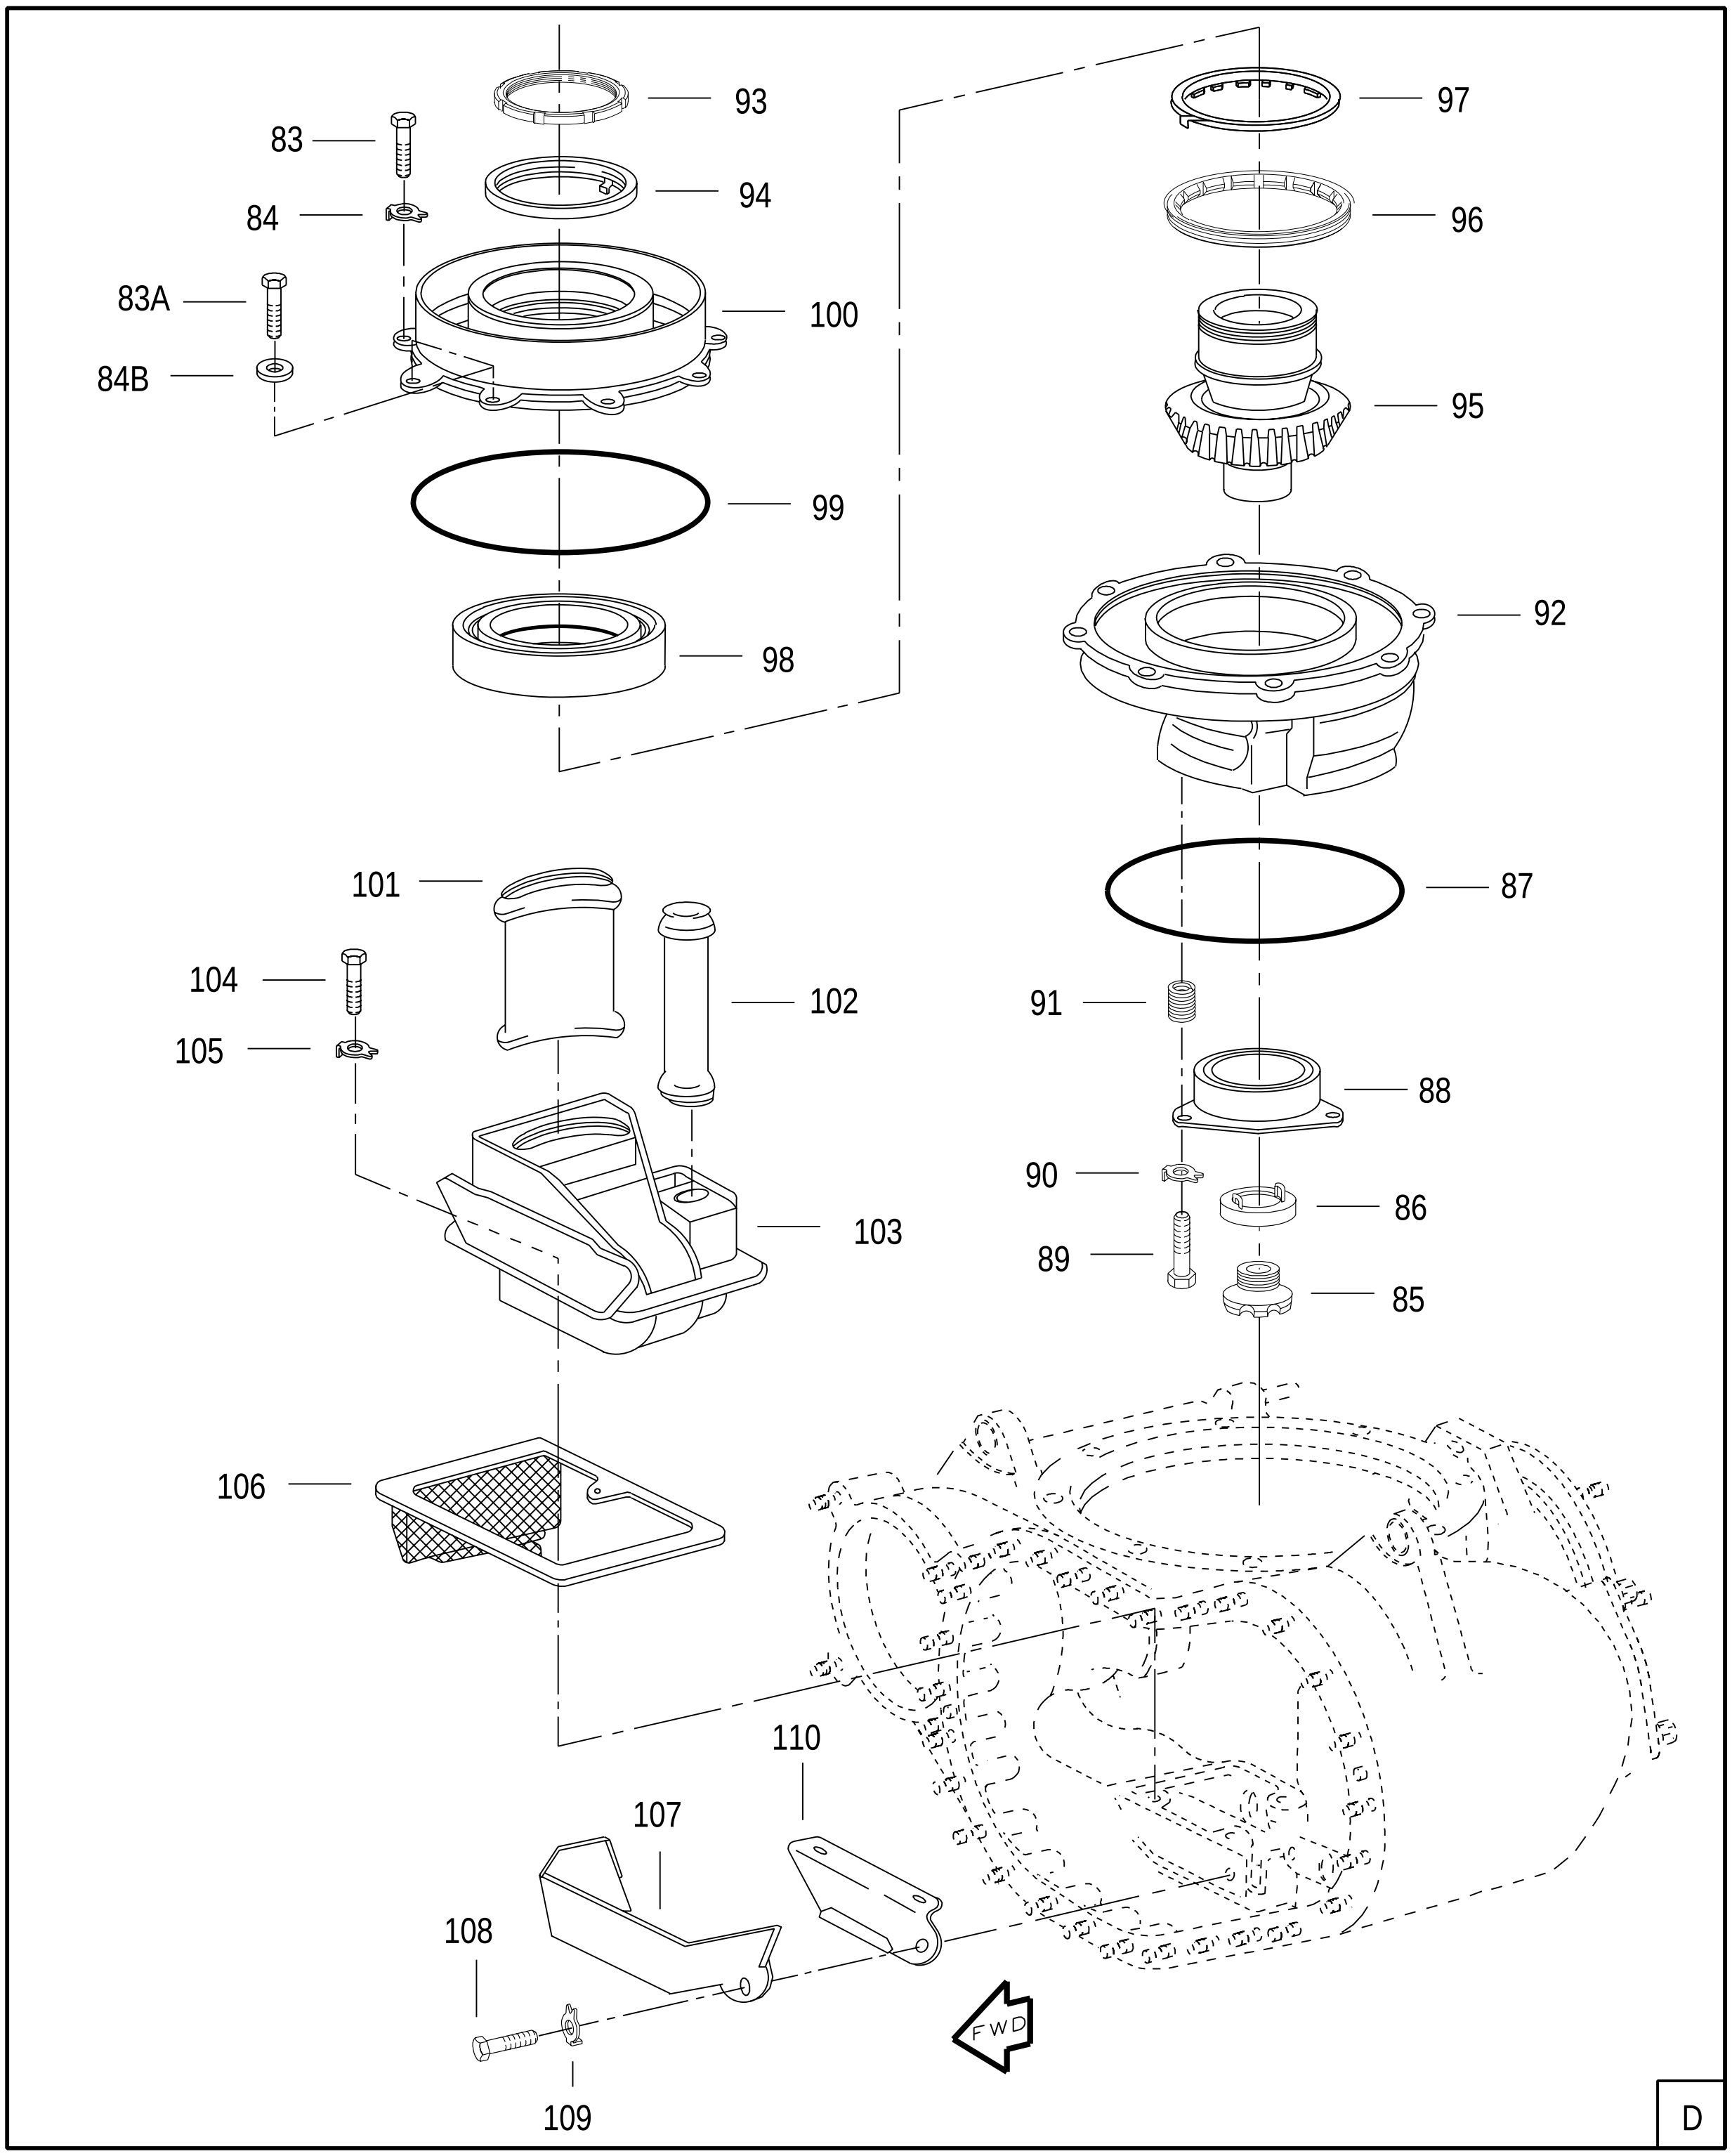


FIGURE 60. MAIN GEARBOX ASSY
(SHEET 4 OF 5)

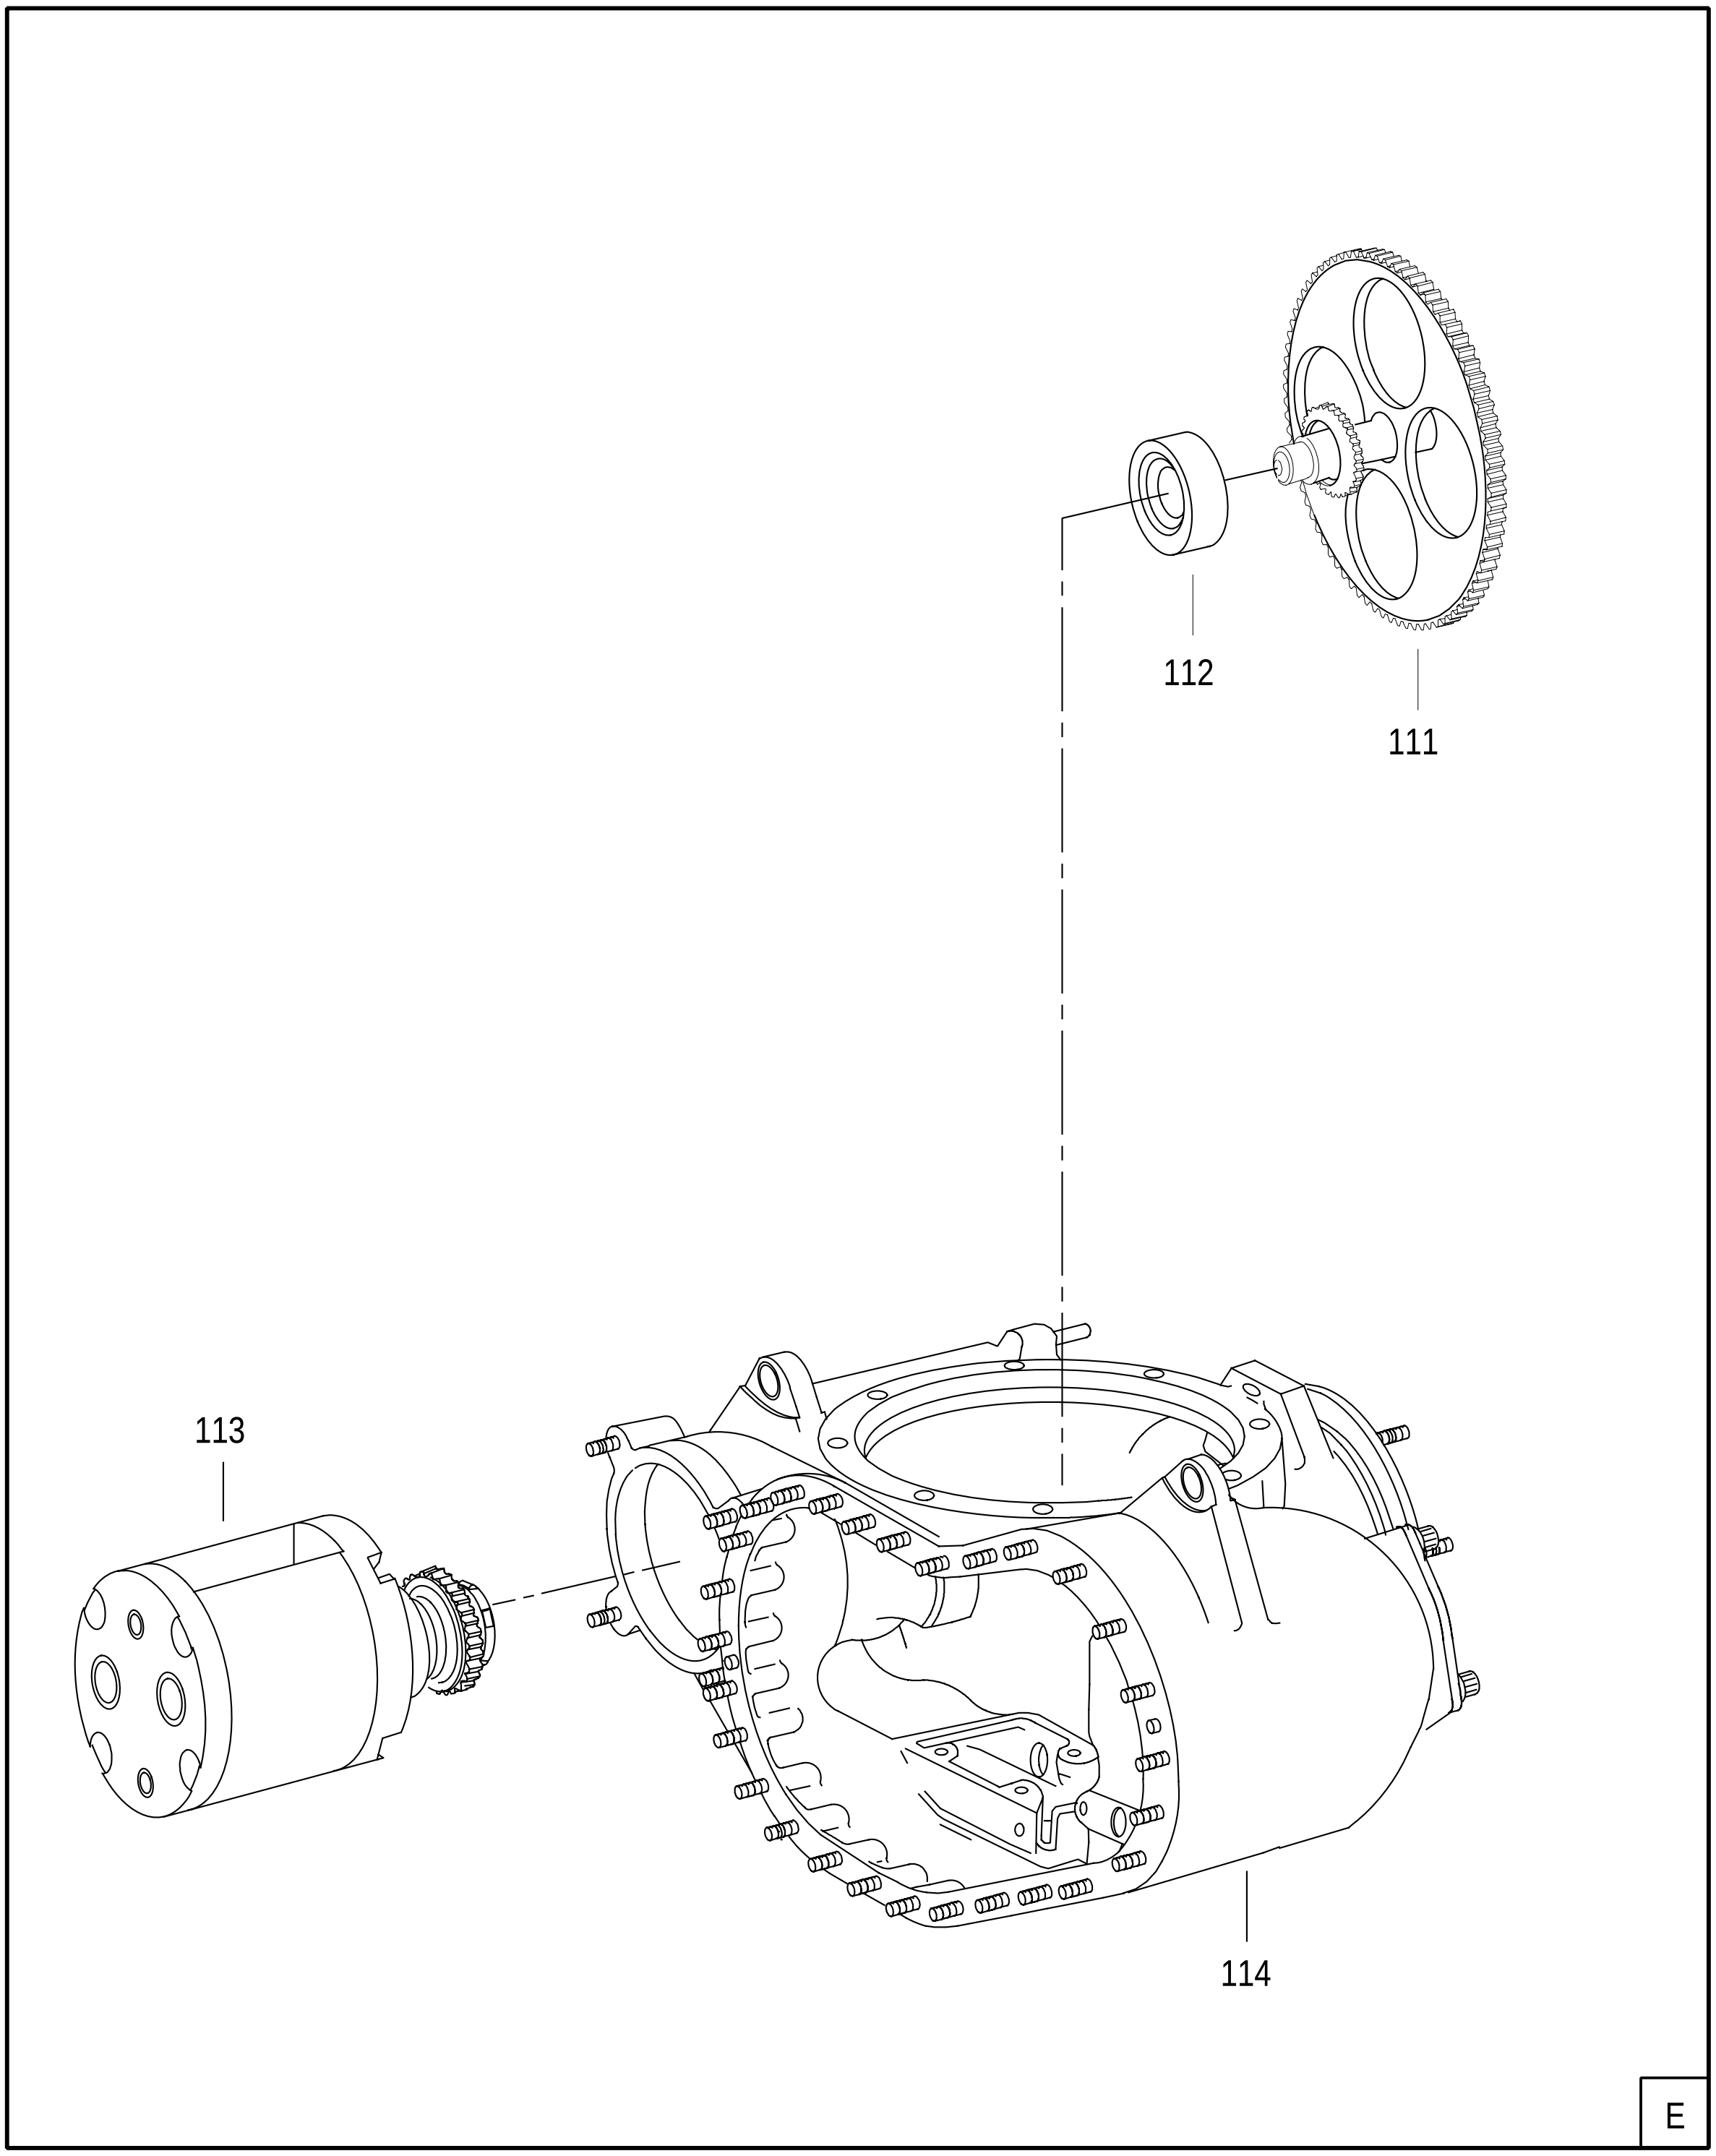


FIGURE 60. MAIN GEARBOX ASSY
(SHEET 5 OF 5)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
60	4084020	52661	GEARBOX ASSY-MAIN .... SEE FIG. 58-87 FOR NHA	1		ADF
	4084021	52661	GEARBOX ASSY-MAIN .... DO NOT PROCURE FROM P&W SEE FIG. 58-87 FOR NHA	1		ADF
	4084022	52661	GEARBOX ASSY-MAIN .... DO NOT PROCURE FROM P&W SEE FIG. 58-87 FOR NHA	1		ADF
R R	4085170	52661	GEARBOX ASSY-MAIN .... SEE FIG. 58-87 FOR NHA	1		ADF
- 1	4057336	52661	. BOLT-FLUID PASSAGE .... 0.375-24UNJF-3A X 0.4375-20UNJF-3A X 1.719 IN. LONG	1		PAOZZ
- 2	ST1050-011	52661	. PACKING-PREFORMED .... 0.301 ID X 0.070 IN. DIA	1		PAOZZ
- 3	1B2368	97484	. DETECTOR-METAL CHIP, OIL SUMP .... P&W PART NO. 4076098 PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 4	M83248/1-012	81349	.. PACKING	2		PAFZZ
- 5	ST1001-10	52661	. PACKING-PREFORMED .... 0.755 ID X 0.097 IN. DIA	1		PAOZZ
- 6	DELETED					
- 7	DELETED					
- 8	DELETED					
- 9	DELETED					
- 10	DELETED					
- 11	DELETED					
- 12	DELETED					
- 13	DELETED					
- 14	DELETED					
- 15	4023116	52661	. NUT OPTION .... SEE OPTION TABLE	3		PAOZZ
- 16	DELETED					
- 16A	4057335	52661	. HOUSING-GEARBOX BEARING....................	1		PADZZ
- 16B	ST1000-024	52661	. PACKING-PREFORMED .... 1.114 ID X 0.070 IN. DIA	1		PADZZ
- 16C	4032007	52661	. BEARING OPTION .... SEE OPTION TABLE	1		PADZZ
- 17	DELETED					
- 18	ST1051-04	52661	. PACKING-PREFORMED, BOSS .... 0.351 ID X 0.072 IN. DIA	1		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
60 - 19	PRE-420-CJ	80756	. RING-RETAINING, SPIRAL .... 4.174 HOUSING DIA X 0.312 X 0.111 IN. THK P&WA PART NO. 4033408	1		PAOZZ
- 20	4002737	52661	. COVER-PACKING, GEARBOX	1		PAOBZ
- 21	ST1000-154	52661	. PACKING-PREFORMED .... 3.737 ID X 0.103 IN. DIA	2		PAOZZ
- 22	4002707	52661	. RETAINER-OIL SEAL, GEARBOX	1		PAOZZ
- 23	4047343	52661	. SEAL OPTION................................... SEE OPTION TABLE	1		PAOZZ
- 24	PRD-437-CJ	80756	. RING-RETAINING, SPIRAL .... 4.339 HOUSING DIA X 0.312 X 0.111 IN. THK P&WA PART NO. 4033409	1		PAOZZ
- 25	4002716	52661	. RETAINER-OIL SEAL, GEARBOX	1		PAOZZ
- 26	ST1000-154	52661	. PACKING-PREFORMED .... 3.737 ID X 0.103 IN. DIA	1		PAOZZ
- 27	4047344	52661	. SEAL OPTION................................... SEE OPTION TABLE WHEN EXH USE 4048929	1		PAOZZ
	4048929	52661	. SEAL OPTION................................... SEE OPTION TABLE	1		PAOZZ
- 28	4003624	52661	. NUT-PLAIN, ROUND .... 2.157-18UNJS-3B X 0.300 IN. THK	1		PADZZ
- 29	2147887	52661	. WASHER-KEY .... 2.220 ID X 2.660 OD X 0.031 IN. THK	1		PADZZ
- 30	4002720	52661	. NUT-BEARING RETAINING, INTERNALLY .... THREADED 1.375-18UNJEF-3B X 0.250 IN. THK	1		PADZZ
- 31	4027238	52661	. WASHER-KEY .... 1.450 ID X 1.850 OD X 0.043 IN. THK	1		PADZZ
- 32	4032003	52661	. BEARING OPTION .... SEE OPTION TABLE	1		PADZZ
- 33	MS9519-06	96906	. BOLT (AP)	3		PADZZ
- 34	171752	52661	. WASHER-KEY .... 0.255 ID X 0.031 IN. THK (AP)	3		PAOZZ
	4068639	52661	. HOUSING-ASSY OF, GEARBOX, FRONT	1		PADLD
- 35	4023116	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	26		PAOZZ
- 36	MS9321-10	96906	. WASHER (AP)...................................	26		PAOZZ
- 37	MS124735	96906	.. INSERT	6		PADZZ
- 38	MS124696	96906	.. INSERT	3		PADZZ
- 39	MS124736	96906	.. INSERT	6		PAFZZ
- 40	4068638	52661	.. HOUSING-GEARBOX, FRONT	1		XA
- 41	4002729	52661	. GASKET-GEARBOX	1		PADZZ
- 42	4032004	52661	. BEARING OPTION .... SEE OPTION TABLE	1		PADZZ
- 43	MS9519-08	96906	. BOLT (AP)	3		PADZZ
- 44	171752	52661	. WASHER-KEY .... 0.255 ID X 0.031 IN. THK (AP)	3		PAOZZ
- 45	402004	52661	. RIVET-TUBULAR, UNIVERSAL HD .... 0.094 DIA X 0.340 IN. LONG	1		PADZZ
- 46	4002725	52661	. NUT-PLAIN, ROUND .... 0.9375-20UNJEF-3B X 0.250 IN. THK	1		PADZZ
- 47	4002724	52661	. GEAR-SPUR, GEARBOX, 53 TEETH	1		PADLD
- 48	4032002	52661	. BEARING OPTION .... SEE OPTION TABLE	1		PADZZ
R - 49	BRA-185	80756	. RING-RETAINING, SPIRAL .... 1.962 HOUSING DIA X 0.158 X 0.062 IN. THK P&WA PART NO. 4033406	1		PADZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
60 - 50	4053557	52661	. SHAFT-GEARBOX IDLER GEAR	1		PADLD
- 51	4053556	52661	. BOLT-MACHINE, DRILLED HD 0.250-28UNJF-3A X 0.812 IN. LONG (AP)	3		PADZZ
- 52	4002706	52661	. GEAR-SPUR, GEARBOX	1		PADLD
- 53	4061622	52661	. NUT-PLAIN, ROUND 1.5625-18UNJEF-3B X 0.290 IN. THK	1		PADZZ
- 54	4062030	52661	. WASHER-KEY 1.620 ID X 1.905 OD X 0.031 IN. THK	1		PADZZ
- 55	MS9519-10	96906	. BOLT	1		PADZZ
- 56	MS9519-13	96906	. BOLT	2		PAFZZ
- 57	171752	52661	. WASHER-KEY 0.255 ID X 0.031 IN. THK	3		PAOZZ
- 58	4065137	52661	. NOZZLE-OIL, GEAR PUMP	1		PADZZ
- 59	4065139	52661	. NOZZLE-OIL, GEAR PUMP	1		PADZZ
- 60	AS3209-008	81343	. PACKING	2		PADZZ
- 61	4065138	52661	. PLATE-RETAINING, GEARBOX BEARING	1		PADZZ
- 62	4054537	52661	. BEARING OPTION SEE OPTION TABLE	1	AC	PADZZ
	4080062-01	52661	. BEARING-BALL, ANNULAR 40X68X30	1	AD	PADZZ
- 63	4046420	52661	. TUBE-TRANSFER, PACKING 0.115 ID X 0.768 IN. LONG	1		PADZZ
- 64	ST1050-009	52661	. PACKING-PREFORMED 0.208 ID X 0.070 IN. DIA ROUND	1		PADZZ
- 65	ST1050-011	52661	. PACKING-PREFORMED 0.301 ID X 0.070 IN. DIA	1		PAOZZ
	4064854	52661	. PLATE ASSEMBLY-RETAINING, GEARBOX BEARING	1		PADBZ
- 66	642107	52661	.. PIN-STRAIGHT, HEADLESS 0.0625 OD X 0.250 IN. LONG	1		PADZZ
- 67	4064002	52661	.. PLATE-RETAINING, GEARBOX BEARING	1		XA
- 68	4067176	52661	. GEARSHAFT-ASSY OF, BEVEL, SPUR, GEARBOX DRIVE, 47 AND 32 TEETH	1		PADLD
- 69	4057337	52661	. TUBE-TRANSFER, PACKING, GEARBOX BEARING	1		PADZZ
- 70	ST1050-008	52661	. PACKING-PREFORMED 0.176 ID X 0.070 IN. DIA ROUND	2		PADZZ
- 71	4002718	52661	. GEAR-SPUR, GEARBOX, 48 TEETH	1		PADLD
- 72	4002719	52661	. IMPELLER-GEARBOX DEAERATOR	1		PADDD
- 73	4002720	52661	. NUT-BEARING RETAINING, INTERNALLY THREADED 1.375-18UNJEF-3B X 0.250 IN. THK	1		PADZZ
- 74	4027238	52661	. WASHER-KEY 1.450 ID X 1.850 OD X 0.043 IN. THK	1		PADZZ
- 75	4032006	52661	. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
- 76	MS9519-08	96906	. BOLT (AP)	3		PADZZ
- 77	171752	52661	. WASHER-KEY 0.255 ID X 0.031 IN. THK (AP)	3		PAOZZ
- 78	4038802	52661	. SHAFT-GEARBOX DEAERATOR IMPELLER	1		PADLD
- 79	4057397	52661	. NOZZLE-GEARBOX BEARING	1		PADZZ
- 80	2147967	52661	. SCREW-MACHINE, HEX 0.190-32UNJF-3A X 0.375 IN. LONG (AP)	2		PADZZ
- 81	4014749	52661	. WASHER-KEY 0.2025 ID X 0.020 IN. THK (AP)	2		PAOZZ
- 82	ST1000-111	52661	. PACKING-PREFORMED 0.424 ID X 0.103 IN. DIA	1		PADZZ
- 83	MS9519-13	96906	. BOLT	6		PAFZZ
- 83A	MS9530-13	96906	. BOLT	2		PAFZZ
- 84	171752	52661	. WASHER-KEY 0.255 ID X 0.031 IN. THK	6		PAOZZ

	FIGURE & INDEX NUMBER	PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	60 - 84A	DELETED			...			
	- 84B	MS9549-10		96906	. WASHER	2		PADZZ
	- 85	4002712		52661	. NUT-BEARING RETAINING, EXTERNALLY THREADED 1.000-20UNJEF-3A X 0.625 IN. THK	1		PADZZ
	- 86	4002713		52661	. WASHER-KEY 1.150 ID X 1.735 OD X 0.031 IN. THK	1		PADZZ
	- 87	ST1000-164		52661	. PACKING-PREFORMED 6.237 ID X 0.103 IN. DIA	1		PADZZ
	- 88	4032005		52661	. BEARING OPTION SEE OPTION TABLE	1		PADZZ
	- 89	MS9519-08		96906	. BOLT (AP)	3		PADZZ
	- 90	171752		52661	. WASHER-KEY 0.255 ID X 0.031 IN. THK (AP)	3		PAOZZ
		4047095		52661	. COVER ASSY-GEARBOX, UPPER	1		PADLD
	- 91	MS124736		96906	.. INSERT	3		PAFZZ
	- 92	4047096		52661	.. COVER-GEARBOX, UPPER	1		XA
	- 93	4063571		52661	. NUT-BEARING RETAINING, INTERNALLY THREADED 2.500-16UNJ-3B X 0.250 IN. THK	1		PADZZ
	- 94	4022340		52661	. WASHER-KEY 2.540 ID X 2.890 OD X 0.031 IN. THK	1		PADZZ
	- 95	4025256		52661	. GEARSHAFT-BEVEL, GEARBOX, 28 TEETH	1		PADLD
	- 96	4002711		52661	. NUT-INVERTED, SPANNER 4.000-20UNJS-3A X 0.235 IN. THK	1		PADZZ
	- 97	4002710		52661	. WASHER-KEY 3.600 ID X 0.031 IN. THK	1		PADZZ
	- 98	4039976		52661	. BEARING OPTION SEE OPTION TABLE REPLACED BY 4081473	1		PADZZ
		4081473		52661	. BEARING OPTION SEE OPTION TABLE REPLACES 4039976	1		PADZZ
	- 99	ST1000-163		52661	. PACKING-PREFORMED 5.987 ID X 0.103 IN. DIA	1		PAFZZ
	- 100	4070028		52661	. SLEEVE-SEALING, GEARBOX	1		PADLD
	- 101	4023577		52661	. TUBE-SCAVENGE, GEARBOX	1		PADZZ
	- 102	4023576		52661	. TUBE-SCAVENGE, GEARBOX	1		PADZZ
	- 103	4068434		52661	. COVER-GEARBOX SUMP, ASSY OF	1		PADLD
	- 104	2147967		52661	. SCREW-MACHINE, HEX 0.190-32UNJF-3A X 0.375 IN. LONG (AP)	3		PADZZ
	- 105	4014749		52661	. WASHER-KEY 0.2025 ID X 0.020 IN. THK (AP)	3		PAOZZ
	- 106	4058696		52661	. SCREEN-PROTECTIVE, GEARBOX SUMP COVER, ASSY OF	1		PADLD
	- 107	4068474		52661	. BAFFLE-GEARBOX, ASSY OF	1		PADBZ
	- 108	2147967		52661	. SCREW-MACHINE, HEX 0.190-32UNJF-3A X 0.375 IN. LONG (AP)	1		PADZZ
	- 109	4014749		52661	. WASHER-KEY 0.2025 ID X 0.020 IN. THK (AP)	1		PAOZZ
	- 110	4068423		52661	. BAFFLE-GEARBOX HOUSING	1		PADBZ
	- 111	4017949		52661	. GEARSHAFT-SPUR, GEARBOX, 23 AND 99 TEETH	1		PADLD
	- 112	4061214		52661	. BEARING OPTION SEE OPTION TABLE	1		PADZZ
	- 113	4047890	#	52661	. PUMP ASSY-SCAVENGE, NO. 2 AND 3 BEARING	1		PAFLD
	- 114	4070990		52661	. HOUSING ASSY-GEARBOX SEE FIG. 61 FOR DETAIL PARTS	1		PADDD

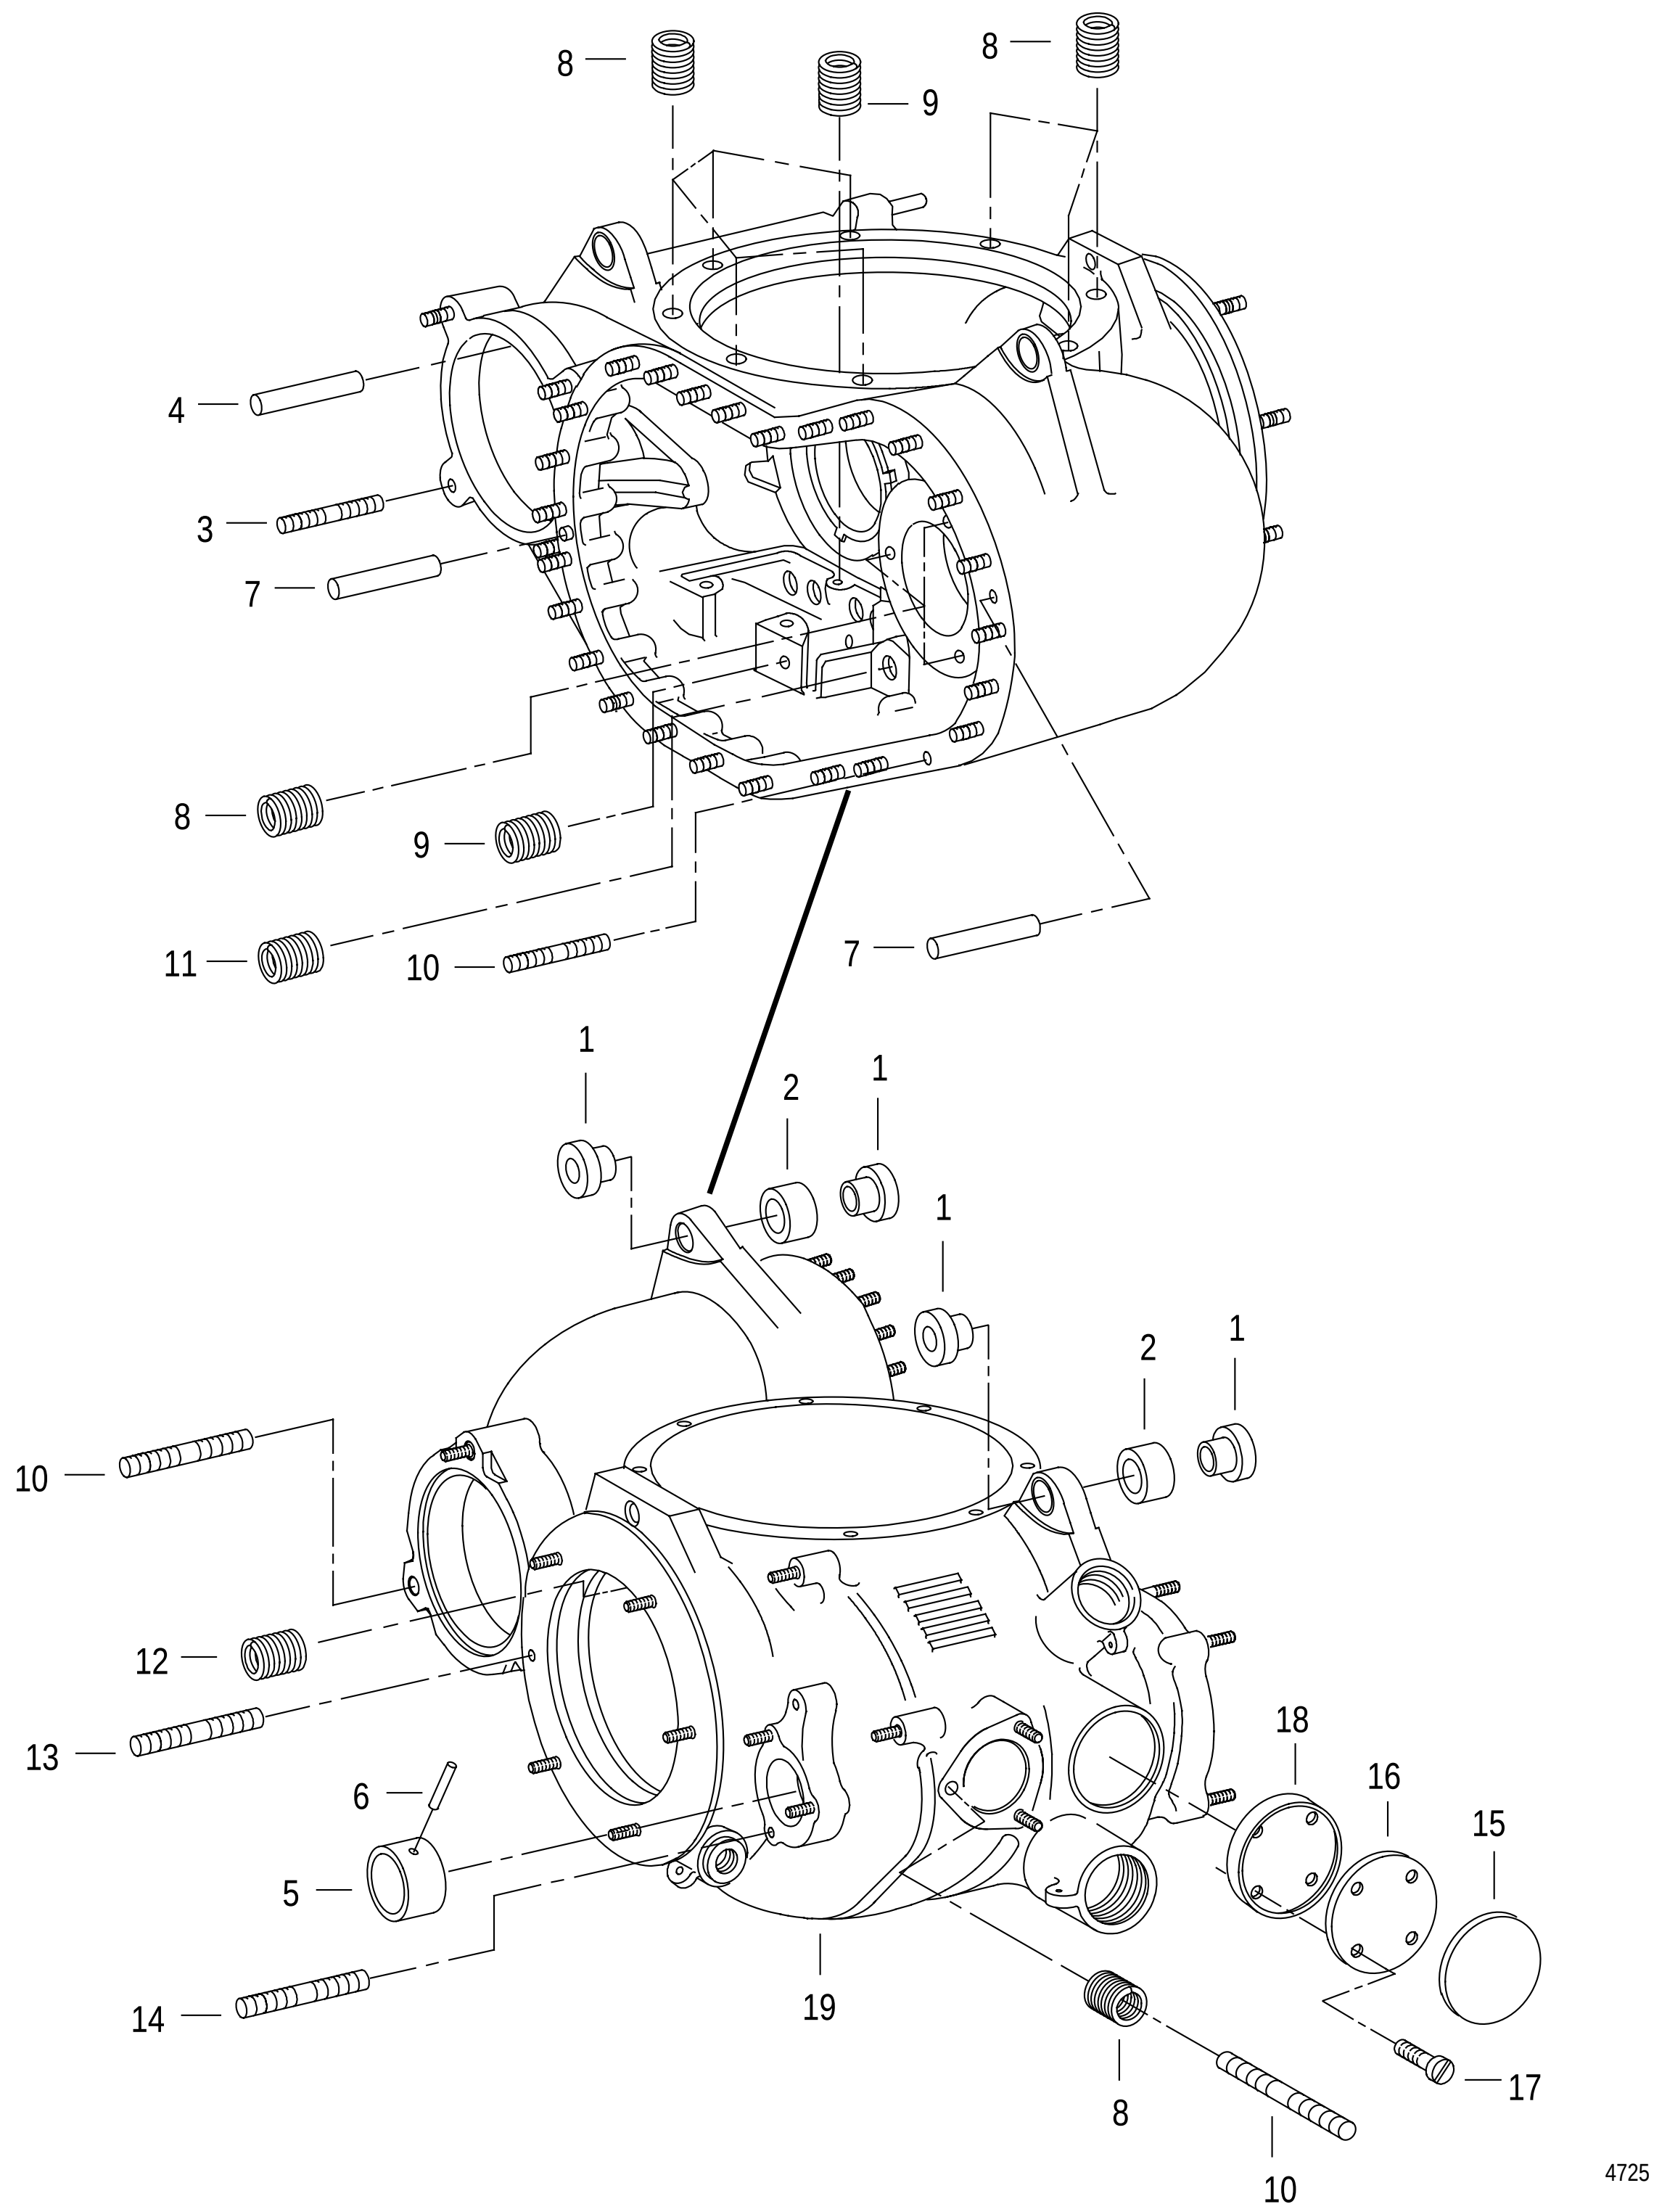


FIGURE 61. GEARBOX HOUSING ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
61	4070990	52661	HOUSING ASSY-GEARBOX . . . . SEE FIG. 60-114 FOR NHA	1		PADDD
- 1	4065369	52661	. BUSHING-SLEEVE, FLANGED . . . . 0.3753 ID X 0.225 IN. LONG	4		PADZZ
- 2	4065366	52661	. BUSHING-SLEEVE, FLANGED . . . . 0.6195 ID X 0.6785 OD X 0.4925 IN. LONG	2		PADZZ
- 3	% 4020057	52661	. STUD-PLAIN . . . . 0.250-20NS-28UNJF-3A X 1.538 IN. LONG	4		PAFZZ
	4020057P3	52661	. STUD . . . . 0.003 IN. OVERSIZE	AR		PAFZZ
	4020057P6	52661	. STUD . . . . 0.006 IN. OVERSIZE	AR		PAFZZ
	4020057P9	52661	. STUD . . . . 0.009 IN. OVERSIZE	AR		PAFZZ
	4020057P12	52661	. STUD . . . . 0.012 IN. OVERSIZE	AR		PAFZZ
- 4	MS9390-300	96906	. PIN	1		PADZZ
- 5	4003695	52661	. BUSHING-SLEEVE, GEARBOX HOUSING	1		PADZZ
- 6	MS9486-02	96906	. PIN	1		PADZZ
- 7	MS9390-420	96906	. PIN	2		PADZZ
- 8	MS124736	96906	. INSERT	14		PAFZZ
- 9	MS124695	96906	. INSERT	6		PADZZ
- 10	% 4020056	52661	. STUD-PLAIN . . . . 0.250-20NS-28UNJF-3A X 1.438 IN. LONG	32		PAFZZ
	4020056P3	52661	. STUD . . . . 0.003 IN. OVERSIZE	AR		PAFZZ
	4020056P6	52661	. STUD . . . . 0.006 IN. OVERSIZE	AR		PAFZZ
	4020056P9	52661	. STUD . . . . 0.009 IN. OVERSIZE	AR		PAFZZ
	4020056P12	52661	. STUD . . . . 0.012 IN. OVERSIZE	AR		PAFZZ
- 11	MS124658	96906	. INSERT	1		PADZZ
- 12	714099	52661	. INSERT-SCREW THREAD, SELF-LOCKING . . . . 0.250-28 X 11.375 COILS	3		PAFZZ
- 13	% 4020052	52661	. STUD-PLAIN . . . . 0.375-16NS-24UNJF-3A X 1.925 IN. LONG	6		PAFZZ
	4020052P3	52661	. STUD . . . . 0.003 IN. OVERSIZE	AR		PAFZZ
	4020052P6	52661	. STUD . . . . 0.006 IN. OVERSIZE	AR		PAFZZ
	4020052P9	52661	. STUD . . . . 0.009 IN. OVERSIZE	AR		PAFZZ
	4020052P12	52661	. STUD . . . . 0.012 IN. OVERSIZE	AR		PAFZZ
- 14	% 4026685	52661	. STUD-PLAIN . . . . 0.250-20NS-28UNJF-3A X 1.195 IN. LONG	3		PAFZZ
	4026685P3	52661	. STUD . . . . 0.003 IN. OVERSIZE	AR		PAFZZ
	4026685P6	52661	. STUD . . . . 0.006 IN. OVERSIZE	AR		PAFZZ
	4026685P9	52661	. STUD . . . . 0.009 IN. OVERSIZE	AR		PAFZZ
	4026685P12	52661	. STUD . . . . 0.012 IN. OVERSIZE	AR		PAFZZ
- 15	806144 *	52661	. PLATE-IDENTIFICATION, COMPANY NAME	1		MFF
- 16	156010	52661	. SPACER-IDENTIFICATION PLATE	1		PADZZ
- 17	4003694	52661	. SCREW-MACHINE, FLAT . . . . 0.164-32UNJC-3A X 0.312 IN. LONG (AP)	4		PADZZ
- 18	806145	52661	. FRAME-IDENTIFICATION PLATE	1		XA
- 19	4070121	52661	. HOUSING-GEARBOX	1		XA

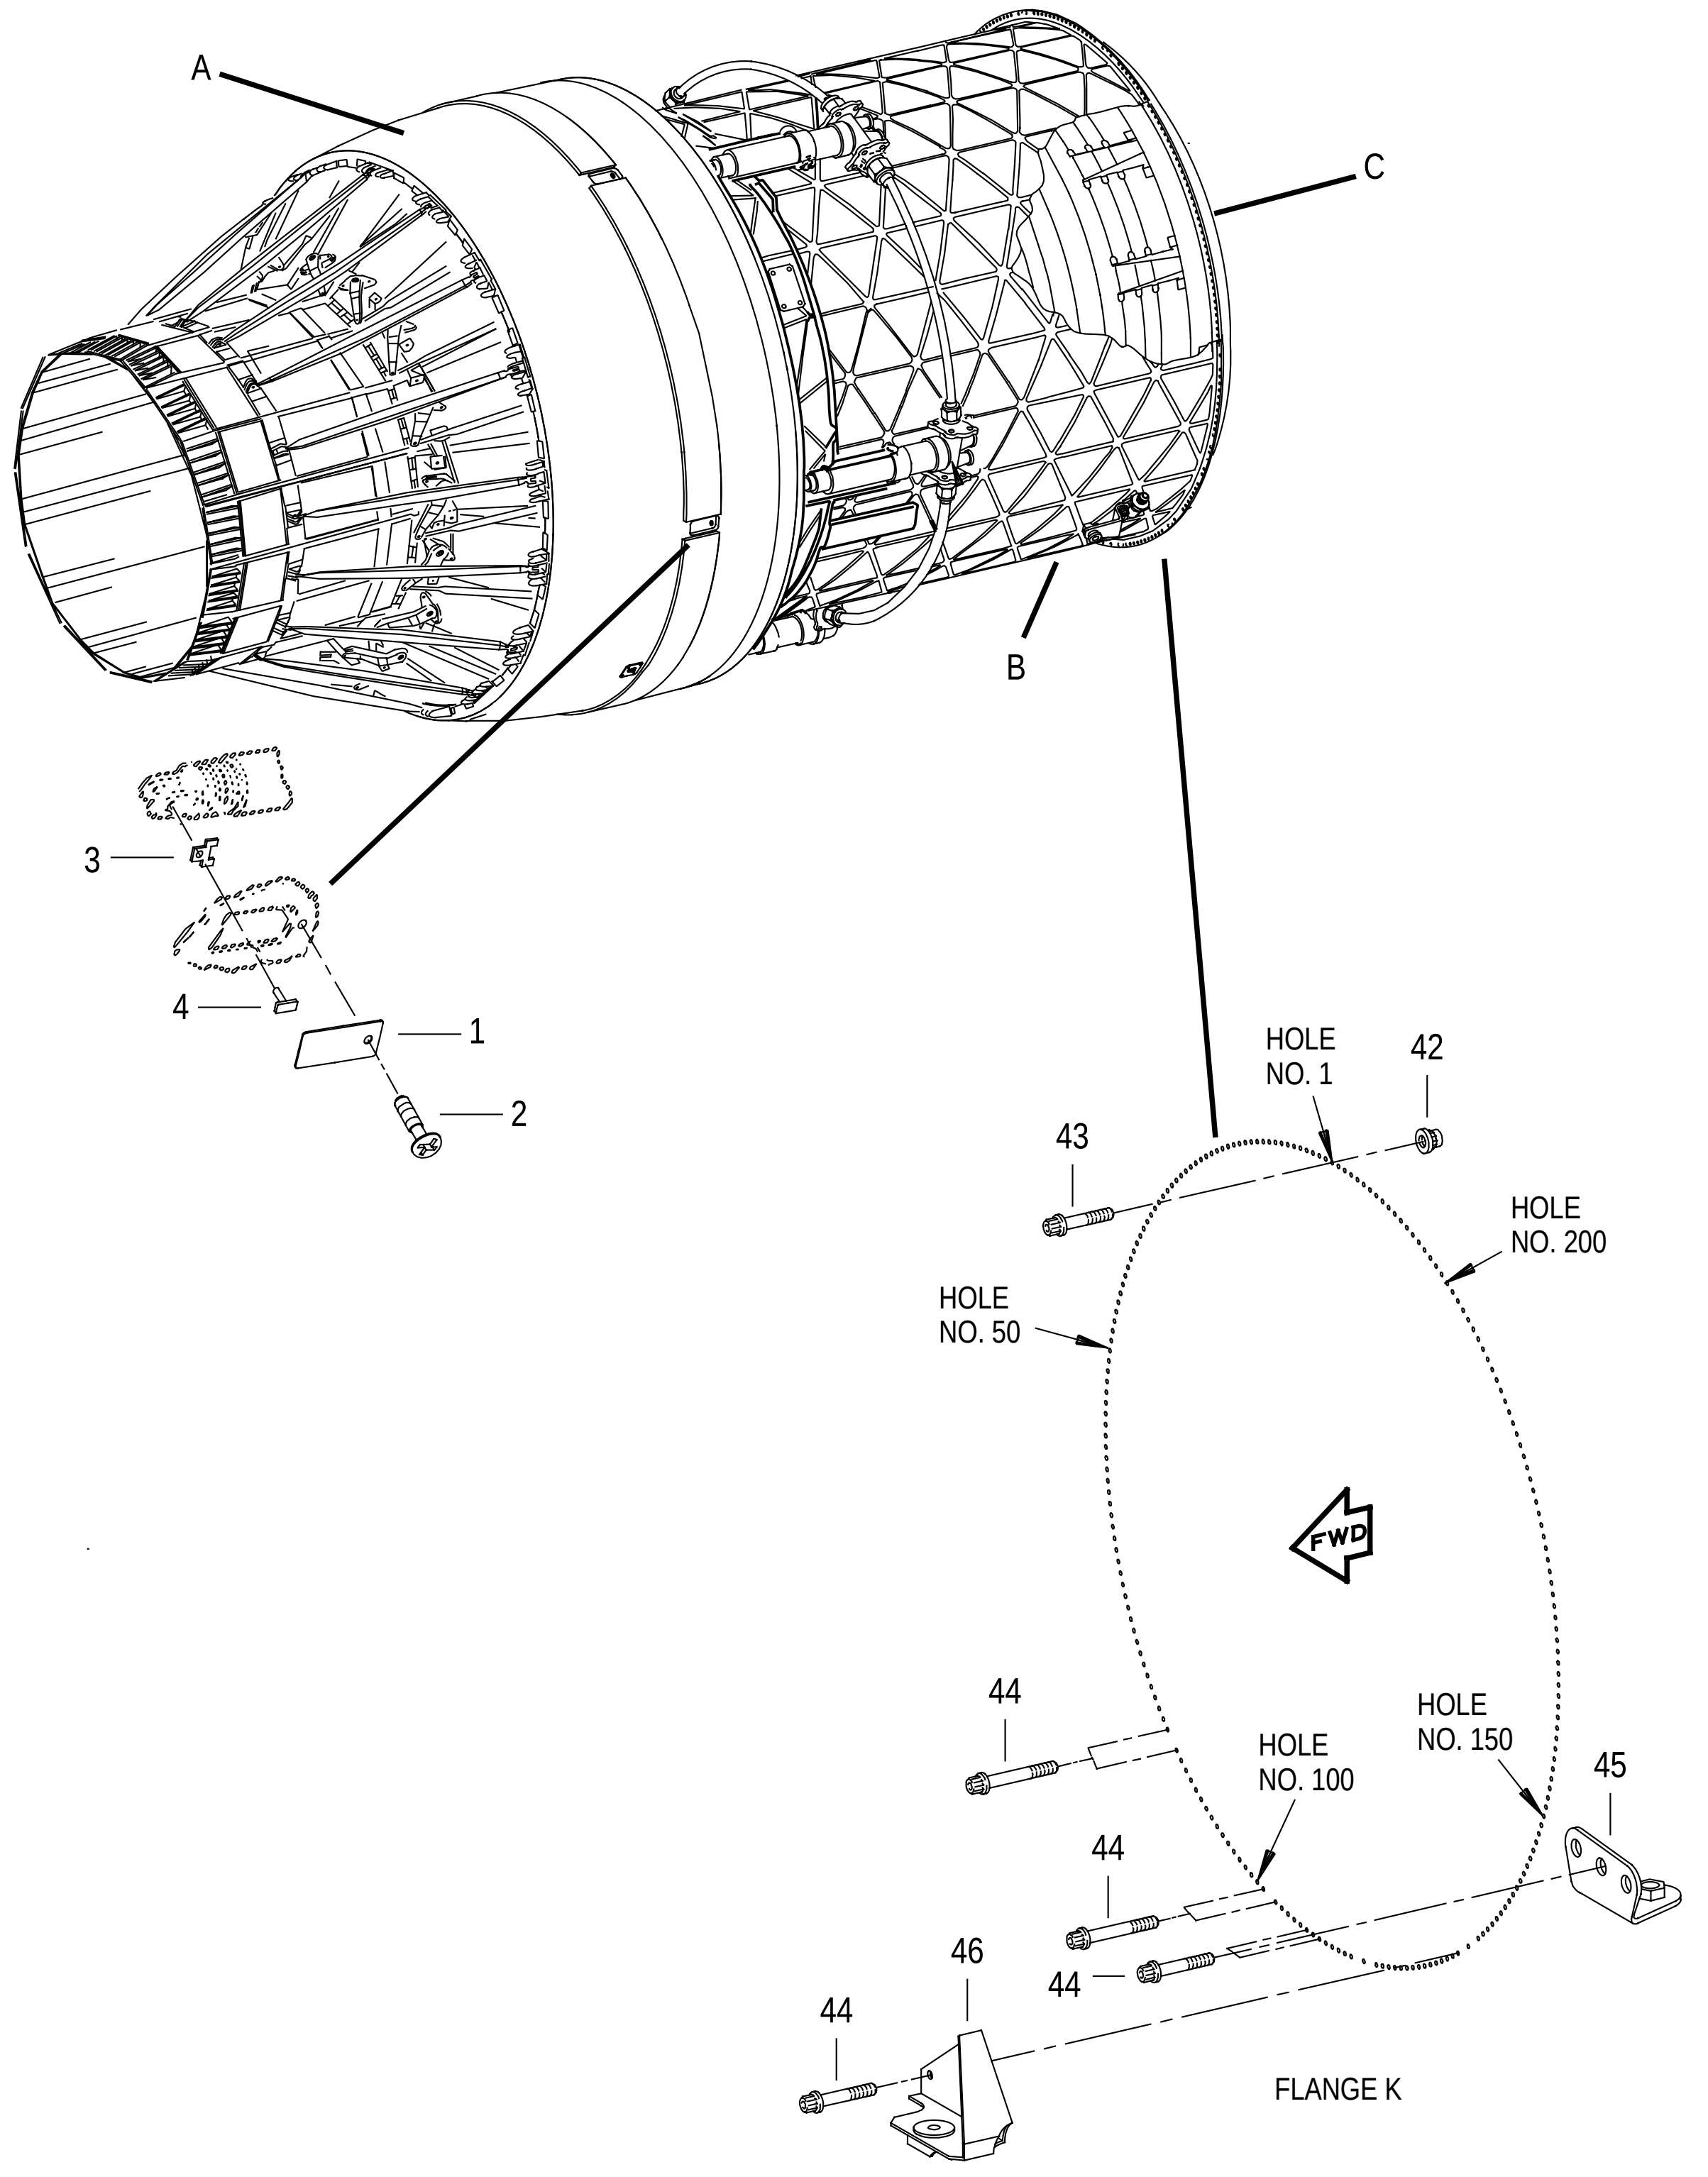


FIGURE 62. AUGMENTOR DUCT AND NOZZLE MODULE
(SHEET 1 OF 4)

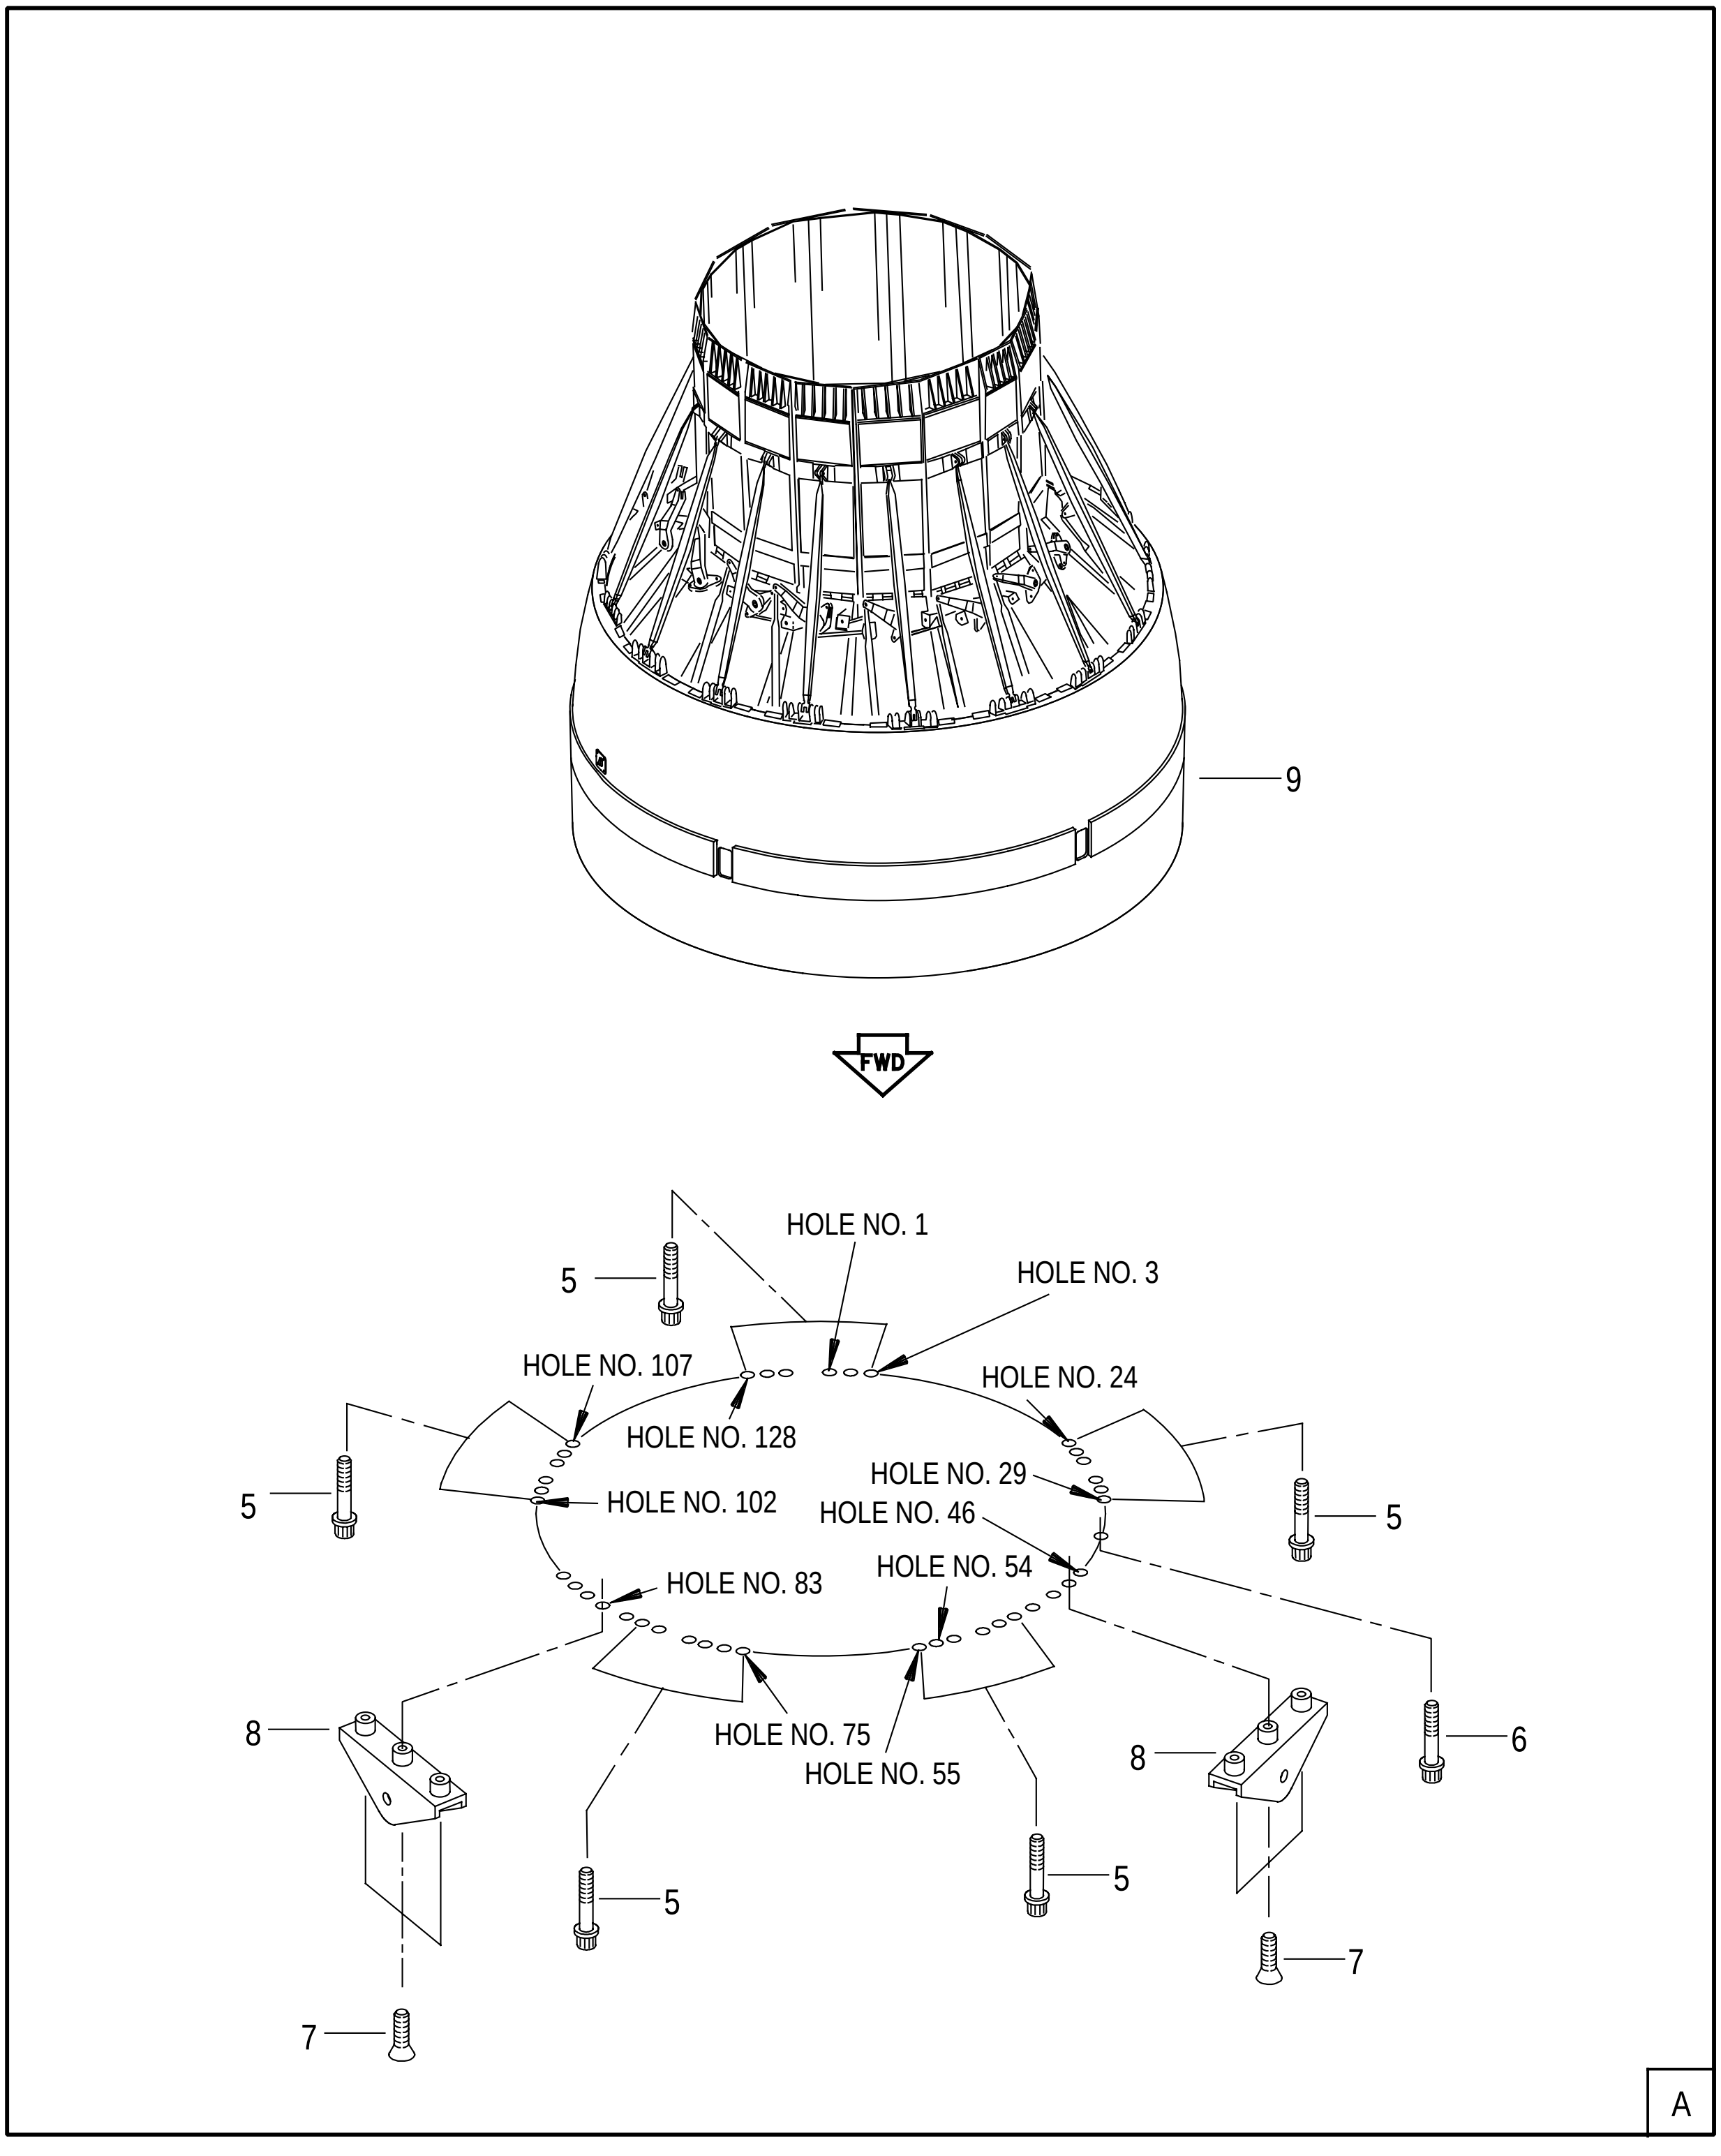


FIGURE 62. AUGMENTOR DUCT AND NOZZLE MODULE
(SHEET 2 OF 4)

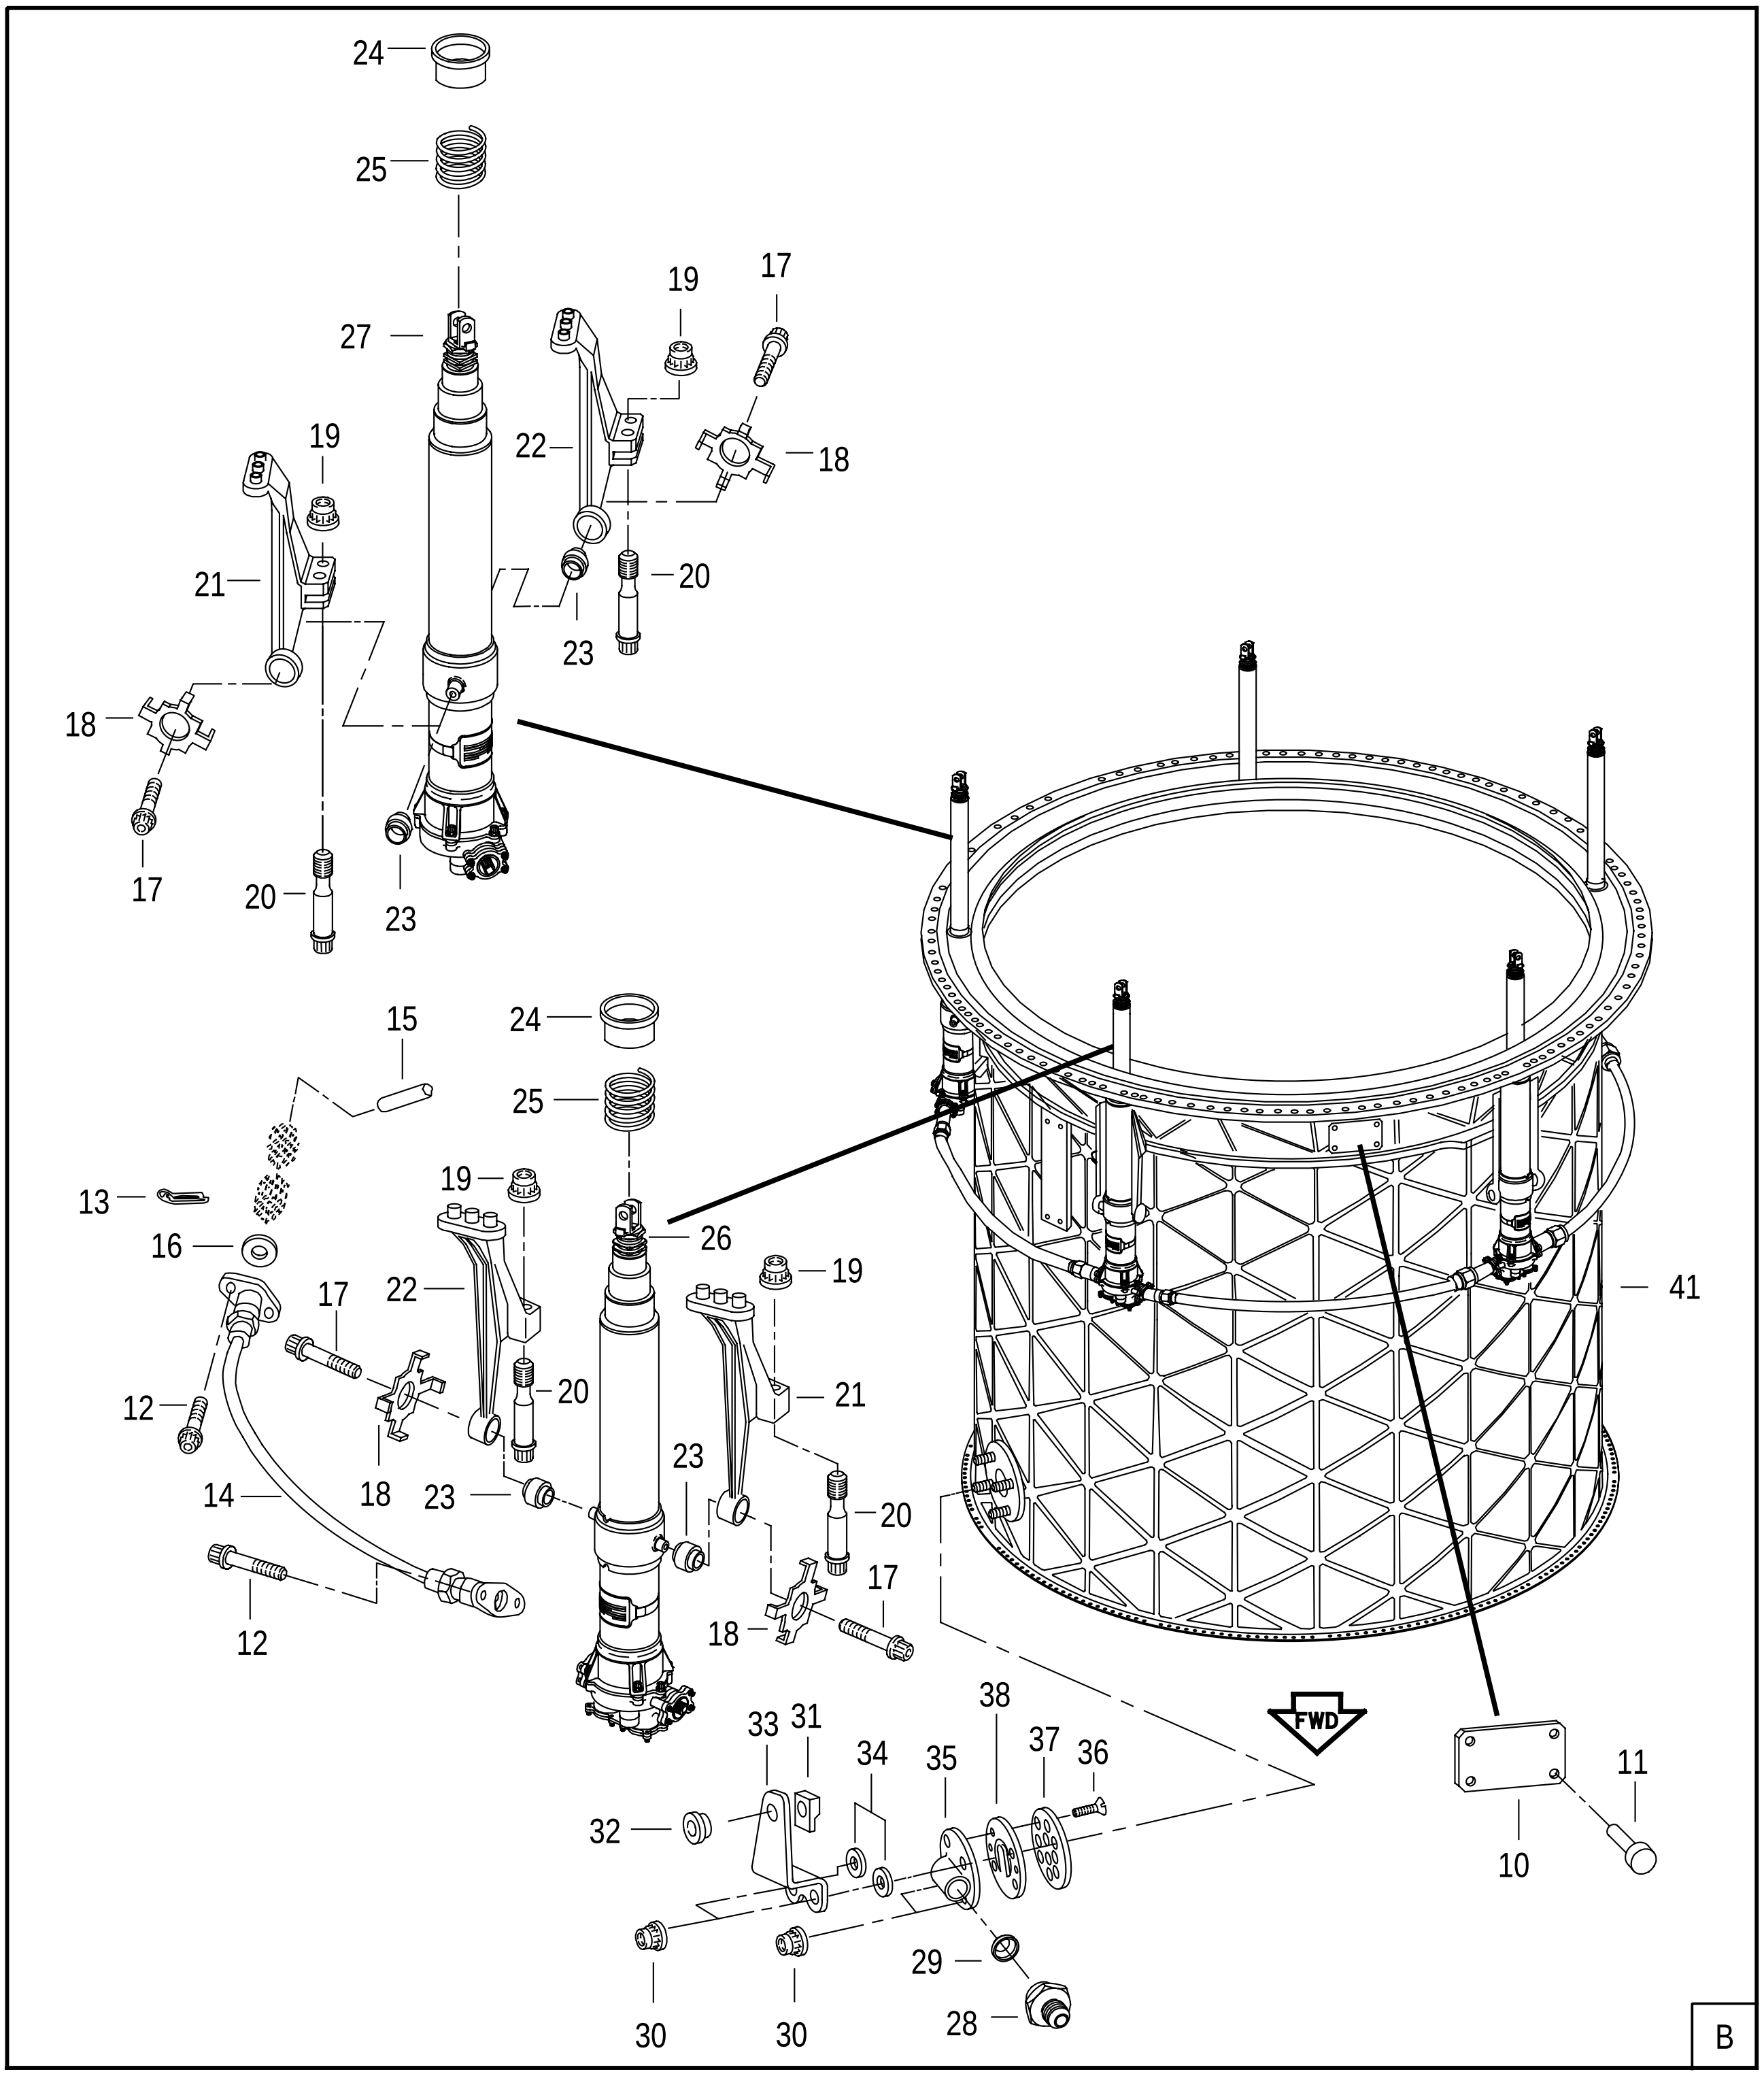


FIGURE 62. AUGMENTOR DUCT AND NOZZLE MODULE
(SHEET 3 OF 4)

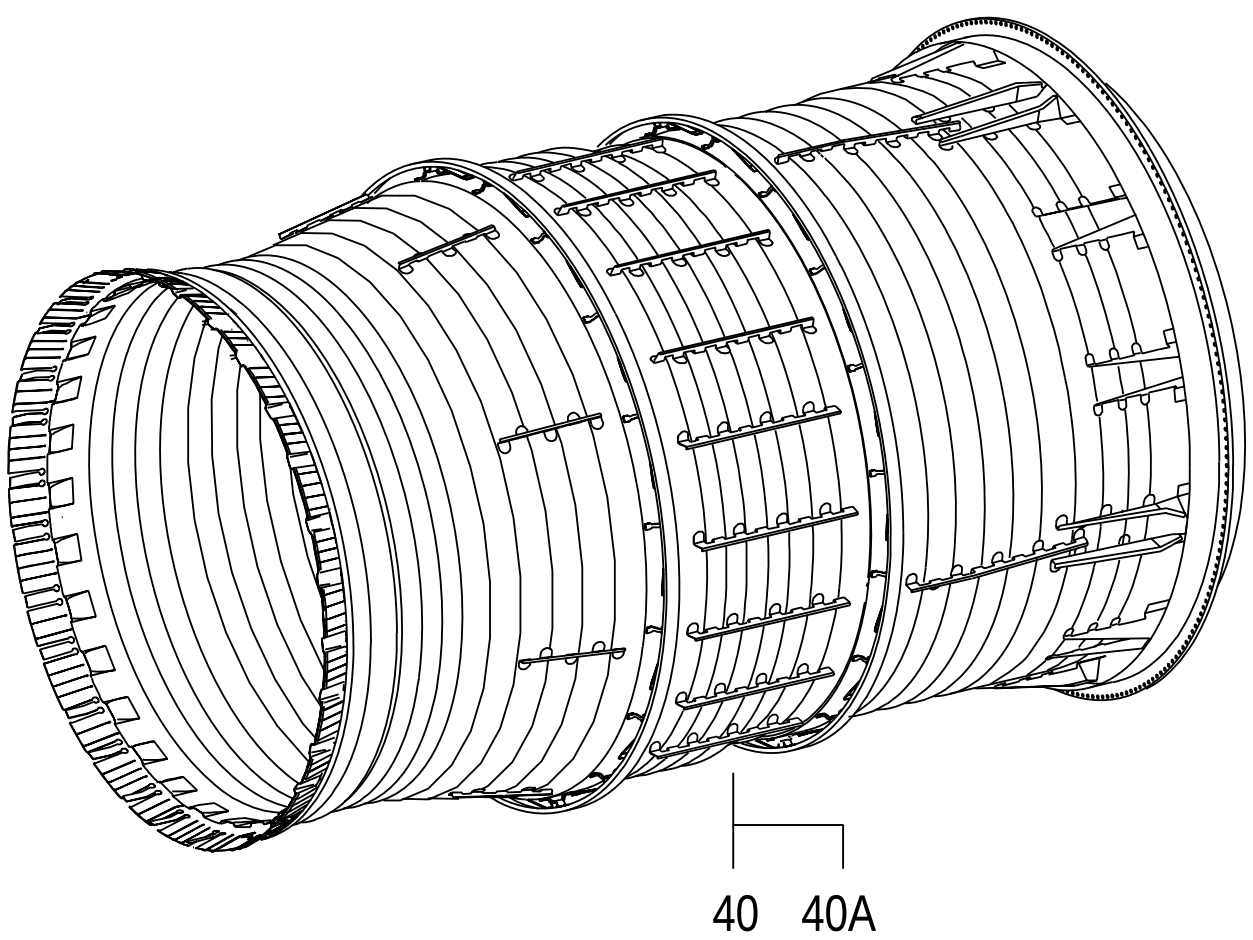


FIGURE 62. AUGMENTOR DUCT AND NOZZLE MODULE
(SHEET 4 OF 4)

	FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	62		4068724-800		52661	AUGMENTOR DUCT AND NOZZLE MODULE .... SEE FIG. 1-11 FOR NHA	1	A/WK	PAFDD
R			4068824-800		52661	AUGMENTOR DUCT AND NOZZLE MODULE .... SEE FIG. 1-11 FOR NHA	1	B/WM	PAFDD
R R			4084758-800		52661	AUGMENTOR DUCT AND NOZZLE MODULE .... SEE FIG. 1-11 FOR NHA	1	A/WL	PAFDD
R R			4084858-800		52661	AUGMENTOR DUCT AND NOZZLE MODULE .... SEE FIG. 1-11 FOR NHA	1	B/WN	PAFDD
	- 1		4071166		52661	. COVER-AUGMENTOR NOZZLE SUPPORT, ASSY ... OF	5		PAFZZ
	- 2		ST2468-014		52661	. SCREW-MACHINE, PAN .... 0.190-32UNJF-3A X 0.438 IN. LONG (AP)	1		PAOZZ
	- 3		4025416		52661	. WASHER-KEY .... 0.281 ID X 0.025 IN. THK	5		PAFZZ
	- 4		4036610		52661	. PIN-STRAIGHT, HEADED .... 0.2485 DIA X 0.715 IN. LONG	5		PAFZZ
	- 5		ST1411-15		52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 1.062 IN. LONG	30		PAFZZ
	- 6		ST2015-018		52661	. BOLT-MACHINE, DOUBLE HEX .... 0.190-32UNJF-3A X 0.562 IN. LONG	94		PAFZZ
	- 7	=	ST2053-028		52661	. BOLT-MACHINE, HEX .... 0.190-32UNJF-3A X 0.875 IN. LONG	6		PAFZZ
		=	ST2053-030		52661	. BOLT-MACHINE, HEX .... 0.190-32 X 0.938 IN. LONG	6		PAFZZ
	- 8		4018338		52661	. BRACKET-GROUND HANDLING STRUT	2		PAFBZ
	- 9		4074197		52661	. NOZZLE-AUGMENTOR, ASSY OF .... USE ONLY ON 4068724-800 SEE FIG. 63 FOR DETAIL PARTS	1	A	AFF
			4077295		52661	. NOZZLE-AUGMENTOR, ASSY OF .... USE ONLY ON 4068824-800 SEE FIG. 63 FOR DETAIL PARTS	1	B	AFF
	- 10		4075522	*	52661	. PLATE-IDENTIFICATION, AUGMENTOR DUCT AND . NOZZLE MODULE	1		PADZZ
	- 11		NAS1398C4A3		80205	. RIVET-BLIND (AP) .... REPLACES NAS1398C4A2	4		PAFZZ
	- 12		4012006		52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX .... 0.164-32UNJF-3A X 0.625 IN. LONG	20		PAOZZ
	- 13		MS9245-28		96906	. PIN	5		PAOZZ
	- 14		440491		06848	. SHAFT-FLEXIBLE, SECONDARY ACTUATOR, ... CONVERGENT NOZZLE P&W PART NO. 4020265 PARTIAL BREAKDOWN FOLLOWS	5		PAOFF
	- 15		909281-K35		06848	.. PIN-SPRING	1		PAOZZ
	- 16		2646556		06848	.. RING-RETAINER	1		PAOFF
	- 17		ST2016-010		52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX .... 0.190-32UNJF-3A X 0.312 IN. LONG	10		PAOZZ
	- 18		4052098		52661	. WASHER-KEY .... 0.221 ID X 0.0475 IN. THK	10		PAOZZ
	- 19	=	4006311		52661	. NUT-SELF-LOCKING, DOUBLE HEX .... 0.190-32UNJF-3B X 0.3175 IN. THK	20		PAOZZ
		=	4023115		52661	. NUT OPTION .... SEE OPTION TABLE	20		PAOZZ
	- 20		4076771		52661	. BOLT-SHOULDER, DOUBLE HEX .... 0.190-32UNJF-3A X 0.971 IN. LONG	20		PAFZZ
	- 21		4011121		52661	. SUPPORT-AUGMENTOR NOZZLE ACTUATOR	5		PAFBZ
	- 22		4011122		52661	. SUPPORT-AUGMENTOR NOZZLE ACTUATOR	5		PAFBZ
	- 23		4045695		52661	. BEARING OPTION .... SEE OPTION TABLE	10		PAFZZ
	- 24		4011105		52661	. SEAT-HELICAL COMPRESSION SPRING	5		PAFZZ
	- 25		4011110		52661	. SPRING-HELICAL COMPRESSION .... 1.780 ID X 0.100 IN. DIA ROUND X 6 COILS	5		PAFZZ

FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
62 - 26		442021	#	06848	. ACTUATOR-BALL SCREW, PRIMARY, CONVERGENT NOZZLE P&W PART NO. 4085022 SUPERSEDES 441615 P&W PART NO. 4076324 SEE FIG. 64 FOR DETAIL PARTS	1		PAODD
- 27		442020	#	06848	. ACTUATOR-BALL SCREW, SECONDARY, CONVERGENT NOZZLE P&W PART NO. 4085021 SUPERSEDES 441614 P&W PART NO. 4076323 SEE FIG. 64A FOR DETAIL PARTS	4		PAODD
- 28		ST2000-04		52661	. ADAPTER-STRAIGHT, TUBE TO BOSS 0.437-20UNJF-3A X 0.250 IN. TUBE OD	1		PAOZZ
- 29		2084693		52661	. GASKET 0.451 ID X 0.688 OD X 0.0645 IN. DIA ROUND	1		PAFZZ
- 30		4023115		52661	. NUT OPTION SEE OPTION TABLE	4		PAOZZ
		4058688		52661	. BRACKET-DOUBLE ANGLE, ASSY OF	1		PAFFF
- 31		2104327		52661	.. CHANNEL-LOOP CLAMP	1		PAFZZ
- 32		2120200		52661	.. BUSHING-STEPPED 0.700 OD X 0.073 IN. THK	1		XA
- 33		4058515		52661	.. BRACKET-DOUBLE ANGLE	1		XA
- 34		ST2108-02		52661	. SPACER-SLEEVE 0.203 ID X 0.406 OD X 0.062 IN. THK	2		PAFZZ
- 35		4004056		52661	. COVER-FINGER VALVE	1		PAFZZ
- 36		4004060		52661	. SCREW-MACHINE, CSK 0.138-40UNJF-3A X 0.250 IN. LONG	2		PAFZZ
- 37		4004057		52661	. SPACER-FINGER VALVE	1		PAFZZ
- 38		4004058		52661	. SPRING-FINGER VALVE	1		PAFZZ
- 39		DELETED			...			
- 40	=	4080412-01		52661	. LINER-AUGMENTOR COMBUSTION CHAMBER, ASSY OF SEE FIG. 65 FOR DETAIL PARTS	1	YK/YM	PAODD
	=	4081214-01		52661	. LINER-AUGMENTOR COMBUSTION CHAMBER, ASSY OF REOP AND REID OF 4079666-01 DO NOT PROCURE FROM P&W SEE FIG. 65 FOR DETAIL PARTS	1	YK	PAODD
		4084715-01		52661	. LINER-AUGMENTOR COMBUSTION CHAMBER, ASSY OF SEE FIG. 65 FOR DETAIL PARTS	1	YN	PAODD
- 40A	=	4083169-01		52661	. LINER-AUGMENTOR COMBUSTION CHAMBER, ASSY OF SEE FIG. 65 FOR DETAIL PARTS	1	YL/YM	PAODD
	=	4083180-01		52661	. LINER-AUGMENTOR COMBUSTION CHAMBER, ASSY OF REOP AND REID OF 4081214-01 DO NOT PROCURE FROM P&W SEE FIG. 65 FOR DETAIL PARTS	1		PAODD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
62 - 41	4073475	52661	. DUCT-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF	1	KS	PAFDD
	4082964	52661	. DUCT-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF SEE FIG. 66 FOR DETAIL PARTS	1	KT	PAFDD
	4068700	52661	ENGINE ASSY-TURBO FAN	REF	A	ADD
	4068800	52661	ENGINE ASSY-TURBO FAN	REF	B	ADD
- 42	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	218		PAOZZ
- 43	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG	209		PAOZZ
- 44	ST2015-024	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.750 IN. LONG	9		PAOZZ
- 45	4072165	52661	. BRACKET-ANGLE, ASSY OF	1		PAFZZ
- 46	4069229	52661	. BRACKET-LOOP CLAMP, ASSY OF	1		PAOBZ


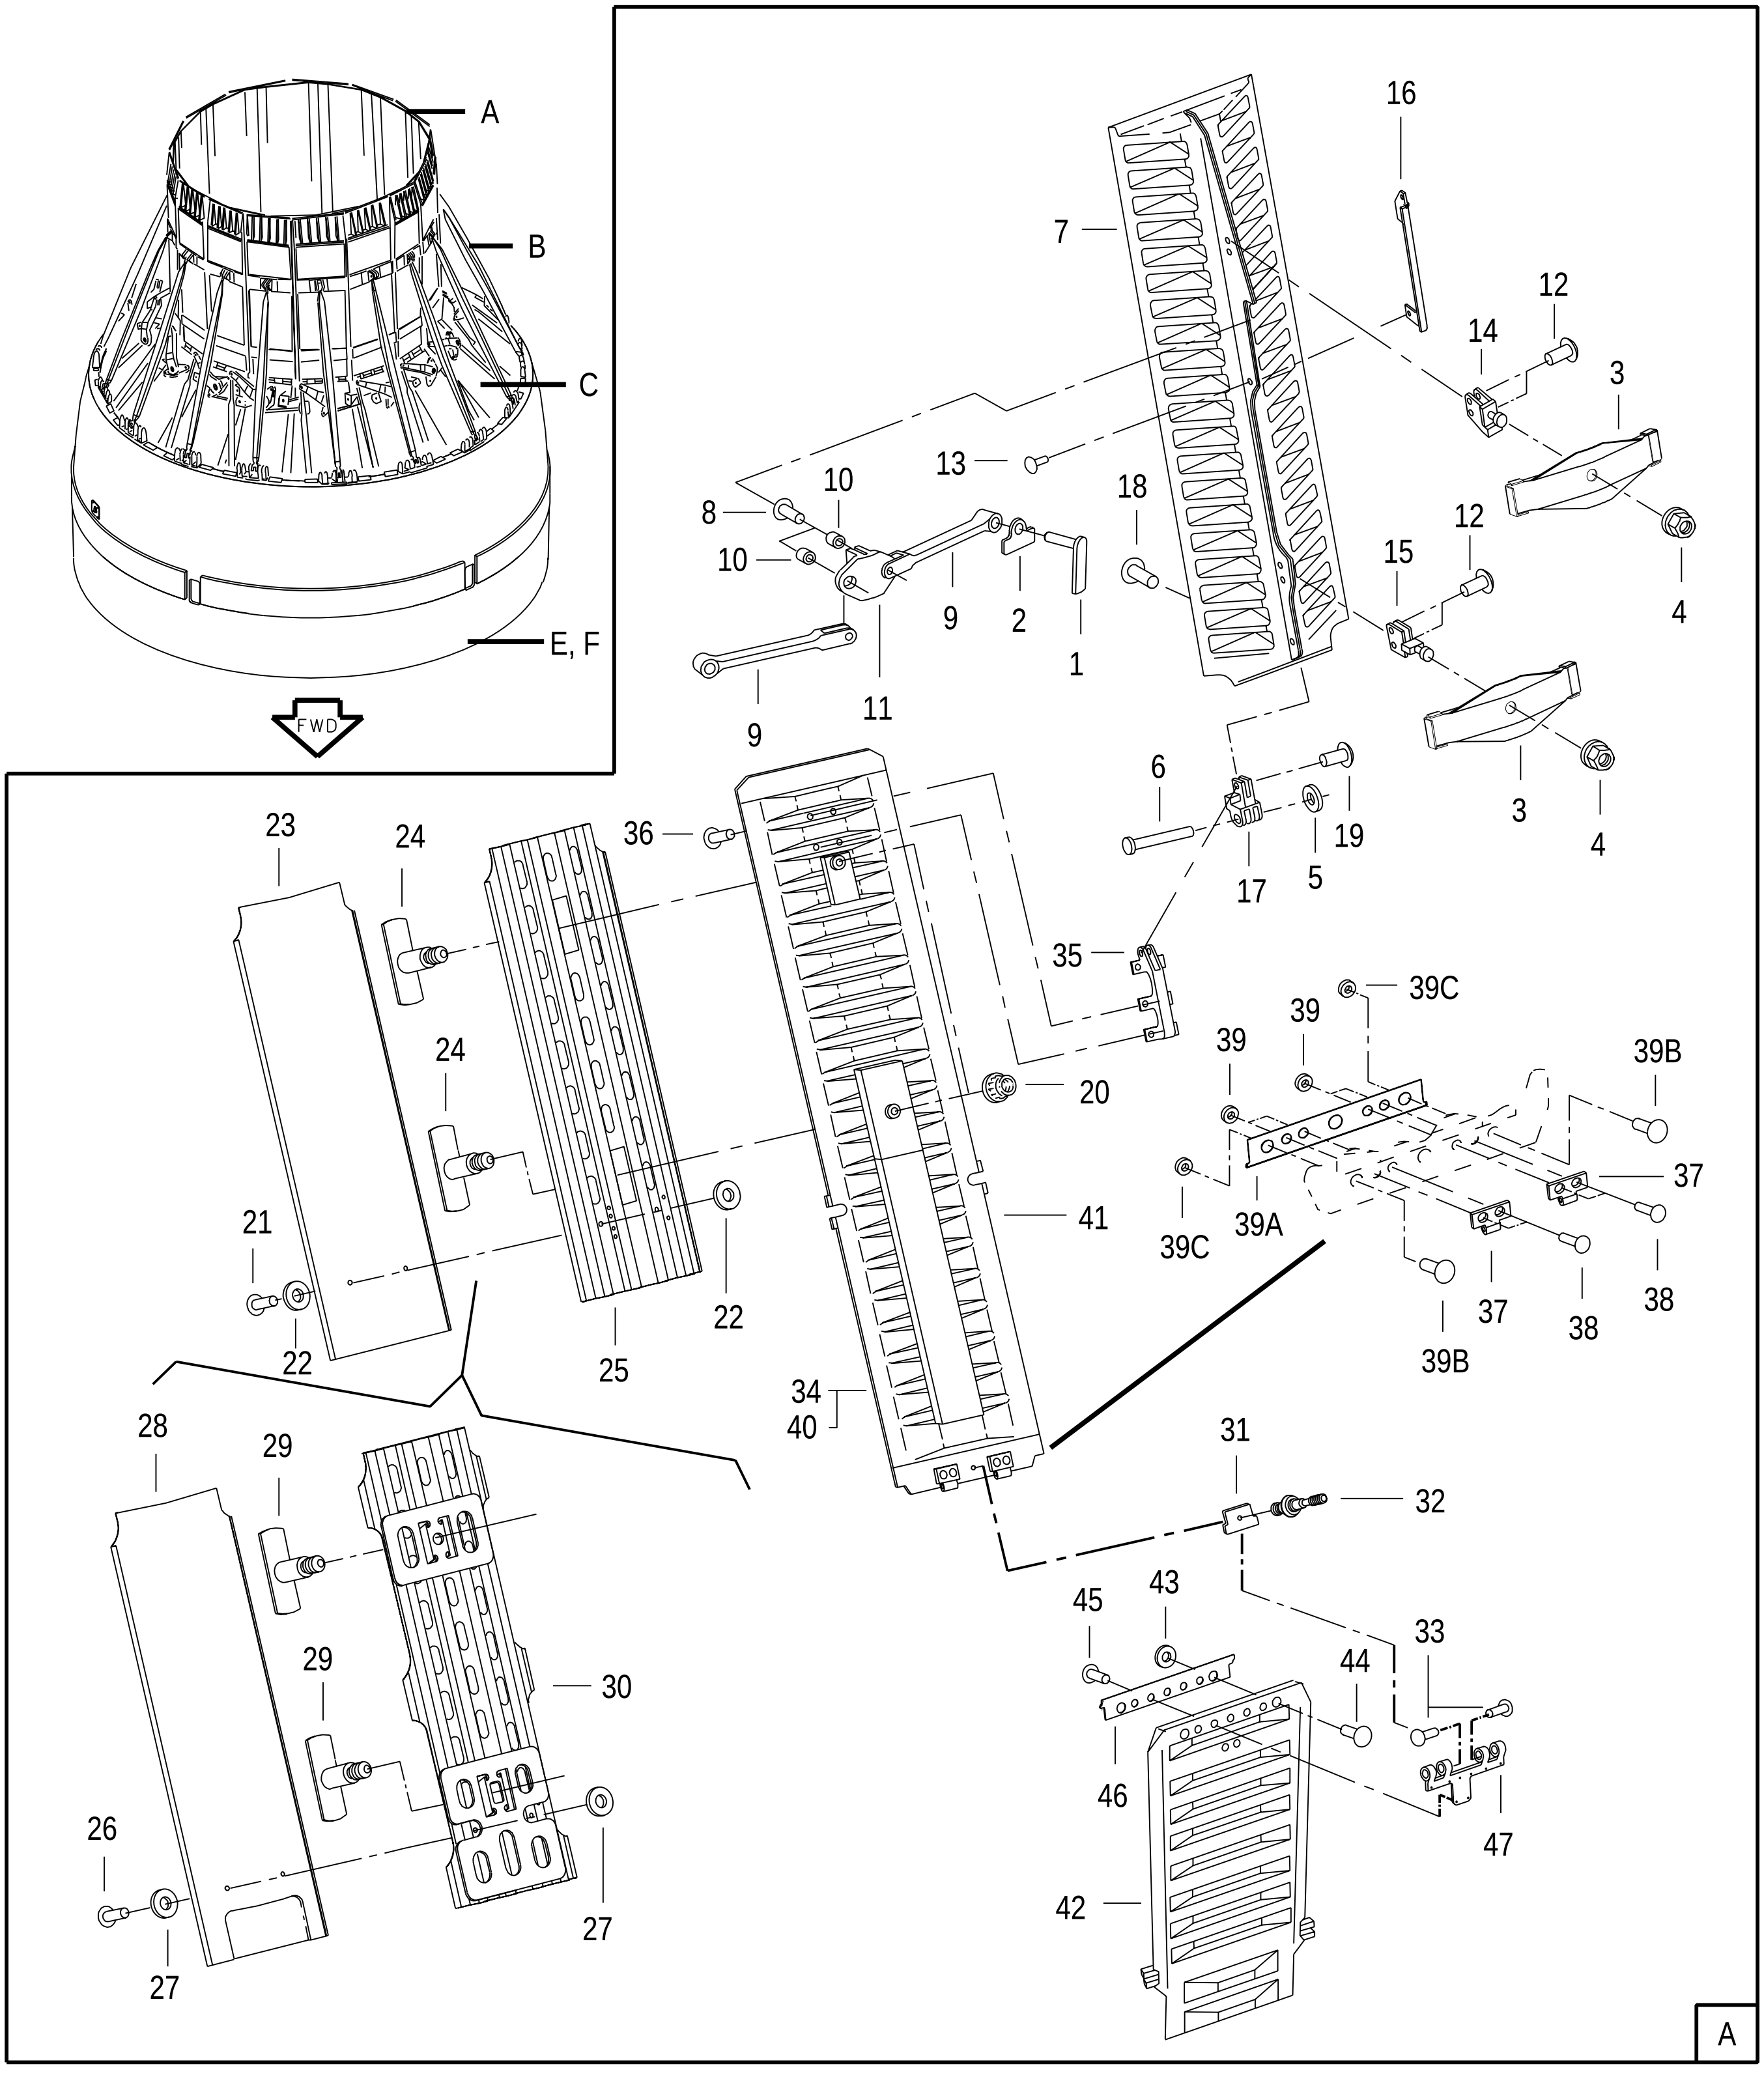


FIGURE 63. AUGMENTOR NOZZLE ASSY
(SHEET 1 OF 6)

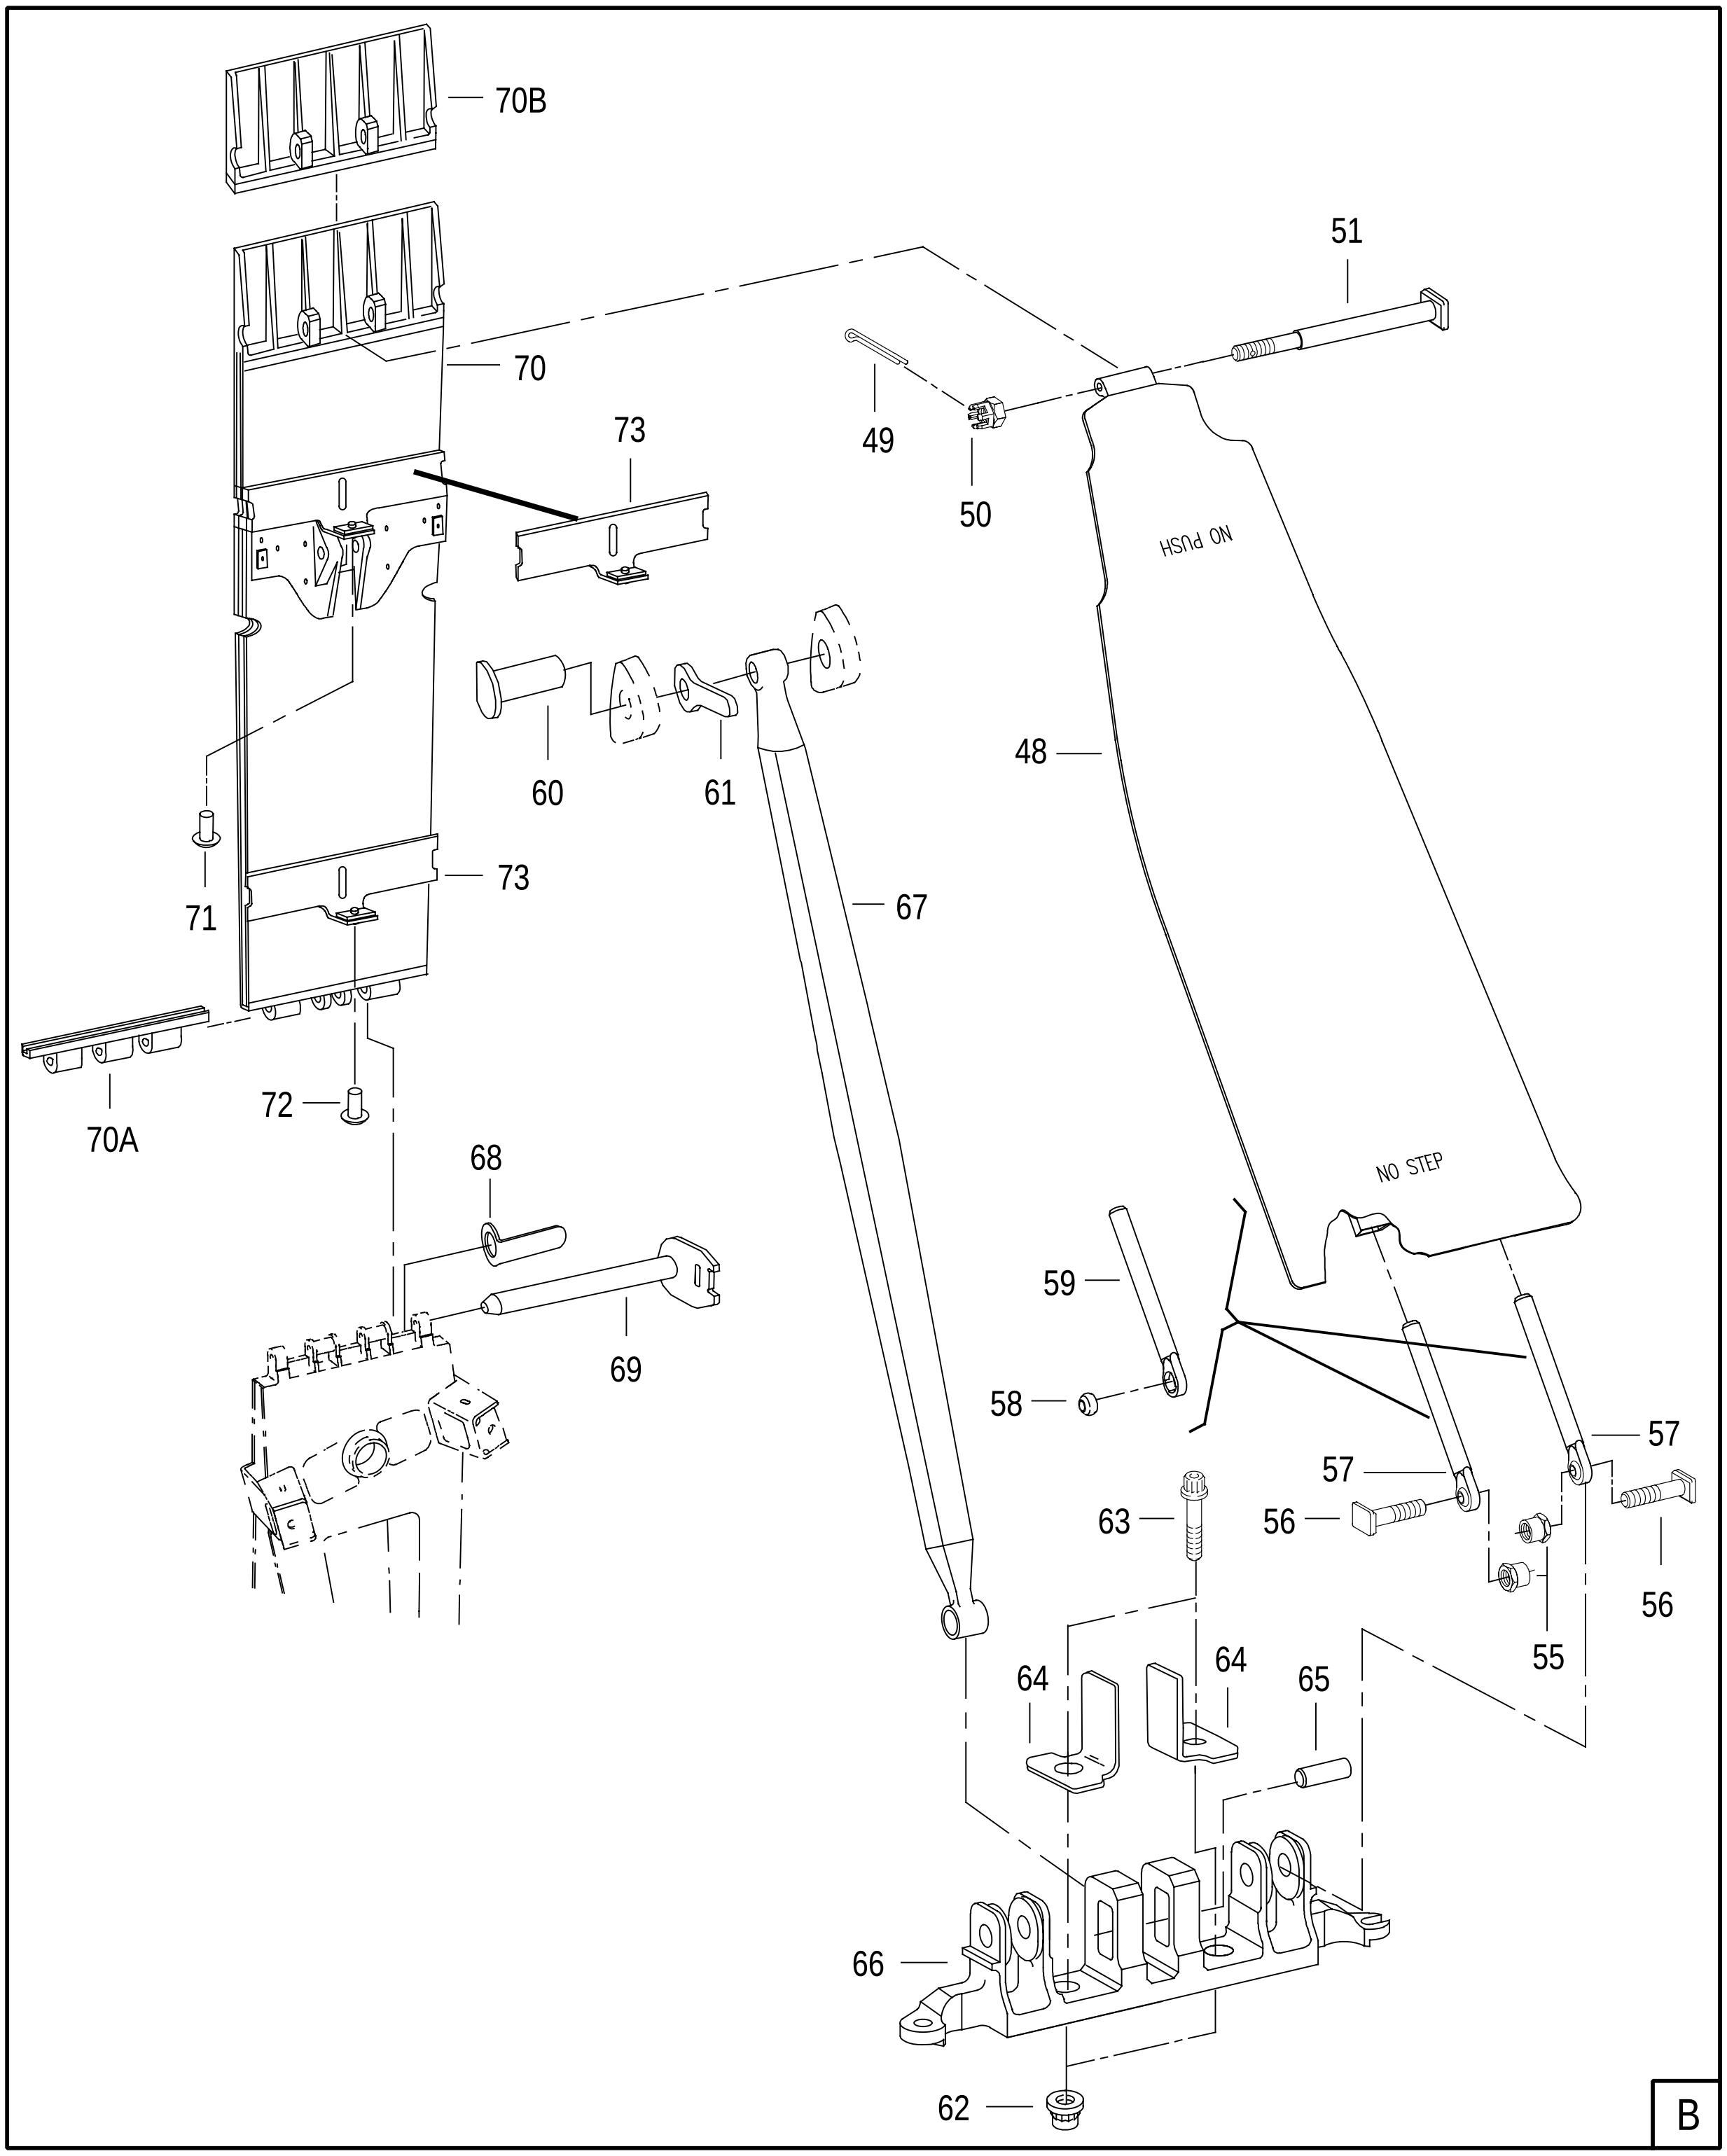

104858

FIGURE 63. AUGMENTOR NOZZLE ASSY
(SHEET 2 OF 6)

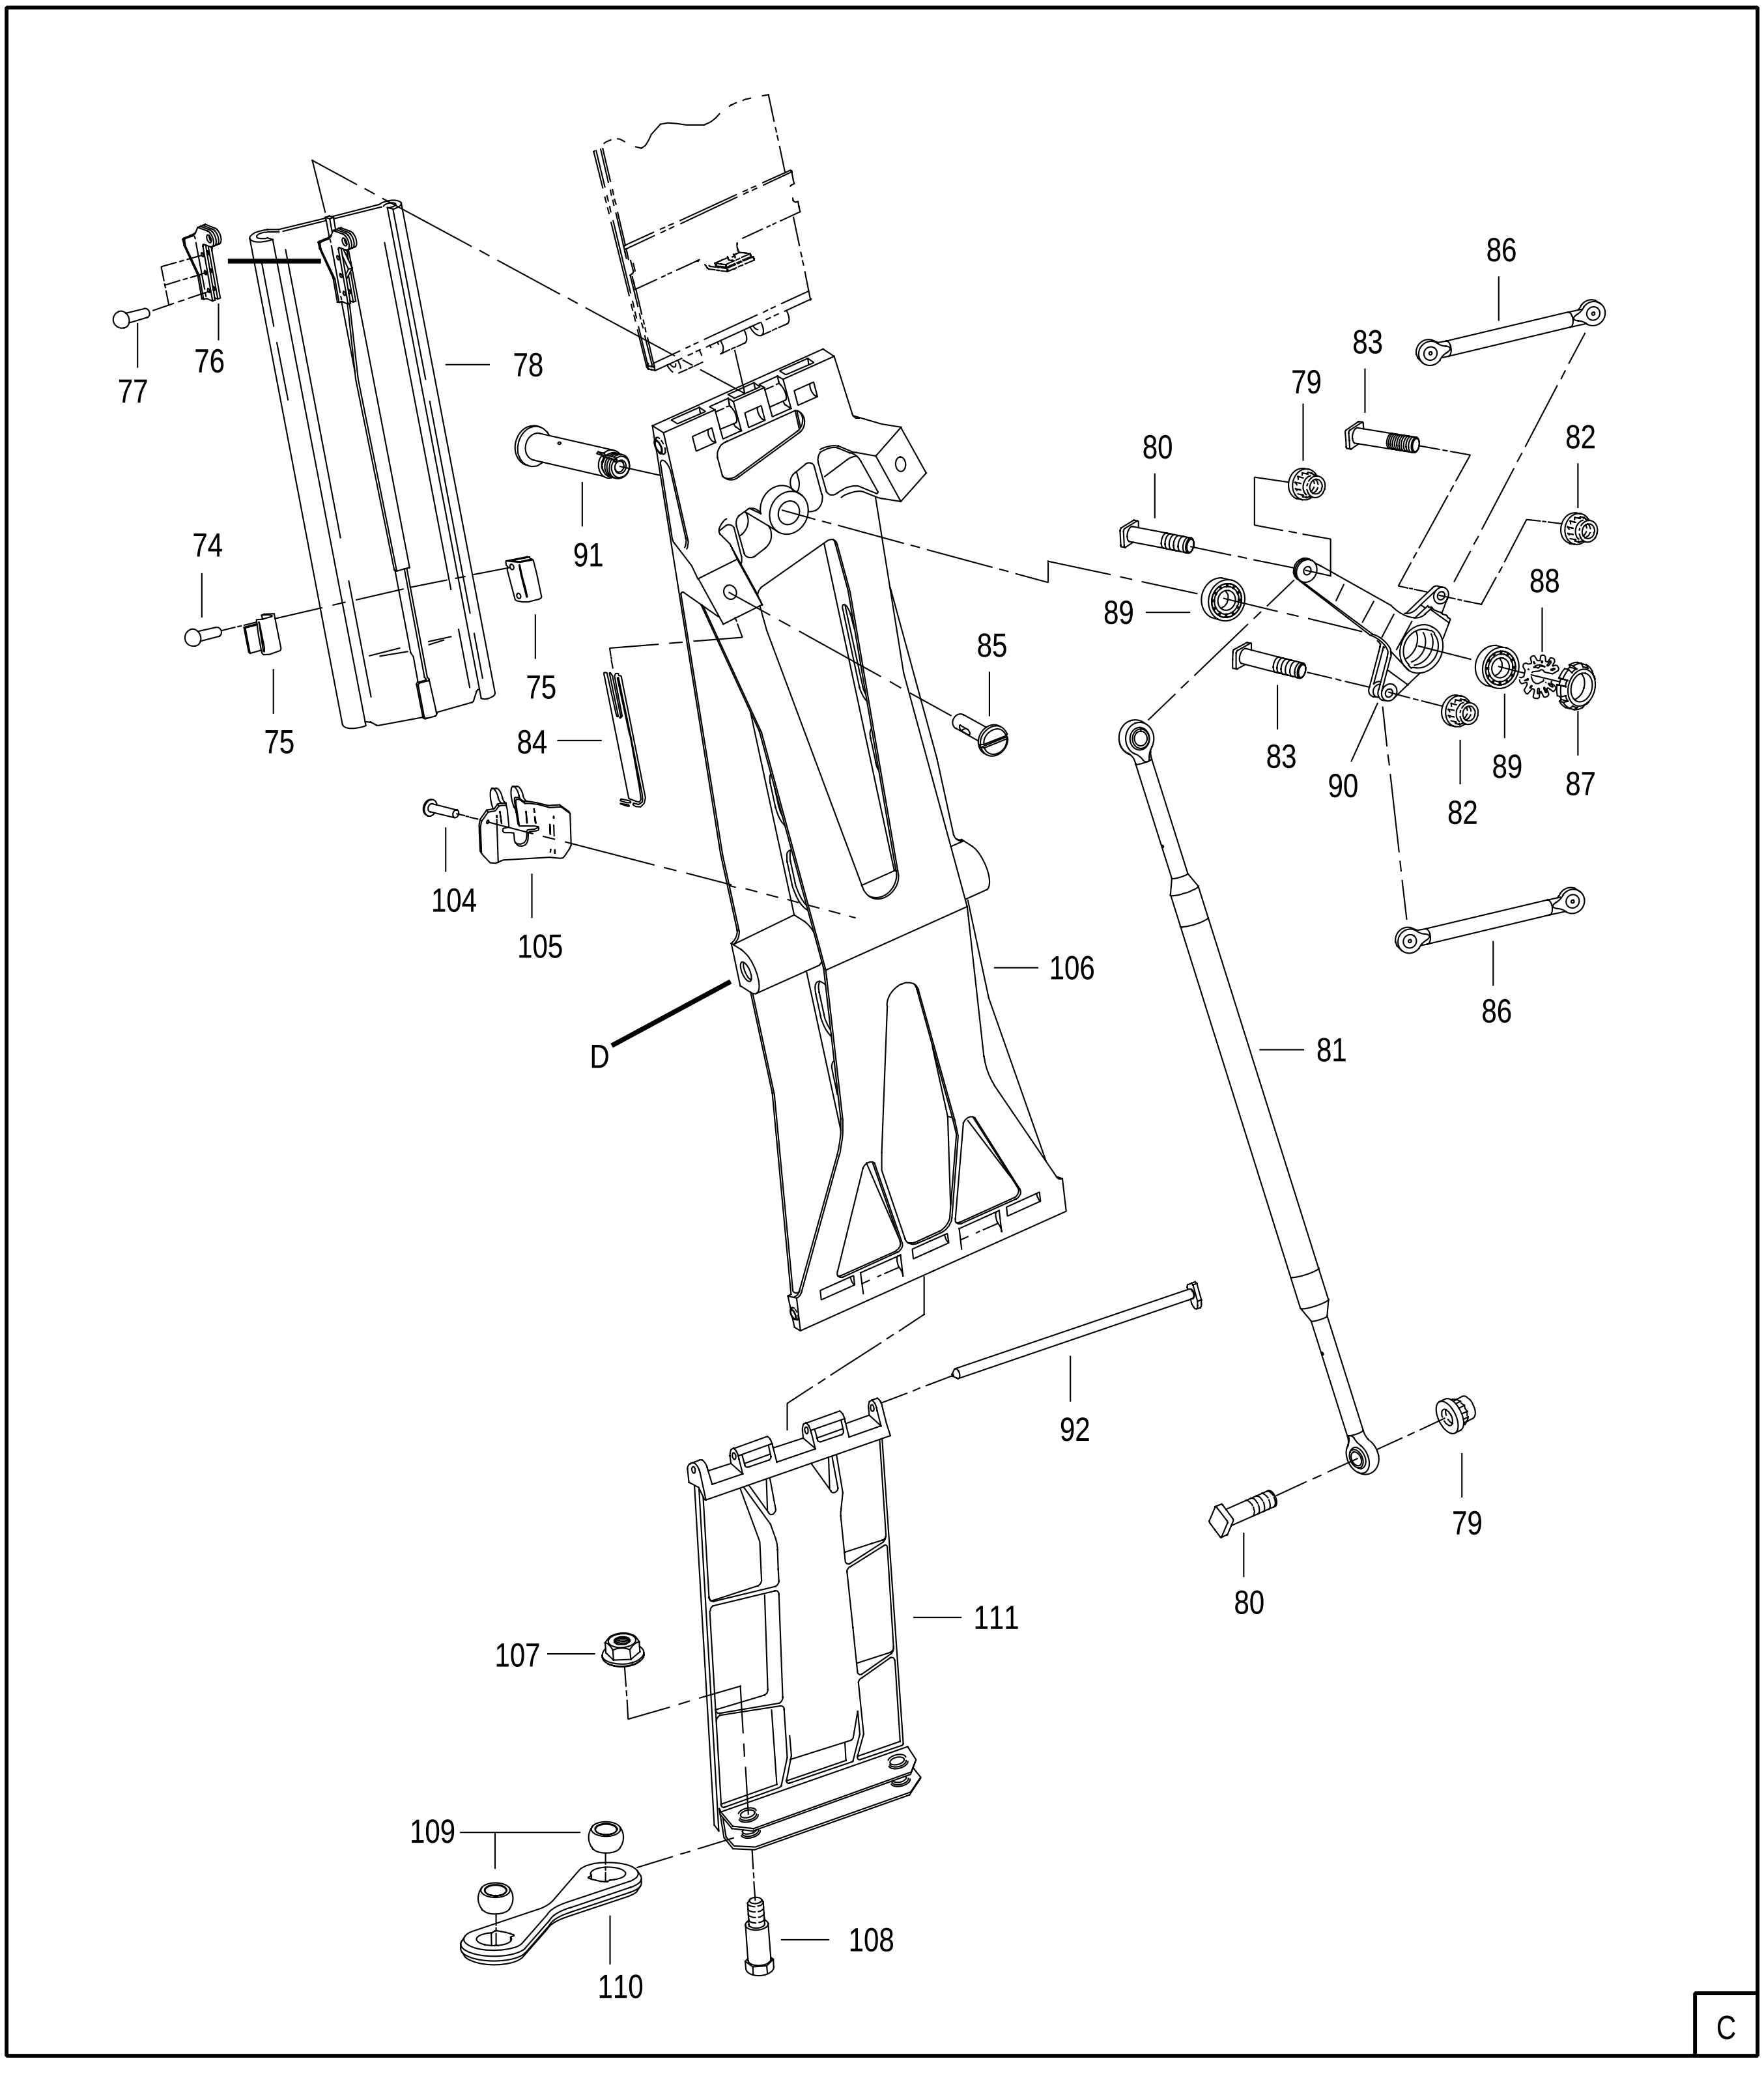


FIGURE 63. AUGMENTOR NOZZLE ASSY
(SHEET 3 OF 6)


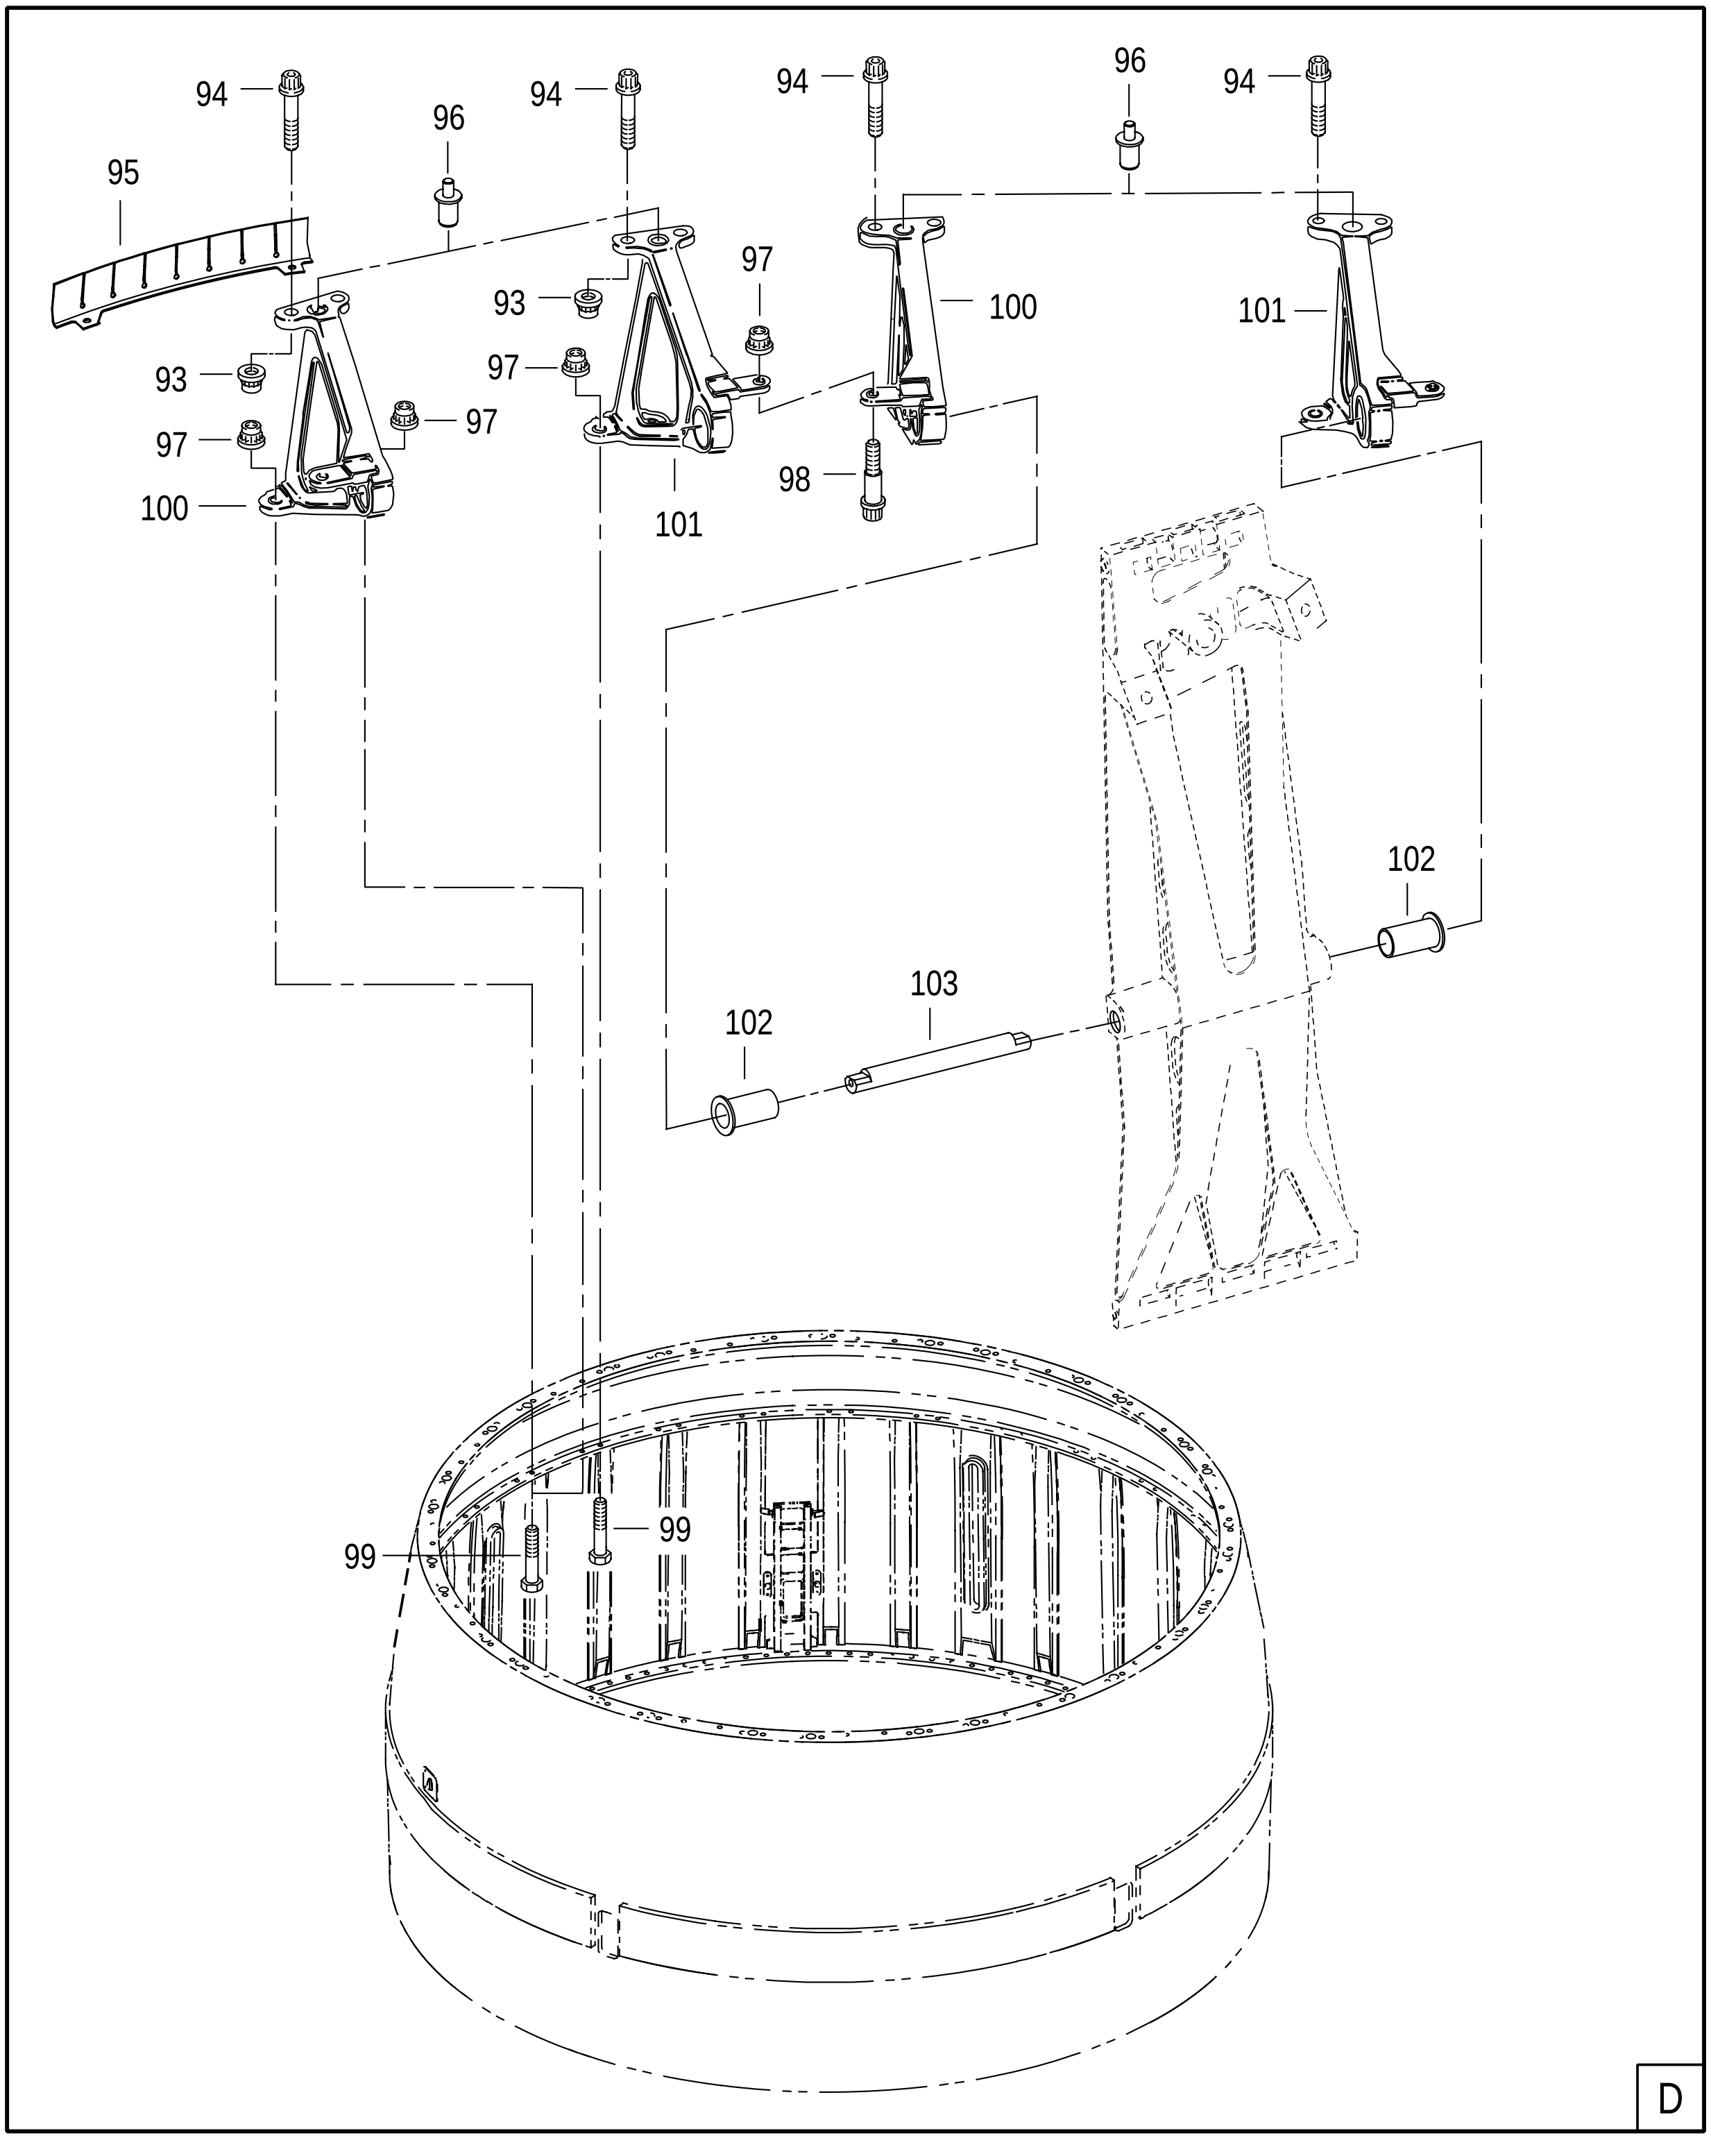


FIGURE 63. AUGMENTOR NOZZLE ASSY
(SHEET 4 OF 6)

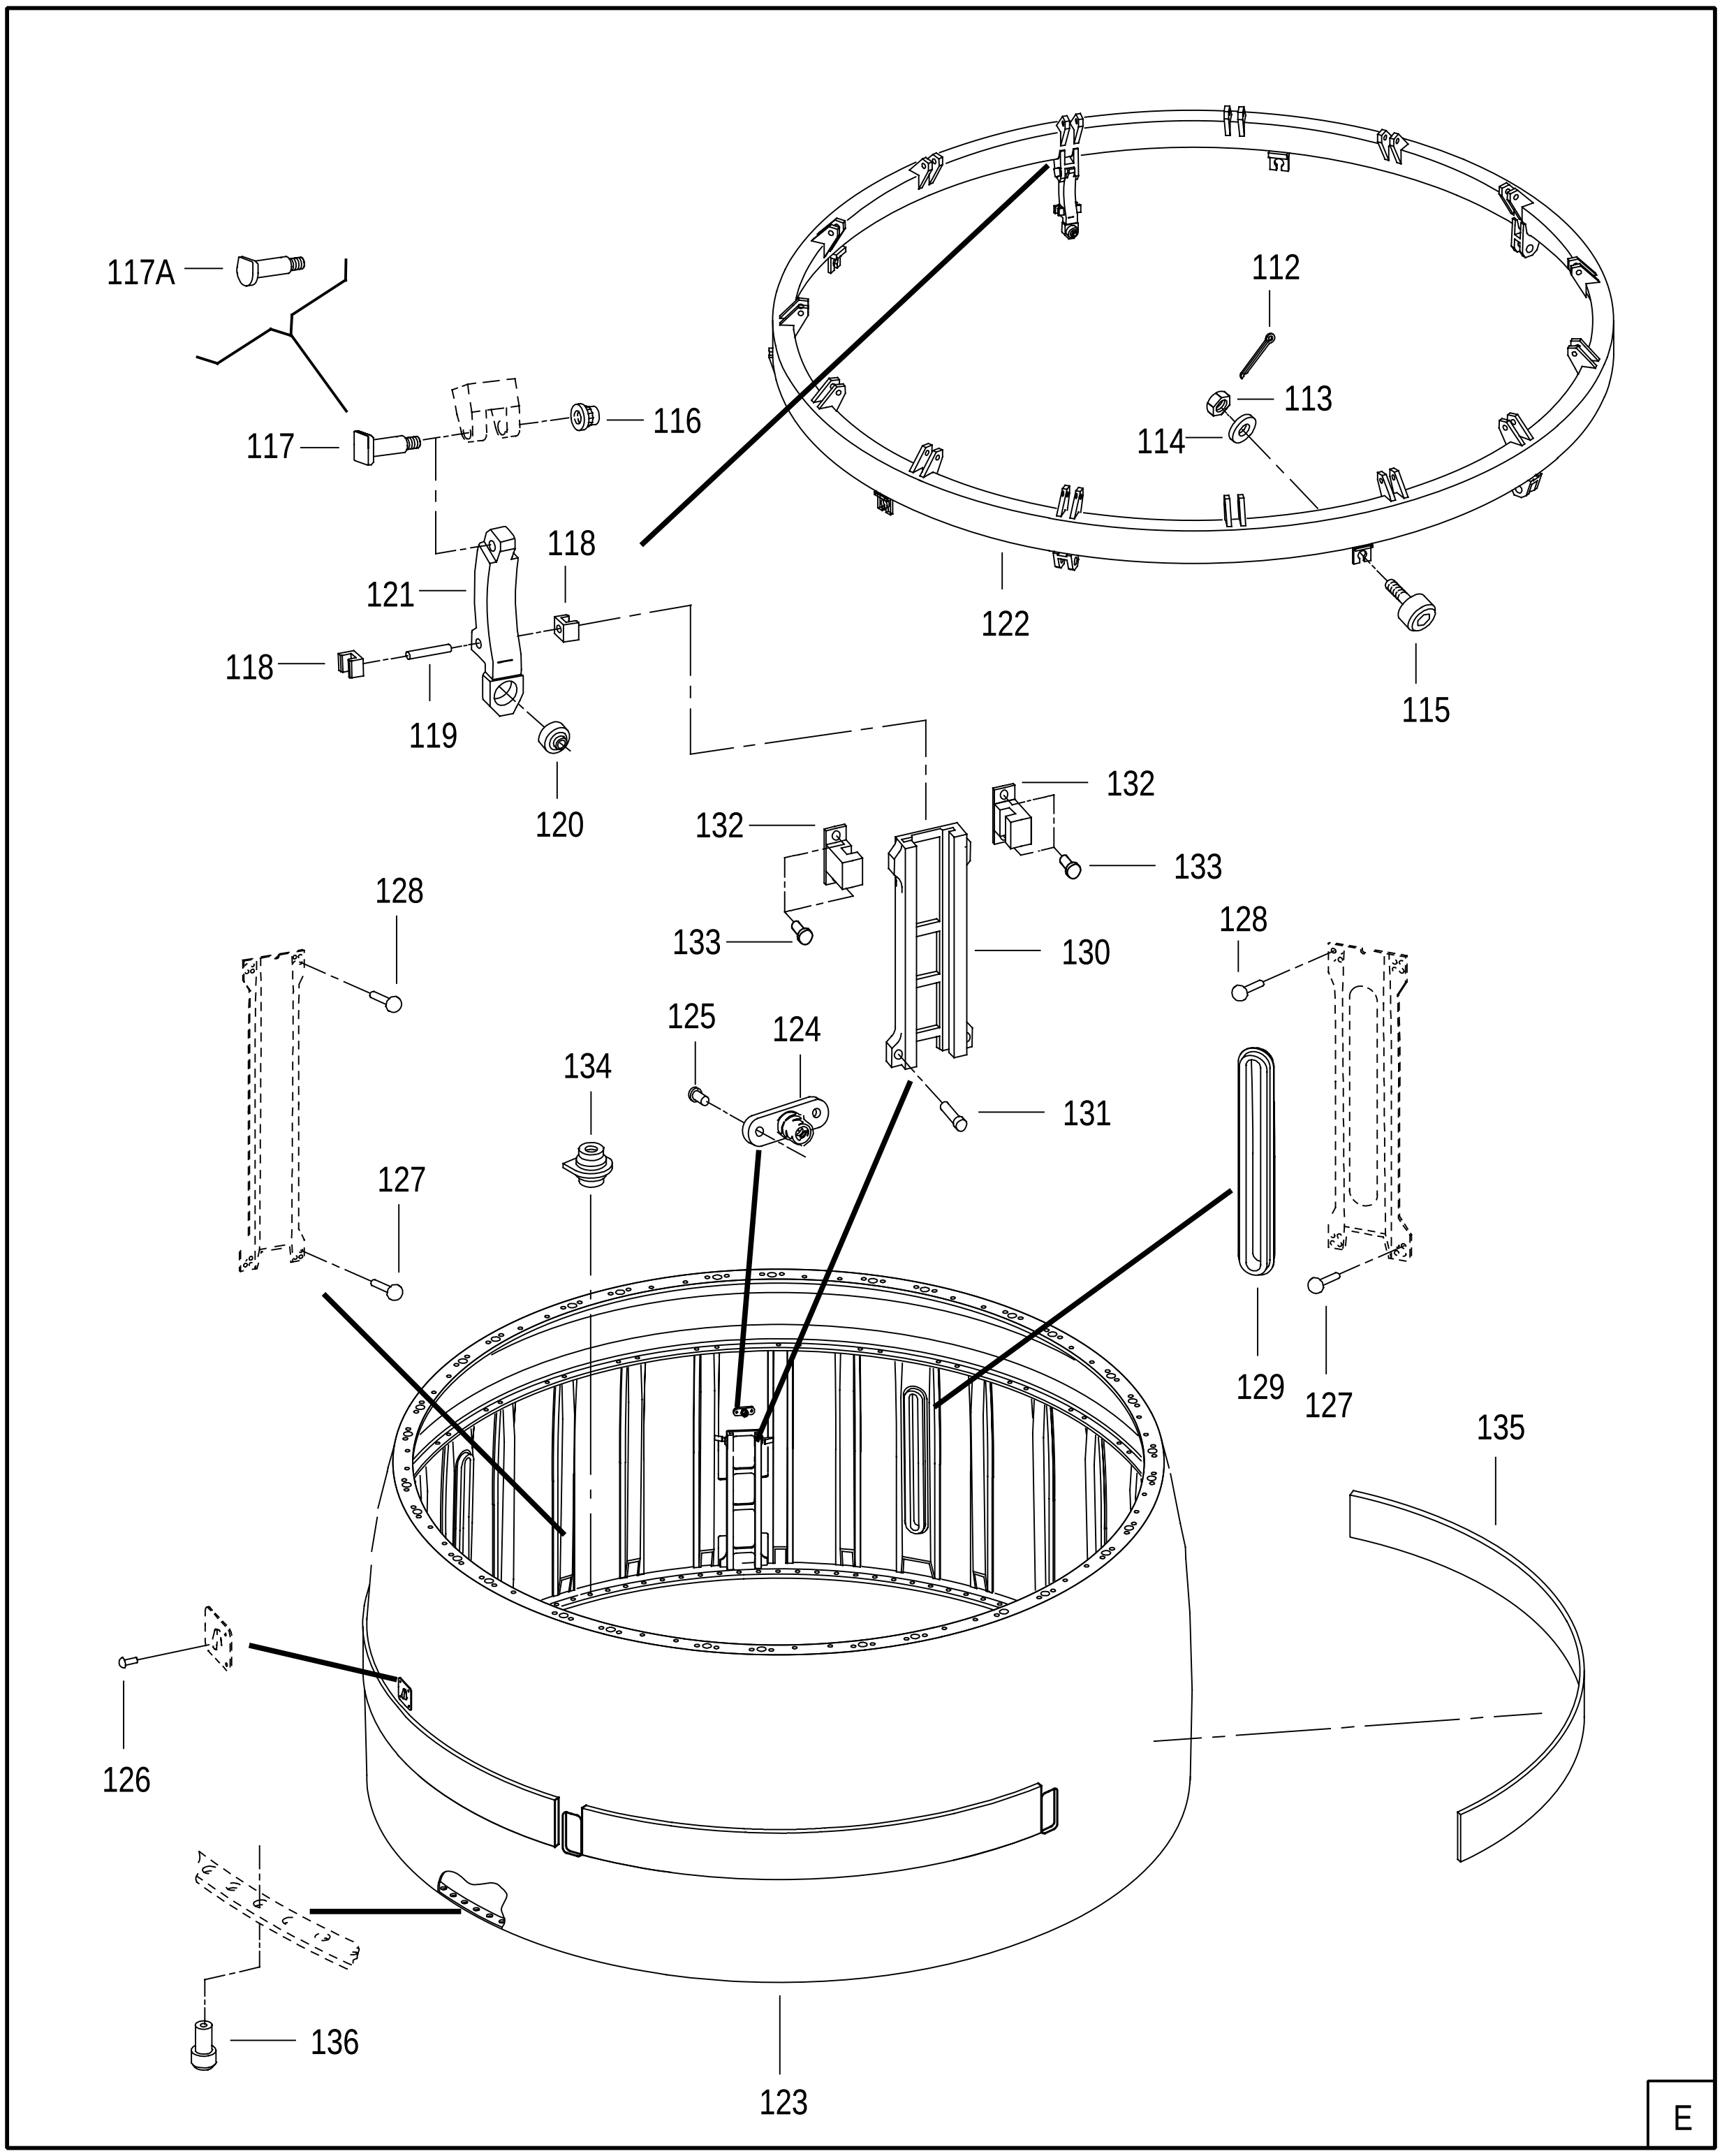

104859

FIGURE 63. AUGMENTOR NOZZLE ASSY
(SHEET 5 OF 6)

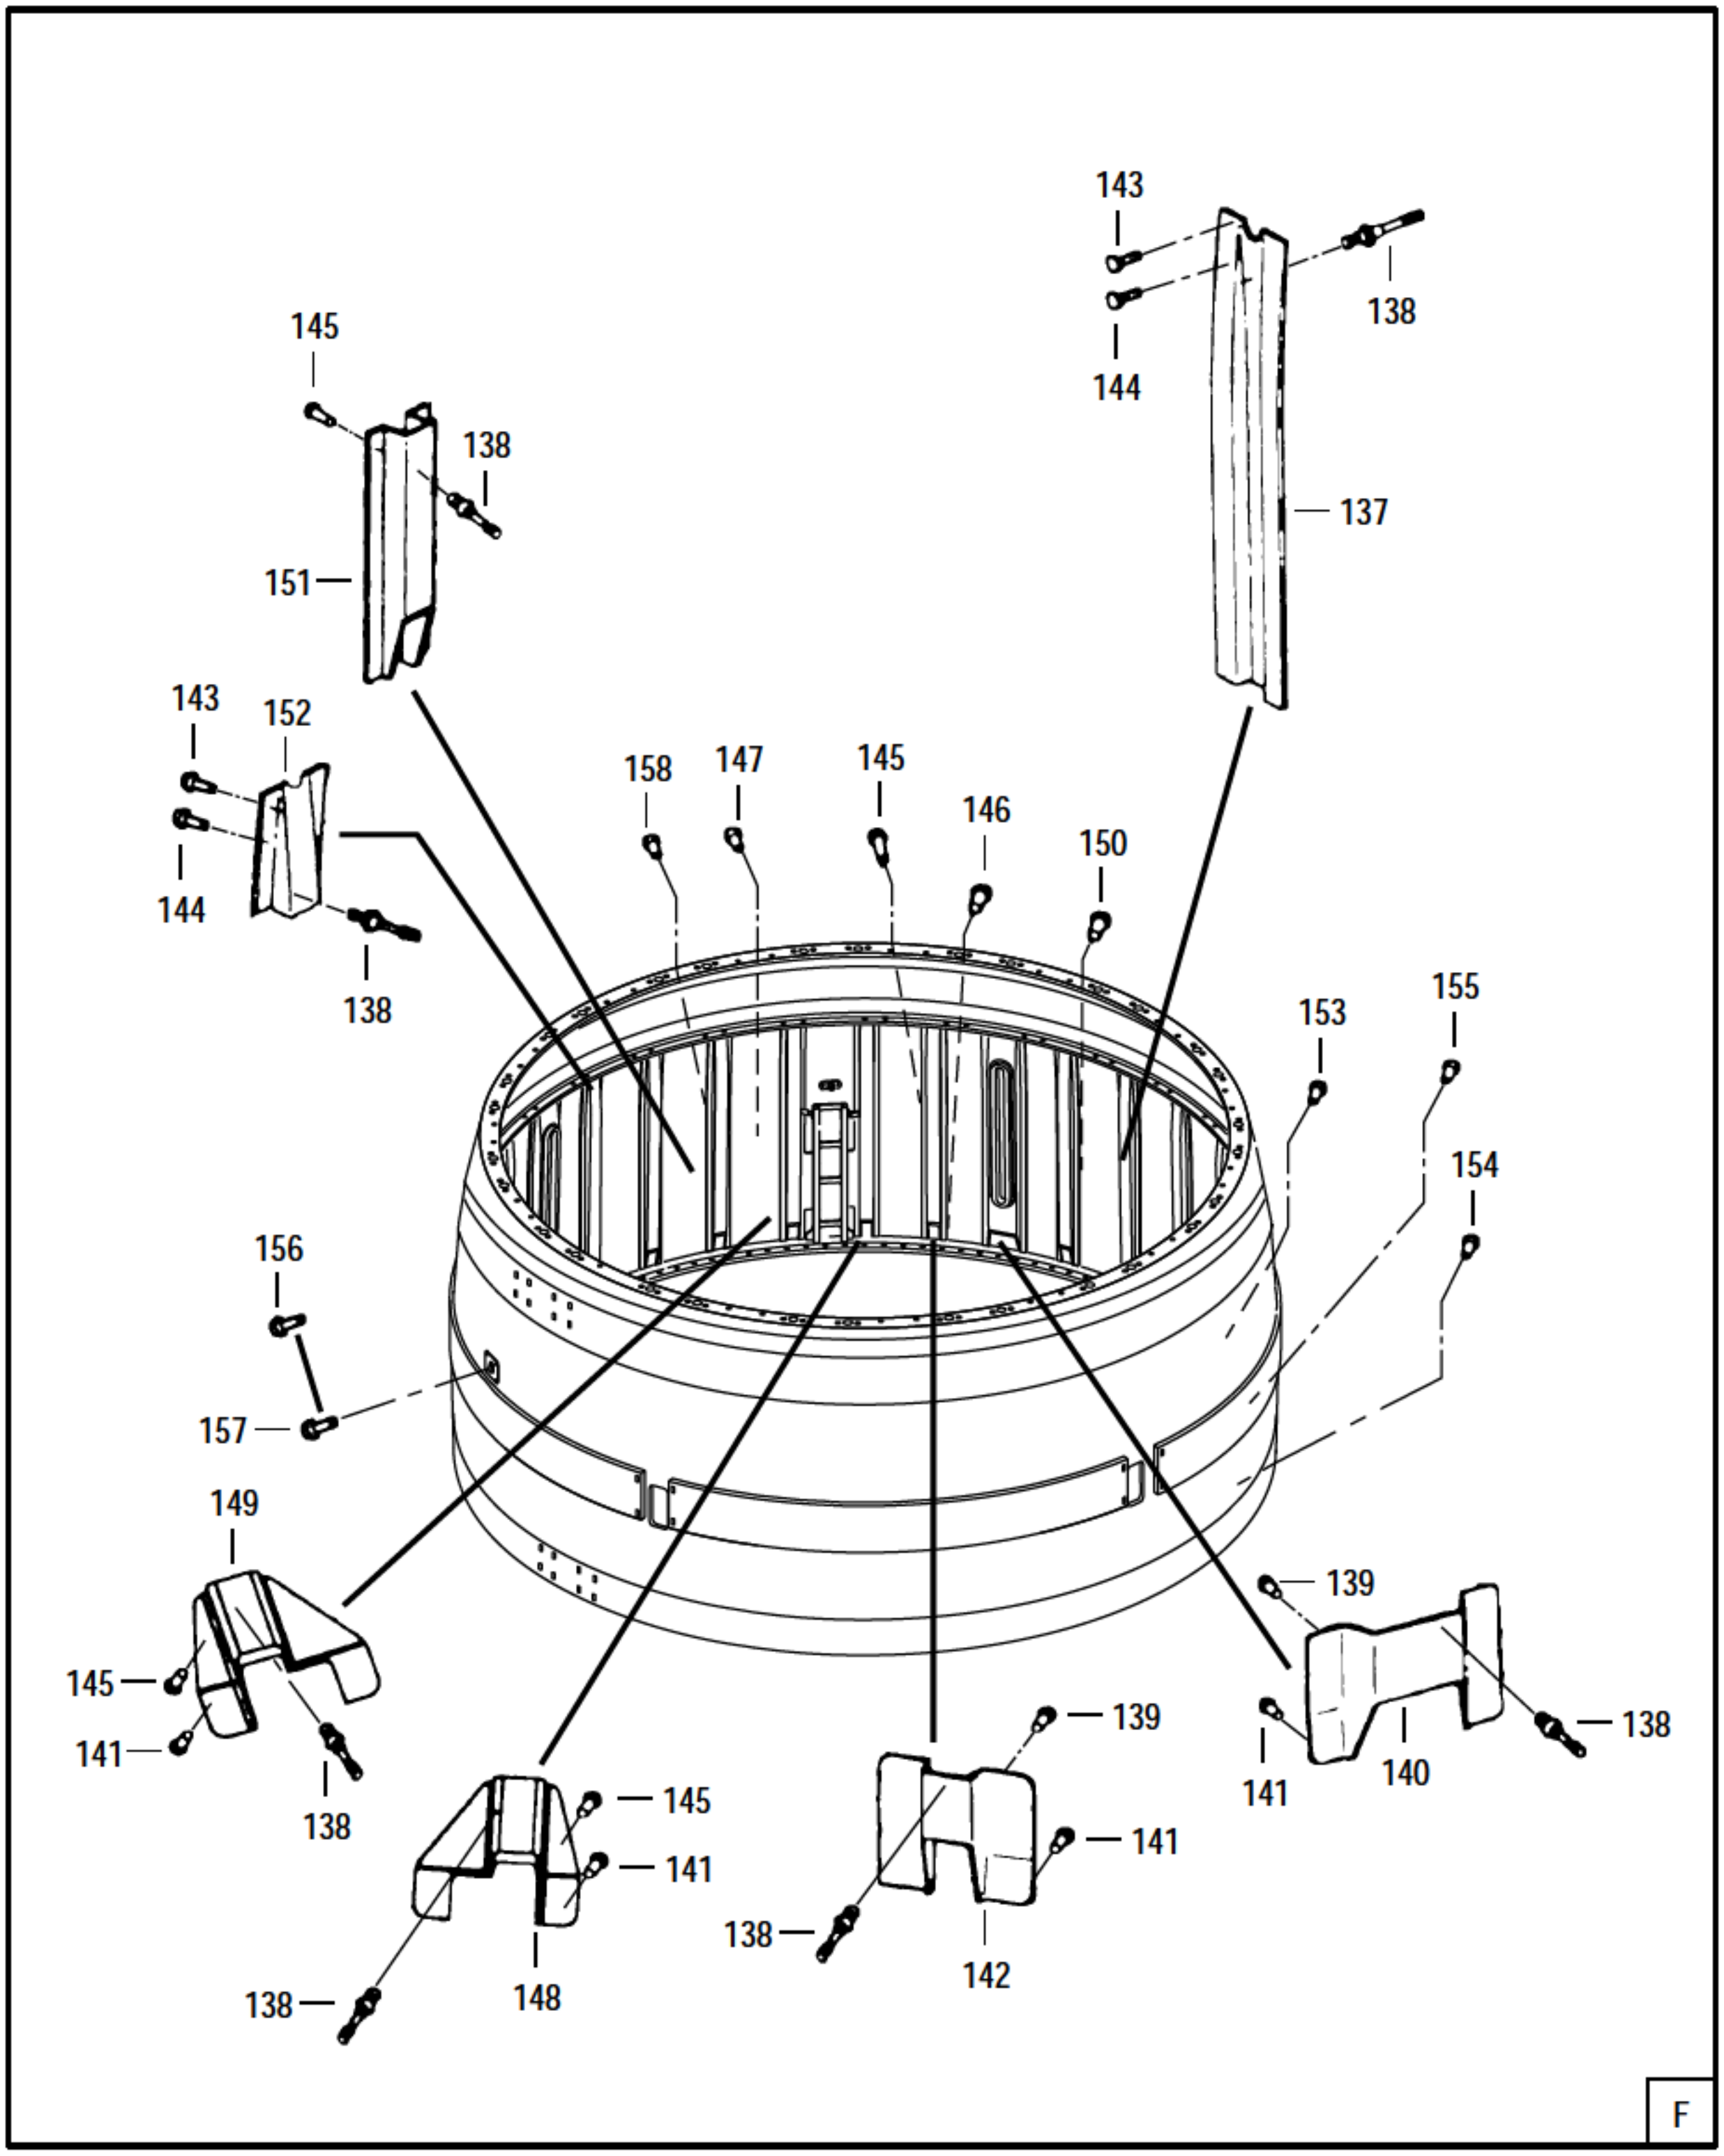


FIGURE 63. AUGMENTOR NOZZLE ASSY
(SHEET 6 OF 6)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
63	4074197	52661	NOZZLE-AUGMENTOR, ASSY OF SEE FIG. 62-9 FOR NHA	1	A	AFF
	4077295	52661	NOZZLE-AUGMENTOR, ASSY OF SEE FIG. 62-9 FOR NHA	1	B	AFF
- 1	4070357	52661	. PIN-STRAIGHT, HEADED 0.126 OD X 0.520 IN. LONG	30		PAOZZ
- 2	4070358	52661	. WASHER-KEY 0.156 ID X 0.025 IN. THK	30		PAOZZ
- 3	4077151	52661	. CLAMP-BRIDGE, AUGMENTOR DIVERGENT NOZZLE SEAL, ASSY OF	30		PAOBZ
- 4	4057828	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
- 5	4023967	52661	. WASHER-FLAT 0.127 ID X 0.200 OD X 0.045 IN. THK	15		PAFZZ
- 6	4079434	52661	. PIN-STRAIGHT, HEADED, FLAT 0.12375 OD X 0.850 IN. LONG REPLACES 4023966	15		PAFZZ
- 7	4076459	52661	. SEAL-AUGMENTOR DIVERGENT NOZZLE SEGMENT, ASSY OF PARTIAL BREAKDOWN FOLLOWS	15		PAODD
- 8	AN123321	88044	.. RIVET	2		PAFZZ
- 9	4050494	52661	.. CONNECTING LINK-AUGMENTOR DIVERGENT NOZZLE SEAL	2		PAFZZ
- 10	4050491	52661	.. SPACER-SLEEVE 0.098 X 0.158 X 0.117 IN. THK	2		PAFZZ
- 11	4050490	52661	.. GUIDE-AUGMENTOR DIVERGENT NOZZLE SEGMENT SEAL	1		PAFZZ
- 12	ST1219-156	52661	.. RIVET-SOLID, UNIVERSAL 0.156 DIA X 0.312 IN. LONG	4		PAFZZ
- 13	ST1219-102	52661	.. RIVET-SOLID, UNIVERSAL 0.125 DIA X 0.188 IN. LONG	1		PAFZZ
- 14	4057748	52661	.. GUIDE-AUGMENTOR DIVERGENT NOZZLE SEGMENT SEAL	1		PAFZZ
- 15	4057221	52661	.. GUIDE-AUGMENTOR DIVERGENT NOZZLE SEGMENT SEAL	1		PAFZZ
- 16	4076458	52661	.. BRACE-AUGMENTOR DIVERGENT NOZZLE SEGMENT SEAL	1		PAFZZ
- 17	4036748	52661	.. HINGE-AUGMENTOR DIVERGENT NOZZLE SEGMENT SEAL	1		PAFZZ
- 18	AN123619	88044	.. RIVET (AP)	2		PAFZZ
- 19	AN123336	88044	.. RIVET (AP)	1		PAFZZ
- 20	4023115	52661	. NUT OPTION SEE OPTION TABLE	30		PAOZZ
	4071130	52661	. LINER-AUGMENTOR CONVERGENT NOZZLE SEGMENT SEAL, ASSY OF WHEN EXH USE 4078304	15		PAODD
- 21	2072839	52661	.. RIVET-SOLID, UNIVERSAL HD 0.125 DIA X 0.312 IN. LONG REPLACES 2091029	2		PAFZZ
- 22	4071138	52661	.. WASHER-AUGMENTOR CONVERGENT NOZZLE SEGMENT LINER	2		PAFZZ
- 23	4071131	52661	.. LINER-AUGMENTOR CONVERGENT NOZZLE SEGMENT	1		PAFFF
- 24	4071139	52661	.. BOLT-ANCHOR 0.190-32UNJF-3A X 0.765 IN. LONG	2		PAFZZ
- 25	4071134	52661	.. LINER-AUGMENTOR CONVERGENT NOZZLE SEGMENT SEAL, ASSY OF	1		PAFFF
	4078304	52661	. LINER-AUGMENTOR CONVERGENT NOZZLE SEGMENT SEAL, ASSY OF	15		PAODD
- 26	2072839	52661	.. RIVET-SOLID, UNIVERSAL HD 0.125 DIA X 0.312 IN. LONG	2		PAFZZ
- 27	4071138	52661	.. WASHER-AUGMENTOR CONVERGENT NOZZLE SEGMENT LINER	4		PAFZZ
- 28	4078305	52661	.. LINER-AUGMENTOR CONVERGENT NOZZLE SEGMENT	1		PAFFF

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	63 - 29		4071139	52661	.. BOLT-ANCHOR 0.190-32UNJF-3A X 0.765 IN. LONG	2		PAFZZ
	- 30	=	4077943	52661	.. LINER-AUGMENTOR CONVERGENT NOZZLE SEGMENT SEAL, ASSY OF	1		PAFFF
		=	4081289-01	52661	.. LINER-AUGMENTOR CONVERGENT NOZZLE SEGMENT SEAL, ASSY OF	1		PAFFF
	- 31		4034933	52661	. LOCK-AUGMENTOR CONVERGENT NOZZLE SEAL HINGE PIN	15		PAFZZ
	- 32		MLSP-M04-01	0HDW7	. RIVET-BLIND, UNIVERSAL 0.125 DIA X 0.062 IN. GRIP LENGTH (AP) P&W PART NO. 2152845	1		PAFZZ
	- 33		4033951	52661	. PIN-STRAIGHT, HEADED, FLAT 0.094 DIA X 0.730 IN. LONG	30		PAFZZ
	- 34	=	4077837	52661	. SEAL-AUGMENTOR CONVERGENT NOZZLE SEGMENT, ASSY OF	15		PAFDD
R		=	4080837-01	52661	. SEAL-AUGMENTOR CONVERGENT NOZZLE SEGMENT, ASSY OF	15	WP/WR	PAFDD
R			4082667-01	52661	. SEAL-AUGMENTOR CONVERGENT NOZZLE SEGMENT, ASSY OF PARTIAL BREAKDOWN FOLLOWS	15	WQ/WS	PAFDD
	- 35		4038480	52661	.. HINGE-AUGMENTOR CONVERGENT NOZZLE SEGMENT SEAL	1		PAFZZ
	- 36		AN123618	88044	.. RIVET (AP)	6		PAFZZ
	- 37		4077838	52661	.. HINGE-AUGMENTOR CONVERGENT NOZZLE SEGMENT SEAL	2		PAFZZ
	- 38		AN123320	88044	.. RIVET (AP)	2		PAFZZ
	- 39		4034930	52661	.. SPACER-SLEEVE 0.097 ID X 0.200 OD X 0.060 IN. THK (AP)	2		PAFZZ
	- 39A		4046357	52661	.. COVER-AUGMENTOR NOZZLE SEAL HINGE USE ONLY ON 4080837-01	1		PAFZZ
			4082999	52661	.. COVER-AUGMENTOR NOZZLE SEAL HINGE USE ONLY ON 4082667-01	1		PAFZZ
	- 39B		AN123319	88044	.. RIVET (AP) USE ONLY ON 4080837-01	2		PAFZZ
	- 39C		4034930	52661	.. SPACER-SLEEVE 0.097 ID X 0.200 OD X 0.060 IN. THK (AP) USE ONLY ON 4080837-01	2		PAFZZ
	- 40		4077839	52661	.. BRACE-CONVERGENT AUGMENTOR NOZZLE SEGMENT USE ONLY ON 4077837	1		XA
			4080837-03	52661	.. BRACE-CONVERGENT AUGMENTOR NOZZLE SEGMENT USE ONLY ON 4080837-01	1		XA
			4082667-03	52661	.. BRACE-CONVERGENT AUGMENTOR NOZZLE SEGMENT USE ONLY ON 4082667-01	1		XA
	- 41		4072801	52661	.. SEAL-CONVERGENT AUGMENTOR NOZZLE SEGMENT USE ONLY ON 4077837	1		XA
			4080837-02	52661	.. SEAL-CONVERGENT AUGMENTOR NOZZLE SEGMENT USE ONLY ON 4080837-01	1		XA
			4082667-02	52661	.. SEAL-CONVERGENT AUGMENTOR NOZZLE SEGMENT USE ONLY ON 4082667-01	1		XA
	- 42	=	4076954	52661	. SEAL-AUGMENTOR BALANCE NOZZLE SEGMENT, ASSY OF	15		PAFFF
R		=	4080839-01	52661	. SEAL-AUGMENTOR BALANCE NOZZLE SEGMENT, ASSY OF	15	WP/WR	PAFFF
R			4083668-01	52661	. SEAL-AUGMENTOR BALANCE NOZZLE SEGMENT, ASSY OF PARTIAL BREAKDOWN FOLLOWS	15	WQ/WS	PAFFF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
63 - 43	4034930	52661	.. SPACER-SLEEVE .... 0.097 ID X 0.200 OD X 0.060 IN. THK	2		PAFZZ
- 44	AN123319	88044	.. RIVET	2		PAFZZ
- 45	AN123318	88044	.. RIVET	7		PAFZZ
- 46	4076956	52661	.. COVER-AUGMENTOR NOZZLE SEAL HINGE	1		PAFZZ
- 47	4075805	52661	.. HINGE-AUGMENTOR BALANCE NOZZLE .... SEGMENT SEAL	1		PAFZZ
- 48	4071141	52661	. NOZZLE SEGMENT-EXTERNAL, AUGMENTOR, ... ASSY OF USE ONLY ON 4077295	15	B	PAODD
- 49	MS9245-24	96906	. PIN (AP) .... USE ONLY ON 4077295	1	B	PAOZZ
- 50	4062489	52661	. NUT OPTION (AP) .... SEE OPTION TABLE USE ONLY ON 4077295	1	B	PAOZZ
- 51	4071145	52661	. BOLT-MACHINE, SLAB, DRILLED .... 0.190-32 X 2.765 IN. LONG (AP) USE ONLY ON 4077295	1	B	PAOZZ
- 52	DELETED					
- 53	DELETED					
- 54	DELETED					
- 55	4023116	52661	. NUT OPTION .... SEE OPTION TABLE USE ONLY ON 4077295	30	B	PAOZZ
- 56	4076817	52661	. BOLT-MACHINE, SLAB .... 0.250-28UNJF-3A X 1.000 IN. LONG USE ONLY ON 4077295	30	B	PAOZZ
- 57	4071146	52661	. BEARING OPTION .... SEE OPTION TABLE USE ONLY ON 4077295	30	B/LT	PAOZZ
	4080585	52661	. BEARING-PLAIN, ROD END, EXTERNAL NOZZLE, .. ASSY OF USE ONLY ON 4077295	30	B/LU	PAOZZ
- 58	4079964	52661	.. BEARING-PLAIN, SPHERICAL .... 0.250 ID X 0.500 OD X 0.343 IN. THK	1		PAFZZ
R - 59	= 4079186	52661	.. BEARING-PLAIN, ROD END, EXT NOZZLE	1		XA
R	= 4086489	52661	.. BEARING OPTION .... SEE OPTION TABLE	1		XA
R						
- 60	4059942	52661	. PIN-STRAIGHT, HEADED, DEE .... 0.3115 X 1.110 IN. LONG	15		PAFZZ
- 61	4024873	52661	. WASHER-KEY .... 0.327 ID X 0.025 IN. THK	15		PAOZZ
- 62	4023117	52661	. NUT OPTION .... SEE OPTION TABLE	30		PAOZZ
- 63	ST2235-032	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.3125-24UNJF-3A X 1.000 IN. LONG	30		PAOZZ
- 64	4048999	52661	. RETAINER-AUGMENTOR NOZZLE PIN	30		PAFZZ
- 65	4071720	52661	. PIN-STRAIGHT, HEADLESS .... 0.291 X 1.035 IN. LONG	15		PAOZZ
- 66	4075771	52661	. BRACKET OPTION .... SEE OPTION TABLE	15		PAOZZ
- 67	4080732	52661	. CONNECTING LINK OPTION .... SEE OPTION TABLE	15		PAODD
- 68	4072948	52661	. LOCK-AUGMENTOR CONVERGENT NOZZLE .... HINGE PIN	15		PAFZZ
- 69	4070743	52661	. PIN-AUGMENTOR CONVERGENT NOZZLE .... SEGMENT HINGE, ASSY OF	15		PAFZZ
- 70	4071142	52661	. NOZZLE SEGMENT-DIVERGENT, AUGMENTOR, ... ASSY OF PARTIAL BREAKDOWN FOLLOWS	15		PAODD
- 70A	4069915	52661	.. HINGE-AUGMENTOR DIVERGENT NOZZLE .... SEGMENT	1		PADZZ
- 70B	4071143	52661	.. NOZZLE SEGMENT-DIVERGENT AUGMENTOR	1		PADZZ
- 71	AN123636	88044	.. RIVET	1		PAOZZ
- 72	AN123336	88044	.. RIVET	1		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
63 - 73	4071804	52661	.. SEAT OPTION . . . . SEE OPTION TABLE	2		PAFZZ
	4070107	52661	. LINER-AUGMENTOR CONVERGENT NOZZLE . . . . . . SEGMENT, ASSY OF	15		PAODD
- 74	AN123319	88044	.. RIVET	2		PAFZZ
- 75	4048887	52661	.. SEAT-AUGMENTOR CONVERGENT NOZZLE . . . . . . SEGMENT LINER	2		PAFZZ
- 76	4077801-01	52661	.. HINGE-AUGMENTOR CONVERGENT NOZZLE . . . . . SEGMENT LINER, ASSY OF	1		PAFZZ
- 77	AN123315	88044	.. RIVET (AP)	3		PAFZZ
- 78	4074397	52661	.. LINER-AUGMENTOR CONVERGENT NOZZLE . . . . . SEGMENT, ASSY OF	1		XA
- 79	4023117	52661	. NUT OPTION . . . . SEE OPTION TABLE	30		PAOZZ
- 80	4070476	52661	. BOLT-MACHINE . . . . 0.3125-24UNJF-3A X 1.090 IN. LONG	30		PAFZZ
- 81	4071755	52661	. CONNECTING LINK OPTION . . . . SEE OPTION TABLE	15		PAFBZ
- 82	4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	30		PAOZZ
- 83	4070477	52661	. BOLT-MACHINE . . . . 0.250-28UNJF-3A X 1.085 IN. LONG	30		PAOZZ
- 84	4075973	52661	. LOCK-AUGMENTOR CONVERGENT NOZZLE . . . . SEGMENT COVER	30		PAFZZ
- 85	4075472	52661	. PIN-STRAIGHT, FLAT, SLOTTED . . . . 0.2485 OD X 1.000 IN. LONG	30		PAFZZ
- 86	4074709	52661	. LINK OPTION . . . . SEE OPTION TABLE	30		PAOBZ
- 87	4001221	52661	. NUT-PLAIN, ROUND . . . . 0.586-32UNJS-3B X 0.219 IN. THK	15		PAFZZ
- 88	4076423	52661	. WASHER-KEY . . . . 0.6025 ID X 0.043 IN. THK	15		PAFZZ
- 89	4063876	52661	. BEARING OPTION . . . . SEE OPTION TABLE	30		PAFZZ
- 90	4074624	52661	. LEVER-AUGMENTOR NOZZLE	15		PAFBZ
- 91	4071233	52661	. GUIDE-AUGMENTOR CONVERGENT NOZZLE . . . . . . SEGMENT	15		PAFZZ
- 92	4070977	52661	. PIN-AUGMENTOR CONVERGENT NOZZLE . . . . SEGMENT HINGE	15		PAFZZ
- 93	4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	60		PAOZZ
- 94	ST2018-028	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.875 IN. LONG	60		PAOZZ
- 95	4071718	52661	. SEAL-AUGMENTOR NOZZLE SUPPORT . . . . USE ONLY ON 4077295	15	B	PAOZZ
- 96	4071717	52661	. PIN-SHOULDER, HEADLESS . . . . 0.18775 AND 0.312 X 0.805 IN. LONG	30		PAFZZ
- 97	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	75		PAOZZ
- 98	4020685	52661	. BOLT-SHOULDER, HEX . . . . 0.190-32UNJF-3A X 0.520 IN. LONG	15		PAFZZ
- 99	ST2053-022	52661	. BOLT-MACHINE, HEX . . . . 0.190-32UNJF-3A X 0.688 IN. LONG	60		PAFZZ
- 100	4071122	52661	. SUPPORT-AUGMENTOR NOZZLE	15		PAFBZ
- 101	4071123	52661	. SUPPORT-AUGMENTOR NOZZLE	15		PAFBZ
- 102	= 4076383	52661	. BEARING OPTION . . . . SEE OPTION TABLE	30		PAFZZ
	= 4081425	52661	. BEARING-SLEEVE, CONVERGENT NOZZLE, ASSY . OF	30		PAFZZ
- 103	4071726	52661	. PIN-AUGMENTOR CONVERGENT NOZZLE . . . . SEGMENT	15		PAFZZ
	4070741	52661	. NOZZLE SEGMENT-CONVERGENT, AUGMENTOR, . ASSY OF	15		PAFDD
- 104	AN123336	88044	.. RIVET	4		PAFZZ
- 105	4038769	52661	.. RETAINER-AUGMENTOR CONVERGENT NOZZLE . SEGMENT	1		PAFZZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	63 - 106		4070742	52661	.. NOZZLE SEGMENT-CONVERGENT, AUGMENTOR .	1		XA
	- 107		4058231	52661	. NUT OPTION . . . . SEE OPTION TABLE	30		PAOZZ
	- 108		4057689	52661	. BOLT-SHOULDER, HEX . . . . 0.375-24UNJF-3A X 1.235 IN. LONG	30		PAOZZ
			4073564	52661	. CONNECTING LINK ASSY-RIGID, BALANCE . . . . NOZZLE SEGMENT	15		PAFZZ
	- 109		4073566	52661	.. BEARING-PLAIN, SPHERICAL . . . . 0.500 ID X 0.8232 OD X 0.450 IN. THK	2		PAFZZ
	- 110		4073565	52661	.. CONNECTING LINK-RIGID, BALANCE NOZZLE . . . . SEGMENT	1		XA
	- 111		4070067	52661	. NOZZLE SEGMENT-BALANCE, AUGMENTOR	15		PAFDD
	- 112		MS9245-25	96906	. PIN	5		PAFZZ
	- 113		MS9363-11	96906	. NUT	5		PAFZZ
	- 114		MS9549-11	96906	. WASHER	5		PAOZZ
R	- 115		4050564	52661	. CAM FOLLOWER-ROLLER BEARING, ... AUGMENTOR NOZZLE	5	WP/WR	PAFZZ
R			4083077	52661	. CAM FOLLOWER-ROLLER BEARING, ... AUGMENTOR NOZZLE	5	WQ/WS	PAFZZ
	- 116		4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	5		PAOZZ
	- 117		4071327	52661	. BOLT-SHOULDER . . . . 0.250-28UNJF-3A X 1.210 IN. LONG	5	LC	PAFZZ
	- 117A		4081773	52661	. BOLT-SHOULDER . . . . 0.250-28UNJF-3A X 1.210 IN. LONG	5	LD	PAFZZ
	- 118		4071170	52661	. RUNNER-AUGMENTOR NOZZLE . . . . SYNCHRONIZING RING	10		PAFZZ
	- 119		4071171	52661	. PIN-STRAIGHT, HEADLESS . . . . 0.2485 DIA X 1.839 IN. LONG	5		PAFZZ
			4071328	52661	. CONNECTING LINK-AUGMENTOR NOZZLE . . . . SYNCHRONIZING RING, ASSY OF	5		PAFFF
	- 120		4071400	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	1		PAFZZ
	- 121		4071329	52661	.. CONNECTING LINK-AUGMENTOR NOZZLE . . . . SYNCHRONIZING RING	1		XA
	- 122		4074229-01	52661	. RING-SYNCHRONIZING, AUGMENTOR NOZZLE, . . . ASSY OF	1		PAFLD
	- 123	=	4071150	52661	. SUPPORT-AUGMENTOR NOZZLE, ASSY OF	1		PAFDD
		=	4080513	52661	. SUPPORT-AUGMENTOR NOZZLE, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
	- 124		NS103718-02	56878	.. NUT-SELF-LOCKING, PLATE, 2 LUG . . . . 0.190-32UNJF-3B P&W PART NO. 4027891	5		PAFZZ
	- 125		AN123620	88044	.. RIVET (AP)	2		PAFZZ
	- 126		AN123319	88044	.. RIVET	4		PAFZZ
	- 127		AN123336	88044	.. RIVET	120		PAFZZ
	- 128		AN123637	88044	.. RIVET	140		PAOZZ
	- 129		4071160	52661	.. GUIDE-AUGMENTOR NOZZLE SUPPORT.	5		PAFBZ
	- 130		4071172	52661	.. GUIDE-AUGMENTOR NOZZLE SUPPORT. . . . . USE ONLY ON 4071150	5		PAFBZ
			4080512	52661	.. GUIDE-AUGMENTOR NOZZLE SUPPORT. . . . . USE ONLY ON 4080513	5		PAFBZ
	- 131		AN123339	88044	.. RIVET (AP)	2		PAFZZ
	- 132		4071164	52661	.. BRACKET-ACTUATOR GUIDE TRACK . . . . USE ONLY ON 4071150	10		PAFZZ
			4080514	52661	.. BRACKET-ACTUATOR GUIDE TRACK . . . . USE ONLY ON 4080513	10		PAFZZ
	- 133		AN123620	88044	.. RIVET (AP)	2		PAFZZ
	- 134		4075729	52661	.. NUT OPTION . . . . SEE OPTION TABLE	130		PAFZZ
	- 135		4071162	52661	.. STRIP-AUGMENTOR NOZZLE SUPPORT	5		PAFZZ
	- 136		4030789	52661	.. PIN-SHOULDER, HEADLESS . . . . 0.12475 AND 0.186 X 0.325 IN. LONG	1		PAFZZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
63 - 137		4055310	52661	.. STIFFENER-AUGMENTOR NOZZLE SUPPORT . . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 138	=	CR3523-4-01	05693	.. RIVET-BLIND, UNIVERSAL . . . . P&W PART NO. ST1173-01 SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
	=	CR3523-4-02	05693	.. RIVET-BLIND, UNIVERSAL . . . . P&W PART NO. ST1173-02 SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
	=	CR3523-4-03	05693	.. RIVET-BLIND, UNIVERSAL . . . . P&W PART NO. ST1173-03 SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
	=	NAS9307M-4-01	80205	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
	=	NAS9307M-4-02	80205	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
	=	NAS9307M-4-03	80205	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 139		MS9319-100	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 140		4060316	52661	.. STIFFENER-AUGMENTOR NOZZLE SUPPORT . . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 141		AN123399	88044	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 142		4060313	52661	.. STIFFENER-AUGMENTOR NOZZLE SUPPORT . . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 143		MS9319-102	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 144		MS9319-104	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 145		MS9319-101	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 146		MS9319-098	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 147		MS9319-004	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 148		4084884	52661	.. STIFFENER-AUGMENTOR NOZZLE SUPPORT . . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 149		4084885	52661	.. STIFFENER-AUGMENTOR NOZZLE SUPPORT . . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 150		MS9319-006	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 151		4083132	52661	.. STIFFENER-AUGMENTOR NOZZLE SUPPORT . . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 152		4083135	52661	.. STIFFENER-AUGMENTOR NOZZLE SUPPORT . . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 153		MS9319-050	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 154		MS9319-099	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 155		MS9318-052	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 156		AN123319	88044	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 157		AN123315	88044	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ
- 158		MS9319-052	96906	.. RIVET . . . . SERVICE REPAIR PART FOR 4080513	AR		PAFZZ

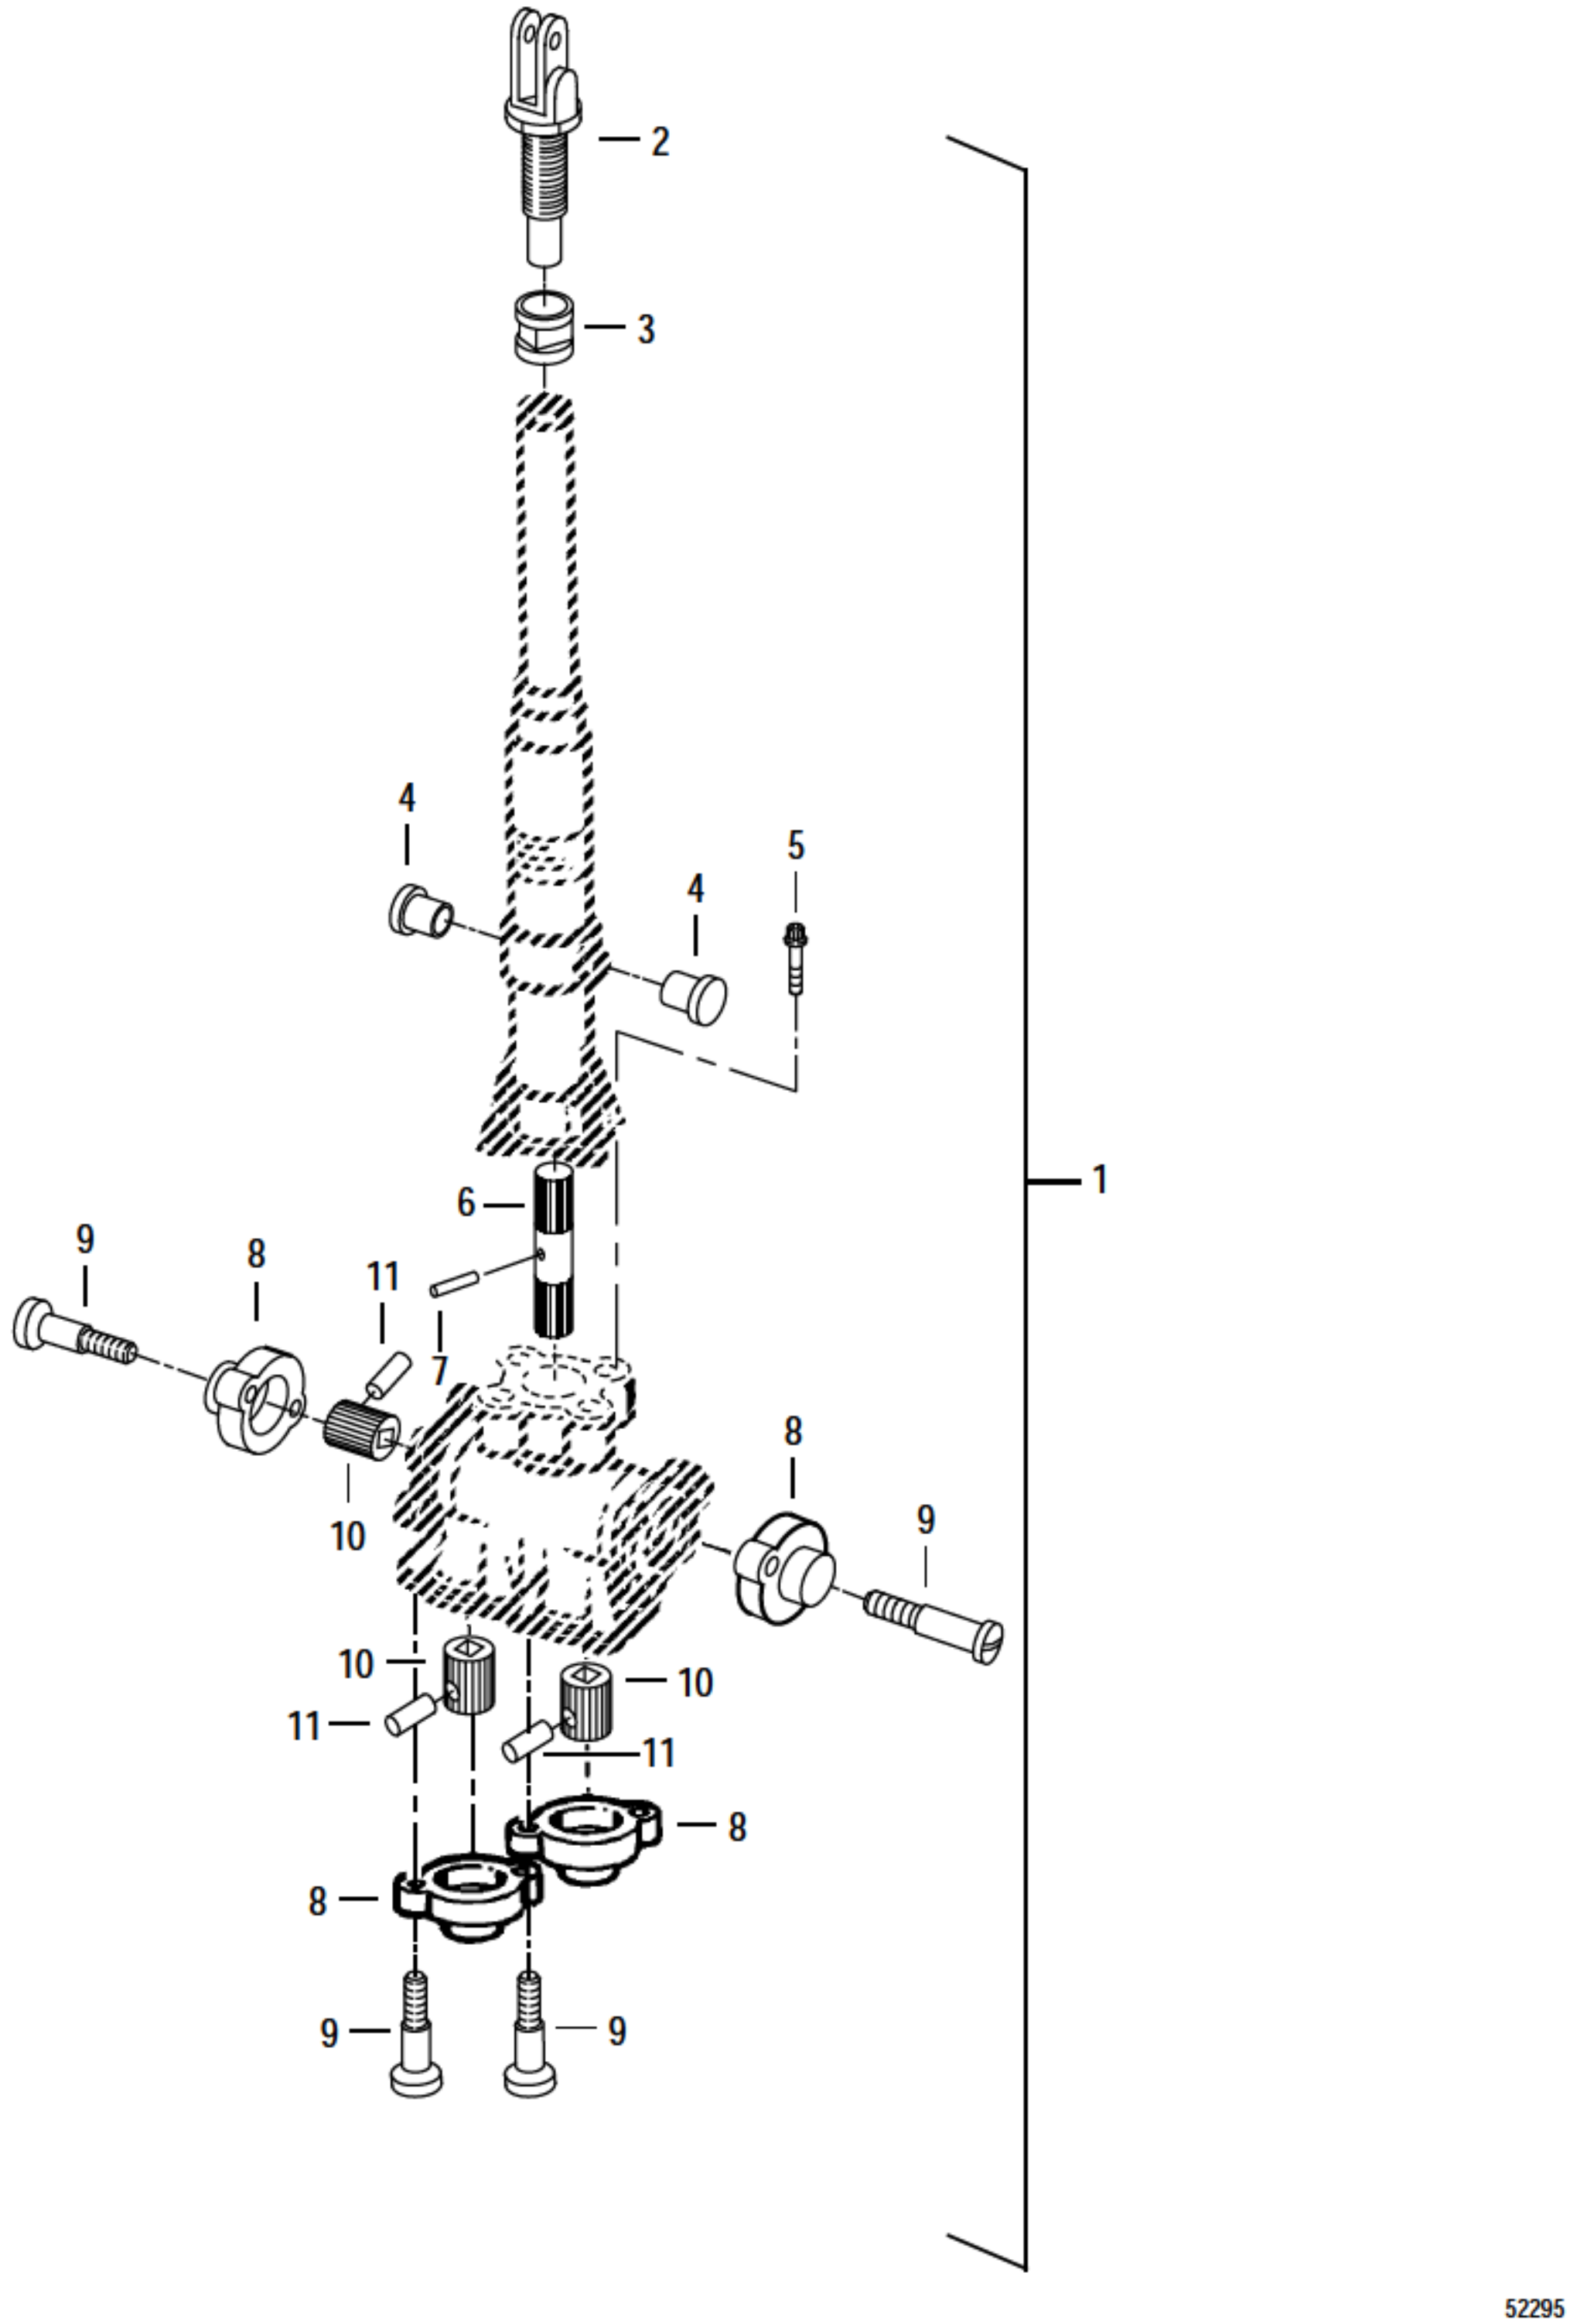


FIGURE 64. CONVERGENT NOZZLE PRIMARY BALL SCREW ACTUATOR

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	64 - 1	442021 #	06848	ACTUATOR-BALL SCREW, PRIMARY, CONVERGENT NOZZLE P&WA PART NO. 4085022 SUPERSEDES 441615 SEE FIG. 62-26 FOR NHA	1		PAODD
R		441615 #	06848	ACTUATOR-BALL SCREW, PRIMARY, CONVERGENT NOZZLE P&WA PART NO. 4076324 SUPERSEDED BY 442021 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
	- 2	2678723	06848	. CLEVIS ASSY-ACTUATOR	1		PAOZZ
	- 3	2675244	06848	. LOCKNUT	1		PAOZZ
	- 4	NAS813-8	80205	. CAP	2		PAOZZ
	- 5	953528-482	06848	. SCREW-MACHINE NO. 10-32 X 0.500 IN. LONG	4		PAFZZ
	- 6	2649812	06848	. SHAFT-DRIVE	1		PAFZZ
	- 7	MS16562-193	96906	. PIN (AP)	1		PAFZZ
	- 8	2651545	06848	. COVER-PROTECTIVE	4		PAOZZ
	- 9	AN515-8-16	88044	. SCREW (AP)	2		PAOZZ
	- 10	2646514	06848	. COUPLING	3		PAFZZ
	- 11	MS16562-193	96906	. PIN (AP)	1		PAFZZ

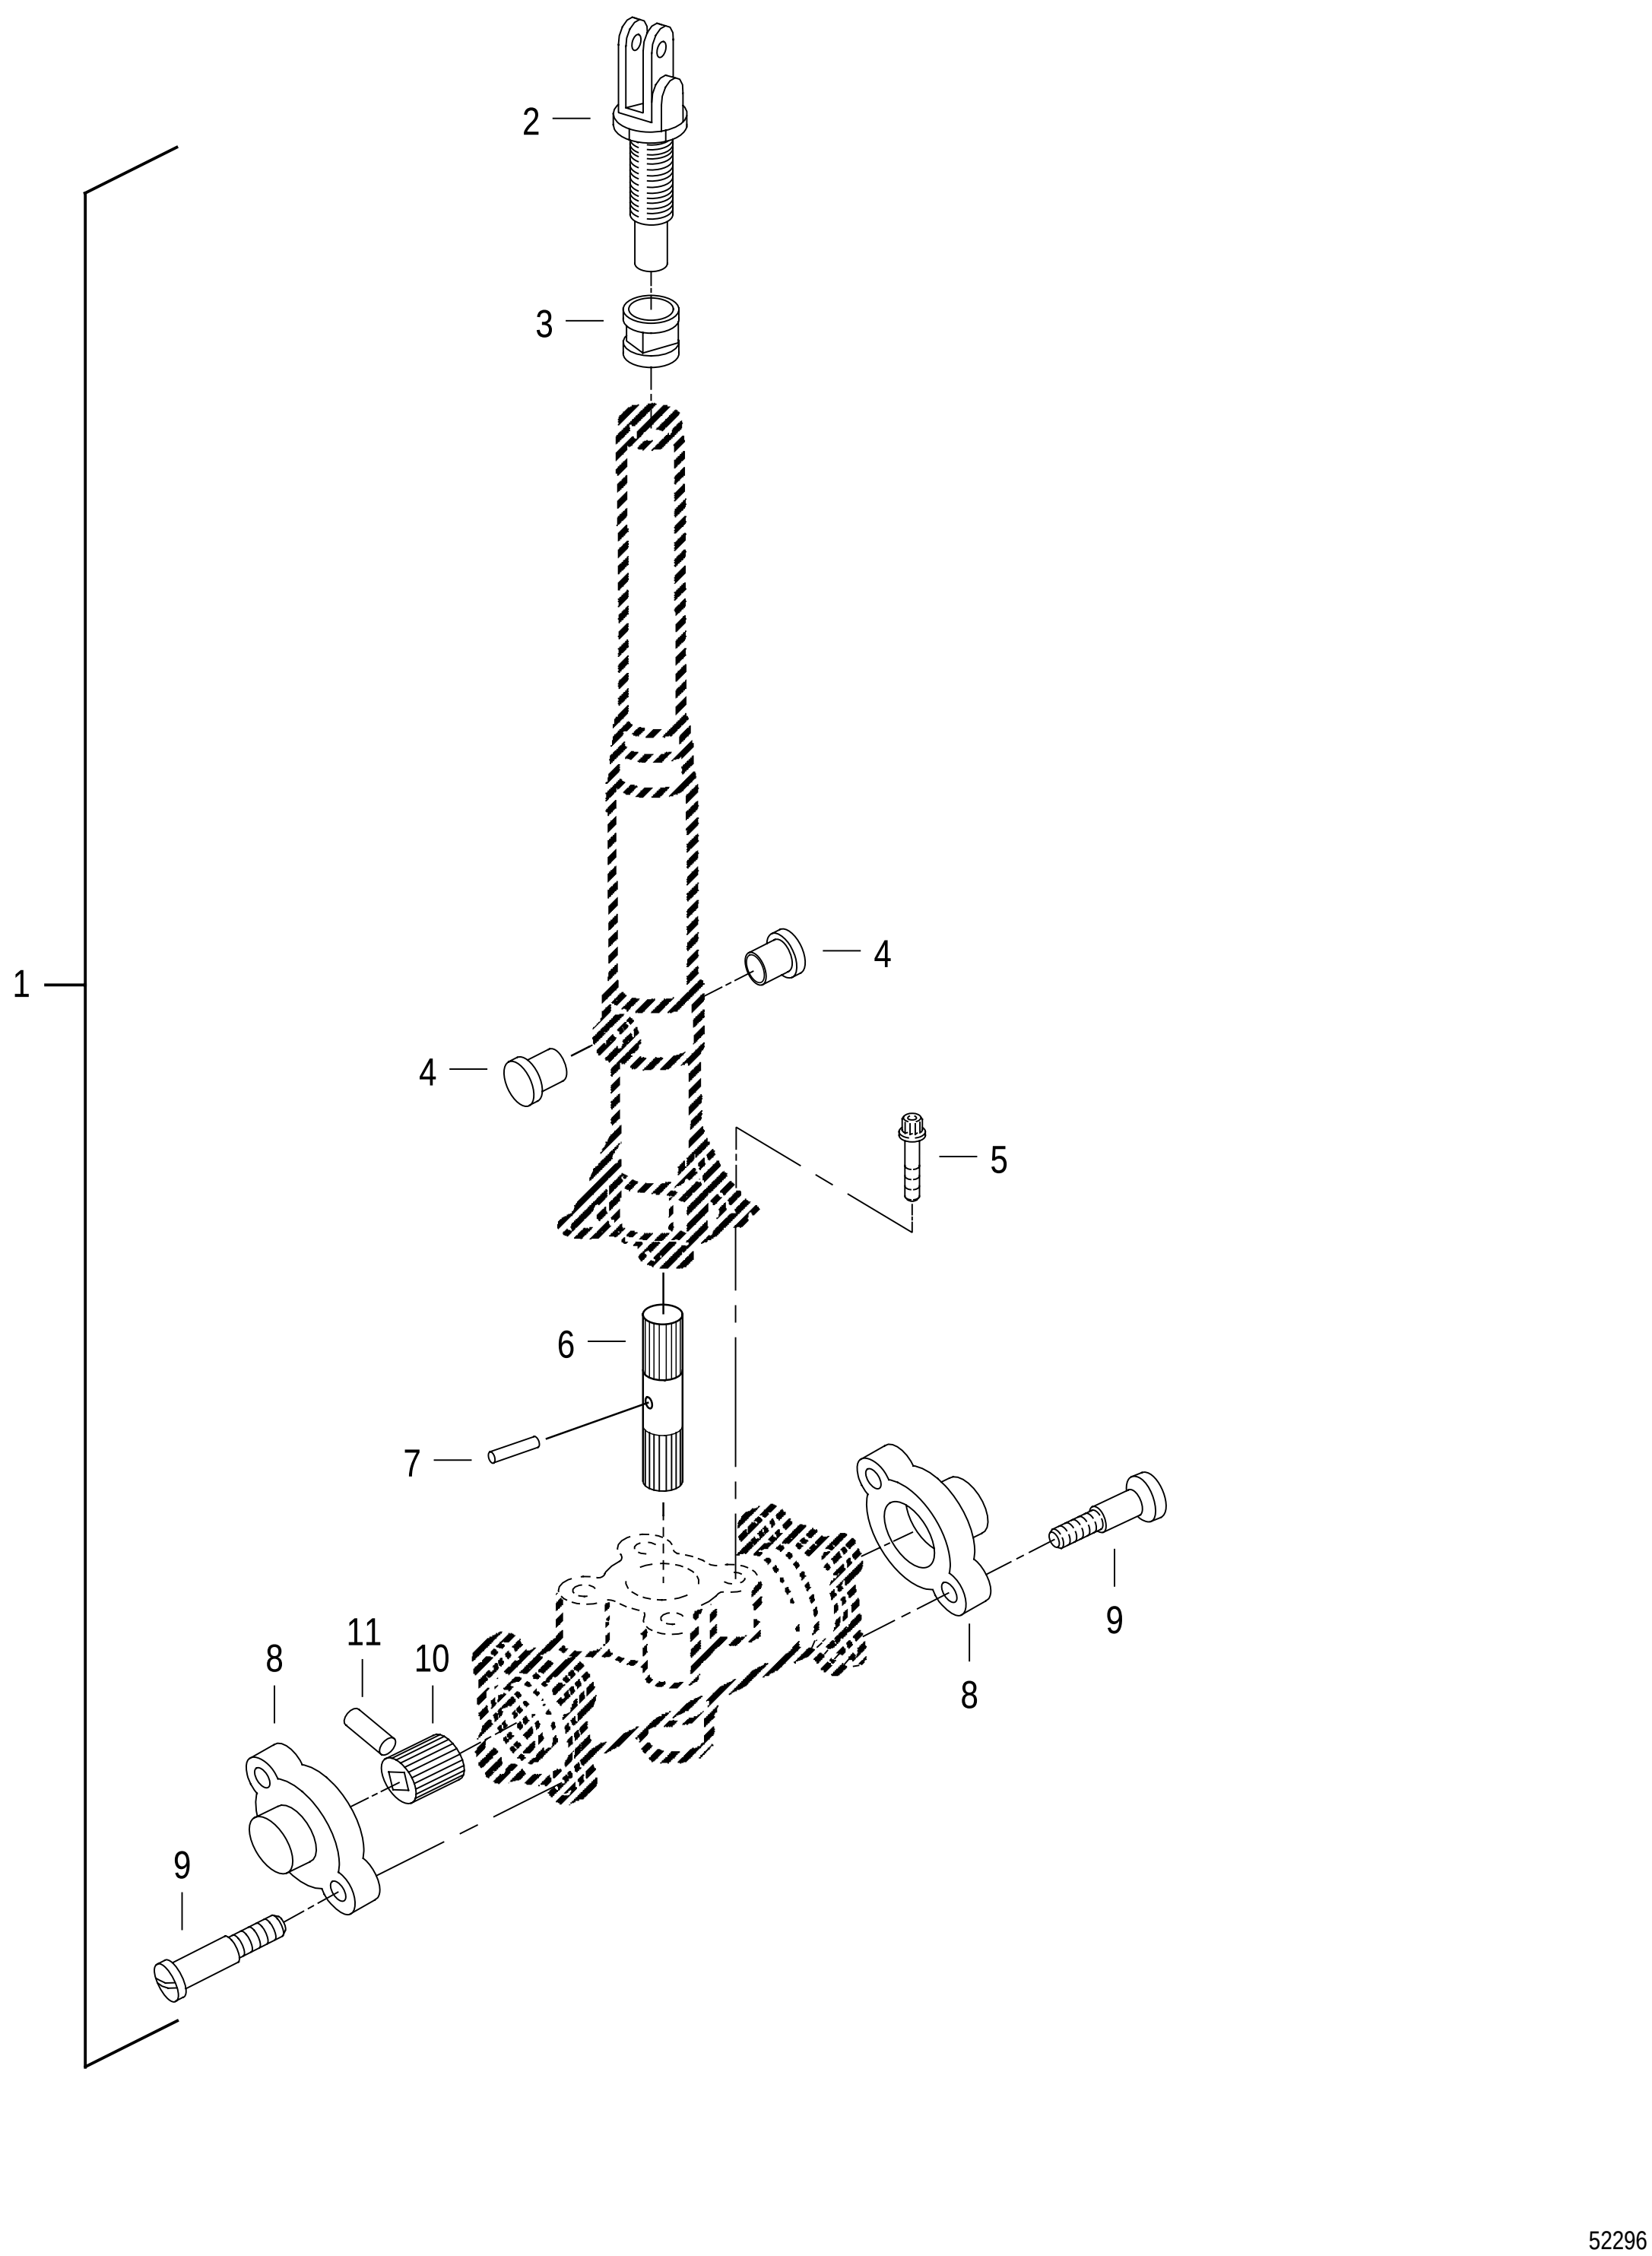


FIGURE 64A. CONVERGENT NOZZLE SECONDARY BALL SCREW ACTUATOR

	FIGURE & INDEX NUMBER	PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	64A - 1	442020	#	06848	ACTUATOR-BALL SCREW, SECONDARY, ...	4		PAODD
R					CONVERGENT NOZZLE			
R					P&WA PART NO. 4085021			
R					SUPERSEDES 441614			
R					SEE FIG. 62-27 FOR NHA			
		441614	#	06848	ACTUATOR-BALL SCREW, SECONDARY, ...	4		PAODD
					CONVERGENT NOZZLE			
					P&WA PART NO. 4076323			
R					SUPERSEDED BY 442020			
					PARTIAL BREAKDOWN FOLLOWS			
	- 2	2678723		06848	. CLEVIS ASSY-ACTUATOR	1		PAOZZ
	- 3	2675244		06848	. LOCKNUT	1		PAOZZ
	- 4	NAS813-8		80205	. CAP	2		PAOZZ
	- 5	953528-482		06848	. SCREW-MACHINE	4		PAFZZ
					NO. 10-32 X 0.500 IN. LONG			
	- 6	2649812		06848	. SHAFT-DRIVE	1		PAFZZ
	- 7	MS16562-193		96906	. PIN (AP)	1		PAFZZ
	- 8	2651545		06848	. COVER-PROTECTIVE	2		PAOZZ
	- 9	AN515-8-16		88044	. SCREW (AP)	2		PAOZZ
	- 10	2646514		06848	. COUPLING	1		PAFZZ
	- 11	MS16562-193		96906	. PIN (AP)	1		PAFZZ

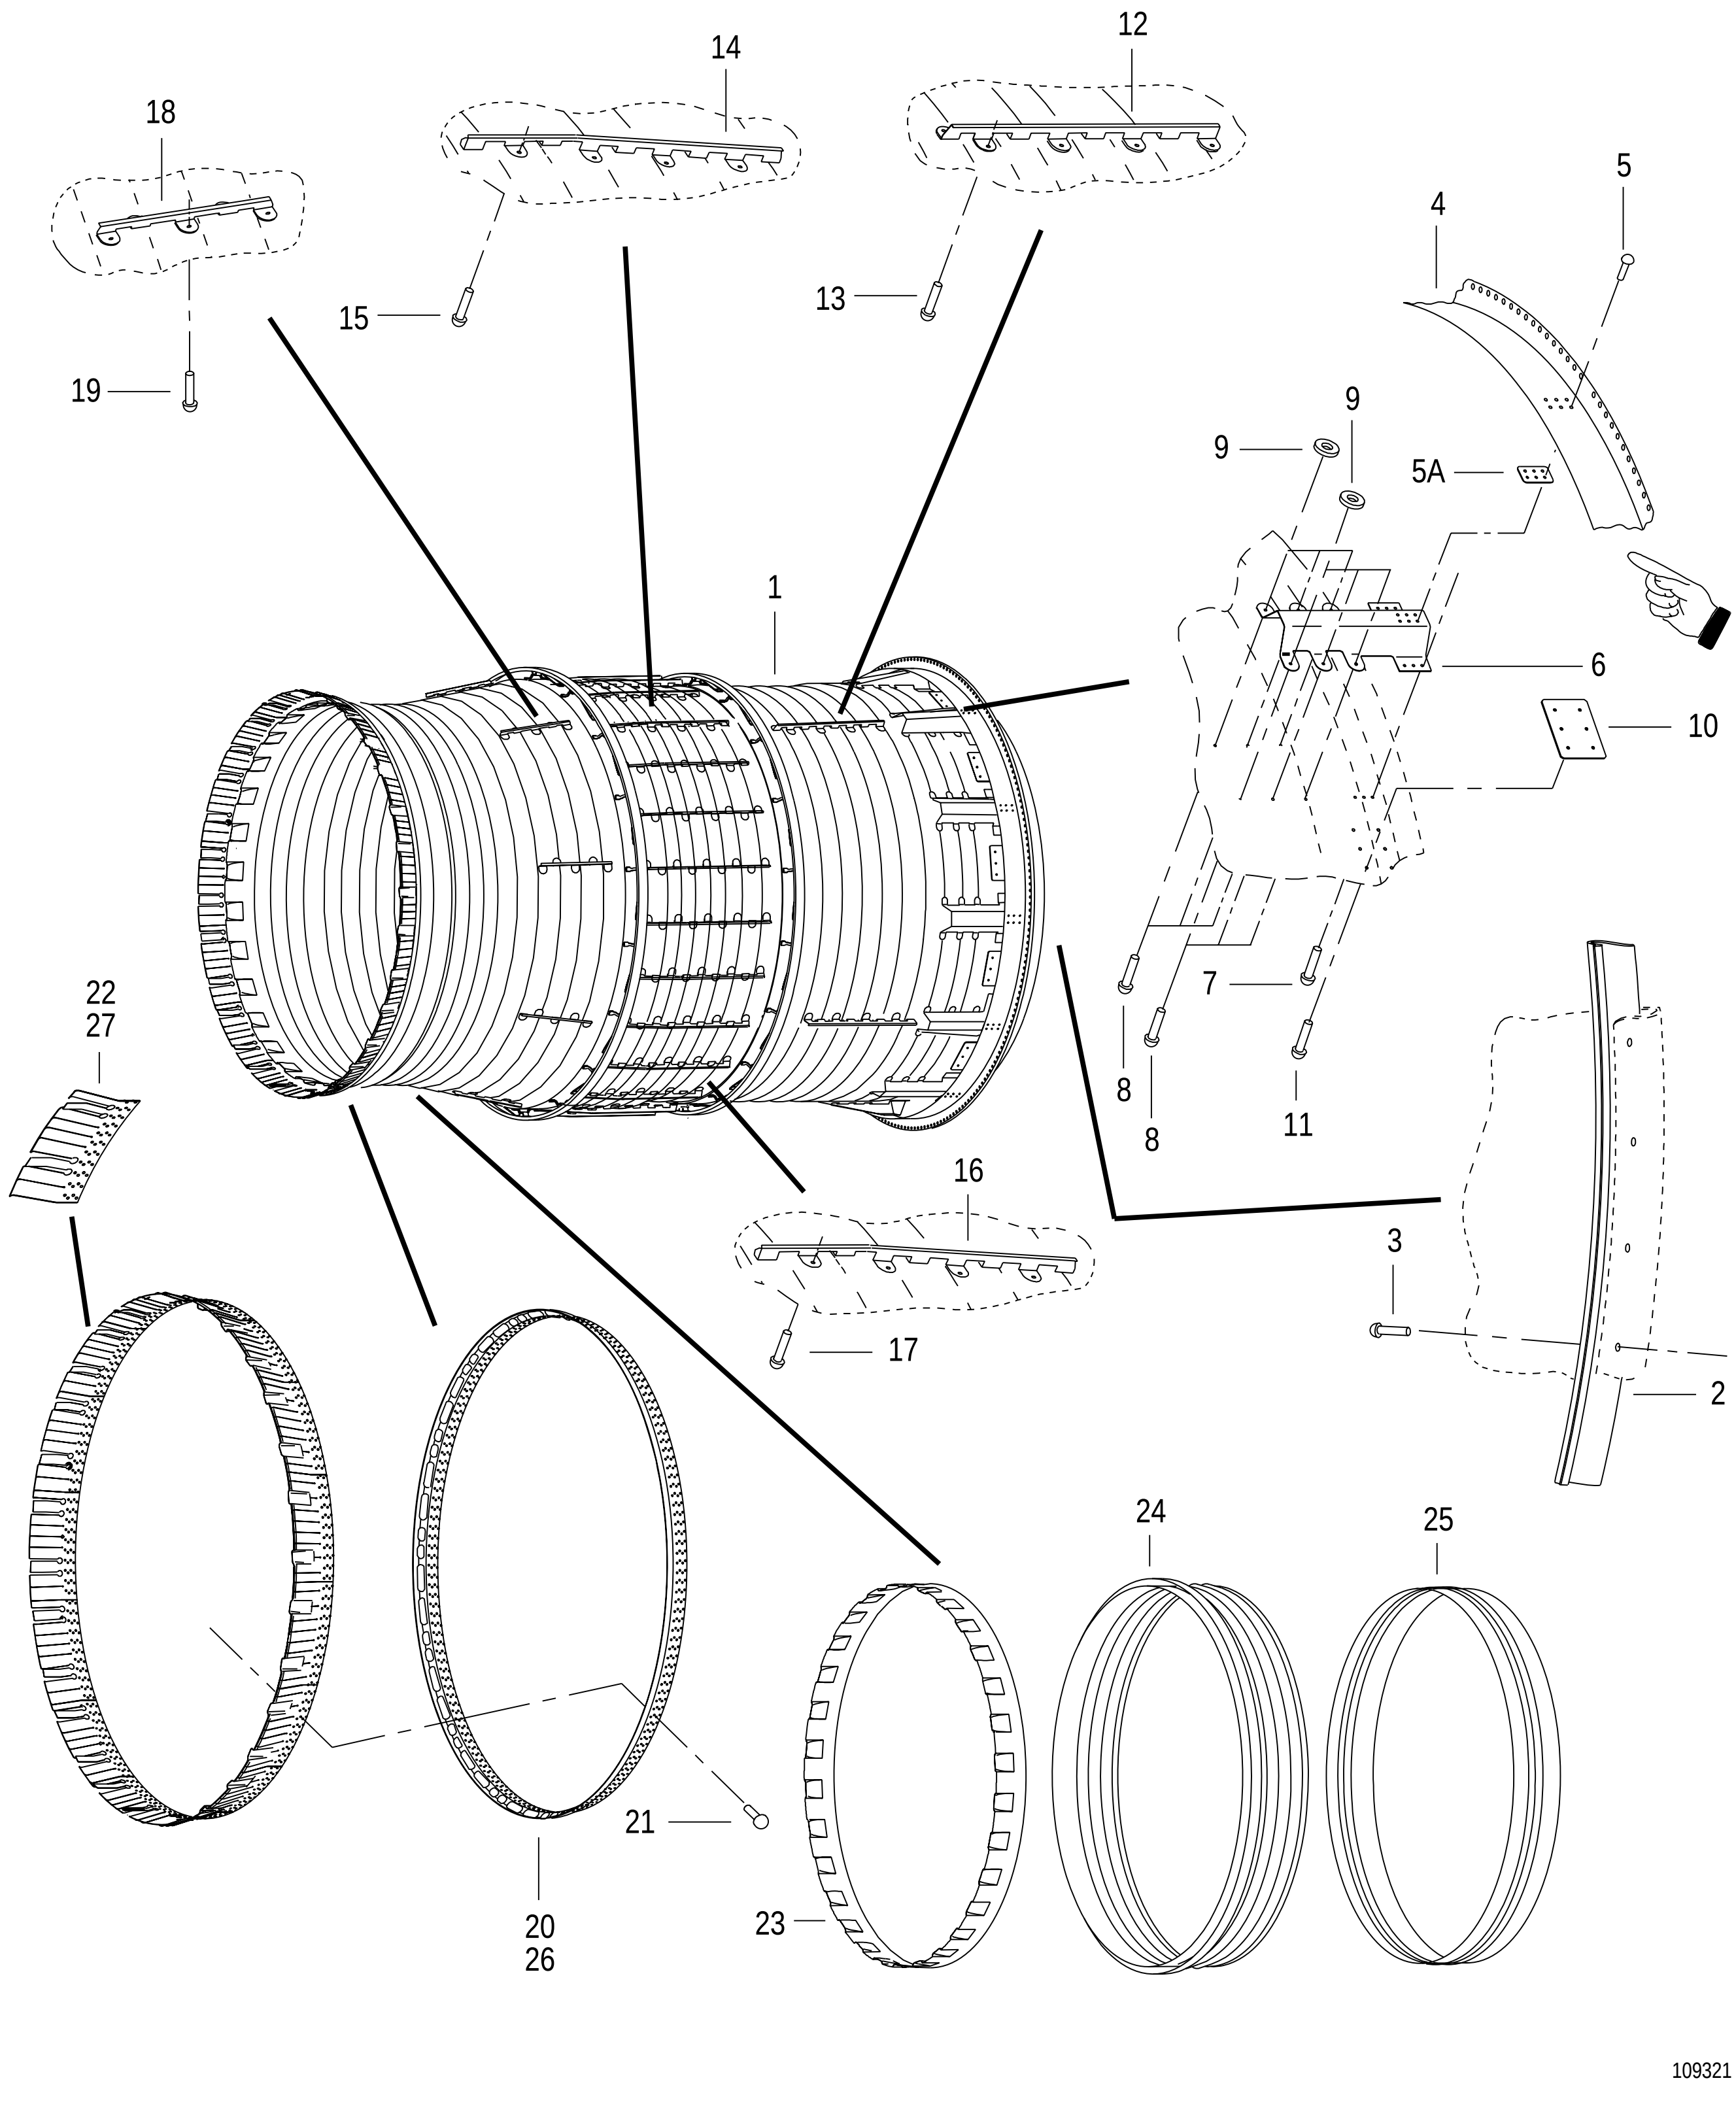


FIGURE 65. AUGMENTOR COMBUSTION CHAMBER LINER ASSY

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	65 - 1	4080412-01	52661	LINER-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF SEE FIG. 62-40 FOR NHA	1	YK/YM	PAODD
		4081214-01	52661	LINER-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF SEE FIG. 62-40 FOR NHA REOP AND REID OF 4079666-01 DO NOT PROCURE FROM P&W	1	YK	PAODD
		= 4083180-01	52661	LINER-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF REOP AND REID OF 4081214-01 DO NOT PROCURE FROM P&W SEE FIG. 62-40A FOR NHA	1		PAODD
		= 4083169-01	52661	LINER-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF SEE FIG. 62-40A FOR NHA	1	YL/YM	PAODD
		4084715-01	52661	LINER-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF SEE FIG. 62-40 FOR NHA PARTIAL BREAKDOWN FOLLOWS	1	YN	PAODD
	- 2	4079849	52661	. DAMPER-AUGMENTOR COMBUSTION CHAMBER . . LINER	1		PAFZZ
	- 3	AN123319	88044	. RIVET (AP).	31		PAFZZ
	- 4	4078432	52661	. FLANGE-AUGMENTOR COMBUSTION CHAMBER . . . LINER	1		PADZZ
	- 5	AN123335	88044	. RIVET (AP).	90		PADZZ
R R	- 5A	4084447	52661	. SPACER-AUGMENTOR LINER . . . . USE ONLY ON 4084715-01	AR		PAFZZ
	- 6	4078389	52661	. BRACKET-AUGMENTOR COMBUSTION CHAMBER . LINER	15		PAFZZ
	- 7	AN123335	88044	. RIVET (AP).	6		PADZZ
	- 8	AN123352	88044	. RIVET (AP).	6		PAFZZ
	- 9	4037404	52661	. PLATE-REINFORCING, AUGMENTOR . . . . COMBUSTION CHAMBER LINER (AP)	6		PAFZZ
	- 10	4079689	52661	. PLATE-AUGMENTOR COMBUSTION CHAMBER . . . . LINER USE ONLY ON 4081214-01	15		PAFZZ
	- 11	AN123336	88044	. RIVET (AP). . . . . USE ONLY ON 4081214-01	6		PAFZZ
	- 12	= 4079600	52661	. STIFFENER-AUGMENTOR COMBUSTION . . . . CHAMBER LINER	5		PAFZZ
		= 4080834	52661	. STIFFENER-AUGMENTOR COMBUSTION . . . . CHAMBER LINER	5		PAFZZ
	- 13	AN123335	88044	. RIVET (AP).	8		PADZZ
	- 14	= 4078396	52661	. STIFFENER-AUGMENTOR COMBUSTION . . . . CHAMBER LINER	5		PAFZZ
		= 4080835	52661	. STIFFENER-AUGMENTOR COMBUSTION . . . . CHAMBER LINER	5		PAFZZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
65 - 15		AN123335	88044	. RIVET (AP).	9		PADZZ
- 16		4080835	52661	. STIFFENER-AUGMENTOR COMBUSTION . . . . CHAMBER LINER	20		PAFZZ
- 17		AN123335	88044	. RIVET (AP).	9		PADZZ
- 18	=	4073697	52661	. STIFFENER-AUGMENTOR COMBUSTION . . . . CHAMBER LINER	8		PAFZZ
	=	4080836	52661	. STIFFENER-AUGMENTOR COMBUSTION . . . . CHAMBER LINER	8		PAFZZ
- 19		AN123335	88044	. RIVET (AP).	5		PADZZ
- 20		4071334	52661	. LOUVER-AUGMENTOR COMBUSTION CHAMBER . . LINER, ASSY OF (UNDRILLED)	1		PAFZZ
- 21		AN123336	88044	. RIVET (AP).	320		PAFZZ
- 22		4060885	52661	. SEAL-ASSY OF, AUGMENTOR COMBUSTION . . . . . . CHAMBER DUCT USE ONLY ON 4080412-01 AND 4081214-01	15		PAFZZ
		4058991	52661	. SEAL-AUGMENTOR COMBUSTION CHAMBER . . . . . DUCT, ASSY OF SUITABLE SUB. FOR 4060885 AF ASSIGNED APPLICATION	15		PAFZZ
		4083156	52661	. SEAL-ASSY OF, AUGMENTOR COMBUSTION . . . . . . CHAMBER DUCT USE ONLY ON 4083169-01, 4083180-01, AND 4084715-01 (R)	15		PAFZZ
- 23		4084039	52661	. LINER-AUGMENTOR COMBUSTION CHAMBER . . . . . SERVICE REPAIR FOR 4080412-01	1		PAFBZ
- 24		4082663-01	52661	. LINER-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF SERVICE REPAIR FOR 4080412-01	1		PAFBZ
- 25		4084071-01	52661	. LINER-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF SERVICE REPAIR FOR 4080412-01, 4081214-01, 4083169-01 AND 4083180-01	1		PADDD
- 26		4074715	52661	. LOUVER-AUGMENTOR COMBUSTION CHAMBER . . LINER, ASSY OF SERVICE REPAIR FOR 4083169-01 AND 4083180-01	1		PAFZZ
- 27		4084030	52661	. SEAL-AUGMENTOR COMBUSTION CHAMBER . . . . . DUCT, ASSY OF SERVICE REPAIR FOR 4083169-01 AND 4083180-01	15		PAFZZ

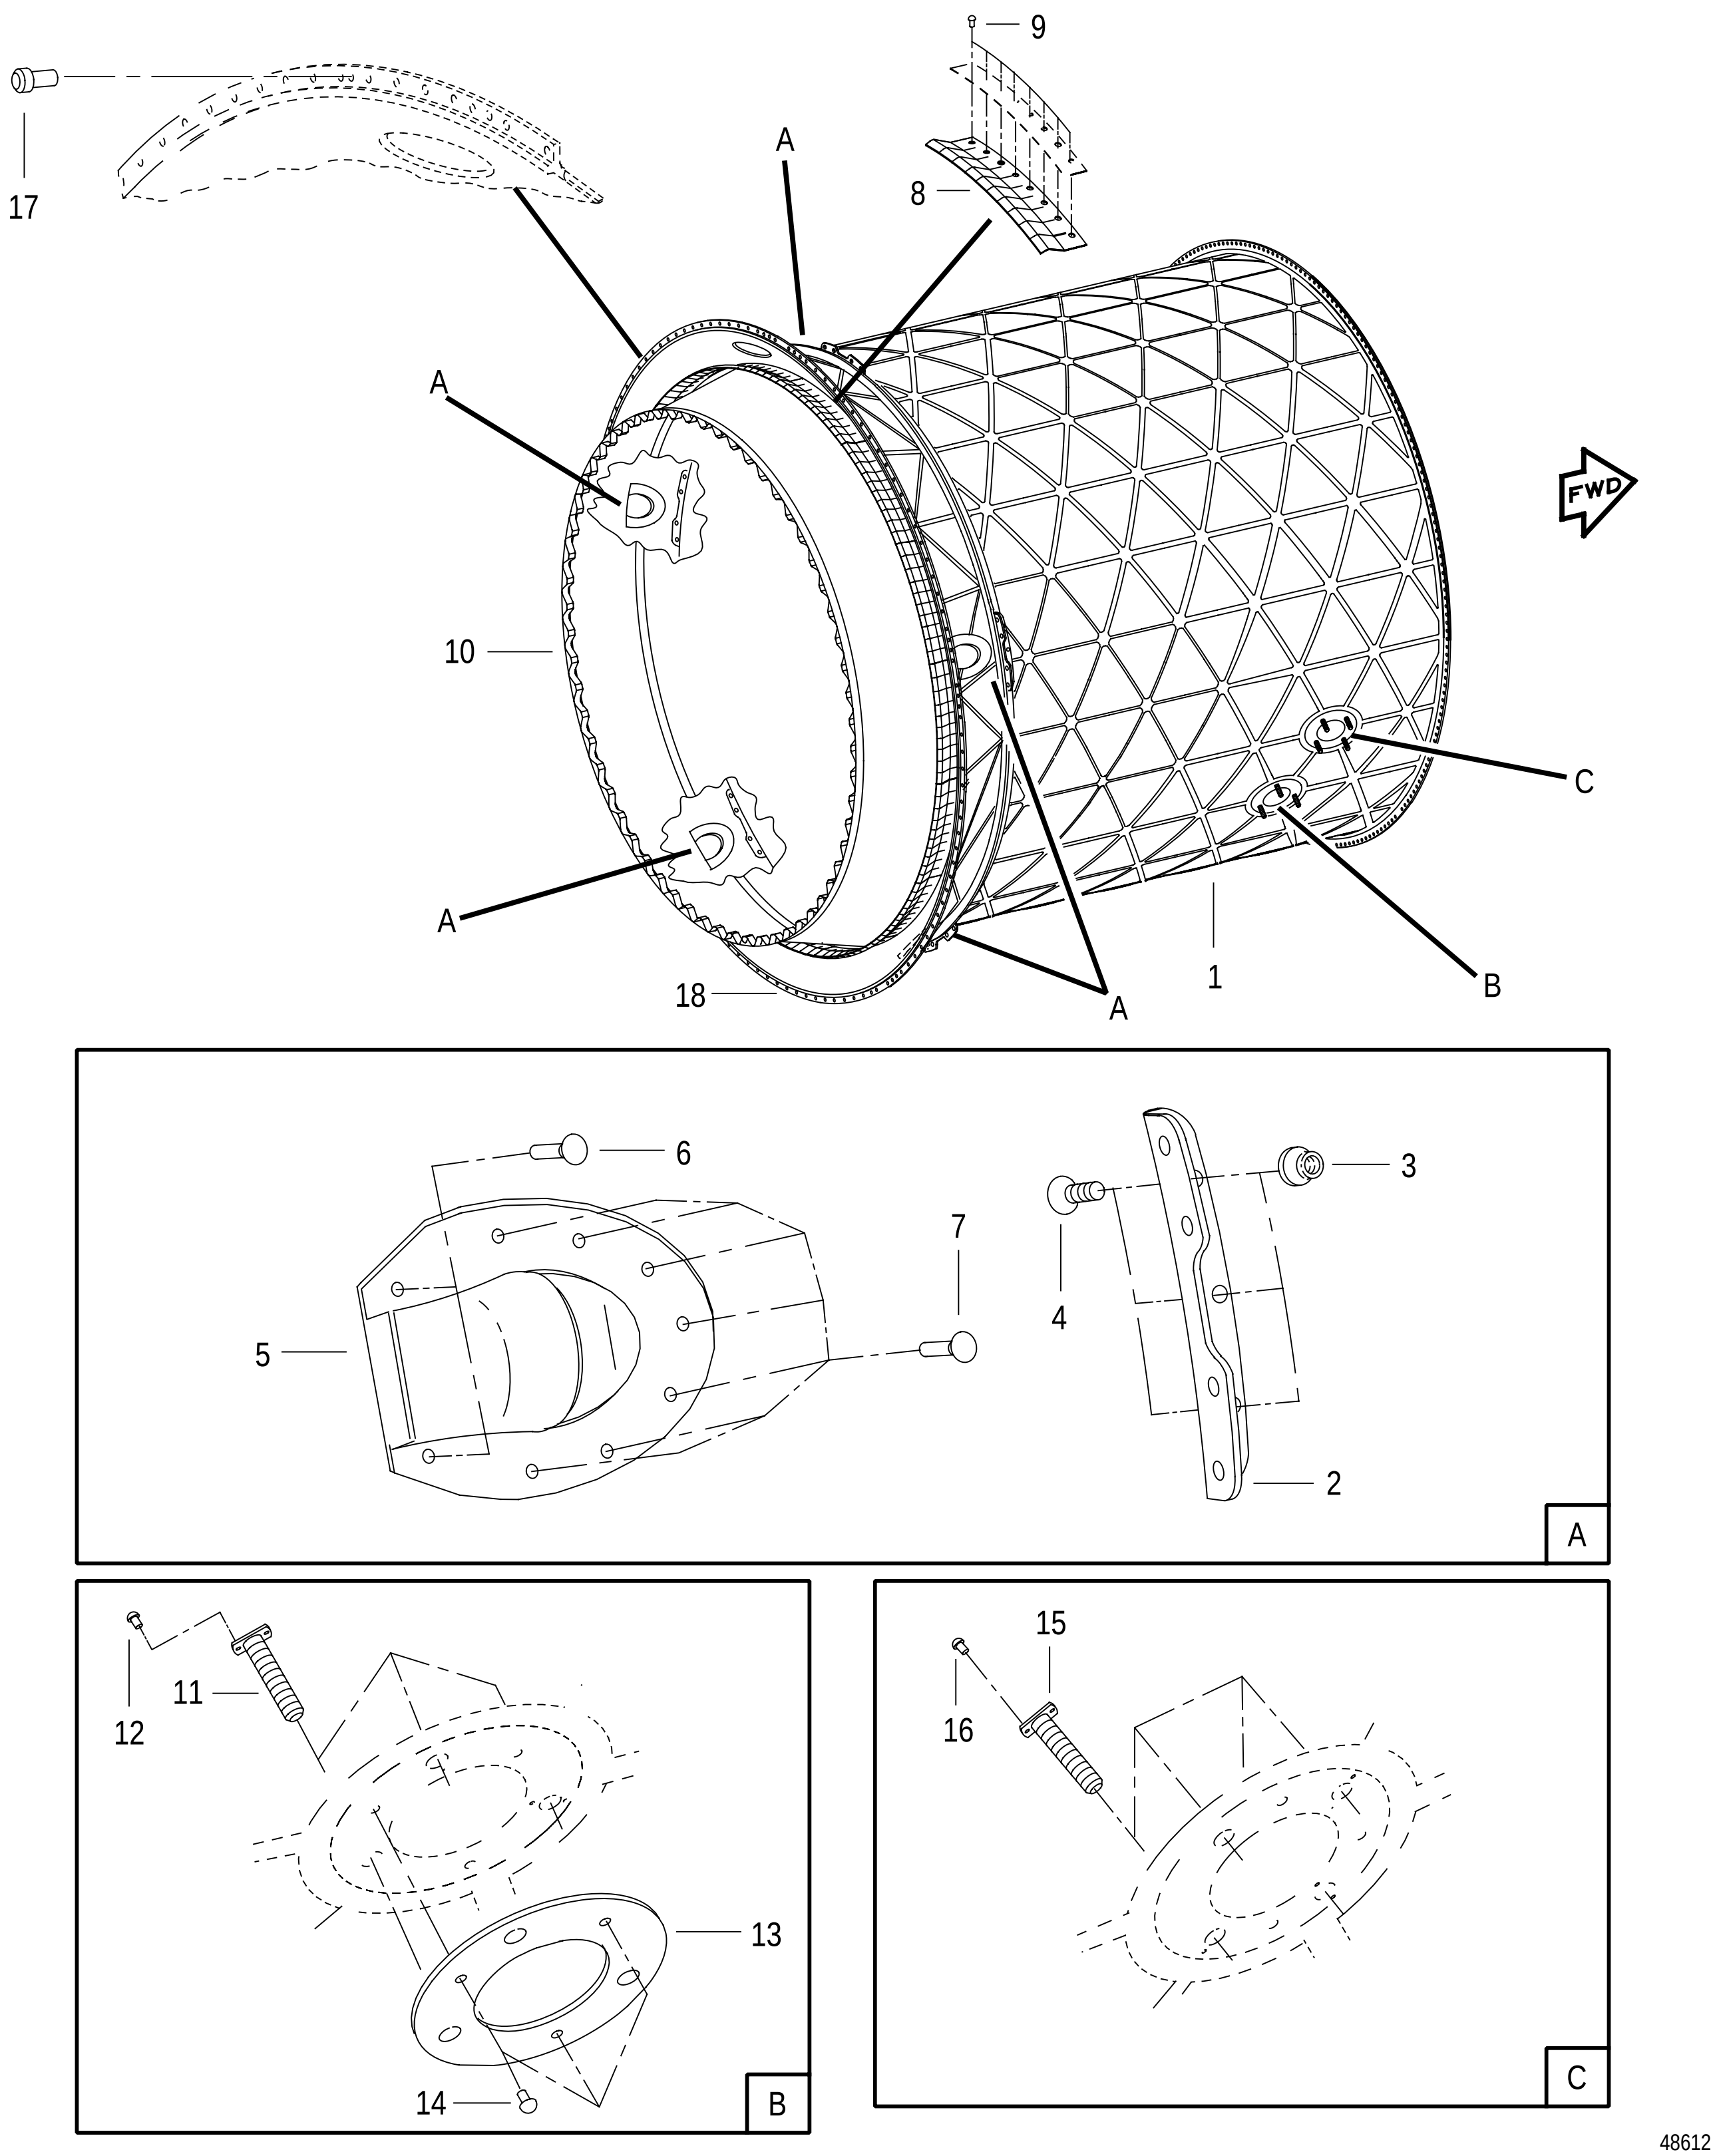


FIGURE 66. AUGMENTOR COMBUSTION CHAMBER DUCT ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
66 - 1	4073475	52661	DUCT-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF	1	KS	PAFDD
	4082964	52661	DUCT-AUGMENTOR COMBUSTION CHAMBER, ... ASSY OF SEE FIG. 62-41 FOR NHA PARTIAL BREAKDOWN FOLLOWS	1	KT	PAFDD
- 2	4076046	52661	. BRACKET-CONVERGENT NOZZLE CYLINDER......	5		PAFZZ
- 3	HL379V-8	56878 73197 92215	. COLLAR-PIN-RIVET, THREADED, SELF-LOCKING .. 0.250-28 X 0.484 IN. LONG (AP) P&WA PART NO. ST2140-08	3		PAFZZ
- 4	HL13V-8-5	56878 73197 92215	. PIN-RIVET-THREADED, COUNTERSUNK .... 0.250-28 X 0.312 IN. GRIP (AP) P&WA PART NO. ST2494-05	3		PAFZZ
- 5	4073477	52661	. SEAL-AUGMENTOR COMBUSTION CHAMBER ..... DUCT	5		XA
- 6	MS9318-098	96906	. RIVET (AP)......................................	2		PAFZZ
- 7	MS9319-098	96906	. RIVET (AP)......................................	7		PAFZZ
- 8	4071176-01	52661	. SEAL-AUGMENTOR NOZZLE SUPPORT, ASSY OF . USE ONLY ON 4073475	15		PAFZZ
	4081140-01	52661	. SEAL-AUGMENTOR COMBUSTION CHAMBER, ... REAR, SUBASSY OF USE ONLY ON 4082964	15		PAFZZ
- 9	MS9319-052	96906	. RIVET (AP)......................................	8		PAFZZ
- 10	4073476-01	52661	. DUCT-AUGMENTOR COMBUSTION CHAMBER, ... REAR, SUBASSY OF	1		PADDD
- 11	ST2138-03	52661	. BOLT-ANCHOR.................................. 0.250-28UNJF-3A X 1.200 IN. LONG	3		PAFBZ
- 12	MS9318-102	96906	. RIVET (AP)......................................	1		PAOZZ
- 13	4076047	52661	. BOSS-LIGHT OFF DETECTOR.....................	1		PAFZZ
- 14	MS9318-060	96906	. RIVET (AP)......................................	3		PAFZZ
- 15	ST2137-04	52661	. BOLT-ANCHOR.................................. 0.190-32UNJF-3A X 0.850 IN. LONG	4		PAFBZ
- 16	MS9318-052	96906	. RIVET (AP)......................................	1		PAFZZ
- 17	4030789	52661	. PIN-SHOULDER, HEADLESS .... 0.12475 AND 0.186 X 0.325 IN. LONG	1		PAFZZ
- 18	4073478-01	52661	. DUCT-AUGMENTOR COMBUSTION CHAMBER, ... REAR, SUBASSY OF	1		XA



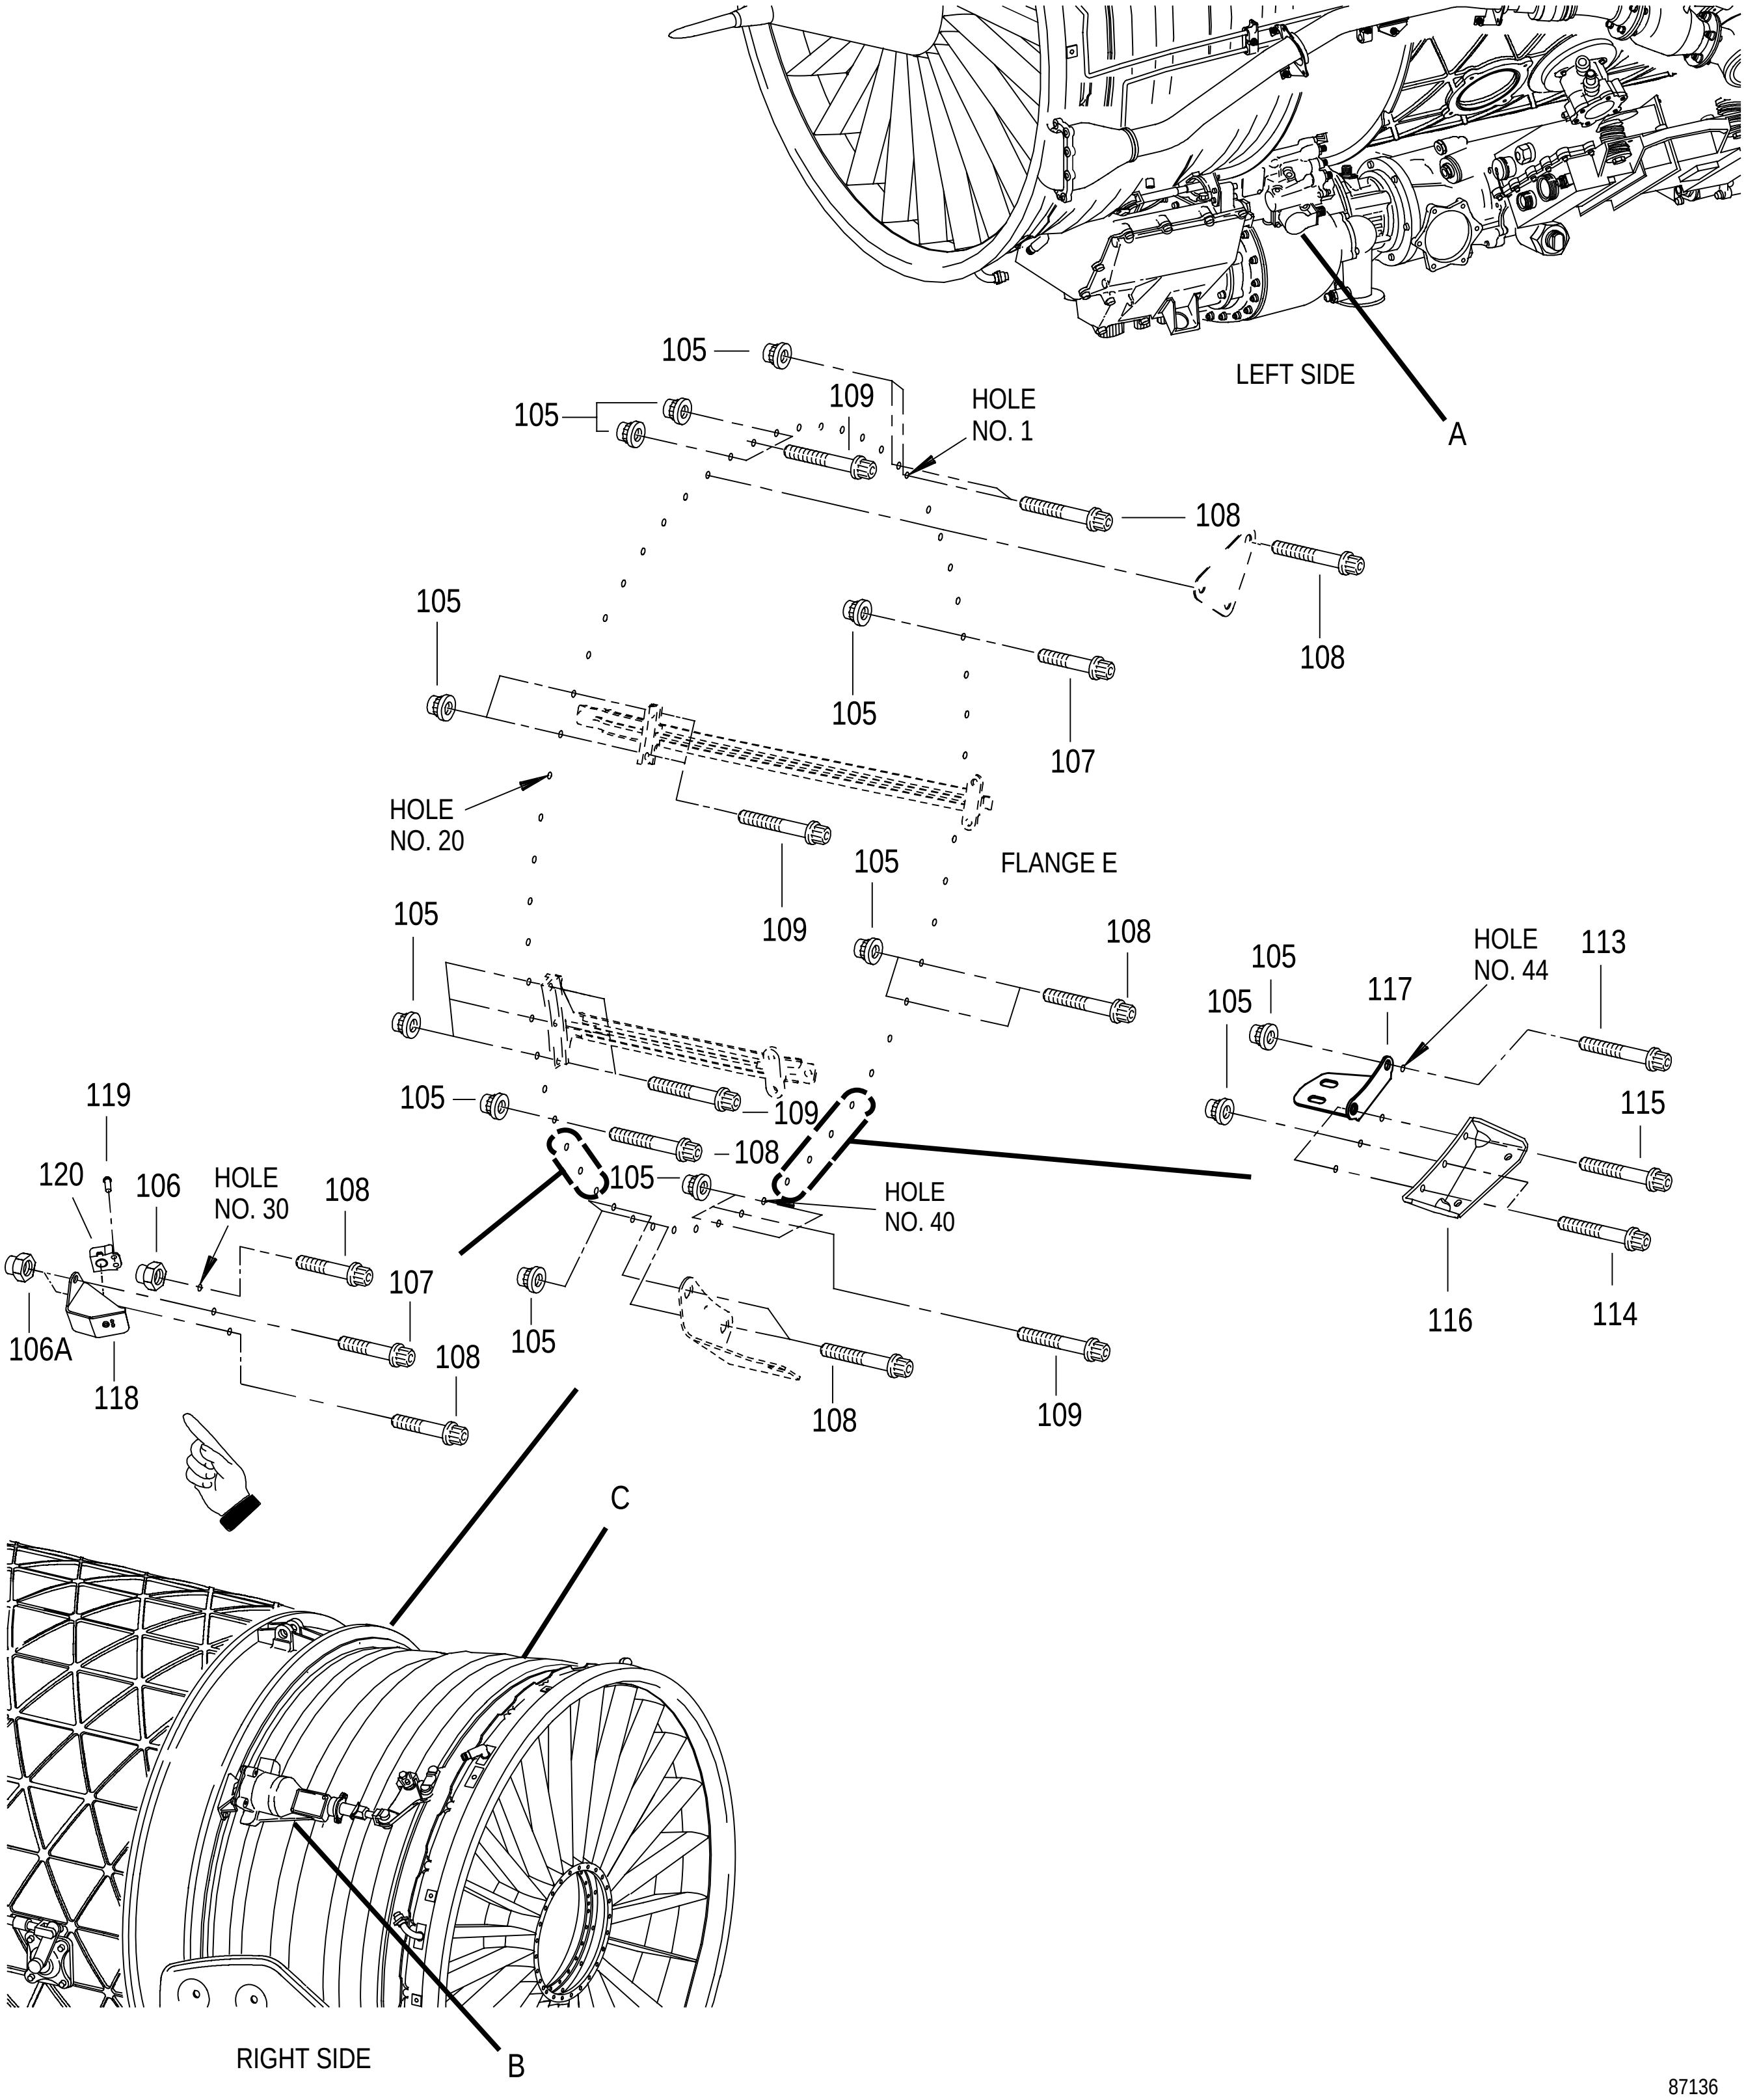


FIGURE 67. INLET/FAN MODULE
(SHEET 1 OF 5)

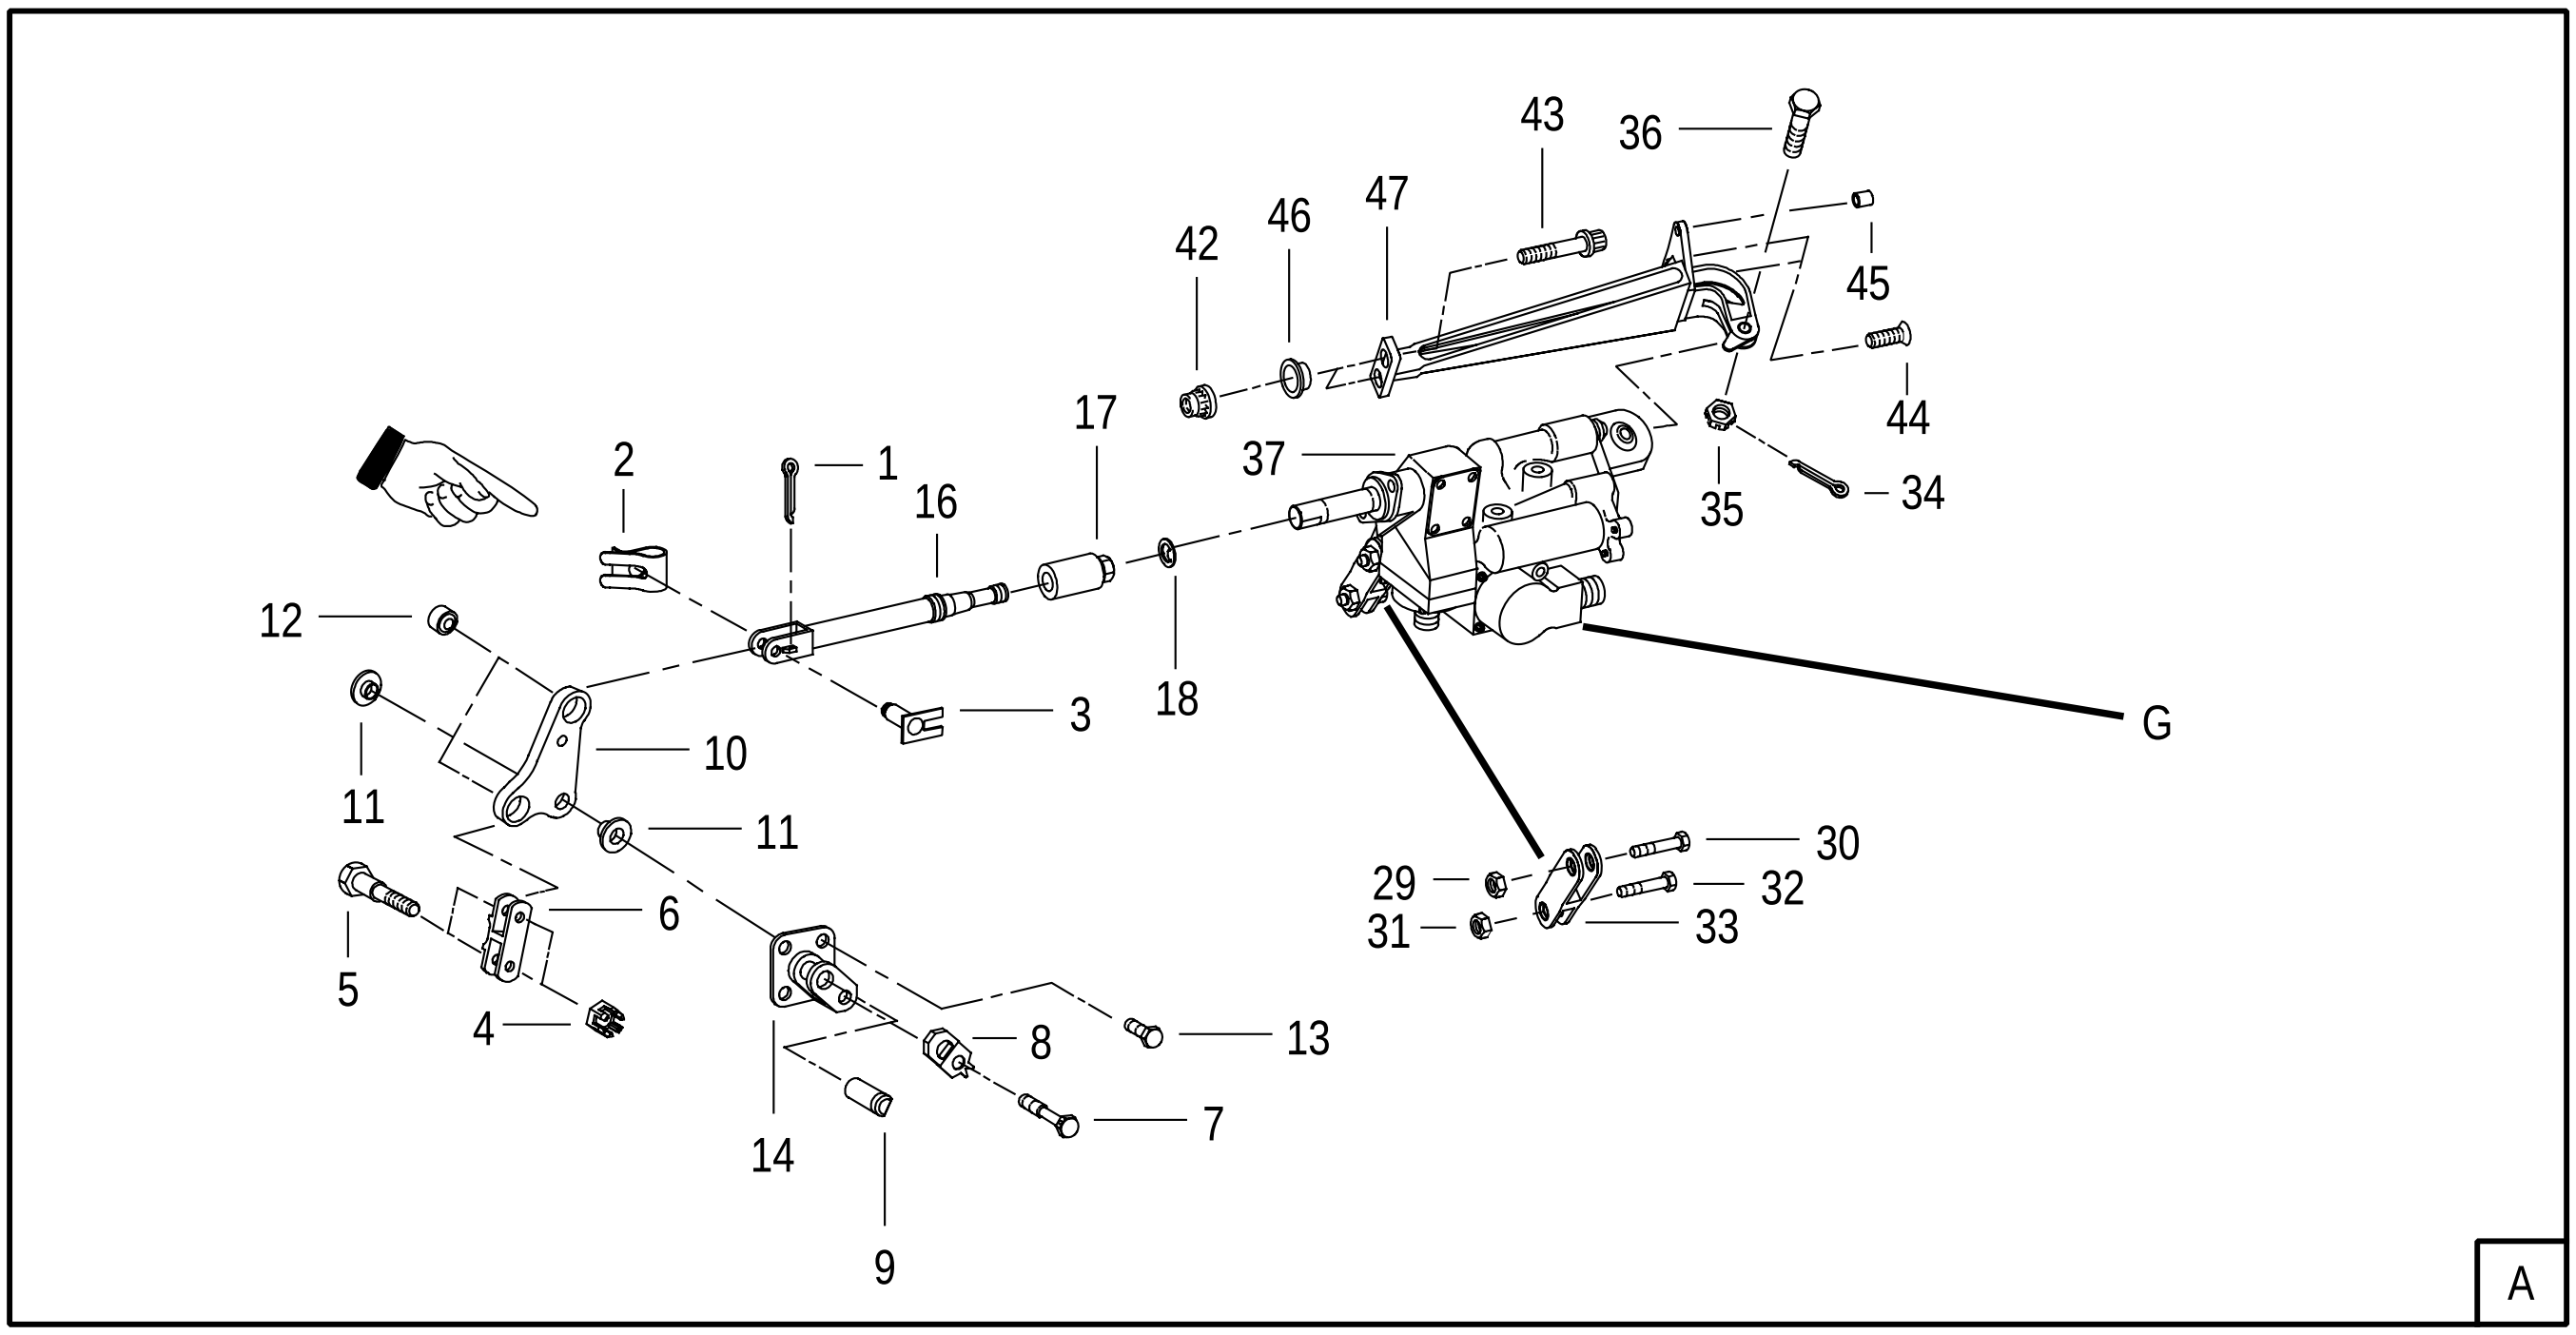

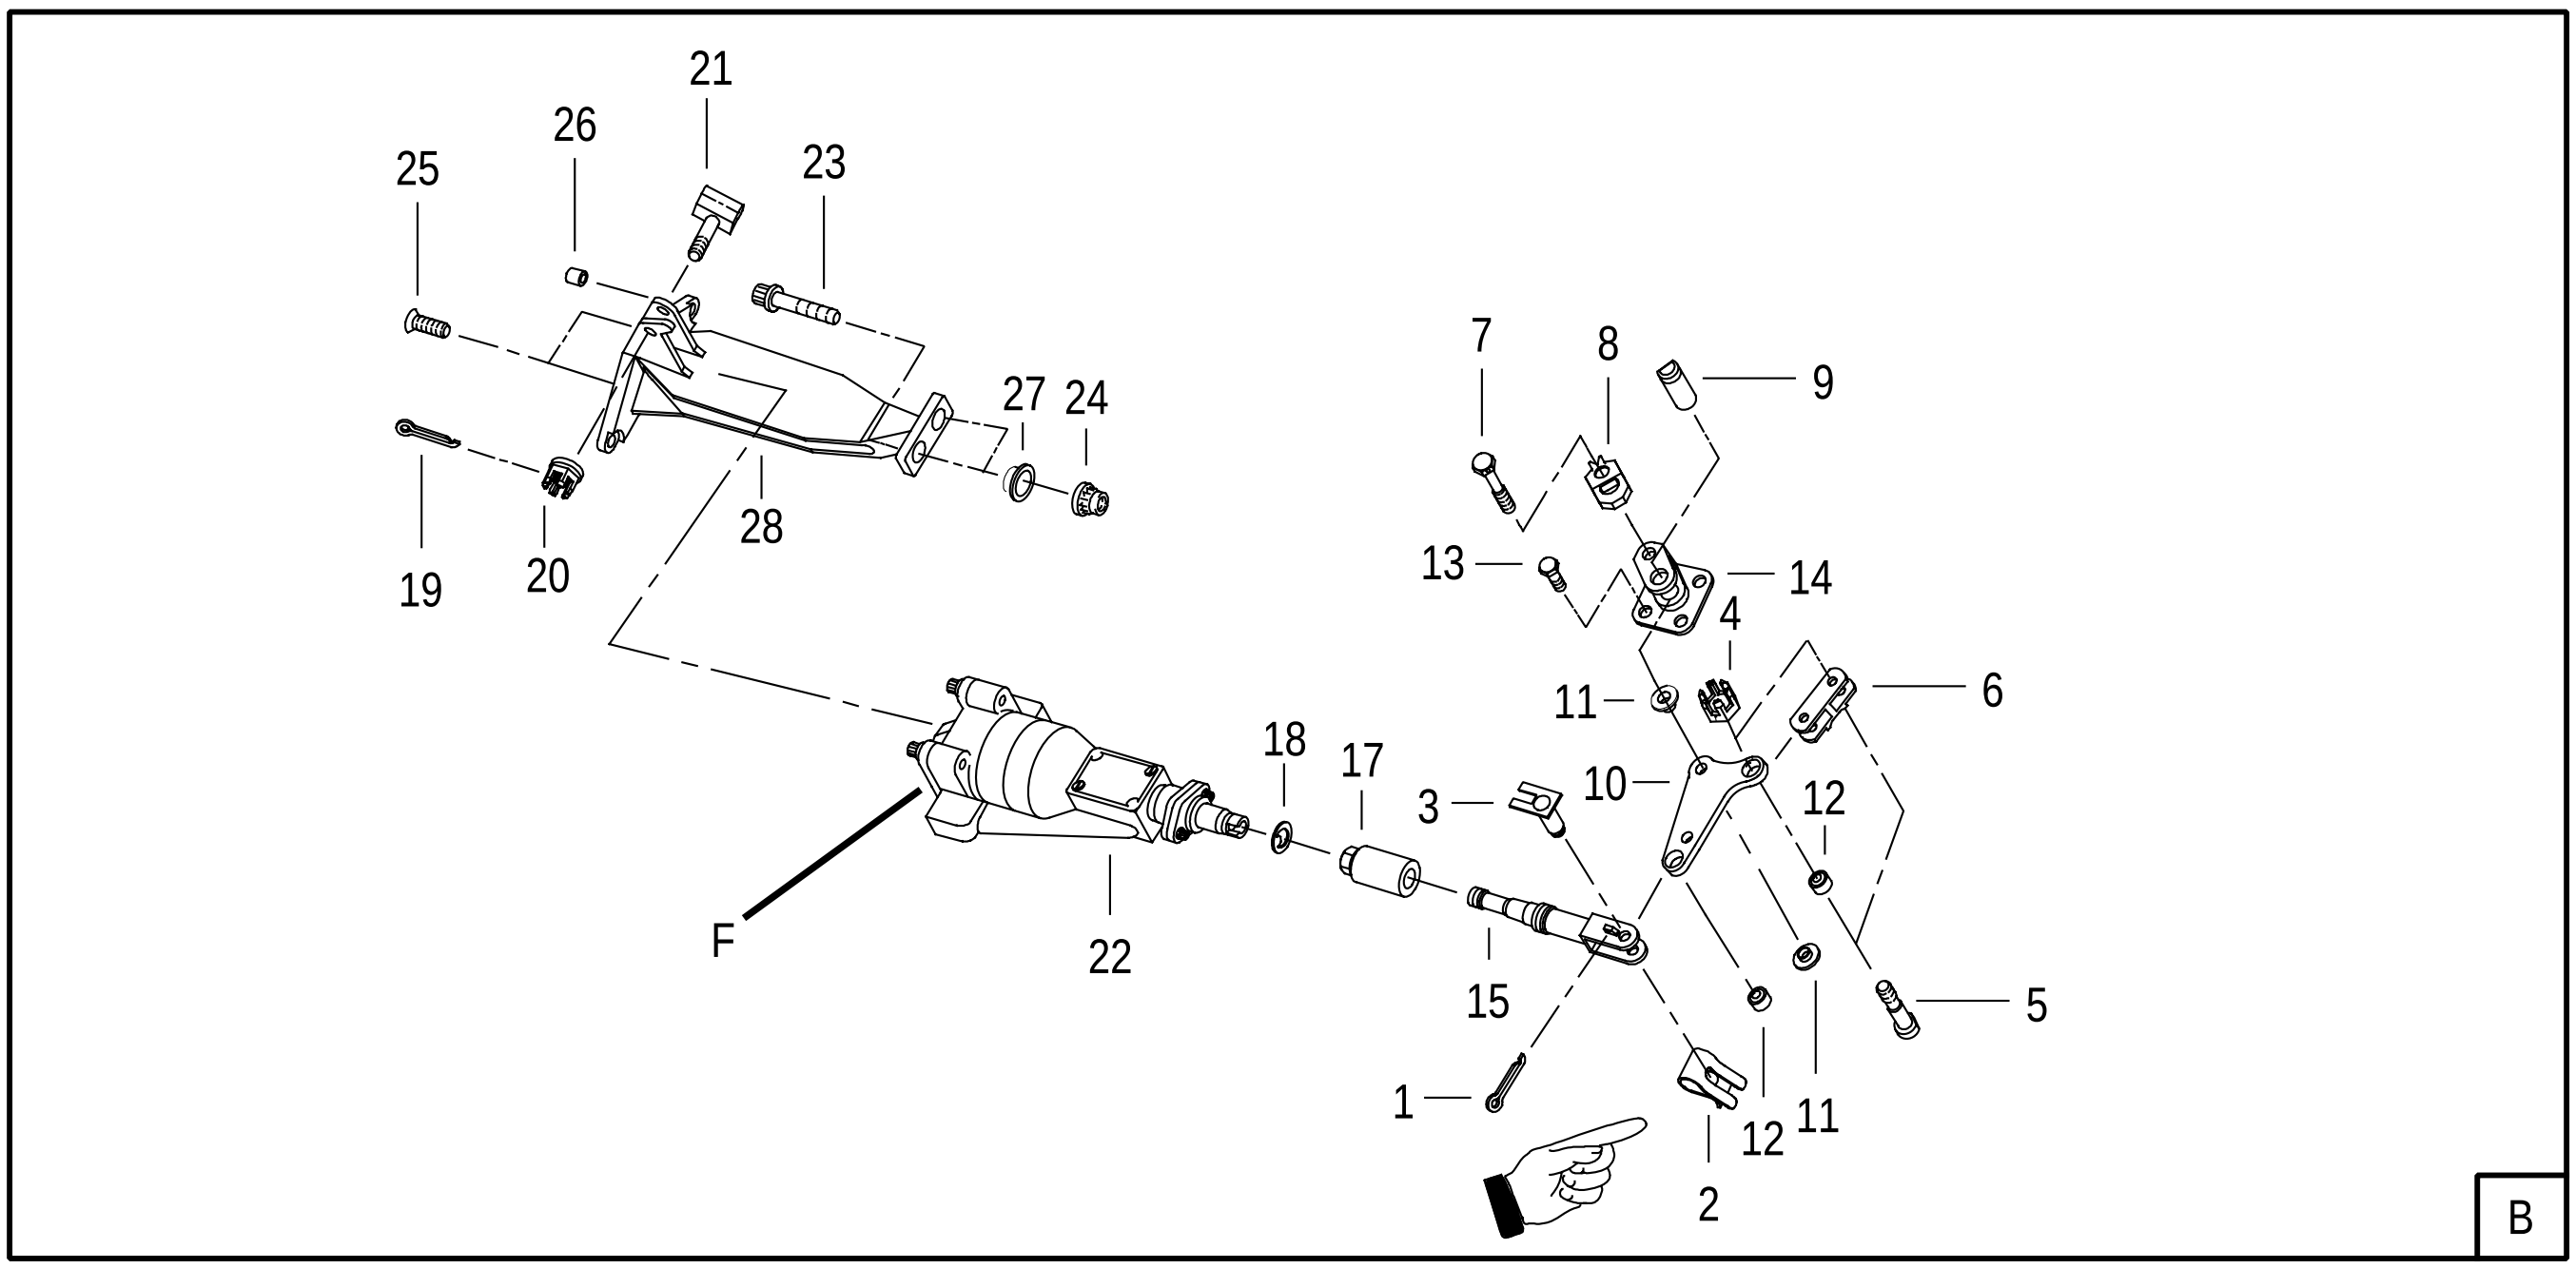

47846

FIGURE 67. INLET/FAN MODULE
(SHEET 2 OF 5)

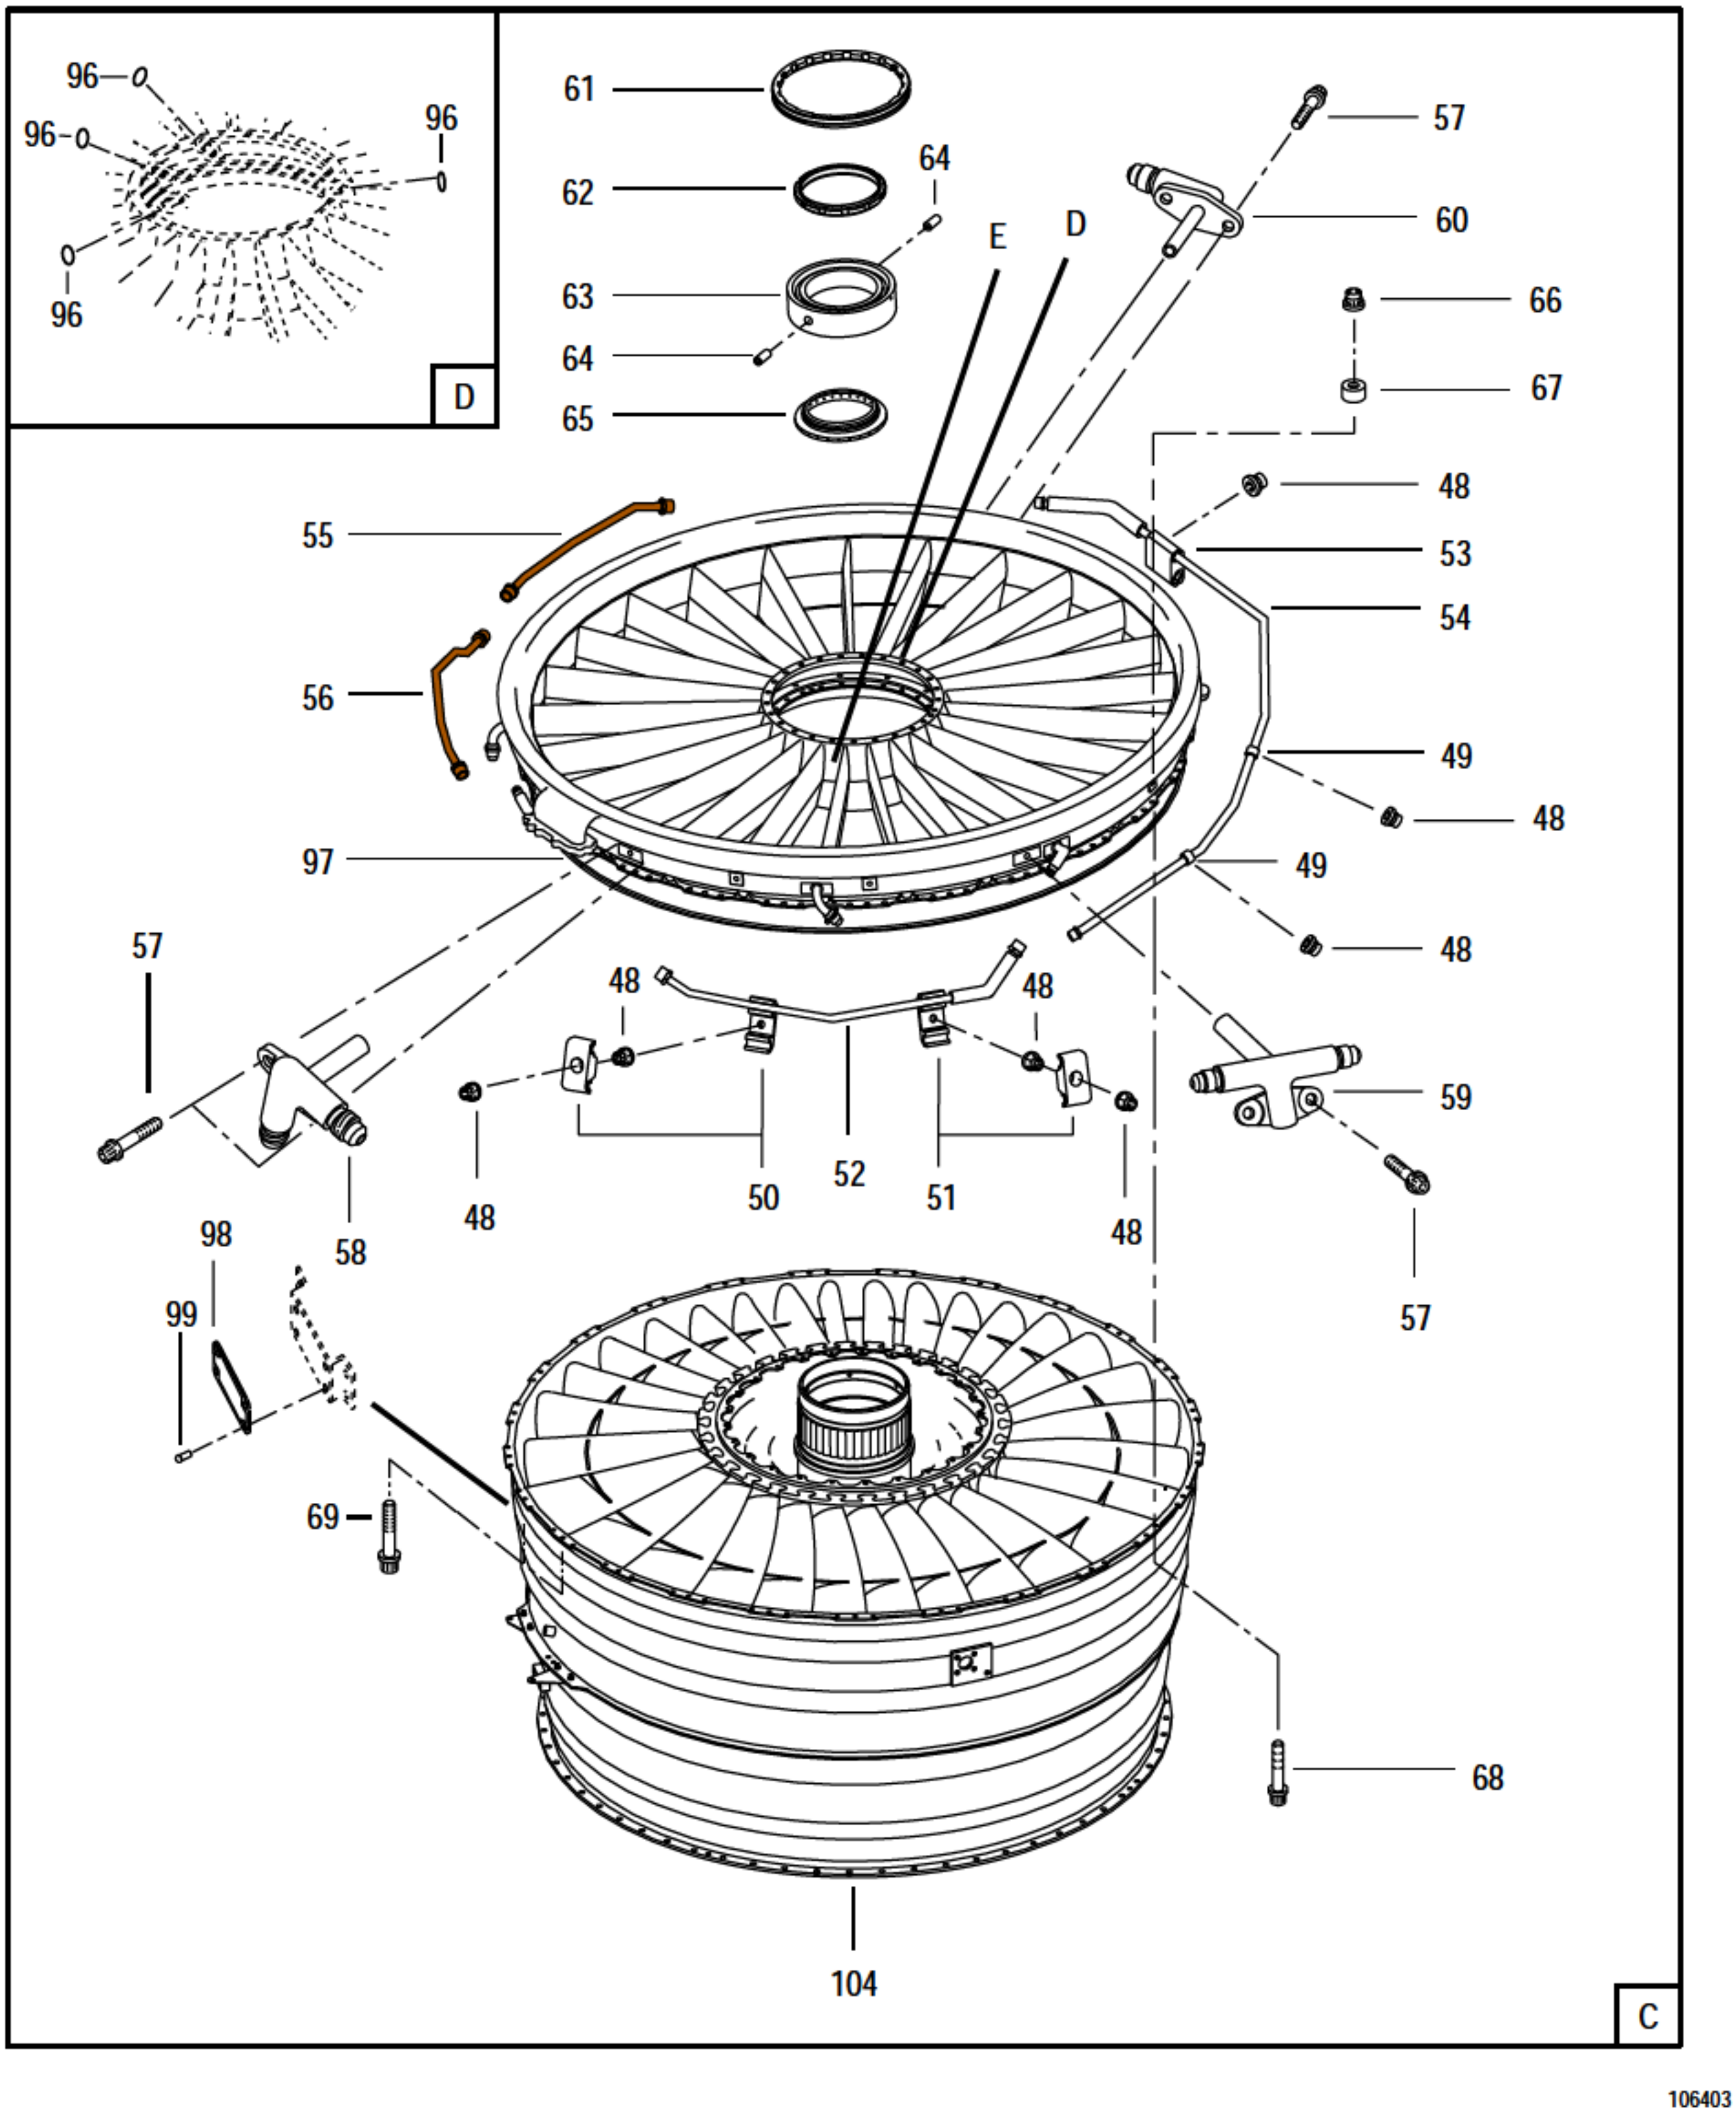


FIGURE 67. INLET/FAN MODULE
(SHEET 3 OF 5)



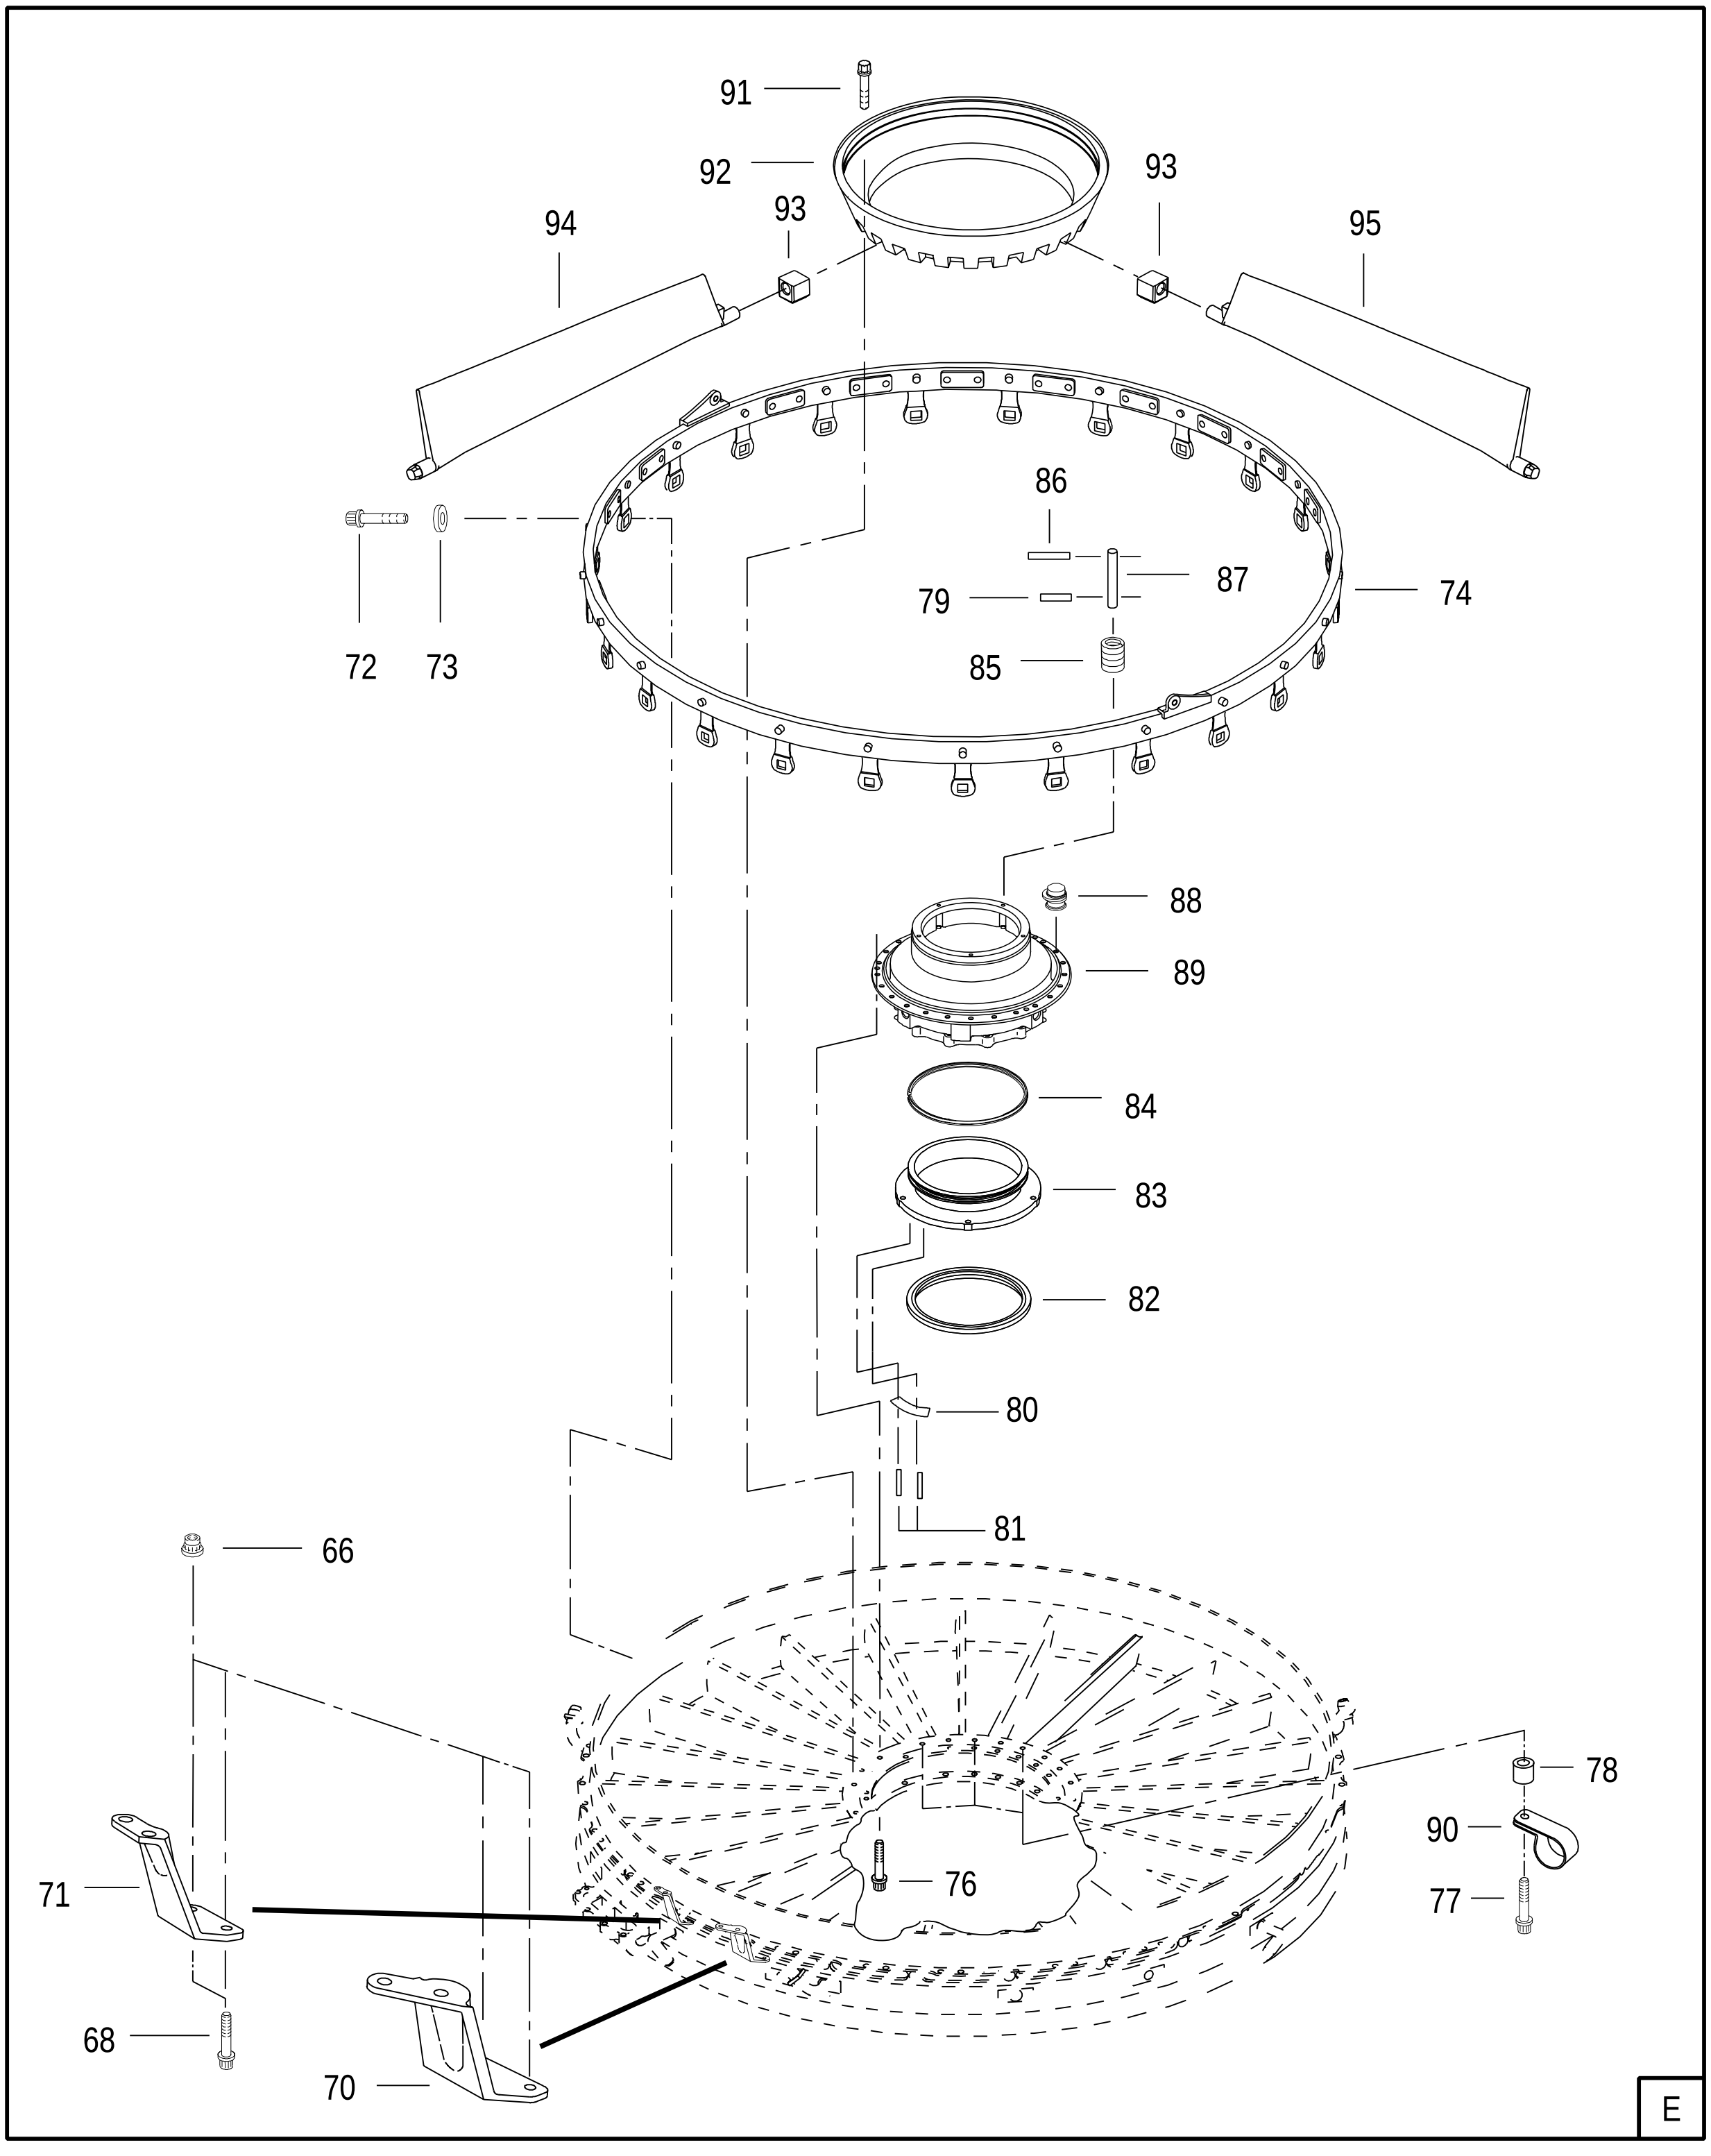


FIGURE 67. INLET/FAN MODULE
(SHEET 4 OF 5)

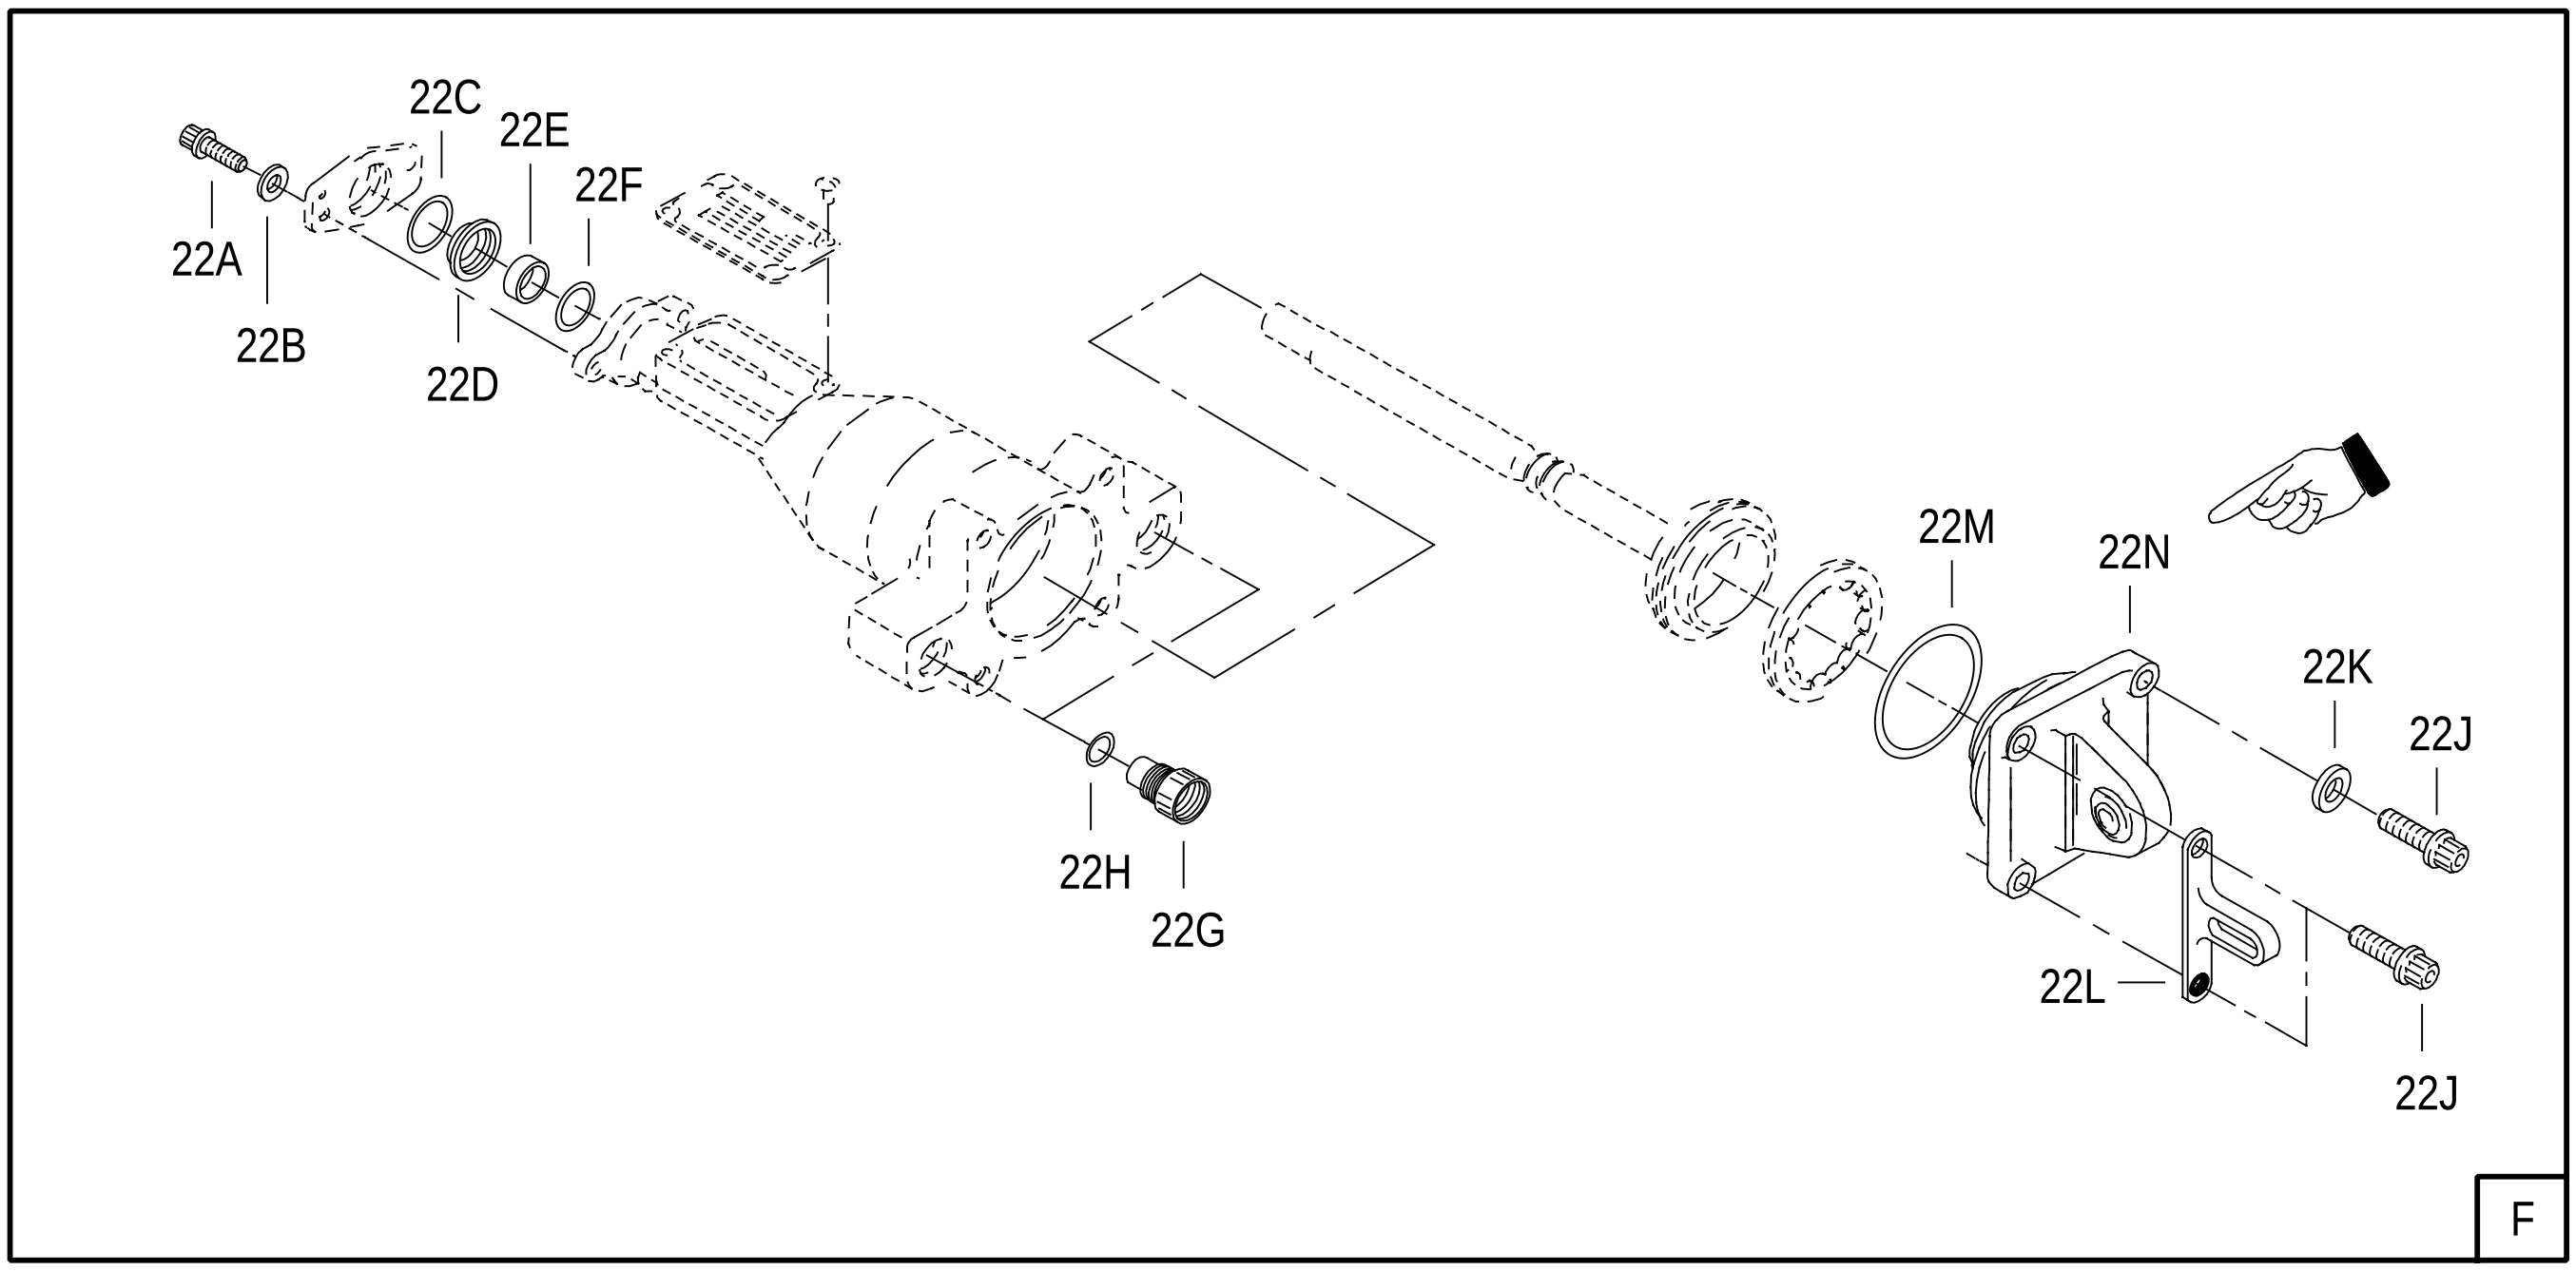

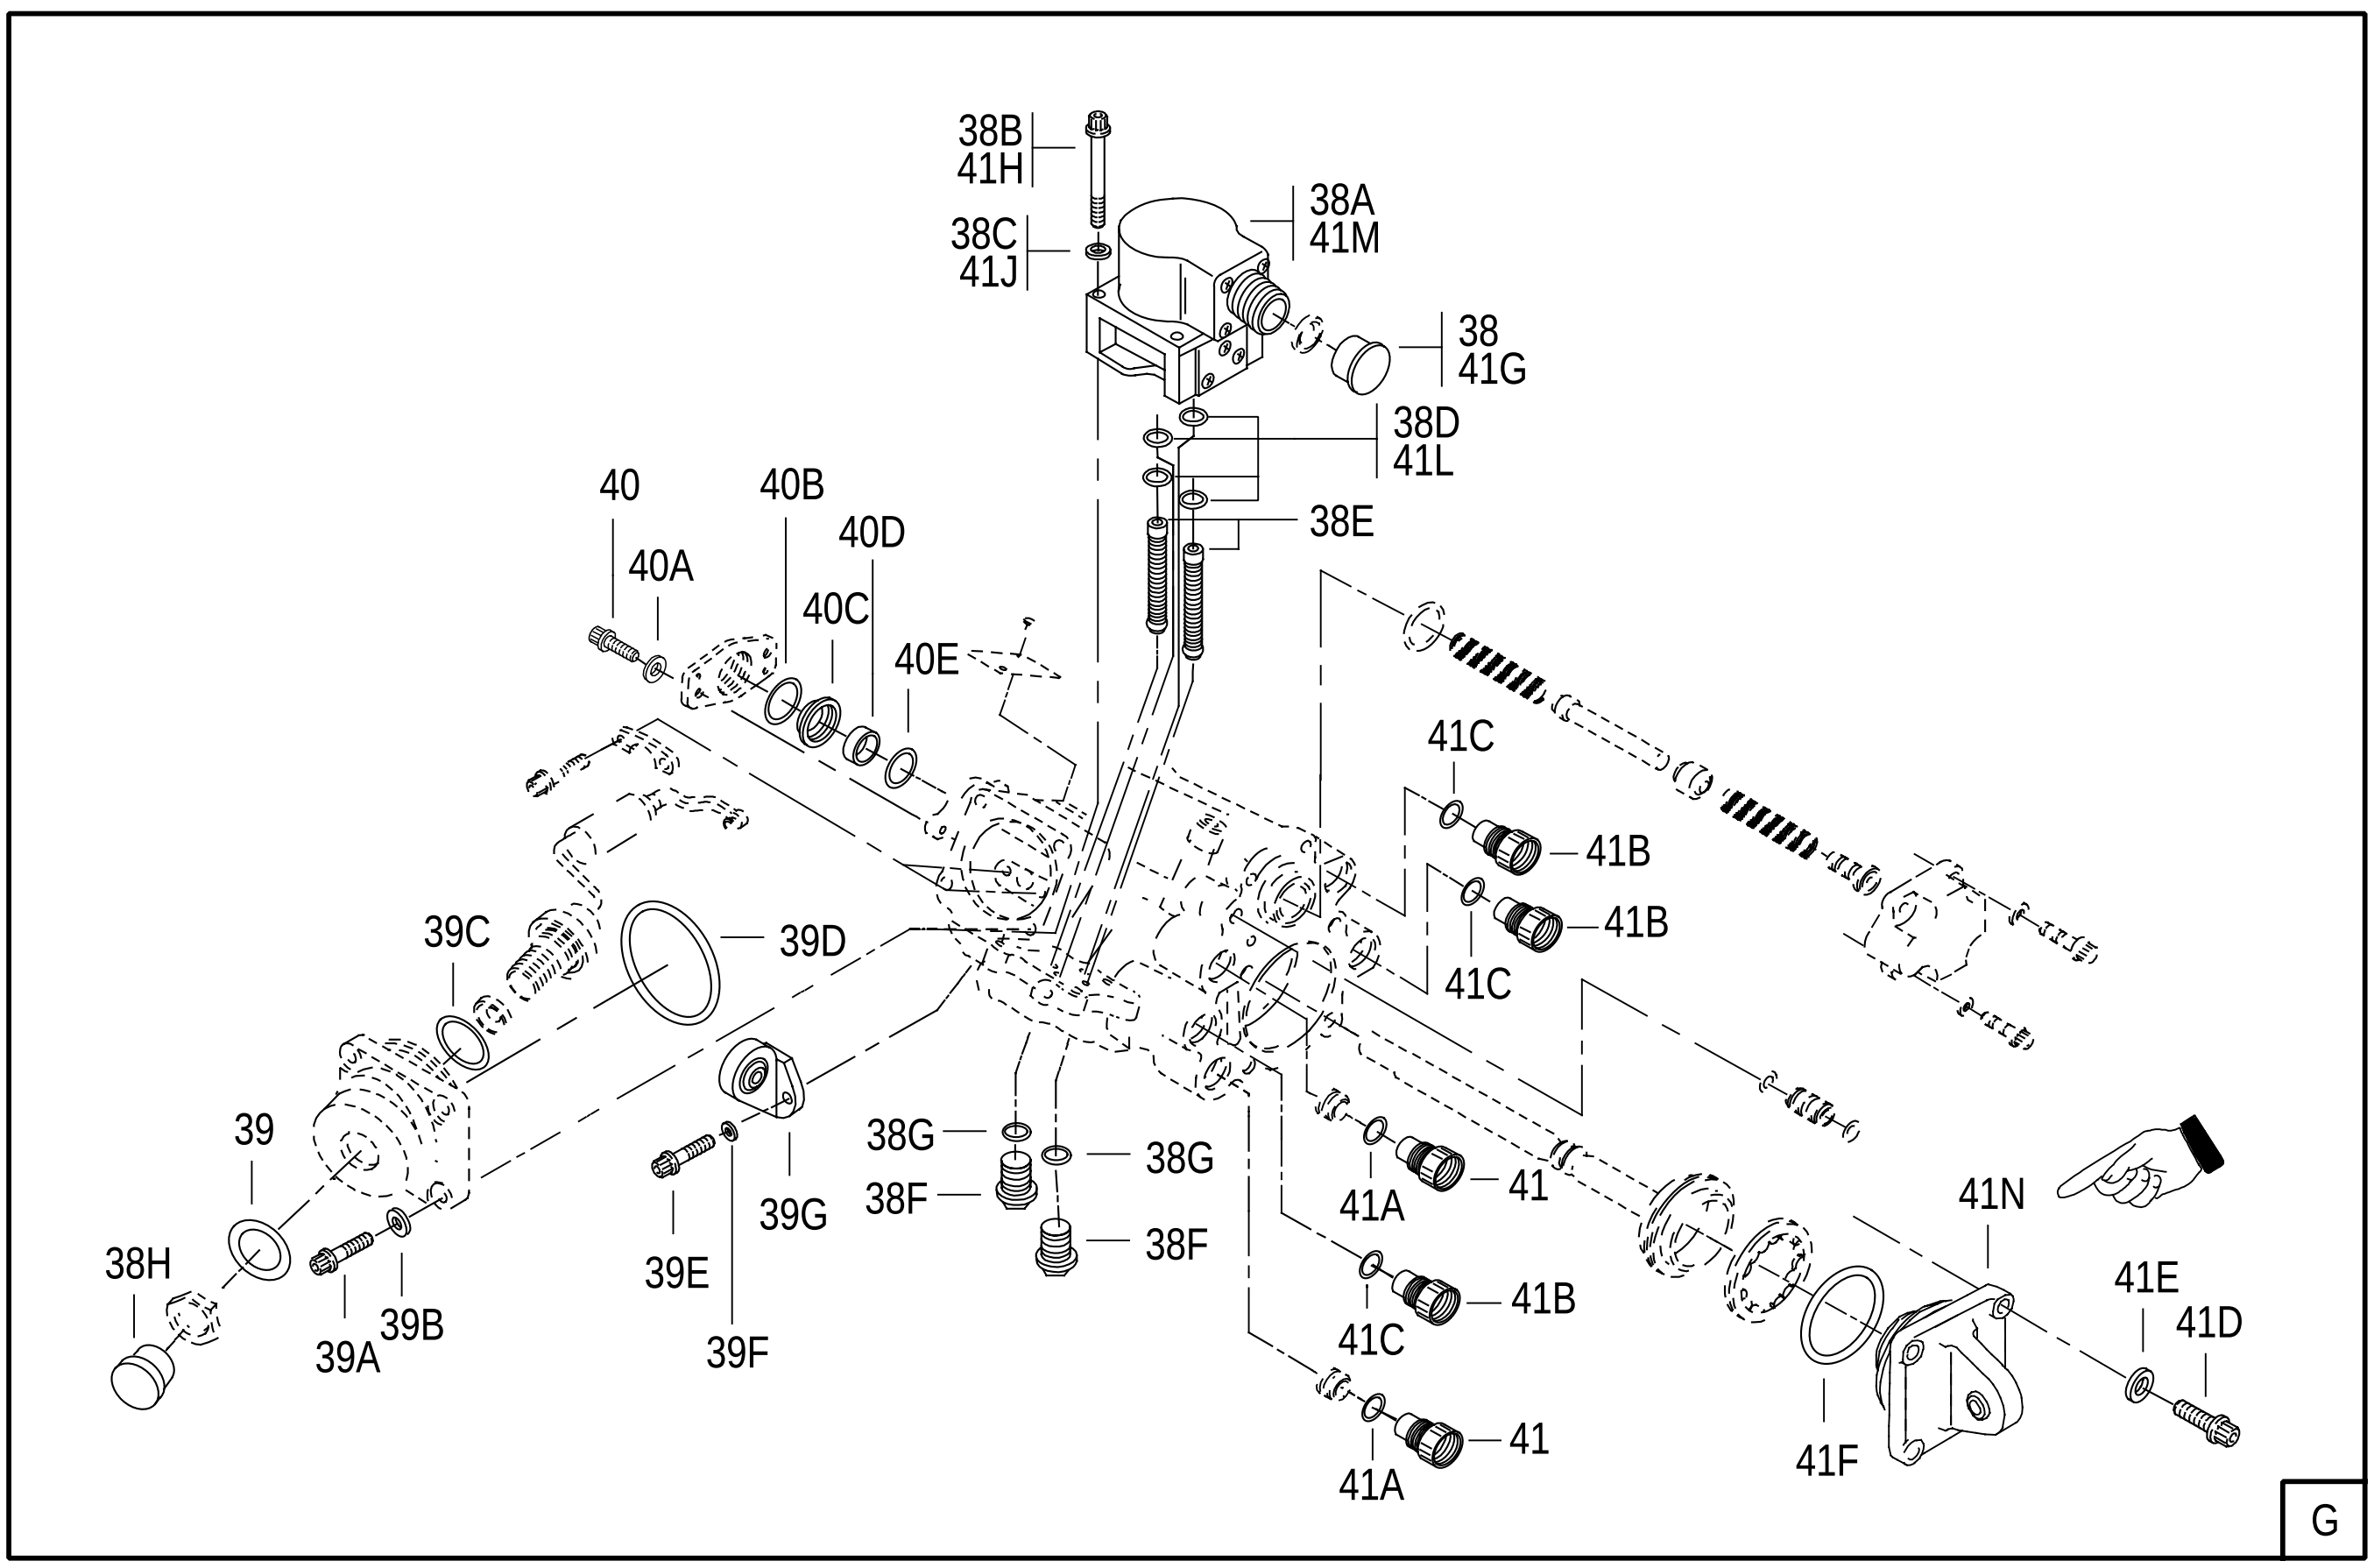

84952

FIGURE 67. INLET/FAN MODULE
(SHEET 5 OF 5)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	67	4068721-803	52661	INLET/FAN MODULE .... SEE FIG. 1-12 FOR NHA	1	XM/XP	PAFDD
		4068721-804	52661	INLET/FAN MODULE .... SEE FIG. 1-12 FOR NHA	1	XN/XP	PAFDD
		4082653-800	52661	INLET/FAN MODULE .... SEE FIG. 1-12 FOR NHA REOP AND REID OF 4068721-803 OR -804 DO NOT PROCURE FROM P&W	1	XQ	PAFDD
	- 1	MS9245-24	96906	. PIN	2		PAOZZ
	- 2	4081406	52661	. RETAINER-COMBUSTION CHAMBER LINER .... SUPERSEDES 4077276	2		PAFZZ
	- 3	4075562	52661	. PIN-CLEVIS .... 0.2475 OD X 0.815 IN. LONG	2		PAOZZ
	- 4	4022709	52661	. NUT OPTION .... SEE OPTION TABLE	4		PAOZZ
	- 5	4032220	52661	. BOLT-MACHINE, DEE, DRILLED .... 0.250-28UNJF-3A X 1.062 IN. LONG	4		PAOZZ
	- 6	4026736	52661	. CONNECTING LINK-RIGID, FRONT COMPRESSOR . STATOR	2		PAOZZ
	- 7	ST2135-038	52661	. BOLT-MACHINE, HEX .... 0.250-28UNJF-3A X 1.188 IN. LONG	2		PAOZZ
	- 8	4068010	52661	. WASHER-KEY, FRONT COMPRESSOR STATOR .... BELLCRANK SUPPORT	2		PAFZZ
	- 9	4068009	52661	. PIN-SHOULDER, HEADLESS .... 0.2815 X 0.37425 OD X 1.075 IN. LONG	2		PAFZZ
R	- 10	4081404	52661	. BELLCRANK-FRONT COMPRESSOR STATOR ...... LINKAGE, INLET, ASSY OF	2	TQ	PAFDD
		4084170	52661	. BELLCRANK-FRONT COMPRESSOR STATOR ...... LINKAGE, INLET, ASSY OF SUPERSEDES 4065917 SUPERSEDES 4081404 PARTIAL BREAKDOWN FOLLOWS	2	TR	PAFDD
	- 11	4084169	52661	.. BUSHING-SLEEVE, FLANGED .... 0.360 ID X 0.50145 OD X 0.150 IN. DEPTH SUPERSEDES 4081399	2		PADZZ
	- 12	4072623	52661	.. BEARING OPTION .... SEE OPTION TABLE	2		PAFZZ
	- 13	4074198	52661	. BOLT-MACHINE, DRILLED, HEX .... 0.250-28UNJF-3A MOD X 0.312 IN. LONG	6		PAFZZ
	- 14	4074199	52661	. SUPPORT-FRONT COMPRESSOR STATOR .... BELLCRANK, INLET	2		PAFFF
	- 15	4075565	52661	. CLEVIS-ROD END .... 0.375-24UNJF-3A X 3.577 IN. LONG	1	LM	PAOZZ
		4083039	52661	. CLEVIS-ROD END .... 0.375-24 X 3.677 IN. LONG	1	LN	PAOZZ
	- 16	4075566	52661	. CLEVIS-ROD END .... 0.375-24UNJF-3A X 5.781 IN. LONG	1	LM	PAOZZ
		4083038	52661	. CLEVIS-ROD END .... 0.375-24 X 5.881 IN. LONG	1	LN	PAOZZ
	- 17	4075569	52661	. NUT-SLEEVE, HEX .... 0.5625-18UNJF-3B X 1.490 IN. LONG	2		PAOZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
67 - 18	4077233	52661	. WASHER-KEY 0.385 ID X 0.043 IN. THK SUPERSEDES 4075567	2	LM	PAOZZ
	4004816	52661	. WASHER-KEY 0.381 ID X 0.037 IN. THK	2	LN	PAOZZ
- 19	MS9245-24	96906	. PIN	1		PAOZZ
- 20	4022709	52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
- 21	4033743	52661	. BOLT-COMPRESSOR STATOR CYLINDER 0.250-28UNJF-3A X 1.125 IN. LONG	1		PAOZZ
- 22	441436 #	99877	. CYLINDER-ACTUATING, LINEAR, VARIABLE VANE, COMPRESSOR INLET P&WA PART NO. 4067838 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 22A	953528-96	99877	.. SCREW-MACHINE, 12 POINT	2		PAFZZ
- 22B	AN960C6	88044	.. WASHER-FLAT	2		PAFZZ
- 22C	2666850-114	99877	.. PACKING-PREFORMED	1		PAFZZ
- 22D	2649313	99877	.. RING-WIPER	1		PAFZZ
- 22E	2649314	99877	.. RING-PISTON	1		PAFZZ
- 22F	2666850-113	99877	.. PACKING-PREFORMED	1		PAFZZ
- 22G	2663787-004	99877	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL	2		PAOZZ
- 22H	557-S-4	99877	.. PACKING-PREFORMED	2		PAOZZ
- 22J	953528-191	99877	.. SCREW-MACHINE, 12 POINT	4		PAFZZ
- 22K	AN960C416L	88044	.. WASHER-FLAT	2		PAFZZ
- 22L	2663848	99877	.. BRACKET-TORQUE	1		PAOZZ
- 22M	2666850-134	99877	.. PACKING-PREFORMED	1		PAFZZ
- 22N	2671708	99877	.. COVER ASSY-PIVOT	1		PAFLD
- 23	4069570	52661	. BOLT-SHOULDER, SQUARE 0.190-32UNJF-3A X 0.940 IN. LONG	2		PAOZZ
- 24	4023115	52661	. NUT OPTION SEE OPTION TABLE	2		PAOZZ
	4069491	52661	. SUPPORT ASSY-COMPRESSOR INLET VARIABLE VANE CYLINDER	1		PAFFF
- 25	ST2178-06	52661	. SCREW-MACHINE, COUNTERSUNK 0.190-32UNJF-3A X 0.375 IN. LONG (AP)	2		PAFZZ
- 26	MS21209F4-15	96906	.. INSERT	1		PAFZZ
- 27	4069478	52661	.. BUSHING-SLEEVE, FLANGED 0.3125 ID X 0.43885 OD X 0.360 IN. LONG	2		PADZZ
- 28	4069492	52661	.. SUPPORT-COMPRESSOR INLET VARIABLE VANE CYLINDER	1		PAFFF
- 29	4023116	52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
- 30	4004913	52661	. BOLT-MACHINE, HEX 0.250-28UNJF-3A X 0.875 IN. LONG	1		PAOZZ
- 31	4023115	52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
- 32	4060113	52661	. BOLT-MACHINE, HEX 0.190-32UNJF-3A MOD X 0.875 IN. LONG	1		PAOZZ
- 33	4069486	52661	. CONNECTING LINK-COMPRESSOR STATOR, INLET	1		PAOZZ
- 34	MS9245-24	96906	. PIN	1		PAOZZ
- 35	4022709	52661	. NUT OPTION SEE OPTION TABLE	1		PAOZZ
- 36	4015774	52661	. BOLT-MACHINE, HEX, DRILLED 0.250-28UNJF-3A X 1.125 IN. LONG	1		PAOZZ
- 37	441435 #	99877	. CONTROL AND CYLINDER-VARIABLE VANE, COMPRESSOR INLET P&WA PART NO. 4067837 PARTIAL BREAKDOWN FOLLOWS	1		PAODD
- 38	NAS813-12	80205	.. CAP-PROTECTIVE ALSO A DETAIL OF KIT P/N 351005A	1		PAOZZ
- 38A	2718183	99877	.. SERVOVALVE-ELECTRO HYDRAULIC, CIVV/RCVV ALSO A DETAIL OF KIT P/N 351005A	1		KF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
67 - 38B	953527-500	99877	.. SCREW-MACHINE, 12 POINT (AP) ALSO A DETAIL OF KIT P/N 351005A	4		PAOZZ
- 38C	P-15108	99877	.. WASHER (AP) ALSO A DETAIL OF KIT P/N 351005A	4		PAOZZ
- 38D	2666850-12	99877	.. PACKING-PREFORMED ALSO A DETAIL OF KIT P/N 351005A	4		PAOZZ
- 38E	2666889	99877	.. SCREEN ASSY	2		PAOZZ
- 38F	2670053	99877	.. PLUG-SPECIAL	2		PAOZZ
- 38G	2670890-5	99877	.. PACKING-PREFORMED	2		PAOZZ
- 38H	NAS813-12	80205	.. CAP-PROTECTIVE	1		PAOZZ
- 39	2663863	99877	.. WASHER-CONNECTOR	1		PAFZZ
- 39A	953528-191	99877	.. SCREW-MACHINE, 12 POINT	4		PAFZZ
- 39B	AN960C416L	88044	.. WASHER-FLAT	4		PAFZZ
- 39C	2666850-22	99877	.. PACKING-PREFORMED	1		PAFZZ
- 39D	2666850-132	99877	.. PACKING-PREFORMED	1		PAFZZ
- 39E	953534-482	99877	.. SCREW-CAP, HEX SOCKET HD	2		PAFZZ
- 39F	AN960C10L	88044	.. WASHER-FLAT	2		PAOZZ
- 39G	2671274	99877	.. BRACKET ASSY-CIVV BODY	1		PAFBZ
- 40	953528-86	99877	.. SCREW-MACHINE, 12 POINT	2		PAFZZ
- 40A	AN960C6	88044	.. WASHER-FLAT	2		PAFZZ
- 40B	2666850-114	99877	.. PACKING-PREFORMED	1		PAFZZ
- 40C	2649313	99877	.. RING-WIPER	1		PAFZZ
- 40D	2649314	99877	.. RING-PISTON	1		PAFZZ
- 40E	2666850-113	99877	.. PACKING-PREFORMED	1		PAFZZ
- 41	2663787-006	99877	.. PLUG-PROTECTIVE	2		PAOZZ
- 41A	557-S-6	99877	.. PACKING-PREFORMED	2		PAOZZ
- 41B	2663787-004	99877	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL	3		PAOZZ
- 41C	557-S-4	99877	.. PACKING-PREFORMED	3		PAOZZ
- 41D	953528-191	99877	.. SCREW-MACHINE, 12 POINT	4		PAFZZ
- 41E	AN960C416L	88044	.. WASHER-FLAT	4		PAFZZ
- 41F	2666850-134	99877	.. PACKING-PREFORMED	1		PAFZZ
	351005A	99877	. KIT-MODULE, CIVV/RCVV CONTROLLER EHSV	1		PAODD
	351035A	99877	.. KIT-CLOSURE, GAS GENERATOR CIVV CONTROLLER EHSV	1		PAOZZ
- 41G	NAS813-12	80205	... CAP-PROTECTIVE	1		PAOZZ
- 41H	953527-500	99877	... SCREW-MACHINE, 12 POINT	4		PAOZZ
- 41J	P-15108	99877	... WASHER	4		PAOZZ
- 41K	< 2672298	99877	... COVER-PROTECTIVE, SERVOVALVE	1		
- 41L	2666850-12	99877	... PACKING-PREFORMED	4		PAOZZ
- 41M	2718183	99877	.. SERVOVALVE-ELECTRO HYDRAULIC, CIVV/RCVV	1		KF
- 41N	2671708	99877	.. COVER ASSY-PIVOT	1		PAFLD
- 42	4023115	52661	. NUT OPTION SEE OPTION TABLE	2		PAOZZ
- 43	4069570	52661	. BOLT-SHOULDER, SQUARE 0.190-32UNJF-3A X 0.940 IN. LONG	2		PAOZZ
	4069476	52661	. SUPPORT ASSY-VARIABLE VANE COMPRESSOR INLET	1		PAOFF
- 44	ST2178-06	52661	. SCREW-MACHINE, COUNTERSUNK 0.190-32UNJF-3A X 0.375 IN. LONG (AP)	2		PAFZZ
- 45	MS21209F4-15	96906	.. INSERT	1		PAFZZ
- 46	4069478	52661	.. BUSHING-SLEEVE, FLANGED 0.3125 ID X 0.43885 OD X 0.360 IN. LONG	2		PADZZ
- 47	4069477	52661	.. SUPPORT-VARIABLE VANE COMPRESSOR INLET WHEN EXH USE 4071615	1		XA
	4071615	52661	.. SUPPORT-VARIABLE VANE COMPRESSOR INLET	1		XA
- 48	4023115	52661	. NUT OPTION SEE OPTION TABLE	8		PAOZZ
- 49	ST2439-04	52661	. CLAMP ASSY-LOOP, CUSHION WHEN EXH USE ST1540-04	2		PAOZZ
	ST1540-04	52661	. CLAMP-LOOP, CUSHION	2		PAOZZ
- 50	4077297	52661	. CLAMP HALF-BLOCK, GROMMET, ASSY OF WHEN EXH USE 4078524	2		PAOBZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
67 - 50	4078524	52661	. CLAMP HALF-BLOCK, GROMMET, ASSY OF	2		PAOBZ
- 51	4077296	52661	. CLAMP HALF-BLOCK, GROMMET, ASSY OF .... WHEN EXH USE 4078523	2		PAOBZ
	4078523	52661	. CLAMP HALF-BLOCK, GROMMET, ASSY OF	2		PAOBZ
R - 52	A7252-1	98441	. HOSE-NONMETALLIC .... 0.250 TUBE X 0.4375-20 P&W PART NO. 4081099-01	1		PAOFF
- 53	4071635	52661	. CLAMP-BLOCK, GROMMET, ASSY OF .... WHEN EXH USE 4073096	1		PAOBZ
	4073096	52661	. CLAMP-BLOCK, GROMMET, ASSY OF	1		PAOBZ
R - 54	A7278-1	98441	. HOSE-NONMETALLIC .... 0.250 TUBE X 0.4375-20 P&W PART NO. 4081114-01	1		PAOFF
- 55	4071626-01	52661	. TUBE-SCAVENGE, NO. 1 BEARING, ASSY OF	1		PAOFF
- 56	4071625-01	52661	. TUBE-SCAVENGE, NO. 1 BEARING, ASSY OF	1		PAOFF
- 57	ST2016-016	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG	6		PAOZZ
- 58	4072193	52661	. TEE-TUBE TO BOSS, 2 HOLE FLANGE .... 0.4375-20UNJF-3A THD	1		PADZZ
- 59	4072195	52661	. TEE-TUBE TO BOSS, 2 HOLE FLANGE .... 0.4375-20UNJF-3A THD	1		PADBZ
- 60	4072197	52661	. ELBOW ASSY-TUBE TO BOSS, 2 HOLE, 90 DEG ... 0.4375-20UNJF-3A THD	1		PADBZ
- 61	4075400	52661	. NUT OPTION .... SEE OPTION TABLE	1		PAFFF
- 62	4075401	52661	. NUT OPTION .... SEE OPTION TABLE	1		PAFFF
- 63	4035597	52661	. BEARING-NO. 1-OPTION .... PROCUREMENT NO. CONSISTS OF	1		PAFLD
	4018466	52661	.. BEARING ASSY-ROLLER, CYLINDRICAL, NO.1 .... 3.937 X 5.8781 X 1.500 IN. WIDE OPTIONAL TO 4018467, 4060870, 4061549, AND 4082584	1		XA
	4018467	52661	.. BEARING ASSY-ROLLER, CYLINDRICAL, NO.1 .... 3.937 X 5.8781 X 1.500 IN. WIDE OPTIONAL TO 4018466, 4060870, 4061549, AND 4082584	1		XA
	4060870	52661	.. BEARING ASSY-ROLLER, CYLINDRICAL, NO.1 .... 3.937 X 5.8781 X 1.500 IN. WIDE OPTIONAL TO 4018466, 4018467, 4061549, AND 4082584	1		XA
	4061549	52661	.. BEARING ASSY-ROLLER, CYLINDRICAL, NO.1 .... 3.937 X 5.8781 X 1.500 IN. WIDE OPTIONAL TO 4018466, 4018467, 4060870, AND 4082584	1		XA
	4082584	52661	.. BEARING ASSY-ROLLER, CYLINDRICAL, NO.1 .... 3.937 X 5.8781 X 1.500 IN. WIDE OPTIONAL TO 4018466, 4018467, 4060870, AND 4061549 PARTIAL BREAKDOWN FOLLOWS	1		XA
- 64	4000915	52661	... PIN-STRAIGHT, HEADLESS .... 0.12455 X 0.225 IN. LONG	2		PAFZZ
- 65	4075499	52661	. SEAT-NO. 1 BEARING SEAL	1		PAFDD
- 66	4021812	52661	. NUT OPTION .... SEE OPTION TABLE	72		PAOZZ
- 67	4072296	52661	. SPACER-SLEEVE .... 0.219 ID X 0.365 OD X 0.200 IN. THK	68		PAOZZ
- 68	MS9556-10	96906	. BOLT	72		PAOZZ
- 69	MS9565-05	96906	. BOLT .... SUPERSEDES MS9556-06	2		PAOZZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	67 - 70		4069482	52661	. BRACKET-ENGINE DIAGNOSTIC UNIT, LOWER FRONT	1		PAOBZ
	- 71		4069483	52661	. BRACKET-ENGINE DIAGNOSTIC UNIT, UPPER FRONT	1		PAOBZ
R	- 72		111167-018	56878	. BOLT-SELF-LOCKING, HEX	25		PAFZZ
R					0.190-32UNJF-3A X 0.562 IN. LONG			
R					P&W PART NO. ST2276-018			
R					REPLACES SC2682-018			
R					P&W PART NO. ST2277-018			
	- 73		4016861	52661	. WASHER-FLAT, COUNTERSUNK 0.196 ID X 0.540 OD X 0.080 IN. THK	25		PAFZZ
	- 74		4072235	52661	. RING-SYNCHRONIZING, FRONT COMPRESSOR STATOR, INLET, ASSY OF SEE FIG. 69 FOR DETAIL PARTS	1		PAFDD
			4075229	52661	. HOUSING ASSY-NO. 1 BEARING	1		AFF
R	- 75		DELETED		...			
R	- 76		ST2016-020	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	22		PAOZZ
R	- 77		ST2016-030	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.190-32UNJF-3A X 0.938 IN. LONG (AP)	3		PAOZZ
R	- 78		ST2108-10	52661	. SPACER-SLEEVE 0.203 ID X 0.406 ID X 0.312 IN. LONG (AP)	3		PAOZZ
	- 79		MS9245-22	96906	.. PIN	5		PAFZZ
			4054085-01	52661	.. SEAL-FACE, NO. 1 BEARING, ASSY OF	1		PAFLD
	- 80		4054089	52661	... RETAINER-NO. 1 BEARING SEAL	3		XA
	- 81		AN123312	88044	... RIVET (AP)	2		XA
	- 82		4054087	52661	... SEAL-FACE, NO. 1 BEARING	1		XA
	- 83		4054085-03	52661	... HOUSING-NO. 1 BEARING SEAL	1		XA
	- 84		4054080	52661	.. SEAL RING-METAL 4.734 OD X 0.140 X 0.1695 IN. THK	1		PAFZZ
	- 85		4031513	52661	.. SPRING-HELICAL, COMPRESSION 0.280 OD X 0.0295 DIA WIRE X 30 COILS	5		PAFZZ
			4075139	52661	.. HOUSING-NO. 1 BEARING, ASSY OF	1		PAFLD
	- 86		AN123306	88044	... RIVET WHEN EXH USE AN123313	5		PADZZ
			AN123313	88044	... RIVET	5		PADZZ
	- 87		4057517-01	52661	... PIN-STRAIGHT, HEADLESS, DRILLED 0.1885 DIA X 2.540 IN. LONG	5		PADZZ
	- 88		4047849	52661	... NUT OPTION SEE OPTION TABLE	25		PAFZZ
	- 89		4074825	52661	... HOUSING-NO. 1 BEARING	1		XA
R	- 90	=	MS122902	96906	. CLAMP	3		PAOZZ
R		=	MS122903	96906	. CLAMP	3		PAOZZ
R		=	MS122904	96906	. CLAMP	3		PAOZZ
	- 91		ST2016-040	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.190-32UNJF-3A X 1.250 IN. LONG	13		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
67 - 92	4059690	52661	. SHROUD-FRONT COMPRESSOR STATOR INLET . . .	1		PAFLD
- 93	= 4072298	52661	. BEARING OPTION . . . . SEE OPTION TABLE	25		PAFZZ
	= 4080903	52661	. BEARING OPTION . . . . SEE OPTION TABLE	25		PAFZZ
- 94	4071850	52661	. VANE-FRONT COMPRESSOR STATOR, ... VARIABLE, INLET	17		PAFDD
- 95	4074150	52661	. VANE-FRONT COMPRESSOR STATOR, ... VARIABLE, INLET	8		PAFDD
- 96	ST1050-110	52661	. PACKING-PREFORMED . . . . 0.362 ID X 0.103 IN. DIA ROUND	4		PAFZZ
- 97	= 4082257-01	52661	. CASE-FAN INLET, ASSY OF . . . . SEE FIG. 68 FOR DETAIL PARTS	1		PAFLD
	= 4082258-01	52661	. CASE-FAN INLET, ASSY OF . . . . REOP AND REID OF 4081563-01 DO NOT PROCURE FROM P&W SEE FIG. 68 FOR DETAIL PARTS	1		PAFLD
	= 4082259-01	52661	. CASE-FAN INLET, ASSY OF . . . . REOP AND REID OF 4081562-01 DO NOT PROCURE FROM P&W SEE FIG. 68 FOR DETAIL PARTS	1		PAFLD
	= 4082260-01	52661	. CASE-FAN INLET, ASSY OF . . . . REOP AND REID OF 4081561-01 DO NOT PROCURE FROM P&W SEE FIG. 68 FOR DETAIL PARTS	1		PAFLD

	FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	67 - 97	=	4082261-01		52661	. CASE-FAN INLET, ASSY OF	1		PAFLD
						REOP AND REID OF 4081560-01			
						DO NOT PROCURE FROM P&W			
						SEE FIG. 68 FOR DETAIL PARTS			
	- 98		4075516	*	52661	. PLATE-IDENTIFICATION, INLET FAN MODULE	1		PAFZZ
	- 99		CR3523-4-1		05693	. RIVET-BLIND, UNIVERSAL	4		PAFZZ
					92215	0.125 DIA X 0.062 IN. GRIP LENGTH (AP)			
						P&W PART NO. ST1173-01			
R	- 100		DELETED						
R	- 101		DELETED						
R	- 102		DELETED						
R	- 103		DELETED						
	- 104	=	4068714-704		52661	. ROTOR AND STATOR ASSY-FRONT	1		ADD
						COMPRESSOR			
						SEE FIG. 70 FOR DETAIL PARTS			
		=	4068714-705		52661	. ROTOR AND STATOR ASSY-FRONT	1		ADD
						COMPRESSOR			
						DO NOT PROCURE FROM P&W			
						SEE FIG. 70 FOR DETAIL PARTS			
			4068700		52661	ENGINE ASSY-TURBO FAN	REF	A	ADD
			4068800		52661	ENGINE ASSY-TURBO FAN	REF	B	ADD
	- 105		4023116		52661	. NUT OPTION	55		PAOZZ
						SEE OPTION TABLE			
	- 106		4026550		52661	. NUT OPTION	1		PAOZZ
						SEE OPTION TABLE			
	- 106A		4026550		52661	. NUT OPTION	2		PAOZZ
						SEE OPTION TABLE			
			704342		52661	. NUT OPTION	2	MT	PAOZZ
						SEE OPTION TABLE			
	- 107		ST2018-024		52661	. BOLT-MACHINE, DOUBLE HEX	34		PAOZZ
						0.250-28UNJF-3A X 0.750 IN. LONG			
	- 108		ST2018-028		52661	. BOLT-MACHINE, DOUBLE HEX	11		PAOZZ
						0.250-28UNJF-3A X 0.875 IN. LONG			
	- 109		ST2018-032		52661	. BOLT-MACHINE, DOUBLE HEX	11		PAOZZ
						0.250-28UNJF-3A X 1.000 IN. LONG			
	- 110		DELETED						
	- 111		DELETED						
	- 112		DELETED						
	- 113		ST2018-028		52661	. BOLT-MACHINE, DOUBLE HEX	1		PAOZZ
						0.250-28UNJF-3A X 0.875 IN. LONG			
	- 114		ST2018-028		52661	. BOLT-MACHINE, DOUBLE HEX	2		PAOZZ
						0.250-28UNJF-3A X 0.875 IN. LONG			
	- 115		ST2018-032		52661	. BOLT-MACHINE, DOUBLE HEX	1		PAOZZ
						0.250-28UNJF-3A X 1.000 IN. LONG			
	- 116		4080664		52661	. BRACKET-LOOP CLAMP	1		PAOZZ
	- 117		4081052		52661	. BRACKET-LOOP CLAMP	1		PAOZZ
	- 118		4084415-01		52661	. BRACKET-LOOP CLAMP, ASSY OF	1	MT	
						PARTIAL BREAKDOWN FOLLOWS			
	- 119		AN123469		88044	.. RIVET	2		PAOZZ
	- 120		ST5030-09		52661	.. NUT OPTION	1		PAFZZ
						SEE OPTION TABLE			

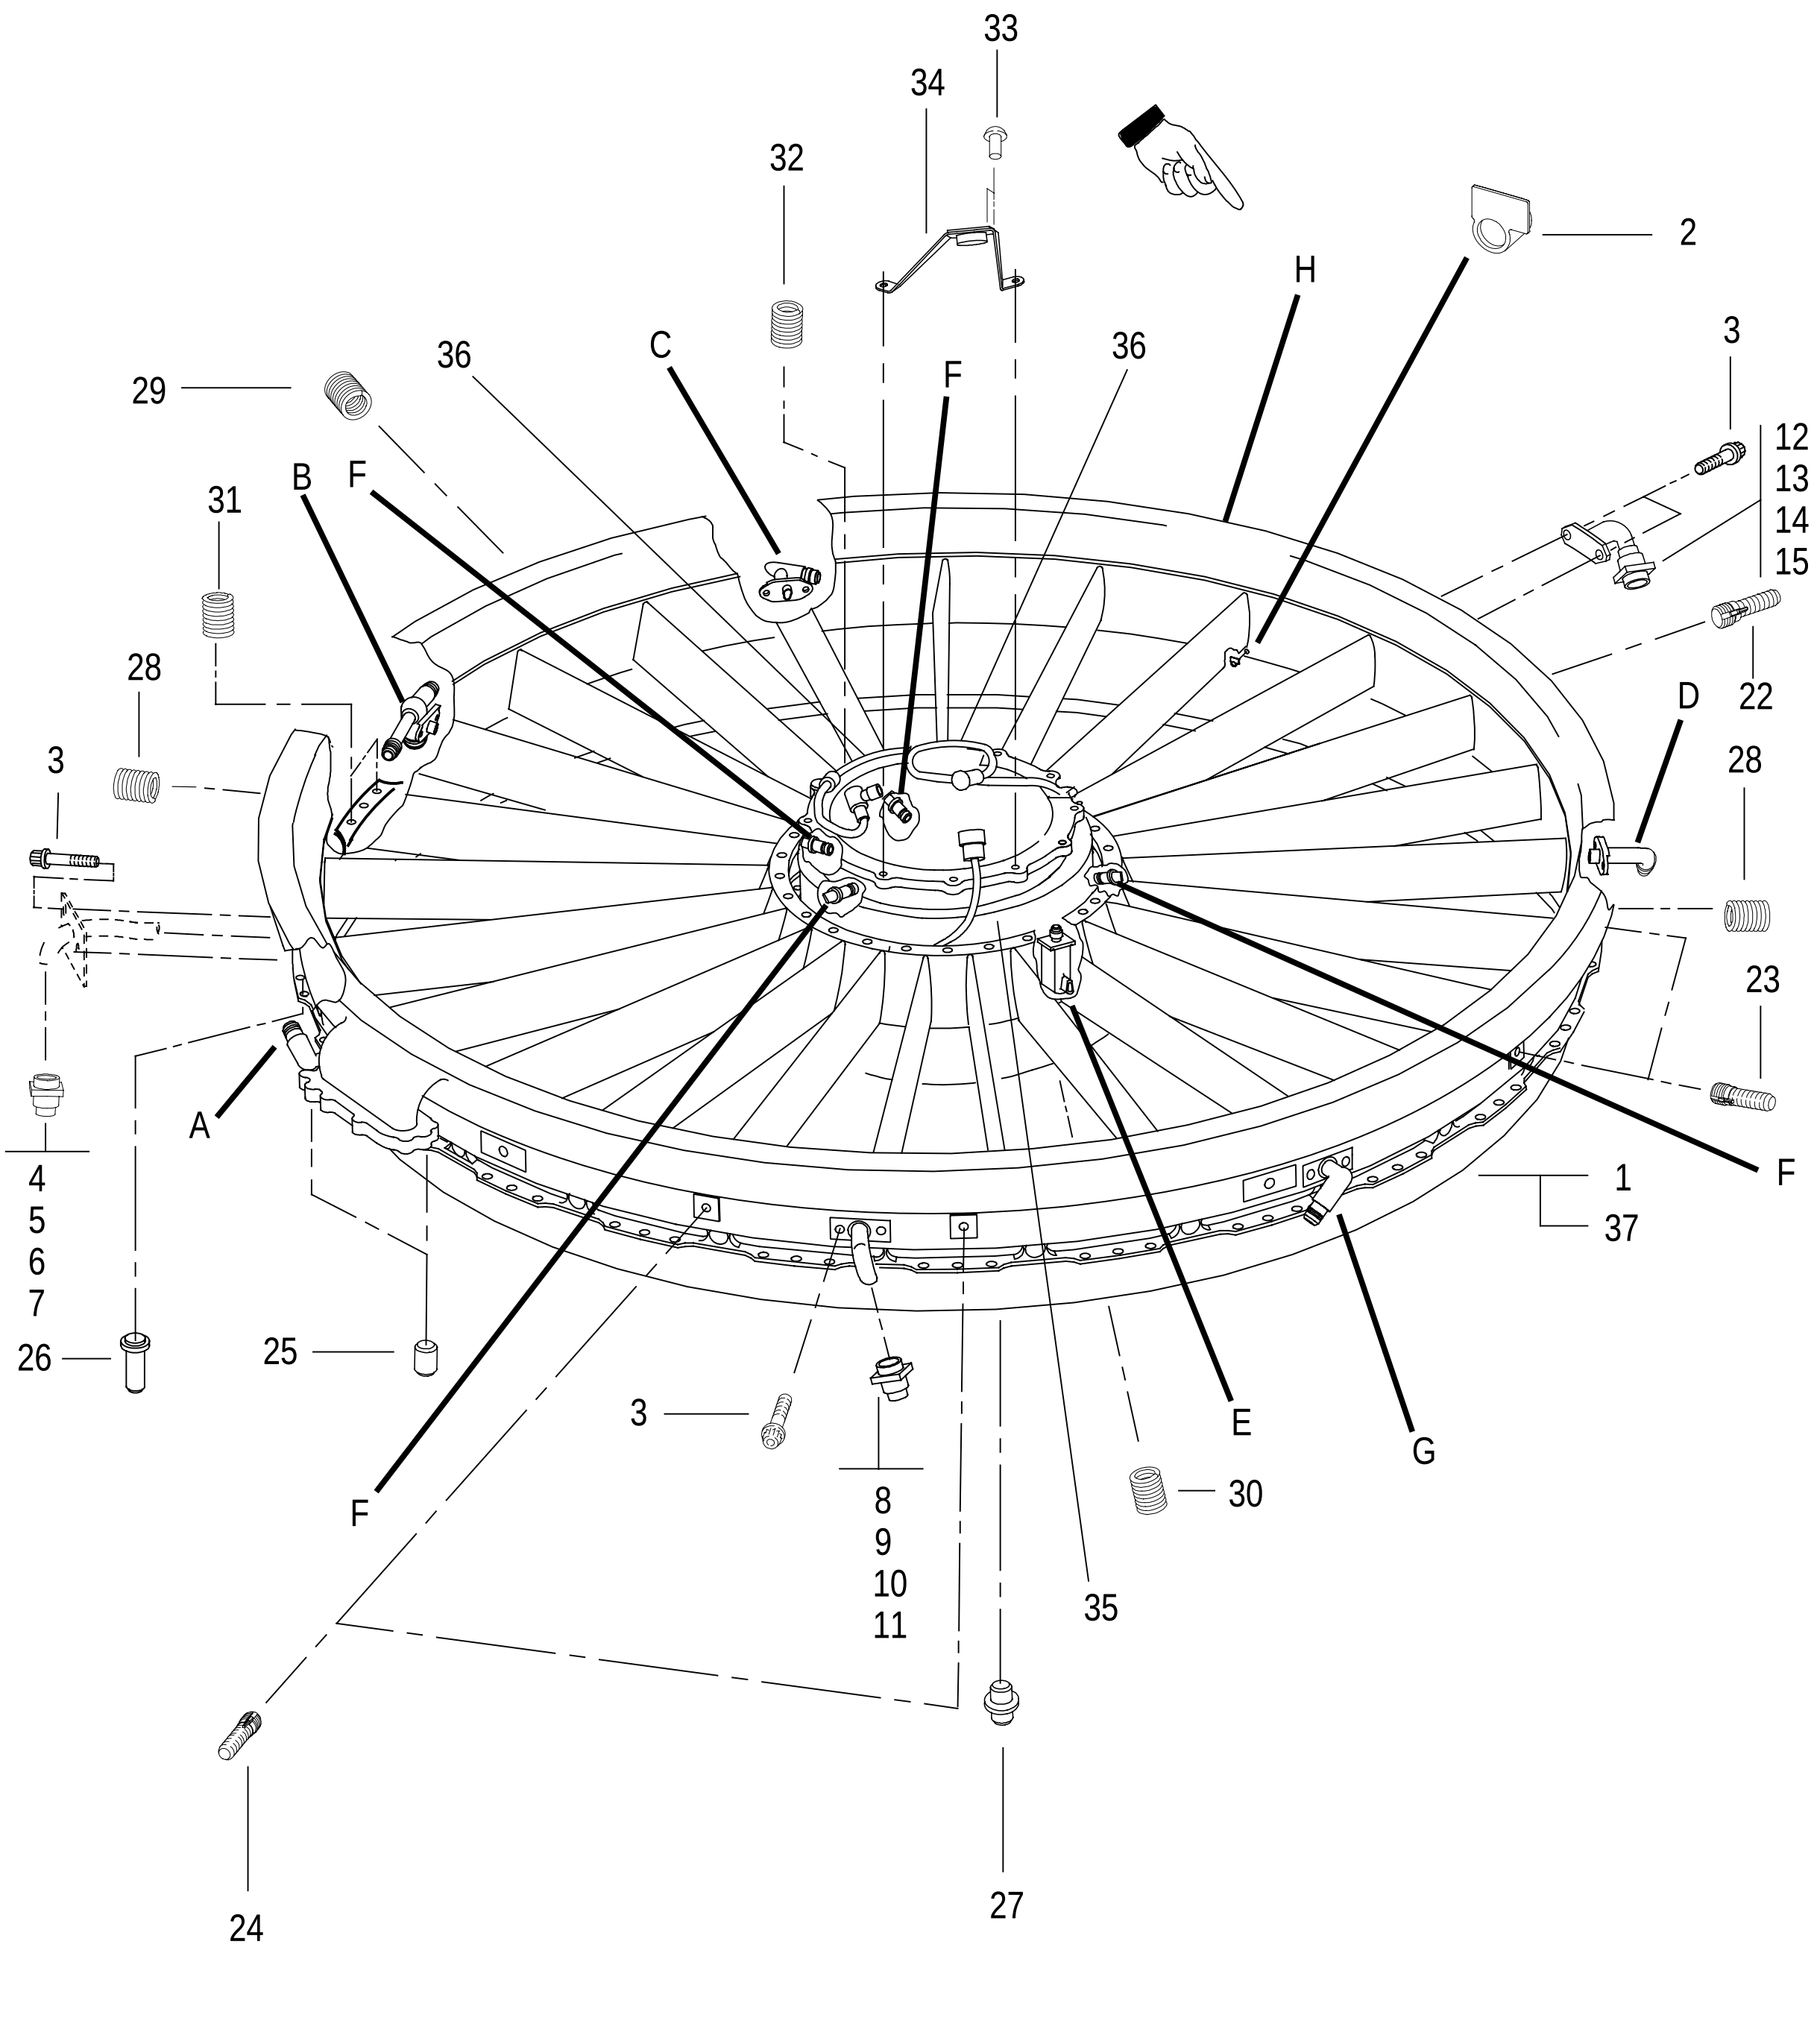


FIGURE 68. FAN INLET CASE ASSY
(SHEET 1 OF 3)

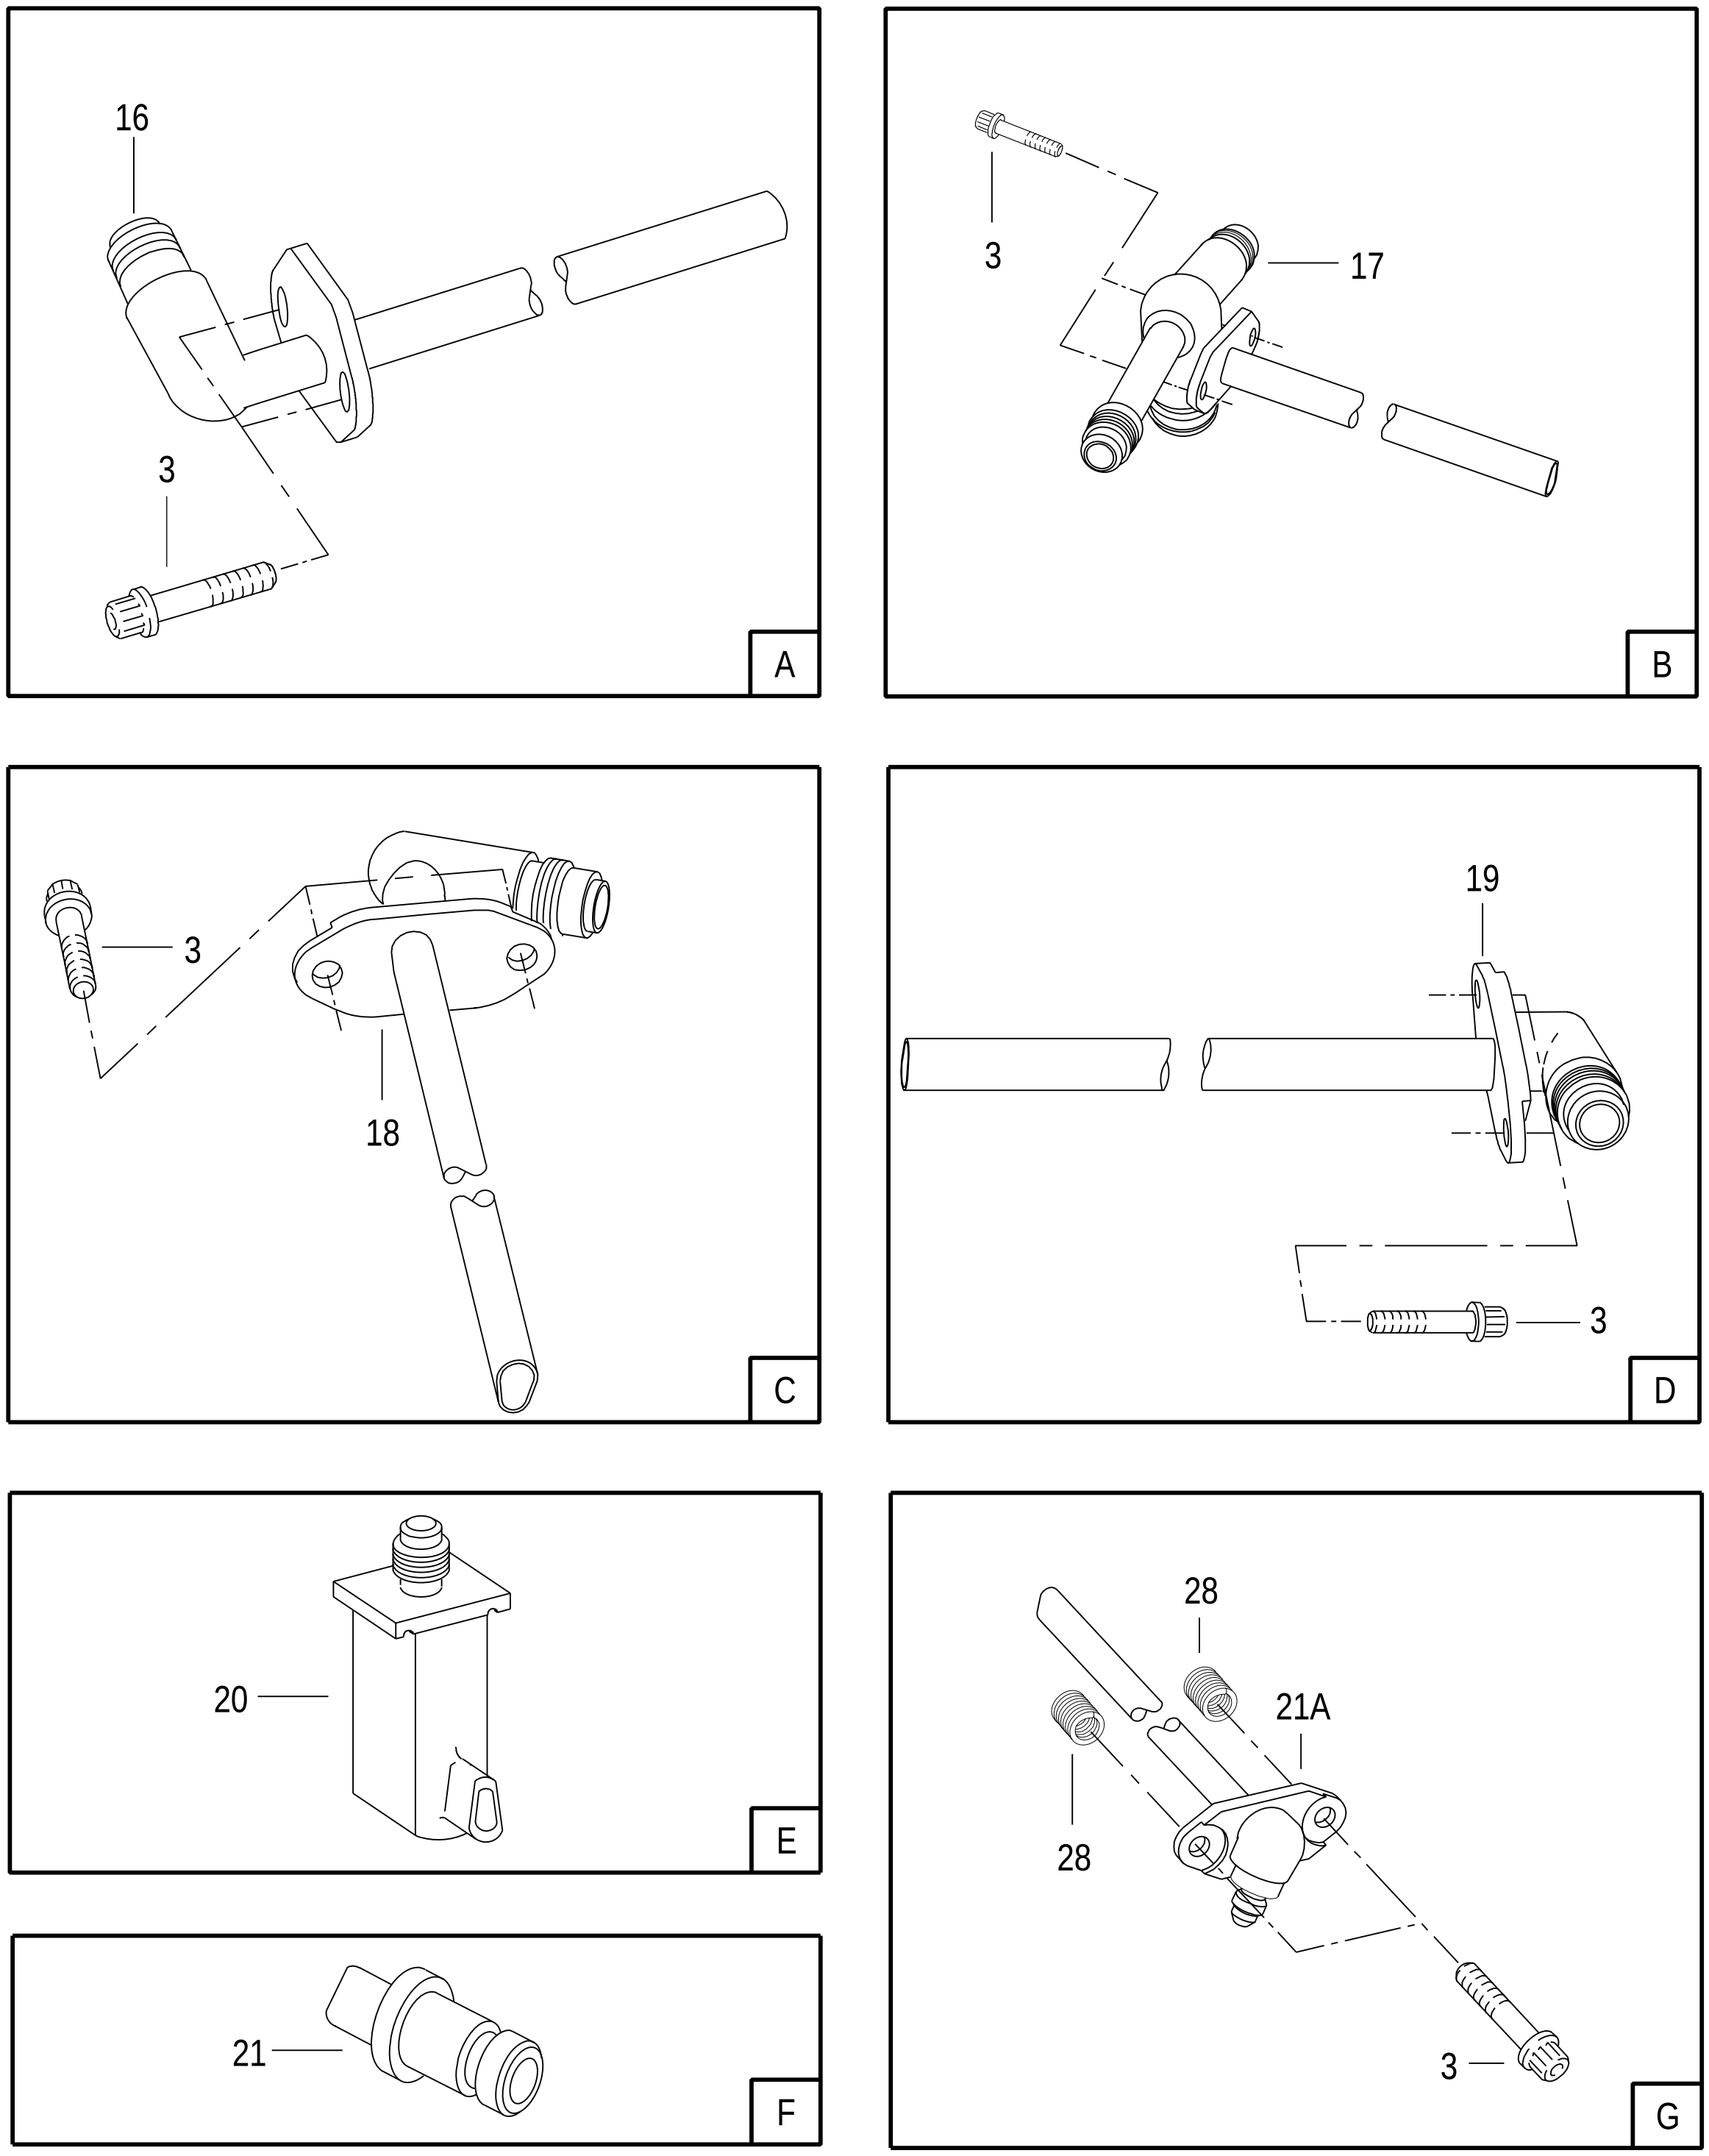


FIGURE 68. FAN INLET CASE ASSY
(SHEET 2 OF 3)

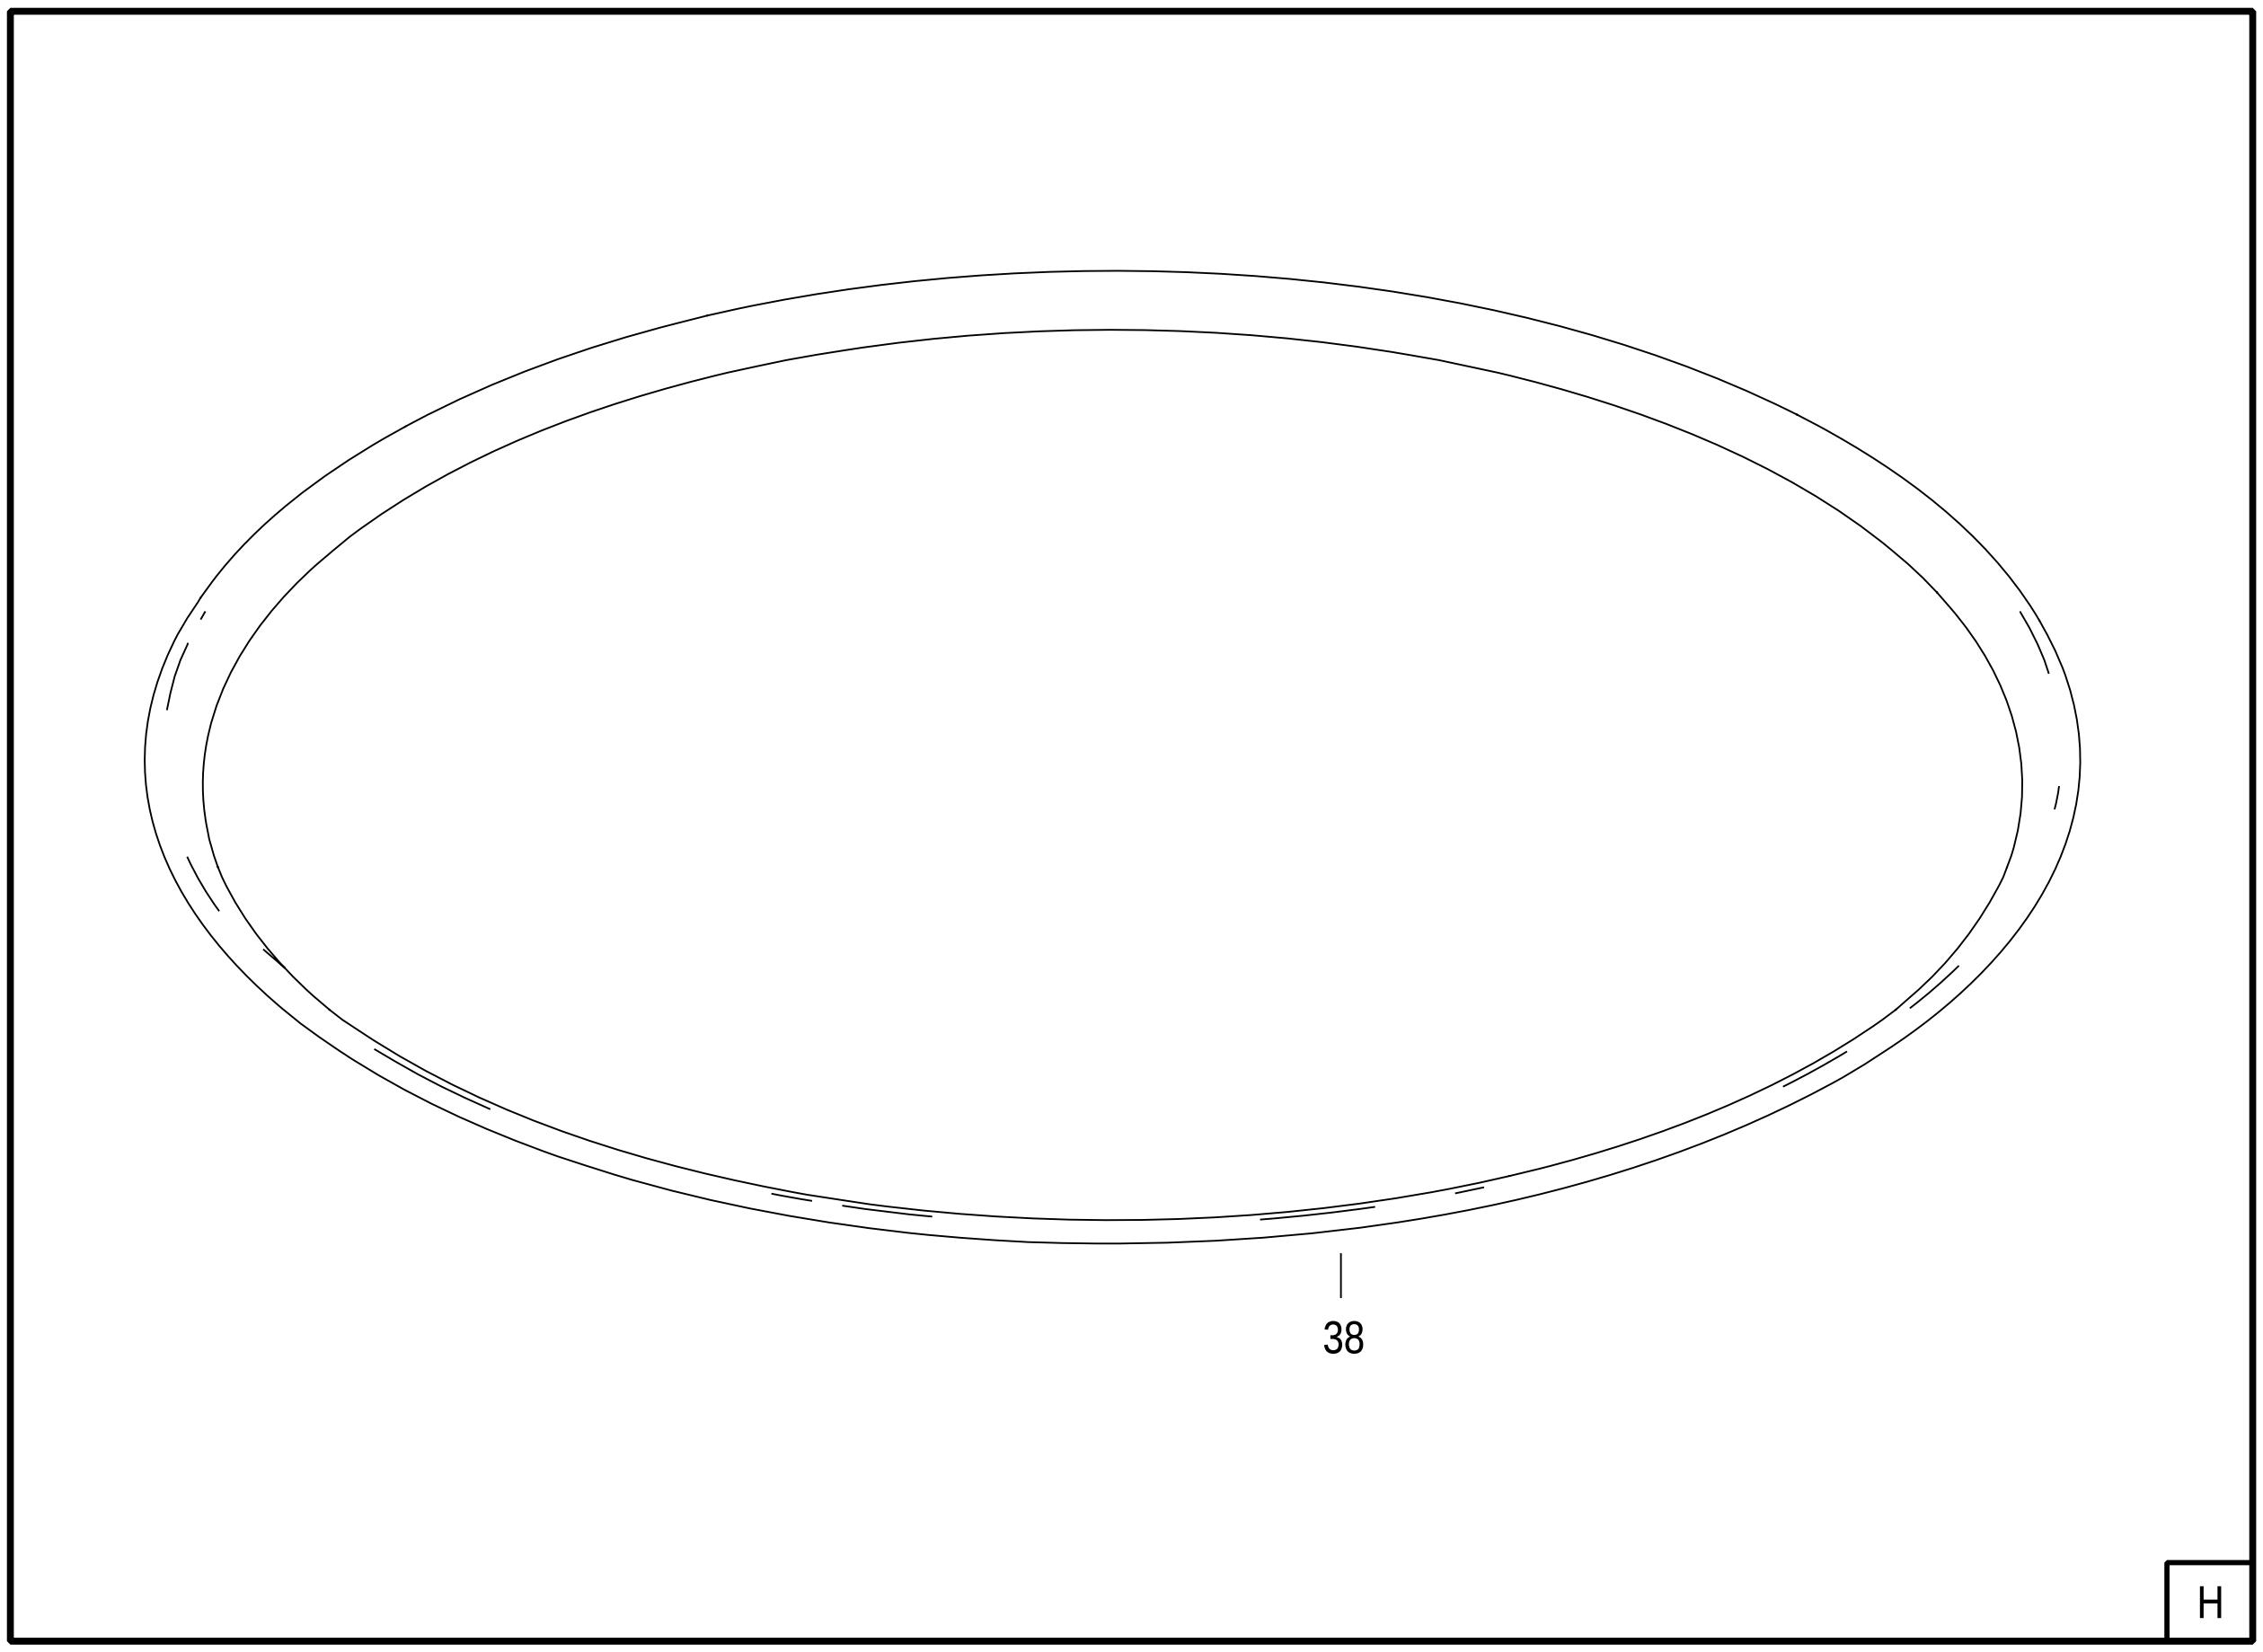


FIGURE 68. FAN INLET CASE ASSY
(SHEET 3 OF 3)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
68 - 1	= 4082257-01	52661	CASE-FAN INLET, ASSY OF .... SEE FIG. 67-97 FOR NHA	1		PAFLD
	= 4082258-01	52661	CASE-FAN INLET, ASSY OF .... SEE FIG. 67-97 FOR NHA REOP AND REID OF 4081563-01 DO NOT PROCURE FROM P&W	1		PAFLD
	= 4082259-01	52661	CASE-FAN INLET, ASSY OF .... SEE FIG. 67-97 FOR NHA REOP AND REID OF 4081562-01 DO NOT PROCURE FROM P&W	1		PAFLD
	= 4082260-01	52661	CASE-FAN INLET, ASSY OF .... SEE FIG. 67-97 FOR NHA REOP AND REID OF 4081561-01 DO NOT PROCURE FROM P&W	1		PAFLD
	= 4082261-01	52661	CASE-FAN INLET, ASSY OF .... SEE FIG. 67-97 FOR NHA REOP AND REID OF 4081560-01 DO NOT PROCURE FROM P&W PARTIAL BREAKDOWN FOLLOWS	1		PAFLD
- 2	4072297	52661	. BEARING OPTION .... SEE OPTION TABLE R USE ONLY ON 4082258-01, 4082259-01, R 4082260-01, AND 4082261-01	25		PAFZZ
	4080898	52661	. BEARING OPTION .... SEE OPTION TABLE R USE ONLY ON 4082257-01	25		PAFZZ
- 3	ST2016-016	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX .... 0.190-32UNJF-3A X 0.500 IN. LONG	16		PAOZZ
- 4	46274	83311	. CONNECTOR-ELEC, QUAD N1 SENSING .... P&W PART NO. 4075872 PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 5	156776	83311	.. BACKSHELL ASSY	1		PAOZZ
- 6	113699	83311	.. GROMMET-SEALING.............................	1		PAOZZ
- 7	113700	83311	.. INSULATOR ASSY	1		PAOZZ
- 8	46276	83311	. CONNECTOR-ELEC, PS2 HEATER .... P&W PART NO. 4075871 PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 9	156784	83311	.. BACKSHELL ASSY	1		PAOZZ
- 10	113699	83311	.. GROMMET-SEALING.............................	1		PAOZZ
- 11	113700	83311	.. INSULATOR ASSY	1		PAOZZ
- 12	46275	83311	. CONNECTOR-ELEC, QUAD N1 SENSING .... P&W PART NO. 4075873 PARTIAL BREAKDOWN FOLLOWS	1		PAOFF
- 13	156780	83311	.. BACKSHELL ASSY	1		PAOZZ
- 14	113699	83311	.. GROMMET-SEALING.............................	1		PAOZZ
- 15	113700	83311	.. INSULATOR ASSY	1		PAOZZ
- 16	4082270-01	52661	. TUBE-SCAVENGE, NO. 1 BEARING, ASSY OF	1		XA
- 17	4082271-01	52661	. TUBE-SCAVENGE, NO. 1 BEARING, ASSY OF	1		XA
- 18	4082269-01	52661	. TUBE-SCAVENGE, NO. 1 BEARING, ASSY OF	1		XA
- 19	4082266-01	52661	. TUBE-NO. 1 BEARING INTERNAL, ASSY OF........	1		XA
- 20	4067808	52661	. ELBOW-PRESSURE PROBE.......................	1		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
68 - 21	4082292	52661	. ADAPTER-NO. 1 BEARING	4		XA
- 21A	4082267-01	52661	. TUBE-PS2, FAN INLET CASE, ASSY OF	1		XA
- 22	TR28009-18	29372	. STUD-LOCKED IN 0.190-32 X 0.250-28 X 1.375 IN. LONG P&W PART NO. ST2665-18	1		PAFZZ
- 23	TR28009-8	29372	. STUD-LOCKED IN 0.190-32 X 0.250-28 X 0.500 IN. LONG P&W PART NO. ST2665-08	2		PAFZZ
- 24	TR28009-10	29372	. STUD-LOCKED IN 0.190-32 X 0.250-28 X 0.875 IN. LONG P&W PART NO. ST2665-10	2		PAFZZ
- 25	MS9390-300	96906	. PIN	2		PADZZ
- 26	4022460	52661	. PIN-SHOULDER, HEADLESS 0.12455 DIA AND 0.185 DIA X 0.275 IN. LONG	1		PAFZZ
- 27	4008581	52661	. PIN-SHOULDER, HEADLESS 0.12455 DIA AND 0.185 DIA X 0.200 IN. LONG	3		PAFZZ
- 28	3591-3CNX.285	82458	. INSERT-SCREW THREAD, SELF-LOCKING 0.190-32 X 6.875 COILS P&W PART NO. 544550 USE ONLY ON 4082261-01	25		PADZZ
	MS124695	96906	. INSERT USE ONLY ON 4082257-01, 4082258-01, 4082259-01, AND 4082260-01	25		PADZZ
- 29	MS21209F4-10	96906	. INSERT USE ONLY ON 4082261-01	4		PAFZZ
	MS124656	96906	. INSERT USE ONLY ON 4082260-01	4		PAFZZ
- 30	MS21209F1-10	96906	. INSERT USE ONLY ON 4082261-01	13		PAFZZ
	MS124655	96906	. INSERT USE ONLY ON 4082260-01	13		PAFZZ
- 31	MS21209F1-10	96906	. INSERT	2		PAFZZ
- 32	MS21209F1-10	96906	. INSERT USE ONLY ON 4082261-01	25		PAFZZ
	ST2786-01	52661	. INSERT OPTION SEE OPTION TABLE USE ONLY ON 4082257-01, 4082258-01, 4082259-01, AND 4082260-01	25		PAFZZ
- 33	AN123398	88044	. RIVET	4		PAFZZ
- 34	4064167	52661	. BRACKET-CABLE	1		PADZZ
- 35	45676	83311	. CABLE-SPE, PS2 HEATER P&W PART NO. 4072341	1		PAOZZ
- 36	45674	83311	. CABLE-SPE, QUAD N1 SENSING P&W PART NO. 4072338	2		PAOZZ
- 37	4081223	52661	. CASE-FAN INLET SERVICE REPAIR PART FOR 4082261-01	1		PADZZ
- 38	4084917	52661	. GUIDE SERVICE REPAIR PART	1		PADZZ

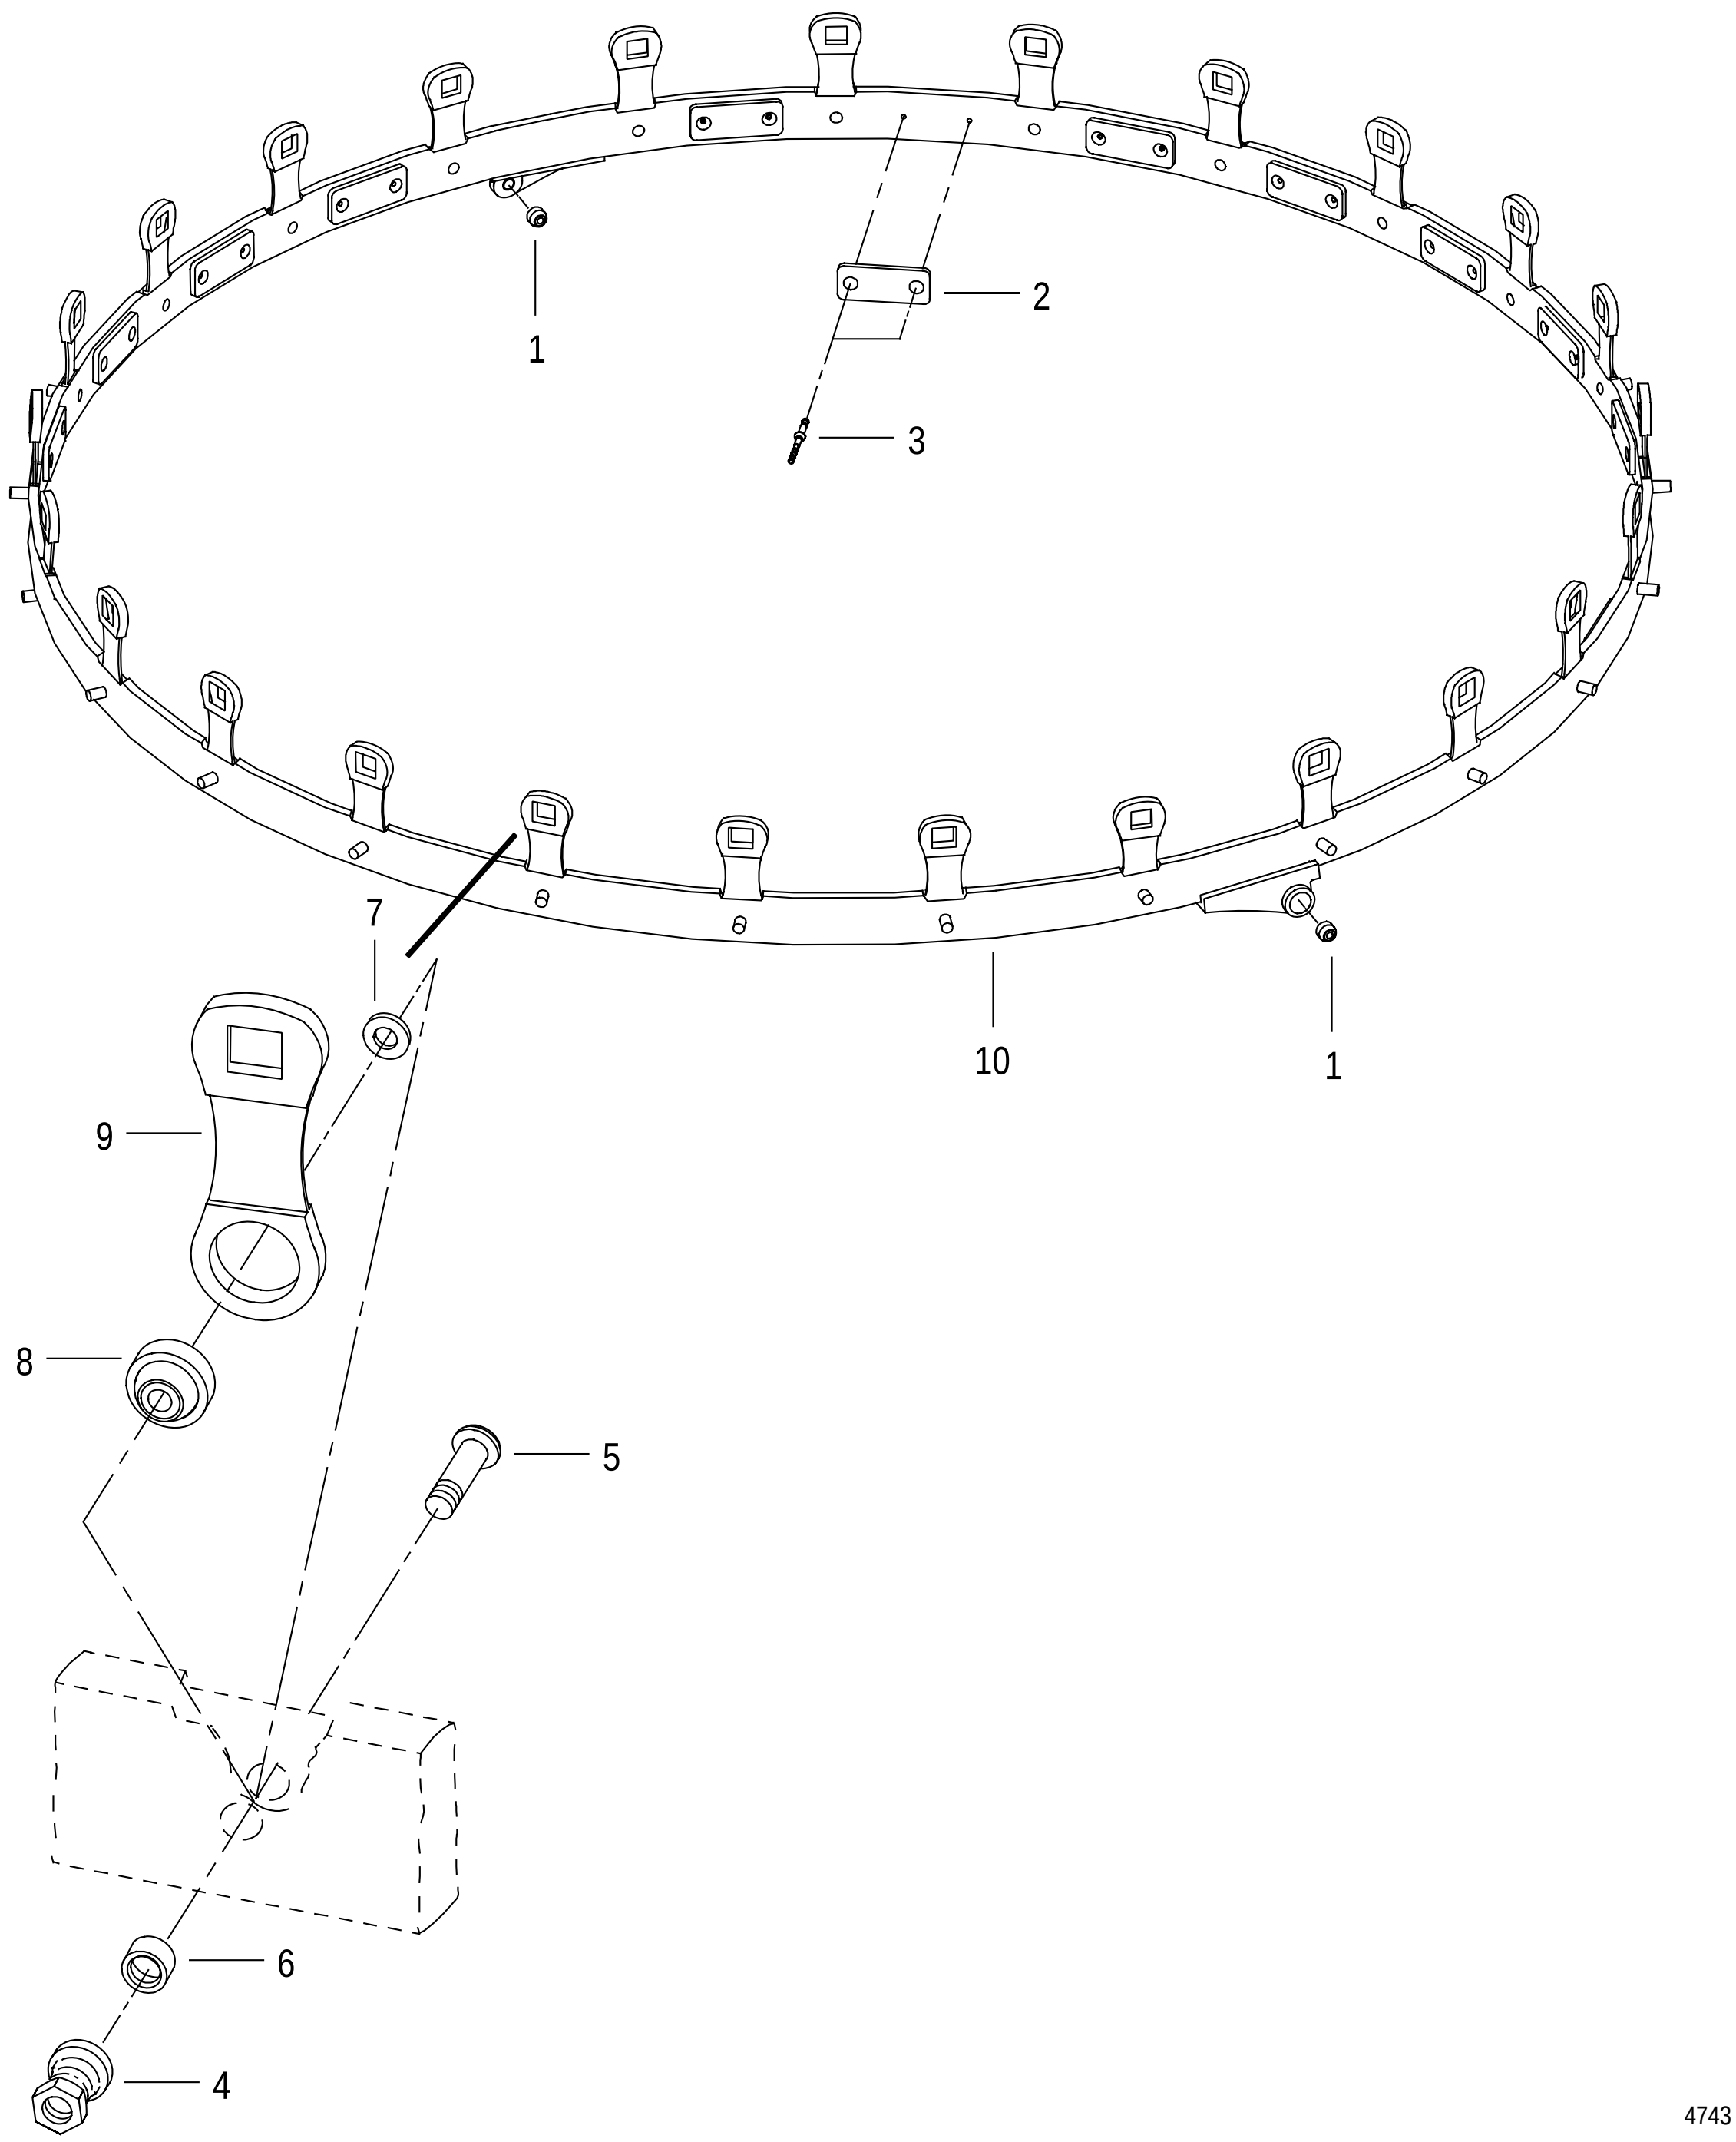


FIGURE 69. INLET ASSY FRONT COMPRESSOR STATOR SYNCHRONIZING RING

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	69	4072235	52661	RING-SYNCHRONIZING, FRONT COMPRESSOR . . . . STATOR, INLET, ASSY OF SEE FIG. 67-74 FOR NHA	1		PAFDD
	- 1	4072623	52661	. BEARING OPTION . . . . SEE OPTION TABLE	2		PAFZZ
	- 2	4072848	52661	. BUMPER OPTION . . . . SEE OPTION TABLE	23		PAFZZ
R	- 3	MLSP-M4-2	0HDW7	. RIVET-BLIND . . . . 0.125 DIA X 0.094 IN. GRIP LENGTH (AP) P&WA PART NO. 438863	2		PAFZZ
	- 4	HL198V-6	56878 73197 92215	. COLLAR-PIN-RIVET-THREADED, SELF-LOCKING . . . 0.190-32UNJF-3B X 0.447 IN. THK P&WA PART NO. ST2139-06	25		PAFZZ
	- 5	HL10V-6-8	56878 73197 92215	. PIN-RIVET-THREADED, FLAT . . . . 0.190-32UNJF-3A MOD X 0.825 IN. LONG P&WA PART NO. ST2143-08	25		PAFZZ
	- 6	4065915	52661	. SPACER-SLEEVE . . . . 0.19025 ID X 0.31275 OD X 0.100 IN. THK	25		PAFZZ
	- 7	4065518	52661	. WASHER-FLAT . . . . 0.193 ID X 0.310 OD X 0.040 IN. THK	25		PAFZZ
		4065913	52661	. LEVER ARM-COMPRESSOR STATOR LINKAGE, ... ASSY OF	25		PAFFF
	- 8	4062498	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	1		PAFZZ
	- 9	4065914	52661	.. LEVER ARM-FRONT COMPRESSOR STATOR, ... INLET	1		PAFZZ
	- 10	4078173	52661	. RING OPTION . . . . SEE OPTION TABLE	1		PAFDD


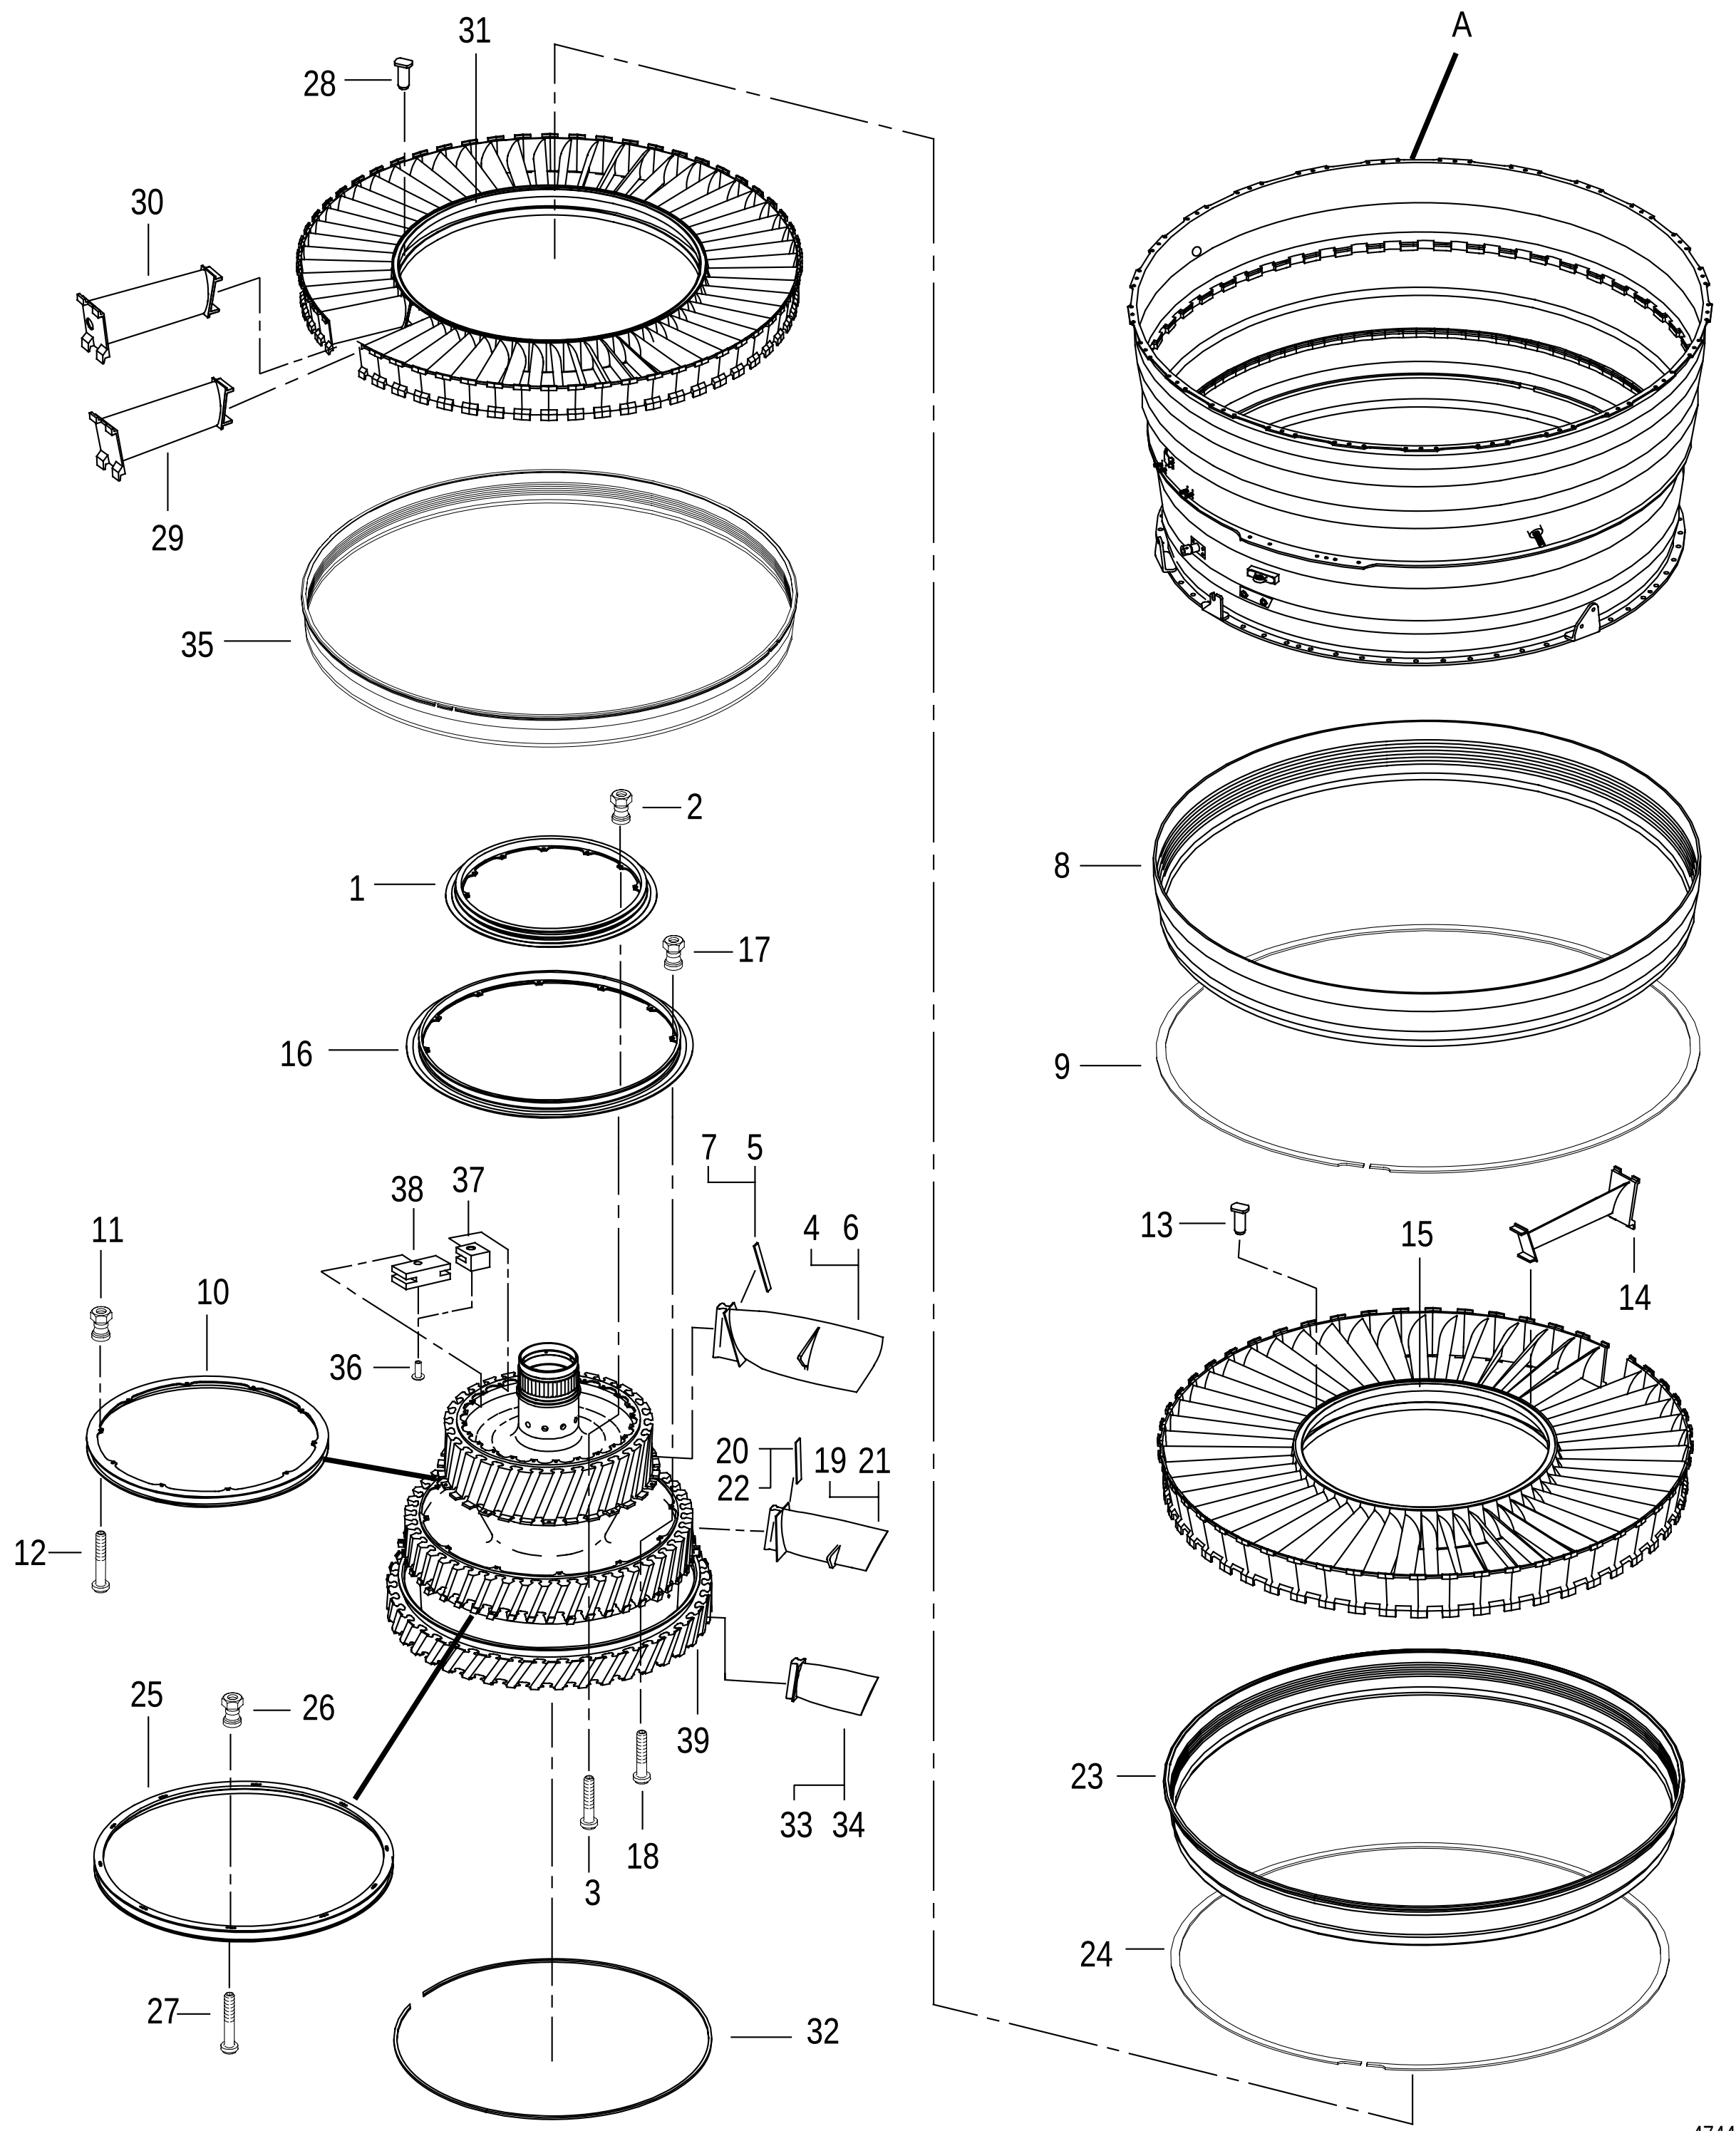


FIGURE 70. FRONT COMPRESSOR ROTOR AND STATOR ASSY
(SHEET 1 OF 2)

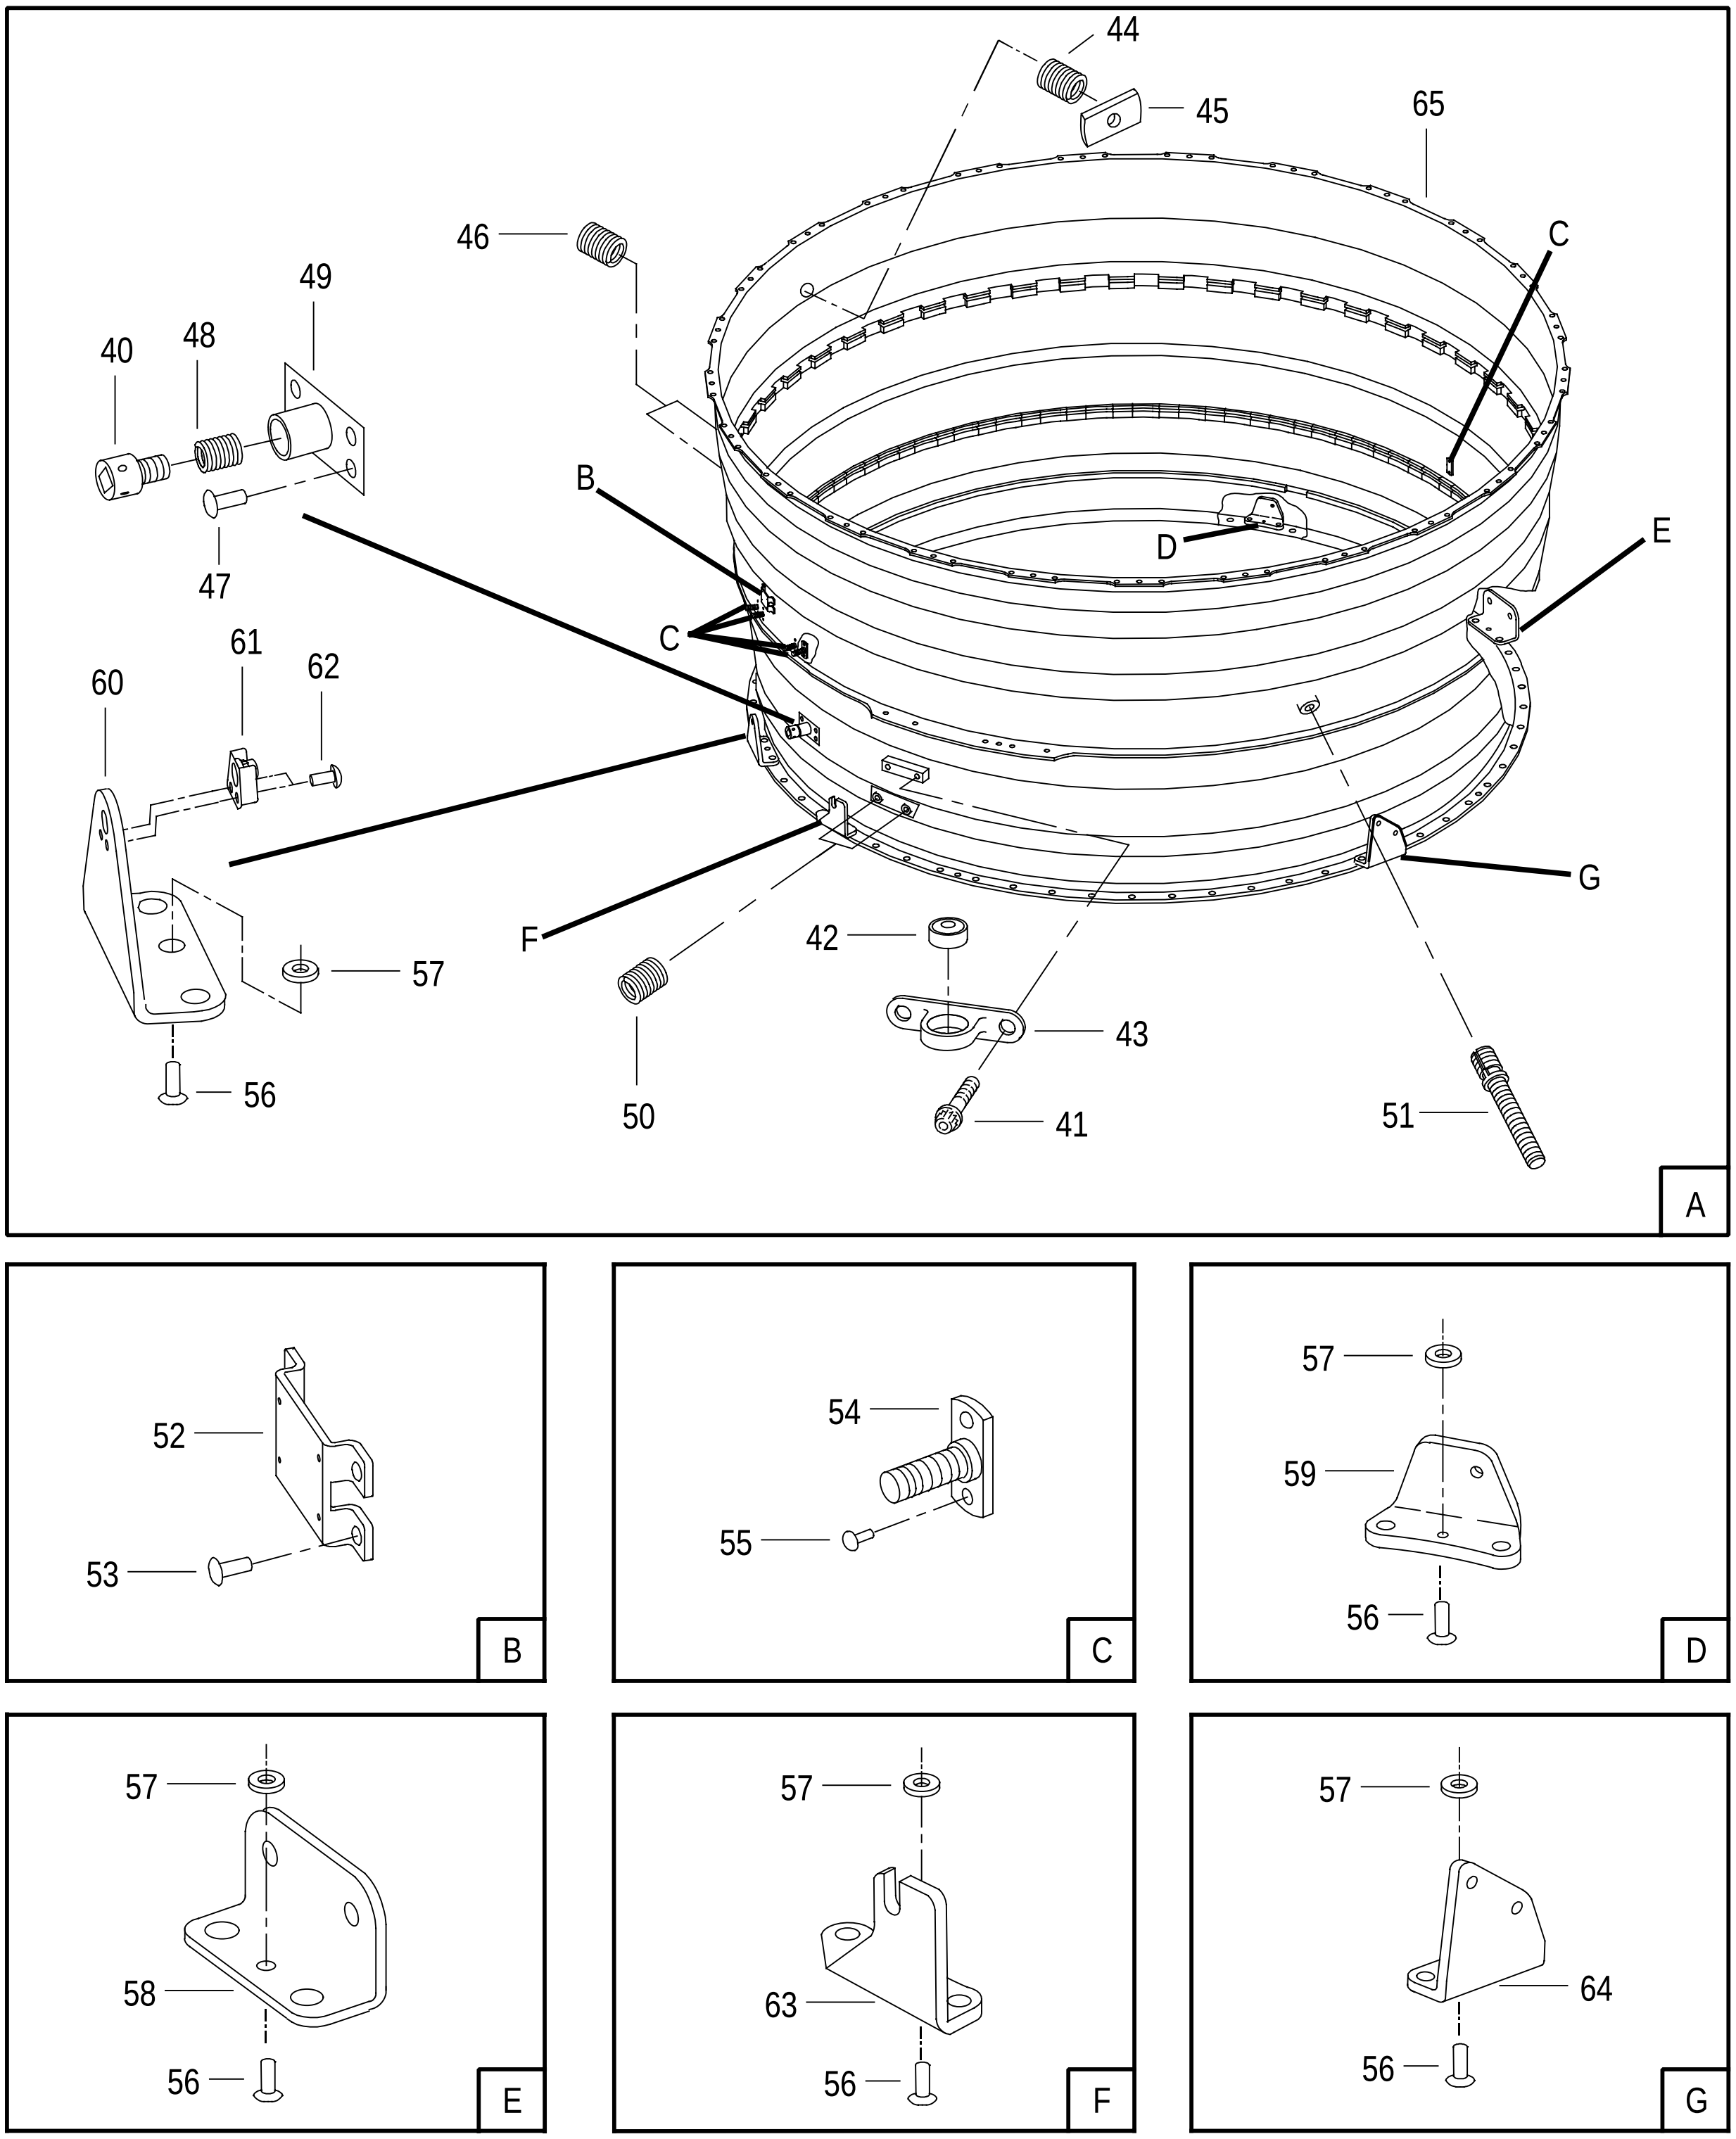

93220

FIGURE 70. FRONT COMPRESSOR ROTOR AND STATOR ASSY
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
70	=	4068714-704	52661	ROTOR AND STATOR ASSY-FRONT COMPRESSOR . SEE FIG. 67-96 FOR NHA REOP AND REID OF 4068714-703	1		ADD
	=	4068714-705	52661	ROTOR AND STATOR ASSY-FRONT COMPRESSOR . SEE FIG. 67-96 FOR NHA REOP AND REID OF 4068714-700 DO NOT PROCURE FROM P&WA	1		ADD
- 1		4071080	52661	. SEAL-AIR, FRONT COMPRESSOR, INLET	1		PAFDD
- 2		HST92LJ-5	56878 73197	. COLLAR-PIN, RIVET, THREADED, SELF-LOCKING . . 0.164-32UNJC-3B X 0.380 IN. THK (AP) P&WA PART NO. 4063974 SUPERSEDES ST2139-05	12		PAFZZ
- 3	=	HL822-5-3	56878 73197 92215	. PIN-RIVET-THREADED, FLAT .... 0.164-32UNJC-3A X 0.1875 IN. GRIP LENGTH (AP) P&WA PART NO. 4018949	12		PAFZZ
	=	HL612TB-5-3	56878 73197 92215	. PIN-RIVET-THREADED, FLAT .... 0.164-32UNJC-3A X 0.188 IN. GRIP LENGTH (AP) P&WA PART NO. ST2822-03	12		PAFZZ
- 4		4066171	52661	. BLADE-COMPRESSOR ROTOR, 1ST STAGE, ... ASSY OF USE ONLY ON 4068714-700 WHEN EXH USE 4076781 FOR SPARES REPLACEMENT USE 4066231	30		PADDD
		4076781	52661	. BLADE-COMPRESSOR ROTOR, 1ST STAGE, ... ASSY OF FOR SPARES REPLACEMENT USE 4076791 PARTIAL BREAKDOWN FOLLOWS	30		PADDD
- 5		4066158	52661	.. SEAL-COMPRESSOR ROTOR BLADE, 1ST STAGE .	1		PADZZ
		4066231	52661	. BLADE SET-COMPRESSOR ROTOR, 1ST STAGE . . . SPARES REPLACEMENT FOR 4066171	15		PAFDD
		4076791	52661	. BLADE SET-COMPRESSOR ROTOR, 1ST STAGE . . . SPARES REPLACEMENT FOR 4076781	15		PAFDD
- 6		4066171	52661	.. BLADE-COMPRESSOR ROTOR, 1ST STAGE, ... ASSY OF USE ONLY ON 4066231	2		PADDD
		4076781	52661	.. BLADE-COMPRESSOR ROTOR, 1ST STAGE, ... ASSY OF USE ONLY ON 4076171 PARTIAL BREAKDOWN FOLLOWS	2		PADDD
- 7		4066158	52661	... SEAL-COMPRESSOR ROTOR BLADE, 1ST .... STAGE	1		PADZZ
- 8		4075235	52661	. SEAL-AIR, FAN, 1ST STAGE	1	FL	PAFDD
		4081566	52661	. SEAL-AIR, FAN, 1ST STAGE	1	FM	PAFDD
- 9		4074738	52661	. LOCK-COMPRESSOR STATOR	1		PAFFF
- 10		4071081	52661	. SEAL-AIR, COMPRESSOR, FRONT, 1ST STAGE	1		PAFDD
- 11		HL198V-5	56878 73197 92215	. COLLAR-PIN-RIVET, SELF-LOCKING .... 0.164-32UNJC-3B X 0.437 IN. LONG (AP) P&WA PART NO. ST2139-05	10	J	PAFZZ
		HST92LJ-5	56878 73197	. COLLAR-PIN, RIVET, THREADED, SELF-LOCKING . . 0.164-32UNJC-3B X 0.380 IN. THK (AP) P&WA PART NO. 4063974	10	K	PAFZZ
R - 12		HL12V-5-5	0ZZV1 56878 73197 92215	. PIN-RIVET-THREADED, FLAT .... 0.164-32UNJC-3A MOD X 0.625 IN. LONG (AP) P&WA PART NO. ST2141-05	10	J	PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	70 - 12	= HL12V-5-4	0ZZV1 56878 73197 92215	. PIN-RIVET-THREADED, FLAT 0.164-32UNJC-3A MOD X 0.562 IN. LONG (AP) P&WA PART NO. ST2141-04	10	K	PAFZZ
R		= HL612TB-5-4	0ZZV1 56878 73197 92215	. PIN-RIVET-THREADED, FLAT 0.164-32UNJC-3A MOD X 0.250 IN. GRIP LENGTH (AP) P&WA PART NO. ST2822-04	10	K	PAFZZ
		4074821	52661	. COMPRESSOR STATOR-1ST STAGE, ASSY OF	1		PAFDD
	- 13	4075247	52661	.. PIN-STRAIGHT, HEADED, SLAB 0.156 DIA X 0.375 IN. LONG	208		PADZZ
	- 14	4070851	52661	.. VANE-COMPRESSOR STATOR, 1ST STAGE	52		PADBZ
	- 15	4075339	52661	.. RING-AIR SEALING, COMPRESSOR, 1ST STAGE	1		PADLD
	- 16	4071082	52661	. SEAL-AIR, COMPRESSOR, REAR, 1ST STAGE	1		PAFDD
	- 17	HST92LJ-5	56878 73197	. COLLAR-PIN, RIVET, THREADED, SELF-LOCKING 0.164-32UNJC-3B X 0.380 IN. THK (AP) P&WA PART NO. 4063974 SUPERSEDES ST2139-05	12		PAFZZ
	- 18	= HL822-5-3	56878 73197 92215	. PIN-RIVET-THREADED, FLAT 0.164-32UNJC-3A X 0.1875 IN. GRIP LENGTH (AP) P&WA PART NO. 4018949	12		PAFZZ
		= HL612TB-5-3	56878 73197 92215	. PIN-RIVET-THREADED, FLAT 0.164-32UNJC-3A X 0.188 IN. GRIP LENGTH (AP) P&WA PART NO. ST2822-03	12		PAFZZ
	- 19	4066172	52661	. BLADE-COMPRESSOR ROTOR, 2ND STAGE, ASSY OF USE ONLY ON 4068714-700 WHEN EXH USE 4076782 FOR SPARES REPLACEMENT USE 4066232	46		PADDD
		4076782	52661	. BLADE-COMPRESSOR ROTOR, 2ND STAGE, ASSY OF FOR SPARES REPLACEMENT USE 4076792 PARTIAL BREAKDOWN FOLLOWS	46		PADDD
	- 20	4066159	52661	.. SEAL-COMPRESSOR ROTOR BLADE, 2ND STAGE	1		PADZZ
		4066232	52661	. BLADE SET-COMPRESSOR ROTOR, 2ND STAGE SPARES REPLACEMENT FOR 4066172	23		PAFDD
		4076792	52661	. BLADE SET-COMPRESSOR ROTOR, 2ND STAGE SPARES REPLACEMENT FOR 4076782	23		PAFDD
	- 21	4066172	52661	.. BLADE-COMPRESSOR ROTOR, 2ND STAGE, ASSY OF USE ONLY ON 4066232	2		PADDD
		4076782	52661	.. BLADE-COMPRESSOR ROTOR, 2ND STAGE, ASSY OF USE ONLY ON 4076792 PARTIAL BREAKDOWN FOLLOWS	2		PADDD
	- 22	4066159	52661	... SEAL-COMPRESSOR ROTOR BLADE, 2ND STAGE	1		PADZZ
	- 23	4075236	52661	. SEAL-AIR, FAN, 2ND STAGE	1		PAFDD
	- 24	4074739	52661	. LOCK-COMPRESSOR STATOR	1		PAFFF
R R	- 25	4083150	52661	. SEAL-AIR, COMPRESSOR, FRONT, 2ND STAGE REPLACES 4071083	1		PAFDD
	- 26	HST92LJ-5	56878 73197	. COLLAR-PIN, RIVET, THREADED, SELF-LOCKING 0.164-32UNJC-3B X 0.380 IN. THK (AP) P&WA PART NO. 4063974 SUPERSEDES ST2139-05	10		PAFZZ
R	- 27	= HL12V-5-8	0ZZV1 56878 73197 92215	. PIN-RIVET-THREADED, FLAT 0.164-32UNJC-3A MOD X 0.812 IN. LONG (AP) P&WA PART NO. ST2141-08	10		PAFZZ
		= HL612TB-5-8	56878 73197 92215	. PIN-RIVET-THREADED, FLAT 0.164-32UNJC-3A MOD X 0.500 IN. GRIP (AP) P&WA PART NO. ST2822-08	10		PAFZZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	70 - 27		4074822	52661	. COMPRESSOR STATOR-2ND STAGE, ASSY OF	1		PAFDD
	- 28		4075247	52661	.. PIN-STRAIGHT, HEADED, SLAB . . . . 0.156 DIA X 0.375 IN. LONG	232		PADZZ
	- 29		4070852-01	52661	.. VANE-COMPRESSOR STATOR, 2ND STAGE	57		PADBZ
	- 30		4070852-02	52661	.. VANE-COMPRESSOR STATOR, 2ND STAGE	1		PADBZ
	- 31		4075338	52661	.. RING-AIR SEALING, COMPRESSOR, 2ND STAGE . .	1		PADLD
	- 32		4080320	52661	. RING-COMPRESSOR BLADE LOCK, 3RD STAGE . . . USE ONLY ON 4068714-704 AND -705	1		PAFFF
	- 33		4067003	52661	. BLADE-COMPRESSOR ROTOR, 3RD STAGE . . . . FOR SPARES REPLACEMENT USE 4077733	42		PADDD
			4077733	52661	. BLADE SET-COMPRESSOR ROTOR, 3RD STAGE . . SPARES REPLACEMENT FOR 4067003	21		PAFDD
	- 34		4067003	52661	.. BLADE-COMPRESSOR ROTOR, 3RD STAGE	2		PADDD
	- 35		4075237	52661	. SEAL-AIR, FAN, 3RD STAGE	1		PAFDD
	- 36		2146417	52661	. RIVET-TUBULAR, UNIVERSAL . . . . 0.125 DIA X 0.335 IN. LONG USE 0-16 AS REQUIRED	AR		PADZZ
	- 37	%	4014692	52661	. COUNTERWEIGHT-COMPRESSOR . . . . USE 0-10 AS REQUIRED	AR		XC
			4014692CL1	52661	. COUNTERWEIGHT . . . . 0.120 - 0.124 OZ	AR		PADZZ
			4014692CL2	52661	. COUNTERWEIGHT . . . . 0.145 - 0.149 OZ	AR		PADZZ
			4014692CL3	52661	. COUNTERWEIGHT . . . . 0.171 - 0.175 OZ	AR		PADZZ
			4014692CL4	52661	. COUNTERWEIGHT . . . . 0.196 - 0.200 OZ	AR		PADZZ
	- 38	%	4014693	52661	. COUNTERWEIGHT-COMPRESSOR . . . . USE 0-6 AS REQUIRED	AR		XC
			4014693CL1	52661	. COUNTERWEIGHT . . . . 0.311 - 0.315 OZ	AR		PADZZ
			4014693CL2	52661	. COUNTERWEIGHT . . . . 0.337 - 0.341 OZ	AR		PADZZ
			4014693CL3	52661	. COUNTERWEIGHT . . . . 0.362 - 0.366 OZ	AR		PADZZ
			4014693CL4	52661	. COUNTERWEIGHT . . . . 0.388 - 0.392 OZ	AR		PADZZ
			4014693CL5	52661	. COUNTERWEIGHT . . . . 0.414 - 0.418 OZ	AR		PADZZ
	- 39	=	4071223-01	52661	. DISK-DRUM ROTOR, FRONT COMPRESSOR, ... ASSY OF	1		PADDD
		=	4081633-01	52661	. DISK-DRUM ROTOR, FRONT COMPRESSOR, ... ASSY OF	1		PADDD
R R R R			4086294-01	52661	. DISK-DRUM ROTOR, FRONT COMPRESSOR, ... ASSY OF REOP AND REID OF 4081633-01 DO NOT PROCURE FROM P&W	1		PADDD
R R R R			4086295-01	52661	. DISK-DRUM ROTOR, FRONT COMPRESSOR, ... ASSY OF REOP AND REID OF 4071223-01 DO NOT PROCURE FROM P&W	1		PADDD
	- 40		4075766	52661	. PLUG-BORESCOPE, FAN CASE, 2ND STAGE	1		PAOZZ
	- 41		ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG SUPERSEDES ST2016-016	2		PAOZZ
			4069487	52661	. BRACKET ASSY-CONNECTING LINK	1		PAFBZ
	- 42		4062498	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	1		PAFZZ
	- 43		4069488	52661	.. BRACKET-CONNECTING LINK	1		XA
		=	4072388	52661	. CASE-FAN, ASSY OF	1	CA	PAFDD
		=	4079297	52661	. CASE-FAN, ASSY OF	1	CA	PAFDD
		=	4079430	52661	. CASE-FAN, ASSY OF	1	CA	PAFDD
			4080064	52661	. CASE-FAN, ASSY OF	1	CB/CC	PAFDD
			4080063	52661	. CASE-FAN, ASSY OF	1	CD	PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
70 - 43	4071235	52661	.. BUSHING ASSY-FAN CASE . . . . USE ONLY ON 4072388 AND 4079297	2		PADZZ
- 44	MS124656	96906	... INSERT	1		PAFZZ
- 45	4071234	52661	... BUSHING-FAN CASE	1		PADZZ
- 46	TR26036N-428SBVX	29372	.. INSERT-SCREW THREAD, SELF-LOCKING . . . . P&WA PART NO. ST2609-02 WHEN EXH USE ST2786-02	2		PAFZZ
	ST2786-02	52661	.. INSERT OPTION . . . . SEE OPTION TABLE	2		PAFZZ
	4075768	52661	.. BOSS-BORESCOPE, FAN CASE, 2ND STAGE, ... ASSY OF	1		PADBZ
- 47	MS9403-132	96906	.. RIVET (AP) . . . . USE ONLY ON 4072388	4		PADZZ
	= 528664	52661	.. RIVET-BLIND, UNIVERSAL . . . . 0.125 DIA X 0.187 IN. GRIP (AP) USE ONLY ON 4079297, 4079430, 4080063, AND 4080064	4		PADZZ
	= CR4623-04-03	05693	.. RIVET-BLIND, UNIVERSAL . . . . 0.125 DIA X 0.188 IN. GRIP (AP) P&WA PART NO. ST1588-403 USE ONLY ON 4079297, 4079430, 4080063, AND 4080064	4		PADZZ
- 48	TR26036N-1216SBVX	29372	... INSERT-SCREW THREAD, SELF-LOCKING . . . . P&WA PART NO. ST2609-06 WHEN EXH USE ST2786-06	1		PAFZZ
	ST2786-06	52661	... INSERT OPTION . . . . SEE OPTION TABLE	1		PAFZZ
- 49	4075767	52661	... BOSS-BORESCOPE, FAN CASE, 2ND STAGE	1		XA
- 50	TR26036N-1032SBVX	29372	.. INSERT-SCREW THREAD, SELF-LOCKING . . . . P&WA PART NO. ST2609-01 WHEN EXH USE ST2786-01	2		PAFZZ
	ST2786-01	52661	.. INSERT OPTION . . . . SEE OPTION TABLE	2		PAFZZ
- 51	TR28009-18	29372	.. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.375 IN. LONG P&WA PART NO. ST2665-18	1		PAFZZ
- 52	4060218	52661	.. BRACKET-INLET/FAN MODULE IDENT PLATE . . . . . WHEN EXH USE 4078323	1		PADZZ
	4078323	52661	.. BRACKET-INLET/FAN MODULE IDENT PLATE	1		PADZZ
- 53	MS9403-130	96906	.. RIVET (AP) . . . . USE ONLY ON 4072388	4		PAFZZ
	ST2213-02	52661	.. RIVET-BLIND, UNIVERSAL . . . . 0.125 DIA X 0.232 IN. GRIP (AP) USE ONLY ON 4079297, 4079430, 4080063, AND 4080064	4		PAFZZ
- 54	ST2137-01	52661	.. BOLT-ANCHOR . . . . 0.190-32UNJF-3A X 0.520 IN. LONG	6		PAFZZ
- 55	MS9318-052	96906	.. RIVET (AP)	1		PAFZZ
- 56	MS9318-100	96906	.. RIVET . . . . USE ONLY ON 4072388	5		PAFZZ
	= NAS1399C4A5	80205	.. RIVET-BLIND . . . . USE ONLY ON 4079297, 4079430, 4080063, AND 4080064 REPLACES ST1212-03	5		PAFZZ
	= NAS1399C4A4	80205	.. RIVET-BLIND . . . . USE ONLY ON 4079297, 4079430, 4080063, AND 4080064	5		PAFZZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
70 - 56	=	CR4622-04-04	05693	.. RIVET-BLIND, COUNTERSUNK .... 0.125 DIA X 0.250 IN. GRIP P&WA PART NO. ST2618-404 USE ONLY ON 4079297, 4079430, 4080063, AND 4080064	5		PAFZZ
- 57		MS9321-05	96906	.. WASHER....................................... USE ONLY ON 4079297 AND 4080064	5		PAOZZ
- 58		4075782	52661	.. BRACKET-ANGLE .... USE ONLY ON 4072388, 4079297, 4079430, AND 4080064	1		PAOZZ
		4069406	52661	.. BRACKET-ANGLE .... USE ONLY ON 4080063	1		PAOZZ
- 59		4072170	52661	.. BRACKET-ANGLE .... USE ONLY ON 4072388, 4079297, 4079430, AND 4080064	1		PAOZZ
		4069409	52661	.. BRACKET-ANGLE .... USE ONLY ON 4080063	1		PAOZZ
- 60		4075785	52661	.. BRACKET-ANGLE, ASSY OF .... USE ONLY ON 4072388, 4079297, 4079430, AND 4080064	1		PAOZZ
		4069410	52661	.. BRACKET-ANGLE, ASSY OF .... USE ONLY ON 4080063 PARTIAL BREAKDOWN FOLLOWS	1		PAOZZ
- 61	=	4046367	52661	... NUT OPTION .... SEE OPTION TABLE	1		PAFZZ
	=	ST5030-09	52661	... NUT OPTION .... SEE OPTION TABLE	1		PAFZZ
- 62		AN123469	88044	... RIVET (AP)	2		PAOZZ
- 63		4072708	52661	.. BRACKET-LOOP CLAMP .... USE ONLY ON 4072388, 4079297, 4079430, AND 4080064	1		PAOZZ
		4069405	52661	.. BRACKET-LOOP CLAMP .... USE ONLY ON 4080063	1		PAOZZ
- 64		4075784	52661	.. BRACKET-LOOP CLAMP .... USE ONLY ON 4072388, 4079297, 4079430, AND 4080064	1		PAOZZ
		4069408	52661	.. BRACKET-LOOP CLAMP .... USE ONLY ON 4080063	1		PAOZZ
- 65		4072389	52661	.. CASE-FAN .... USE ONLY ON 4072388	1		XA
		4079298	52661	.. CASE-FAN .... USE ONLY ON 4079297	1		XA
		4079431	52661	.. CASE-FAN .... USE ONLY ON 4079430 AND 4080064	1		XA
		4080083	52661	.. CASE-FAN .... USE ONLY ON 4080063	1		XA

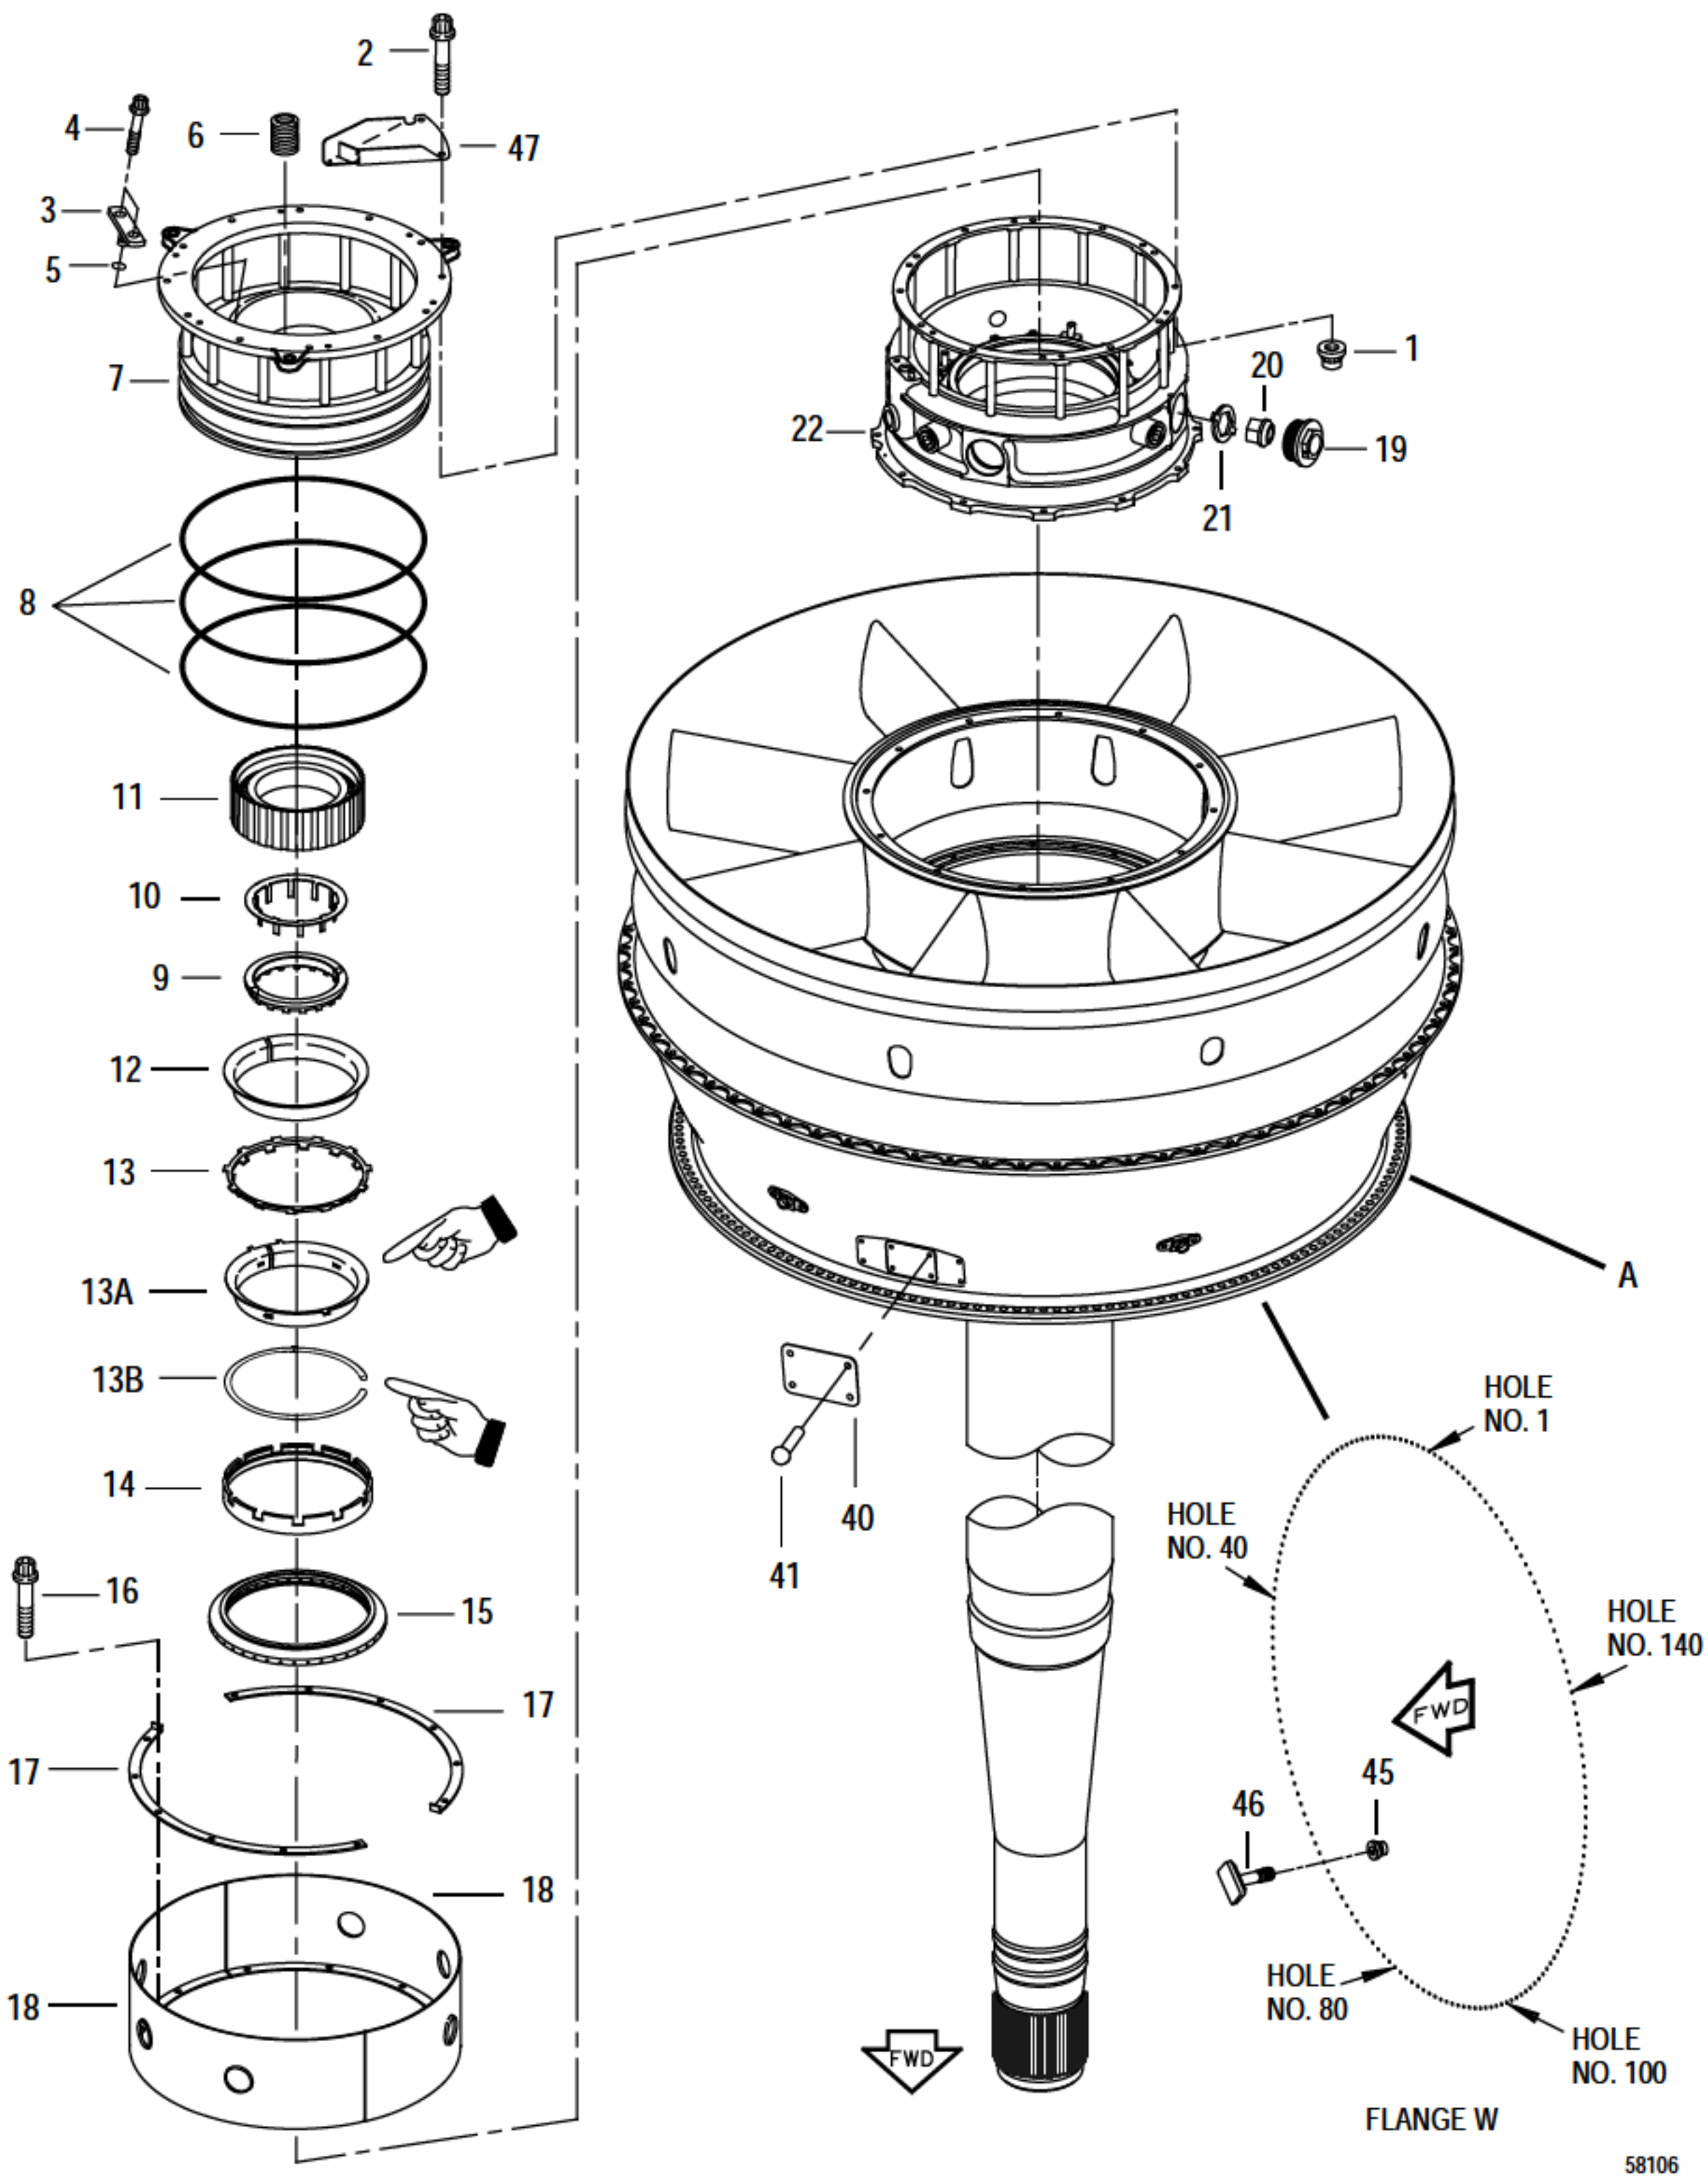


FIGURE 71. FAN DRIVE TURBINE MODULE
(SHEET 1 OF 2)

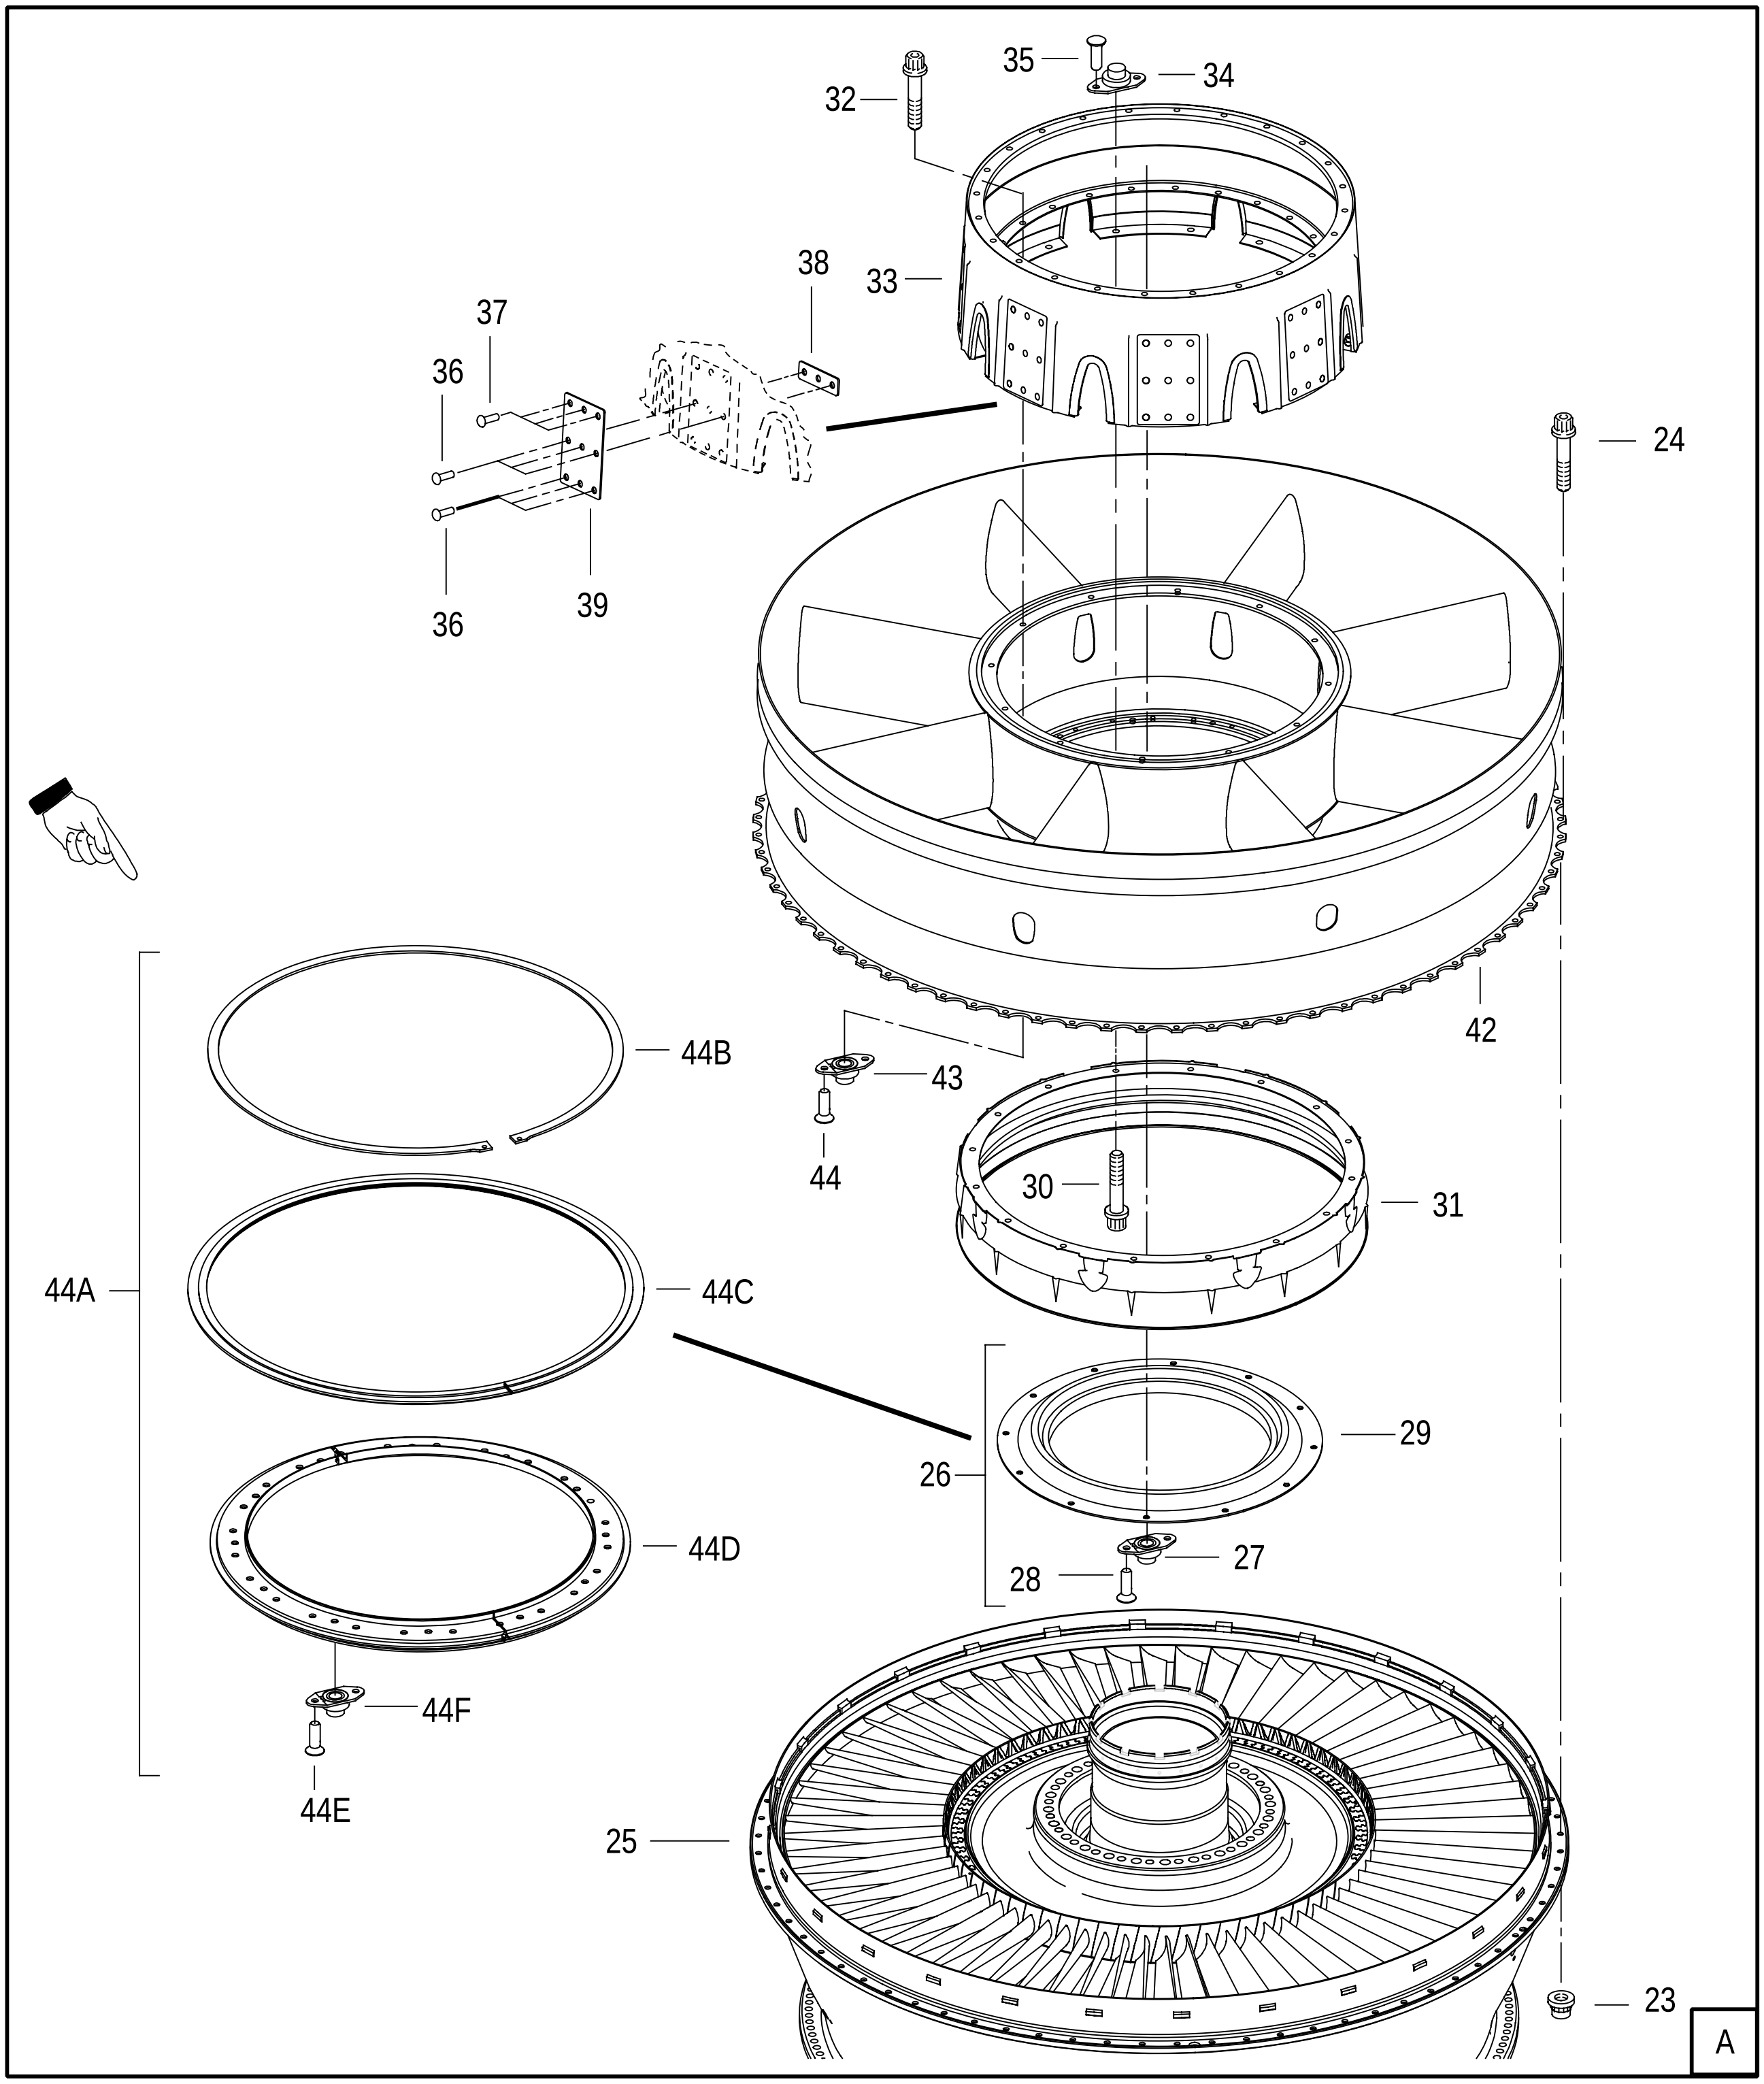


FIGURE 71. FAN DRIVE TURBINE MODULE
(SHEET 2 OF 2)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	71	4080823-801	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-801 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-802	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-802 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-803	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-803 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-804	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-804 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-805	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-805 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-806	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-806 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-807	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-807 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-808	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-808 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-809	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA	1	TY	PAFDD
R		4080823-810	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-816 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-811	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-800 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-812	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-810 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-813	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-811 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-814	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-812 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-815	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-813 DO NOT PROCURE FROM P&WA	1	TY	PAFDD
R		4080823-816	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-814 DO NOT PROCURE FROM P&WA	1	TY	PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	71	4080823-817	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080723-815 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-835	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA	1	TY	PAFDD
R		4080823-836	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-802 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-837	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-803 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-838	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-804 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-839	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-805 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-840	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-806 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-841	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-807 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-842	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-808 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-843	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-810 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-844	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-811 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-845	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-812 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-846	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-813 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-847	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-814 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-848	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-815 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-849	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-816 DO NOT PROCURE FROM P&W	1	TY	PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	71	4080823-850	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-817 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-851	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-809 DO NOT PROCURE FROM P&W	1	TY	PAFDD
R		4080823-852	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-801 DO NOT PROCURE FROM P&W	1	TY	PAFDD
		4080823-853	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-818 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
		4080823-854	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-872 DO NOT PROCURE FROM P&W	1	TY/XD	PAFDD
R		4080823-872	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA	1	TY/XB	PAFDD
R		4080823-873	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-802 OR -836 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-874	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-803 OR -837 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-875	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-804 OR -838 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-876	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-805 OR -839 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-877	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-806 OR -840 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-878	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-807 OR -841 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-879	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG 1-13 FOR NHA REOP AND REID OF 4080823-808 OR -842 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-880	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-810 OR -843 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-881	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-811 OR -844 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-882	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-812 OR -845 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	71	4080823-883	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-813 OR -846 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-884	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-814 OR -847 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-885	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-815 OR -848 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-886	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-816 OR -849 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-887	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-817 OR -850 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-888	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-809 OR -851 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-889	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-801 OR -852 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-890	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-835 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-891	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-851 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-892	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-852 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-893	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-836 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-894	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-837 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-895	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-838 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-896	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-839 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-897	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-840 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	71	4080823-898	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-841 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-899	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-842 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-900	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-843 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-901	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-844 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-902	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-845 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-903	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-846 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-904	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-847 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-905	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-848 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-906	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-849 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
R		4080823-907	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-850 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
		4080823-908	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-853 DO NOT PROCURE FROM P&W	1	TY/XF	PAFDD
		4080823-909	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-908 DO NOT PROCURE FROM P&W	1	TY/XB	PAFDD
		4082655-800	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-853 OR -873 THRU -908 DO NOT PROCURE FROM P&W	1	TY/XG	PAFDD
		4082655-801	52661	FAN DRIVE TURBINE MODULE . . . . SEE FIG. 1-13 FOR NHA REOP AND REID OF 4080823-801 THRU -909 AND 4082655-800 DO NOT PROCURE FROM P&W	1	XC/XE	PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 1	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	12		PAOZZ
- 2	MS9696-09	96906	. BOLT	12		PAFZZ
- 3	4071897	52661	. PLUG-NO. 5 BEARING SUPPORT	1		PAFZZ
- 4	ST2635-016	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAFZZ
- 5	ST2283-006	52661	. PACKING-PREFORMED . . . . 0.114 ID X 0.070 IN. DIA ROUND	1		PAFZZ
	4076393	52661	. SUPPORT ASSY-NO. 5 BEARING INNER	1	NV	PAFLD
	4081128	52661	. SUPPORT ASSY-NO. 5 BEARING INNER	1	NW	PAFLD
- 6	782451	52661	.. INSERT OPTION . . . . SEE OPTION TABLE	6		PAFZZ
- 7	4076392	52661	.. SUPPORT-NO. 5 BEARING INNER . . . . USE ONLY ON 4076393	1		XA
	4081129	52661	.. SUPPORT-NO. 5 BEARING INNER . . . . USE ONLY ON 4081128	1		XA
- 8	069000186	05939	. SEAL-NO. 5 BEARING DAMPER . . . . P&WA PART NO. 4077082	1		PAFZZ
- 9	4060478	52661	. NUT-PLAIN, ROUND . . . . 3.125-12 LH X 0.495 IN. THK	1		PAFZZ
- 10	4060477	52661	. WASHER-KEY . . . . 3.140 ID X 3.745 OD X 0.0305 IN. THK	1		PAFZZ
- 11	4067896	52661	. BEARING OPTION-NO. 5 . . . . SEE OPTION TABLE	1		PAFLD
- 12	4075318	52661	. GUIDE-NO. 5 BEARING ROLLER	1	KY	PAFZZ
- 13	4074203	52661	. WASHER-KEY . . . . 5.060 DIA X 0.050 IN. THK	1	KY	PAFZZ
- 13A	4082488	52661	. GUIDE-NO. 5 BEARING ROLLER	1	KZ	PAFZZ
- 13B	4001684	52661	. RING-RETAINING . . . . 5.245 HOUSING DIA X 0.0625 IN. DIA WIRE	1	KZ	PAFZZ
- 14	4022304	52661	. NUT-PLAIN, ROUND . . . . 5.375-12 X 0.680 IN. THK	1		PAFZZ
- 15	4021784	52661	. SEAT-NO. 5 BEARING SEAL	1		PAFZZ
- 16	MS9556-13	96906	. BOLT	12		PAOZZ
- 17	4078450	52661	. SPACER-NO. 5 BEARING HEAT SHIELD . . . . REPLACES 4077211	2		PAFZZ
- 18	4076292	52661	. SHIELD-HEAT, NO. 5 BEARING	2		PAFZZ
- 19	4034066	52661	. SEAT-BALL SOCKET, NO. 5 BEARING SUPPORT . . .	4		PAFZZ
- 20	4024675	52661	. BALL END-ROD, NO. 5 BEARING SUPPORT	4		PAFBZ
- 21	4007021	52661	. WASHER-KEY . . . . 0.885 ID X 0.120 IN. THK	4		PAFZZ
- 22	4075044	52661	. SEAL ASSY-NO. 5 BEARING . . . . SEE FIG. 72 FOR DETAIL PARTS	1	LA	AFF
	4082618	52661	. SEAL ASSY-NO. 5 BEARING . . . . SEE FIG. 72 FOR DETAIL PARTS	1	LB	AFF
- 23	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	72		PAOZZ
- 24	MS9696-09	96906	. BOLT	72		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 25	4068716-734	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-801 REOP AND REID OF 4068716-725 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	QP	ADF
	4068716-735	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-802 REOP AND REID OF 4068716-726 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	KE	ADF
	4068716-736	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-803 REOP AND REID OF 4068716-727 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	NA	ADF
	4068716-737	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-804 REOP AND REID OF 4068716-728 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	NC	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 25	4068716-738	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-805 REOP AND REID OF 4068716-729 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	NE	ADF
	4068716-739	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-806 REOP AND REID OF 4068716-730 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	NG	ADF
	4068716-740	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-807 REOP AND REID OF 4068716-731 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	PR	ADF
	4068716-748	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-808 REOP AND REID OF 4068716-732 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	PT	ADF
	4068716-733	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-809 SEE FIG. 73 FOR DETAIL PARTS	1	JU/QM	ADF
	4068716-723	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-809 SEE FIG. 73 FOR DETAIL PARTS	1	JV/KC	ADF
	4068716-751	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-810 REOP AND REID OF 4068716-750 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	PV	ADF
	4068716-752	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-811 REOP AND REID OF 4068716-741 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	PX	ADF
	4068716-753	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-812 REOP AND REID OF 4068716-742 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	PZ	ADF
	4068716-754	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-813 REOP AND REID OF 4068716-743 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	QB	ADF
	4068716-755	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-814 REOP AND REID OF 4068716-744 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	QD	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 25	4068716-756	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-815 REOP AND REID OF 4068716-745 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	QF	ADF
	4068716-757	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-816 REOP AND REID OF 4068716-746 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	QH	ADF
	4068716-758	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-817 REOP AND REID OF 4068716-747 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	QK	ADF
	4068716-759	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-818 REOP AND REID OF 4068716-705 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-795	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-835 SEE FIG. 73 FOR DETAIL PARTS	1	HE	ADF
	4068716-796	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-836 REOP AND REID OF 4068716-735 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HG	ADF
	4068716-797	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-837 REOP AND REID OF 4068716-736 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HJ	ADF
	4068716-798	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-838 REOP AND REID OF 4068716-737 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HL	ADF
	4068716-799	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-839 REOP AND REID OF 4068716-738 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HN	ADF
	4068716-800	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-840 REOP AND REID OF 4068716-739 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HQ	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 25	4068716-801	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT COMPRESSOR DRIVE USE ONLY ON 4080823-841 REOP AND REID OF 4068716-740 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HS	ADF
	4068716-802	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT COMPRESSOR DRIVE USE ONLY ON 4080823-842 REOP AND REID OF 4068716-748 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HU	ADF
	4068716-803	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT COMPRESSOR DRIVE USE ONLY ON 4080823-843 REOP AND REID OF 4068716-751 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HW	ADF
	4068716-804	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT COMPRESSOR DRIVE USE ONLY ON 4080823-844 REOP AND REID OF 4068716-752 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HY	ADF
	4068716-805	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT COMPRESSOR DRIVE USE ONLY ON 4080823-845 REOP AND REID OF 4068716-753 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JA	ADF
	4068716-806	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT COMPRESSOR DRIVE USE ONLY ON 4080823-846 REOP AND REID OF 4068716-754 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JC	ADF
	4068716-807	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT COMPRESSOR DRIVE USE ONLY ON 4080823-847 REOP AND REID OF 4068716-755 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JE	ADF
	4068716-808	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT COMPRESSOR DRIVE USE ONLY ON 4080823-848 REOP AND REID OF 4068716-756 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JG	ADF
	4068716-809	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT COMPRESSOR DRIVE USE ONLY ON 4080823-849 REOP AND REID OF 4068716-757 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JJ	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 25	4068716-810	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-850 REOP AND REID OF 4068716-758 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JL	ADF
	4068716-811	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-851 REOP AND REID OF 4068716-733 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JN	ADF
	4068716-812	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-852 REOP AND REID OF 4068716-734 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JQ	ADF
	4068716-813	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-853 REOP AND REID OF 4068716-759 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-814	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE R USE ONLY ON 4080823-854 AND R 4082655-801 SEE FIG. 73 FOR DETAIL PARTS	1	SY	ADF
	4068716-815	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-835 SEE FIG. 73 FOR DETAIL PARTS	1	HF/KD	ADF
	4068716-816	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-836 REOP AND REID OF 4068716-796 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HH/KF	ADF
	4068716-817	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-837 REOP AND REID OF 4068716-797 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HK/NB	ADF
	4068716-818	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-838 REOP AND REID OF 4068716-798 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HM/ND	ADF
	4068716-819	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-839 REOP AND REID OF 4068716-799 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HP/NF	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 25	4068716-820	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT .... COMPRESSOR DRIVE USE ONLY ON 4080823-840 REOP AND REID OF 4068716-800 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HR/NH	ADF
	4068716-821	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT .... COMPRESSOR DRIVE USE ONLY ON 4080823-841 REOP AND REID OF 4068716-801 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HT/PS	ADF
	4068716-822	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT .... COMPRESSOR DRIVE USE ONLY ON 4080823-842 REOP AND REID OF 4068716-802 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HV/PU	ADF
	4068716-823	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT .... COMPRESSOR DRIVE USE ONLY ON 4080823-843 REOP AND REID OF 4068716-803 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HX/PW	ADF
	4068716-824	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT .... COMPRESSOR DRIVE USE ONLY ON 4080823-844 REOP AND REID OF 4068716-804 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	HZ/PY	ADF
	4068716-825	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT .... COMPRESSOR DRIVE USE ONLY ON 4080823-845 REOP AND REID OF 4068716-805 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JB/QA	ADF
	4068716-826	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT .... COMPRESSOR DRIVE USE ONLY ON 4080823-846 REOP AND REID OF 4068716-806 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JD/QC	ADF
	4068716-827	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT .... COMPRESSOR DRIVE USE ONLY ON 4080823-847 REOP AND REID OF 4068716-807 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JF/QE	ADF
	4068716-828	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT .... COMPRESSOR DRIVE USE ONLY ON 4080823-848 REOP AND REID OF 4068716-808 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JH/QG	ADF
	4068716-829	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT .... COMPRESSOR DRIVE USE ONLY ON 4080823-849 REOP AND REID OF 4068716-809 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETIAL PARTS	1	JK/QJ	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 25	4068716-830	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-850 REOP AND REID OF 4068716-810 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JM/QL	ADF
	4068716-831	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-851 REOP AND REID OF 4068716-811 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JP/QN	ADF
	4068716-832	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-852 REOP AND REID OF 4068716-812 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1	JR/QR	ADF
	4068716-850	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE R USE ONLY ON 4080823-872 AND R 4082655-800 SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-851	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-873 REOP AND REID OF 4068716-735 OR -816 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-852	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-874 REOP AND REID OF 4068716-736 OR -817 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-853	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-875 REOP AND REID OF 4068716-737 OR -818 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-854	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-876 REOP AND REID OF 4068716-738 OR -819 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-855	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-877 REOP AND REID OF 4068716-739 OR -820 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-856	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-878 REOP AND REID OF 4068716-740 OR -821 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-857	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-879 REOP AND REID OF 4068716-748 OR -822 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 25	4068716-858	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-880 REOP AND REID OF 4068716-751 OR -823 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-859	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-881 REOP AND REID OF 4068716-752 OR -824 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-860	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-882 REOP AND REID OF 4068716-753 OR -825 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-861	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-883 REOP AND REID OF 4068716-754 OR -826 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-862	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-884 REOP AND REID OF 4068716-755 OR -827 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-863	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-885 REOP AND REID OF 4068716-756 OR -828 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-864	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-886 REOP AND REID OF 4068716-757 OR -829 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-865	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-887 REOP AND REID OF 4068716-758 OR -830 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-866	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-888 REOP AND REID OF 4068716-733 OR -831 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-867	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-889 REOP AND REID OF 4068716-734 OR -832 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 25	4068716-868	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-890 REOP AND REID OF 4068716-795 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-869	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-891 REOP AND REID OF 4068716-811 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-870	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-892 REOP AND REID OF 4068716-812 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-871	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-893 REOP AND REID OF 4068716-796 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-872	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-894 REOP AND REID OF 4068716-797 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-873	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-895 REOP AND REID OF 4068716-798 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-874	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-896 REOP AND REID OF 4068716-799 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-875	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-897 REOP AND REID OF 4068716-800 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-876	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-898 REOP AND REID OF 4068716-801 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-877	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-899 REOP AND REID OF 4068716-802 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 25	4068716-878	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-900 REOP AND REID OF 4068716-803 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-879	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-901 REOP AND REID OF 4068716-804 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-880	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-902 REOP AND REID OF 4068716-805 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-881	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-903 REOP AND REID OF 4068716-806 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-882	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-904 REOP AND REID OF 4068716-807 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-883	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-905 REOP AND REID OF 4068716-808 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-884	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-906 REOP AND REID OF 4068716-809 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-885	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-907 REOP AND REID OF 4068716-810 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-886	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE USE ONLY ON 4080823-908 REOP AND REID OF 4068716-813 DO NOT PROCURE FROM P&WA SEE FIG. 73 FOR DETAIL PARTS	1		ADF
	4068716-888	52661	. ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 73 FOR DETAIL PARTS	1	SZ	ADF
- 26	4073591	52661	. RING-AIR SEALING, TURBINE, 4TH STAGE, ASSY . . OF USE ONLY ON 4080823-801 THRU -818, -835 THRU -853, -872 THRU -899, AND -908 WHEN EXH USE 4078194	1		PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
71 - 26	4078194	52661	. RING-AIR SEALING, TURBINE, 4TH STAGE, ASSY OF USE ONLY ON 4080823-801 THRU -818, -835 R THRU -853, -872 THRU -899, -908 AND R 4082655-800	1		PAFDD
	4083113	52661	. RING-AIR SEALING, TURBINE, 4TH STAGE, ASSY OF R USE ONLY ON 4080823-854 AND 4082655-801 PARTIAL BREAKDOWN FOLLOWS	1	SY	PAFDD
- 27	4072398	52661	.. NUT OPTION SEE OPTION TABLE	12		PAFZZ
- 28	AN123629	88044	.. RIVET (AP)	2		PAFZZ
- 29	4064226	52661	.. SUPPORT-TURBINE AIR SEALING RING, 4TH STAGE USE ONLY ON 4073591	1		XA
	4077092	52661	.. SUPPORT-TURBINE AIR SEALING RING, 4TH STAGE USE ONLY ON 4078194	1		XA
	4083114	52661	.. SUPPORT-TURBINE AIR SEALING RING, 4TH STAGE USE ONLY ON 4083113	1		XA
- 30	MS9696-05	96906	. BOLT	16		PAFZZ
- 31	4072533-01	52661	. DUCT-TURBINE EXHAUST, ASSY OF USE ONLY ON 4080823-801 THRU -818, -835 R THRU -853, -872 THRU -899, -908 AND R 4082655-800	1		PAFDD
	4084485-01	52661	. DUCT-TURBINE EXHAUST, ASSY OF R USE ONLY ON 4080823-854 AND 4082655-801 SUPERSEDES 4083112-01	1		PAFDD
- 32	MS9696-09	96906	. BOLT	12		PAFZZ
- 33	4072535-01	52661	. DUCT-TURBINE EXHAUST, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 34	ST2737-09	52661	.. NUT OPTION SEE OPTION TABLE	16		PAFZZ
- 35	AN123618	88044	.. RIVET (AP)	2		PAFZZ
- 36	AN123336	88044	. RIVET	48		PAFZZ
- 37	AN123399	88044	. RIVET	24		PADZZ
- 38	4072535-07	52661	. PATCH-DUCT, TURBINE EXHAUST	8		PADZZ
- 39	4072535-08	52661	. PATCH-DUCT, TURBINE EXHAUST	8		PADZZ
- 40	4075518 *	52661	. PLATE-IDENTIFICATION, FAN DRIVE TURBINE MODULE	1		PADZZ
- 41	NAS1398C4A2	80205	. RIVET (AP) SUPERSEDES ST2213-02	4		PAFZZ
- 42	4071463-01	52661	. CASE-TURBINE EXHAUST, ASSY OF	1	SY	PAFDD
	4080315-01	52661	. CASE-TURBINE EXHAUST, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1	SZ	PAFDD
- 43	4072398	52661	.. NUT OPTION SEE OPTION TABLE	24		PAFZZ
- 44	AN123620	88044	.. RIVET (AP)	2		PAFZZ
- 44A	4082239	52661	. BRUSH SEAL AND SUPPORT ASSY-TURBINE AIR, 4TH STAGE	1	SZ	PAFDD
- 44B	4082235	52661	.. SUPPORT-TURBINE, AIR SEALING RING, 4TH STAGE	1		PADBZ
- 44C	4082236-01	52661	.. SEAL-BRUSH, TURBINE, 4TH STAGE, ASSY OF	1		PADZZ
- 44D	4082237	52661	.. RING-RETAINING 12.470 IN. SHAFT DIA X 0.070 IN.	1		PADZZ
- 44E	AN123629	88044	.. RIVET	24		PAFZZ
- 44F	4072398	52661	.. NUT OPTION SEE OPTION TABLE	12		PAFZZ
	4068700	52661	ENGINE ASSY-TURBO FAN	REF	A	ADD
	4068800	52661	ENGINE ASSY-TURBO FAN	REF	B	ADD
- 45	4023116	52661	. NUT OPTION SEE OPTION TABLE	85		PAOZZ
- 46	4074021	52661	. BOLT-MACHINE, SLAB 0.250-28UNJF-3A X 0.885 IN. LONG	85		PAFZZ
- 47	4081281	52661	. BRACKET-LOOP CLAMP	1		PAOZZ

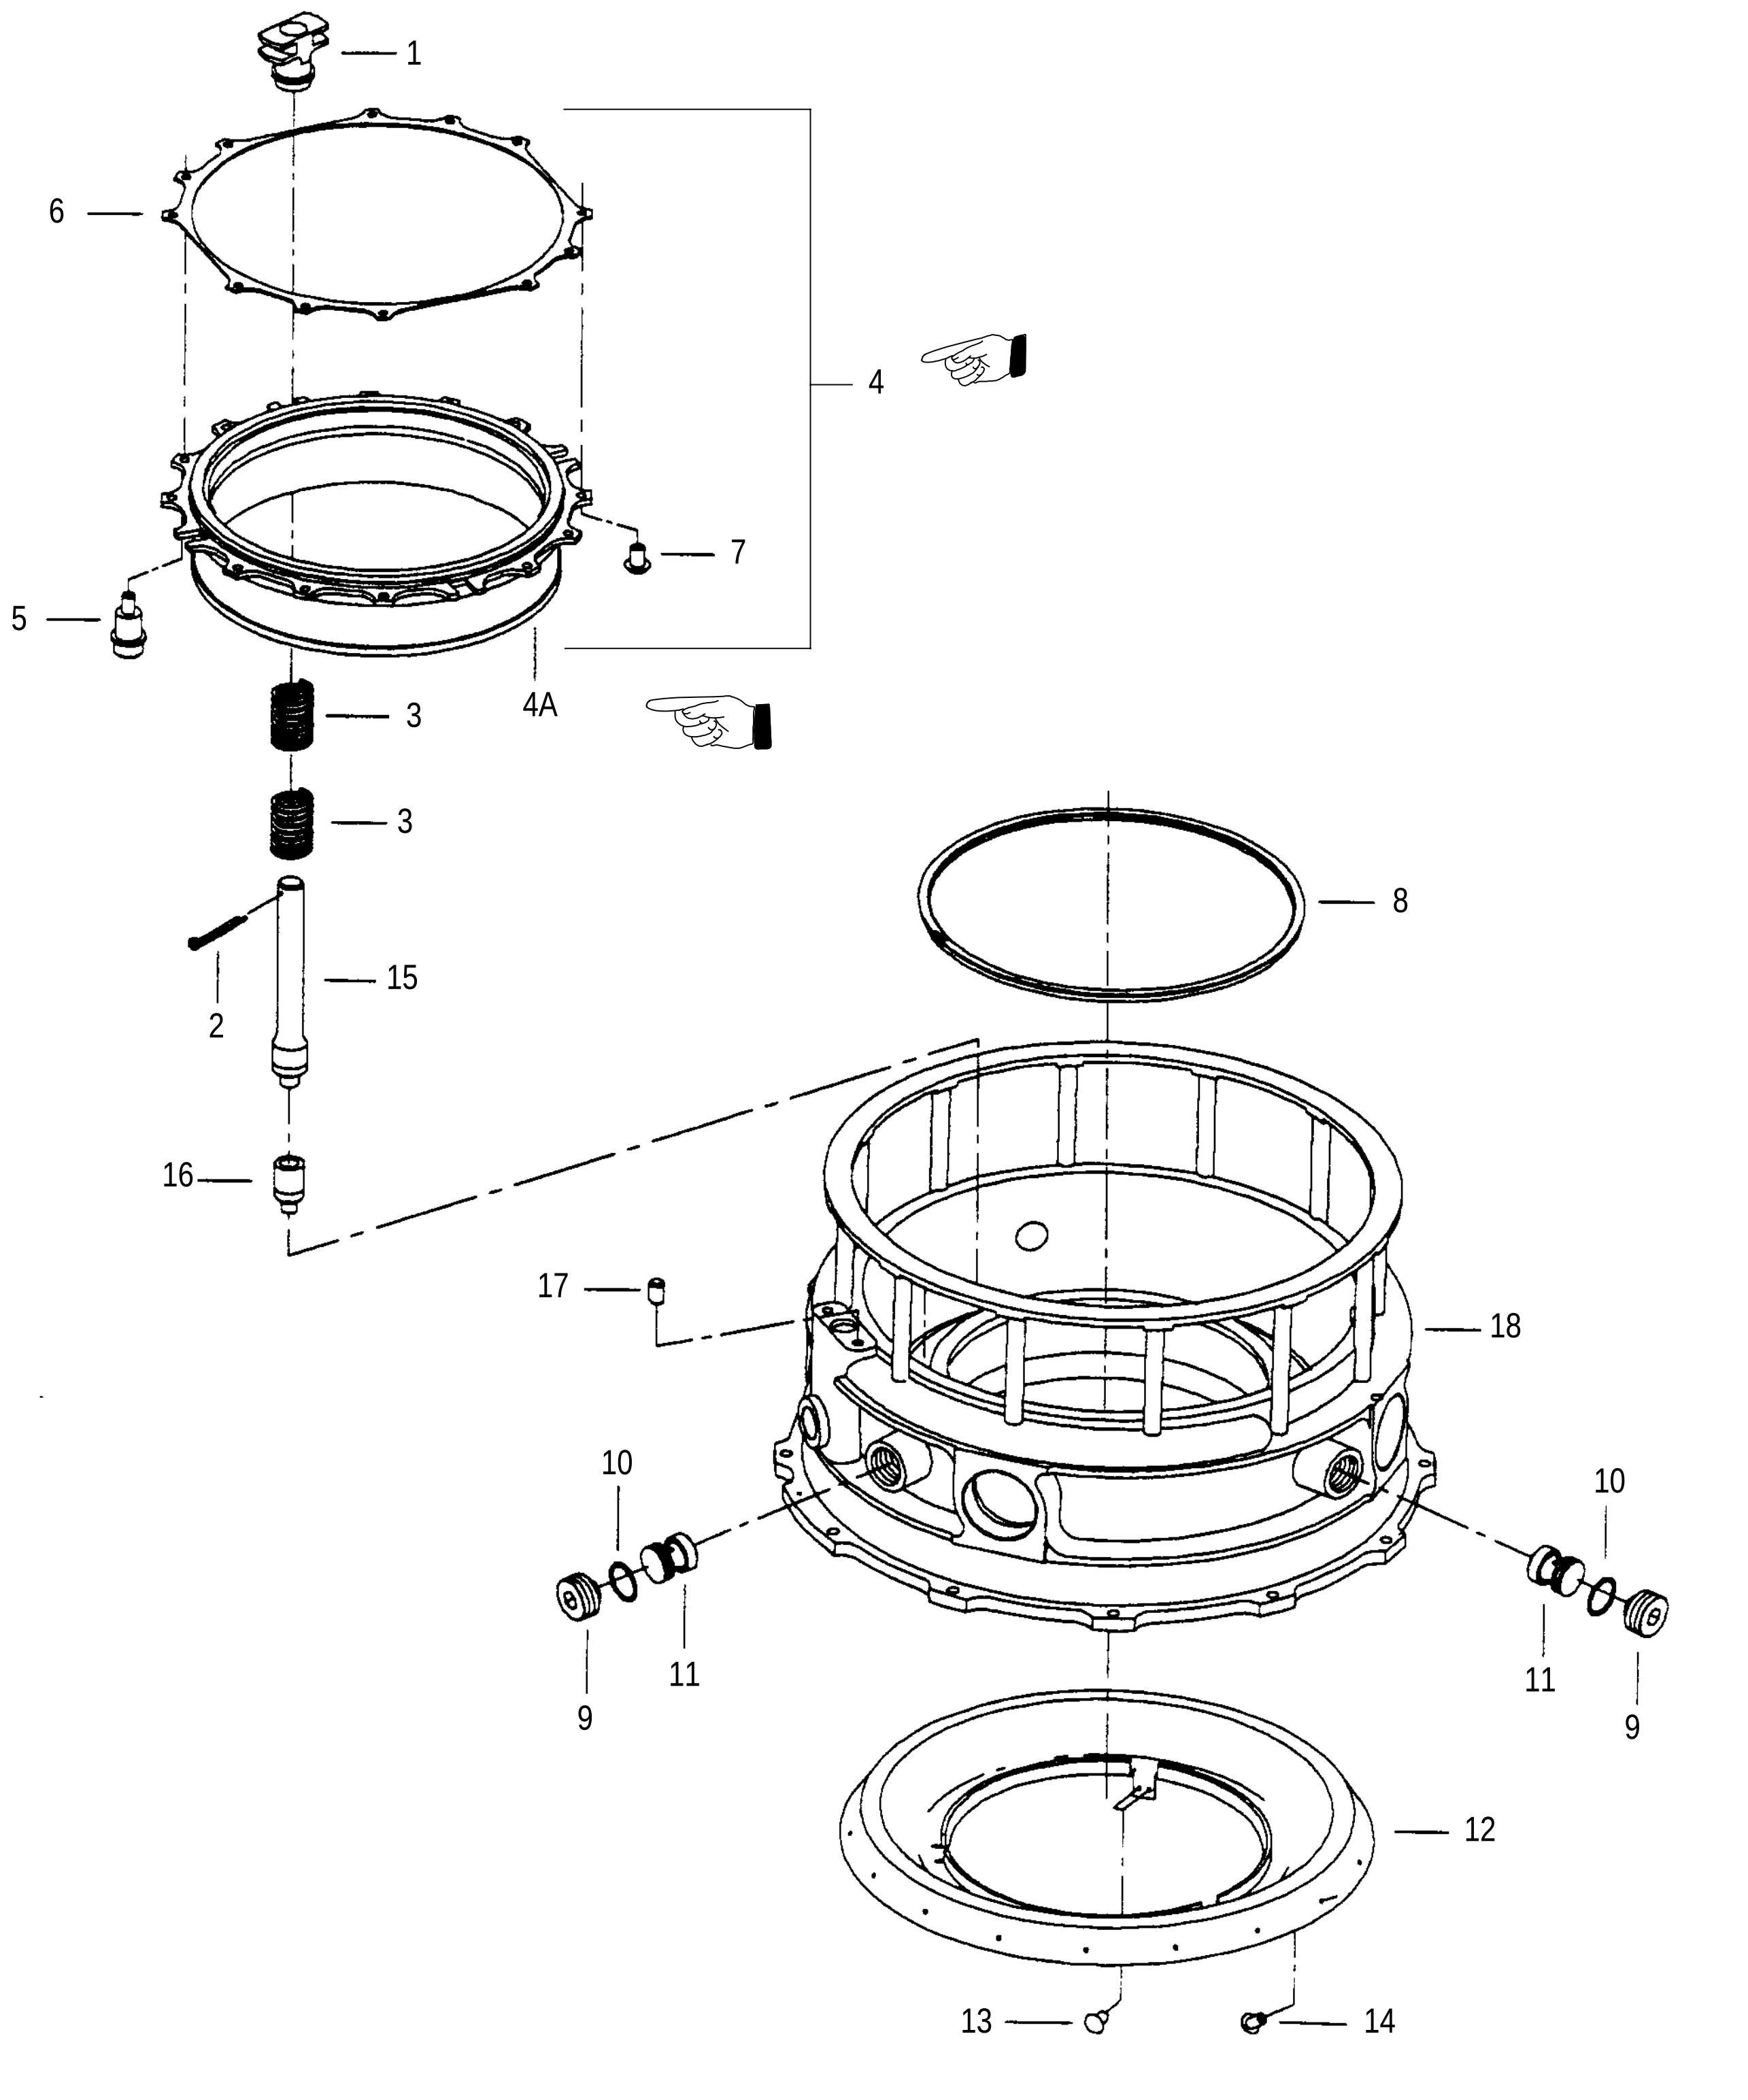


FIGURE 72. NO. 5 BEARING SEAL ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
72	4075044	52661	SEAL ASSY-NO. 5 BEARING . . . . SEE FIG. 71-22 FOR NHA	1	LA	AFF
	4082618	52661	SEAL ASSY-NO. 5 BEARING . . . . SEE FIG. 71-22 FOR NHA	1	LB	AFF
- 1	4021692	52661	. SEAT-HELICAL COMPRESSION SPRING	4		PAFZZ
- 2	MS9245-03	96906	. PIN (AP)	1		PAFZZ
- 3	4007085	52661	. SPRING-HELICAL COMPRESSION . . . . 0.431 X 0.031 X 11.5 COILS	8		PAFZZ
- 4	4018382	52661	. SEAL OPTION . . . . PROCUREMENT NO. CONSISTS OF	1		PAFLD
	4014756	52661	.. SEAL-FACE, NO. 5 BEARING, ASSY OF . . . . OPTIONAL TO 4014757	1		XA
	4014757	52661	.. SEAL-FACE, NO. 5 BEARING, ASSY OF . . . . OPTIONAL TO 4014756	1		XA
- 4A	4014755	52661	... HOUSING-NO. 5 BEARING SEAL	1		XA
- 5	4014767	52661	... SEAT-HELICAL COMPRESSION SPRING	4		PADZZ
- 6	4014758	52661	... PLATE-NO. 5 BEARING SEAL	1		PADZZ
- 7	4001006	52661	... RIVET-TUBULAR, UNIVERSAL . . . . 0.156 DIA X 0.250 IN. GRIP (AP)	8		PADZZ
- 8	4006262	52661	. SEAL RING-METAL . . . . 6.350 OD X 0.180 X 0.150 IN. THK	1		PAFZZ
- 9	4075986	52661	. CAP-OIL CHECK VALVE.	3		PAFZZ
- 10	ST2283-016	52661	. PACKING-PREFORMED . . . . 0.614 ID X 0.070 IN. DIA ROUND	3		PAFZZ
- 11	4071849	52661	. VALVE ASSY-OIL CHECK . . . . USE ONLY ON 4075044	3		PAFZZ
	4082617	52661	. VALVE ASSY-OIL CHECK . . . . USE ONLY ON 4082618	3		PAFZZ
	= 4075046	52661	. SEAL-NO. 5 BEARING, ASSY OF	1		PAFLD
	= 4079331	52661	. SEAL-NO. 5 BEARING, ASSY OF	1		PAFLD
- 12	4077269	52661	.. SHIELD-HEAT, NO. 5 BEARING . . . . USE ONLY ON 4075046	1		PADLD
	4079327	52661	.. SHIELD-HEAT, NO. 5 BEARING . . . . USE ONLY ON 4079331	1		PADLD
- 13	AN123618	88044	.. RIVET (AP)	6		PAFZZ
- 14	AN123336	88044	.. RIVET (AP)	12		PAFZZ
- 15	4014754	52661	.. PIN-NO. 5 BEARING SEAL.	4		PADZZ
- 16	4014768	52661	.. SEAT-HELICAL COMPRESSION SPRING	4		PADZZ
- 17	MS9390-290	96906	.. PIN	1		PADZZ
- 18	4071212	52661	.. SUPPORT-NO. 5 BEARING SEAL . . . . USE ONLY ON 4075046	1		XA
	4079330	52661	.. SUPPORT-NO. 5 BEARING SEAL . . . . USE ONLY ON 4079331	1		XA

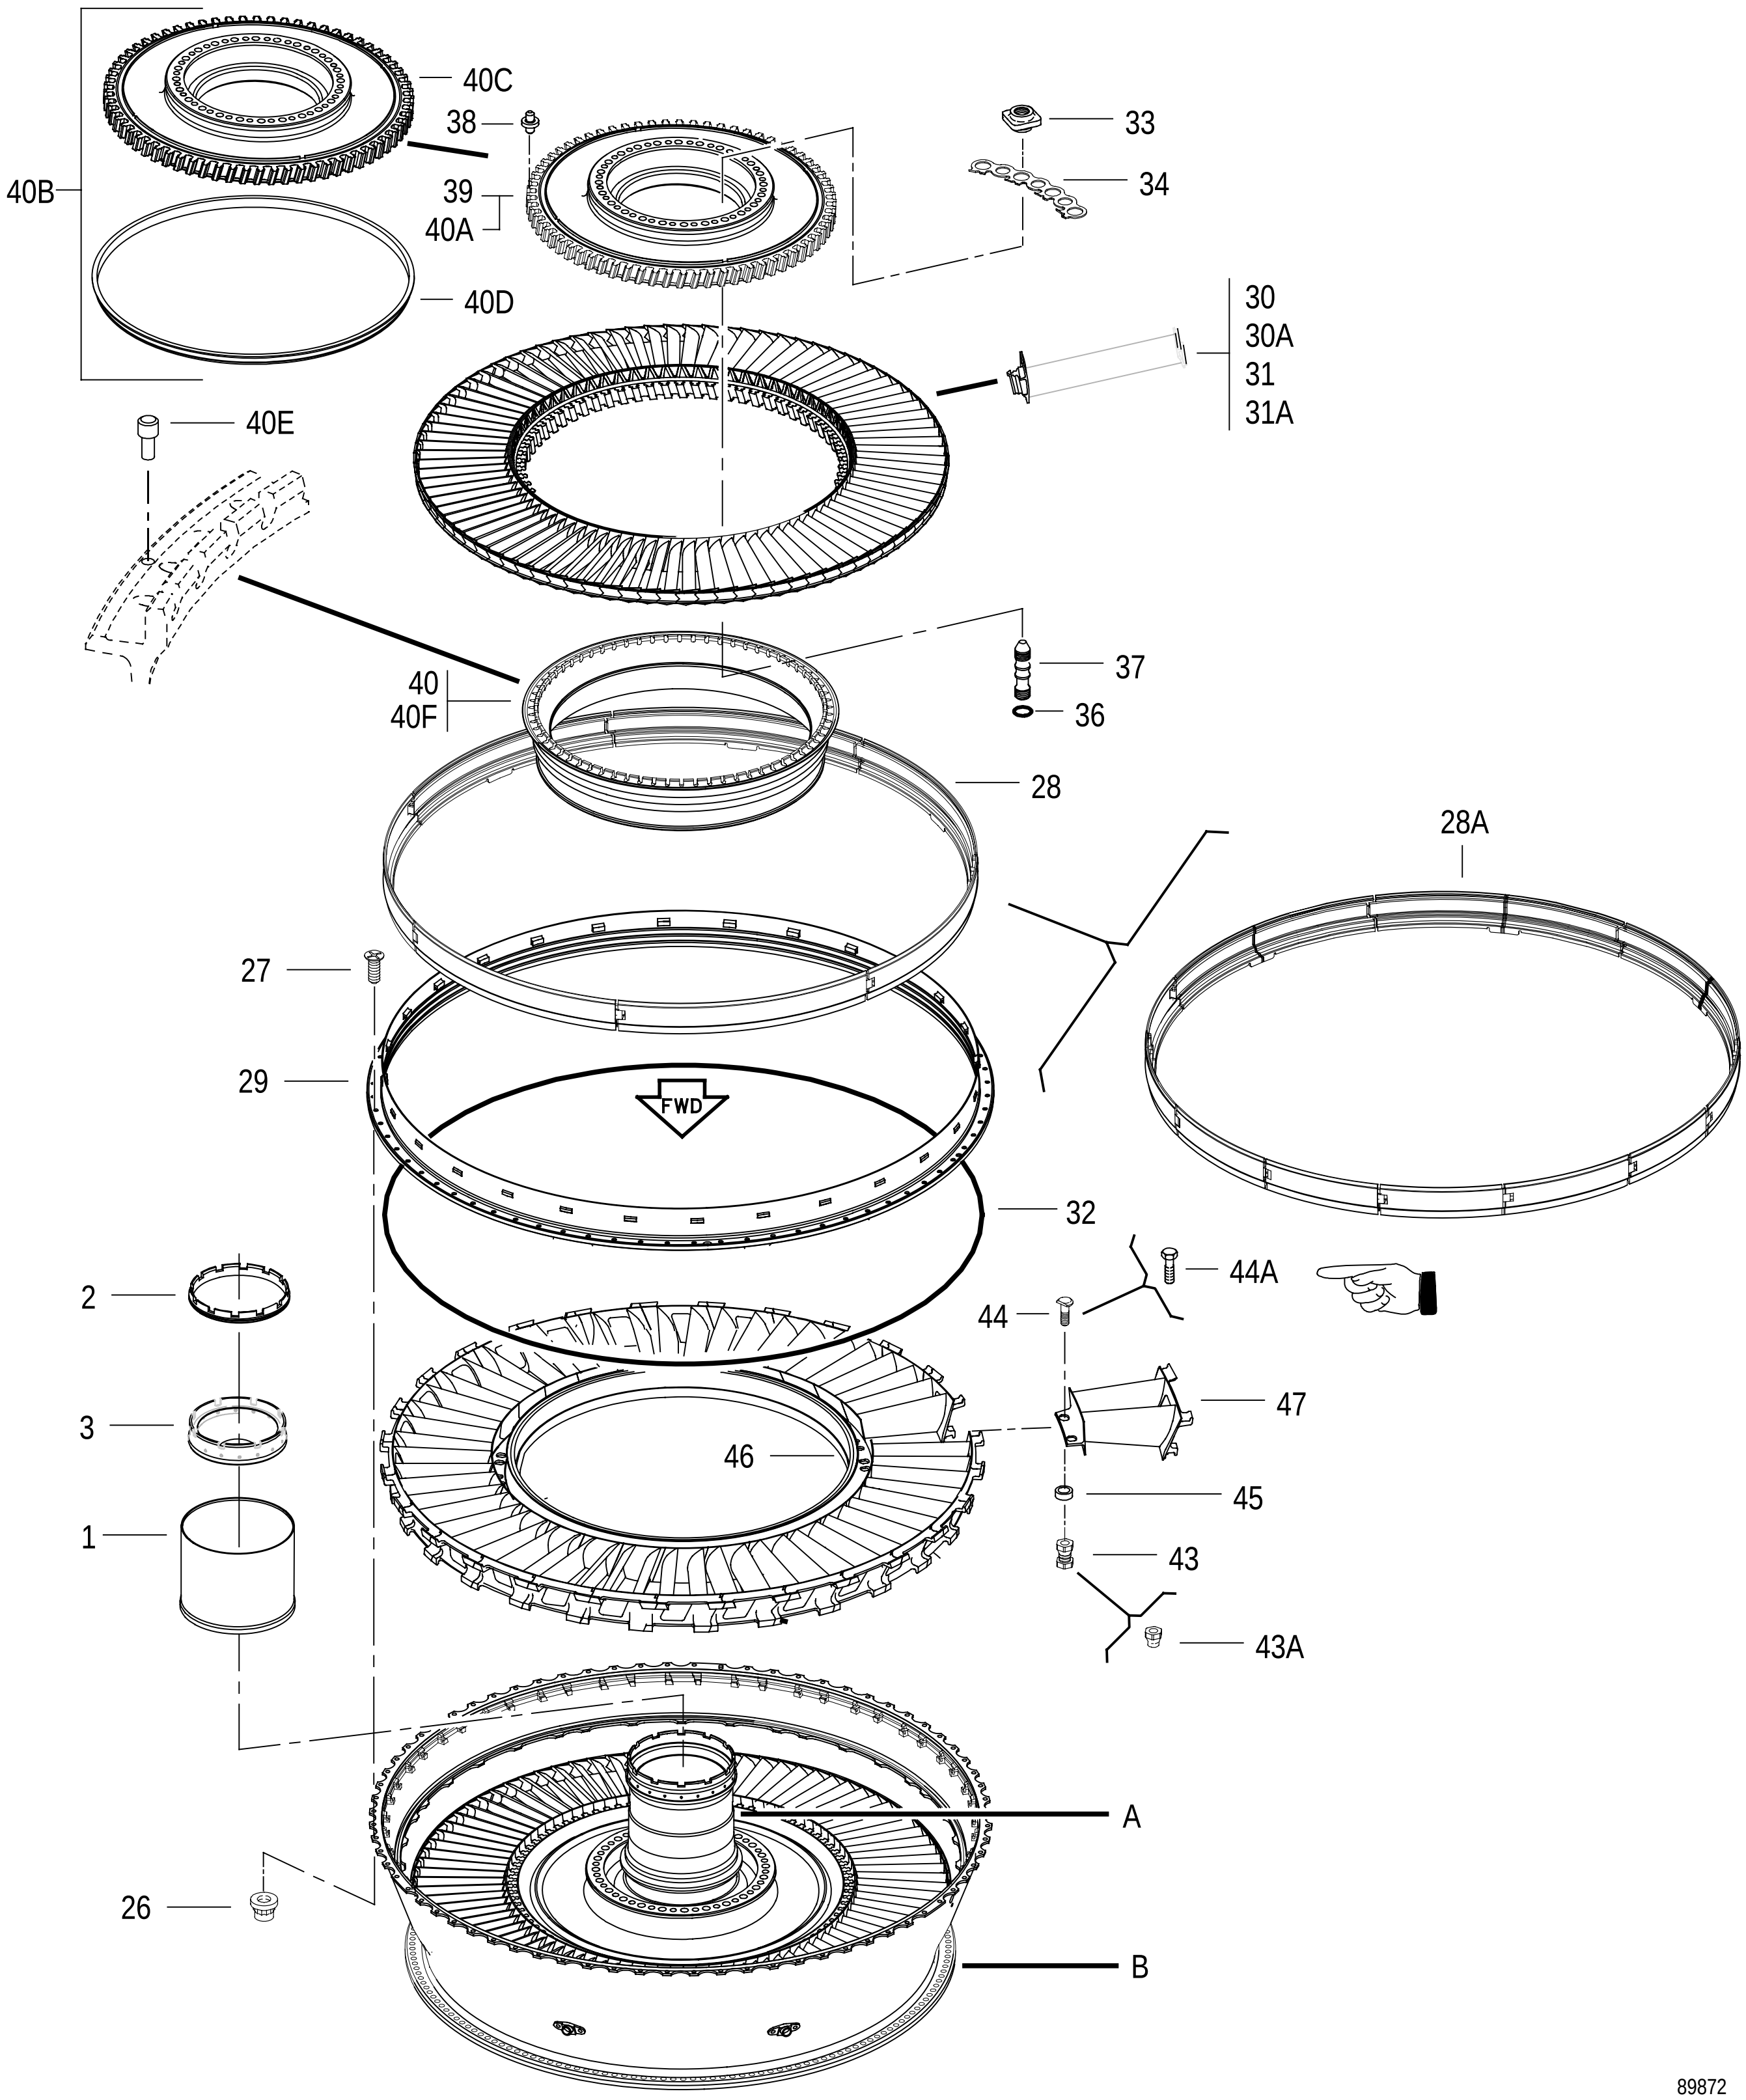


FIGURE 73. FRONT COMPRESSOR DRIVE TURBINE ROTOR AND STATOR ASSY
(SHEET 1 OF 3)


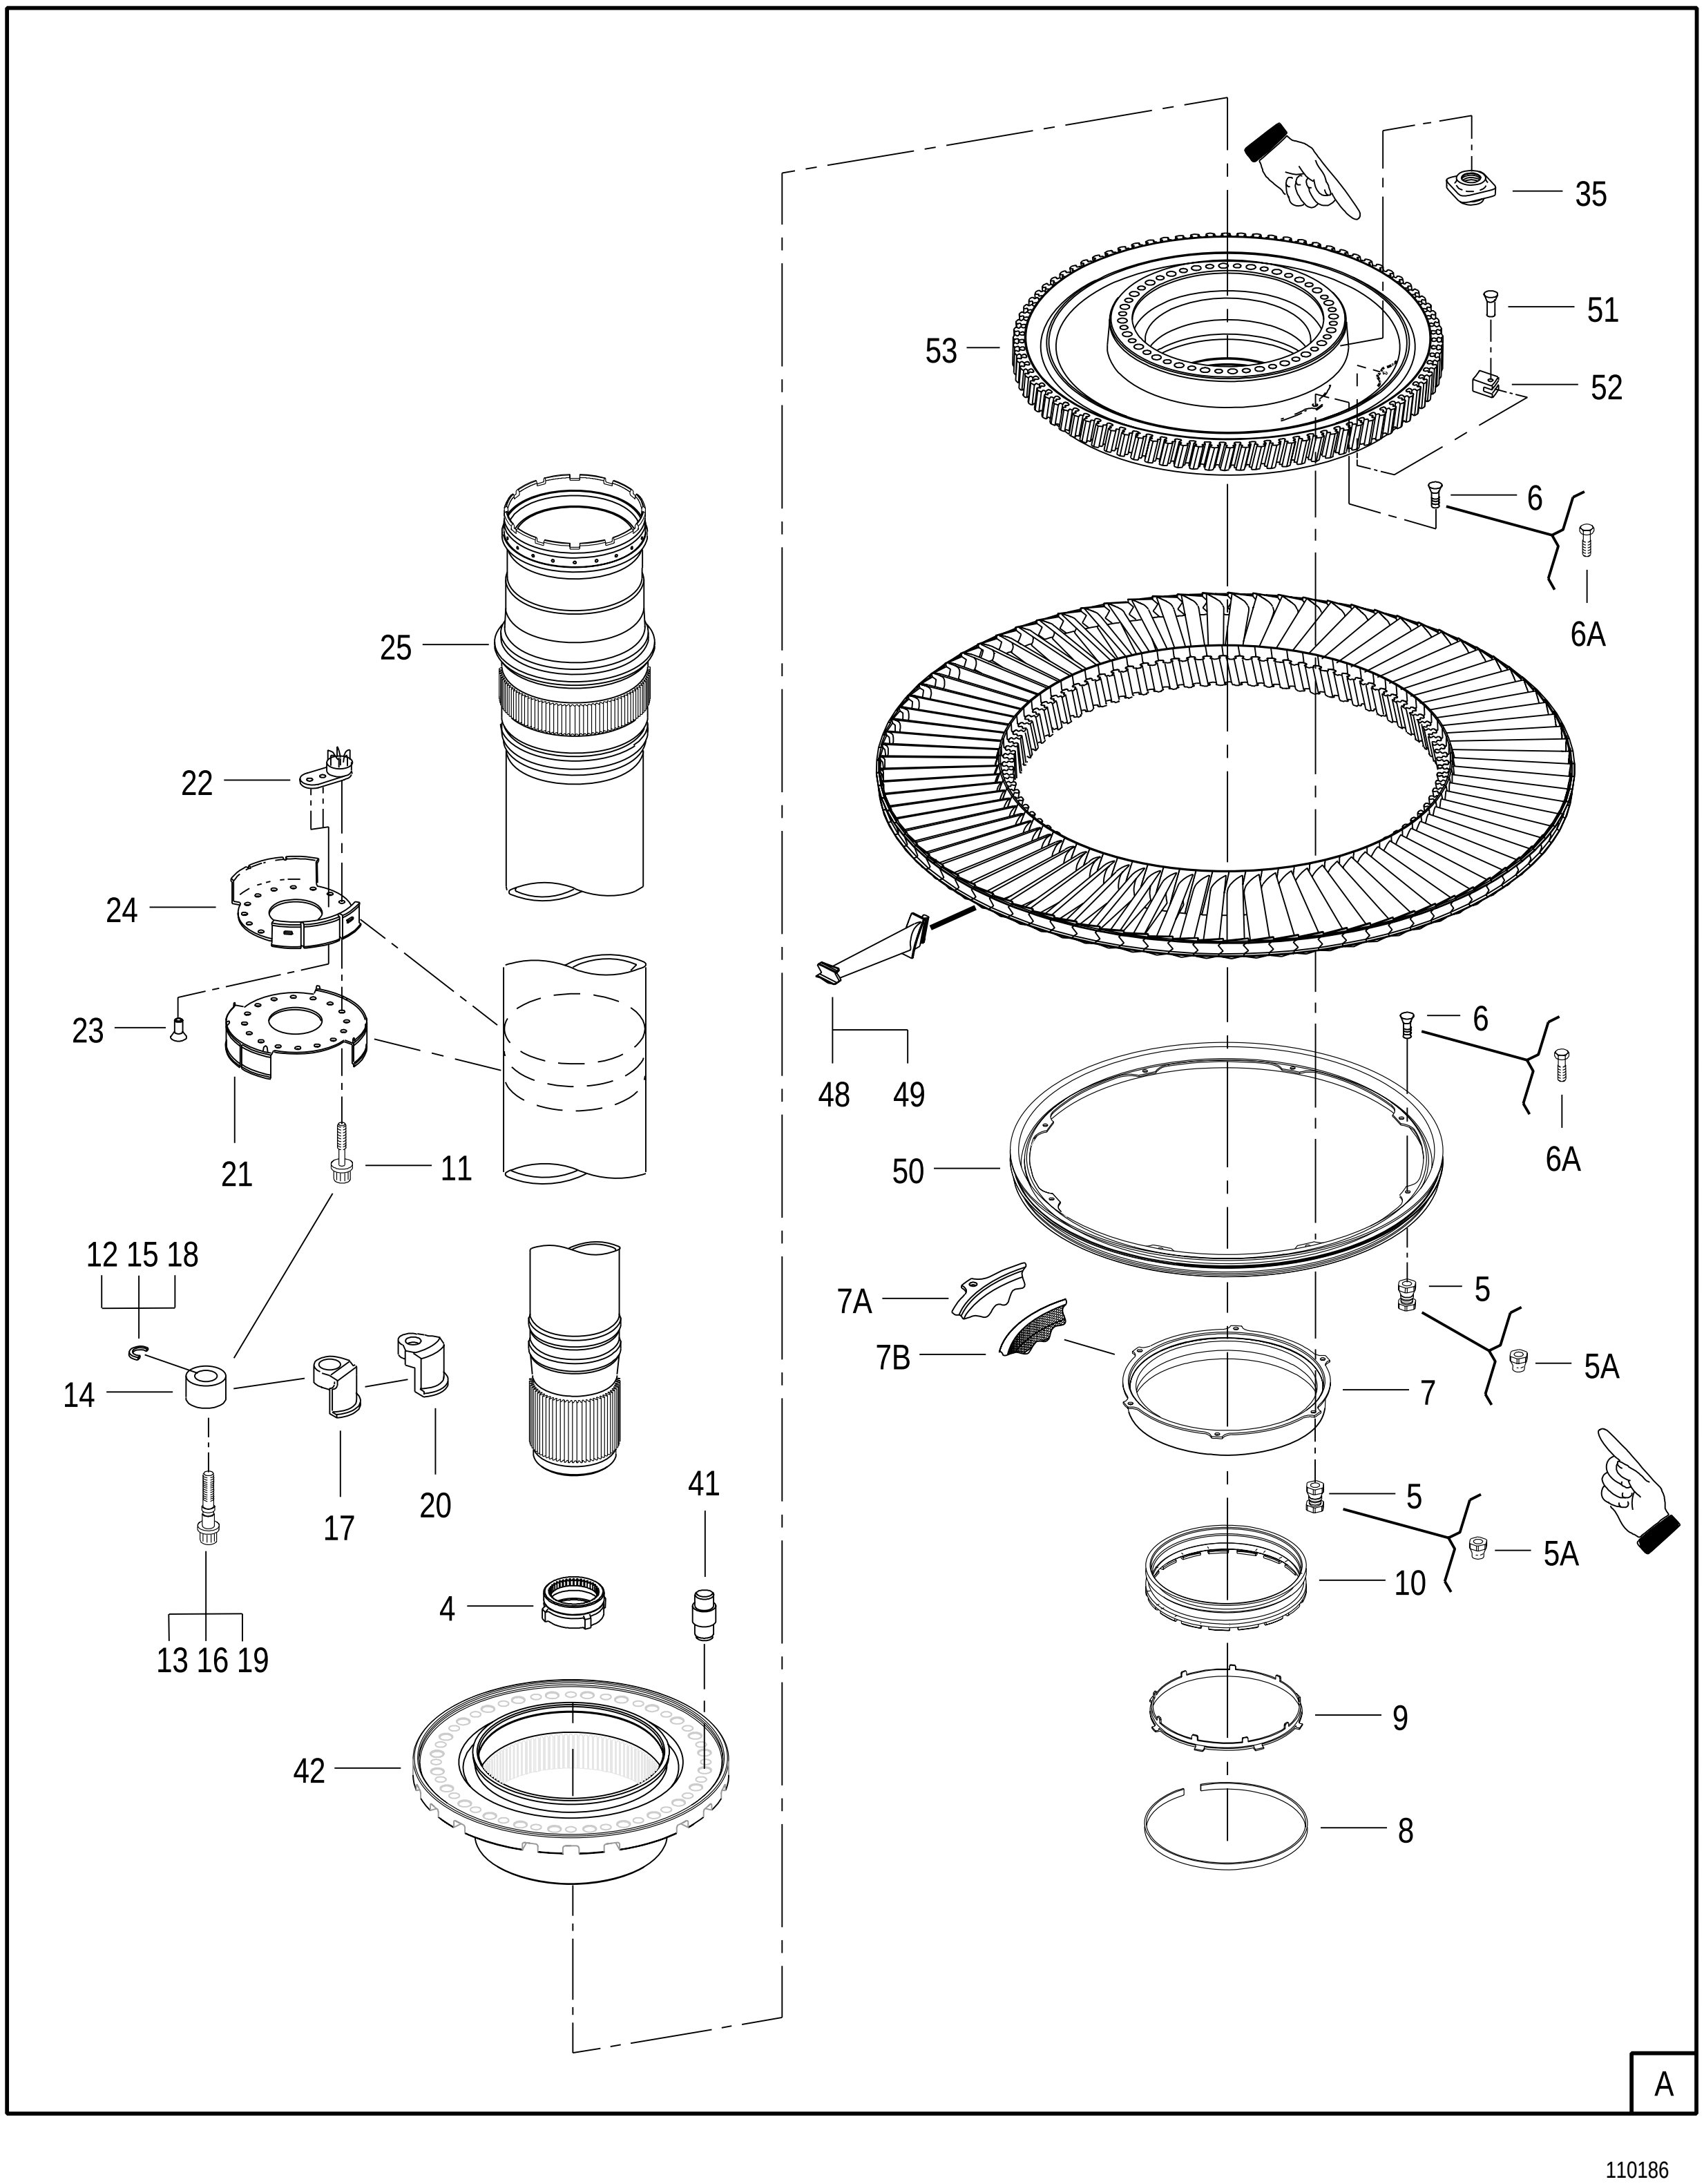


FIGURE 73. FRONT COMPRESSOR DRIVE TURBINE ROTOR AND STATOR ASSY
(SHEET 2 OF 3)

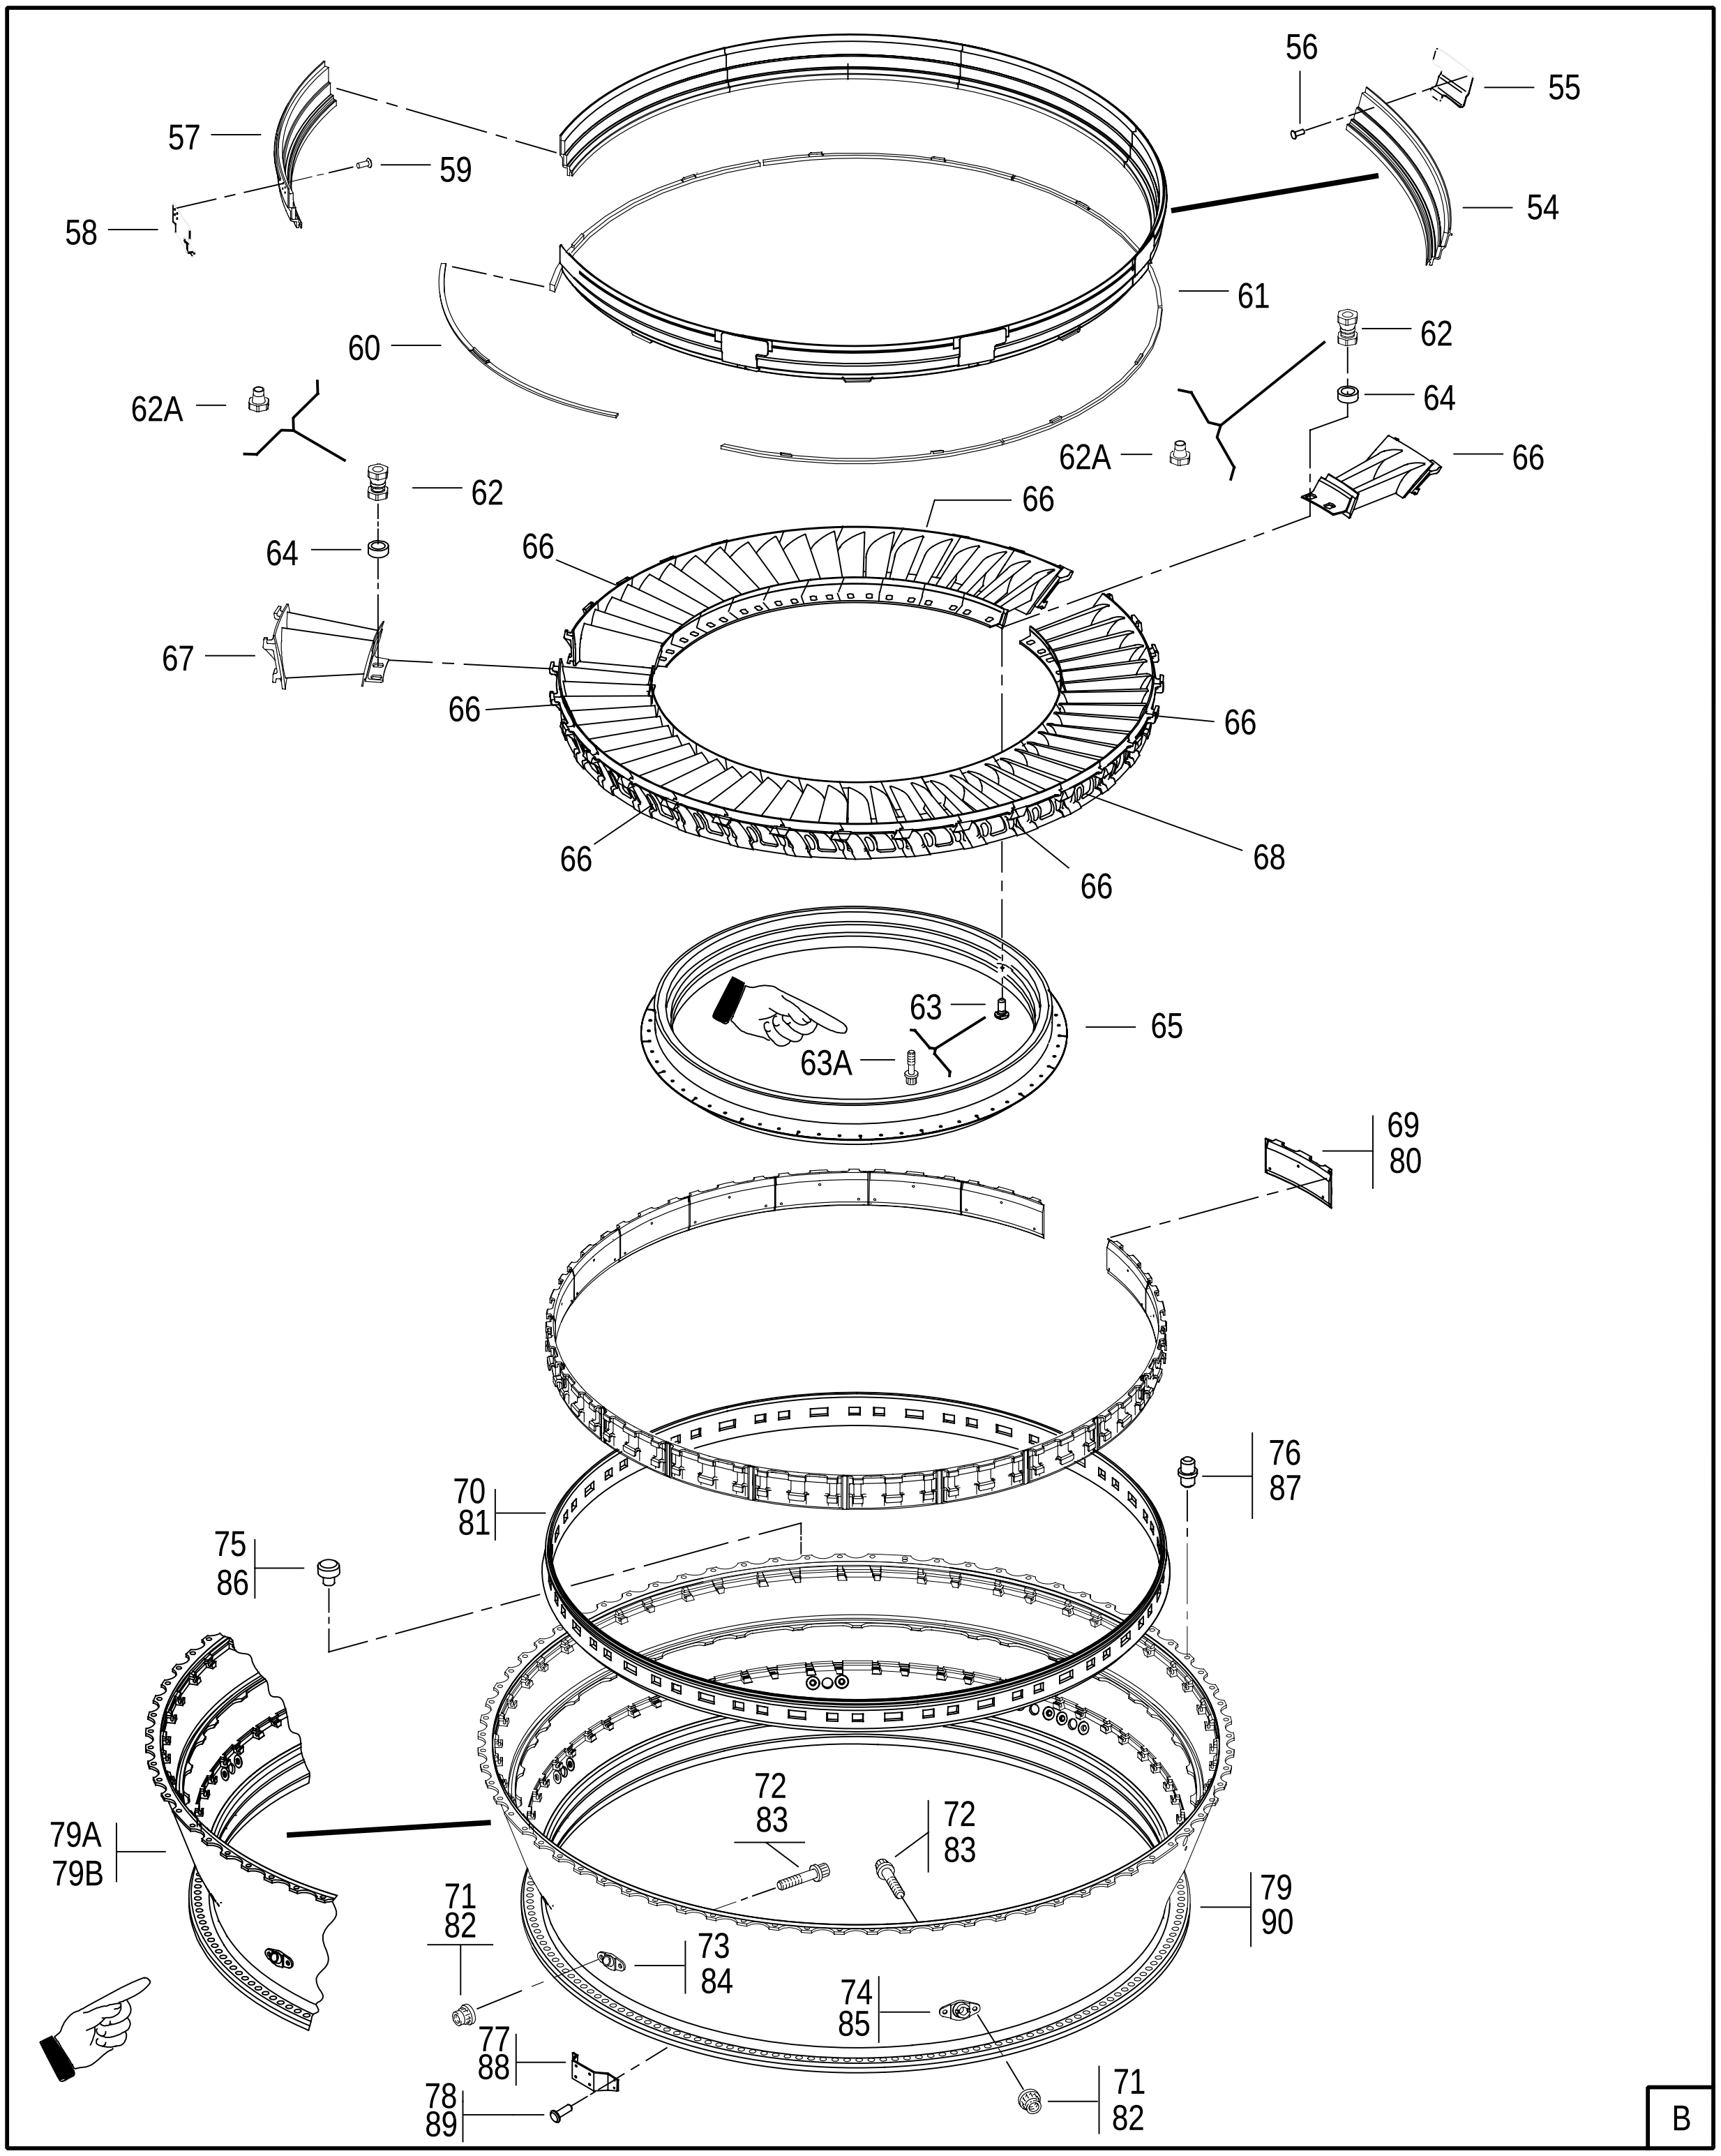

89874

FIGURE 73. FRONT COMPRESSOR DRIVE TURBINE ROTOR AND STATOR ASSY
(SHEET 3 OF 3)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73	4068716-734	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-725 DO NOT PROCURE FROM P&WA	1	QP	ADF
	4068716-735	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-726 DO NOT PROCURE FROM P&WA	1	KE	ADF
	4068716-736	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-727 DO NOT PROCURE FROM P&WA	1	NA	ADF
	4068716-737	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-728 DO NOT PROCURE FROM P&WA	1	NC	ADF
	4068716-738	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-729 DO NOT PROCURE FROM P&WA	1	NE	ADF
	4068716-739	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-730 DO NOT PROCURE FROM P&WA	1	NG	ADF
	4068716-740	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-731 DO NOT PROCURE FROM P&WA	1	PR	ADF
	4068716-748	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-732 DO NOT PROCURE FROM P&WA	1	PT	ADF
	4068716-733	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA	1	JU/QM	ADF
	4068716-723	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA	1	JV/KC	ADF
	4068716-751	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-750 DO NOT PROCURE FROM P&WA	1	PV	ADF
	4068716-752	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-741 DO NOT PROCURE FROM P&WA	1	PX	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73	4068716-753	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-742 DO NOT PROCURE FROM P&WA	1	PZ	ADF
	4068716-754	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-743 DO NOT PROCURE FROM P&WA	1	QB	ADF
	4068716-755	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-744 DO NOT PROCURE FROM P&WA	1	QD	ADF
	4068716-756	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-745 DO NOT PROCURE FROM P&WA	1	QF	ADF
	4068716-757	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-746 DO NOT PROCURE FROM P&WA	1	QH	ADF
	4068716-758	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-747 DO NOT PROCURE FROM P&WA	1	QK	ADF
	4068716-759	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-705 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-795	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA	1	HE	ADF
	4068716-796	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-735 DO NOT PROCURE FROM P&WA	1	HG	ADF
	4068716-797	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-736 DO NOT PROCURE FROM P&WA	1	HJ	ADF
	4068716-798	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-737 DO NOT PROCURE FROM P&WA	1	HL	ADF
	4068716-799	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-738 DO NOT PROCURE FROM P&WA	1	HN	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73	4068716-800	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-739 DO NOT PROCURE FROM P&WA	1	HQ	ADF
	4068716-801	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-740 DO NOT PROCURE FROM P&WA	1	HS	ADF
	4068716-802	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-748 DO NOT PROCURE FROM P&WA	1	HU	ADF
	4068716-803	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-751 DO NOT PROCURE FROM P&WA	1	HW	ADF
	4068716-804	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-752 DO NOT PROCURE FROM P&WA	1	HY	ADF
	4068716-805	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-753 DO NOT PROCURE FROM P&WA	1	JA	ADF
	4068716-806	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-754 DO NOT PROCURE FROM P&WA	1	JC	ADF
	4068716-807	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-755 DO NOT PROCURE FROM P&WA	1	JE	ADF
	4068716-808	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-756 DO NOT PROCURE FROM P&WA	1	JG	ADF
	4068716-809	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-757 DO NOT PROCURE FROM P&WA	1	JJ	ADF
	4068716-810	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-758 DO NOT PROCURE FROM P&WA	1	JL	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73	4068716-811	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-733 DO NOT PROCURE FROM P&WA	1	JN	ADF
	4068716-812	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-734 DO NOT PROCURE FROM P&WA	1	JQ	ADF
	4068716-813	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-759 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-814	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA	1	SY	ADF
	4068716-815	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA	1	HF/KD	ADF
	4068716-816	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-796 DO NOT PROCURE FROM P&WA	1	HH/KF	ADF
	4068716-817	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-797 DO NOT PROCURE FROM P&WA	1	HK/NB	ADF
	4068716-818	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-798 DO NOT PROCURE FROM P&WA	1	HM/ND	ADF
	4068716-819	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-799 DO NOT PROCURE FROM P&WA	1	HP/NF	ADF
	4068716-820	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-800 DO NOT PROCURE FROM P&WA	1	HR/NH	ADF
	4068716-821	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-801 DO NOT PROCURE FROM P&WA	1	HT/PS	ADF
	4068716-822	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-802 DO NOT PROCURE FROM P&WA	1	HV/PU	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73	4068716-823	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-803 DO NOT PROCURE FROM P&WA	1	HX/PW	ADF
	4068716-824	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-804 DO NOT PROCURE FROM P&WA	1	HZ/PY	ADF
	4068716-825	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-805 DO NOT PROCURE FROM P&WA	1	JB/QA	ADF
	4068716-826	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-806 DO NOT PROCURE FROM P&WA	1	JD/QC	ADF
	4068716-827	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-807 DO NOT PROCURE FROM P&WA	1	JF/QE	ADF
	4068716-828	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-808 DO NOT PROCURE FROM P&WA	1	JH/QG	ADF
	4068716-829	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-809 DO NOT PROCURE FROM P&WA	1	JK/QJ	ADF
	4068716-830	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-810 DO NOT PROCURE FROM P&WA	1	JM/QL	ADF
	4068716-831	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG.71-25 FOR NHA REOP AND REID OF 4068716-811 DO NOT PROCURE FROM P&WA	1	JP/QN	ADF
	4068716-832	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-812 DO NOT PROCURE FROM P&WA	1	JR/QR	ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73	4068716-850	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA	1		ADF
	4068716-851	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-735 OR -816 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-852	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-736 OR -817 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-853	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-737 OR -818 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-854	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-738 OR -819 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-855	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-739 OR -820 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-856	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-740 OR -821 DO NOT PROCURE FROM P&WA	1		ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73 - A	4068716-857	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-748 OR -822 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-858	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-751 OR -823 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-859	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-752 OR -824 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-860	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-753 OR -825 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-861	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-754 OR -826 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-862	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-755 OR -827 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-863	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-756 OR -828 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-864	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-757 OR -829 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-865	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-758 OR -830 DO NOT PROURE FROM P&WA	1		ADF
	4068716-866	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-733 OR -831 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-867	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-734 OR -832 DO NOT PROCURE FROM P&WA	1		ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73 - A	4068716-868	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-795 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-869	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-811 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-870	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-812 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-871	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-796 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-872	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-797 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-873	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-798 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-874	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-799 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-875	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-800 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-876	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-801 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-877	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-802 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-878	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-803 DO NOT PROCURE FROM P&WA	1		ADF

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73	4068716-879	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-804 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-880	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-805 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-881	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-806 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-882	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-807 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-883	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-808 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-884	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-809 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-885	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-810 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-886	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA REOP AND REID OF 4068716-813 DO NOT PROCURE FROM P&WA	1		ADF
	4068716-888	52661	ROTOR AND STATOR ASSY-TURBINE, FRONT . . . . . . COMPRESSOR DRIVE SEE FIG. 71-25 FOR NHA	1	SZ	ADF
- 1	4026467	52661	. SHIELD-HEAT, FRONT COMPRESSOR DRIVE . . . . . . SHAFT, TURBINE	1		PADZZ
- 2	4001681	52661	. NUT-BEARING RETAINING, EXTERNALLY . . . . THREADED 5.050-12LH X 0.600 IN. THK	1		PAFZZ
- 3	4010079	52661	. PLUG-NO. 5 BEARING	1		PAFDD
- 4	4010246	52661	. SEAT-TURBINE SHAFT LOCK	1		PAFZZ
- 5	HL599KF-5	56878 73197	. COLLAR-PIN-RIVET, THREADED, SELF-LOCKING . . 0.164-32UNJC-3B X 0.490 IN. LONG P&WA PART NO. 4061774 SUPERSEDED BY H54475-08 AND 76467-832	14		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	73 - 5A	= H54475-08	15653	. NUT-SELF-LOCKING, HEX P&WA PART NO. 4082753-01 SUPERSEDES HL599KF-5	14	AAP	PAFZZ
		= 76467-832	56878	. NUT-SELF-LOCKING, HEX P&WA PART NO. 4082753-01 SUPERSEDES HL599KF-5	14		PAFZZ
R R		4083241	52661	. NUT-SELF-LOCKING, HEX 0.190-32 X 0.280 IN.	14	AAQ	PAFZZ
R	- 6	HL244-5-3	0ZZV1 56878 73197 92215	. PIN-RIVET-THREADED, FLAT 0.164-32UNJC-3A X 0.500 IN. LONG P&WA PART NO. ST2273-03 REPLACED BY HL722-5-3	14		PAFZZ
R		HL722-5-3	0ZZV1 56878 73197 92215	. PIN-RIVET-THREADED, SLAB 0.164-32UNJC-3A X 0.188 IN. GRIP P&WA PART NO. 4077452 REPLACES HL244-5-3	14	AAP	PAFZZ
R R	- 6A	4084102	52661	. BOLT-MACHINE, HEX 0.190-32 X 0.505 IN.	14	AAQ	PAFZZ
R	- 7	4064232	52661	. RING-AIR SEALING, TURBINE, 3RD STAGE, ASSY OF	1	AAP	PAFDD
R R		4083239-01	52661	. RING-AIR SEALING, TURBINE, 3RD STAGE, ASSY OF	1	AAQ	PAFDD
 R	- 7A	4064234	52661	.. RING-AIR SEALING, TURBINE, 3RD STAGE USE ONLY ON 4064232	1		PADZZ
R R R		4083239-03	52661	.. RING-CELLULAR, STRUCTURAL, TURBINE, 3RD STAGE USE ONLY ON 4083239-01	1		PADZZ
  R	- 7B	4064233	52661	.. RING-CELLULAR, STRUCTURAL, TURBINE, 3RD STAGE USE ONLY 4064232	1		PADZZ
R R		4083239-02	52661	.. RING-AIR SEALING, TURBINE, 3RD STAGE USE ONLY ON 4083239-01	1		PADZZ
	- 8	4026826	52661	. RING-RETAINING 5.7945 SHAFT DIA X 0.0625 IN. DIA WIRE	1		PAFZZ
	- 9	4026464	52661	. WASHER-KEY 5.445 ID X 0.0475 IN. THK	1		PAFZZ
	- 10	4026463	52661	. NUT-FRONT COMPRESSOR DRIVE SHAFT, TURBINE	1		PAFZZ
		4060568-01	52661	. SHAFT ASSY-FRONT COMPRESSOR DRIVE, TURBINE	1		PAFLD
	- 11	MS9556-08	96906	.. BOLT	16		PAOZZ
		4044391	52661	.. COUNTERWEIGHT ASSY-TURBINE USE 0-4 AS REQUIRED	AR		PADBZ
	- 12	4044390	52661	... CLIP-RETAINING, TURBINE COUNTERWEIGHT	1		PADZZ
	- 13	4044389	52661	... BOLT-TURBINE COUNTERWEIGHT 0.190-32UNJF-3A X 1.015 IN. LONG	1		PADZZ
	- 14	4044388	52661	... COUNTERWEIGHT-TURBINE	1		XA
		4044393	52661	.. COUNTERWEIGHT ASSY-TURBINE USE 0-2 AS REQUIRED	AR		PADBZ
	- 15	4044390	52661	... CLIP-RETAINING, TURBINE COUNTERWEIGHT	1		PADZZ
	- 16	4044389	52661	... BOLT-TURBINE COUNTERWEIGHT 0.190-32UNJF-3A X 1.015 IN. LONG	1		PADZZ
	- 17	4044392	52661	... COUNTERWEIGHT-TURBINE	1		XA
		4044395	52661	.. COUNTERWEIGHT ASSY-TURBINE USE 0-1 AS REQUIRED	AR		PADBZ
	- 18	4044390	52661	... CLIP-RETAINING, TURBINE COUNTERWEIGHT	1		PADZZ
	- 19	4044389	52661	... BOLT-TURBINE COUNTERWEIGHT 0.190-32UNJF-3A X 1.015 IN. LONG	1		PADZZ
	- 20	4044394	52661	... COUNTERWEIGHT-TURBINE	1		XA
	- 21	4060566	52661	.. STIFFENER-TURBINE SHAFT	1		PADLD
		4060565	52661	.. STIFFENER-TURBINE SHAFT, ASSY OF	1		PADLD
	- 22	503612	52661	... NUT-SELF-LOCKING, PLATE, 1 LUG 0.190-32UNJF-3B X 0.3475 IN. THK	8		PADZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73 - 23	AN123620	88044	... RIVET (AP)	2		PAFZZ
- 24	4060564	52661	... STIFFENER-TURBINE SHAFT	1		XA
- 25	4075102	52661	.. SHAFT-FRONT COMPRESSOR DRIVE, TURBINE	1		XA
- 26	4023115	52661	. NUT OPTION SEE OPTION TABLE	3		PAOZZ
- 27	503519	52661	. SCREW-MACHINE, COUNTERSUNK 0.190-32 X 0.513 IN. LONG	3		PAFZZ
- 28	4069982-01	52661	. RING SEGMENT-AIR SEALING, TURBINE 4TH STAGE, ASSY OF USE ONLY ON 4068716-735 THRU -737, -740, -752 THRU -754, -796 THRU -798, -801, -804 THRU -806, -871 THRU -873, -876, AND -879 THRU -881	7		PAFLD
	4069437-01	52661	. RING SEGMENT-AIR SEALING, TURBINE 4TH STAGE, ASSY OF USE ONLY ON 4068716-738, -758, -799, -802, -807, -810, -874, -877, -882, AND -885	7		PAFLD
	4079812-01	52661	. RING SEGMENT-AIR SEALING, TURBINE 4TH STAGE, ASSY OF USE ONLY ON 4068716-723, -733, -734, -739, -751, -756, -757, -759, -795, -800, -803, -808, -809, -811 THRU -813, -868 THRU -870, -875 -878, -883, -884, AND -886	7		PAFLD
- 28A	4083666-01	52661	. RING SEGMENT-AIR SEALING, TURBINE 4TH STAGE, ASSY OF USE ONLY ON 4068716-814 THRU -832, -850 THRU -867, AND -888	14		PAFLD
- 29	4071473	52661	. SUPPORT-TURBINE AIR SEALING RING, 4TH STAGE USE ONLY ON 4068716-723 THRU -759, -795 THRU -813, AND -886	1		PAFLD
	4081665	52661	. SUPPORT-TURBINE AIR SEALING RING, 4TH STAGE USE ONLY ON 4068716-814 THRU -832, -850 THRU 867, AND 888	1		PAFLD
- 30	4075404	52661	. BLADE-TURBINE ROTOR, 4TH STAGE USE ONLY ON 4068716-759 FOR SPARES REPLACEMENT USE 4075494	66		PADDD
	4080704	52661	. BLADE-TURBINE ROTOR, 4TH STAGE USE ONLY ON 4068716-723, -733 THRU -740, -748, AND -751 THRU -758 FOR SPARES REPLACEMENT USE 4080694	66		PADDD
	4082204	52661	. BLADE-TURBINE ROTOR, 4TH STAGE USE ONLY ON 4068716-795 THRU -813, AND -815 THRU -832 FOR SPARES REPLACEMENT USE 4081734	66		PADDD
	4082704	52661	. BLADE-TURBINE ROTOR, 4TH STAGE USE ONLY ON 4068716-850 THRU -886 FOR SPARES REPLACEMENT USE 4082534	66		PADDD
- 30A	4082504	52661	. BLADE-TURBINE ROTOR, 4TH STAGE USE ONLY ON 4068716-814 FOR SPARES REPLACEMENT USE 4082274	60		PADDD
	4075494	52661	. BLADE SET-TURBINE ROTOR, 4TH STAGE SPARES REPLACEMENT FOR 4075404	33		PAFDD
	4080694	52661	. BLADE SET-TURBINE ROTOR, 4TH STAGE SPARES REPLACEMENT FOR 4080704	33		PAFDD
	4081734	52661	. BLADE SET-TURBINE ROTOR, 4TH STAGE SPARES REPLACEMENT FOR 4082204	33		PAFDD
	4082534	52661	. BLADE SET-TURBINE ROTOR, 4TH STAGE SPARES REPLACEMENT FOR 4082704	33		PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73 - 31	4075404	52661	.. BLADE-TURBINE ROTOR, 4TH STAGE .... USE ONLY ON 4075494	2		PADDD
	4080704	52661	.. BLADE-TURBINE ROTOR, 4TH STAGE .... USE ONLY ON 4080694	2		PADDD
	4082204	52661	.. BLADE-TURBINE ROTOR, 4TH STAGE .... USE ONLY ON 4081734	2		PADDD
	4082704	52661	.. BLADE-TURBINE ROTOR, 4TH STAGE .... USE ONLY ON 4082534	2		PADDD
	4082274	52661	. BLADE SET-TURBINE ROTOR, 4TH STAGE .... SPARES REPLACEMENT FOR 4082504	30		PAFDD
- 31A	4082504	52661	.. BLADE-TURBINE ROTOR, 4TH STAGE	2		PADDD
- 32	4073491	52661	. RING-RETAINING, 4TH STAGE	1		PAFZZ
- 33	4069047	52661	. NUT-TIE ROD .... 0.375-24UNJF-3B X 0.320 IN. THK	24		PAFZZ
- 34	4064559	52661	. WASHER-KEY, TURBINE ROTOR, 4TH STAGE......	6		PAFZZ
- 35	4071798	52661	. NUT-TIE ROD .... 0.375-32UNJEF-3B X 0.465 IN. THK	24		PAFZZ
- 36	MS9385-02	96906	. PACKING .... USE ONLY ON 4068716-723, -734 THRU -740, -748, -751 THRU -759, -796 THRU -810, -812, -813, -816 THRU -830, -832, -851 THRU -865, -867, AND -869 THRU -886	24		PAFZZ
	MS9386-010	96906	. PACKING .... USE ONLY ON 4068716-733, -795, -811, -814, -815, -831, -850, -866, -868, AND 888	24		PAFZZ
- 37	4071768	52661	. TIE-ROD .... 0.375-24UNJF-3A X 0.375-32UNJEF-3A X 1.590 IN. LONG	24		PAFZZ
	4072484	52661	. DISK-TURBINE, 4TH STAGE, ASSY OF .... USE ONLY ON 4068716-723, -733 THRU -740, -748, -751 THRU -759, -795 THRU -813, -815 THRU -832, AND -850 THRU -886	1		PADLD
- 38	4072485	52661	.. PIN-SHOULDER, HEADLESS .... 0.08155 AND 0.170 X 0.219 IN. LONG	1		PADZZ
- 39	4072404	52661	.. DISK-TURBINE, 4TH STAGE	1		XA
- 40	4073146	52661	. SEAL-AIR, TURBINE, 4TH STAGE .... USE ONLY ON 4068716-723, -733 THRU -740, -748, -751 THRU -759, -795 THRU -813, -815 THRU -832, AND -850 THRU -886	1		PADLD
- 40A	4082604	52661	. DISK-TURBINE, 4TH STAGE .... USE ONLY ON 4068716-814	1		PADLD
- 40B	4082484	52661	. DISK-TURBINE, 4TH STAGE ASSY .... USE ONLY ON 4068716-888	1		PADLD
- 40C	4082604	52661	.. DISK-TURBINE, 4TH STAGE	1		PADLD
- 40D	4082478	52661	.. RING-AIR SEALING, TURBINE, 4TH STAGE	1		PADZZ
	4082297	52661	. SEAL-AIR, TURBINE, 4TH STAGE, ASSY OF .... USE ONLY ON 4068716-814 AND -888	1		PADLD
- 40E	4082318	52661	.. PIN-SHOULDER, HEADLESS .... 0.06105 AND 0.080 DIA X 0.251 IN. LONG	1		PADZZ
- 40F	4081755	52661	.. SEAL-AIR, TURBINE, 4TH STAGE	1		PADLD
R	4064229	52661	. HUB ASSY-TURBINE REAR	1	TZ	PADLD
R	4080136	52661	. HUB ASSY-TURBINE REAR	1	UA	PADLD

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73 - 41		4064238	52661	.. PIN-SHOULDER, HEADLESS .... 0.3005 AND 0.3311 X 0.805 IN. LONG USE ONLY ON 4064229	6		PADZZ
		4080134	52661	.. PIN-SHOULDER, HEADLESS .... 0.3005 AND 0.3311 X 1.055 IN. LONG USE ONLY ON 4080136	6		PADZZ
- 42		4064230	52661	.. HUB-TURBINE REAR .... USE ONLY ON 4064229	1		XA
		4080135	52661	.. HUB-TURBINE REAR .... USE ONLY ON 4080136	1		XA
		4075534	52661	. TURBINE STATOR-4TH STAGE, ASSY OF	1	AAP	PAFDD
		4084134	52661	. TURBINE STATOR-4TH STAGE, ASSY OF	1	AAQ	PAFDD
- 43		HL599KF-5	56878 73197	.. COLLAR-PIN-RIVET, THREADED, SELF-LOCKING . . 0.164-32UNJC-3B X 0.490 IN. LONG P&W PART NO. 4061774 SUPERSEDED BY H54475-08 AND 76467-832	56		PAFZZ
- 43A	=	H54475-08	15653	.. NUT-SELF-LOCKING, HEX........................ P&W PART NO. 4082753-01 SUPERSEDES HL599KF-5	56		PAFZZ
	=	76467-832	56878	.. NUT-SELF-LOCKING, HEX........................ P&W PART NO. 4082753-01 SUPERSEDES HL599KF-5	56		PAFZZ
- 44		HL522-5-4	56878 73197 92215	.. PIN-RIVET-THREADED, SLAB .... 0.164-32UNJC-3A MOD X 0.562 IN. LONG P&W PART NO. 4074848 USE ONLY ON 4075534	56		PAFZZ
- 44A		ST2164-020	52661	.. BOLT-MACHINE, DOUBLE HEX, J THREAD	56		PAFZZ
- 45		4068967	52661	.. SPACER-SLEEVE .... 0.168 ID X 0.250 OD X 0.097 IN. THK	56		PAFZZ
- 46		4068968	52661	.. RING-AIR SEALING, TURBINE, 4TH STAGE, ASSY . OF	1		PAFBZ
- 47		4075254	52661	.. VANE-TURBINE STATOR, 4TH STAGE	28		PAFDD
- 48	=	4075403	52661	. BLADE-TURBINE ROTOR, 3RD STAGE............ FOR SPARES REPLACEMENT USE 4075493	86		PADDD
	=	4081603	52661	. BLADE-TURBINE ROTOR, 3RD STAGE............ FOR SPARES REPLACEMENT USE 4081323	86		PADDD
		4075493	52661	. BLADE SET-TURBINE ROTOR, 3RD STAGE .... SPARES REPLACEMENT FOR 4075403	43		PAFDD
		4081323	52661	. BLADE SET-TURBINE ROTOR, 3RD STAGE .... SPARES REPLACEMENT FOR 4081603	43		PAFDD
- 49		4075403	52661	.. BLADE-TURBINE ROTOR, 3RD STAGE .... USE ONLY ON 4075493	2		PADDD
		4081603	52661	.. BLADE-TURBINE ROTOR, 3RD STAGE .... USE ONLY ON 4081323	2		PADDD
- 50		4071396	52661	. SEAL-AIR, TURBINE, 3RD STAGE	1	AAP	PADDD
		4083240	52661	. SEAL-AIR, TURBINE, 3RD STAGE	1	AAQ	PADDD
- 51		4028248	52661	. RIVET-TUBULAR, CSK .... 0.094 DIA X 0.320 IN. LONG USE 0-6 AS REQUIRED	AR		PADZZ
- 52	%	4070419	52661	. COUNTERWEIGHT .... USE 0-6 AS REQUIRED	AR		XC
		4070419CL1	52661	. COUNTERWEIGHT .... 0.153 - 0.155 OZ	AR		PADZZ
		4070419CL2	52661	. COUNTERWEIGHT .... 0.162 - 0.164 OZ	AR		PADZZ
		4070419CL3	52661	. COUNTERWEIGHT .... 0.182 - 0.184 OZ	AR		PADZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	73 - 52	4070419CL4	52661	. COUNTERWEIGHT .... 0.205 - 0.207 OZ	AR		PADZZ
R R	- 53	4073403	52661	. DISK-TURBINE, 3RD STAGE .... SUPERSEDED BY 4080503	1	AAP	PADDD
R		4084228	52661	. DISK-TURBINE, 3RD STAGE	1	AAQ	PADDD
R		4080503	52661	. DISK-TURBINE, 3RD STAGE .... SUPERSEDES 4073403 SUPERSEDED BY 4080603	1	AAP	PADDD
R		4084231	52661	. DISK-TURBINE 3RD STAGE	1	AAQ	PADDD
		4080603	52661	. DISK-TURBINE, 3RD STAGE .... SUPERSEDES 4080503	1	AAP	PADDD
		4084103	52661	. DISK-TURBINE, 3RD STAGE	1	AAQ	PADDD
	- 54	4069977-01	52661	. RING SEGMENT-AIR SEALING, TURBINE 3RD...... STAGE, ASSY OF	7	TJ	PAFDD
		4082932-01	52661	. RING SEGMENT-AIR SEALING, TURBINE, 3RD ..... STAGE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	7	TK	PAFDD
	- 55	4069975	52661	.. SEAL-TURBINE, 3RD STAGE .... USE ONLY ON 4069977-01	1		PAFZZ
		4082935	52661	.. SEAL-TURBINE, 3RD STAGE .... USE ONLY ON 4082932-01	1		PAFZZ
	- 56	AN123619	88044	.. RIVET (AP)	4		PAFZZ
	- 57	4069978-01	52661	. RING SEGMENT-AIR SEALING, TURBINE 3RD...... STAGE, ASSY OF	1	TL	PAFDD
		4082934-01	52661	. RING SEGMENT-AIR SEALING, TURBINE, 3RD ..... STAGE, ASSY PARTIAL BREAKDOWN FOLLOWS	1	TM	PAFDD
	- 58	4069975	52661	.. SEAL-TURBINE, 3RD STAGE .... USE ONLY ON 4069978-01	1		PAFZZ
		4082935	52661	.. SEAL-TURBINE, 3RD STAGE .... USE ONLY ON 4082934-01	1		PAFZZ
	- 59	AN123619	88044	.. RIVET (AP) .... SUPERSEDED BY ST2252-02	4		PAFZZ
		ST2252-02	52661	.. RIVET (AP) .... SUPERSEDES AN123619	4		PAFZZ
	- 60	4073488	52661	. RING-RETAINING, SEGMENT 3RD STAGE..........	1		PAFZZ
	- 61	4073489	52661	. RING-RETAINING, SEGMENT 3RD STAGE..........	5		PAFZZ
		4077473	52661	. TURBINE STATOR-3RD STAGE, ASSY OF .... USE ONLY ON 4068716-735, -739, -740, -748, -751, -752, -756, -758, -796, -800 THRU -804, -808, -810, -816, -820 THRU -824, -828, -830, -851, -855 THRU -859, -863, -865, -871, -875 THRU -879, -883, AND -885	1		PAFDD
		4077533	52661	. TURBINE STATOR-3RD STAGE, ASSY OF .... USE ONLY ON 4068716-723, -733, -734, -736 THRU -738, -753 THRU -755, -757, -759, -795, -797 THRU -799, -805 THRU -807, -809, -811 THRU -815, -817 THRU -819, -825 THRU -827, -829, -831, -832, -850, -852 THRU -854, -860 THRU -862, -864, -866 THRU -870, -872 THRU -874, -880 THRU -882, -884, 886, AND -888	1	TA/TC/TE/ TG	PAFDD
		4083403	52661	. TURBINE STATOR-3RD STAGE, ASSY OF .... USE ONLY ON 4068716-723, -733, -734, -736 THRU -738, -753 THRU -755, -757, -759, -795, -797 THRU -799, -805 THRU -807, -809, -811 THRU -815, -817 THRU -819, -825 THRU -827, -829, -831, -832, -850, -852 THRU -854, -860 THRU -862, -864, -866 THRU -870, -872 THRU -874, -880 THRU -882, -884, 886, AND -888	1	TB/TD/TF/ TH/AAP	PAFDD
		4084603	52661	. TURBINE STATOR-3RD STAGE, ASSY OF	1	AAQ	PAFDD
	- 62	HL599KF-5	56878 73197	.. COLLAR-PIN-RIVET, THREADED, SELF-LOCKING .. 0.164-32UNJC-3B X 0.490 IN. LONG P&WA PART NO. 4061774 SUPERSEDED BY H54475-08 AND 76467-832	62		PAFZZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73 - 62A	=	H54475-08	15653	.. NUT-SELF-LOCKING, HEX . . . . P&W PART NO. 4082753-01 SUPERSEDES HL599KF-5	62		PAFZZ
	=	76467-832	56878	.. NUT-SELF-LOCKING, HEX . . . . P&W PART NO. 4082753-01 SUPERSEDES HL599KF-5	62		PAFZZ
- 63		HL522-5-4	56878 73197 92215	.. PIN-RIVET-THREADED, SLAB . . . . 0.164-32UNJC-3A MOD X 0.562 IN. LONG P&W PART NO. 4074848 USE ONLY ON 4077473, 4077533, AND 4083403	62		PAFZZ
- 63A		ST2164-020	52661	.. BOLT-MACHINE, DOUBLE HEX, J THREAD	62		PAFZZ
- 64		4075740	52661	.. SPACER-SHOULDERED	62		PAFZZ
- 65		4075741-01	52661	.. RING-AIR SEALING, TURBINE, 3RD STAGE, ASSY . OF	1		PAFLD
- 66		4077443	52661	.. VANE-TURBINE STATOR, 3RD STAGE . . . . USE ONLY ON 4077533	7		PAFDD
		4083033	52661	. VANE-TURBINE STATOR, 3RD STAGE . . . . USE ONLY ON 4083403	7		PAFDD
- 67		4076473	52661	.. VANE-TURBINE STATOR, 3RD STAGE . . . . USE ONLY ON 4077473	1		PAFDD
		4077423	52661	.. VANE-TURBINE STATOR, 3RD STAGE . . . . USE ONLY ON 4077533	1		PAFDD
		4083023	52661	.. VANE-TURBINE STATOR, 3RD STAGE . . . . USE ONLY ON 4083403	1		PAFDD
- 68		4076483	52661	.. VANE-TURBINE STATOR, 3RD STAGE . . . . USE ONLY ON 4077473	23		PAFDD
		4077373	52661	.. VANE-TURBINE STATOR, 3RD STAGE . . . . USE ONLY ON 4077533	23		PAFDD
		4083213	52661	.. VANE-TURBINE STATOR, 3RD STAGE . . . . USE ONLY ON 4083403	23		PAFDD
		4071459	52661	. CASE AND DUCT SET-TURBINE REAR . . . . USE ONLY ON 4068716-752, -753, -756, -758, -804, -805, -808, -810, -824, -825, -828, -830, -859, -860, -863, -865, -879, -880, -883, AND -885	1		ADF
		4079210	52661	. CASE AND DUCT SET-TURBINE REAR . . . . USE ONLY ON 4068716-754, -755, -757, -806, -807, -809, -826, -827, -829, -861, -862, -864, -881, -882, AND -884	1		ADF
		4077683	52661	. CASE AND DUCT SET-TURBINE REAR . . . . USE ONLY ON 4068716-733, -734, -811, -812, -831, -832, -866, -867, -869, AND -870	1	TC	ADF
		4083255	52661	. CASE AND DUCT SET-TURBINE REAR . . . . USE ONLY ON 4068716-733, -734, -811, -812, -831, -832, -866,-867, -869, AND -870	1	TD	ADF
		4080043	52661	. CASE AND DUCT SET-TURBINE REAR . . . . USE ONLY ON 4068716-737, -738, -740, -751, -798, -799, -801, -803, -818, -819, -821, -823, -853, -854, -856, -858, -873, -874, -876, AND -878	1	TE	ADF
		4083256	52661	. CASE AND DUCT SET-TURBINE REAR . . . . USE ONLY ON 4068716-737, -738, -740, -751, -798, -799, -801, -803, -818, -819, -821, -823, -853, -854, -856, -858, -873, -874, -876, AND -878	1	TF	ADF
		4080000	52661	. CASE AND DUCT SET-TURBINE REAR . . . . USE ONLY ON 4068716-735, -736, -739, -748, -759, -796, -797, -800, -802, -813, -816, -817, -820, -822, -851, -852, -855, -857, -871, -872, -875, -877, AND -886	1	TG	ADF

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	73 - 68	4083257	52661	. CASE AND DUCT SET-TURBINE REAR .... USE ONLY ON 4068716-735, -736, -739, -748, -759, -796, -797, -800, -802, -813, -816, -817, -820, -822, -851, -852, -855, -857, -871, -872, -875, -877, AND -886	1	TH	ADF
	- 69	4076725	52661	.. DUCT SEGMENT-TURBINE, 2ND STAGE .... USE ONLY ON 4071459 AND 4079210	20	AG	PADBZ
		4077682	52661	.. DUCT SEGMENT-TURBINE, 2ND STAGE .... USE ONLY ON 4077683	20	AG	PADBZ
		4077675	52661	.. DUCT SEGMENT-TURBINE, 2ND STAGE .... USE ONLY ON 4080000 AND 4080043	20	AG	PADBZ
		4082982	52661	.. DUCT SEGMENT-TURBINE, 2ND STAGE .... USE ONLY ON 4083255, 4083256, AND 4083257	20		PADBZ
	- 70	4071017	52661	.. SUPPORT-TURBINE DUCT, 2ND STAGE........... USE ONLY ON 4071459	1	AG	PADLD
		4079213	52661	.. SUPPORT-TURBINE DUCT, 2ND STAGE........... USE ONLY ON 4079210	1	AG	PADLD
		4077676	52661	.. SUPPORT-TURBINE DUCT, 2ND STAGE........... USE ONLY ON 4080043	1	AG	PADDD
		4077681	52661	.. SUPPORT-TURBINE DUCT, 2ND STAGE........... USE ONLY ON 4077683 AND 4080000	1	AG	PADDD
		4071430	52661	.. CASE-TURBINE REAR, ASSY OF .... USE ONLY ON 4071459 AND 4080000	1		PADDD
		4079211	52661	.. CASE-TURBINE REAR, ASSY OF .... USE ONLY ON 4079210, 4077683, AND 4080043	1		PADDD
	- 71	4023115	52661	... NUT OPTION .... SEE OPTION TABLE	16		PAOZZ
	- 72	MS9696-06	96906	... BOLT..	16		PAFZZ
	- 73	4075923	52661	... BOSS-INSTRUMENTATION	7		PAFZZ
	- 74	4075924	52661	... BOSS-INSTRUMENTATION	1		PADZZ
	- 75	4073616	52661	... PIN-SHOULDER, HEADLESS..................... 0.2506 AND 0.2895 DIA X 0.485 IN. LONG	1		PAFZZ
	- 76	585406	52661	... PIN-SHOULDER, HEADLESS..................... 0.1875 AND 0.255 DIA X 0.385 IN. LONG	1		PAFZZ
	- 77	4052460	52661	... BRACKET-IDENTIFICATION PLATE	1		PADZZ
	- 78	AN123319	88044	... RIVET (AP)	4		PAFZZ
	- 79	4071429	52661	... CASE-TURBINE................................. USE ONLY ON 4071430	1		XA
R		4079212	52661	... CASE-TURBINE................................. USE ONLY ON 4079211	1		PADDD
R R	- 79A	4F-4071429	52661	.... CASE-TURBINE .... SERVICE REPAIR PART	1		PADDD
R R	- 79B	5F-4071429	52661	.... CASE-TURBINE .... SERVICE REPAIR PART	1		PADDD
		4080527	52661	. SUPPORT AND DUCT SET-TURBINE REAR	1	AH/TA	PAFLD
		4082975	52661	. SUPPORT AND DUCT SET-TURBINE REAR	1	TA/TB	PAFLD
	- 80	4077682	52661	.. DUCT SEGMENT-TURBINE, 2ND STAGE .... USE ONLY ON 4080527	20		PADBZ
		4082982	52661	.. DUCT SEGMENT-TURBINE, 2ND STAGE .... USE ONLY ON 4082975	20		PADBZ
	- 81	4080526	52661	.. SUPPORT-TURBINE DUCT, 2ND STAGE...........	1		PADLD
R		4079211	52661	. CASE-TURBINE REAR, ASSY OF .... USE ONLY ON 4068716-723, -795, -814, -815, -850, -858, AND -868	1	SW	PADDD
R R R		4083519	52661	. CASE-TURBINE REAR, ASSY OF .... USE ONLY ON 4068716-723, -795, -814, -815, -850, -868, AND -888	1	SX	PADDD
	- 82	4023115	52661	.. NUT OPTION .... SEE OPTION TABLE	16		PAOZZ
	- 83	MS9696-06	96906	.. BOLT	16		PAFZZ
	- 84	4075923	52661	.. BOSS-INSTRUMENTATION	7		PAFZZ
	- 85	4075924	52661	.. BOSS-INSTRUMENTATION	1		PADZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
73 - 86	4073616	52661	.. PIN-SHOULDER, HEADLESS .... 0.2506 AND 0.2895 DIA X 0.485 IN. LONG	1		PAFZZ
- 87	585406	52661	.. PIN-SHOULDER, HEADLESS .... 0.1875 AND 0.255 DIA X 0.385 IN. LONG	1		PAFZZ
- 88	4052460	52661	.. BRACKET-IDENTIFICATION PLATE	1		PADZZ
- 89	AN123319	88044	.. RIVET (AP)	4		PAFZZ
- 90	4079212	52661	.. CASE-TURBINE	1		PADDD
R			USE ONLY ON 4079211			
R	4083520	52661	.. CASE-TURBINE	1		XA
R			USE ONLY ON 4083519			

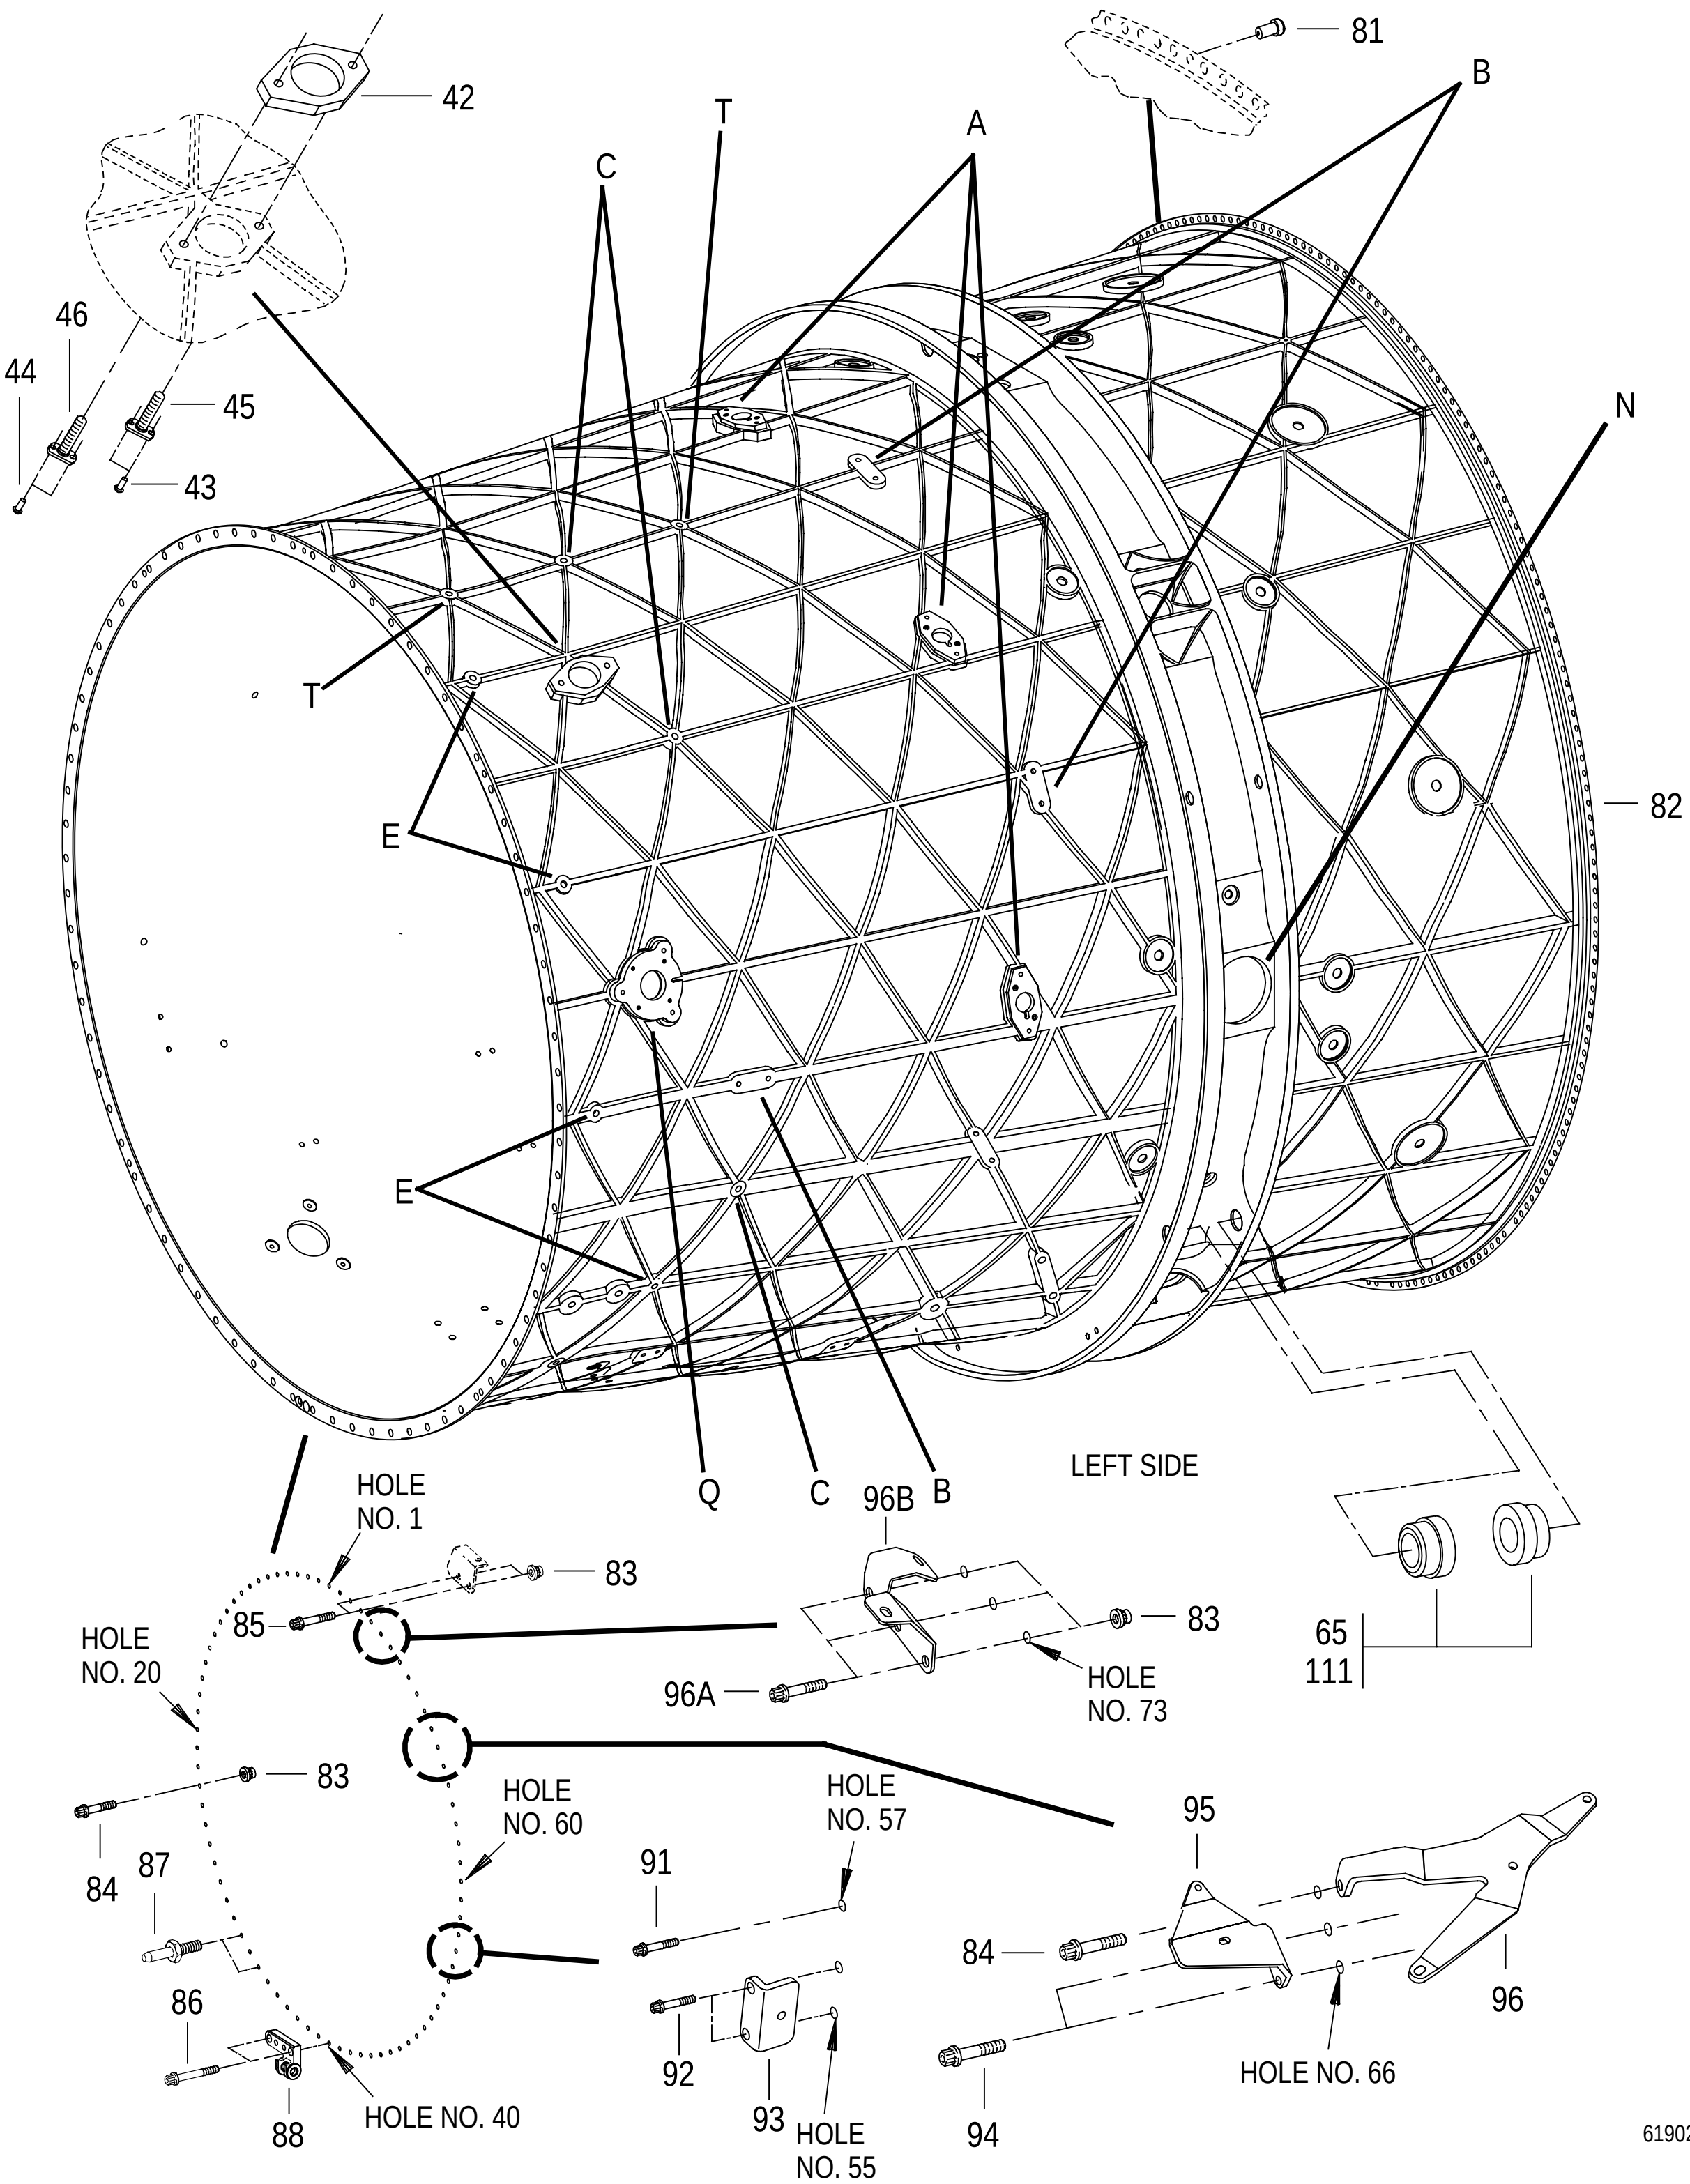


FIGURE 74. REAR FAN DUCT ASSY
(SHEET 1 OF 6)

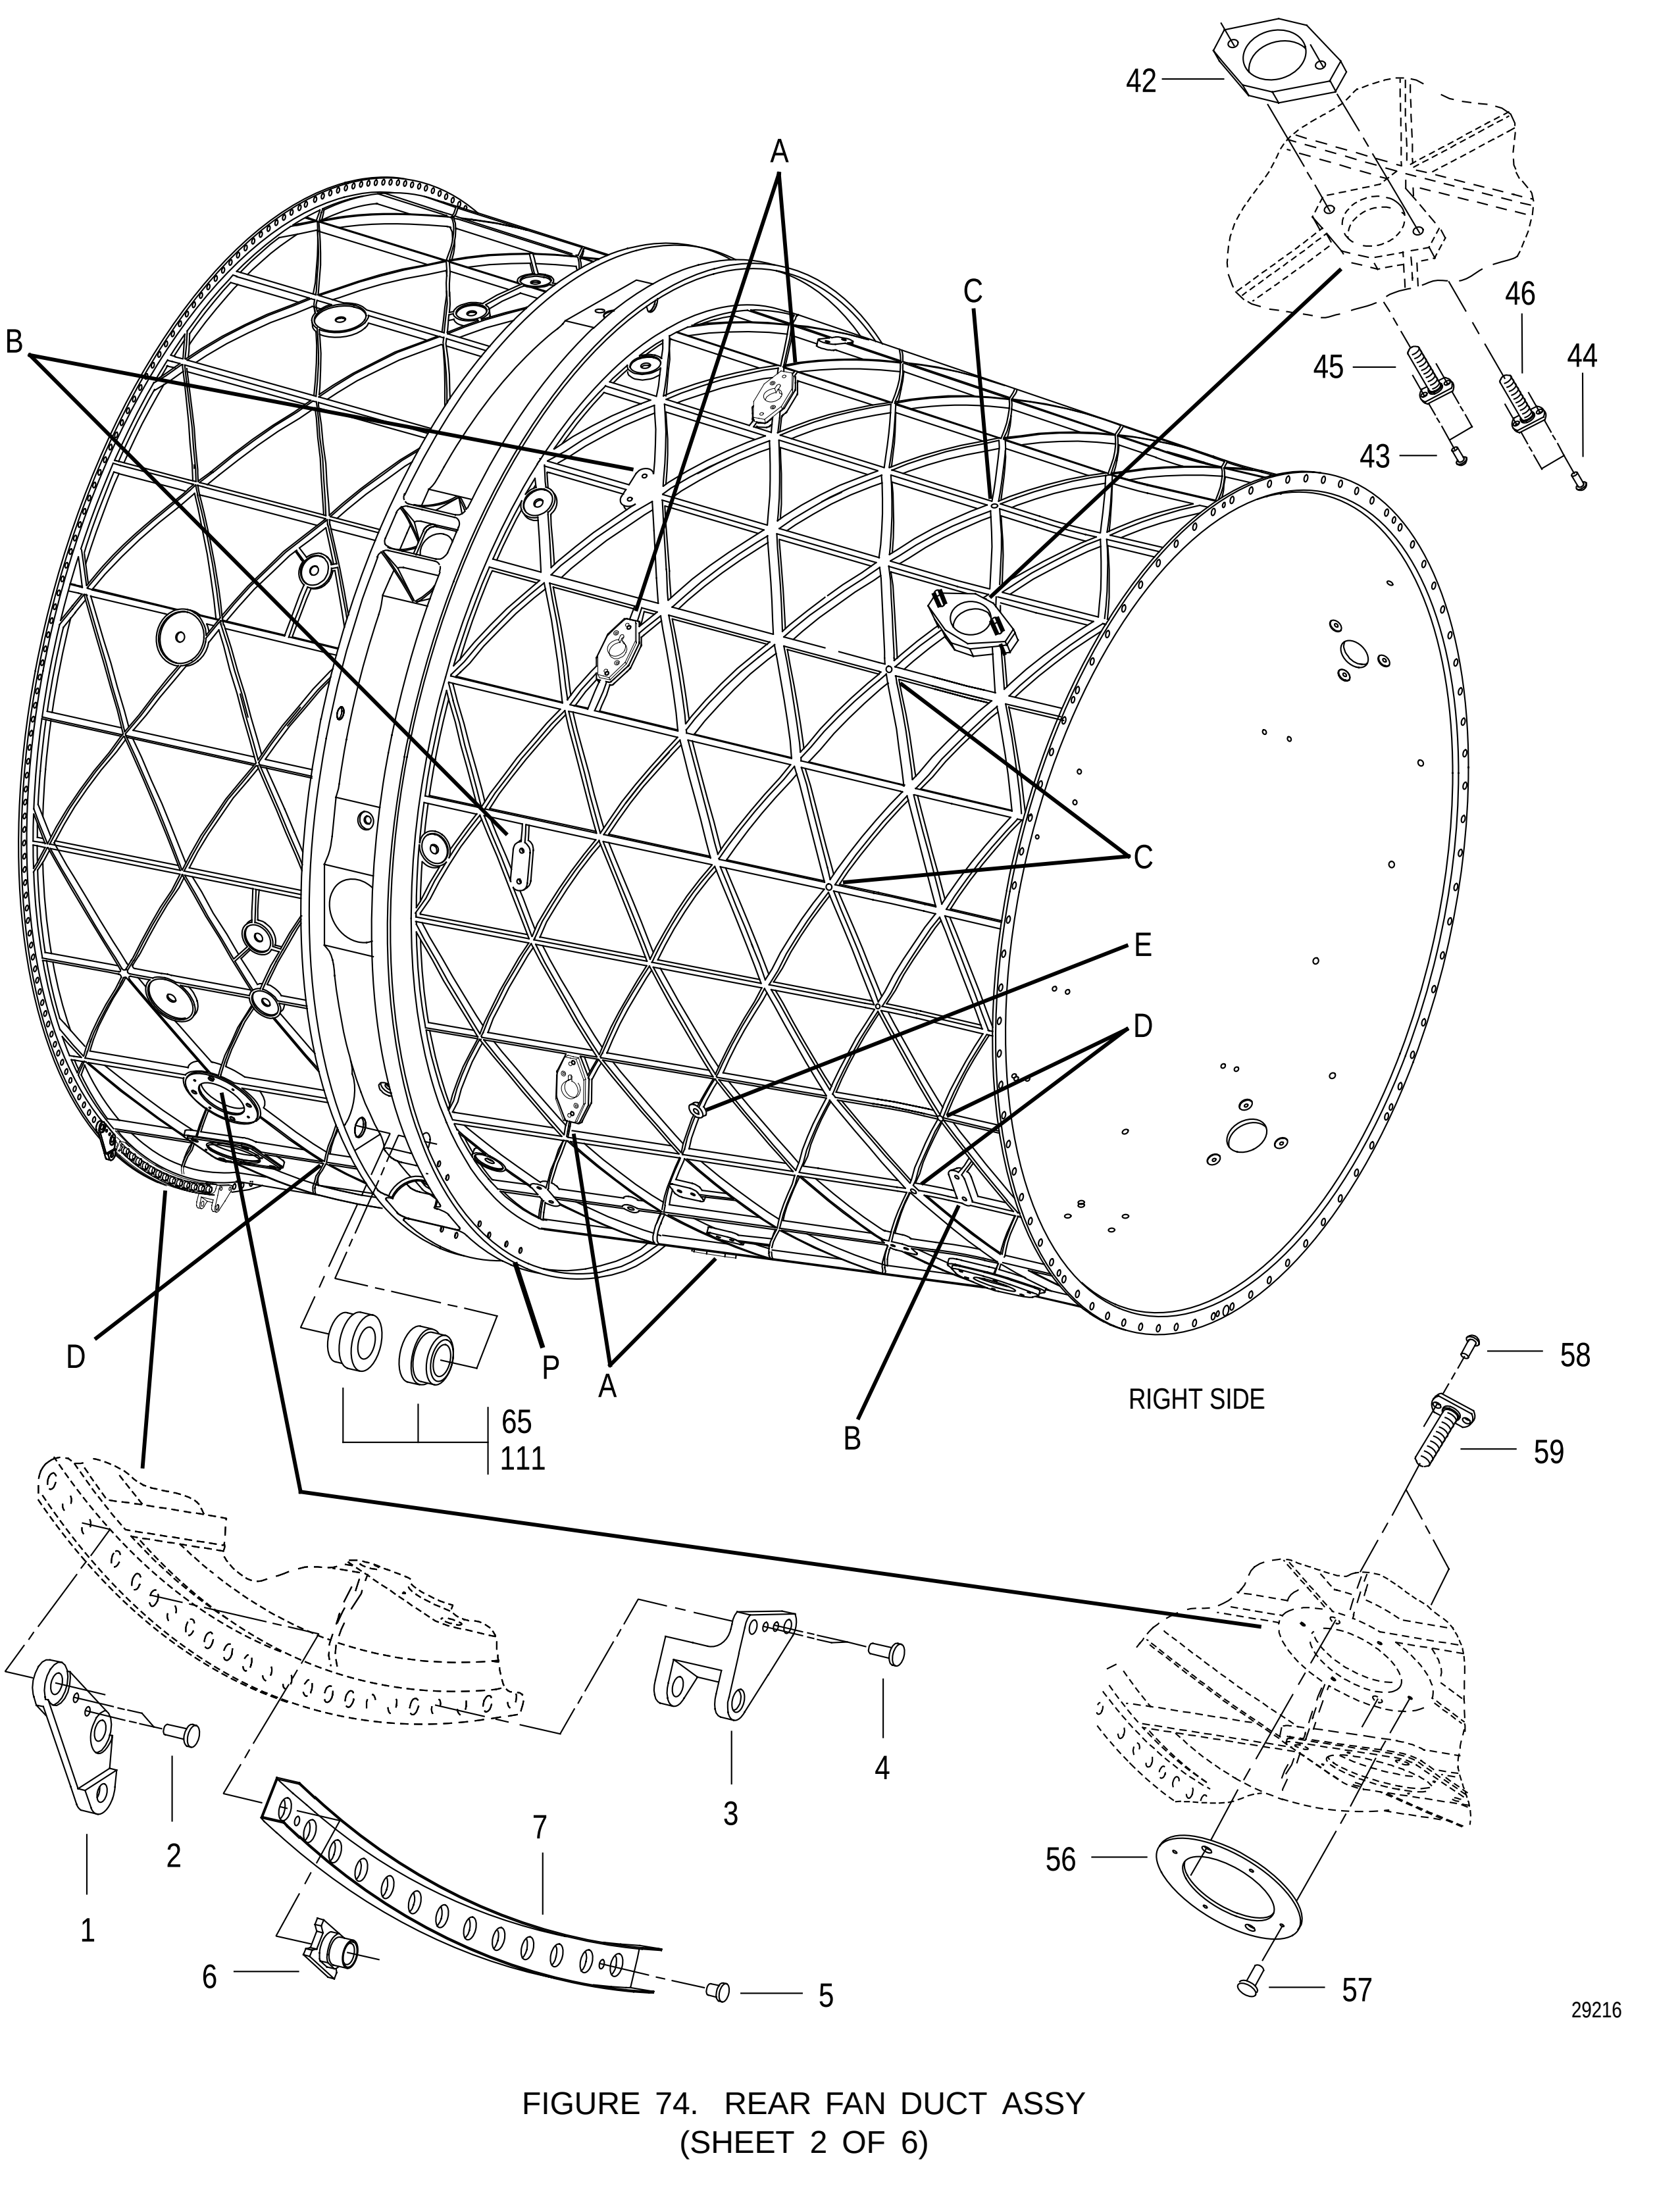


FIGURE 74. REAR FAN DUCT ASSY
(SHEET 2 OF 6)

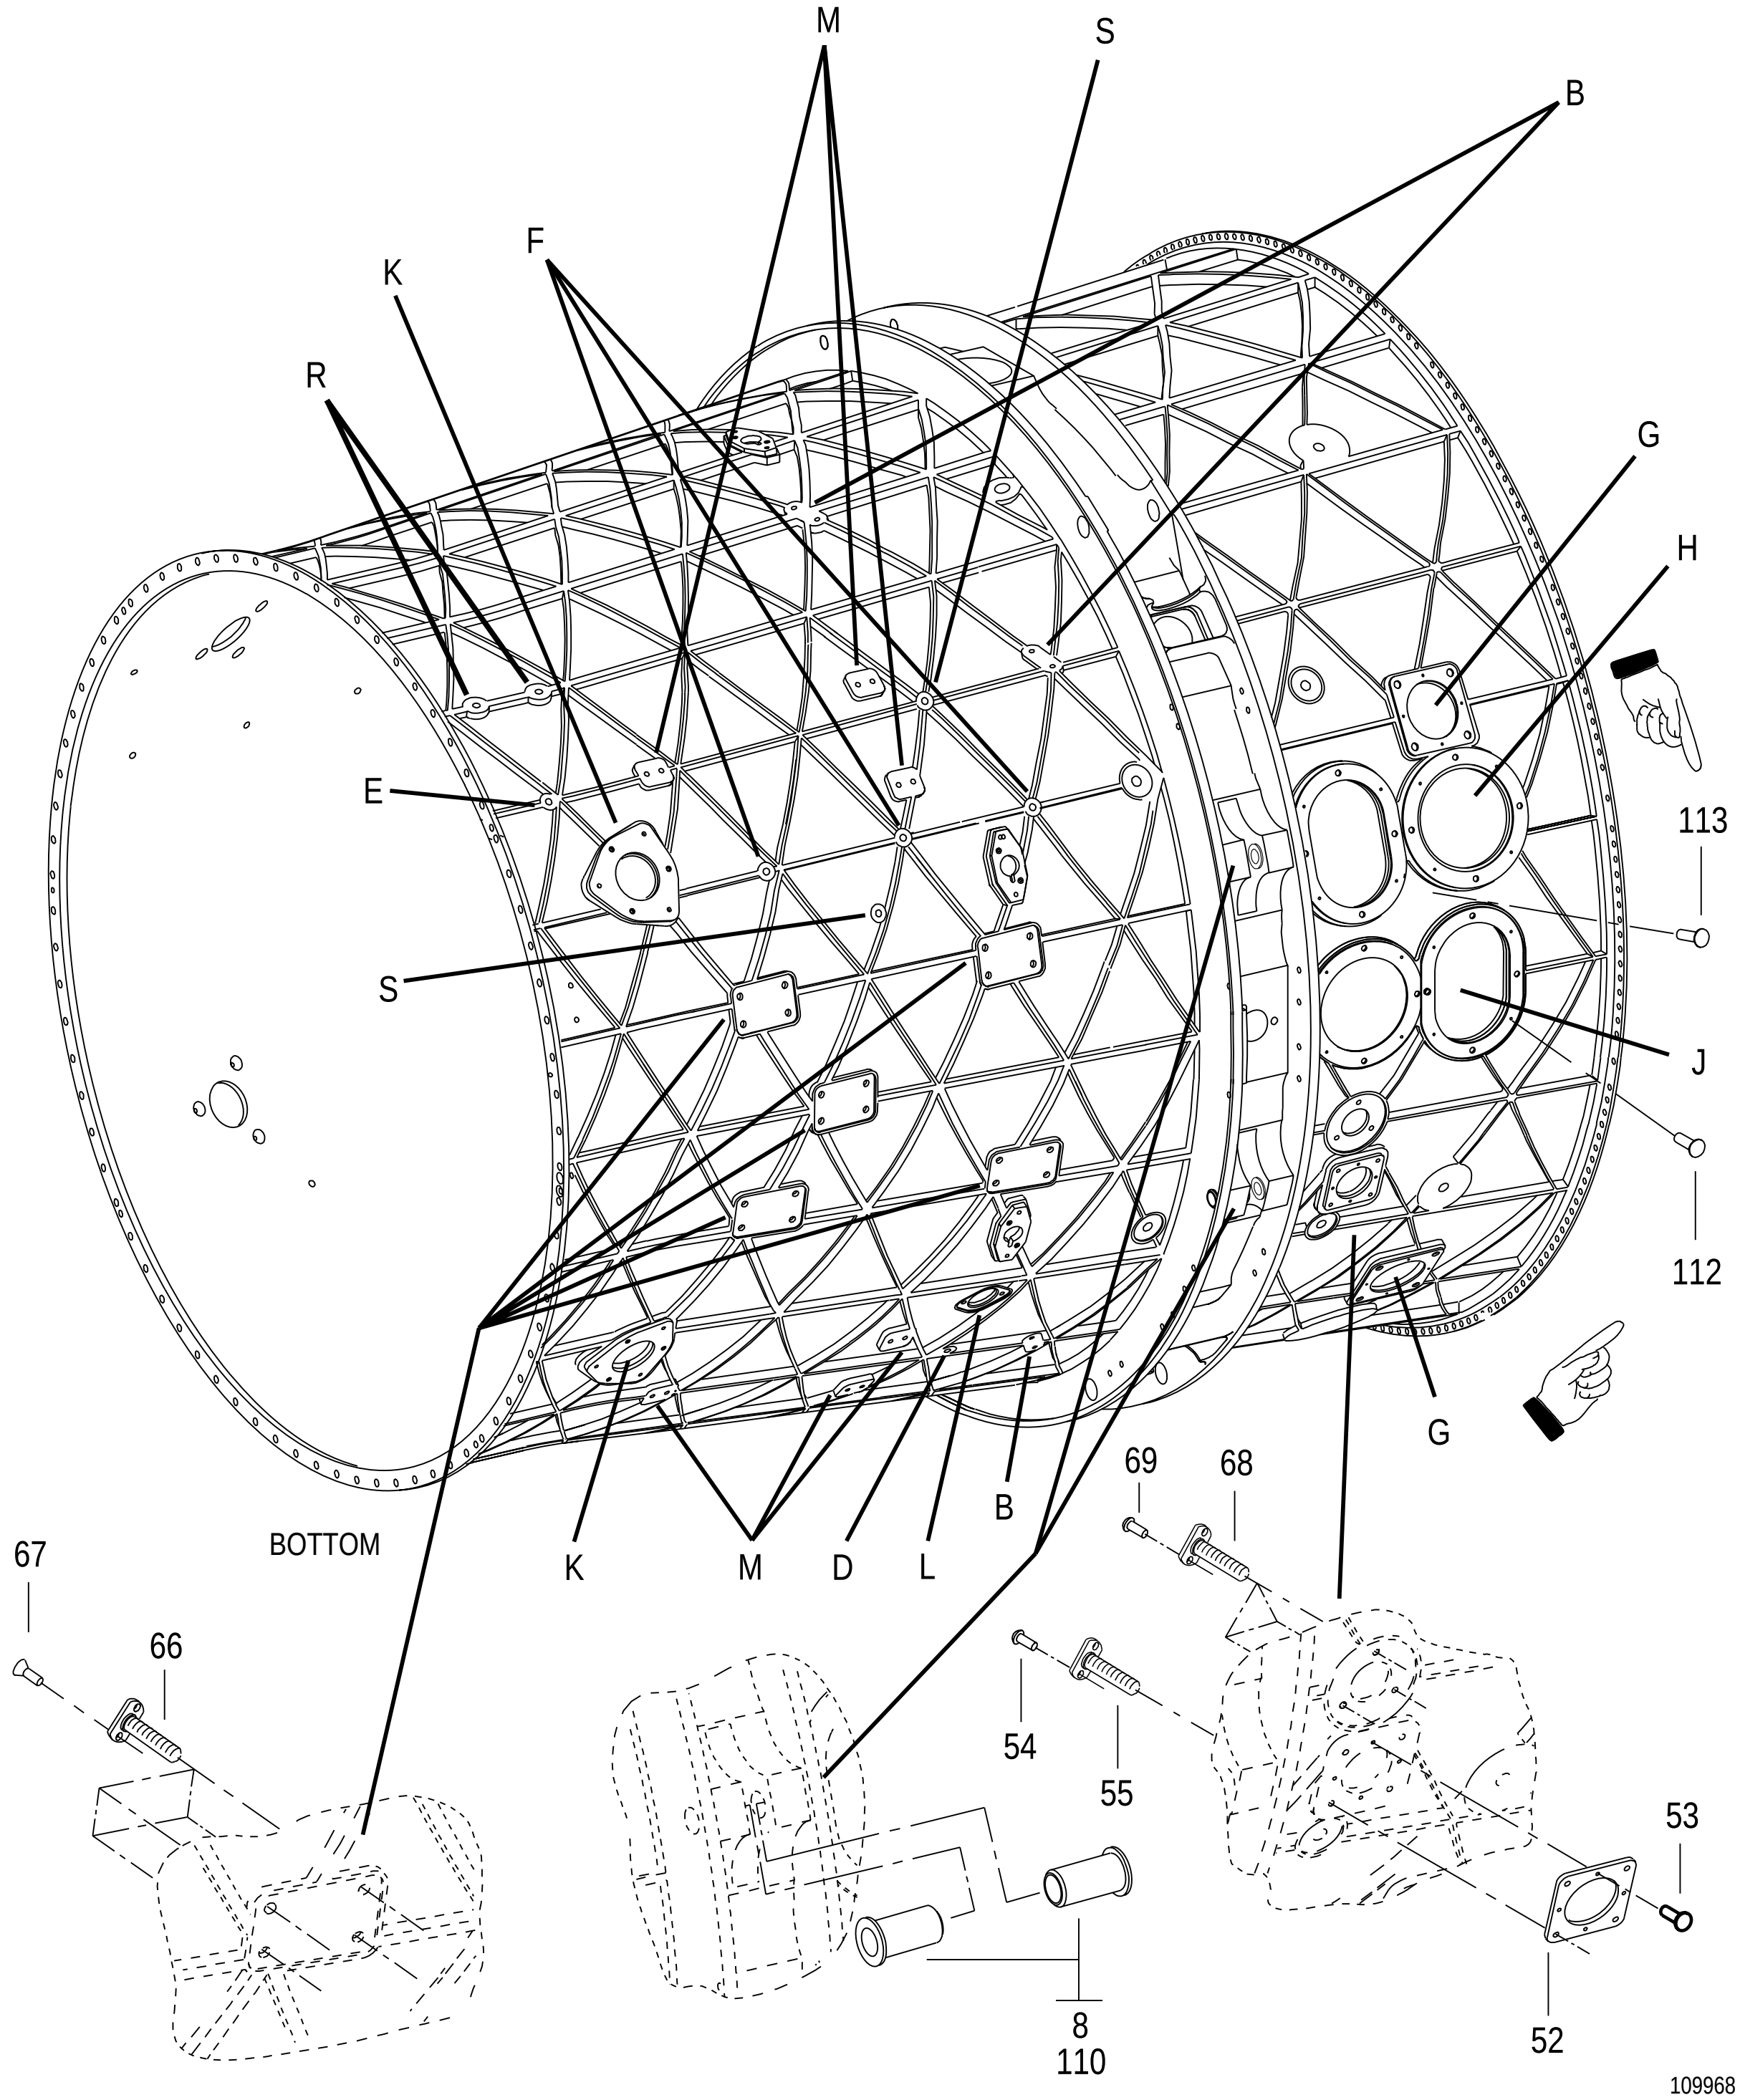


FIGURE 74. REAR FAN DUCT ASSY
(SHEET 3 OF 6)



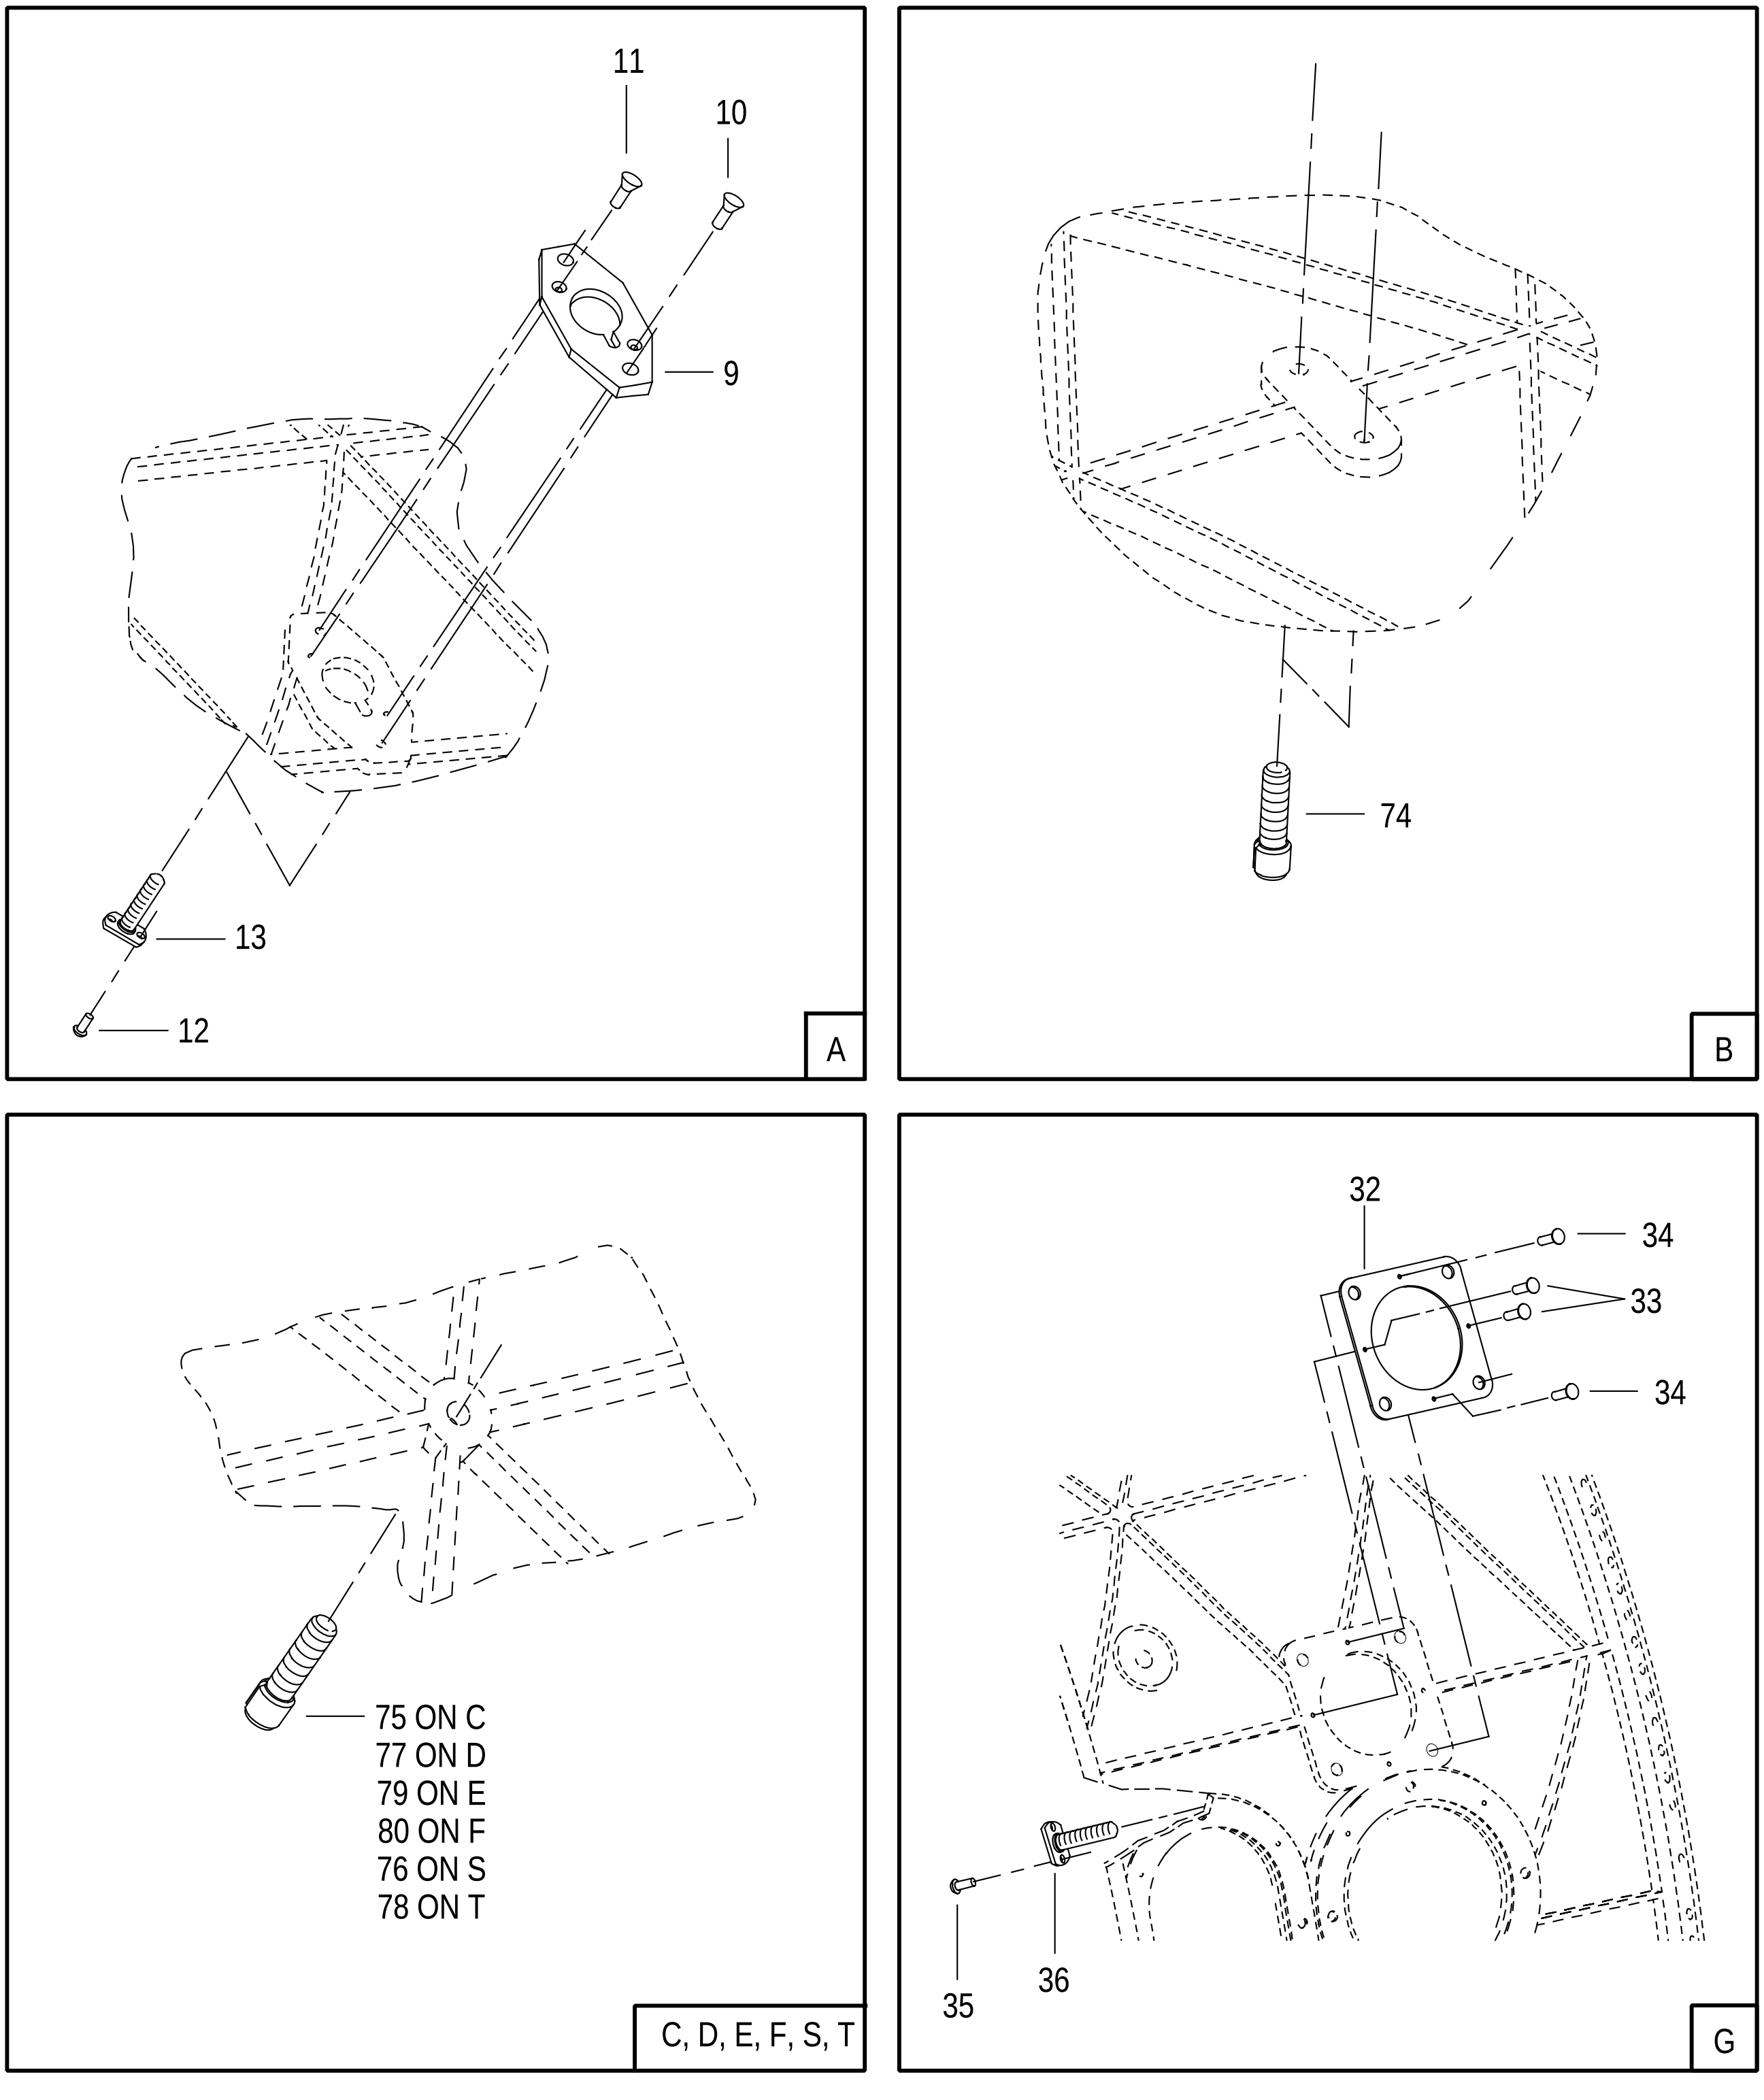


FIGURE 74. REAR FAN DUCT ASSY
(SHEET 4 OF 6)

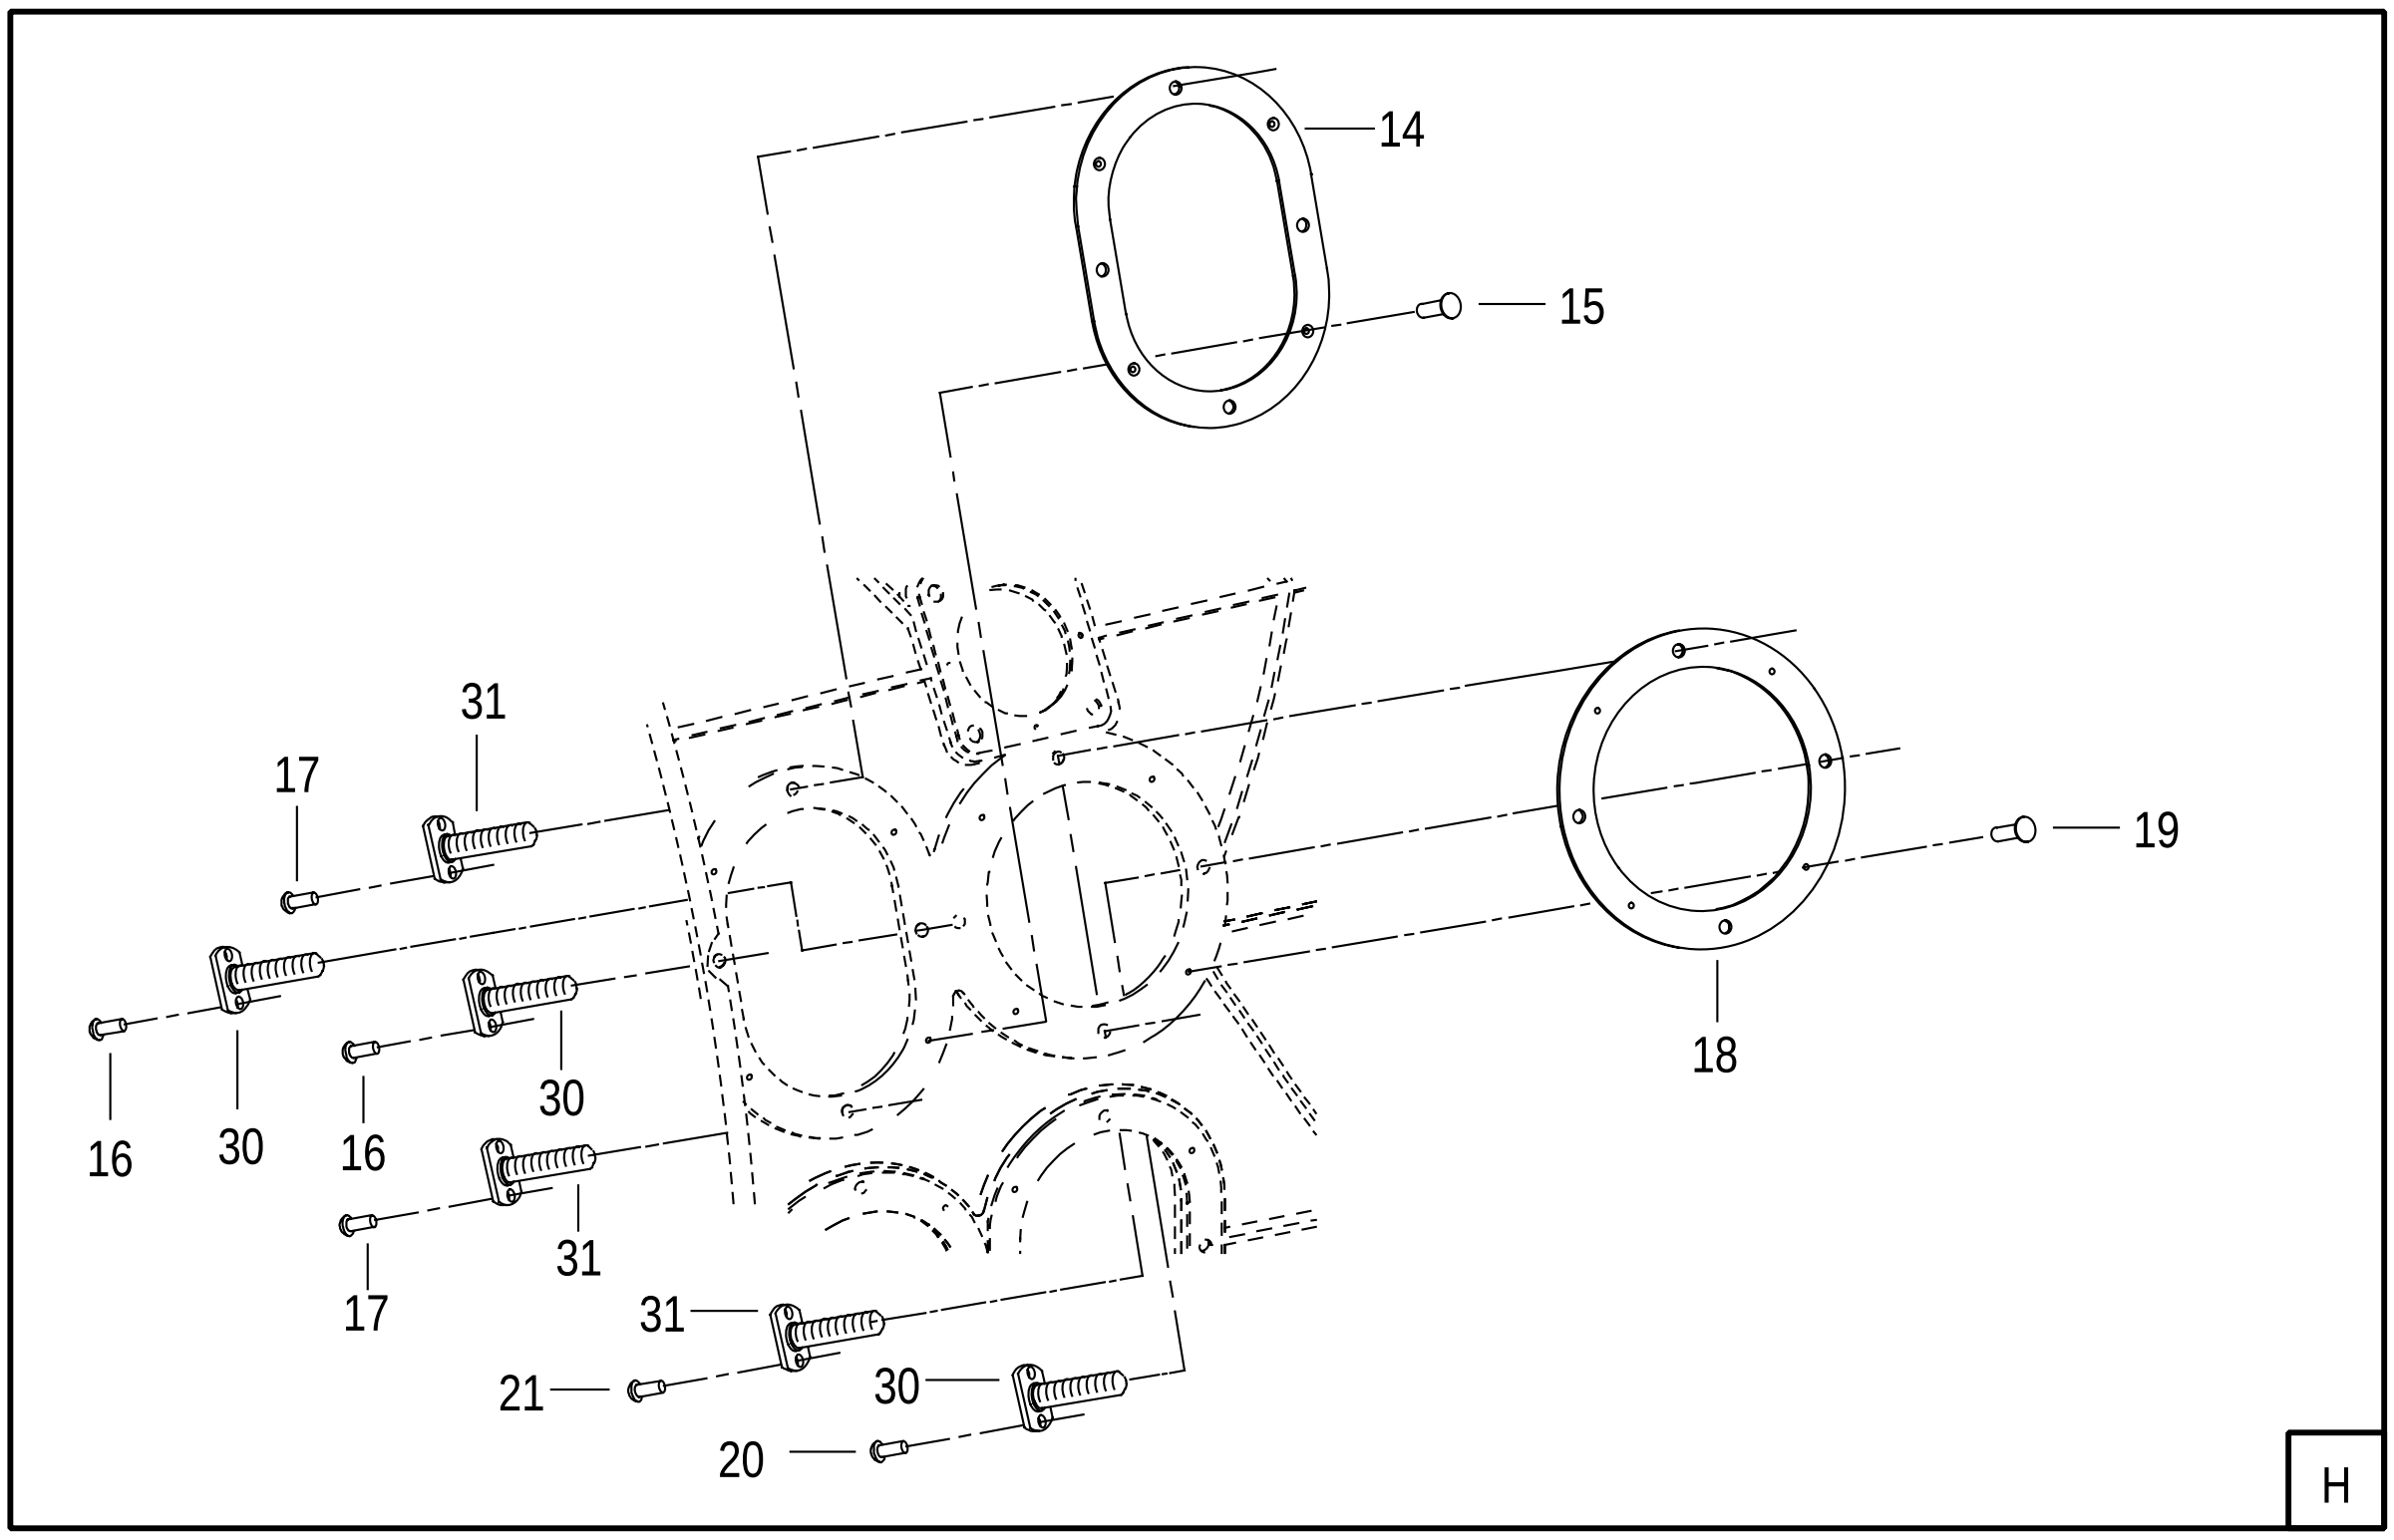

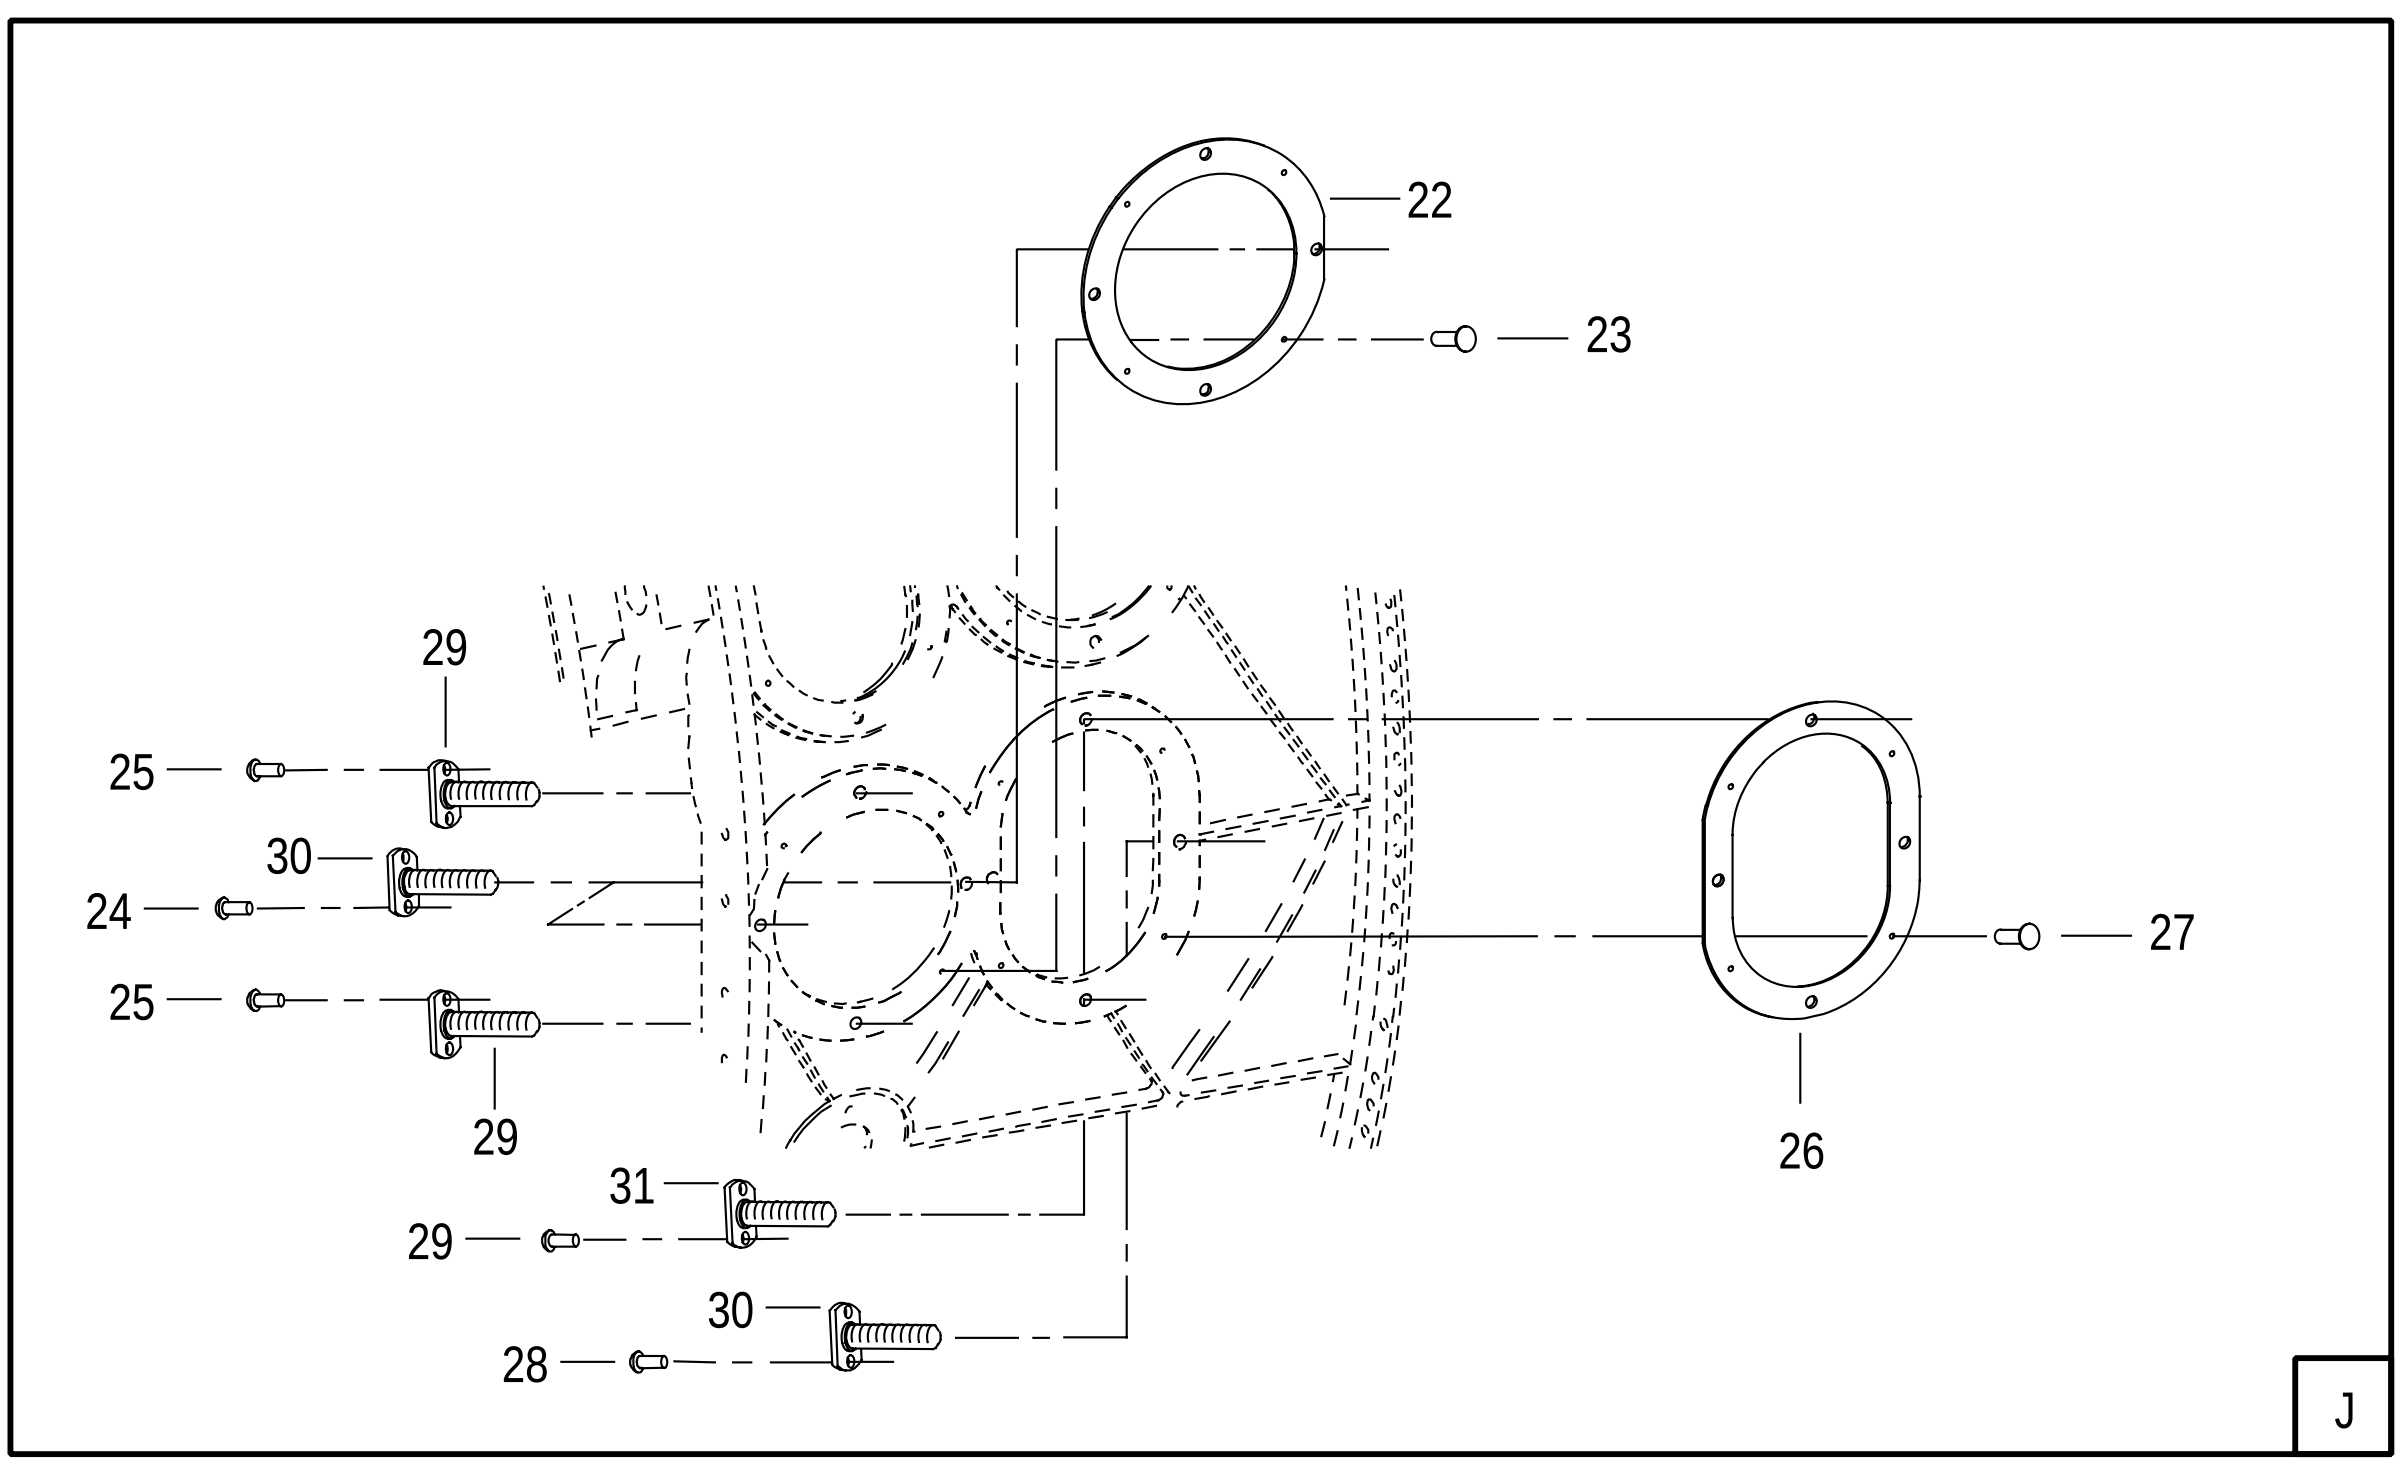

4756

FIGURE 74. REAR FAN DUCT ASSY
(SHEET 5 OF 6)

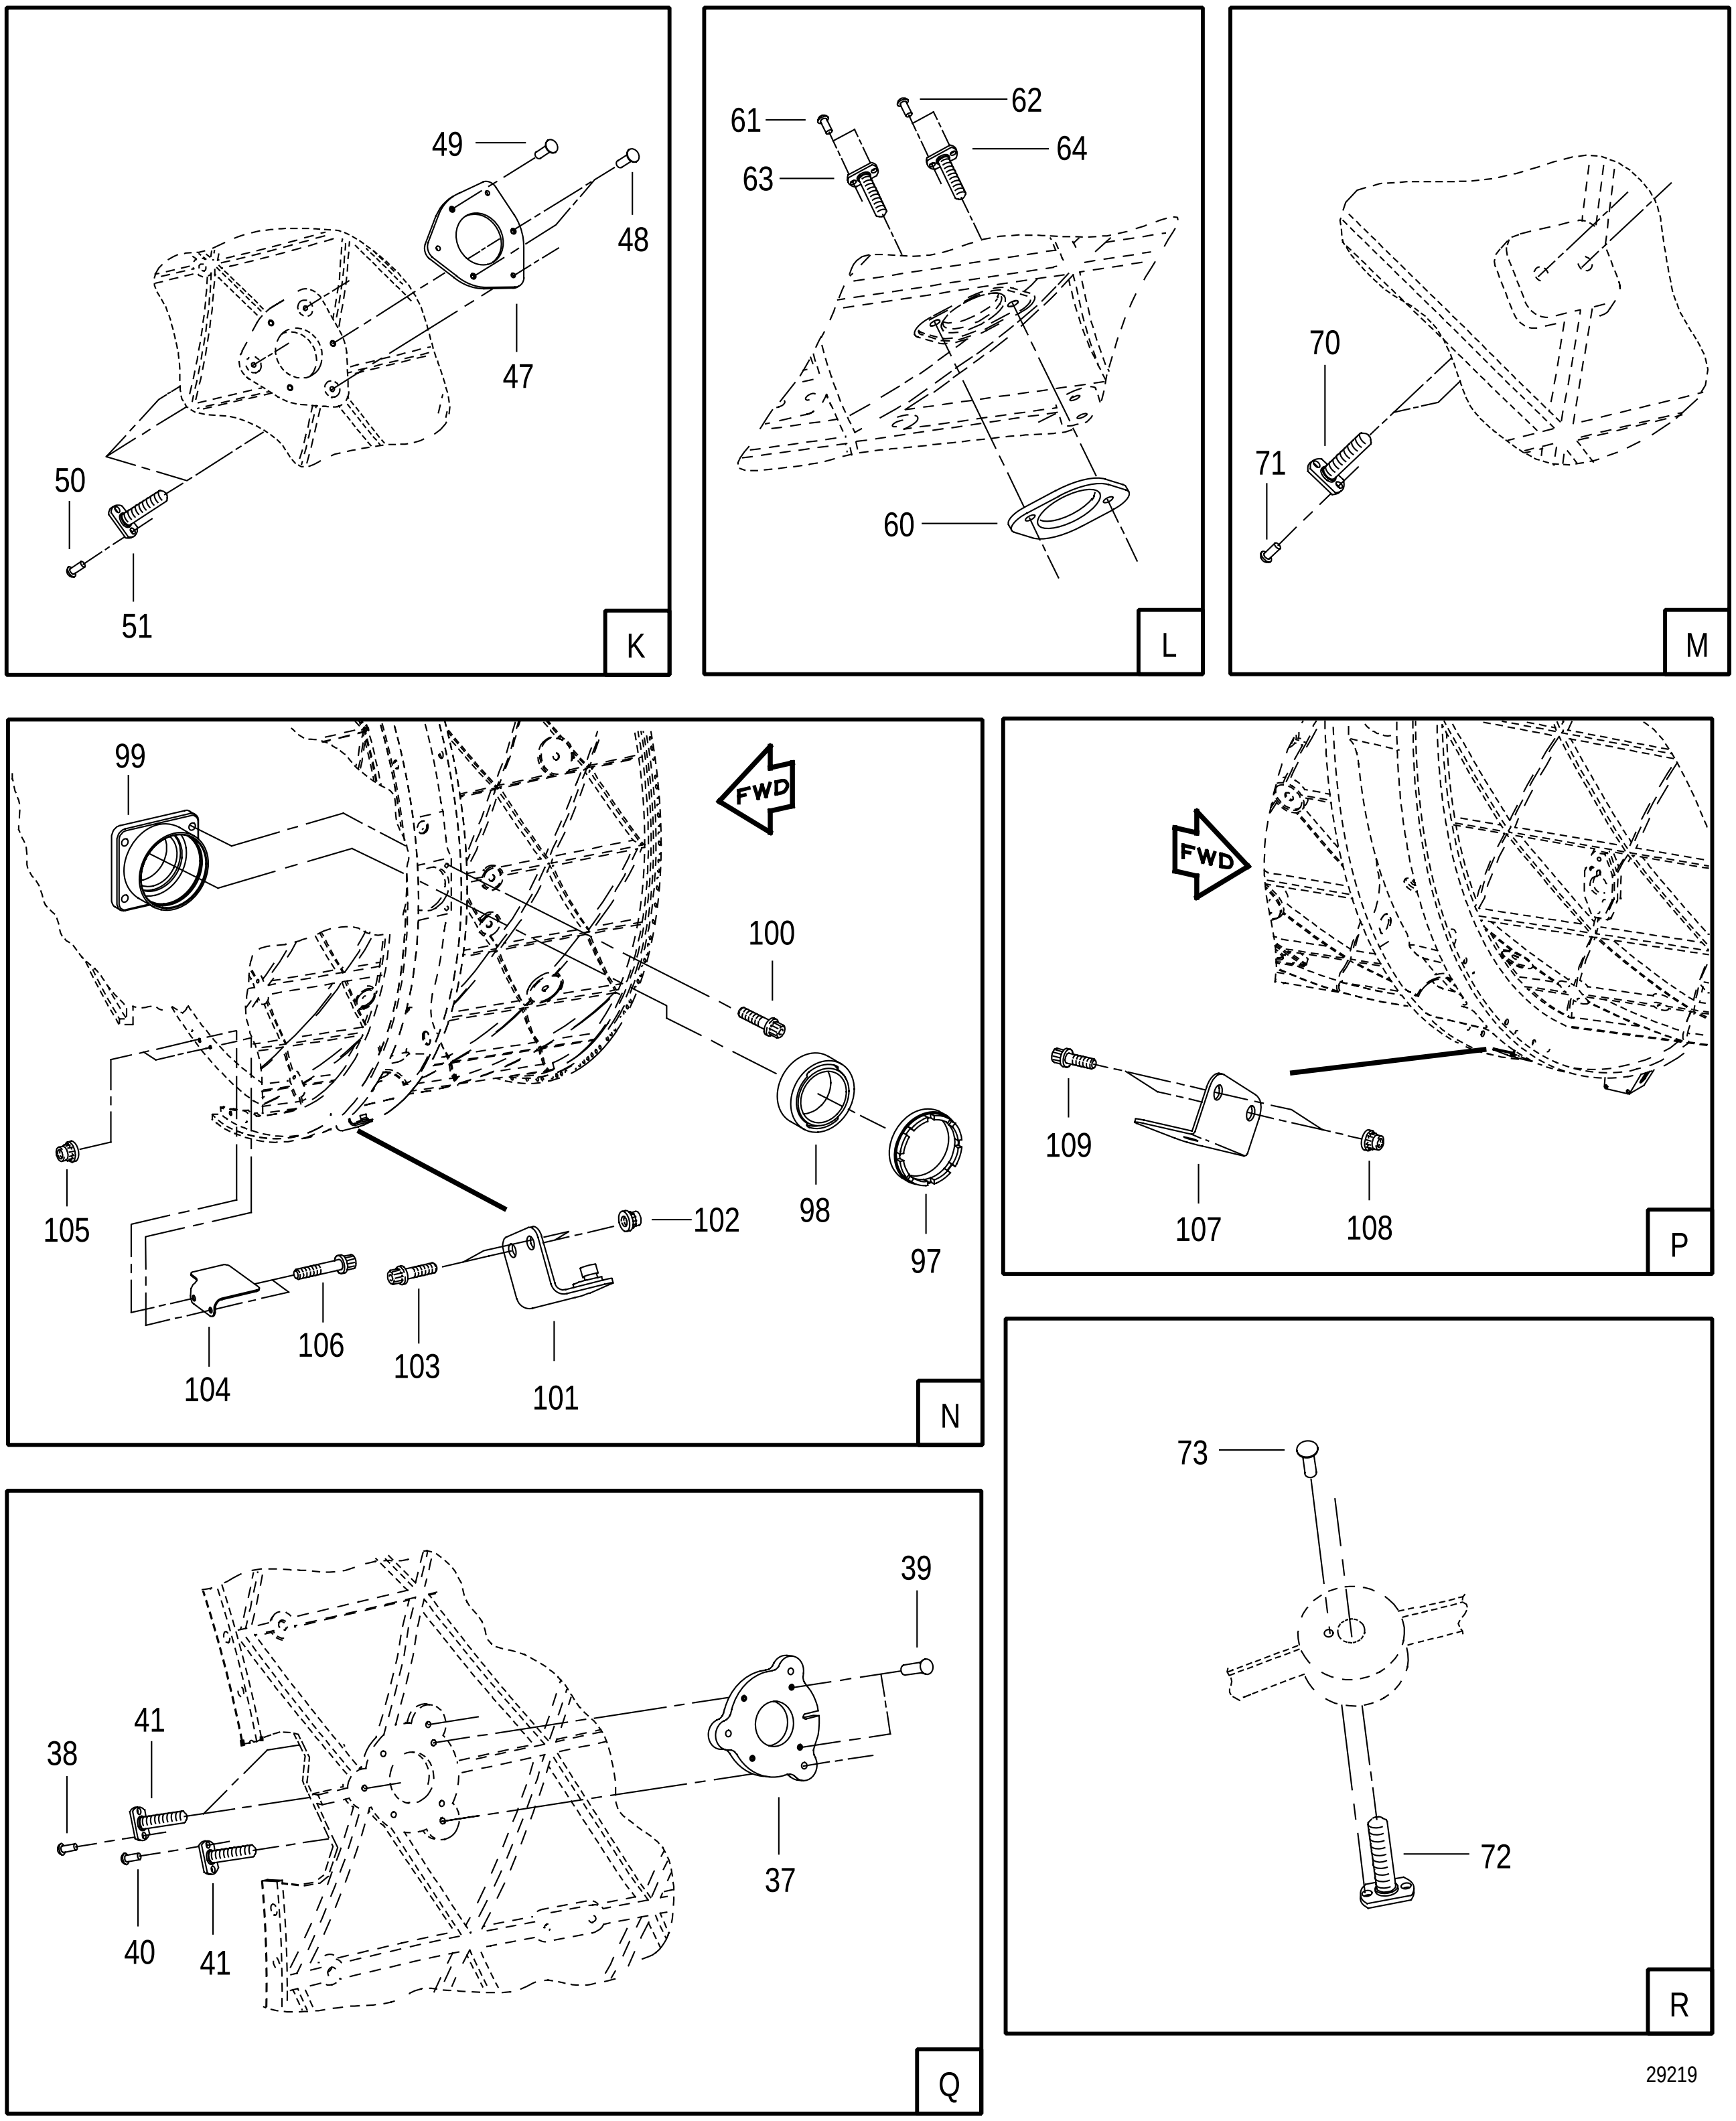


FIGURE 74. REAR FAN DUCT ASSY
(SHEET 6 OF 6)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
74	4069402	52661	DUCT-FAN, REAR, ASSY OF . . . . SEE FIG. 1-14 FOR NHA	1	KW	PAFDD
	4079768	52661	DUCT-FAN, REAR, ASSY OF . . . . SEE FIG. 1-14 FOR NHA	1	KX	PAFDD
R	4086531	52661	DUCT-FAN, REAR, ASSY OF . . . . REOP AND REID OF 4069402 DO NOT PROCURE FROM P&W SEE FIG. 1-14 FOR NHA	1		PAFDD
R	4086671	52661	DUCT-FAN, REAR, ASSY OF . . . . REOP AND REID OF 4079768 DO NOT PROCURE FROM P&W SEE FIG. 1-14 FOR NHA	1		PAFDD
- 1	4077360	52661	. BRACKET-CONVERGENT EXHAUST NOZZLE . . . . . . CONTROL	1		PAOZZ
- 2	MS9318-107	96906	. RIVET (AP).	2		PAOZZ
- 3	4071779	52661	. BRACKET-CONVERGENT EXHAUST NOZZLE . . . . . . CONTROL	1		PAOZZ
- 4	MS9318-105	96906	. RIVET (AP).	2		PAOZZ
	4073012-01	52661	. CHANNEL-GANG NUT, ASSY OF	1		PAFZZ
- 5	ST1209-03	52661	. RIVET-BLIND, COUNTERSUNK . . . . 0.094 DIA X 0.265 GRIP (AP)	2		PAFZZ
- 6	4073026	52661	.. NUT OPTION . . . . SEE OPTION TABLE	13		PAFZZ
- 7	4073012-02	52661	.. CHANNEL-GANG NUT	1		XA
- 8	4036398	52661	. BUSHING-SLEEVE, FLANGED . . . . 0.390 ID X 0.7061 OD X 1.398 IN. LONG	4		PADZZ
- 9	4069563	52661	. BOSS-FAN DUCT	7		PAFZZ
- 10	MS9318-112	96906	. RIVET (AP).	1		PAFZZ
- 11	MS9318-110	96906	. RIVET (AP).	1		PAFZZ
- 12	MS9318-062	96906	. RIVET (AP).	2		PAFZZ
- 13	ST2137-05	52661	. BOLT-ANCHOR . . . . 0.190-32UNJF-3A X 0.950 IN. LONG	14		PAFBZ
- 14	4071534	52661	. BOSS-REAR FAN DUCT, PAD 71	1		PAFZZ
- 15	MS9318-108	96906	. RIVET (AP).	4		PAFZZ
- 16	MS9318-060	96906	. RIVET (AP).	2		PAFZZ
- 17	MS9318-065	96906	. RIVET (AP).	2		PAFZZ
- 18	4071526	52661	. BOSS-REAR FAN DUCT, PAD 65	1		PAFZZ
- 19	MS9318-108	96906	. RIVET (AP).	4		PAFZZ
- 20	MS9318-062	96906	. RIVET (AP).	2		PAFZZ
- 21	MS9318-064	96906	. RIVET (AP).	2		PAFZZ
- 22	4071528	52661	. BOSS-REAR FAN DUCT, PAD 72	1		PAFZZ
- 23	MS9318-108	96906	. RIVET (AP).	4		PAFZZ
- 24	MS9318-062	96906	. RIVET (AP).	2		PAFZZ
- 25	MS9318-064	96906	. RIVET (AP).	2		PAFZZ
- 26	4071532	52661	. BOSS-REAR FAN DUCT, PAD 66	1		PAFZZ
- 27	MS9318-108	96906	. RIVET (AP).	4		PAFZZ
- 28	MS9318-060	96906	. RIVET (AP).	2		PAFZZ
- 29	MS9318-065	96906	. RIVET (AP).	2		PAFZZ
- 30	ST2138-01	52661	. BOLT-ANCHOR . . . . 0.250-28UNJF-3A X 0.925 IN. LONG	8		PAFBZ
- 31	ST2138-02	52661	. BOLT-ANCHOR . . . . 0.250-28UNJF-3A X 1.030 IN. LONG	8		PAFBZ
- 32	4071505	52661	. BOSS-FAN DUCT, REAR	2		PAFZZ
- 33	MS9318-106	96906	. RIVET (AP).	2		PAFZZ
- 34	MS9318-105	96906	. RIVET (AP).	2		PAOZZ
- 35	MS9318-062	96906	. RIVET (AP).	4		PAFZZ
- 36	ST2138-01	52661	. BOLT-ANCHOR . . . . 0.250-28UNJF-3A X 0.925 IN. LONG	8		PAFBZ
- 37	4072142	52661	. BOSS-FAN DUCT	1		PAFZZ
- 38	MS9318-108	96906	. RIVET (AP).	2		PAFZZ
- 39	MS9318-110	96906	. RIVET (AP).	2		PAFZZ
- 40	MS9318-064	96906	. RIVET (AP).	3		PAFZZ
- 41	ST2137-07	52661	. BOLT-ANCHOR . . . . 0.190-32UNJF-3A X 1.310 IN. LONG	3		PAFBZ
- 42	4077246	52661	. BOSS-FAN DUCT, REAR BORESCOPE	2		XA

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
74 - 43	MS9318-062	96906	. RIVET (AP)	2		PAFZZ
- 44	MS9318-072	96906	. RIVET (AP)	2		PAFZZ
- 45	ST2138-01	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 0.925 IN. LONG REPLACES ST2138-05	2		PAFBZ
- 46	ST2138-03	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 1.200 IN. LONG REPLACES ST2138-05	2		PAFBZ
- 47	4069562	52661	. BOSS-FAN DUCT, REAR	2		PAFZZ
- 48	MS9318-110	96906	. RIVET (AP)	2		PAFZZ
- 49	MS9318-108	96906	. RIVET (AP)	1		PAFZZ
- 50	MS9318-064	96906	. RIVET (AP)	3		PAFZZ
- 51	ST2137-05	52661	. BOLT-ANCHOR 0.190-32UNJF-3A X 0.950 IN. LONG	6		PAFBZ
- 52	4072144	52661	. BOSS-FAN DUCT	1		PAFZZ
- 53	MS9318-060	96906	. RIVET (AP)	4		PAFZZ
- 54	MS9318-017	96906	. RIVET (AP)	4		PAFZZ
- 55	ST2137-04	52661	. BOLT-ANCHOR 0.190-32UNJF-3A X 0.850 IN. LONG	4		PAFBZ
- 56	4071530	52661	. BOSS-REAR FAN DUCT, PAD 53	1		PAFZZ
- 57	MS9318-060	96906	. RIVET (AP)	4		PAFZZ
- 58	MS9318-016	96906	. RIVET (AP)	2		PAFZZ
- 59	ST2138-01	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 0.925 IN. LONG	2		PAFBZ
- 60	4077247	52661	. BOSS-FAN DUCT, REAR BORESCOPE	1		XA
- 61	MS9318-064	96906	. RIVET (AP)	2		PAFZZ
- 62	MS9318-059	96906	. RIVET (AP)	2		PAFZZ
- 63	ST2138-04	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 1.325 IN. LONG REPLACES ST2138-05	1		PAFBZ
- 64	ST2138-01	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 0.925 IN. LONG REPLACES ST2138-03	1		PAFBZ
- 65	4036399	52661	. BUSHING-SLEEVE, FLANGED 0.390 ID X 0.79805 OD X 0.505 IN. LONG	4		PADZZ
- 66	ST2138-06	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 0.688 IN. LONG	20		PAFBZ
- 67	MS9318-054	96906	. RIVET (AP)	1		PAFZZ
- 68	ST2137-02	52661	. BOLT-ANCHOR 0.190-32UNJF-3A X 0.600 IN. LONG	3		PAFBZ
- 69	MS9318-009	96906	. RIVET (AP)	1		PAFZZ
- 70	ST2137-04	52661	. BOLT-ANCHOR 0.190-32UNJF-3A X 0.850 IN. LONG	12		PAFBZ
- 71	MS9318-053	96906	. RIVET (AP)	1		PAFZZ
- 72	ST2138-06	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 0.688 IN. LONG	2		PAFBZ
- 73	MS9318-054	96906	. RIVET (AP)	1		PAFZZ
- 74	TR28009-8	29372	. STUD-LOCKED IN 0.190-32 X 0.250-28 X 0.500 IN. LONG P&WA PART NO. ST2665-08	18		PAFZZ
- 75	TR28009-10	29372	. STUD-LOCKED IN 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10 REPLACES ST2665-08	6		PAFZZ
- 76	TR28009-10	29372	. STUD-LOCKED IN 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10 REPLACES ST2665-08 USE ONLY ON 4069402	2	KW	PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
74 - 77	TR28009-12	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.000 IN. LONG P&WA PART NO. ST2665-12	4		PAFZZ
- 78	TR28009-12	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.000 IN. LONG P&WA PART NO. ST2665-10 USE ONLY ON 4069402	2	KW	PAFZZ
- 79	TR28009-18	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.375 IN. LONG P&WA PART NO. ST2665-18	5		PAFZZ
- 80	TR28009-20	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.500 IN. LONG P&WA PART NO. ST2665-20	3		PAFZZ
- 81	4030789	52661	. PIN-SHOULDER, HEADLESS . . . . 0.12475 AND 0.186 X 0.325 IN. LONG	1		PAFZZ
- 82	4069403-01	52661	. DUCT-FAN, REAR, SUBASSY OF . . . . USE ONLY ON 4069402	1		XA
	4079769-01	52661	. DUCT-FAN, REAR, SUBASSY OF . . . . USE ONLY ON 4079768	1		XA
	4068700	52661	ENGINE ASSY-TURBO FAN	REF	A	ADD
	4068800	52661	ENGINE ASSY-TURBO FAN	REF	B	ADD
- 83	4023116	52661	. NUT OPTION . . . . SEE OPTION TABLE	78		PAOZZ
- 84	ST2018-022	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.688 IN. LONG	64		PAOZZ
- 85	ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.750 IN. LONG	2		PAOZZ
- 86	ST2018-032	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 1.000 IN. LONG	2		PAOZZ
- 87	4032948	52661	. PIN-SHOULDER, HEADLESS . . . . 0.2505 DIA X 0.250-28UNJF-3A X 1.625 IN. LONG	2		PAOZZ
- 88	4062651	52661	. BRACKET ASSY-ENGINE ELECTRONIC CONTROL . SUPPORT LINK	1		PAFBZ
- 89	DELETED					
- 90	DELETED					
- 91	ST2018-022	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.688 IN. LONG	1		PAOZZ
- 92	ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.750 IN. LONG	2		PAOZZ
- 93	4081141	52661	. BRACKET-LOOP CLAMP	1		PAFZZ
- 94	ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.750 IN. LONG	2		PAOZZ
- 95	4080395	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 96	4080927-01	52661	. BRACKET-LOOP CLAMP, ASSY OF	1		PAFZZ
- 96A	ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.750 IN. LONG	3		PAOZZ
- 96B	4081295	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
- 97	4034224	52661	. RING-EXTERNALLY THREADED . . . . 2.500-16UNJF-3A X 0.580 IN. THK	2		PAFZZ
- 98	= 4053840	52661	. BEARING OPTION . . . . SEE OPTION TABLE	2		PAFZZ
	= 4081346-01	52661	. BEARING SET-PLAIN SELF-ALIGNING . . . . 1.74975 X 2.43725 IN. OD	2		PAFZZ
- 99	4031095	52661	. HOUSING-REAR MOUNT BEARING	2		PAFBZ
- 100	MS9742-12	96906	. BOLT (AP)	4		PAFZZ
- 101	4072164	52661	. BRACKET-ANGLE, ASSY OF	1		PAOBZ
- 102	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
- 103	ST2015-016	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	2		PAOZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	74 - 104	4037194	52661	. BRACKET-ASSY OF, IDENTIFICATION PLATE	1		PADBZ
	- 105	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
	- 106	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	2		PAOZZ
	- 107	4074138	52661	. BRACKET-BLOCK CLAMP	1		PAOZZ
	- 108	4023115	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAOZZ
	- 109	ST2015-020	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	2		PAOZZ
	- 110	4080751	52661	. BUSHING-BLANK . . . . 0.900 OD X 1.400 IN. LONG SERVICE REPAIR FOR 4036398	4		PADZZ
	- 111	4080752	52661	. BUSHING-BLANK . . . . 0.995 OD X 0.510 IN. LONG SERVICE REPAIR FOR 4036399	4		PADZZ
R R	- 112	MS9318-065	96906	. RIVET . . . . SERVICE REPAIR FOR 4086531 AND 4086671	23		PAFZZ
R R	- 113	MS9319-052	96906	. RIVET . . . . SERVICE REPAIR FOR 4086531 AND 4086671	50		PAFZZ

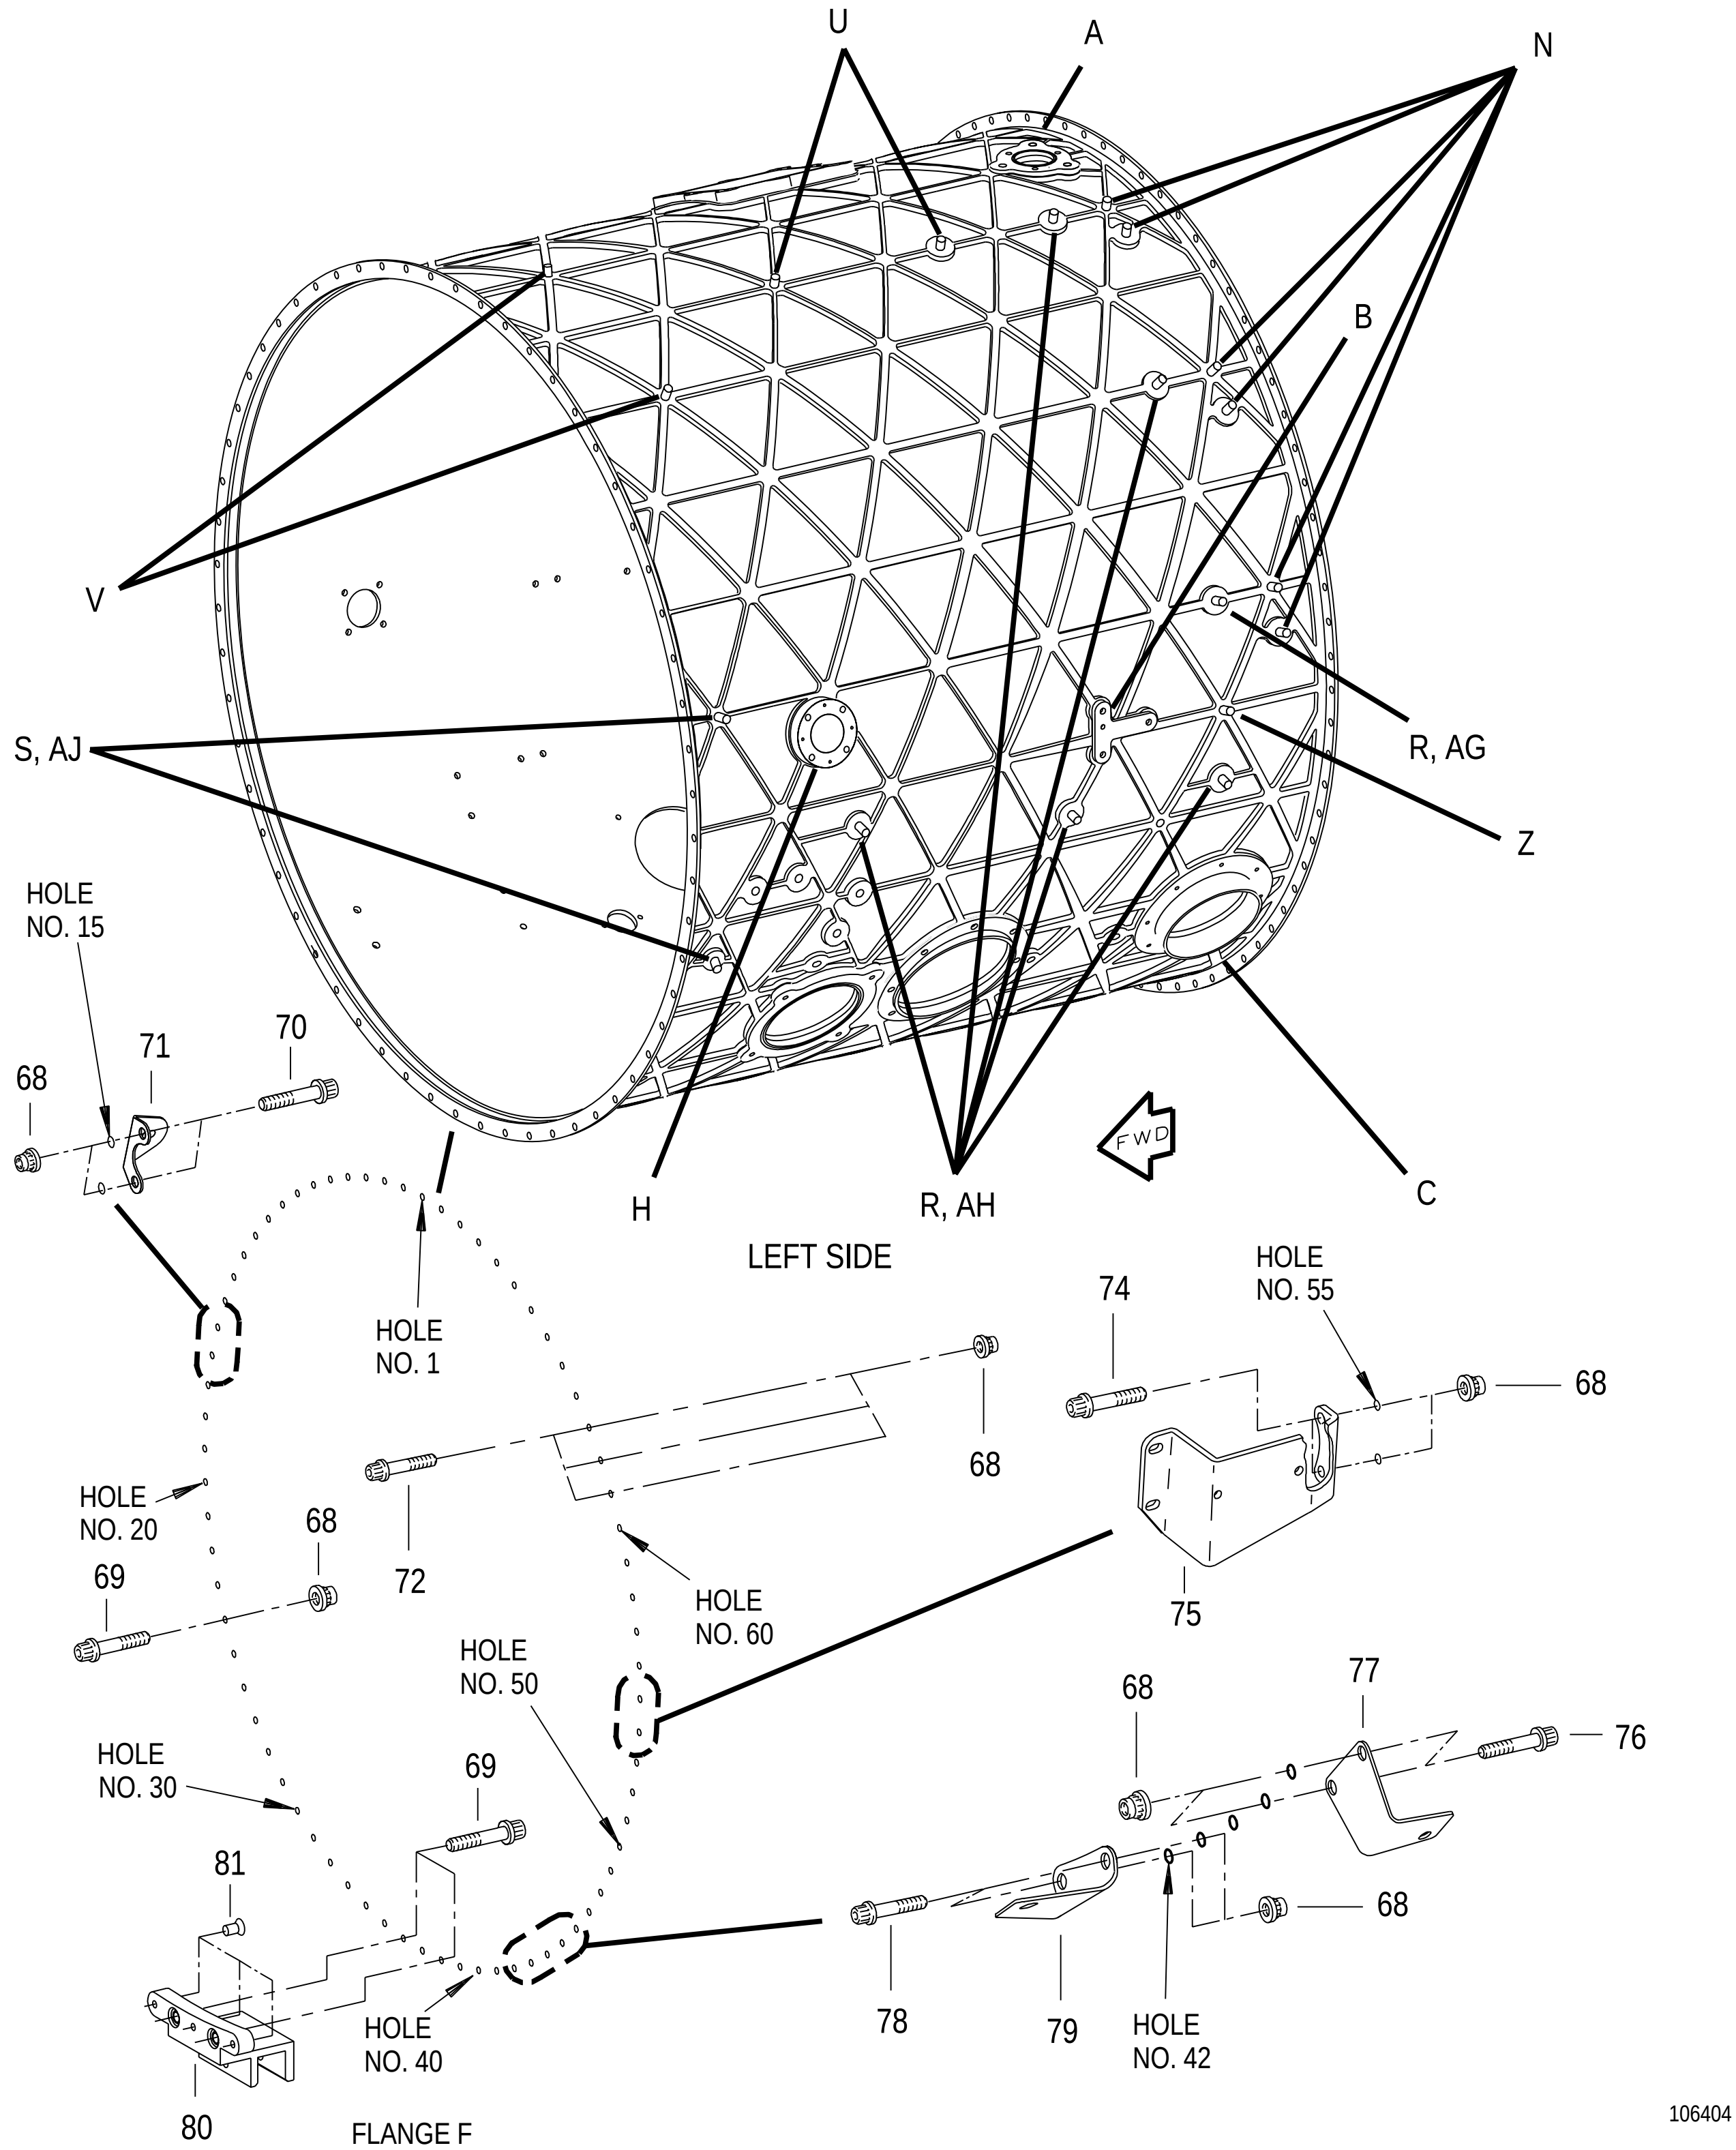


FIGURE 75. FRONT FAN DUCT ASSY
(SHEET 1 OF 6)

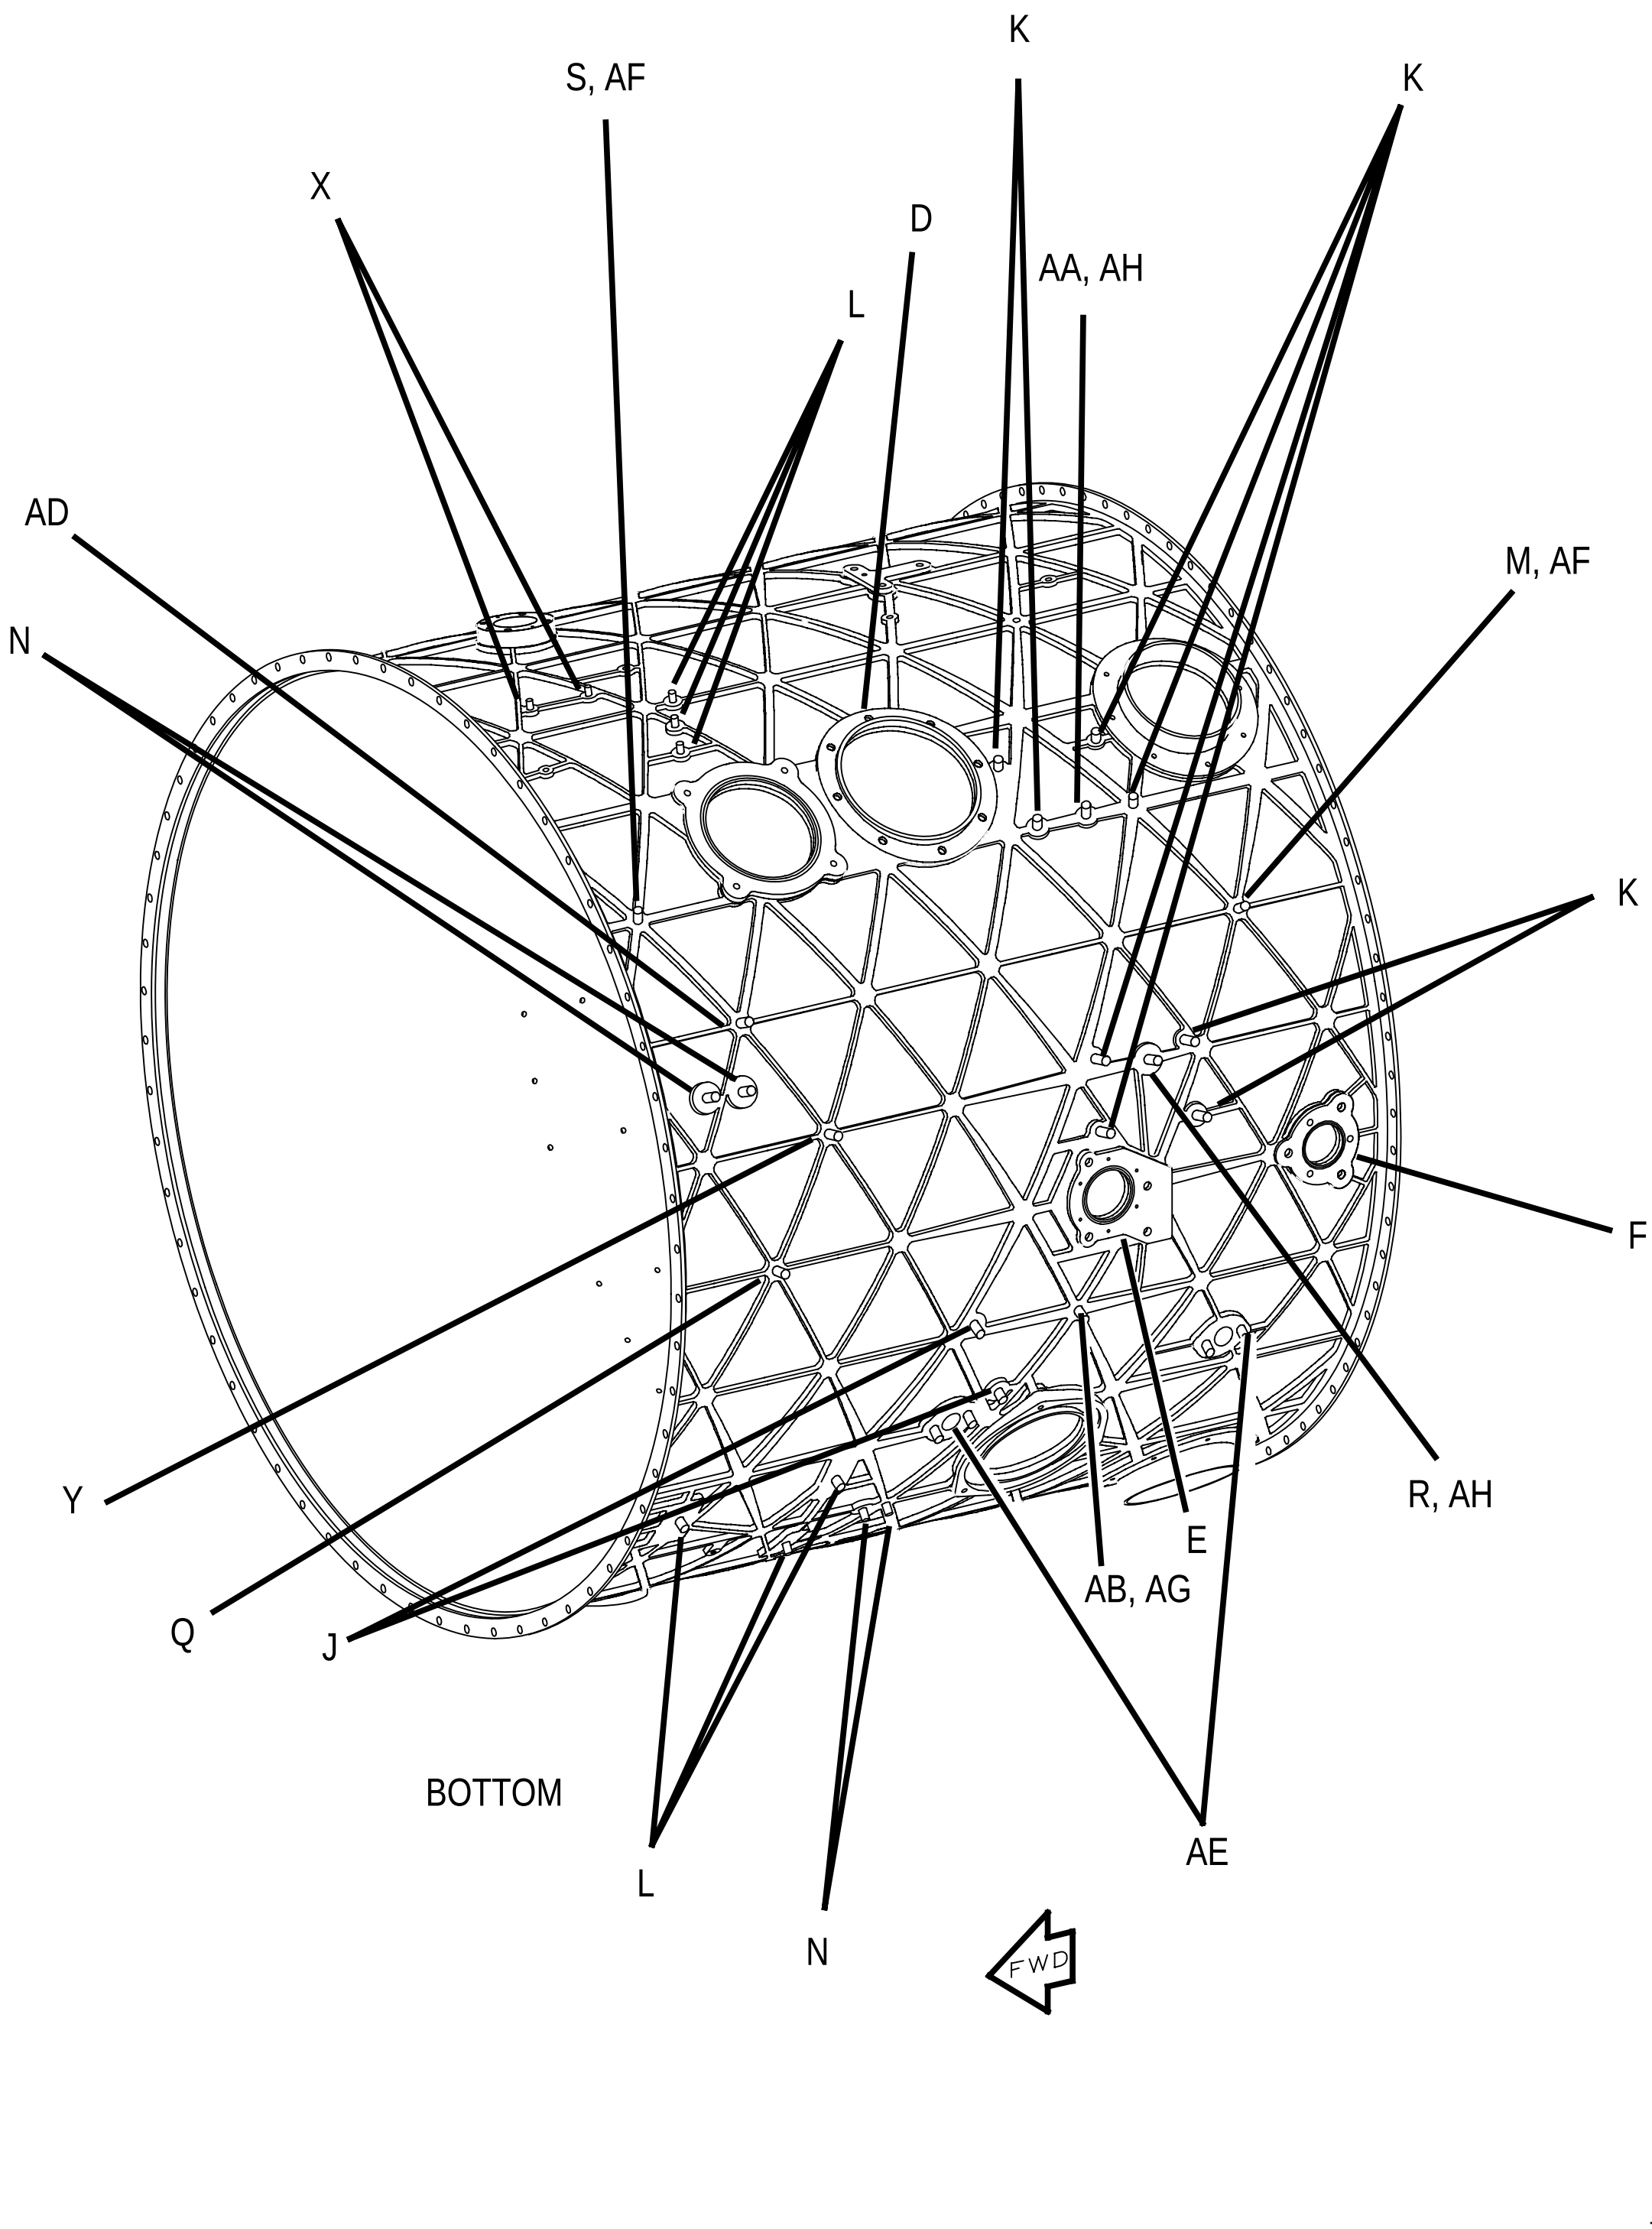


FIGURE 75. FRONT FAN DUCT ASSY
(SHEET 2 OF 6)

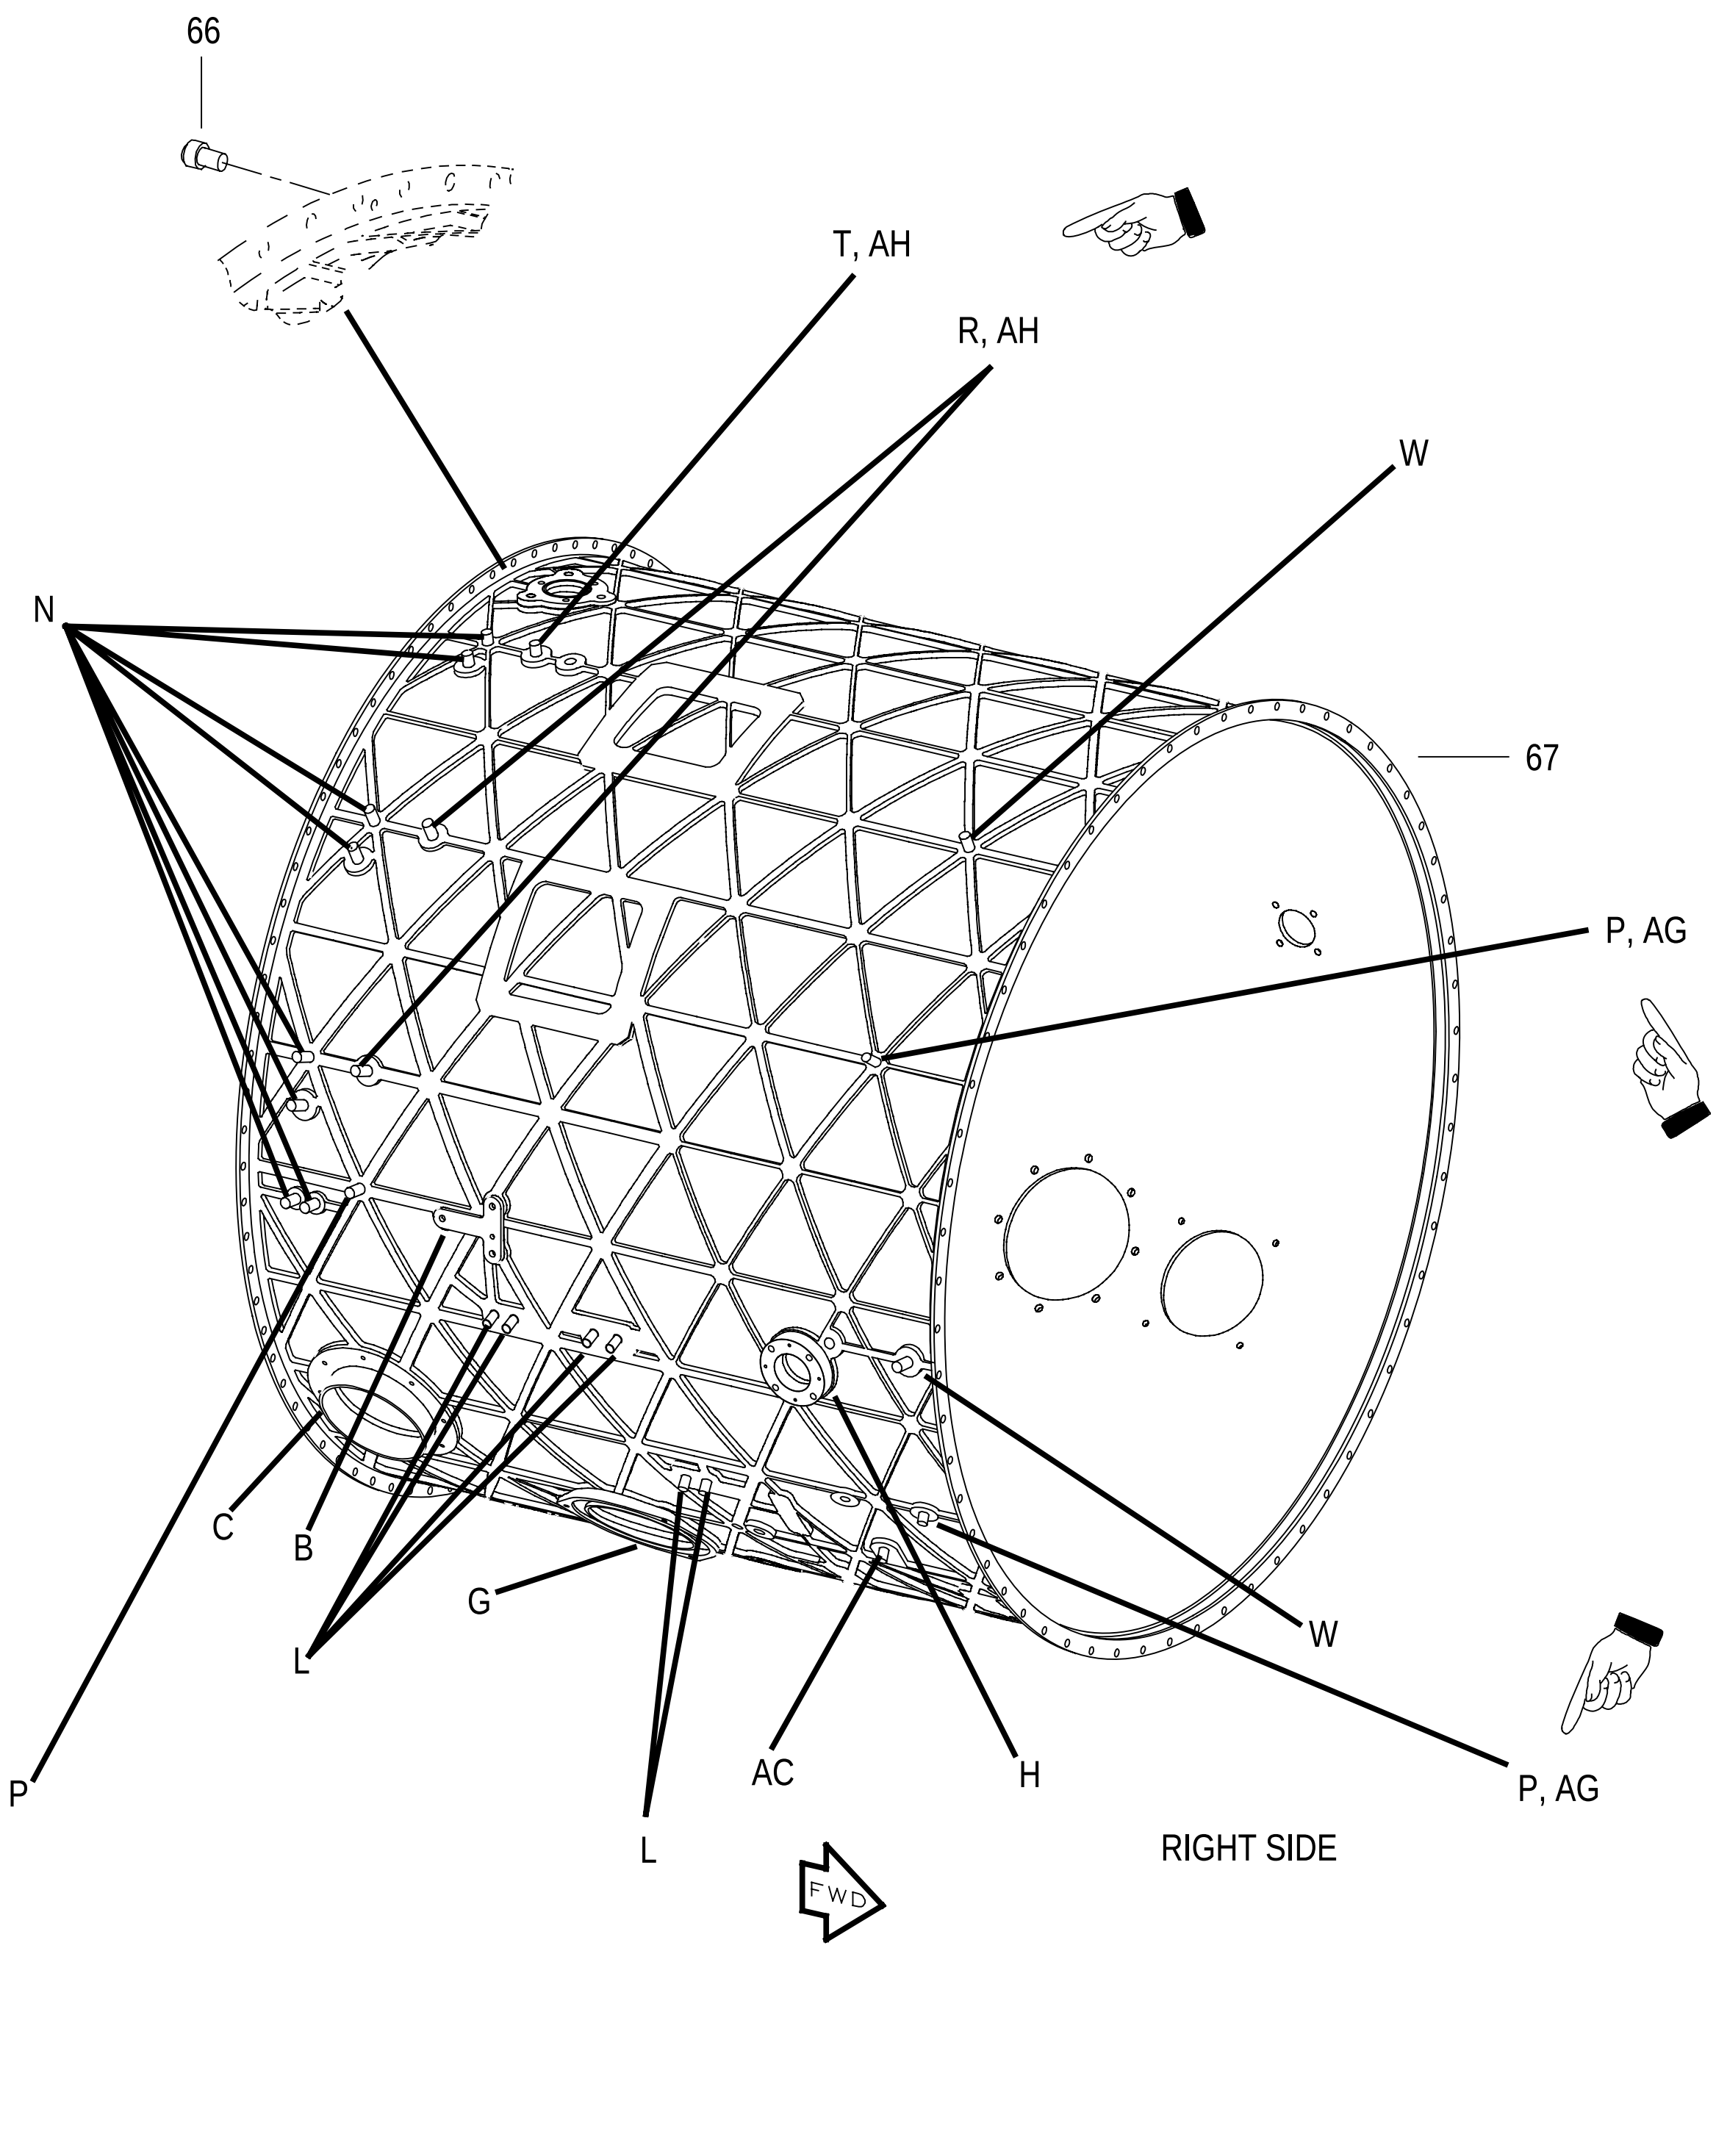


FIGURE 75. FRONT FAN DUCT ASSY
(SHEET 3 OF 6)

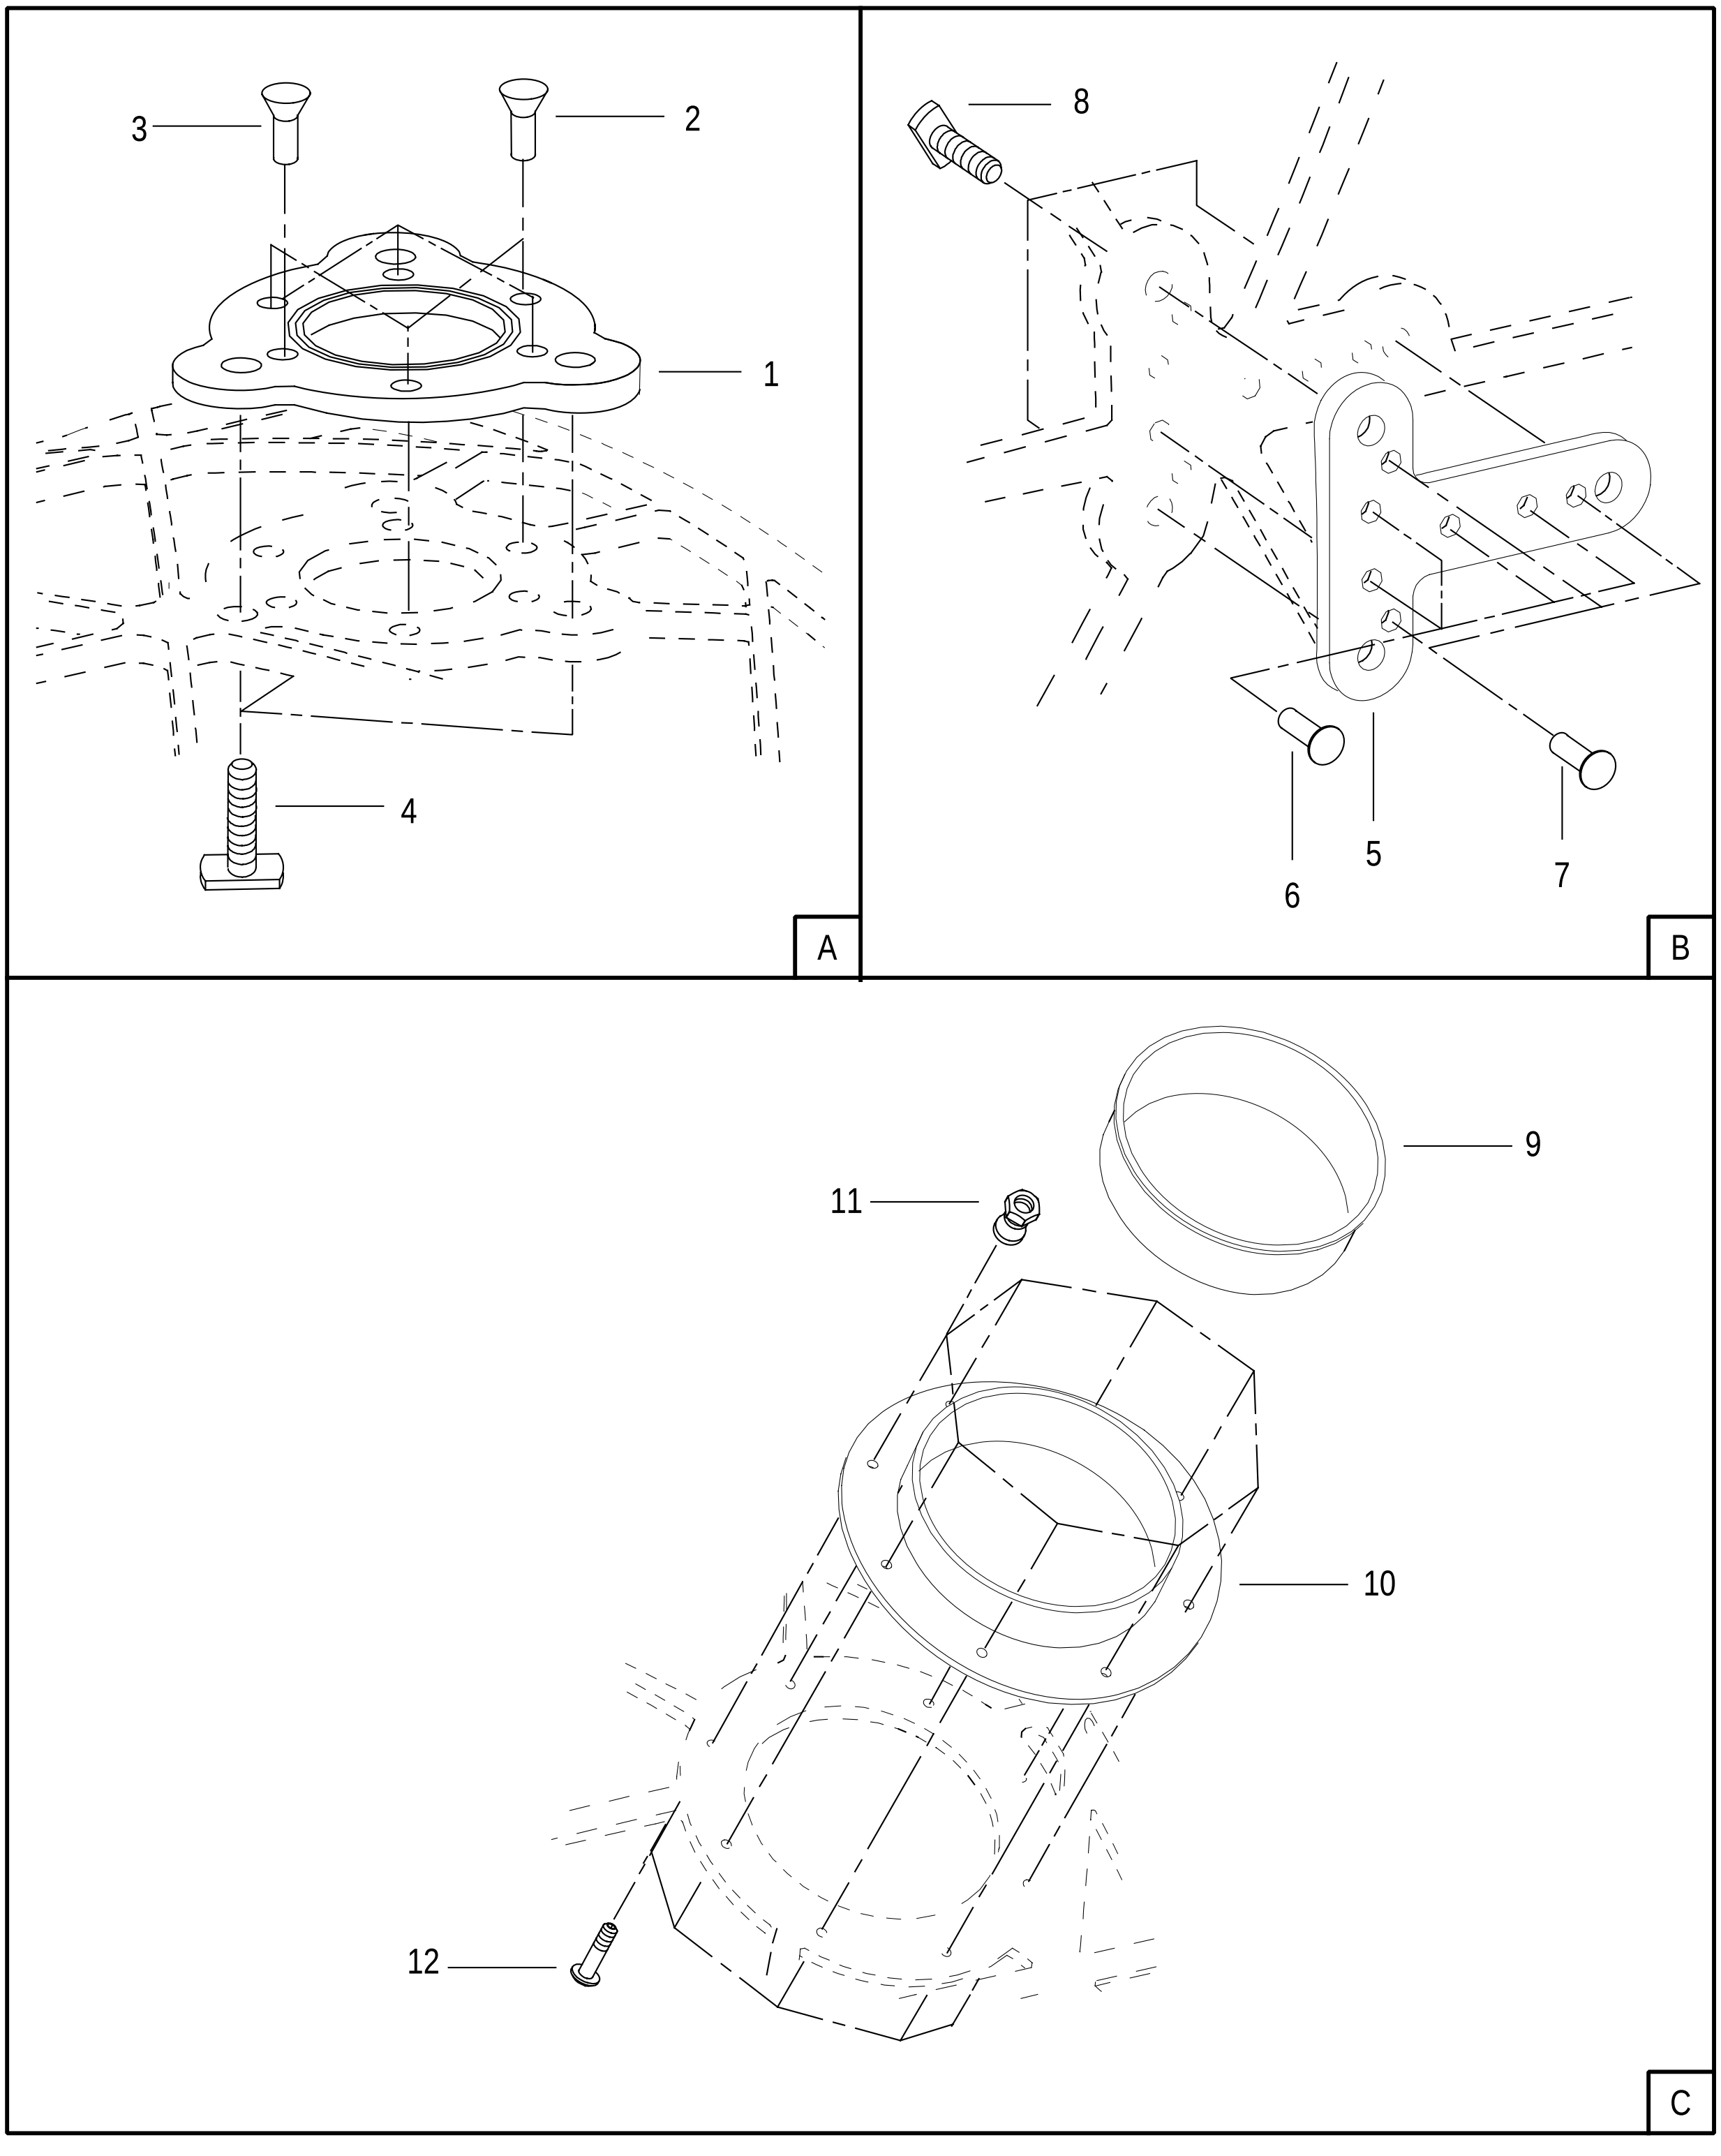


FIGURE 75. FRONT FAN DUCT ASSY
(SHEET 4 OF 6)

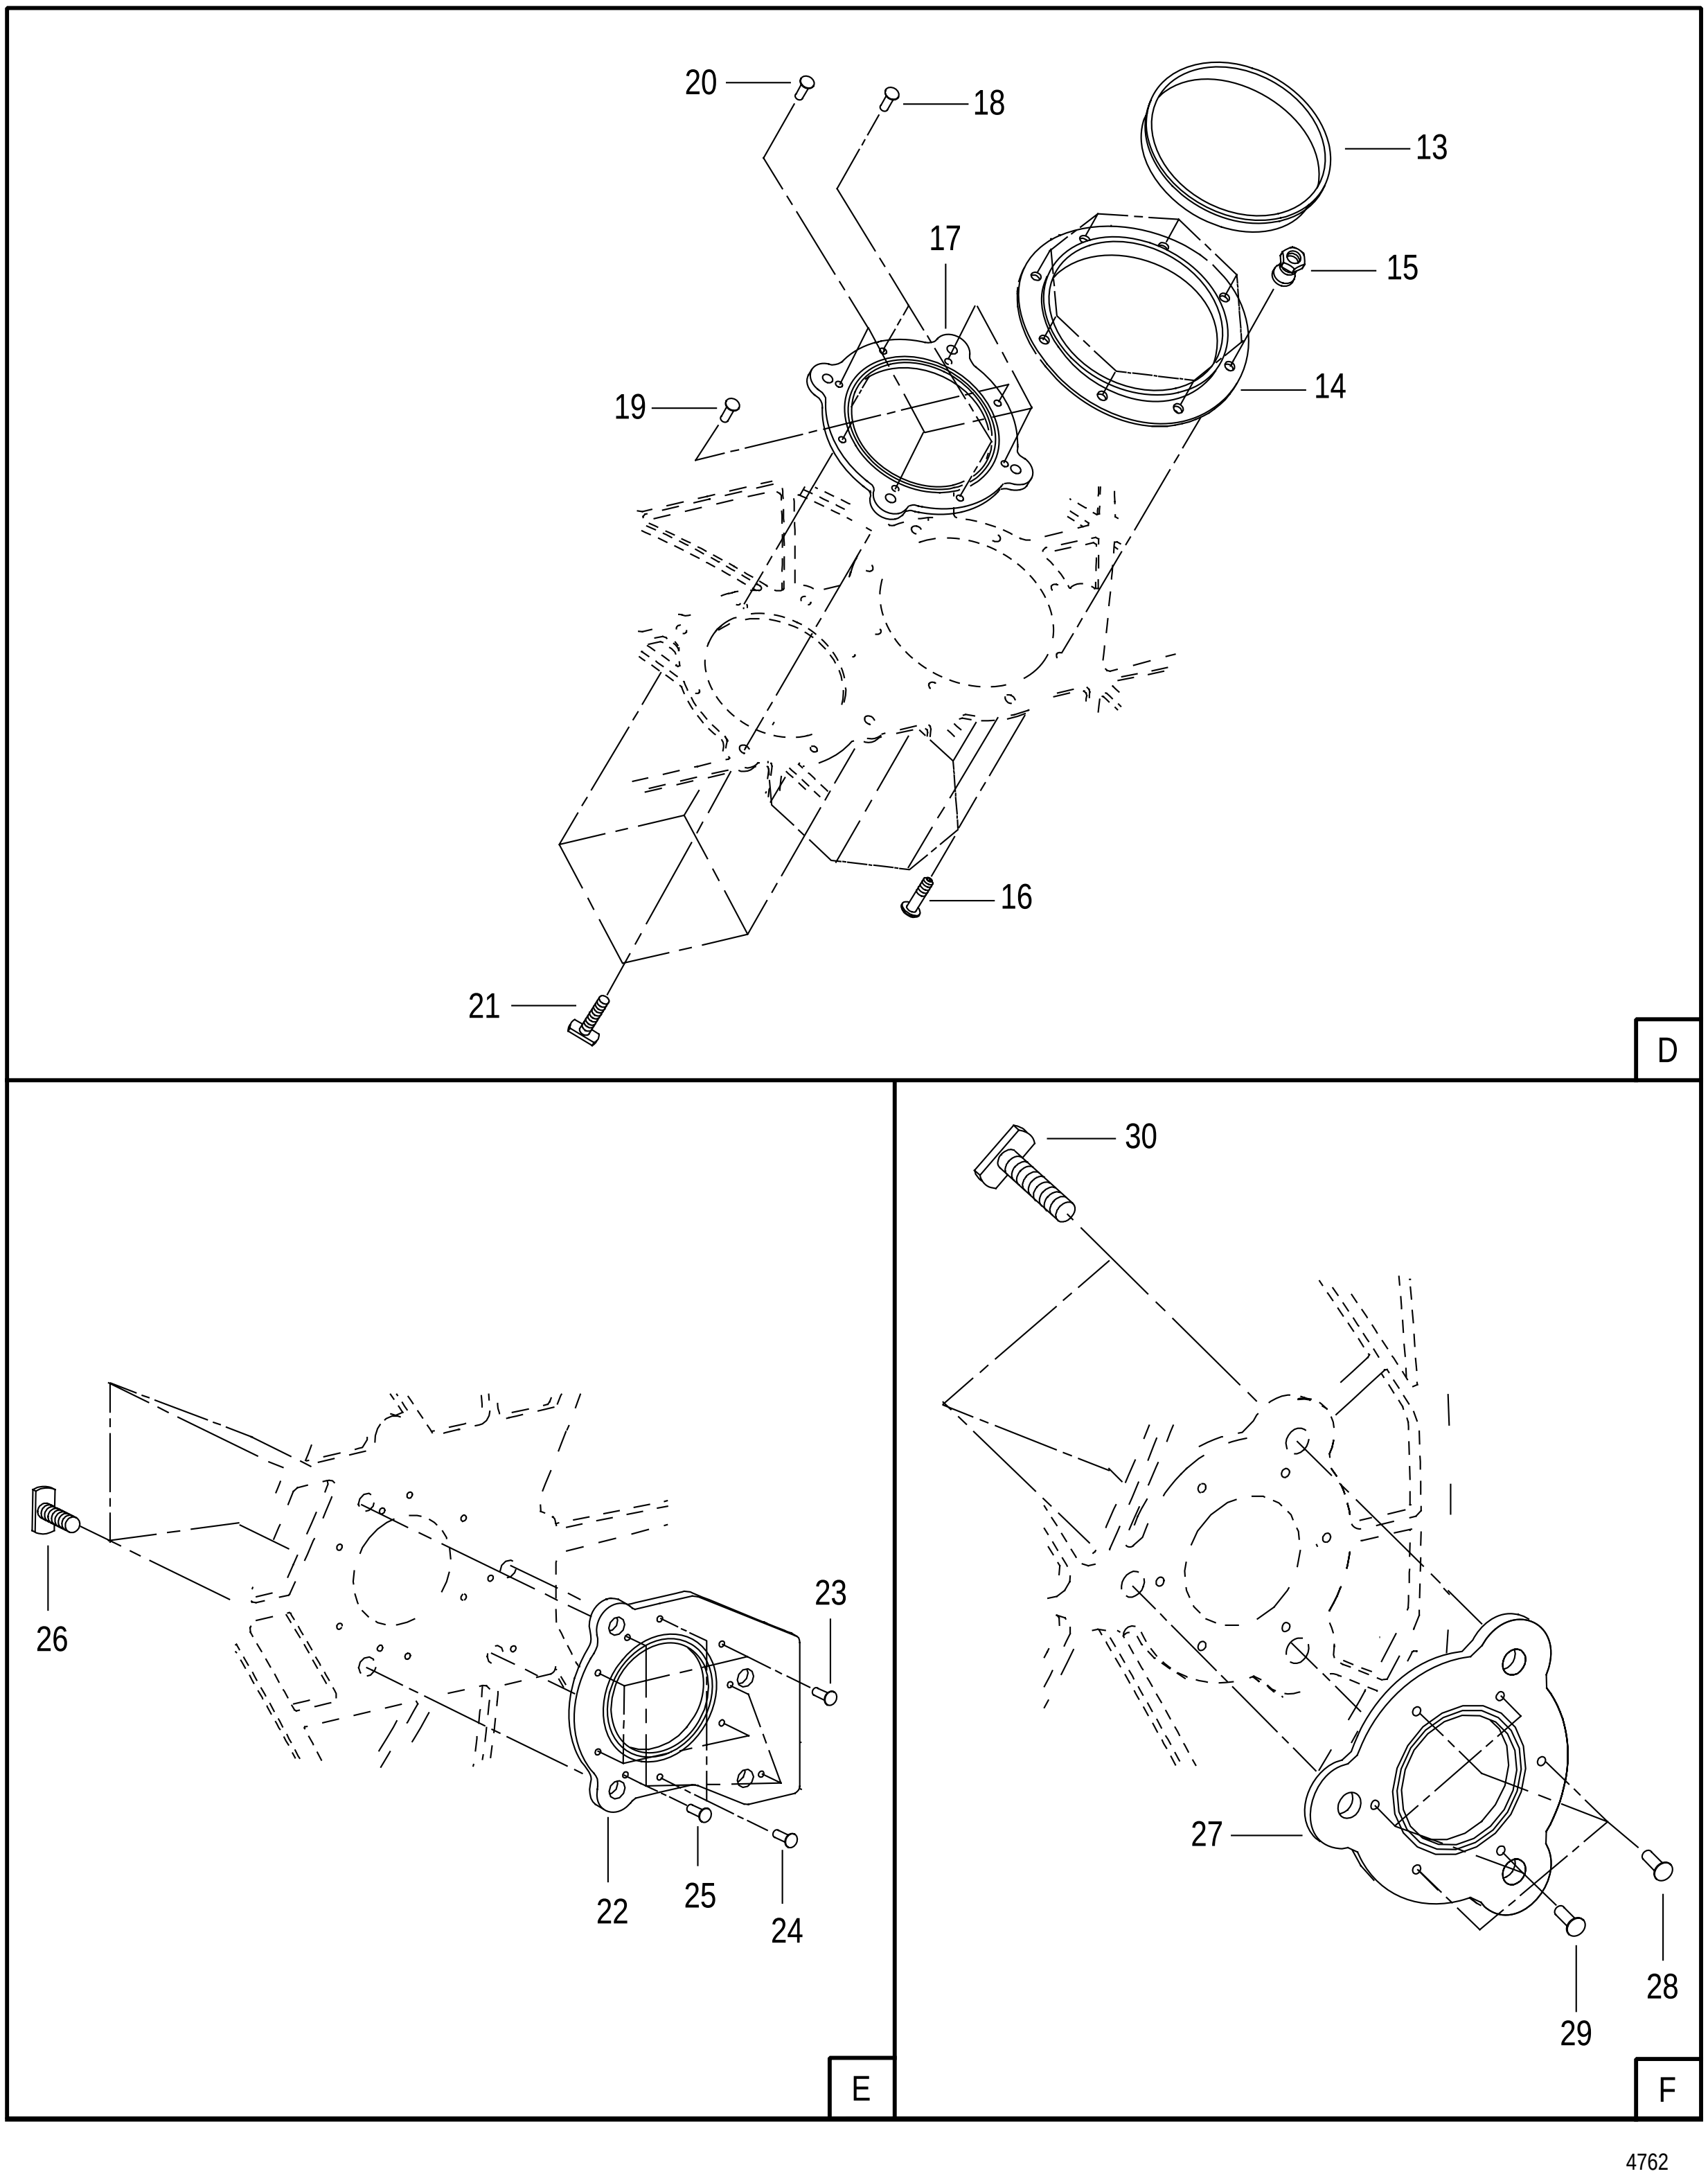


FIGURE 75. FRONT FAN DUCT ASSY
(SHEET 5 OF 6)

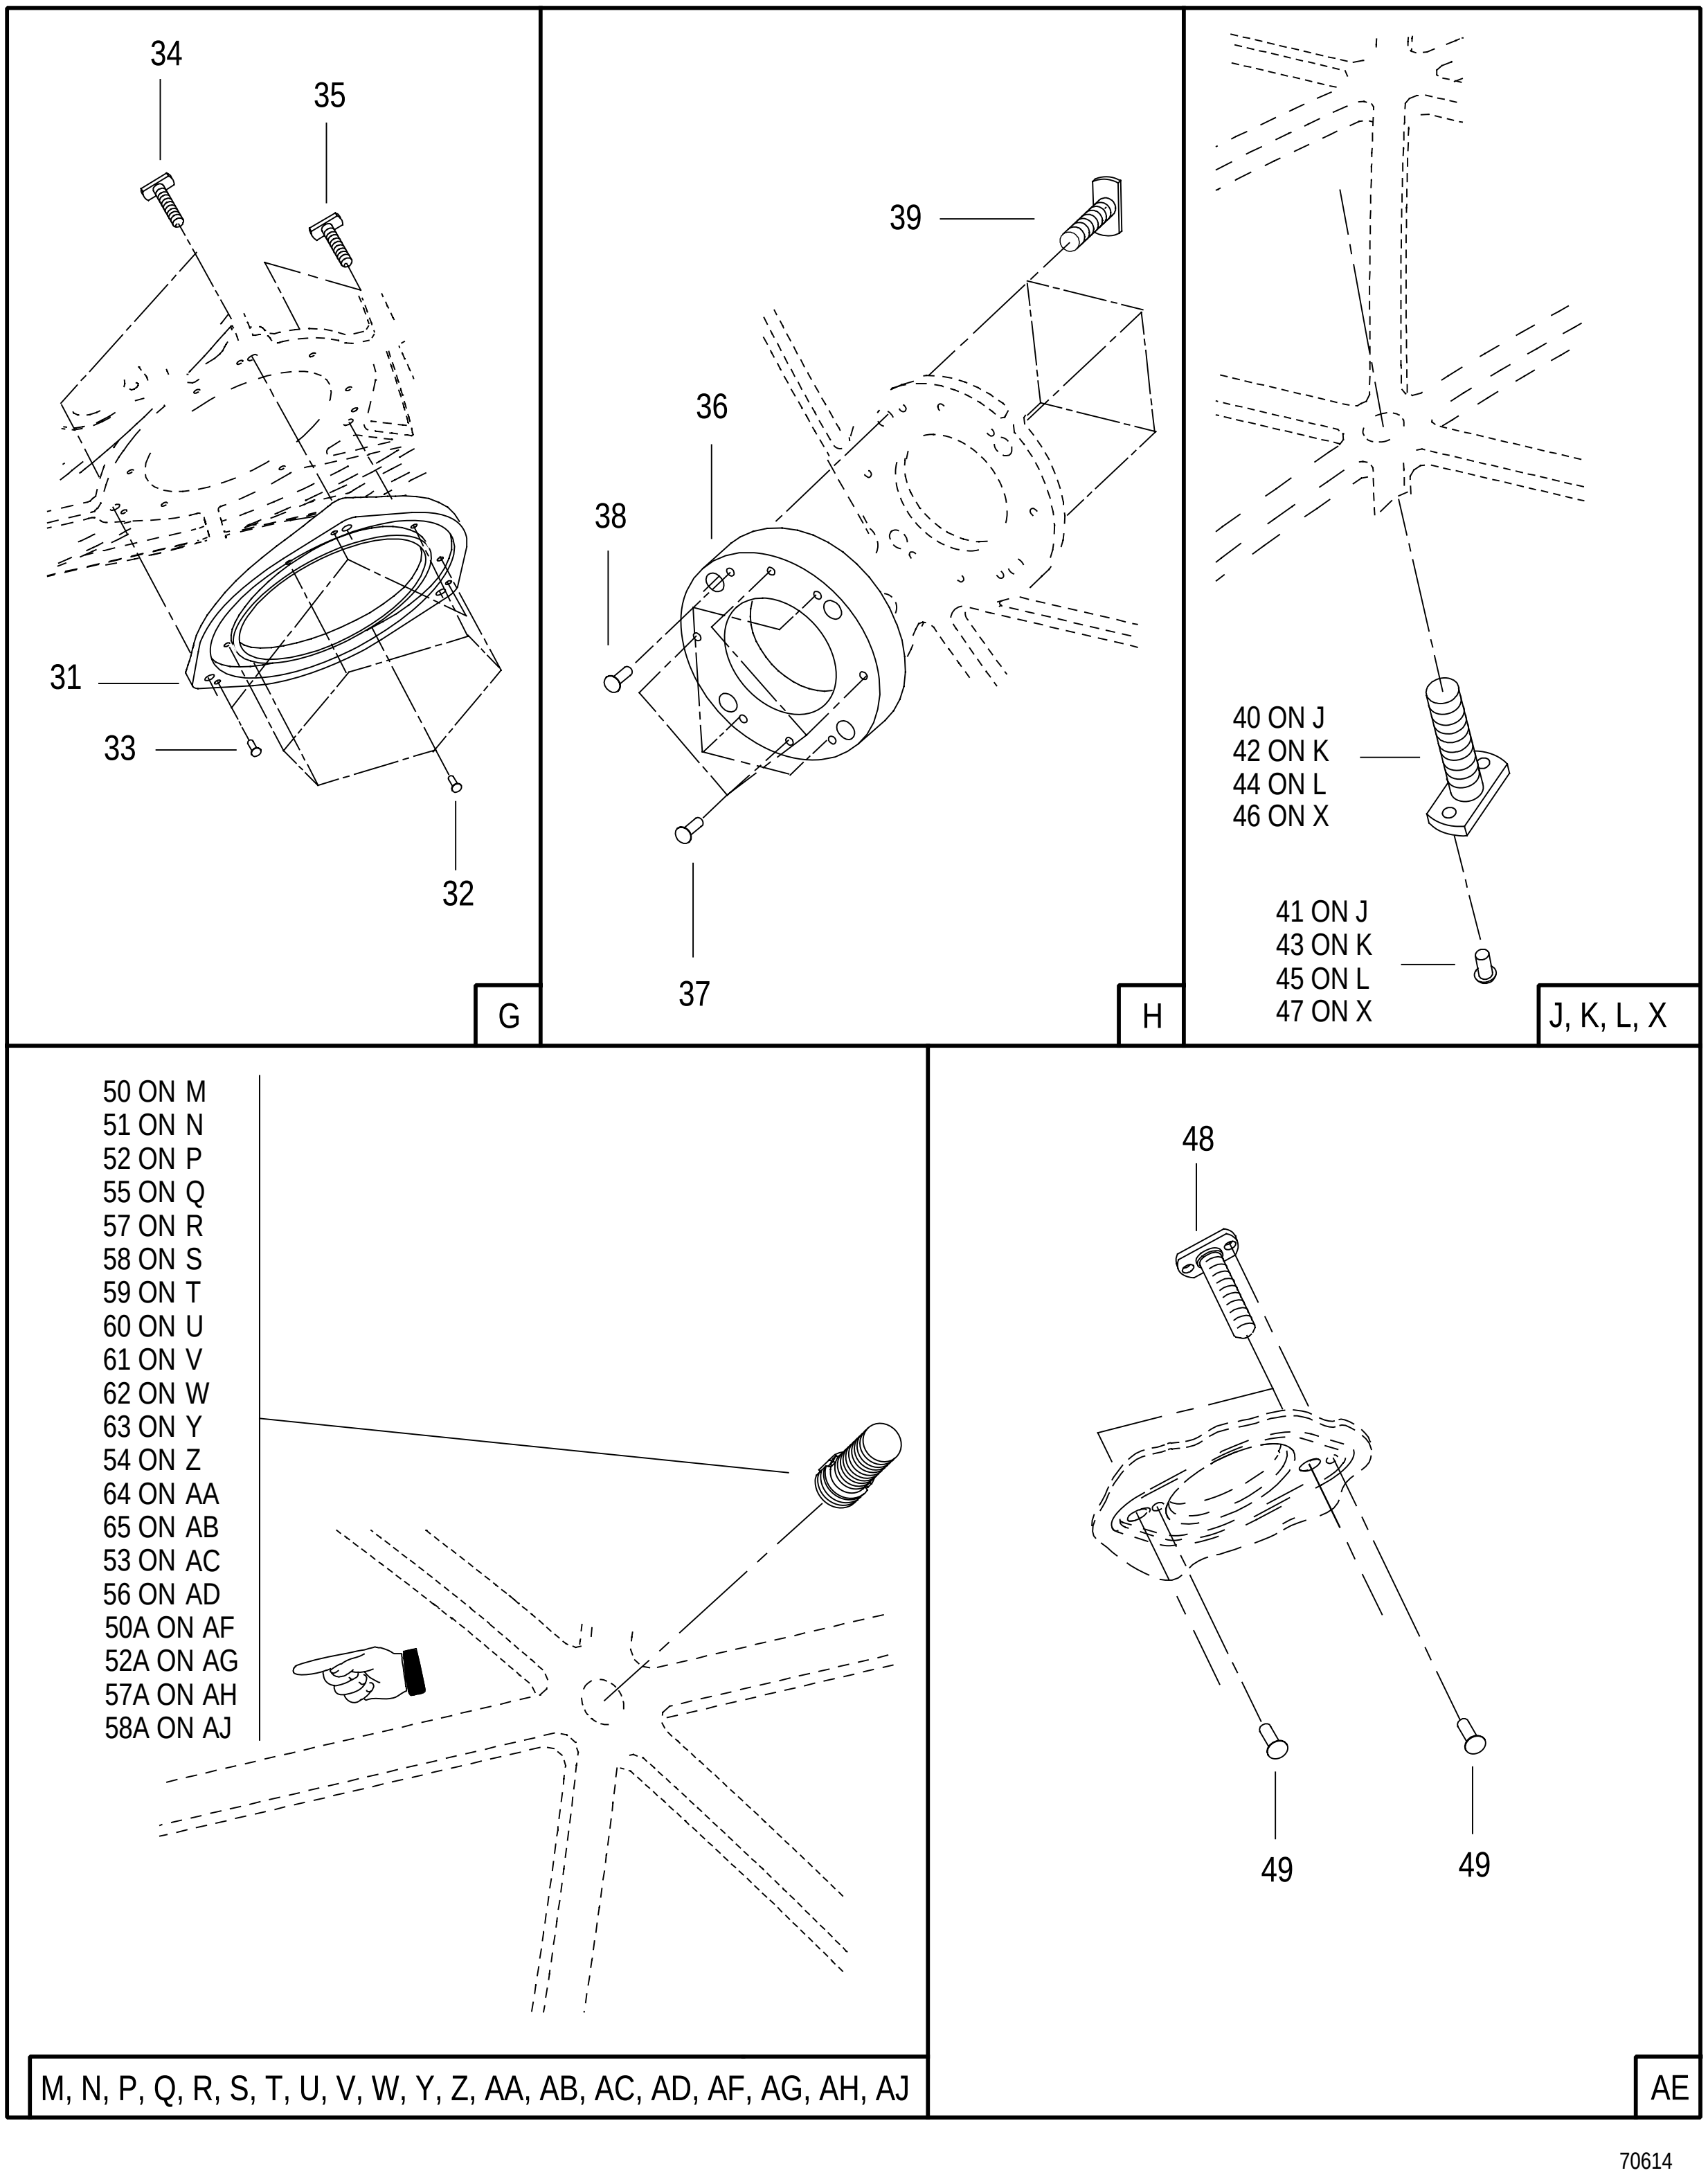


FIGURE 75. FRONT FAN DUCT ASSY
(SHEET 6 OF 6)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	75	4075426	52661	DUCT-FAN, FRONT, ASSY OF SEE FIG. 1-15 FOR NHA	REF	KU	PAFDD
		4079771	52661	DUCT-FAN, FRONT, ASSY OF SEE FIG. 1-15 FOR NHA	REF	KV/NN	PAFDD
		4081642	52661	DUCT-FAN, FRONT, ASSY OF SEE FIG. 1-15 FOR NHA	REF	NP	PAFDD
	- 1	4072789	52661	. BOSS-FAN DUCT	1		PAFZZ
	- 2	MS9318-108	96906	. RIVET (AP)	3		PAFZZ
	- 3	MS9318-066	96906	. RIVET (AP)	3		PAFZZ
	- 4	ST2138-02	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 1.030 IN. LONG REPLACES ST2138-01	3		PAFBZ
	- 5	4072788	52661	. BOSS-FAN DUCT	2		PAFZZ
	- 6	MS9318-106	96906	. RIVET (AP)	4		PAFZZ
	- 7	MS9318-060	96906	. RIVET (AP)	3		PAFZZ
	- 8	ST2138-01	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 0.925 IN. LONG	6		PAFBZ
	- 9	4071730	52661	. LINER-FAN DUCT	2		PAOZZ
	- 10	4069452	52661	. BOSS-FAN DUCT	2		PAFZZ
	- 11	HL97DU-5	56878 73197 92215	. COLLAR-PIN-RIVET, THREADED 0.164-32UNJC-3B X 0.437 IN. THK (AP) P&WA PART NO. ST2185-05	8		PAFZZ
R	- 12	HL12V-5-6	0ZZV1 56878 73197 92215	. PIN-RIVET-THREADED, FLAT 0.164-32UNJC-3A MOD X 0.688 IN. LONG (AP) P&WA PART NO. ST2141-06	8		PAFZZ
	- 13	4071729	52661	. LINER-FAN DUCT	1		PAOZZ
	- 14	4072793	52661	. BOSS-FAN DUCT	1		PAFZZ
	- 15	HL97DU-5	56878 73197 92215	. COLLAR-PIN-RIVET, THREADED 0.164-32UNJC-3B X 0.437 IN. THK (AP) P&WA PART NO. ST2185-05	8		PAFZZ
R	- 16	HL12V-5-6	0ZZV1 56878 73197 92215	. PIN-RIVET-THREADED, FLAT 0.164-32UNJC-3A MOD X 0.688 IN. LONG (AP) P&WA PART NO. ST2141-06	8		PAFZZ
	- 17	4072791	52661	. BOSS-FAN DUCT	1		PAFZZ
	- 18	MS9318-108	96906	. RIVET (AP)	2		PAFZZ
	- 19	MS9318-114	96906	. RIVET (AP)	2		XA
	- 20	MS9318-068	96906	. RIVET (AP)	4		PAFZZ
	- 21	ST2138-02	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 1.030 IN. LONG REPLACES ST2138-03	4		PAFBZ
	- 22	4072794	52661	. BOSS-FAN DUCT	1		PAFZZ
	- 23	MS9318-108	96906	. RIVET (AP)	4		PAFZZ
	- 24	MS9318-110	96906	. RIVET (AP)	2		PAFZZ
	- 25	MS9318-068	96906	. RIVET (AP)	4		PAFZZ
	- 26	ST2138-02	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 1.030 IN. LONG	4		PAFBZ
	- 27	4072790	52661	. BOSS-FAN DUCT	1		PAFZZ
	- 28	MS9318-108	96906	. RIVET (AP)	3		PAFZZ
	- 29	MS9318-066	96906	. RIVET (AP)	3		PAFZZ
	- 30	ST2138-02	52661	. BOLT-ANCHOR 0.250-28UNJF-3A X 1.030 IN. LONG REPLACES ST2138-03	3		PAFBZ
	- 31	4072792	52661	. BOSS-FAN DUCT	1		PAFZZ
	- 32	MS9319-154	96906	. RIVET (AP)	6		PAFZZ
	- 33	MS9318-072	96906	. RIVET (AP)	3		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
75 - 34	ST2138-03	52661	. BOLT-ANCHOR . . . . 0.250-28UNJF-3A X 1.200 IN. LONG	2		PAFBZ
- 35	ST2138-04	52661	. BOLT-ANCHOR . . . . 0.250-28UNJF-3A X 1.325 IN. LONG REPLACES ST2138-03	1		PAFBZ
- 36	4069441	52661	. BOSS-FAN DUCT	2		PAFZZ
- 37	MS9318-118	96906	. RIVET (AP).	4		PAFZZ
- 38	MS9318-076	96906	. RIVET (AP).	4		PAFZZ
- 39	ST2138-03	52661	. BOLT-ANCHOR . . . . 0.250-28UNJF-3A X 1.200 IN. LONG	8		PAFBZ
- 40	ST2137-02	52661	. BOLT-ANCHOR . . . . 0.190-32UNJF-3A X 0.600 IN. LONG REPLACES ST2137-04	2		PAFBZ
- 41	MS9318-056	96906	. RIVET (AP).	1		PAFZZ
- 42	ST2138-01	52661	. BOLT-ANCHOR . . . . 0.250-28UNJF-3A X 0.925 IN. LONG	8		PAFBZ
- 43	MS9318-056	96906	. RIVET (AP).	1		PAFZZ
- 44	ST2138-06	52661	. BOLT-ANCHOR . . . . 0.250-28UNJF-3A X 0.688 IN. LONG	15		PAFBZ
- 45	MS9318-056	96906	. RIVET (AP).	1		PAFZZ
- 46	ST2137-03	52661	. BOLT-ANCHOR . . . . 0.190-32UNJF-3A X 0.730 IN. LONG REPLACES ST2137-02	2		PAFBZ
- 47	MS9318-056	96906	. RIVET (AP).	1		PAFZZ
- 48	ST2138-06	52661	. BOLT-ANCHOR . . . . 0.250-28UNJF-3A X 0.688 IN. LONG REPLACES ST2138-01	4		PAFBZ
- 49	MS9318-056	96906	. RIVET (AP).	1		PAFZZ
- 50	TR28009-10	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10 REPLACES ST2665-08 USE ONLY ON 4075426 AND 4079771	1		PAFZZ
- 50A	TR28009-8	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.500 IN. LONG P&WA PART NO. ST2665-08 USE ONLY ON 4081642	2		PAFZZ
- 51	TR28009-8	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.500 IN. LONG P&WA PART NO. ST2665-08 USE ONLY ON 4075426 AND 4079771	18		PAFZZ
- 52	TR28009-10	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10 REPLACES ST2665-12 USE ONLY ON 4075426 AND 4079771	3		PAFZZ
- 52A	TR28009-10	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10 USE ONLY ON 4081642	4		PAFZZ
- 53	TR28009-10	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10 REPLACES ST2665-12 USE ONLY ON 4075426	1		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
75 - 54	TR28009-10	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10 REPLACES ST2665-12 USE ONLY ON 4075426 AND 4079771	1		PAFZZ
- 55	TR28009-12	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.000 IN. LONG P&WA PART NO. ST2665-12 USE ONLY ON 4075426 AND 4081642	1		PAFZZ
- 56	TR28009-12	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.000 IN. LONG P&WA PART NO. ST2665-12 USE ONLY ON 4075426	1		PAFZZ
- 57	TR28009-18	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.375 IN. LONG P&WA PART NO. ST2665-18 USE ONLY ON 4075426 AND 4079771	9		PAFZZ
- 57A	TR28009-18	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.375 IN. LONG P&WA PART NO. ST2665-18 USE ONLY ON 4081642	10		PAFZZ
- 58	TR28009-20	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.500 IN. LONG P&WA PART NO. ST2665-20 USE ONLY ON 4075426 AND 4079771	3		PAFZZ
- 58A	TR28009-20	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.500 IN. LONG P&WA PART NO. ST2665-20 USE ONLY ON 4081642	2		PAFZZ
- 59	TR28009-18	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.375 IN. LONG P&WA PART NO. ST2665-18 USE ONLY ON 4075426 AND 4079771	1		PAFZZ
- 60	TR28009-24	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.750 IN. LONG P&WA PART NO. ST2665-24	2		PAFZZ
- 61	TR28009-26	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.875 IN. LONG P&WA PART NO. ST2665-26	2		PAFZZ
- 62	TR28009-24	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.750 IN. LONG P&WA PART NO. ST2665-24 REPLACES ST2665-26	2		PAFZZ
- 63	TR28009-16	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.000 IN. LONG P&WA PART NO. ST2665-16	1		PAFZZ
- 64	TR28009-18	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.375 IN. LONG P&WA PART NO. ST2665-18 REPLACES ST2665-20 USE ONLY ON 4075426 AND 4079771	1		PAFZZ
- 65	TR28009-10	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.875 IN. LONG P&WA PART NO. ST2665-10 REPLACES ST2665-08 USE ONLY ON 4075426 AND 4079771	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	75 - 66	4030789	52661	. PIN-SHOULDER, HEADLESS .... 0.12475 AND 0.186 X 0.325 IN. LONG	1		PAFZZ
	- 67	4075427-01	52661	. DUCT-FAN, OUTER FRONT, SUBASSY OF .... USE ONLY ON 4075426	1		XA
		4079772-01	52661	. DUCT-FAN, OUTER FRONT, SUBASSY OF .... USE ONLY ON 4079771	1		XA
		4081643-01	52661	. DUCT-FAN, OUTER FRONT, SUBASSY OF .... USE ONLY ON 4081642	1		XA
		4068700	52661	ENGINE ASSY-TURBO FAN	REF	A	ADD
		4068800	52661	ENGINE ASSY-TURBO FAN	REF	B	ADD
	- 68	4023116	52661	. NUT OPTION .... SEE OPTION TABLE	70		PAOZZ
	- 69	ST2018-022	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.688 IN. LONG	61		PAOZZ
	- 70	ST2018-022	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.688 IN. LONG	2	RG	PAOZZ
		ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.750 IN. LONG	2	RH	PAOZZ
	- 71	4081433	52661	. BRACKET-LOOP CLAMP	1	RH	PAOZZ
R	- 72	ST2018-022	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.688 IN. LONG	3		PAOZZ
R	- 73	DELETED					
	- 74	ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.750 IN. LONG	2		PAOZZ
	- 75	4080994	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
	- 76	ST2018-022	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.688 IN. LONG	2	WZ	PAOZZ
		ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.750 IN. LONG	2	XA	PAOZZ
	- 77	4081576	52661	. BRACKET-LOOP CLAMP	1	XA	PAOZZ
	- 78	ST2018-024	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.750 IN. LONG	2		PAOZZ
	- 79	4078547	52661	. BRACKET-LOOP CLAMP	1		PAOZZ
	- 80	4070989	52661	. BRACKET ASSY-GEARBOX SUPPORT	1		PAFZZ
	- 81	ST2178-08	52661	. SCREW-MACHINE, COUNTERSUNK .... 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	3		PAFZZ

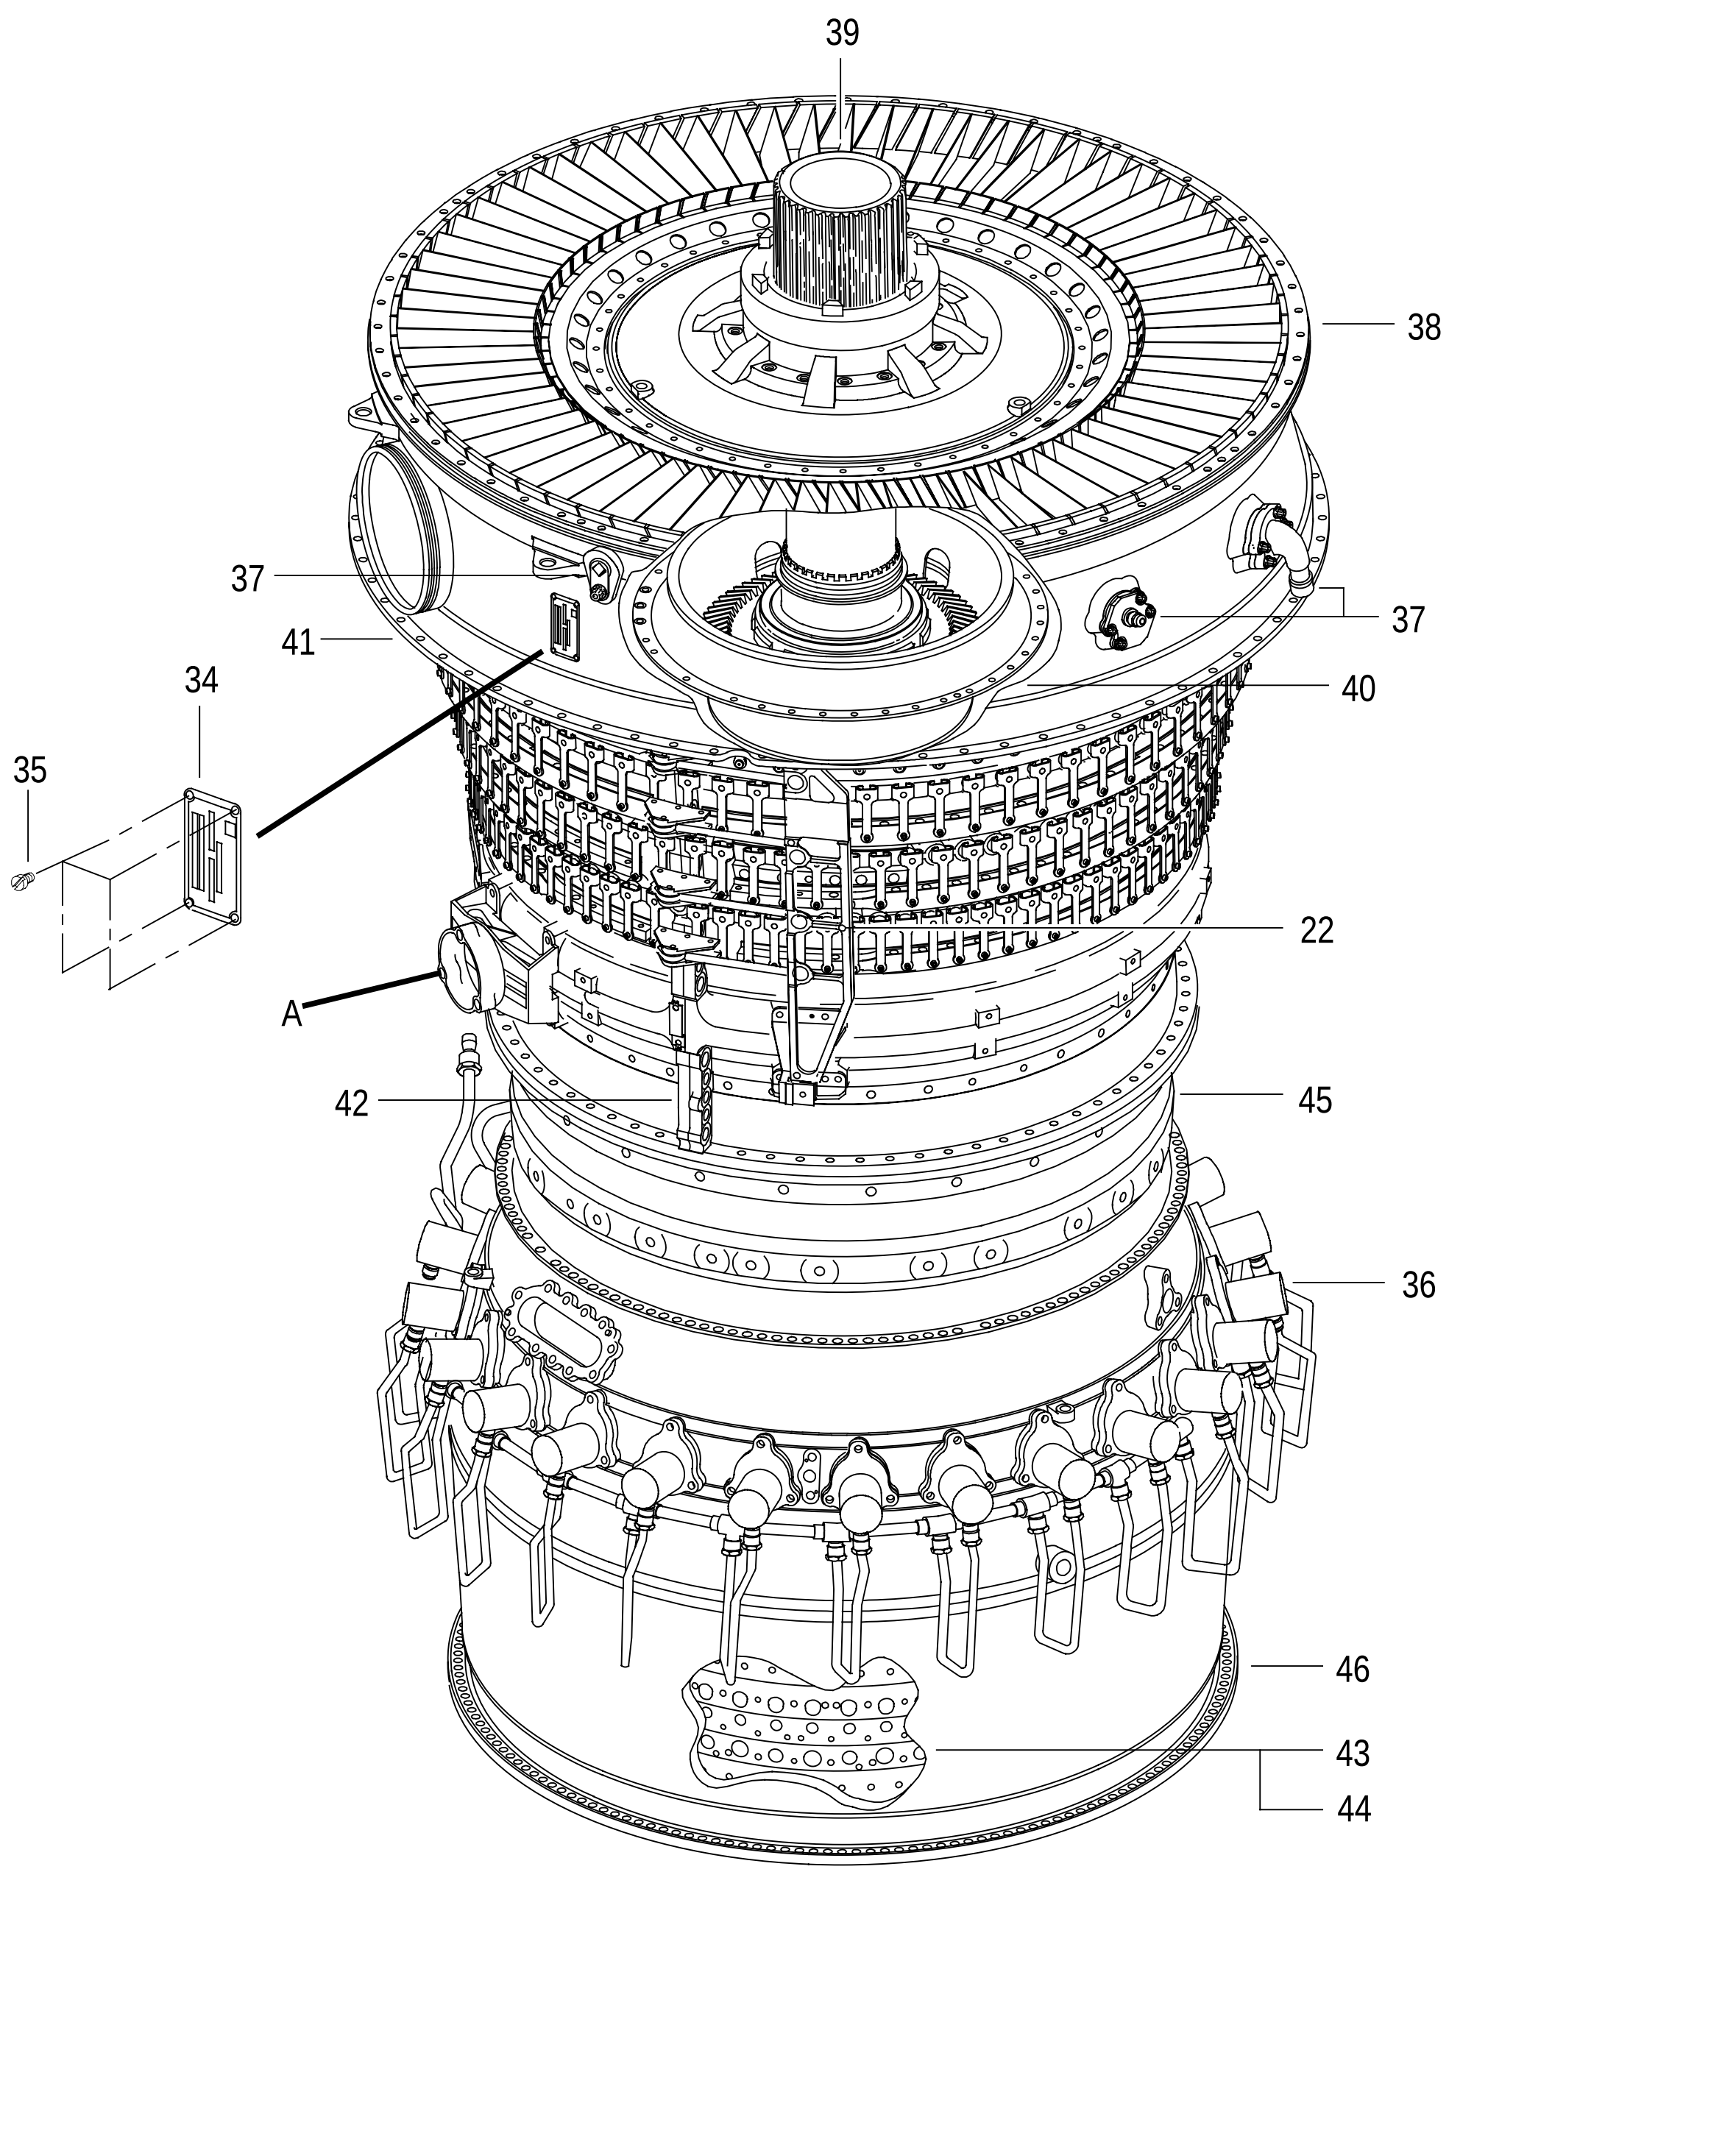


FIGURE 76. ENGINE CORE MODULE
(SHEET 1 OF 2)

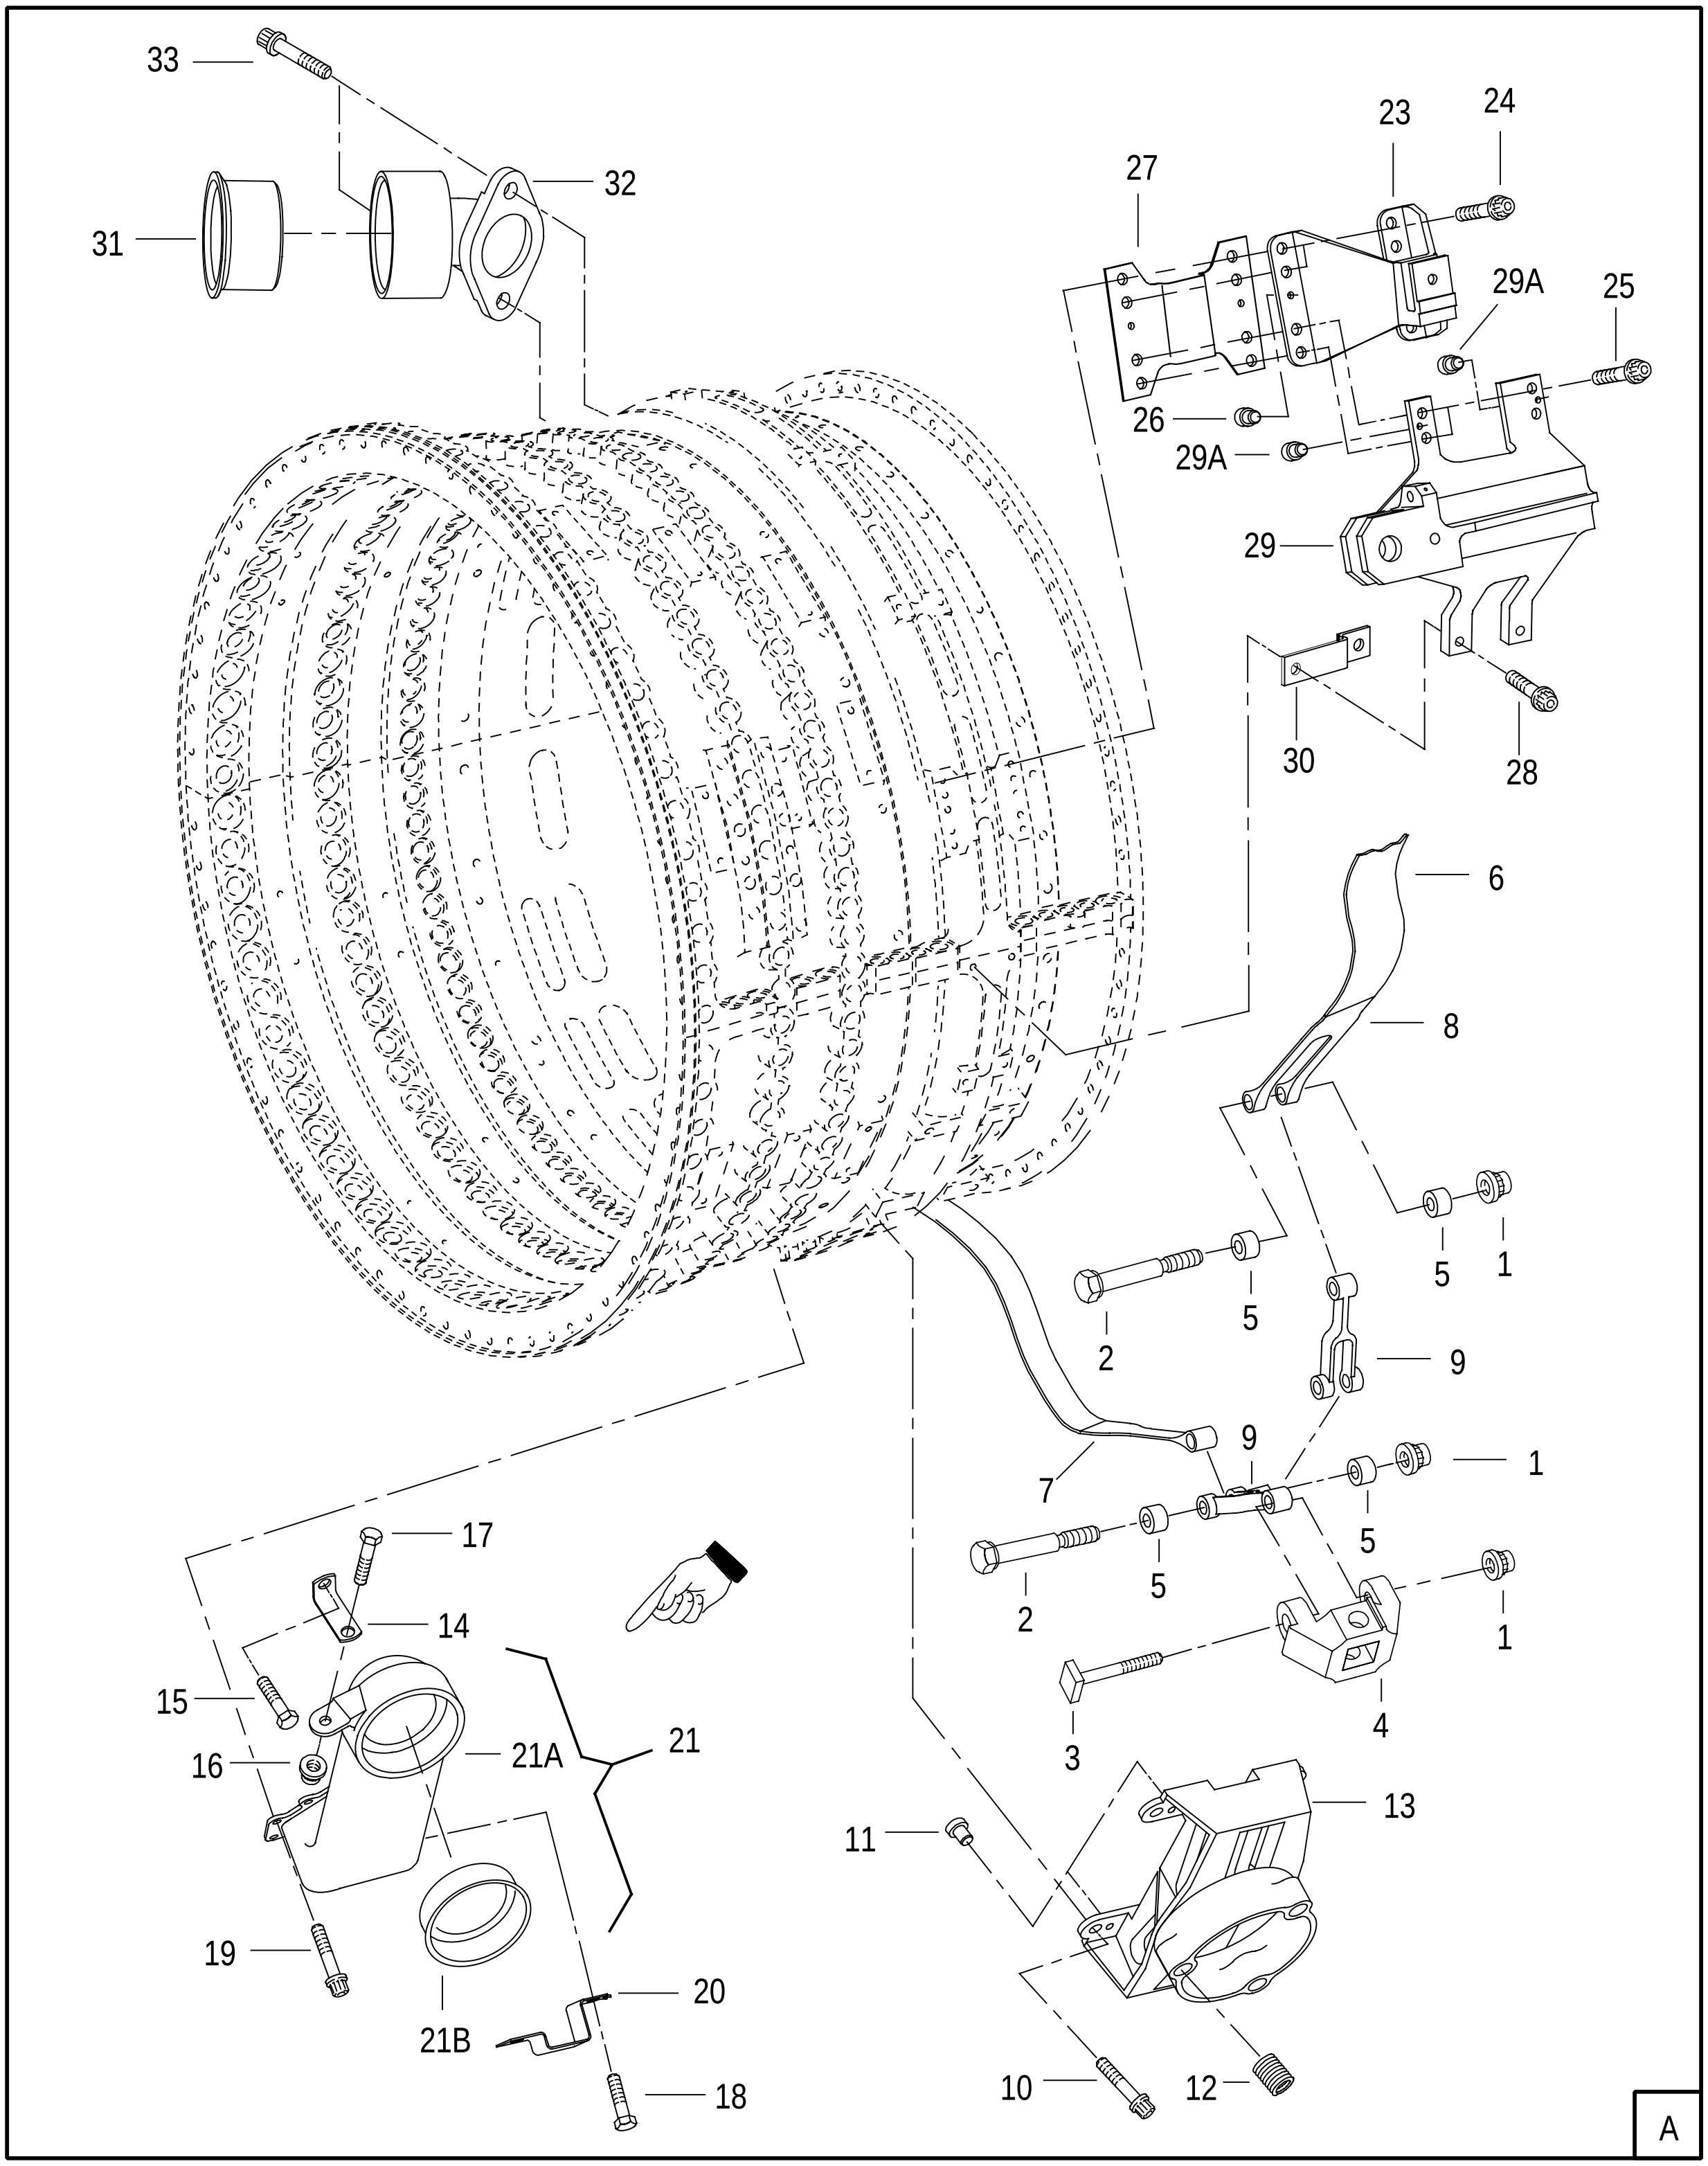



FIGURE 76. ENGINE CORE MODULE
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
76	= 4068722-801	52661	ENGINE CORE MODULE (VARIABLE 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA	1	AN/BL	PAFDD
	= 4082657-801	52661	ENGINE CORE MODULE (VARIABLE 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA REOP AND REID OF 4068722-801 DO NOT PROCURE FROM P&WA	1	AN/BL	PAFDD
	= 4068722-806	52661	ENGINE CORE MODULE (VARIABLE 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA	1	AN/BM	PAFDD
	= 4082657-806	52661	ENGINE CORE MODULE (VARIABLE 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA REOP AND REID OF 4068722-806 DO NOT PROCURE FROM P&WA	1	AN/BM	PAFDD
	= 4068722-803	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA REOP AND REID OF 4068722-800 OR -801 DO NOT PROCURE FROM P&WA	1	AP/DA/ AAK	PAFDD
	= 4082657-803	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA REOP AND REID OF 4068722-803 DO NOT PROCURE FROM P&WA	1	AP/DA	PAFDD
	= 4068722-807	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA	1	AP/DB/XH/ XK/AAH	PAFDD
	= 4082657-807	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA REOP AND REID OF 4068722-807 DO NOT PROCURE FROM P&WA	1	AP/DB/ AAM	PAFDD
	= 4068722-810	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA	1	AP/DB/XJ/ XK/XR	PAFDD
	= 4082654-800	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA REOP AND REID OF 4068722-807 OR 810 DO NOT PROCURE FROM P&WA	1	AP/DB/SE/ XL/XT	PAFDD
	= 4082654-801	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA REOP AND REID OF 4082654-800 DO NOT PROCURE FROM P&WA	1	AP/DB/SF/ XL	PAFDD
	= 4068722-811	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) REOP AND REID OF 4068722-810 SEE FIG. 1-16 FOR NHA	1	XS/AAD	PAFDD
	= 4082654-802	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) REOP AND REID OF 4082654-800 SEE FIG. 1-16 FOR NHA DO NOT PROCURE FROM P&WA	1	XU/AAF	PAFDD
R R R	4068722-812	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA	1	AAD	PAFDD
	4084522-802	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA	1	AAL	PAFDD
	4084522-801	52661	ENGINE CORE MODULE (FIXED 6TH STAGE . . . . VANES) SEE FIG. 1-16 FOR NHA	1	AAJ	PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
76	4082657-808	52661	ENGINE CORE MODULE (FIXED 6TH STAGE VANES) SEE FIG. 1-16 FOR NHA	1	AAN	PAFDD
	4084522-800	52661	ENGINE CORE MODULE (FIXED 6TH STAGE VANES) SEE FIG. 1-16 FOR NHA	1	AAE	PAFDD
	4082654-803	52661	ENGINE CORE MODULE (FIXED 6TH STAGE VANES) SEE FIG. 1-16 FOR NHA	1	AAG	PAFDD
- 1	4021812	52661	. NUT OPTION SEE OPTION TABLE	3		PAOZZ
- 2	4059356	52661	. BOLT-SHOULDER, HEX, DRILLED 0.190-32UNJF-3A X 2.020 IN. LONG	2		PAFZZ
- 3	4069284	52661	. BOLT-SHOULDER, SQUARE 0.190-32UNJF-3A X 1.712 IN. LONG	1		PAFZZ
- 4	4069279	52661	. CONNECTING LINK-RIGID, BLEED VALVE STRAP	1		PAFZZ
- 5	4059355	52661	. ROLLER-PLAIN 0.25325 ID X 0.4998 OD X 0.350 IN. LONG	4		PAFZZ
- 6	4069280	52661	. STRAP-BLEED VALVE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 7	4069858	52661	.. LOOP-BLEED VALVE STRAP	1		XA
- 8	4069859	52661	.. LOOP-BLEED VALVE STRAP	1		XA
- 9	4077912	52661	. CONNECTING LINK-RIGID, BLEED VALVE STRAP	2		PAFZZ
	4076799	52661	. GUIDE ASSY-BLEED VALVE STRAP CARTRIDGE	1		PAFDD
- 10	4071766	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	4		PAFZZ
- 11	4066841	52661	.. PIN-SHOULDER, HEADLESS 0.18775 X 0.2465 X 0.280 IN. LONG	2		PAFZZ
- 12	MS124696	96906	.. INSERT REPLACES AS3080-04	3		PADZZ
- 13	4076798	52661	.. GUIDE-BLEED VALVE STRAP CARTRIDGE	1		PAFZZ
- 14	4074020	52661	. BRACKET-ANGLE	1		PAFZZ
- 15	ST2601-05	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.438 IN. LONG (AP)	1		PAFZZ
- 16	4042344	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAFZZ
- 17	ST1508-09	52661	. BOLT-MACHINE, HEX 0.250-28UNJF-3A X 0.688 IN. LONG (AP)	1		PAFZZ
- 18	ST2606-05	52661	. BOLT-MACHINE, HEX 0.190-32UNJF-3A X 0.438 IN. LONG	1		PAFZZ
- 19	ST2605-06	52661	. BOLT-MACHINE DRILLED DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG	10		PAFZZ
- 20	4075573	52661	. SEAT-BLEED VALVE STRAP, LOCKING	1		PAFZZ
- 21	4074494	52661	. TUBE ASSY-COMPRESSOR BLEED	1		PAFDD
- 21A	4074493	52661	.. TUBE-COMPRESSOR BLEED	1		XA
- 21B	4069349	52661	.. SLEEVE-SEALING, COMPRESSOR CASE ELBOW	1		PADZZ
- 22	NO NUMBER		. COMPRESSOR STATOR SYNCHRONIZING LINKAGE (VARIABLE 6TH STAGE VANES) SEE FIG. 77 FOR DETAIL PARTS	REF	AN	
	NO NUMBER		. COMPRESSOR STATOR SYNCHRONIZING LINKAGE (FIXED 6TH STAGE VANES) SEE FIG. 78 FOR DETAIL PARTS	REF	AP	
- 23	4066849	52661	. BRACKET-COMPRESSOR STATOR LINKAGE ARM, ASSY OF	2	AN	PAFFF
	4078415	52661	. BRACKET-COMPRESSOR STATOR LINKAGE ARM, ASSY OF	2	AP	PAFFF
- 24	ST2605-07	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX 0.190-32UNJF-3A X 0.562 IN. LONG (AP)	4		PAFZZ
- 25	ST2605-07	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX 0.190-32UNJF-3A X 0.562 IN. LONG (AP)	4	AN	PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
76 - 25	ST2605-09	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.688 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	4	AP	PAFZZ
- 26	2146277	52661	.. PIN-SHOULDER, HEADLESS . . . . 0.12605 AND 0.186 DIA X 0.275 IN. LONG USE ONLY ON 4066849	2		PAFZZ
	4060555	52661	.. PIN-SHOULDER, HEADLESS . . . . 0.12605 AND 0.186 DIA X 0.250 IN. LONG USE ONLY ON 4078415	2		PAFZZ
- 27	4066838	52661	. SEAT-BLEED VALVE STRAP	2		PAFZZ
- 28	ST2605-09	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.688 IN. LONG	4	AP	PAFZZ
- 29	4079745	52661	. BRACKET OPTION . . . . PROCUREMENT NO. CONSISTS OF	2	AP	PAFDD
	4078407	52661	.. BRACKET ASSY-REAR COMPRESSOR STATOR . . . LINKAGE ARM OPTIONAL TO 4078474	1		XA
	4078474	52661	.. BRACKET ASSY-REAR COMPRESSOR STATOR . . . LINKAGE ARM OPTIONAL TO 4078407 PARTIAL BREAKDOWN FOLLOWS	1		XA
- 29A	4078408	52661	... PIN-SHOULDER, HEADLESS . . . . 0.094 AND 0.125 DIA X 0.235 IN. LONG	2		PAFZZ
- 30	4069355	52661	. SEAT-BLEED VALVE STRAP	2	AP	PAFZZ
- 31	4069773	52661	. SLEEVE-SEALING, COMPRESSOR CASE ELBOW . .	1		PAFZZ
- 32	4070962	52661	. ELBOW-AIR SUPPLY MANIFOLD	1		PAFZZ
- 33	4070963	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	2	AN	PAFZZ
	4071766	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	2	AP	PAFZZ
- 34	4075514 *	52661	. PLATE-IDENTIFICATION, CORE ENGINE MODULE . .	1		PADZZ
- 35	593720	52661	. SCREW-MACHINE, DRILLED FILLISTER . . . . 0.138-32 X 0.250 (AP)	4		PAFZZ
- 36	NO NUMBER		. FUEL NOZZLES, MANIFOLDS, AND TUBING . . . . SEE FIG. 79 FOR DETAIL PARTS	REF		
- 37	NO NUMBER		. NO. 2 AND 3 BEARING PRESSURE TUBES, ... GEARBOX DRIVESHAFT COUPLING, AND COMPRESSOR INTERMEDIATE CASE BORESCOPE PLUG SEE FIG. 80 FOR DETAIL PARTS	REF		
- 38	NO NUMBER		. 3RD STAGE COMPRESSOR STATOR, SHROUD, ... AND NO. 2 BEARING SEAL AND SUPPORT ASSY SEE FIG. 81 FOR DETAIL PARTS	REF		
- 39	NO NUMBER		. NO. 2 BEARING AND COUPLING ASSY, NO. 2 . . . . . . BEARING HOUSING ASSY, GEARBOX DRIVE BEARING HOUSING AND GEARSHAFT, AND NO. 2 AND 3 BEARING SEAL ASSY SEE FIG. 82 FOR DETAIL PARTS	REF		
- 40	NO NUMBER		. NO. 3 BEARING, SUPPORT ASSY, AND GEARBOX . DRIVE BEVEL GEARSHAFT SEE FIG. 83 FOR DETAIL PARTS	REF		
- 41	NO NUMBER		. NO. 3 BEARING REAR SEAL ASSY, REAR . . . . COMPRESSOR STATOR VARIABLE INLET VANES, EXIT FAN STATOR, AND COMPRESSOR INTERMEDIATE CASE ASSY SEE FIG. 84 FOR DETAIL PARTS	REF		
- 42	NO NUMBER		. SPLIT CASE BOLTS, 4TH-9TH STAGE . . . . COMPRESSOR CASE AND STATOR ASSY, AND COMPRESSOR STATOR HEAT SHIELDS SEE FIG. 85 FOR DETAIL PARTS	REF		

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
76 - 43	NO NUMBER		. REAR COMPRESSOR DRIVE TURBINE ROTOR .... AND STATOR ASSY, 1ST STAGE TURBINE STATOR SUPPORT, VANES, INNER AIR SEALING RING, AND COMBUSTION CHAMBER SEE FIG. 86 FOR DETAIL PARTS	REF		
- 44	NO NUMBER		. NO. 4 BEARING, NO. 4 BEARING AIR SEALING .... RING, REAR SEAL ASSY AND HOUSING SEE FIG. 87 FOR DETAIL PARTS	REF		
- 45	NO NUMBER		. COMPRESSOR DISCHARGE MANIFOLDS, ... 10TH-12TH STAGE COMPRESSOR STATOR SEGMENTS AND CASE ASSY, AND COMPRESSOR ROTOR ASSY SEE FIG. 88 FOR DETAIL PARTS	REF		
- 46	NO NUMBER		. NO. 4 BEARING FRONT AIR SEALING RING, ... FRONT SEAL ASSY, COMPRESSOR EXIT STATOR, AND DIFFUSER CASE SEE FIG. 89 FOR DETAIL PARTS	REF		

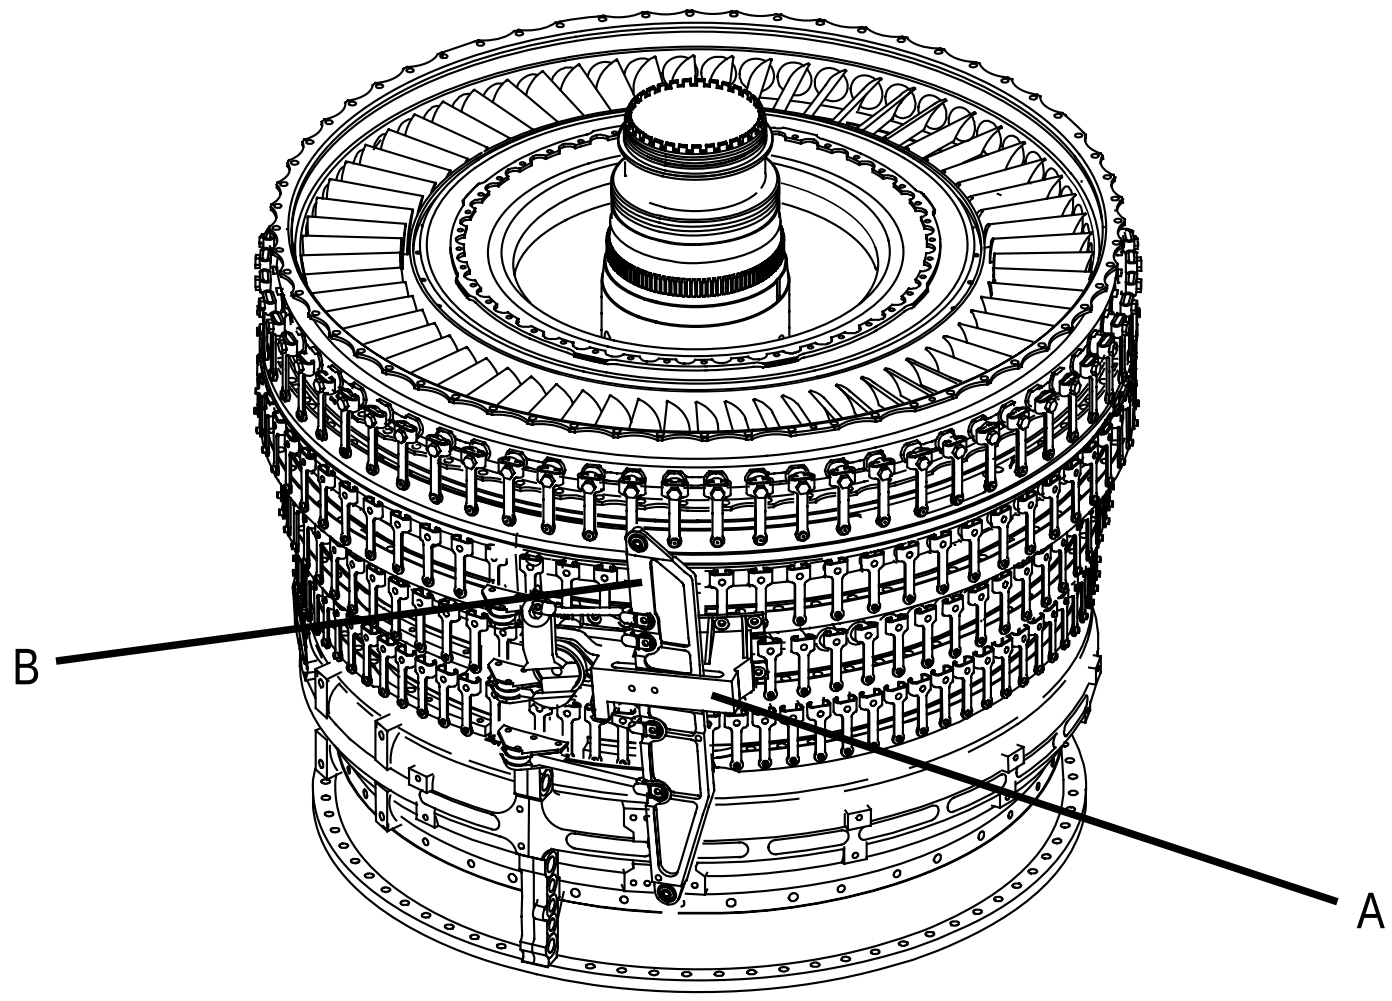


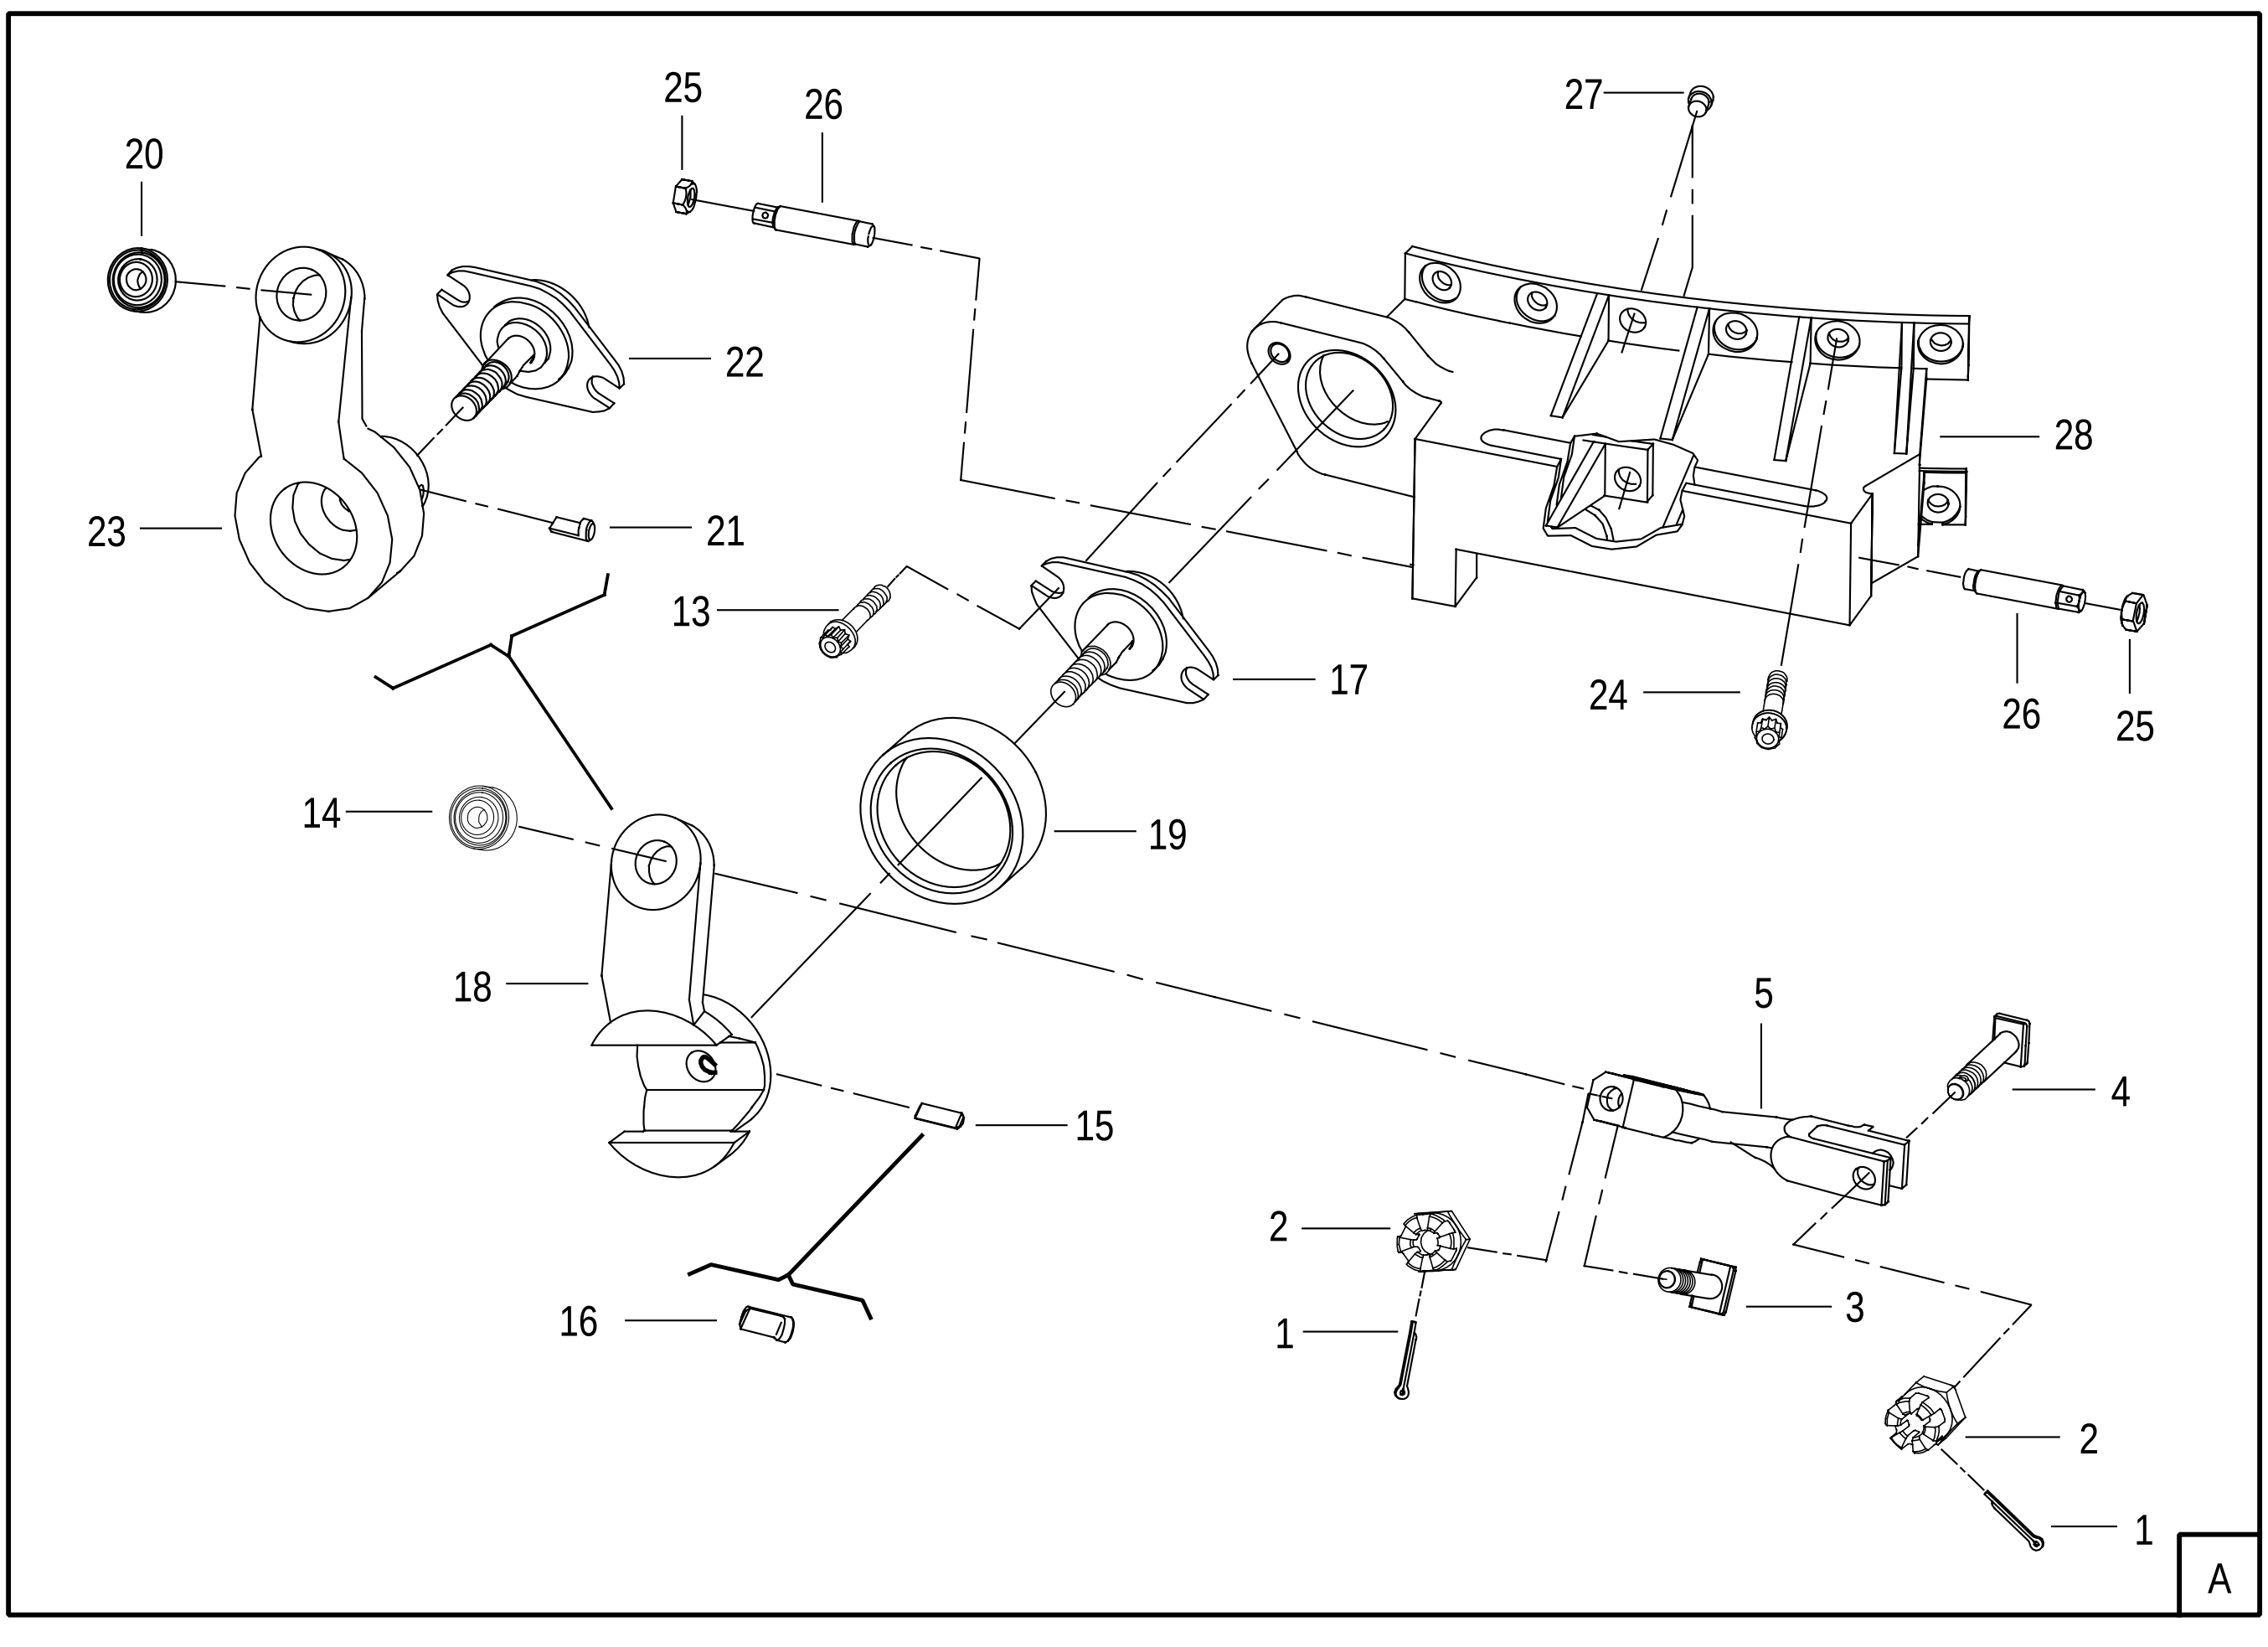


FIGURE 77. COMPRESSOR STATOR SYNCHRONIZING LINKAGE (VARIABLE 6TH STAGE VANES)
(SHEET 1 OF 2)

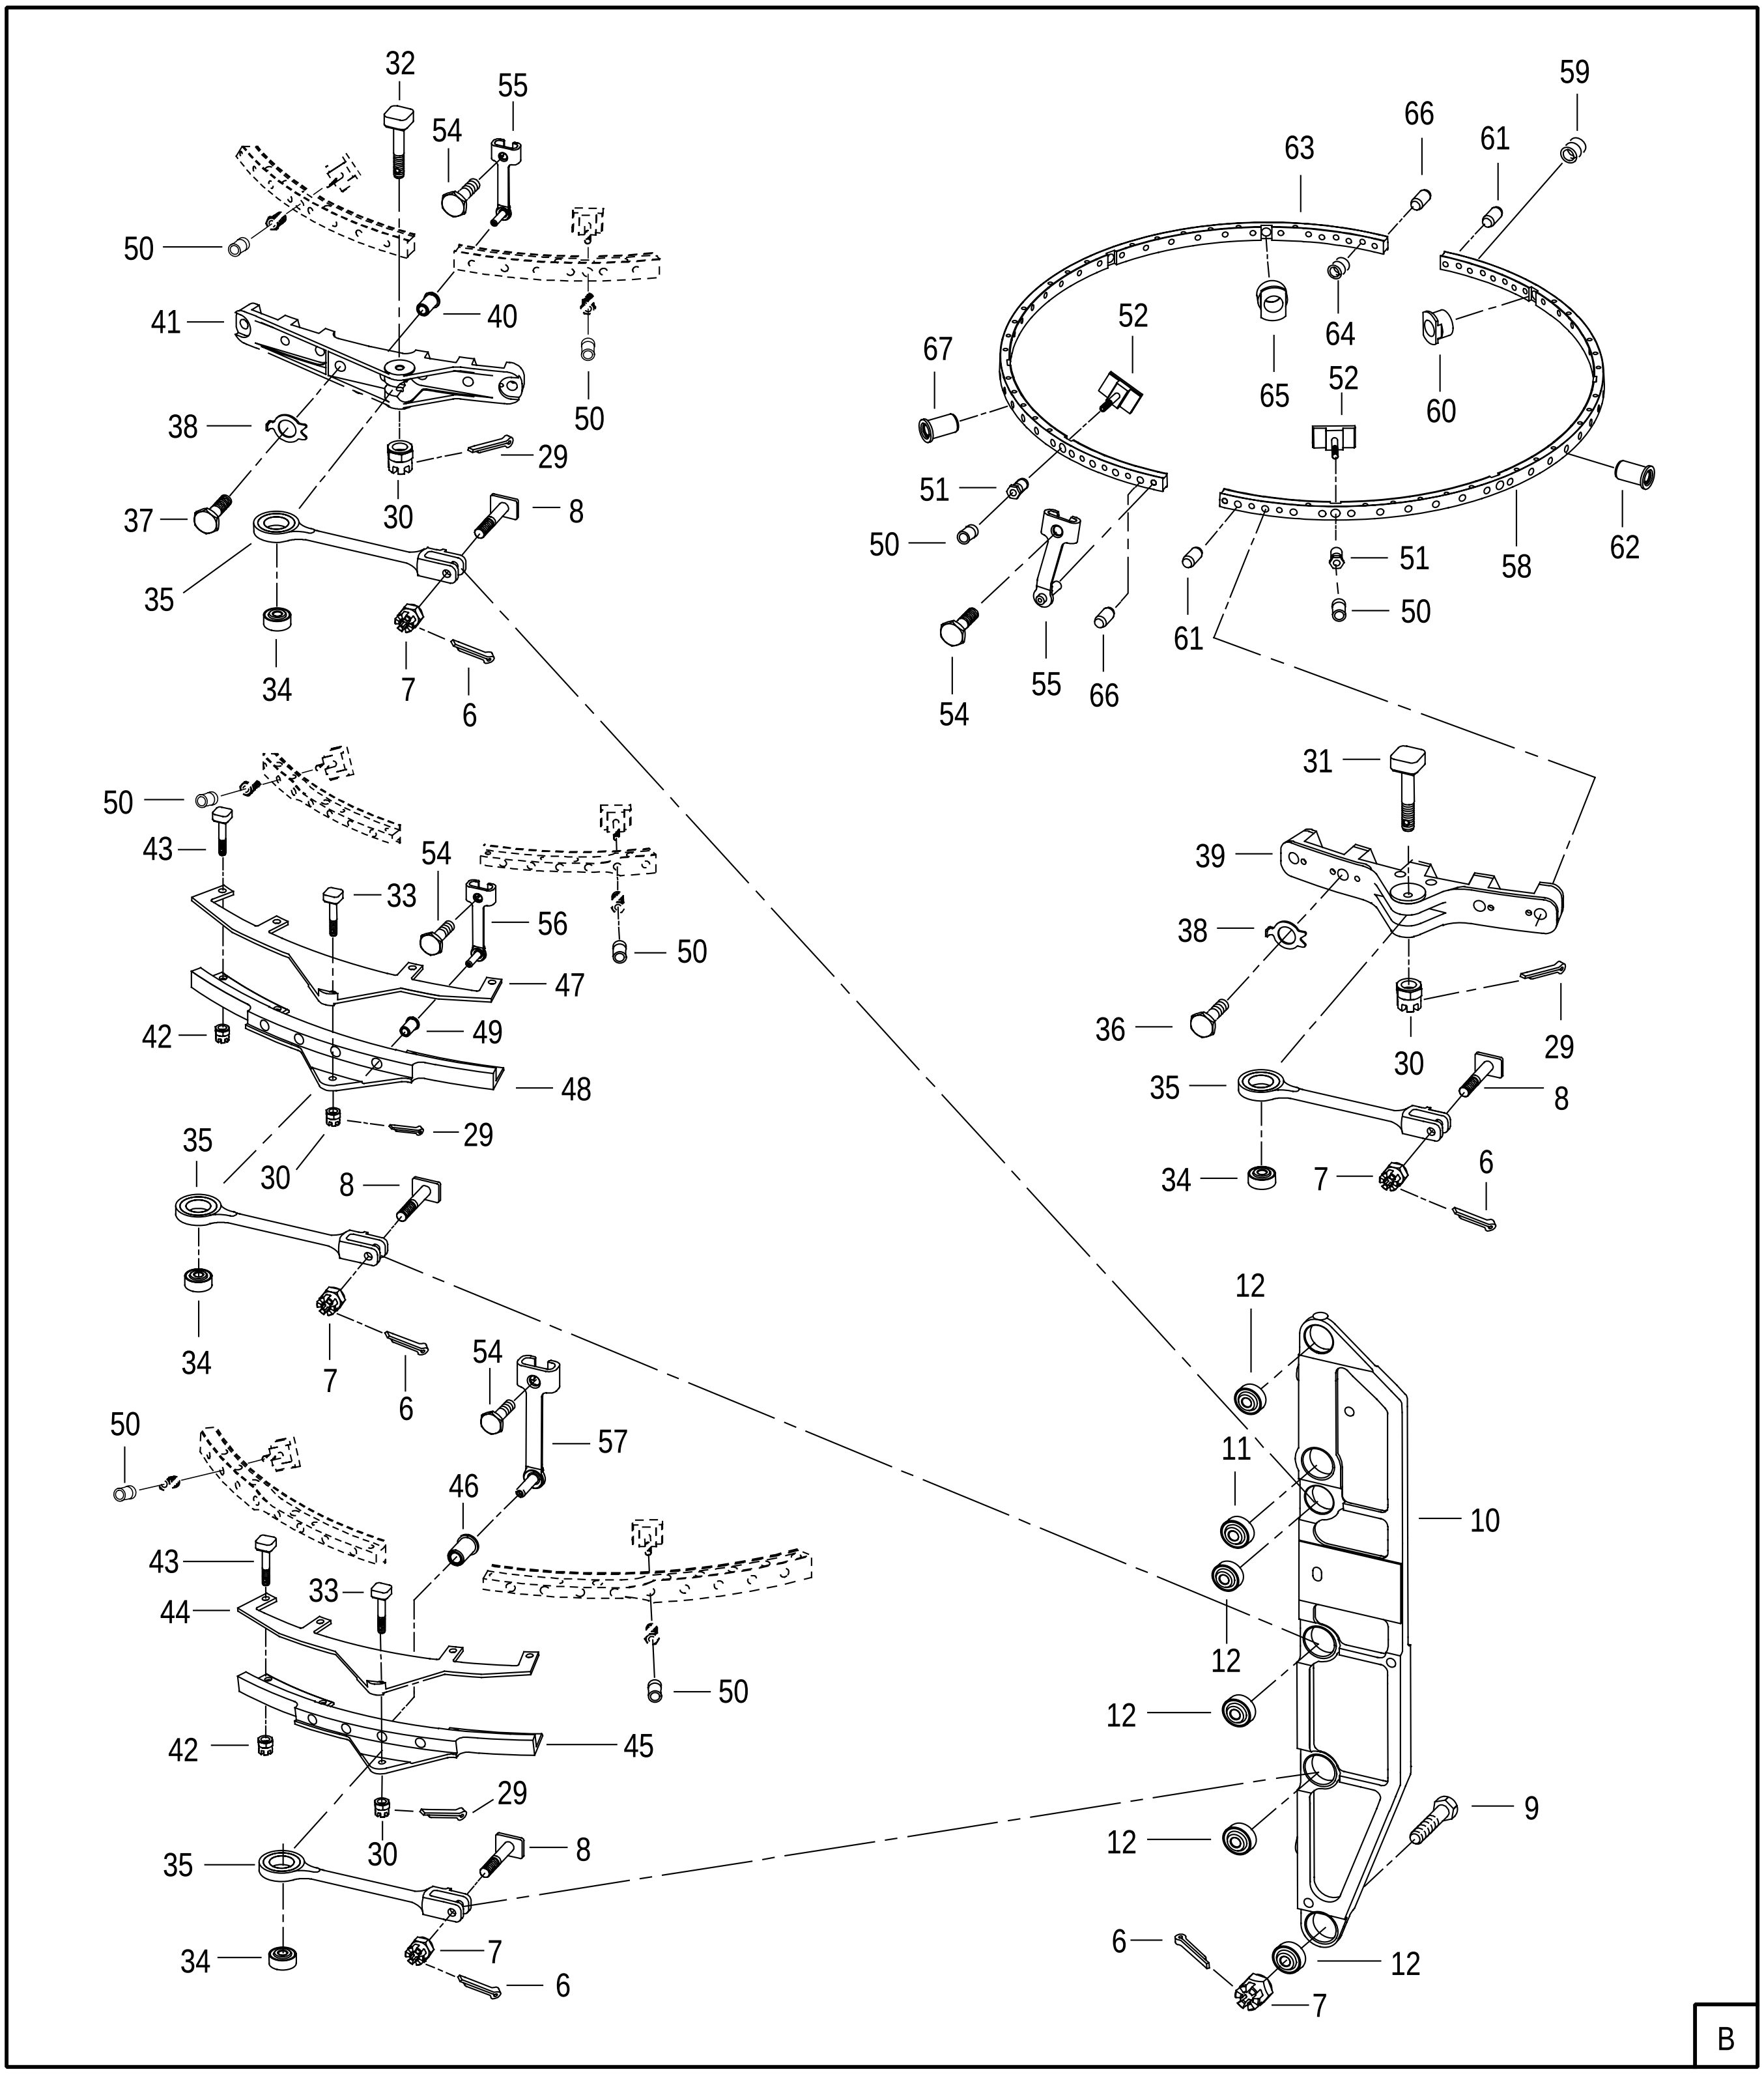

37331

FIGURE 77. COMPRESSOR STATOR SYNCHRONIZING LINKAGE (VARIABLE 6TH STAGE VANES)
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
77	NO NUMBER		COMPRESSOR STATOR SYNCHRONIZING . . . . LINKAGE (VARIABLE 6TH STAGE VANES) SEE FIG. 76-22 FOR NHA	REF	AN	
- 1	MS9245-27	96906	. PIN	4		PAFZZ
- 2	4062289	52661	. NUT OPTION . . . . SEE OPTION TABLE	4		PAOZZ
- 3	4071474	52661	. BOLT-MACHINE, SLAB, DRILLED . . . . 0.250-28UNJF-3A MOD X 1.320 IN. LONG	2		PAFZZ
- 4	4062286	52661	. BOLT-MACHINE, SLAB, DRILLED . . . . 0.250-28UNJF-3A X 1.060 IN. LONG	2		PAOZZ
- 5	4066827	52661	. CONNECTING LINK-RIGID, COMPRESSOR . . . . STATOR	2		PAFZZ
- 6	MS9245-24	96906	. PIN	10		PAOZZ
- 7	4062489	52661	. NUT OPTION . . . . SEE OPTION TABLE	10		PAOZZ
- 8	4062463	52661	. BOLT-MACHINE, SLAB, DRILLED . . . . 0.190-32UNJF-3A MOD X 1.000 IN. LONG	8		PAFZZ
- 9	4062514	52661	. BOLT-MACHINE, HEX, DRILLED . . . . 0.190-32UNJF-3A MOD X 1.100 IN. LONG	2		PAFZZ
- 10	4075473	52661	. ARM OPTION . . . . PROCUREMENT NO. CONSISTS OF	2		PAFDD
	4066857	52661	.. ARM-REAR COMPRESSOR STATOR . . . . SYNCHRONIZING, ASSY OF OPTIONAL TO 4066899	1		XA
	4066899	52661	.. ARM-REAR COMPRESSOR STATOR . . . . SYNCHRONIZING, ASSY OF OPTIONAL TO 4066857 PARTIAL BREAKDOWN FOLLOWS	1		XA
- 11	4062497	52661	... BEARING OPTION . . . . SEE OPTION TABLE	1		PAFZZ
- 12	4062498	52661	... BEARING OPTION . . . . SEE OPTION TABLE	5		PAFZZ
- 13	ST2155-016	52661	. BOLT-MACHINE, DRILLED, HEX . . . . 0.250-28UNJF-3A X 0.500 IN. LONG	4		PAFZZ
- 14	4062497	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	1		PAFZZ
- 15	4066824	52661	.. PIN HALF-COMPRESSOR STATOR LINKAGE . . . . . . USE ONLY ON 4066823 AND 4079692	1		PAFZZ
- 16	4079906	52661	.. PIN HALF-COMPRESSOR STATOR LINKAGE . . . . . . USE ONLY ON 4079911	1		PAFZZ
- 17	4066808	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	1		PAFZZ
- 18	4066817	52661	.. ARM-COMPRESSOR STATOR LINKAGE	1		PADZZ
- 19	4066809	52661	.. COLLAR-ARM, COMPRESSOR STATOR LINKAGE . .	1		PADZZ
	4079921	52661	. ARM-COMPRESSOR STATOR LINKAGE, ASSY OF . .	2		PAFDD
- 20	4062497	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	1		PAFZZ
- 21	4079906	52661	.. PIN HALF-COMPRESSOR STATOR LINKAGE	1		PAFZZ
- 22	4066808	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	1		PAFZZ
- 23	4079920	52661	.. ARM-COMPRESSOR STATOR LINKAGE	1		PADZZ
- 24	ST2604-08	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG	20		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
77 - 25	406436	52661	. NUT-PLAIN, HEX, DRILLED 0.250-UNJF-3B X 0.125 IN. THK REPLACES ST2163-10	4		PAFZZ
- 26	4075324	52661	. ADJUSTER-REAR COMPRESSOR STATOR LINKAGE	4		PAFZZ
	4074492	52661	. BRACKET ASSY-REAR COMPRESSOR STATOR LINKAGE ARM	2		PAFDD
- 27	4066841	52661	.. PIN-SHOULDER, HEADLESS 0.18775 X 0.2465 X 0.280 IN. LONG	2		PAFZZ
- 28	4074491	52661	.. BRACKET-REAR COMPRESSOR STATOR LINKAGE ARM	1		PAFZZ
- 29	MS9245-24	96906	. PIN	8		PAOZZ
- 30	4062489	52661	. NUT OPTION SEE OPTION TABLE	8		PAOZZ
- 31	4074030	52661	. BOLT-MACHINE, SQUARE, DRILLED 0.190-32UNJF-3A MOD X 1.250 IN. LONG	2		PAFZZ
- 32	4075657	52661	. BOLT-MACHINE, SQUARE, DRILLED 0.190-32UNJF-3A MOD X 1.500 IN. LONG	2		PAFZZ
- 33	4063750	52661	. BOLT-MACHINE, SLAB, DRILLED 0.190-32UNJF-3A MOD X 1.050 IN. LONG	4		PAFZZ
	4073157	52661	. CONNECTING LINK-RIGID, COMPRESSOR STATOR, ASSY OF	8		PAFBZ
- 34	4062498	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
- 35	4073161	52661	.. CONNECTING LINK-RIGID, COMPRESSOR STATOR, INLET	1		XA
- 36	ST1508-12	52661	. BOLT-MACHINE, HEX 0.250-28UNJF-3A X 0.875 IN. LONG	8		PAFZZ
- 37	ST1508-12	52661	. BOLT-MACHINE, HEX 0.250-28UNJF-3A X 0.875 IN. LONG	8		PAFZZ
- 38	MS9276-10	96906	. WASHER	16		PAFZZ
- 39	4075695	52661	. BRACKET-COMPRESSOR STATOR SYNCHRONIZING RING, INLET	2		PAFFF
	4080007	52661	. BRACKET ASSY-COMPRESSOR STATOR SYNCHRONIZING RING, 4TH STAGE	2		PAFBZ
- 40	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	2		PAFZZ
- 41	4075694	52661	.. BRACKET-COMPRESSOR STATOR SYNCHRONIZING RING, 4TH STAGE USE ONLY ON 4074438	1		PAFBZ
	4080006	52661	.. BRACKET-COMPRESSOR STATOR SYNCHRONIZING RING, 4TH STAGE USE ONLY ON 4080007	1		PAFBZ
- 42	4023115	52661	. NUT OPTION SEE OPTION TABLE	16		PAOZZ
- 43	4063729	52661	. BOLT-MACHINE, SLAB 0.190-32UNJF-3A X 0.937 IN. LONG	16		PAFZZ
- 44	4075761	52661	. BRACKET-COMPRESSOR STATOR SYNCHRONIZING RING, 6TH STAGE	2		PAFZZ
- 45	4075684	52661	. BRACKET ASSY-COMPRESSOR STATOR SYNCHRONIZING RING, 6TH STAGE PARTIAL BREAKDOWN FOLLOWS	2		PAFFF
- 46	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	4		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
77 - 47	4066885	52661	. BRACKET-COMPRESSOR STATOR .... SYNCHRONIZING RING, 5TH STAGE	2		PAFZZ
- 48	4066871	52661	. BRACKET-COMPRESSOR STATOR .... SYNCHRONIZING RING, 5TH STAGE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	2		PAFFF
- 49	4075460	52661	.. BEARING OPTION .... SEE OPTION TABLE	4		PAFZZ
- 50	HL97DU-6	56878 73197 92215	. COLLAR-PIN-RIVET, THREADED .... 0.164-32UNJC-3B X 0.447 IN. LONG P&W PART NO. ST2185-06	32		PAFZZ
- 51	4075672	52661	. BUSHING OPTION................................ SEE OPTION TABLE	8		PAFZZ
- 52	4075680	52661	. BUMPER OPTION .... SEE OPTION TABLE	8		PAFZZ
- 53	DELETED					
R - 54	111167-018	56878	. BOLT-SELF-LOCKING, HEX .... 0.190-32UNJF-3A X 0.562 IN. LONG P&W PART NO. ST2276-018 REPLACES SC2682-018 P&W PART NO. ST2277-018	78		PAFZZ
- 55	4075665	52661	. ARM-COMPRESSOR STATOR, ASSY OF	58		PAFZZ
- 56	4066848	52661	. ARM-COMPRESSOR STATOR, ASSY OF	12		PAFZZ
- 57	4075757	52661	. ARM-COMPRESSOR STATOR, ASSY OF	8		PAFZZ
- 58	4075696	52661	. RING HALF-SYNCHRONIZING, REAR .... COMPRESSOR STATOR, INLET, ASSY OF, RH PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 59	MS124656	96906	.. INSERT	4		PAFZZ
- 60	4075677	52661	.. INSERT-SCREW THREAD .... 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
- 61	655443	52661	.. PIN-STRAIGHT, HEADLESS .... 0.187 DIA X 0.500 IN. LONG	2		PAFZZ
- 62	4075460	52661	.. BEARING OPTION .... SEE OPTION TABLE	29		PAFZZ
- 63	4075697	52661	. RING HALF-SYNCHRONIZING, REAR .... COMPRESSOR STATOR, INLET, ASSY OF, LH PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 64	MS124656	96906	.. INSERT	4		PAFZZ
- 65	4075677	52661	.. INSERT-SCREW THREAD .... 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
- 66	655443	52661	.. PIN-STRAIGHT, HEADLESS .... 0.187 DIA X 0.500 IN. LONG	2		PAFZZ
- 67	4075460	52661	.. BEARING OPTION .... SEE OPTION TABLE	29		PAFZZ




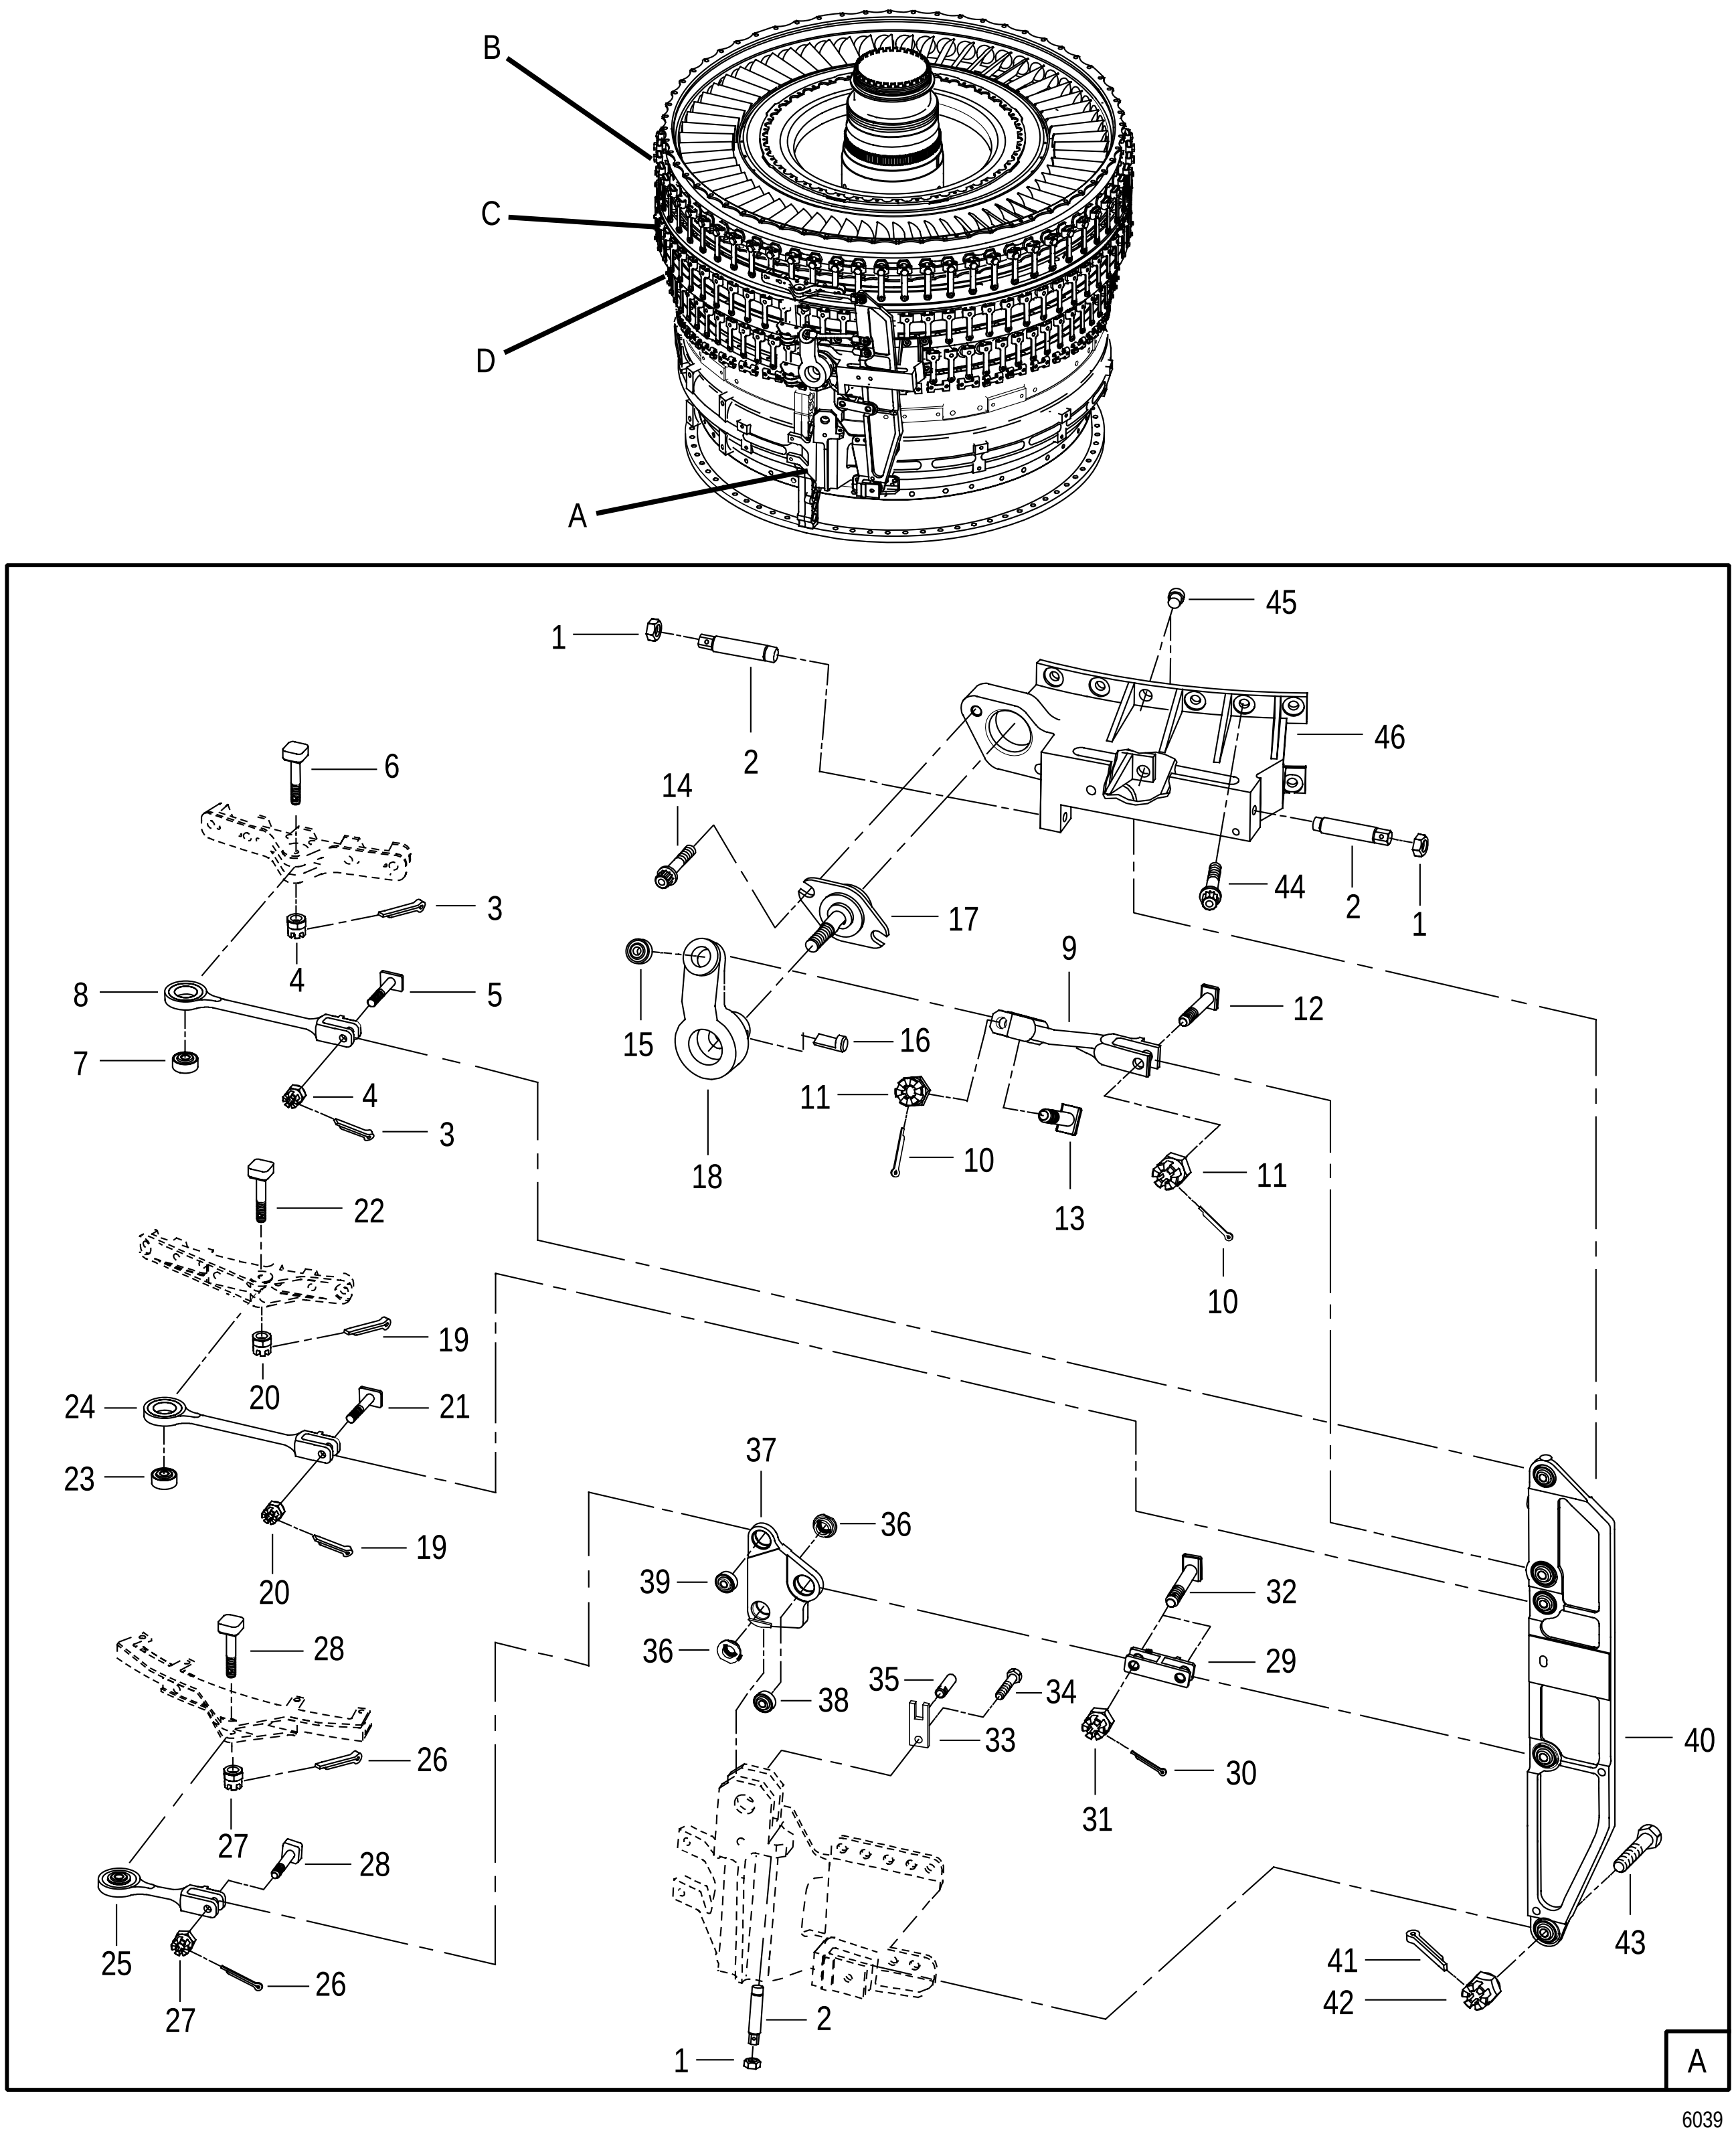


FIGURE 78. COMPRESSOR STATOR SYNCHRONIZING LINKAGE (FIXED 6TH STAGE VANES)
(SHEET 1 OF 2)

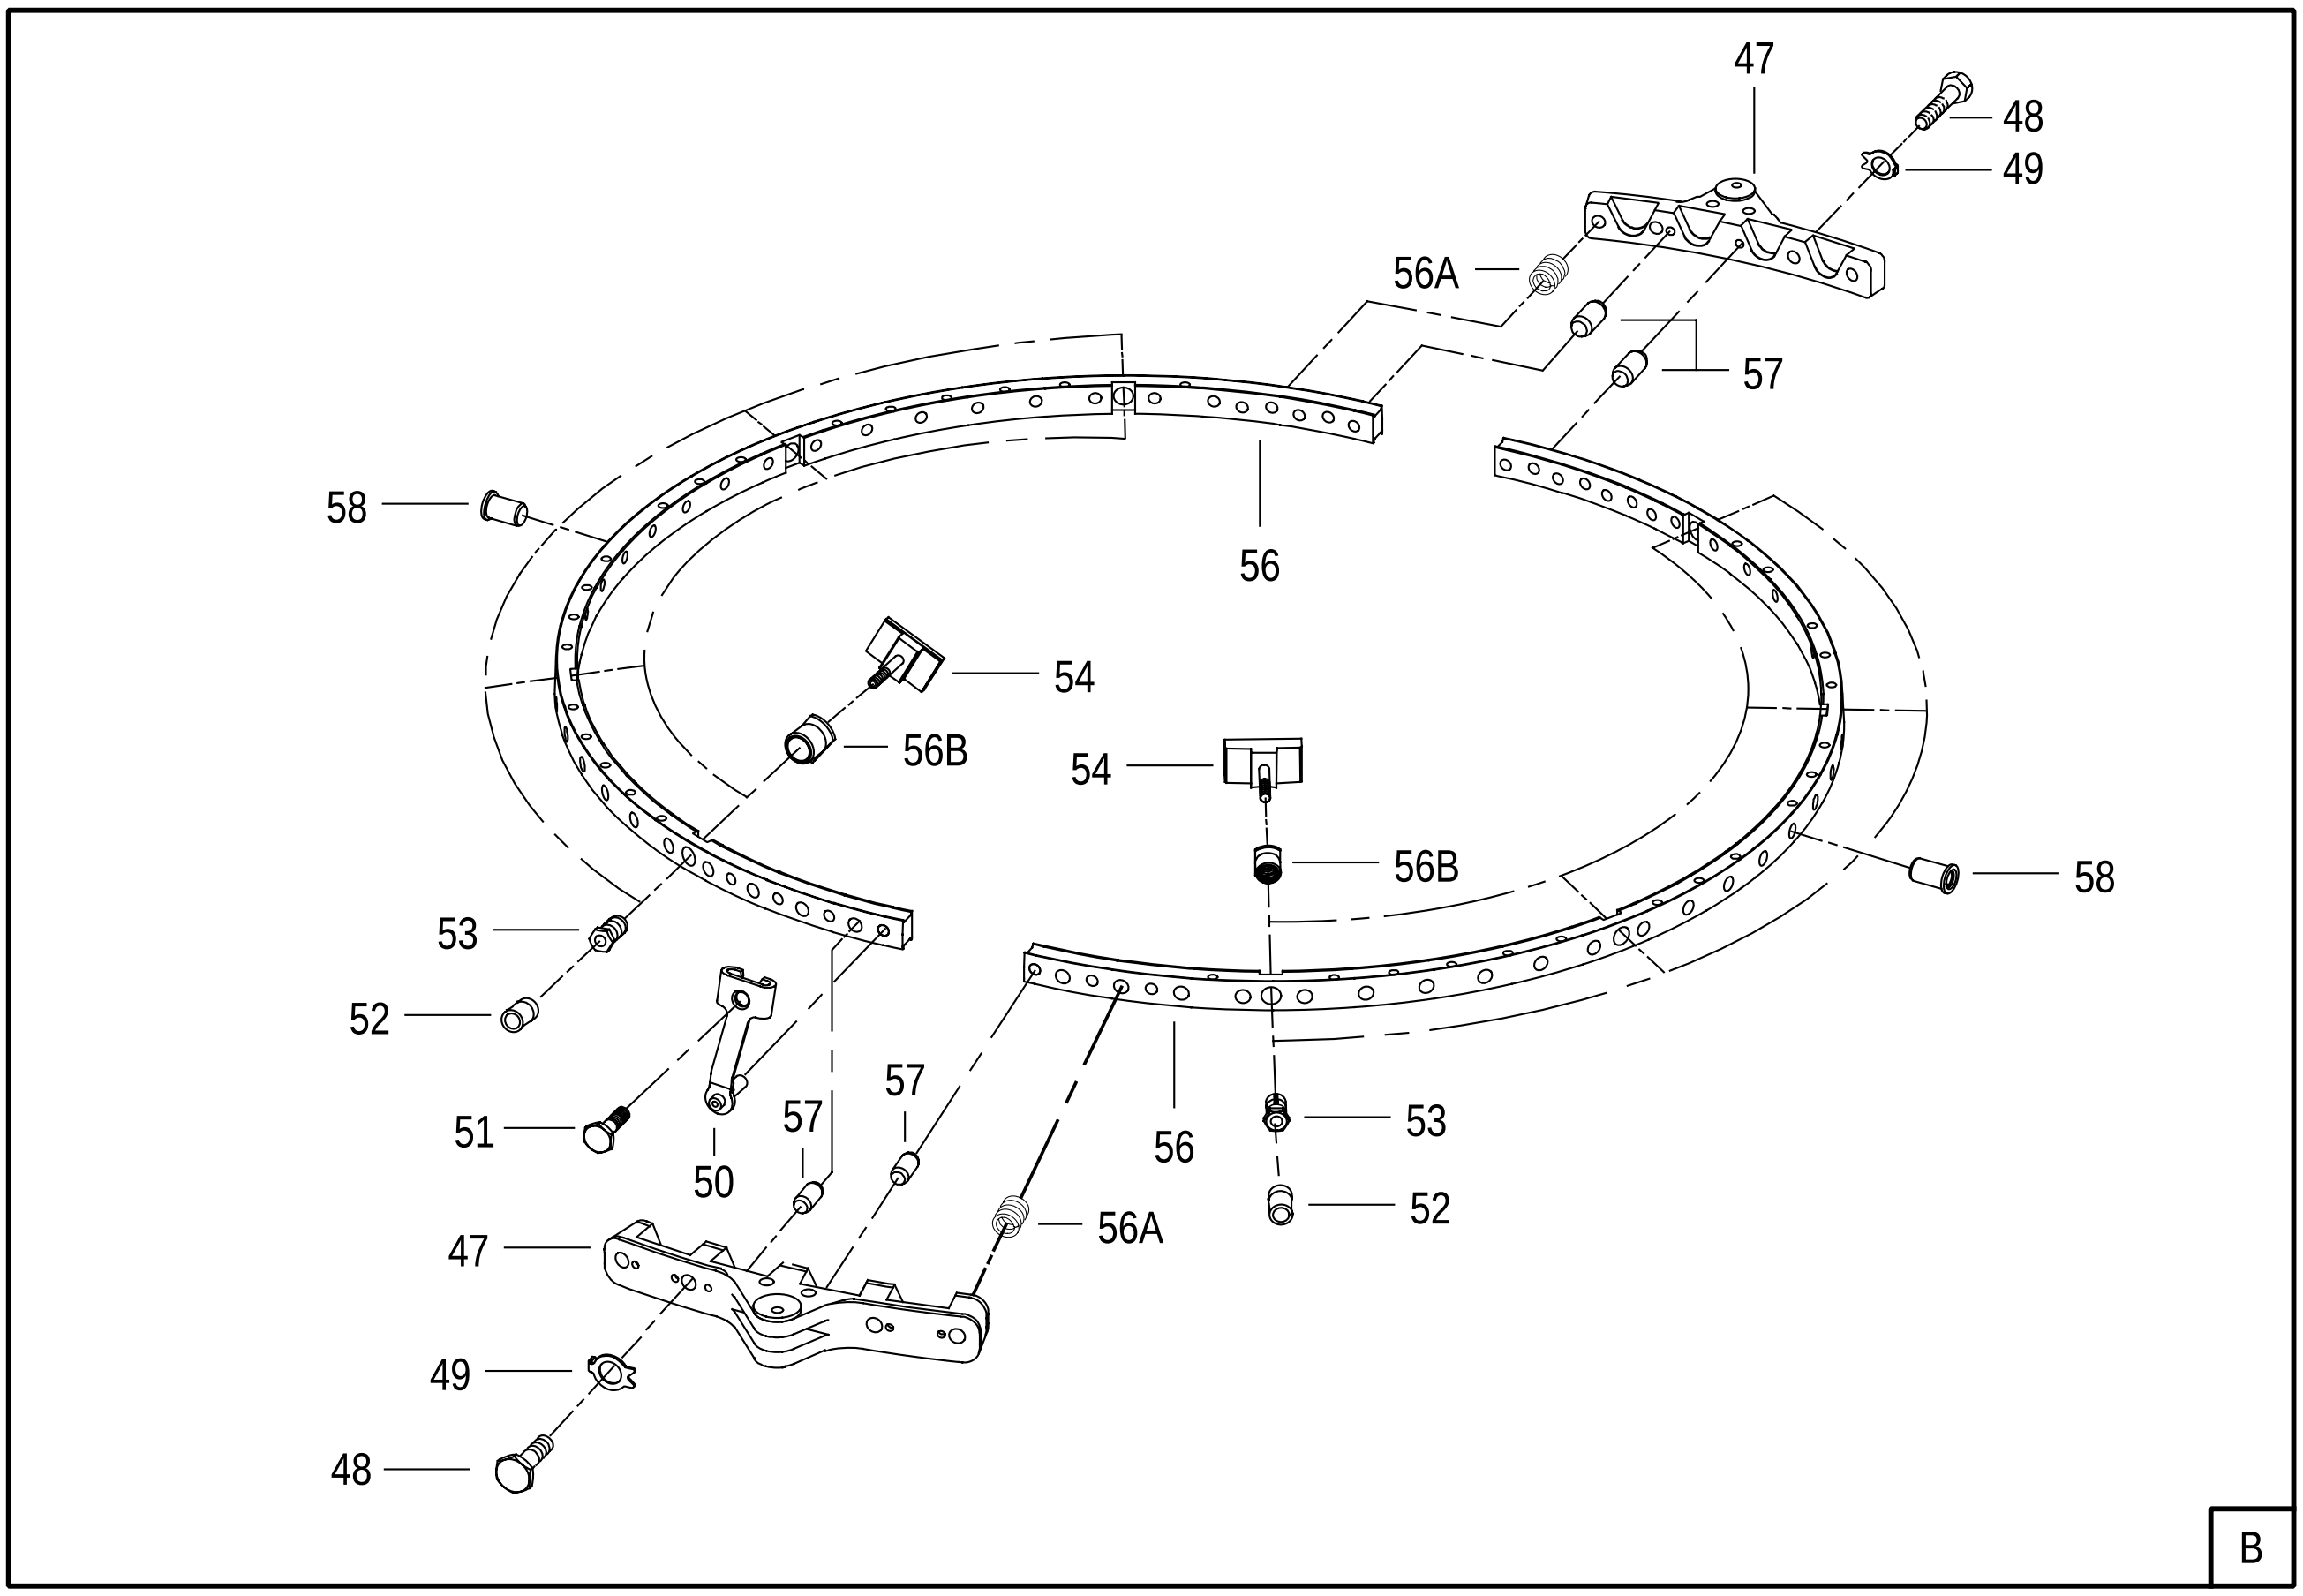

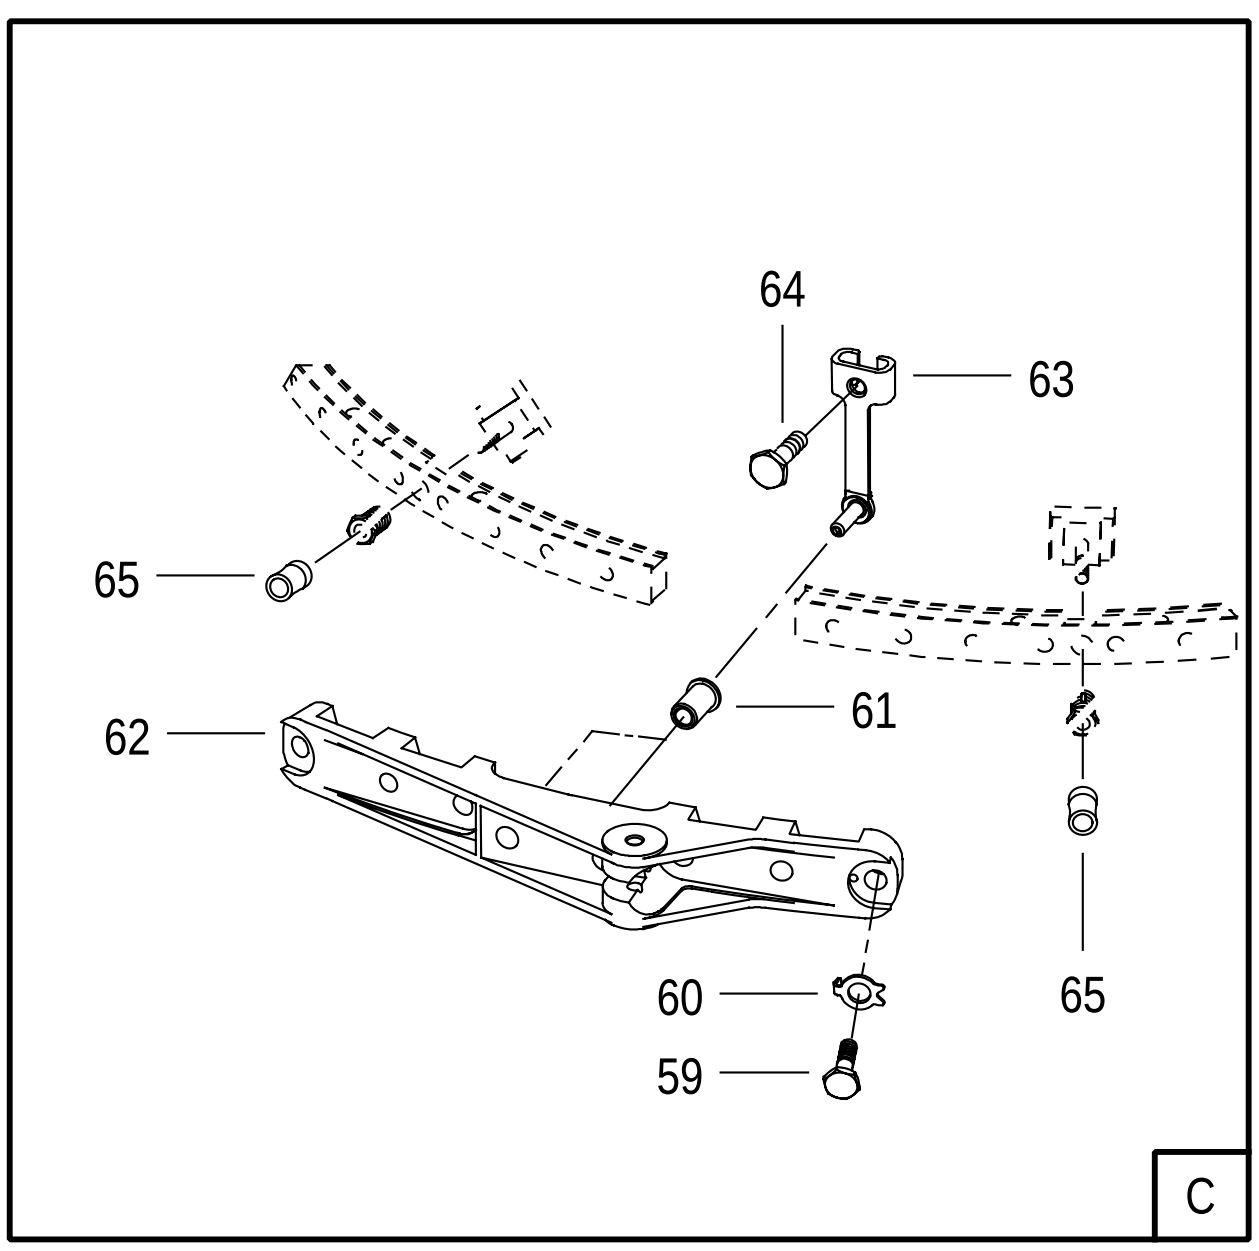

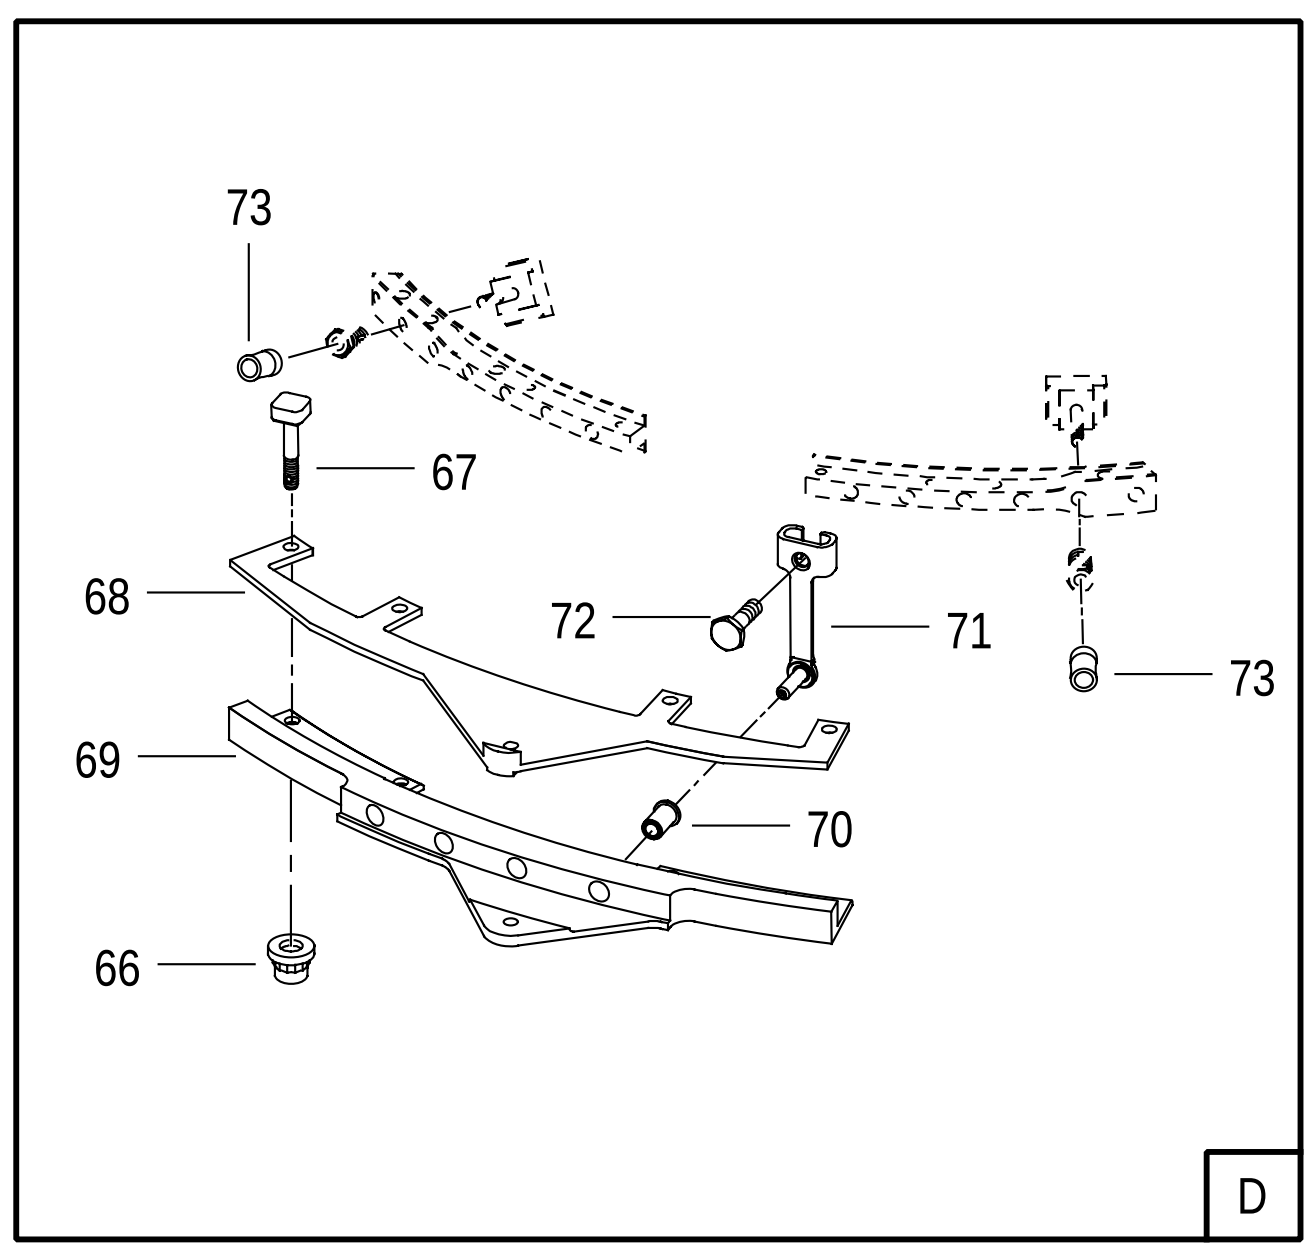

37332

FIGURE 78. COMPRESSOR STATOR SYNCHRONIZING LINKAGE (FIXED 6TH STAGE VANES)
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
78	NO NUMBER		COMPRESSOR STATOR SYNCHRONIZING LINKAGE (FIXED 6TH STAGE VANES) SEE FIG. 76-22 FOR NHA	REF	AP	
- 1	406436	52661	. NUT-PLAIN, HEX, DRILLED 0.250-UNJF-3B X 0.125 IN. THK REPLACES ST2163-10	6		PAFZZ
- 2	4075324	52661	. ADJUSTER-REAR COMPRESSOR STATOR LINKAGE	6		PAFZZ
	4073157	52661	. CONNECTING LINK-RIGID, COMPRESSOR STATOR, ASSY OF SUPERSEDED BY 4086412 (R)	2		PAFBZ
	4086412 (R)	52661	. CONNECTING LINK-RIGID, COMPRESSOR STATOR, ASSY OF SUPERSEDES 4073157 (R)	2		PAFBZ
- 3	MS9245-24	96906	. PIN (AP)	2		PAOZZ
- 4	4062489	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
- 5	4062463	52661	. BOLT-MACHINE, SLAB, DRILLED 0.190-32UNJF-3A MOD X 1.000 IN. LONG (AP)	1		PAFZZ
- 6	4074030	52661	. BOLT-MACHINE, SQUARE, DRILLED 0.190-32UNJF-3A MOD X 1.250 IN. LONG (AP)	1		PAFZZ
- 7	4062498	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
- 8	4073161	52661	.. CONNECTING LINK-RIGID, COMPRESSOR STATOR, INLET USE ONLY ON 4073157 (R)	1		XA
	4086411 (R)	52661	.. CONNECTING LINK-RIGID, COMPRESSOR STATOR, INLET USE ONLY ON 4086412 (R)	1		XA
- 9	4066827	52661	. CONNECTING LINK-RIGID, COMPRESSOR STATOR	2		PAFZZ
- 10	MS9245-27	96906	. PIN (AP)	2		PAFZZ
- 11	4062289	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
- 12	4062286	52661	. BOLT-MACHINE, SLAB, DRILLED 0.250-28UNJF-3A X 1.060 IN. LONG (AP)	1		PAOZZ
- 13	4071474	52661	. BOLT-MACHINE, SLAB, DRILLED 0.250-28UNJF-3A MOD X 1.320 IN. LONG (AP)	1		PAFZZ
	4079921	52661	. ARM-COMPRESSOR STATOR LINKAGE, ASSY OF	2		PAFDD
- 14	ST2155-016	52661	. BOLT-MACHINE, DRILLED, HEX 0.250-28UNJF-3A X 0.500 IN. LONG (AP)	2		PAFZZ
- 15	4062497	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
- 16	4079906	52661	.. PIN HALF-COMPRESSOR STATOR LINKAGE	1		PAFZZ
- 17	4066808	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
- 18	4079920	52661	.. ARM-COMPRESSOR STATOR LINKAGE	1		PADZZ
	4073157	52661	. CONNECTING LINK-RIGID, COMPRESSOR STATOR, ASSY OF SUPERSEDED BY 4086412 (R)	2		PAFBZ
	4086412 (R)	52661	. CONNECTING LINK-RIGID, COMPRESSOR STATOR, ASSY OF SUPERSEDES 4073157 (R)	2		PAFBZ
- 19	MS9245-24	96906	. PIN (AP)	2		PAOZZ
- 20	4062489	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
- 21	4062463	52661	. BOLT-MACHINE, SLAB, DRILLED 0.190-32UNJF-3A MOD X 1.000 IN. LONG (AP)	1		PAFZZ
- 22	4075657	52661	. BOLT-MACHINE, SQUARE, DRILLED 0.190-32UNJF-3A MOD X 1.500 IN. LONG (AP)	1		PAFZZ
- 23	4062498	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	78 - 24	4073161	52661	.. CONNECTING LINK-RIGID, COMPRESSOR STATOR, INLET	1		XA
R				USE ONLY ON 4073157			
R R R R		4086411	52661	.. CONNECTING LINK-RIGID, COMPRESSOR STATOR, INLET USE ONLY ON 4086412	1		XA
	- 25	4078355	52661	. CONNECTING LINK-RIGID, COMPRESSOR STATOR, ASSY OF	2		PAFBZ
	- 26	MS9245-24	96906	. PIN (AP)	2		PAOZZ
	- 27	4062489	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
	- 28	4063750	52661	. BOLT-MACHINE, SLAB, DRILLED 0.190-32UNJF-3A MOD X 1.050 IN. LONG (AP)	2		PAFZZ
	- 29	4079041	52661	. CONNECTING LINK-RIGID, COMPRESSOR STATOR	2		PAFZZ
	- 30	MS9245-27	96906	. PIN (AP)	2		PAFZZ
	- 31	4062289	52661	. NUT OPTION (AP) SEE OPTION TABLE	2		PAOZZ
	- 32	4062286	52661	. BOLT-MACHINE, SLAB, DRILLED 0.250-28UNJF-3A X 1.060 IN. LONG (AP)	2		PAOZZ
	- 33	4079017	52661	. LOCK-COMPRESSOR STATOR BELLCRANK	2		PAFZZ
	- 34	ST2605-06	52661	. BOLT-MACHINE DRILLED DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG (AP)	1		PAFZZ
	- 35	4079019	52661	. PIN-GROOVED, HEADLESS 0.3965 X 1.670 IN. LONG	2		PAFZZ
	- 36	4080111	52661	. BUSHING OPTION SEE OPTION TABLE	4		PADZZ
	- 37	4079028	52661	. BELLCRANK ASSY-COMPRESSOR STATOR LINKAGE PARTIAL BREAKDOWN FOLLOWS	2		PAFDD
	- 38	4062497	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
	- 39	4062498	52661	.. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
	- 40	4079528	52661	. ARM OPTION SEE OPTION TABLE	2		PAFDD
	- 41	MS9245-24	96906	. PIN (AP)	1		PAOZZ
	- 42	4062489	52661	. NUT OPTION (AP) SEE OPTION TABLE	1		PAOZZ
	- 43	4062514	52661	. BOLT-MACHINE, HEX, DRILLED 0.190-32UNJF-3A MOD X 1.100 IN. LONG (AP)	1		PAFZZ
R		= 4078345	52661	. BRACKET ASSY-REAR COMPRESSOR STATOR LINKAGE ARM	2		PAFDD
R R		= 4079616	52661	. BRACKET ASSY-REAR COMPRESSOR STATOR LINKAGE ARM	2		PAFDD
	- 44	ST2604-08	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	10		PAFZZ
	- 45	4066841	52661	.. PIN-SHOULDER, HEADLESS 0.18775 X 0.2465 X 0.280 IN. LONG	2		PAFZZ
	- 46	4078346	52661	.. BRACKET-REAR COMPRESSOR STATOR LINKAGE ARM	1		PAFZZ
	- 47	4075695	52661	. BRACKET-COMPRESSOR STATOR SYNCHRONIZING RING, INLET	2		PAFFF
	- 48	ST1508-12	52661	. BOLT-MACHINE, HEX 0.250-28UNJF-3A X 0.875 IN. LONG (AP)	4		PAFZZ
	- 49	MS9276-10	96906	. WASHER (AP)	4		PAFZZ
	- 50	4081055	52661	. ARM-COMPRESSOR STATOR, ASSY OF REPLACES 4075665	58		PAFZZ
R R R R R	- 51	111167-018	56878	. BOLT-SELF-LOCKING, HEX 0.190-32UNJF-3A X 0.562 IN. LONG (AP) P&W PART NO. ST2276-018 REPLACES SC2682-018 P&W PART NO. ST2277-018	1		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
78 - 52	HL97DU-6	56878 73197 92215	. COLLAR-PIN-RIVET, THREADED 0.164-32UNJC-3B X 0.447 IN. LONG P&W PART NO. ST2185-06	8		PAFZZ
- 53	4075672	52661	. BUSHING OPTION SEE OPTION TABLE	8		PAFZZ
- 54	4075680	52661	. BUMPER OPTION SEE OPTION TABLE	8		PAFZZ
- 55	DELETED		...			
- 56	4075697	52661	. RING HALF-SYNCHRONIZING, REAR COMPRESSOR STATOR, INLET, ASSY OF, LH	1		PAFDD
	4075696	52661	. RING HALF-SYNCHRONIZING, REAR COMPRESSOR STATOR, INLET, ASSY OF, RH PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 56A	MS124656	96906	.. INSERT	4		PAFZZ
- 56B	4075677	52661	.. INSERT-SCREW THREAD 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
- 57	655443	52661	.. PIN-STRAIGHT, HEADLESS 0.187 DIA X 0.500 IN. LONG	2		PAFZZ
- 58	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	29		PAFZZ
	4080007	52661	. BRACKET ASSY-COMPRESSOR STATOR SYNCHRONIZING RING, 4TH STAGE	2		PAFBZ
- 59	ST2654-12	52661	. BOLT-MACHINE, HEX 0.250-28UNJF-3A X 0.875 IN. LONG (AP)	4		PAFZZ
- 60	MS9276-10	96906	. WASHER (AP)	4		PAFZZ
- 61	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	2		PAFZZ
- 62	4080006	52661	.. BRACKET-COMPRESSOR STATOR SYNCHRONIZING RING, 4TH STAGE	1		PAFBZ
- 63	4081057	52661	. ARM-COMPRESSOR STATOR, ASSY OF REPLACES 4066848	4		PAFZZ
R - 64	111167-018	56878	. BOLT-SELF-LOCKING, HEX 0.190-32UNJF-3A X 0.562 IN. LONG (AP) P&W PART NO. ST2276-018 REPLACES SC2682-018 P&W PART NO. ST2277-018	1		PAFZZ
- 65	HL97DU-6	56878 73197 92215	. COLLAR-PIN-RIVET, THREADED 0.164-32UNJC-3B X 0.447 IN. LONG P&W PART NO. ST2185-06	8		PAFZZ
- 66	4023115	52661	. NUT OPTION SEE OPTION TABLE	8		PAOZZ
- 67	4063729	52661	. BOLT-MACHINE, SLAB 0.190-32UNJF-3A X 0.937 IN. LONG	8		PAFZZ
- 68	4078409	52661	. BRACKET-COMPRESSOR STATOR SYNCHRONIZING RING, 5TH STAGE	2		PAFZZ
- 69	4078411	52661	. BRACKET-COMPRESSOR STATOR SYNCHRONIZING RING, 5TH STAGE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	2		PAFFF
- 70	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	4		PAFZZ
- 71	4081057	52661	. ARM-COMPRESSOR STATOR, ASSY OF REPLACES 4066848	8		PAFZZ
R - 72	111167-018	56878	. BOLT-SELF-LOCKING, HEX 0.190-32UNJF-3A X 0.562 IN. LONG (AP) P&W PART NO. ST2276-018 REPLACES SC2682-018 P&W PART NO. ST2277-018	1		PAFZZ
- 73	HL97DU-6	56878 73197 92215	. COLLAR-PIN-RIVET, THREADED 0.164-32UNJC-3B X 0.447 IN. LONG P&W PART NO. ST2185-06	8		PAFZZ


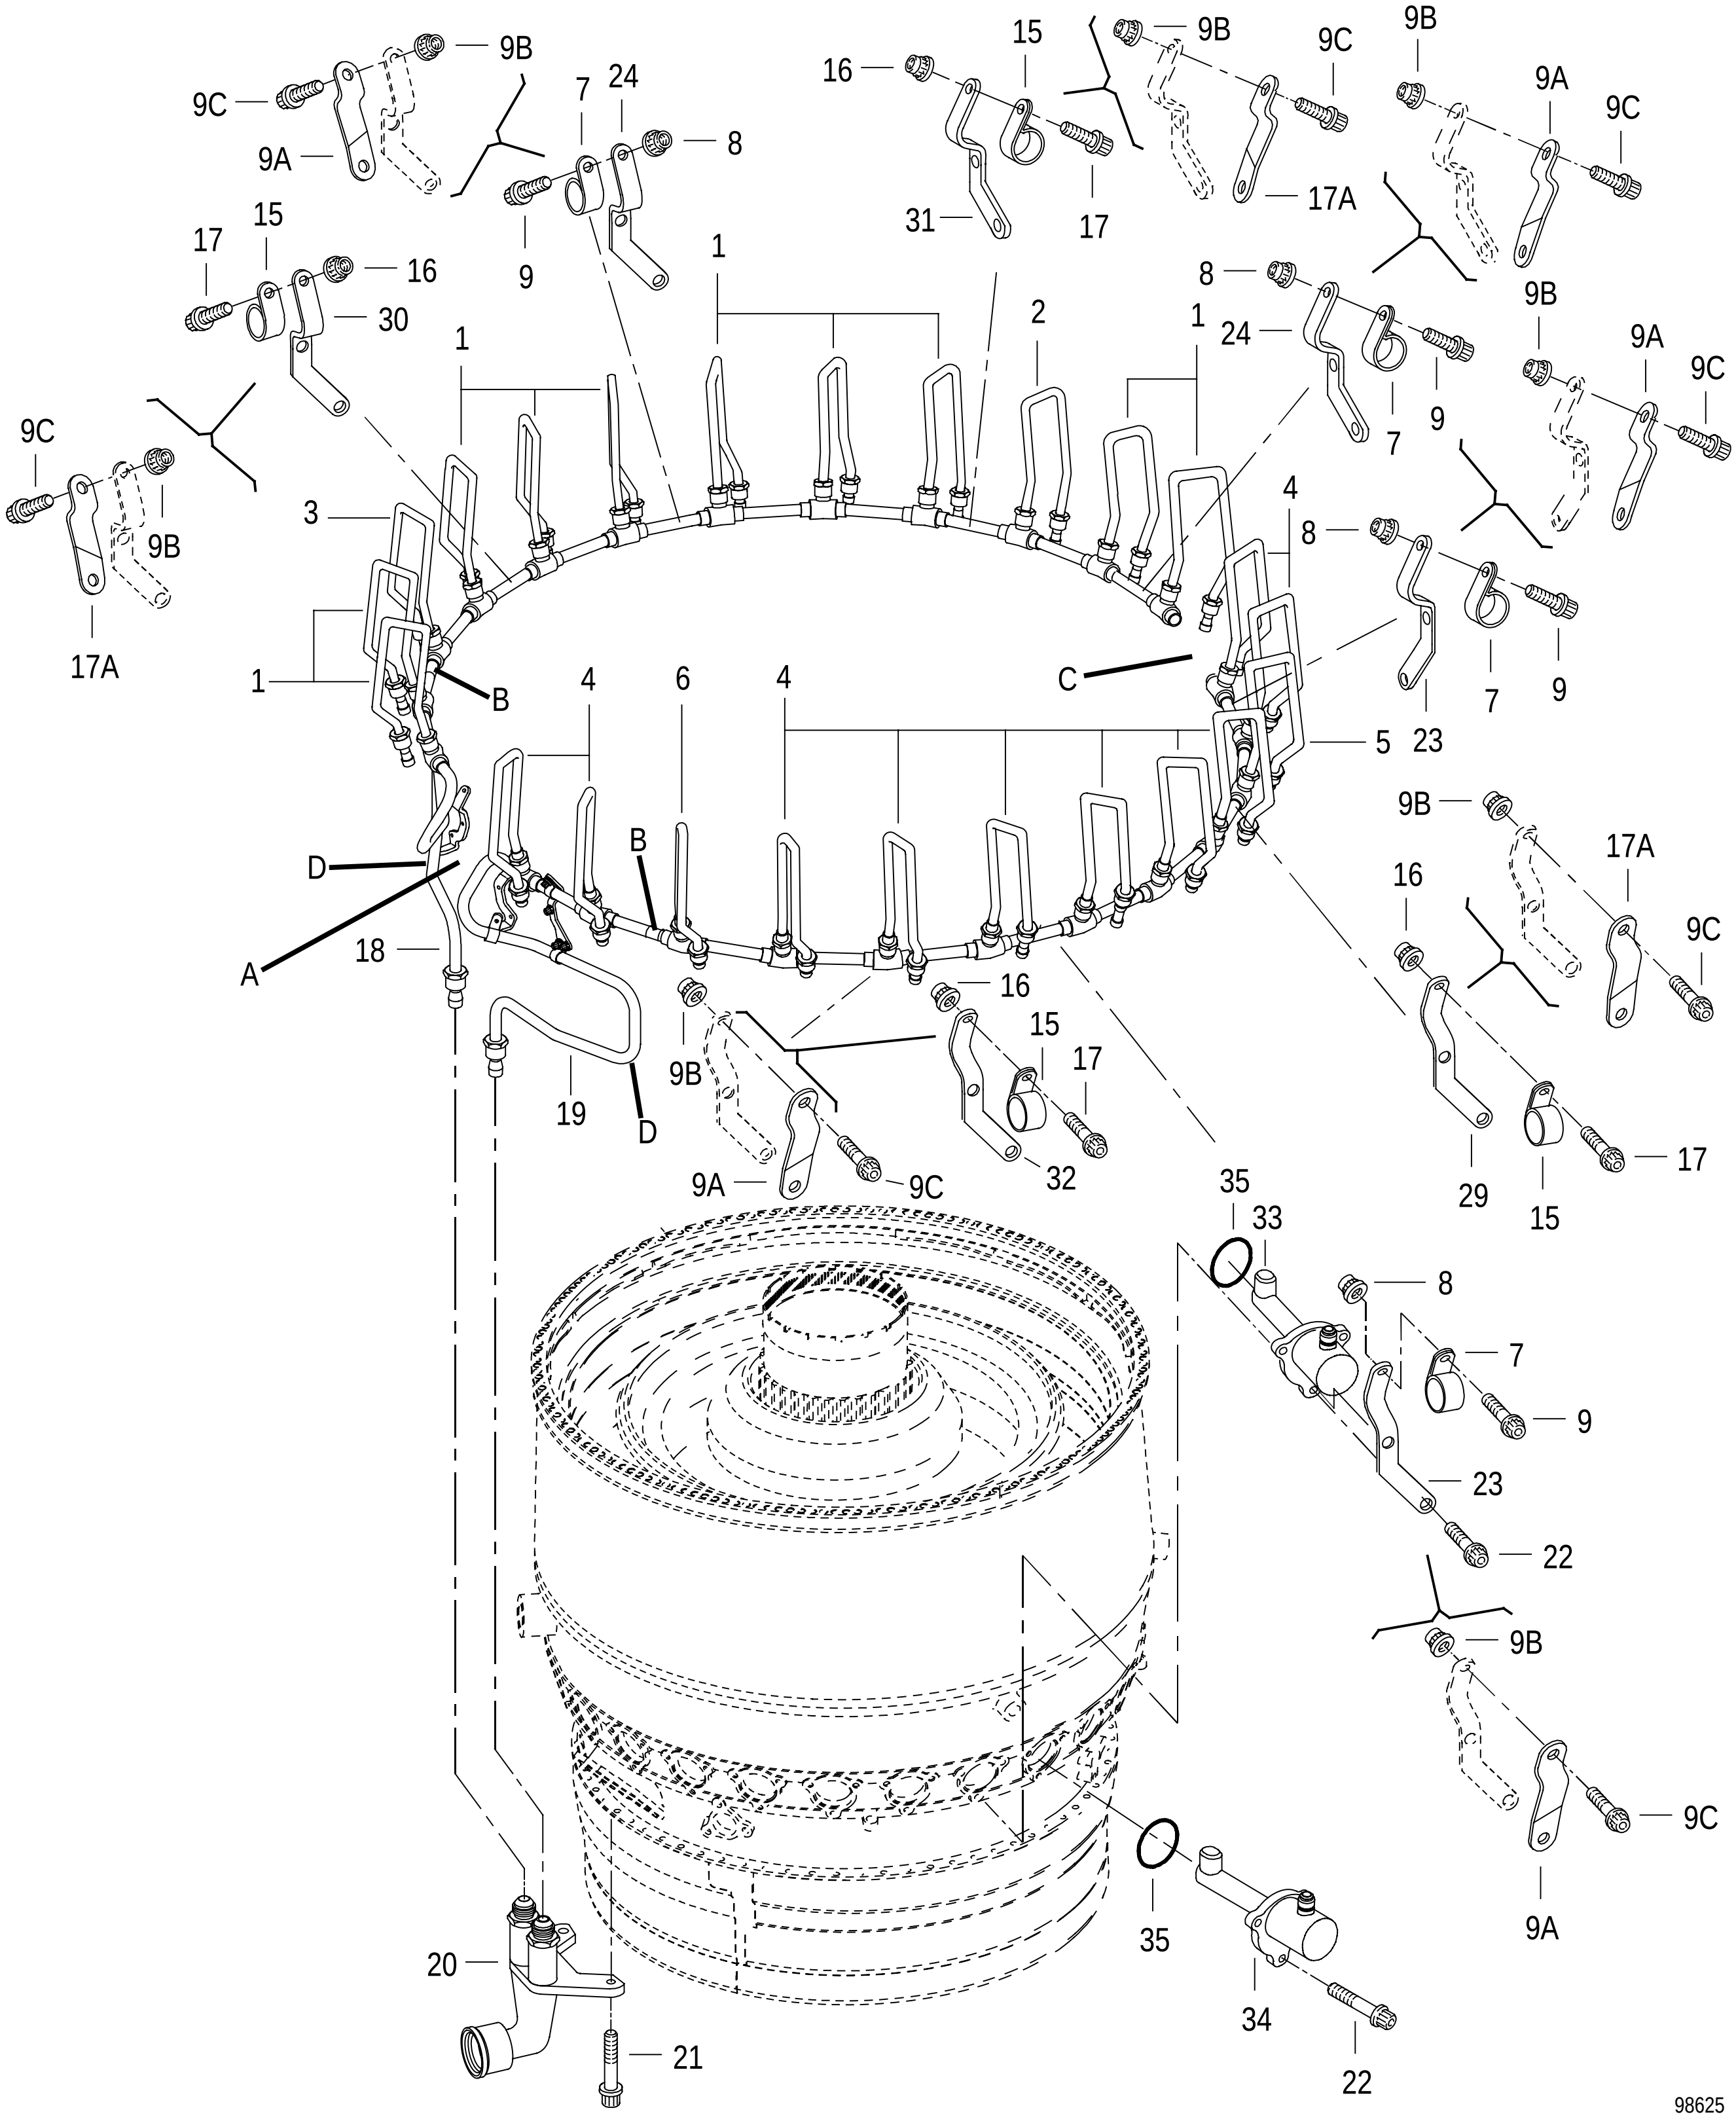


FIGURE 79. FUEL NOZZLES, MANIFOLDS, AND TUBING
(SHEET 1 OF 2)

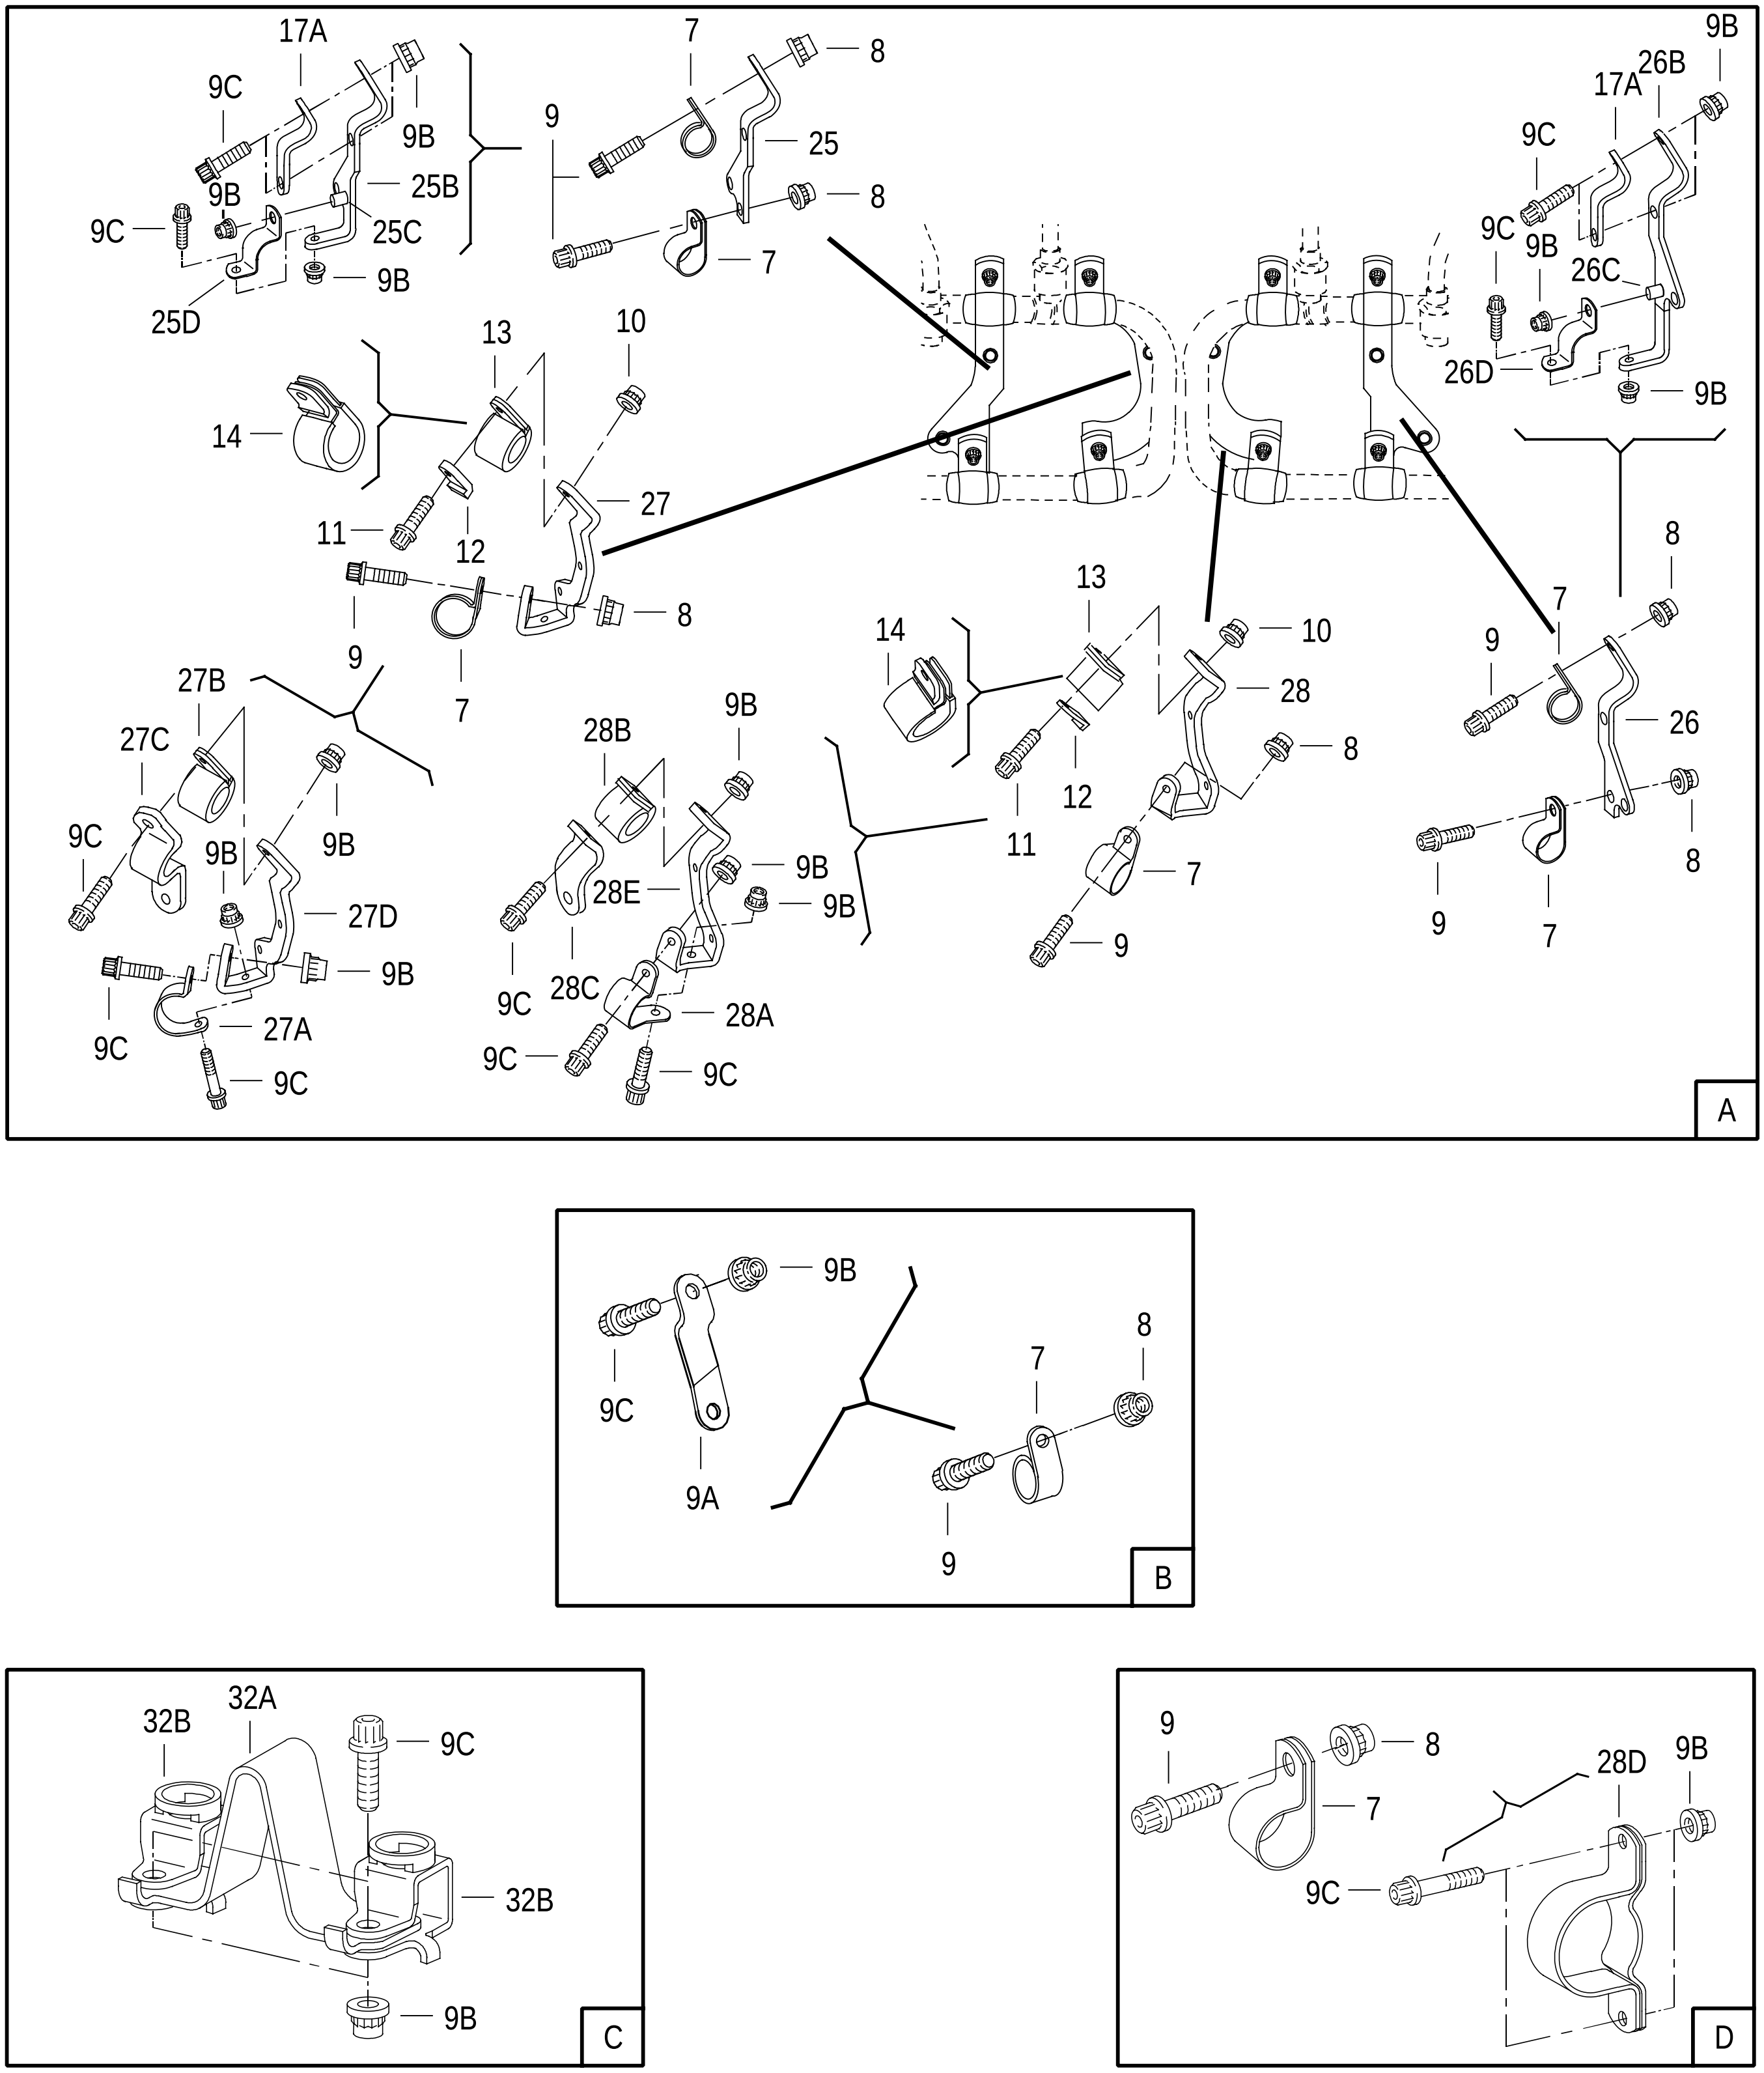

98626

FIGURE 79. FUEL NOZZLES, MANIFOLDS, AND TUBING
(SHEET 2 OF 2)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	79	NO NUMBER		FUEL NOZZLES, MANIFOLDS, AND TUBING .... SEE FIG. 76-36 FOR NHA	REF		
R	- 1	4074248-01	52661	. TUBE-FUEL SUPPLY, LEFT, ASSY OF	10	AAZ	PAFFF
R		4084787-01	52661	. TUBE-FUEL SUPPLY, LEFT, ASSY OF	10	ABA	PAFZZ
R	- 2	4074414-01	52661	. TUBE-FUEL SUPPLY, LEFT, ASSY OF	1	AAZ	PAFFF
R		4084789-01	52661	. TUBE-FUEL SUPPLY, LEFT, ASSY OF	1	ABA	PAFZZ
R	- 3	4076317-01	52661	. TUBE-FUEL SUPPLY, LEFT, ASSY OF	1	AAZ	PAFFF
R		4084788-01	52661	. TUBE-FUEL SUPPLY, LEFT, ASSY OF	1	ABA	PAFZZ
R	- 4	4074247-01	52661	. TUBE-FUEL SUPPLY, RIGHT, ASSY OF	10	AAZ	PAFFF
R		4084786-01	52661	. TUBE-FUEL SUPPLY, LEFT, ASSY OF	10	ABA	PAFZZ
R	- 5	4074412-01	52661	. TUBE-FUEL SUPPLY, RIGHT, ASSY OF	1	AAZ	PAFFF
R		4084785-01	52661	. TUBE-FUEL SUPPLY, RIGHT, ASSY OF	1	ABA	PAFZZ
R	- 6	4076316-01	52661	. TUBE-FUEL SUPPLY, RIGHT, ASSY OF	1	AAZ	PAFFF
R		4084784-01	52661	. TUBE-FUEL SUPPLY, RIGHT, ASSY OF	1	ABA	PAFZZ
R	- 7	4079640-01	52661	. CLAMP-LOOP, ASSY OF	12	AAZ	PAFZZ
R	- 8	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1	AAZ	PAOZZ
R	- 9	MS9556-07	96906	. BOLT (AP)	1	AAZ	PAOZZ
R	- 9A	4084798	52661	. BRACKET-FUEL MANIFOLD	5	ABA	PAFZZ
R	- 9B	ST2785-10	52661	. NUT OPTION .... SEE OPTION TABLE	26	ABA	PAOZZ
R	- 9C	MS9557-08	96906	. BOLT	24	ABA	PAOZZ
R	- 10	4023115	52661	. NUT OPTION .... SEE OPTION TABLE	2	AAZ	PAOZZ
R	- 11	MS9556-07	96906	. BOLT	2	AAZ	PAOZZ
R	- 12	4079257	52661	. PLATE-REINFORCING, LOOP CLAMP	2	CL/AAZ	XA
R	- 13	ST1455-08	52661	. CLAMP-LOOP, CUSHION..........................	2	CL/AAZ	XA
R	- 14	= 4077391	52661	. CLAMP-LOOP, CUSHION, ASSY OF................	2	CM/AAZ	PAFZZ
R		= ST2586-08	52661	. CLAMP OPTION .... SEE OPTION TABLE	2	CM/AAZ	PAFZZ
R	- 15	4079640-01	52661	. CLAMP-LOOP, ASSY OF	4	AAZ	PAFZZ
R	- 16	4023115	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1	AAZ	PAOZZ
R	- 17	MS9556-07	96906	. BOLT (AP)	1	AAZ	PAOZZ
R	- 17A	4084799	52661	. BRACKET-FUEL MANIFOLD	5	ABA	PAFZZ
	- 18	4081575	52661	. MANIFOLD OPTION .... SEE OPTION TABLE	1		PAFZZ
	- 19	4081574	52661	. MANIFOLD OPTION .... SEE OPTION TABLE	1		PAFZZ
	- 20	4075823	52661	. CONNECTOR-TUBE, FUEL SUPPLY MANIFOLD, ... ASSY OF WHEN EXH USE 4077964	1		PAFZZ
		4077964	52661	. CONNECTOR-TUBE, FUEL SUPPLY MANIFOLD, ... ASSY OF	1		PAFZZ
	- 21	ST2601-14	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 1.000 IN. LONG (AP)	2		PAFZZ
	- 22	ST1352-10	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX .... 0.250-28UNJF-3A X 0.750 IN. LONG	72		PAFZZ
R	- 23	4060165	52661	. BRACKET-FUEL MANIFOLD	2	AAZ	PAFZZ
R		4084795	52661	. BRACKET-FUEL MANIFOLD	2	ABA	PAFZZ
R	- 24	4060166	52661	. BRACKET-FUEL MANIFOLD	2	AAZ	PAFZZ
R		4084792	52661	. BRACKET-FUEL MANIFOLD	2	ABA	PAFZZ
R	- 25	4060168	52661	. BRACKET-FUEL MANIFOLD	1	AAZ	PAFZZ
R	- 25A	< 4084825-01	52661	. BRACKET ASSY OF-FUEL MANIFOLD	1	ABA	PAFZZ
R	- 25B	4084825-02	52661	.. BRACKET	1		PAFZZ
R	- 25C	MS9490-08	96906	.. BOLT	1		PAFZZ
R	- 25D	4084815	52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFZZ

	FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	79 - 26		4060167		52661	. BRACKET-FUEL MANIFOLD	1	AAZ	PAFZZ
	- 26A	<	4084796-01		52661	. BRACKET ASSY OF-FUEL MANIFOLD	1	ABA	PAFZZ
	- 26B		4084796-02		52661	.. BRACKET	1		PAFZZ
	- 26C		MS9490-08		96906	.. BOLT	1		PAFZZ
	- 26D		4084815		52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFZZ
	- 27		4077051		52661	. BRACKET-MANIFOLD	1	AAZ	PAFZZ
	- 27A		4084822		52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFZZ
	- 27B		TA025217		84971	. CLAMP-LOOP CUSHION	1	ABA	PAFZZ
						P&W PART NO. 4086349			
						SUPERSEDES TA025209			
						P&W PART NO. 4084846			
	- 27C		4084830		52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFZZ
	- 27D		4084828		52661	. BRACKET-MANIFOLD	1	ABA	PAFZZ
	- 28		4077052		52661	. BRACKET-MANIFOLD	1	AAZ	PAFZZ
	- 28A		4084821		52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFZZ
	- 28B		TA025217		84971	. CLAMP-LOOP CUSHION	1	ABA	PAFZZ
						P&W PART NO. 4086349			
						SUPERSEDES TA025209			
						P&W PART NO. 4084846			
	- 28C		4084831		52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFZZ
	- 28D		TA0950022		84971	. CLAMP-LOOP, SADDLE	2	ABA	PAFZZ
						P&W PART NO. 4084847			
	- 28E		4084829		52661	. BRACKET-MANIFOLD	1	ABA	PAFZZ
	- 29		4060165		52661	. BRACKET-FUEL MANIFOLD	1	AAZ	PAFZZ
			4084795		52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFZZ
	- 30		4078225		52661	. BRACKET-FUEL MANIFOLD	1	AAZ	PAFFF
			4084794		52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFFF
	- 31		4060166		52661	. BRACKET-FUEL MANIFOLD	1	AAZ	PAFZZ
			4084792		52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFZZ
	- 32		4078226		52661	. BRACKET-FUEL MANIFOLD	1	AAZ	PAFFF
			4084797		52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFFF
	- 32A		4084837		52661	. BRACKET-FUEL MANIFOLD	1	ABA	PAFZZ
	- 32B		4084840-01		52661	. BRACKET ASSY OF	2	ABA	PAFZZ
R	- 33		515P947-01	#	65065	. NOZZLE-FUEL, UNSTAGED	12		PAFLD
						P&W PART NO. 4081276			
R						REPLACED BY 519P292-01			
			4076778	#	52661	. NOZZLE-FUEL, UNSTAGED	12		PAFLD
R						REPLACED BY 515P947-01 OR 519P292-01			
R			519P292-01	#	65065	. NOZZLE-FUEL, UNSTAGED	12		PAFLD
						P&W PART NO. 4083569			
R						REPLACES 4076778			
R						REPLACES 515P947-01			
	- 34		6870012E6	#	09523	. NOZZLE-FUEL, STAGED	12		PAFLD
						P&W PART NO. 4075220			
	- 35		ST2311-36		52661	. GASKET OPTION	24		PAFZZ
						SEE OPTION TABLE			

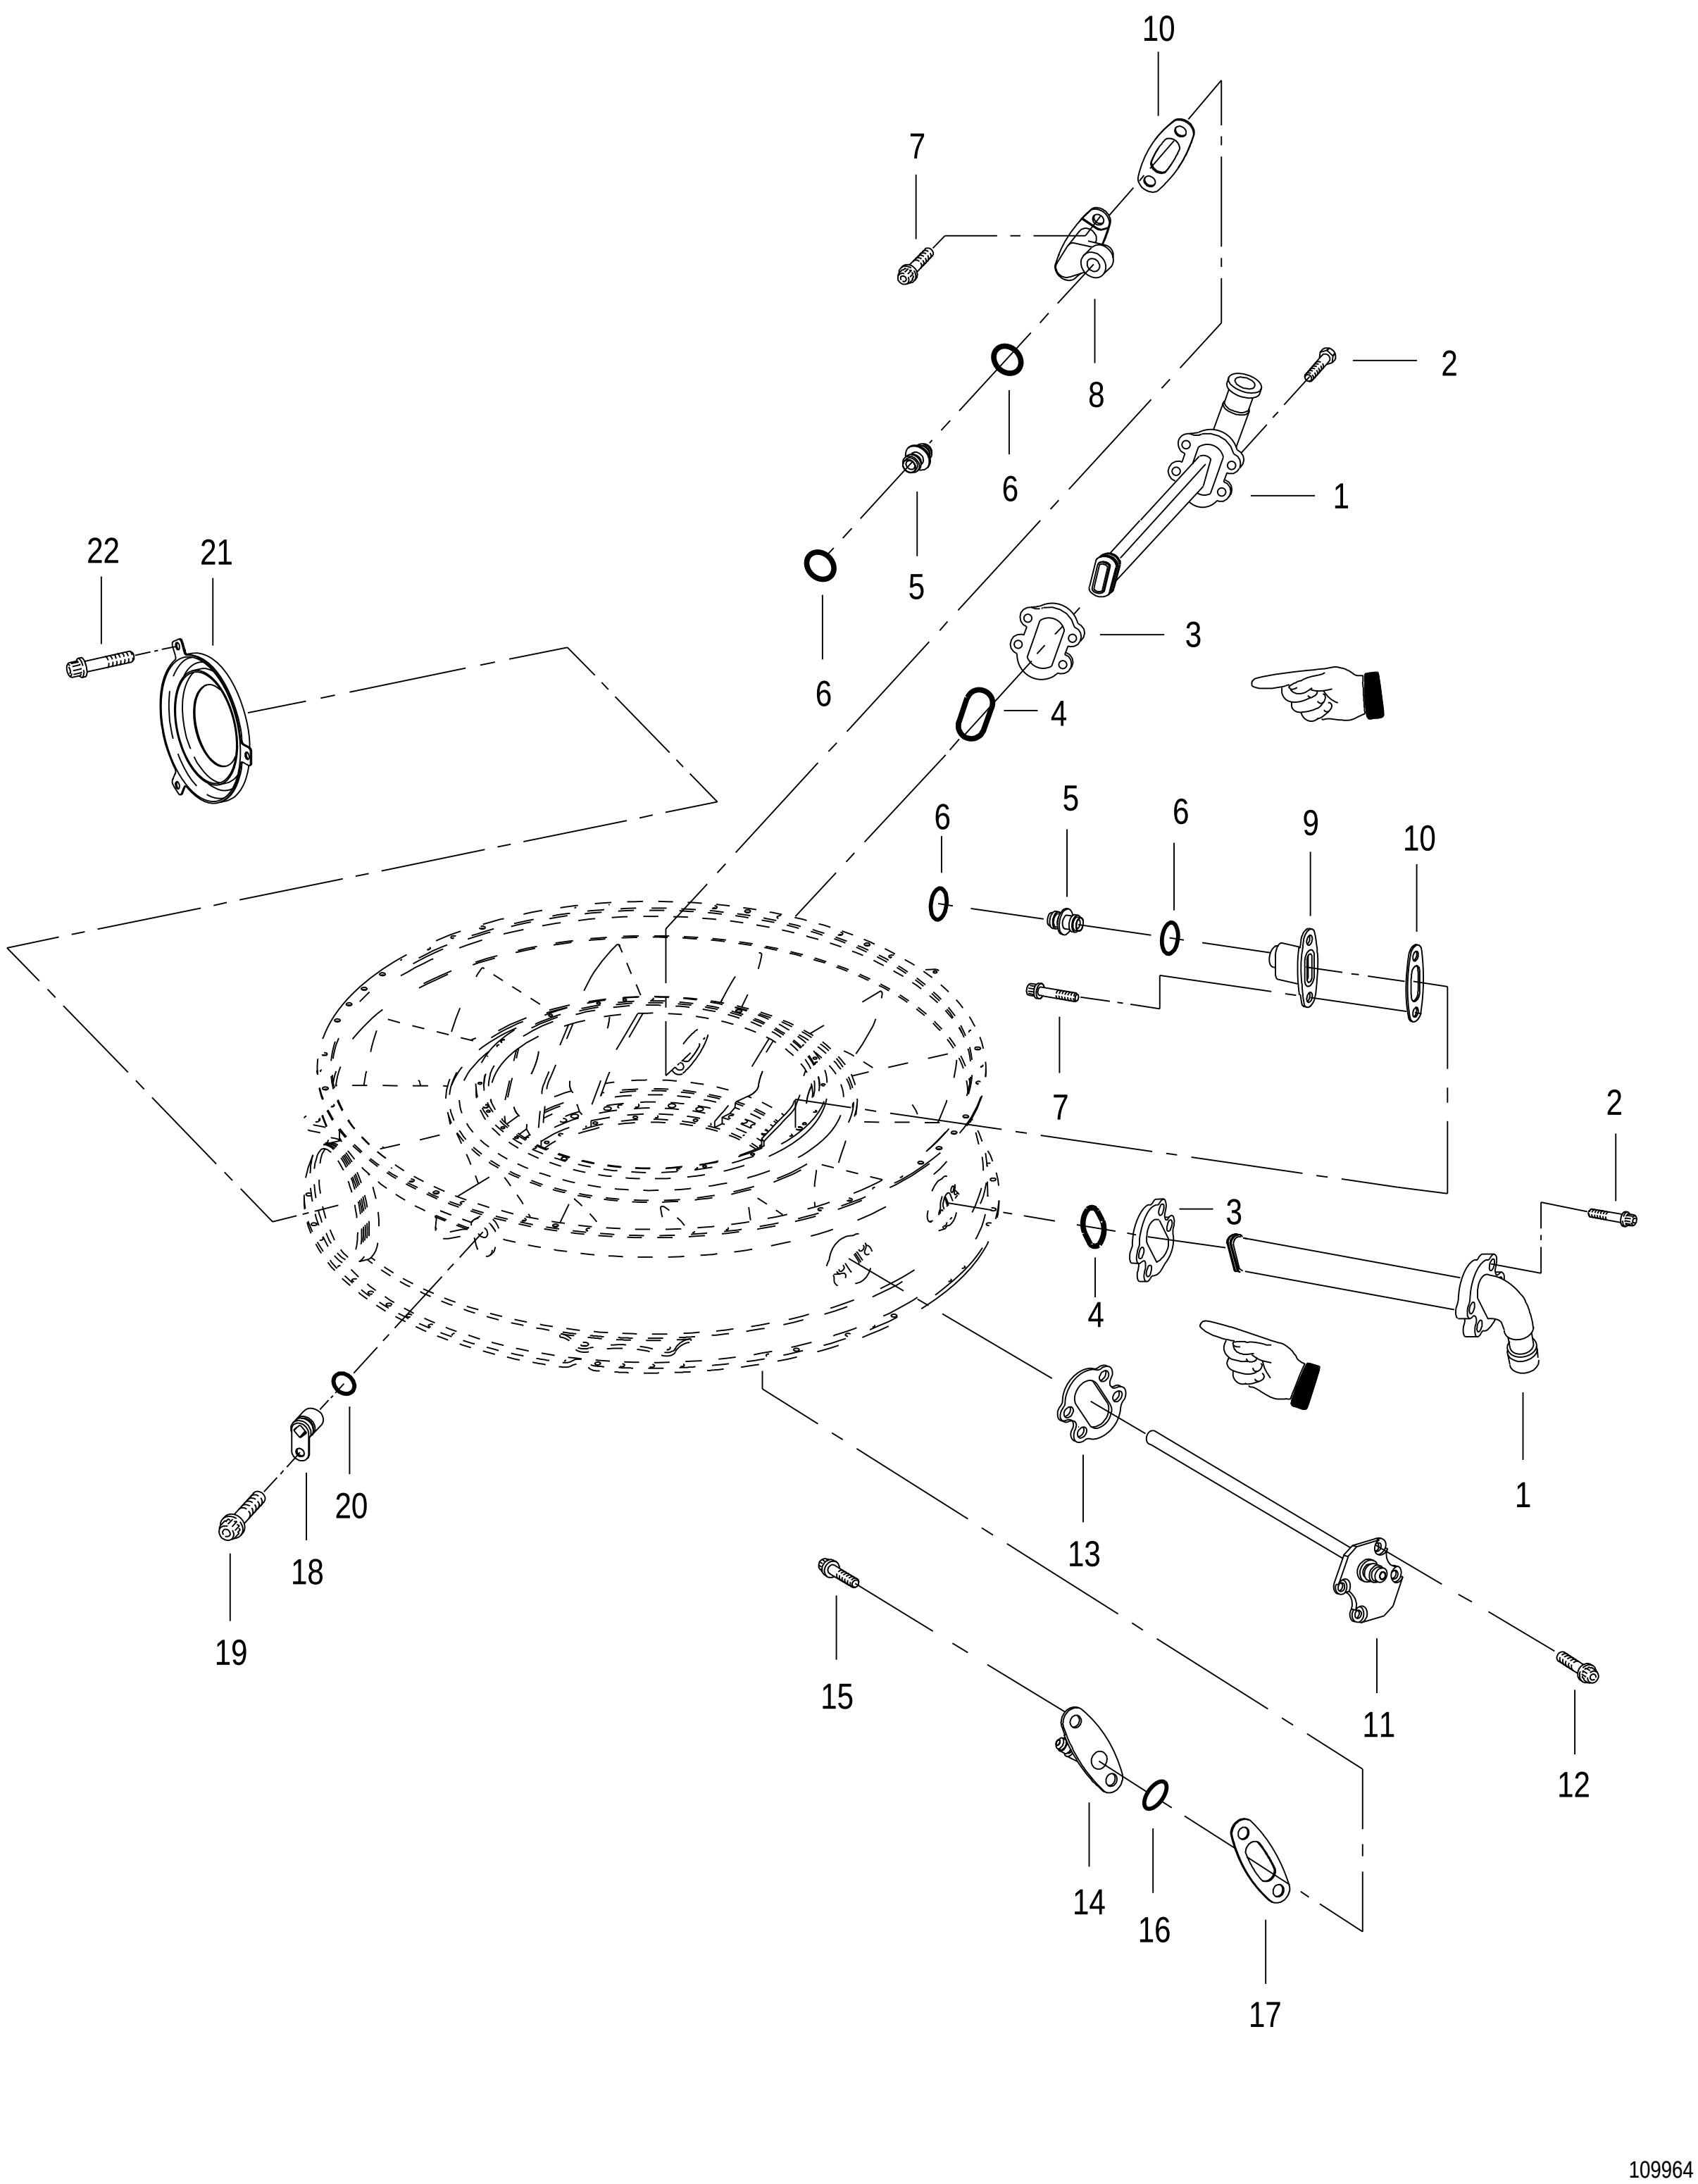


FIGURE 80. NO. 2 AND 3 BEARING PRESSURE TUBES, GEARBOX DRIVESHAFT COUPLING, AND COMPRESSOR INTERMEDIATE CASE BORESCOPE PLUG

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	80	NO NUMBER		NO. 2 AND 3 BEARING PRESSURE TUBES, GEARBOX DRIVESHAFT COUPLING, AND COMPRESSOR INTERMEDIATE CASE BORESCOPE PLUG SEE FIG. 76-37 FOR NHA	REF		
	- 1	4070030	52661	. TUBE-PRESSURE NO. 2 AND 3 BEARING, INTERNAL, ASSY OF	2		PAFDD
	- 2	4077027	52661	. BOLT OPTION (AP) SEE OPTION TABLE	4		PAFZZ
	- 3	4077235	52661	. GASKET-NO. 2 AND 3 BEARING ELBOW	2		PAFZZ
R	- 4	M00645070	02697	. PACKING-PREFORMED, O-RING 0.645 X 0.222 X 0.065 P&W PART NO. 4084174	2		PAOZZ
	- 5	4070040	52661	. ADAPTER-SWIVEL FLANGE, TUBE	2		PAFZZ
	- 6	AS3209-012	81343	. PACKING	4		PAFZZ
	- 7	ST2601-08	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.625 IN. LONG	4		PAFZZ
	- 8	4070037	52661	. TUBE-PRESSURE, NO. 2 AND 3 BEARING	1		PAFZZ
	- 9	4070039	52661	. TUBE-PRESSURE, NO. 2 AND 3 BEARING	1		PAFZZ
	- 10	4070093	52661	. GASKET-NO. 2 AND 3 BEARING TUBE	2		PAFZZ
	- 11	4075049	52661	. TUBE-PRESSURE, NO. 2 AND 3 BEARING, INTERNAL, ASSY OF	1		PAOZZ
	- 12	4077027	52661	. BOLT OPTION (AP) SEE OPTION TABLE	4		PAFZZ
	- 13	4077235	52661	. GASKET-NO. 2 AND 3 BEARING ELBOW	1		PAFZZ
	- 14	4070033	52661	. ELBOW-NO. 2 AND 3 BEARING	1		PAFZZ
	- 15	ST2601-08	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 0.625 IN. LONG (AP)	2		PAFZZ
	- 16	AS3209-011	81343	. PACKING-PREFORMED	1		PAFZZ
	- 17	4070093	52661	. GASKET-NO. 2 AND 3 BEARING TUBE	1		PAFZZ
	- 18	4070149	52661	. PLUG-BORESCOPE, COMPRESSOR INTERMEDIATE CASE	1		PAOZZ
	- 19	4077027	52661	. BOLT OPTION (AP) SEE OPTION TABLE	1		PAFZZ
	- 20	MS9386-013	96906	. PACKING	1		PAOZZ
	- 21	4076965-01	52661	. BAFFLE-GEARBOX, ASSY OF	1	WV	PAFZZ
		4086314-01	52661	. BAFFLE-GEARBOX, ASSY OF	1	WW	PAFZZ
	- 22	ST2151-010	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX 0.190-32UNJF-3A X 0.312 IN. LONG (AP)	3		PAFZZ

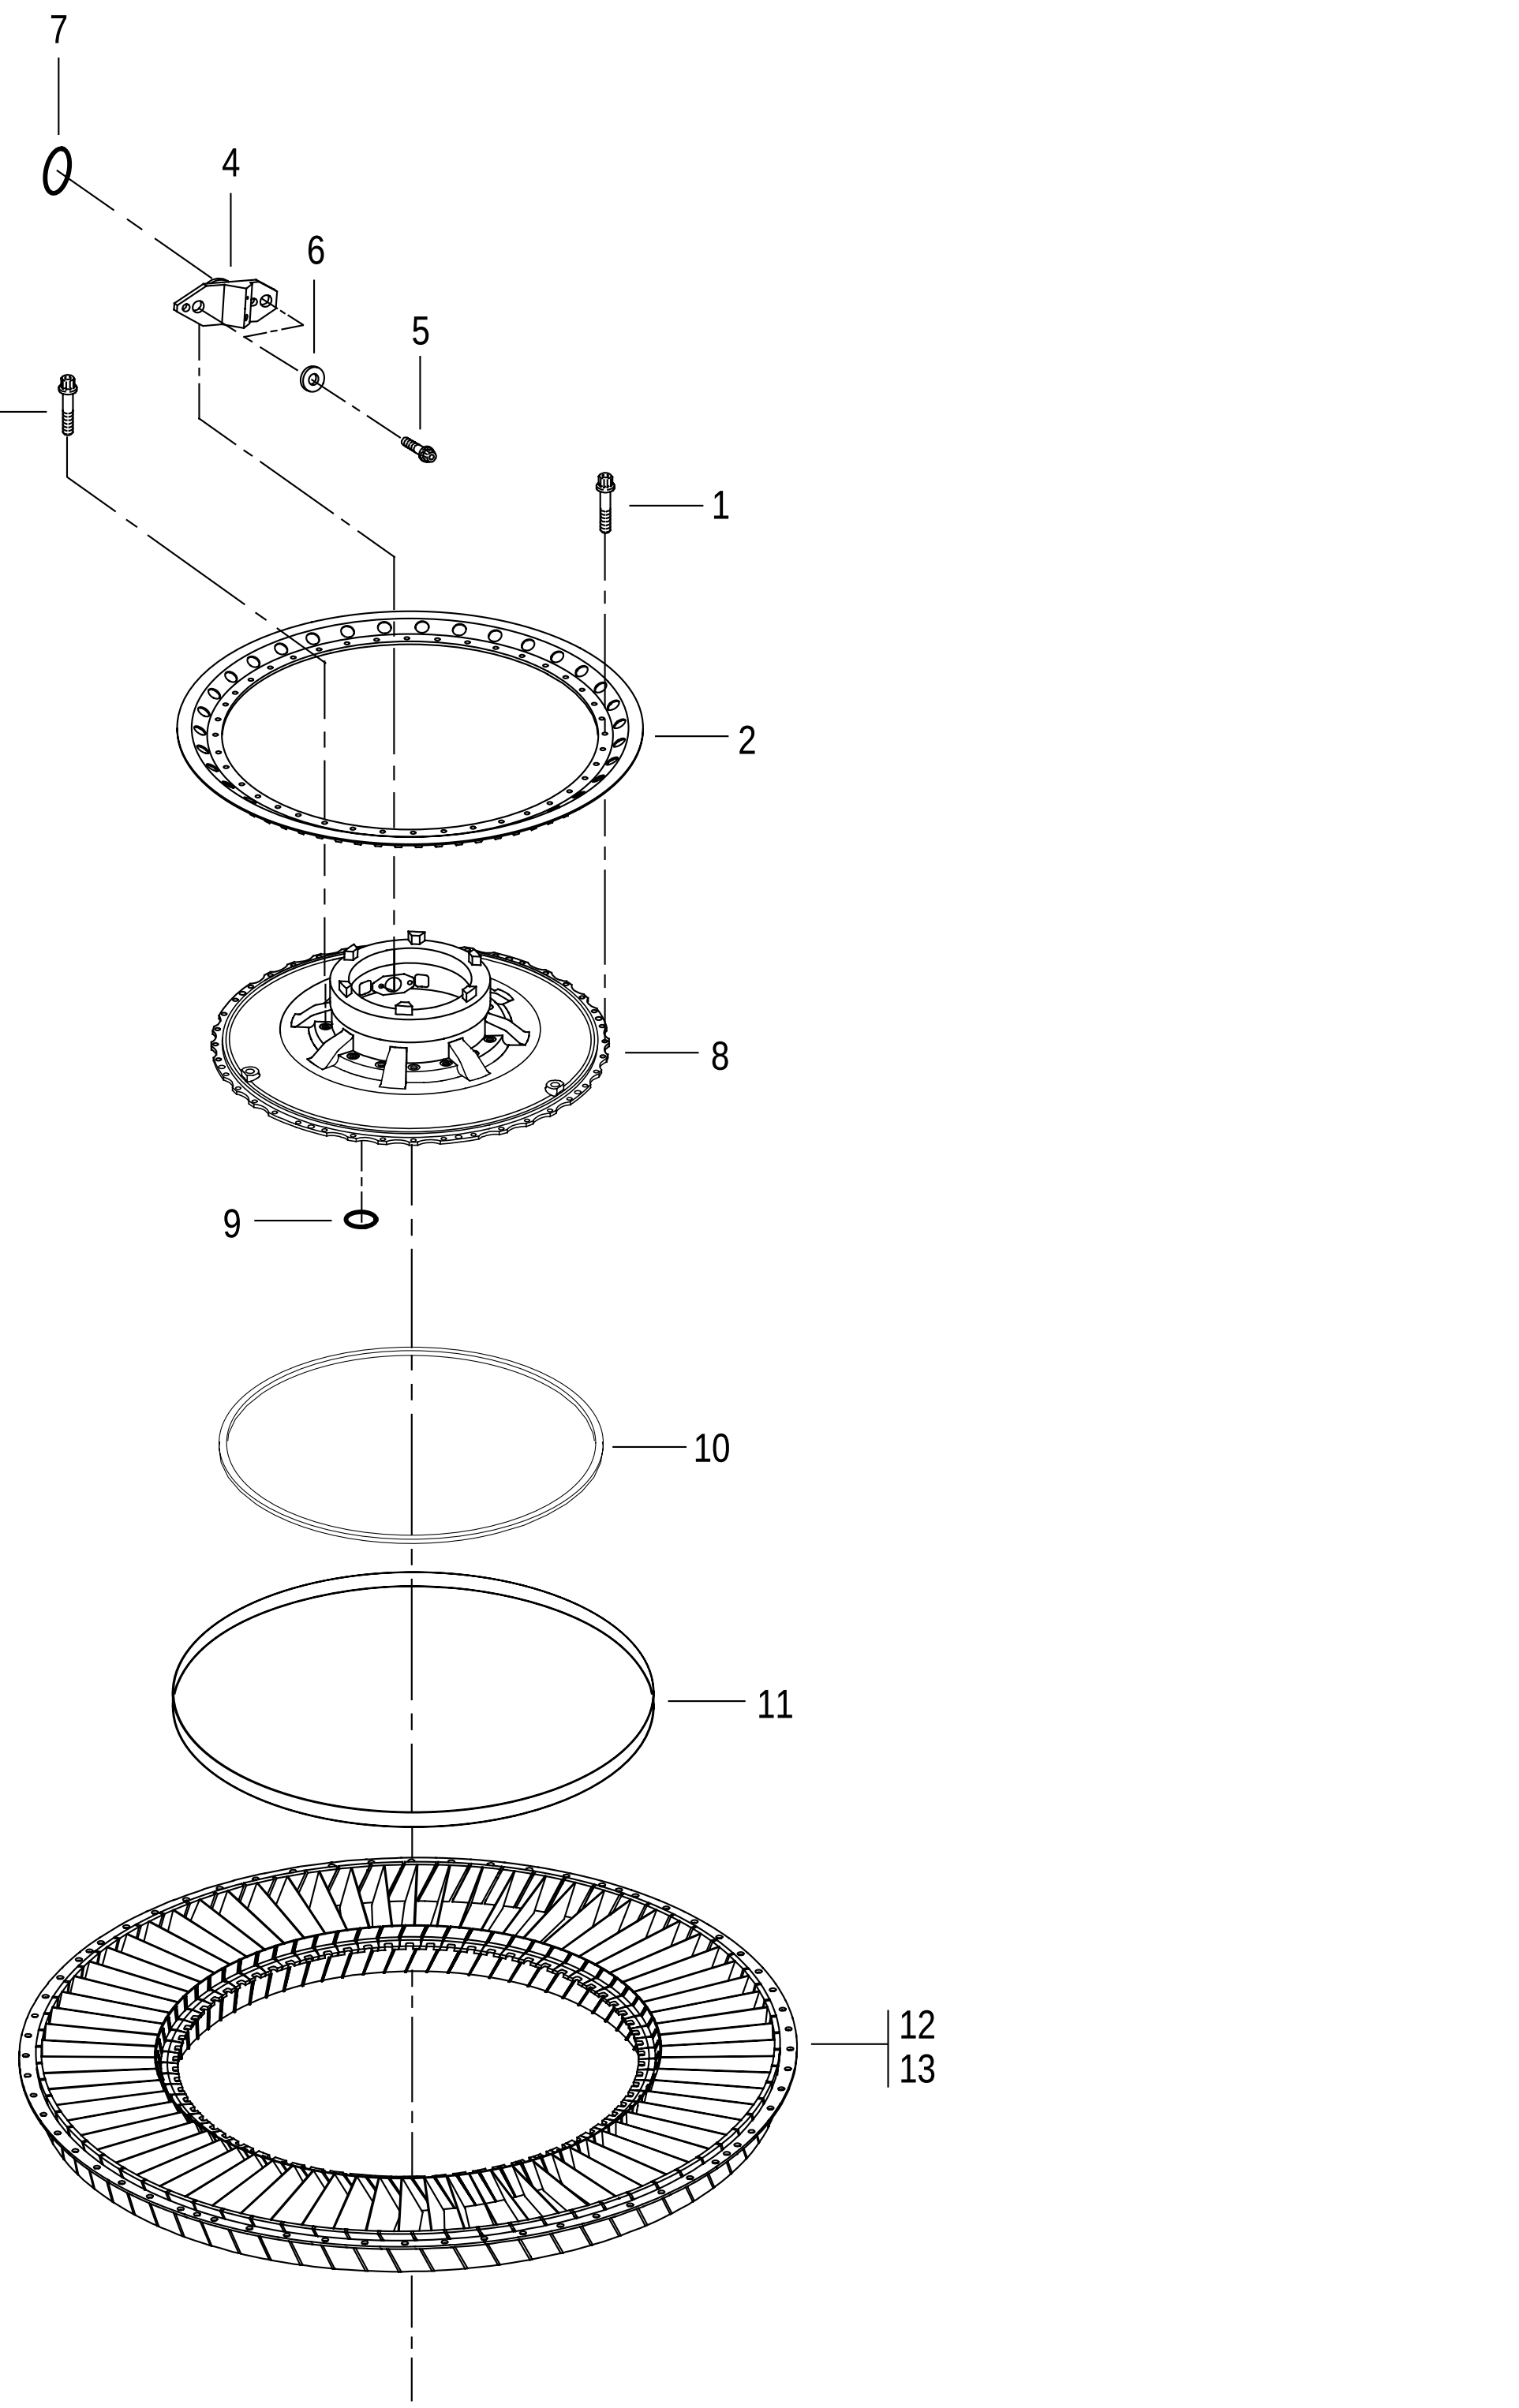


FIGURE 81. 3RD STAGE COMPRESSOR STATOR, SHROUD, AND NO. 2 BEARING SEAL AND SUPPORT ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
81	NO NUMBER		3RD STAGE COMPRESSOR STATOR, SHROUD, ... AND NO. 2 BEARING SEAL AND SUPPORT ASSY SEE FIG. 76-38 FOR NHA	REF		
- 1	MS9741-07	96906	. BOLT	40		PAFZZ
- 2	4071453	52661	. SHROUD-COMPRESSOR STATOR, 3RD STAGE	1		PAFDD
- 3	MS9895-10	96906	. BOLT	16		PAFZZ
- 4	4073689	52661	. NOZZLE-NO. 2 BEARING.	1		PAFZZ
- 5	MS9676-04	96906	. BOLT (AP)	2		PAFZZ
- 6	MS9880-09	96906	. WASHER (AP)	2		PAFZZ
- 7	MS9388-015	96906	. PACKING	1		PAOZZ
- 8	4072842	52661	. SEAL AND SUPPORT ASSY-NO. 2 BEARING . . . . SEE FIG. 90 FOR DETAIL PARTS	1		PAFLD
- 9	ST1000-014	52661	. PACKING-PREFORMED . . . . 0.489 ID X 0.070 IN. DIA ROUND	1		PAFZZ
- 10	4002824	52661	. GASKET-SPIRAL WOUND, ASSY OF . . . . 16.358 ID X 16.688 IN. OD	1		PAFZZ
	4077688	52661	. STATOR ASSY-COMPRESSOR, 3RD STAGE	1	CU	PAFLD
- 11	4077687	52661	.. DAMPER-COMPRESSOR STATOR, 3RD STAGE	1		PADZZ
- 12	4075983	52661	.. COMPRESSOR STATOR-3RD STAGE	1		PAFLD
- 13	4075983	52661	. COMPRESSOR STATOR-3RD STAGE	1	CV	PAFLD

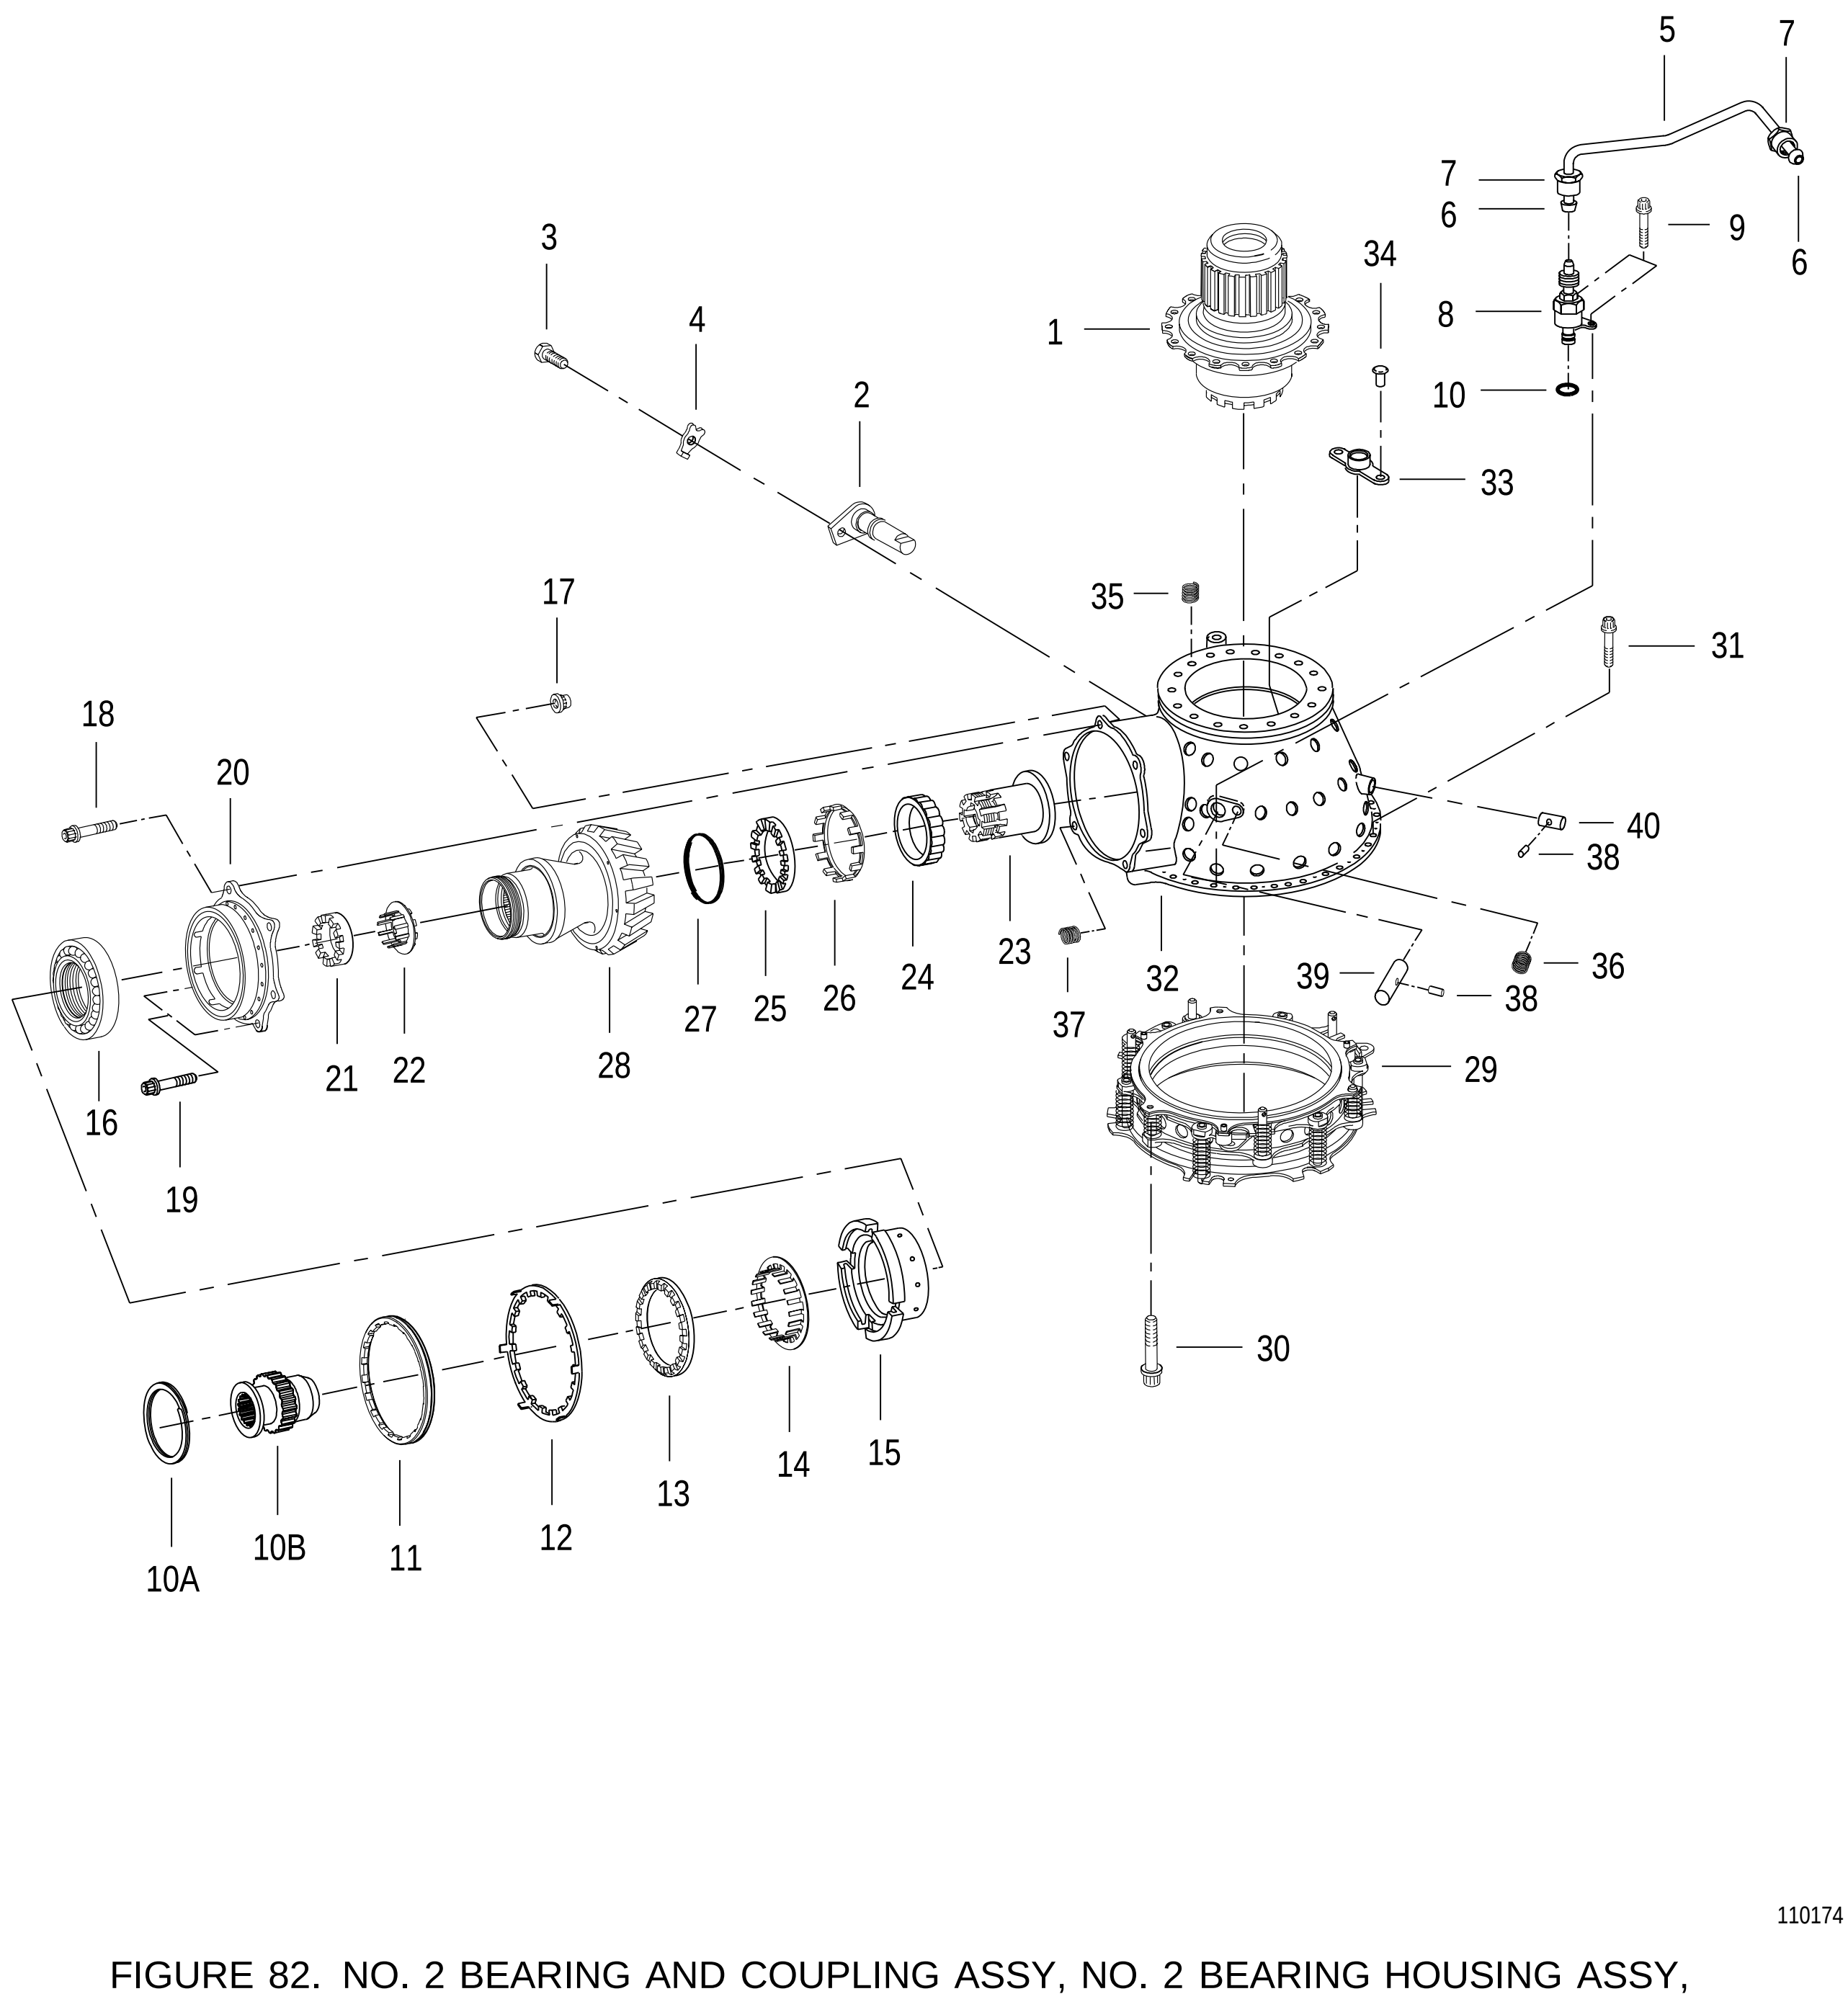


FIGURE 82. NO. 2 BEARING AND COUPLING ASSY, NO. 2 BEARING HOUSING ASSY, GEARBOX DRIVE BEARING HOUSING AND GEARSHAFT, AND NO. 2 AND 3 BEARING SEAL ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
82	NO NUMBER		NO. 2 BEARING AND COUPLING ASSY, NO. 2 BEARING HOUSING ASSY, GEARBOX DRIVE BEARING HOUSING AND GEARSHAFT, AND NO. 2 AND 3 BEARING SEAL ASSY SEE FIG. 76-39 FOR NHA	REF		
- 1	4072536	52661	. BEARING AND COUPLING ASSY-NO. 2 SEE FIG. 91 FOR DETAIL PARTS	1		AFF
- 2	4039917	52661	. NOZZLE-NO. 2 AND 3 BEARING, ASSY OF	3		PAFBZ
- 3	2146287	52661	. BOLT-MACHINE, HEX 0.190-32UNJF-3A X 0.562 IN. LONG (AP)	1		PAFZZ
- 4	4039918	52661	. WASHER-KEY 0.195 ID X 0.022 IN. THK (AP)	1		PAFZZ
- 5	4069241-01	52661	. TUBE-PRESSURE, NO. 3 BEARING SEAL SUPPORT DAMPER, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
- 6	MS9483-04	96906	.. FERRULE	2		PAFZZ
- 7	MS9198-04	96906	.. NUT	2		PAFZZ
- 8	4067086	52661	. VALVE ASSY-OIL CHECK, NO. 3 BEARING	1		PAFBZ
- 9	ST5001-12	52661	. BOLT-MACHINE, DRILLED, SPLINE 0.190-32UNJF-3A X 0.875 IN. LONG (AP) REPLACES MS9894-12	2		PAFZZ
- 10	AS3209-010	81343	. PACKING-PREFORMED	1		PAFZZ
R - 10A	494624	52661	. RING-RETAINING 1.875 HOUSING DIA X 0.157 X 0.062 IN. THK	1		PAFZZ
R - 10B	4025445	52661	. COUPLING-GEARBOX DRIVE SHAFT	1		PAFBZ
- 11	4001878	52661	. NUT-INVERTED, SPANNER 4.250-16UNJS-3A-LH X 0.255 IN. THK	1		PAFZZ
- 12	4001879	52661	. WASHER-KEY 3.870 ID X 0.031 IN. THK	1		PAFZZ
- 13	4001874	52661	. NUT-BEARING RETAINING, INTERNALLY THREADED 2.250-16UNJ-3B X 0.300 IN. THK	1		PAFZZ
- 14	4010797	52661	. WASHER-KEY 2.420 ID X 0.031 IN. THK	1		PAFZZ
- 15	4025446	52661	. SLEEVE-GEARBOX DRIVE GEARSHAFT	1		PAFZZ
- 16	4030964	52661	. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
- 17	4023115	52661	. NUT OPTION SEE OPTION TABLE	4		PAOZZ
- 18	MS9732-08	96906	. BOLT	4		PAFZZ
- 19	ST2016-016	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.190-32UNJF-3A X 0.500 IN. LONG	2		PAOZZ
- 20	4028827	52661	. HOUSING-GEARBOX DRIVE BEARING	1		PAFLD
- 21	4001883	52661	. NUT-PLAIN, ROUND 0.9375-16UNJ-3B X 0.310 IN. THK	1		PAFBZ
- 22	4001884	52661	. WASHER-KEY 0.835 DIA X 1.280 OD X 0.030 IN. THK	1		PAFZZ
- 23	4001882	52661	. BOLT-INTERNALLY RELIEVED BODY 0.9375-16UNJ-3A X 1.370 IN. LONG	1		PAFZZ
- 24	4030963	52661	. BEARING OPTION SEE OPTION TABLE	1		PAFZZ
- 25	4001885	52661	. NUT-BEARING RETAINING, EXTERNALLY THREADED 2.9375-16UNJS-3A-LH X 0.285 IN. THK	1		PAFZZ
- 26	4001886	52661	. WASHER-KEY 2.565 ID X 0.02825 IN. THK	1		PAFZZ
- 27	4068118	52661	. RING-RETAINING, SPIRAL 3.450 IN. HOUSING DIA X 0.060 X 0.030 DIA	1		PAFZZ
- 28	4068119	52661	. GEARSHAFT-BEVEL, GEARBOX DRIVE	1		PAFLD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	82 - 29	4060816	52661	. SEAL ASSY-NO. 2 AND NO. 3 BEARING	1		AFF
				SEE FIG. 92 FOR DETAIL PARTS			
	- 30	MS9885-08	96906	. BOLT (AP)	3		PAFZZ
	- 31	ST5001-12	52661	. BOLT-MACHINE, DRILLED, SPLINE	31		PAFZZ
				0.190-32UNJF-3A X 0.875 IN. LONG			
				REPLACES MS9894-11			
	- 32	4038606	52661	. HOUSING-NO. 2 BEARING, ASSY OF	1		PAFLD
				PARTIAL BREAKDOWN FOLLOWS			
	- 33	4046362	52661	.. NUT OPTION	3		PAFZZ
				SEE OPTION TABLE			
	- 34	AN123621	88044	.. RIVET (AP)	2		PADZZ
R	- 35	MS124696	96906	.. INSERT	16		PADZZ
R				SERVICE REPAIR PART			
R				USE 0-16 AS REQUIRED			
R	- 36	MS124735	96906	.. INSERT	3		PADZZ
R				SERVICE REPAIR PART			
R				USE 0-3 AS REQUIRED			
R	- 37	MS124655	96906	.. INSERT	2		PADZZ
R				SERVICE REPAIR PART			
R				USE 0-2 AS REQUIRED			
R	- 38	4067146	52661	.. PIN-STRAIGHT HEADLESS	5		PADZZ
R				0.125 X 0.300 IN. LONG			
R				SERVICE REPAIR PART			
R				USE 0-5 AS REQUIRED			
R	- 39	4067144	52661	.. BUSHING-SLEEVE	3		PADZZ
R				0.700 X 0.78215 X 2.190 IN. LONG			
R				SERVICE REPAIR PART			
R				USE 0-3 AS REQUIRED			
R	- 40	4067145	52661	.. BUSHING-SLEEVE	2		PADZZ
R				0.440 X 0.56375 X 0.645 IN. LONG			
R				SERVICE REPAIR PART			
R				USE 0-2 AS REQUIRED			

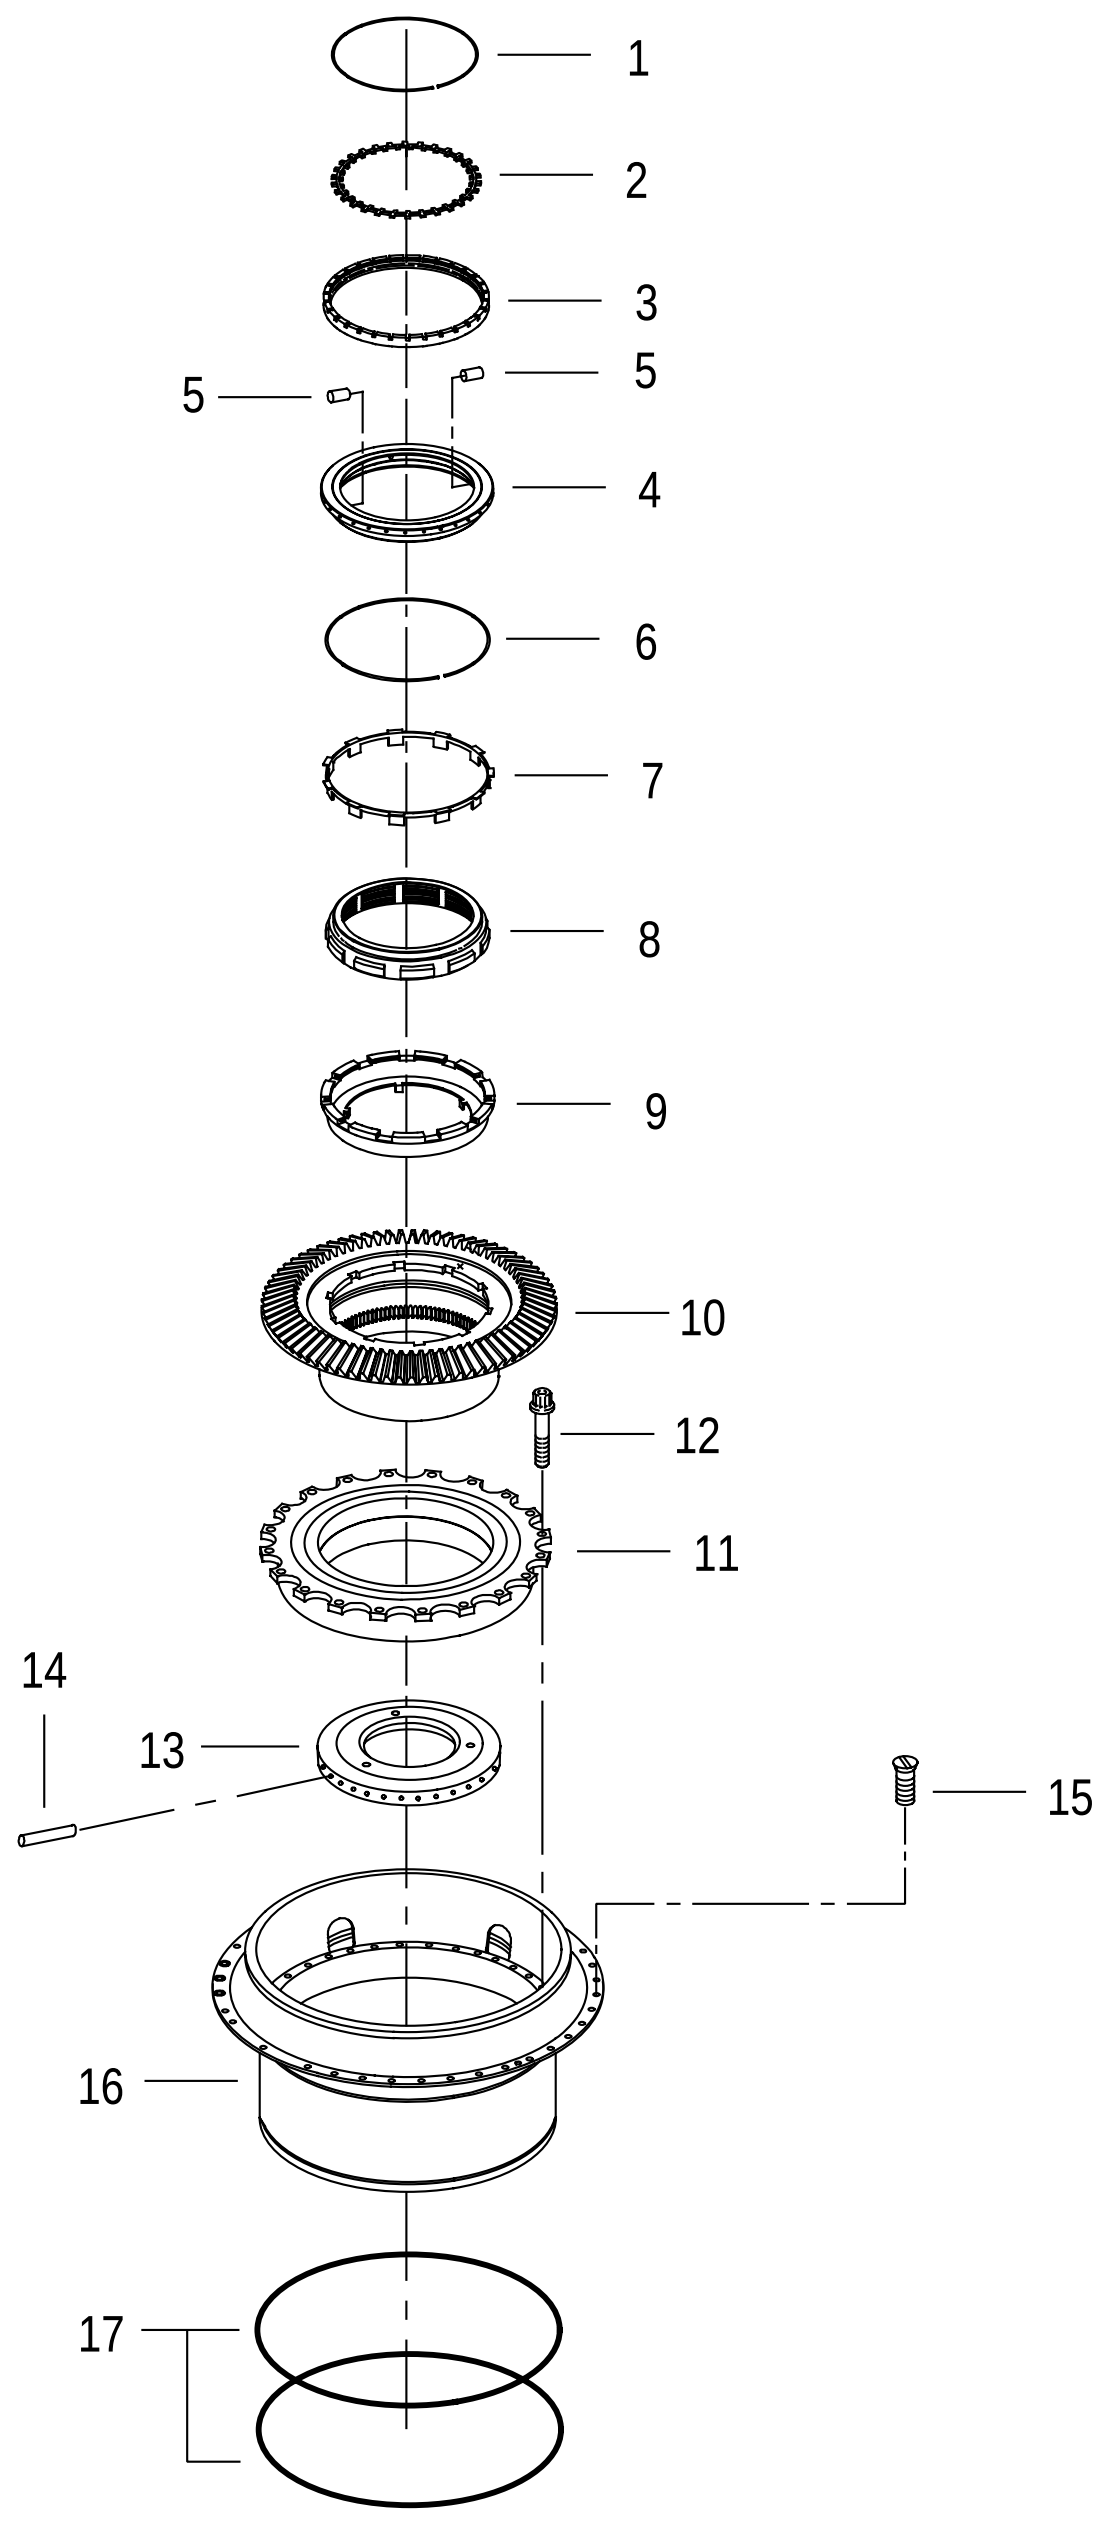


FIGURE 83. NO. 3 BEARING, SUPPORT ASSY, AND GEARBOX DRIVE BEVEL GEARSHAFT

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
83	NO NUMBER		NO. 3 BEARING, SUPPORT ASSY, AND GEARBOX . DRIVE BEVEL GEARSHAFT SEE FIG. 76-40 FOR NHA	REF		
- 1	4001862	52661	. RING-RETAINING .... 4.330 IN. HOUSING DIA X 0.062 IN. DIA WIRE	1		PAFZZ
- 2	4016982	52661	. WASHER-KEY .... 3.920 ID X 0.060 IN. THK	1		PAFZZ
- 3	4001860	52661	. NUT-BEARING RETAINING, INTERNALLY .... THREADED 4.250-16UNJS-3B X 0.600 IN. THK	1		PAFZZ
- 4	4022669	52661	. SEAT ASSY-NO. 3 BEARING SEAL, FRONT .... PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 5	4022667	52661	.. PIN-STRAIGHT, HEADLESS .... 0.12455 X 0.210 IN. LONG	2		PAFZZ
	4059198	52661	.. PIN-STRAIGHT, HEADLESS .... 0.13855 DIA X 0.210 IN. LONG SERVICE REPAIR PART	2		PAFZZ
- 6	4001865	52661	. RING-RETAINING .... 6.135 IN. HOUSING DIA X 0.0625 IN. DIA WIRE	1		PAFZZ
- 7	4022400	52661	. WASHER-KEY .... 5.750 ID X 0.043 IN. THK	1		PAFZZ
- 8	4001863	52661	. NUT-BEARING RETAINING, INTERNALLY .... THREADED 5.0625-16UNJS-3B X 1.040 IN. THK	1		PAFZZ
- 9	4037897	52661	. LOCK-NO. 3 BEARING	1		PAFBZ
- 10	4069346	52661	. GEARSHAFT-BEVEL, GEARBOX DRIVE, 73	1		PAFDD
- 11	4075314	52661	. BEARING OPTION-NO. 3 .... SEE OPTION TABLE	1		PAFLD
- 12	MS9895-08	96906	. BOLT (AP)	20		PAFZZ
- 13	4022668	52661	. SEAT ASSY-NO. 3 BEARING SEAL, REAR .... PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 14	4022667	52661	.. PIN-STRAIGHT, HEADLESS .... 0.12455 X 0.210 IN. LONG	2		PAFZZ
	4059198	52661	.. PIN-STRAIGHT, HEADLESS .... 0.13855 DIA X 0.210 IN. LONG SERVICE REPAIR PART	2		PAFZZ
- 15	4001891	52661	. SCREW-MACHINE, COUNTERSUNK .... 0.190-32UNJF-3A X 0.688 IN. LONG	5		PAFZZ
- 16	4075136	52661	. SUPPORT-NO. 3 BEARING, ASSY OF	1		PAFDD
- 17	AS3209-177	81343	. PACKING-PREFORMED	2		PAFZZ

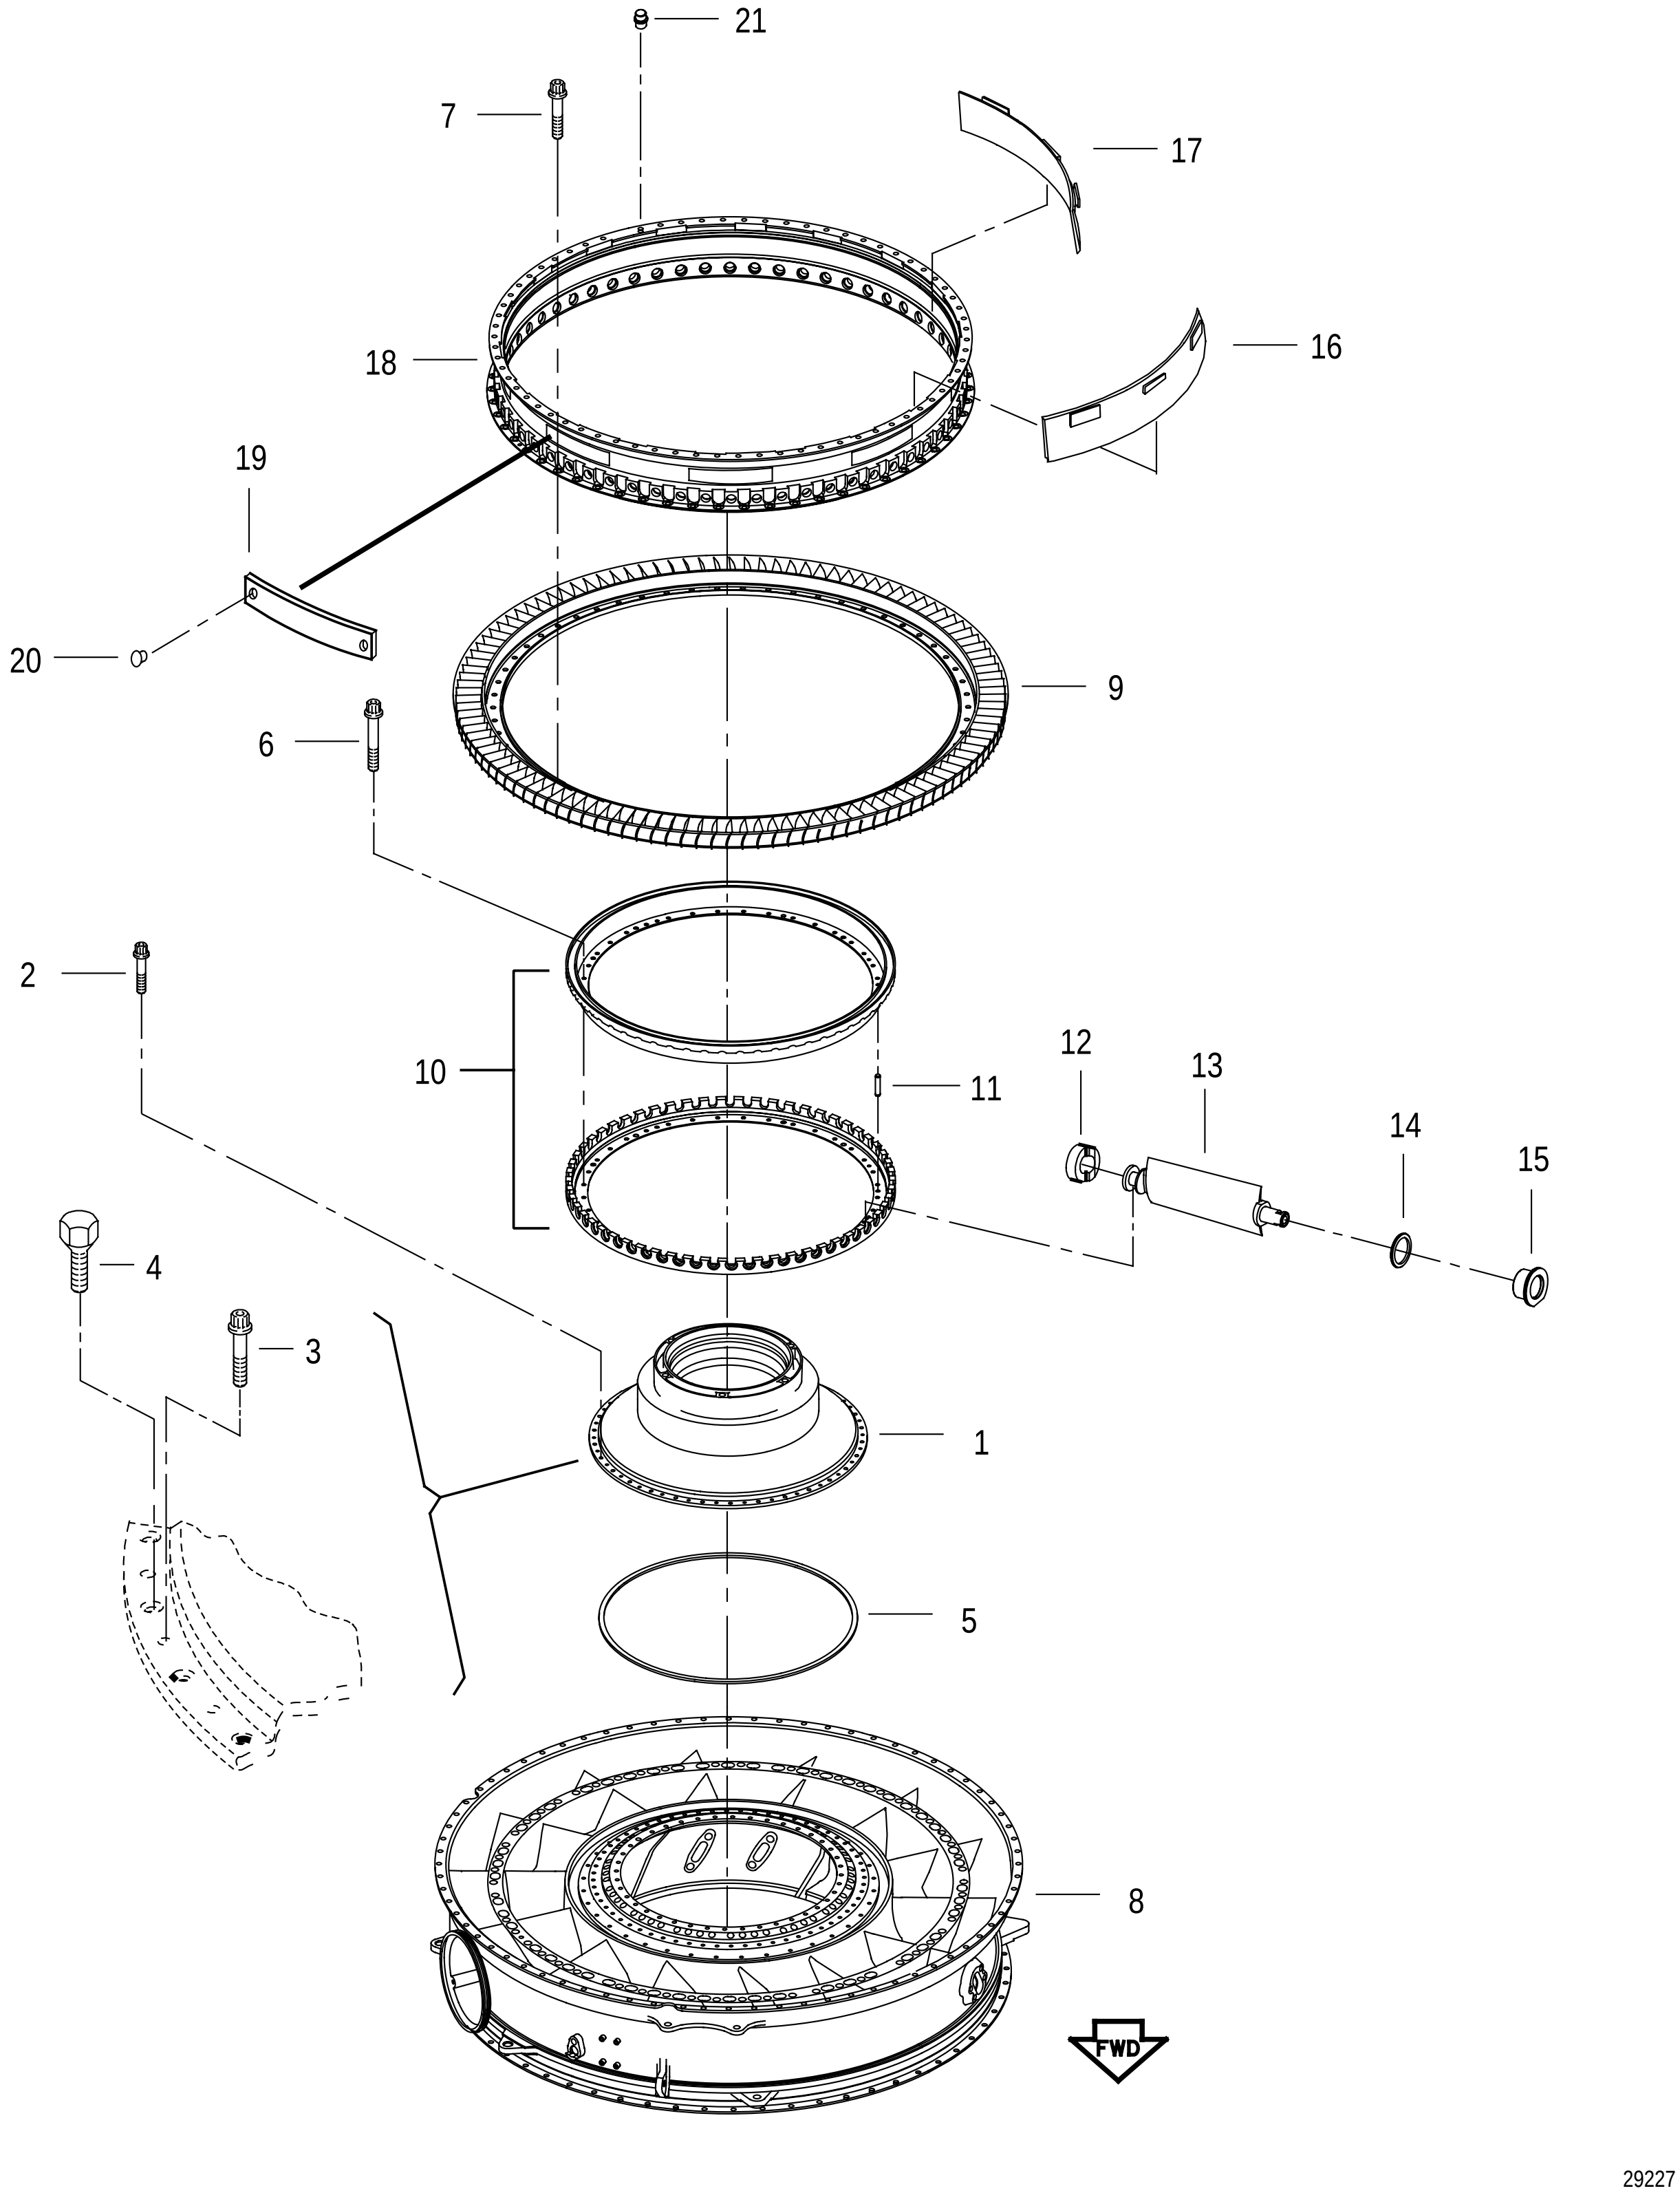


FIGURE 84. NO. 3 BEARING REAR SEAL ASSY, REAR COMPRESSOR STATOR VARIABLE INLET VANES, EXIT FAN STATOR, AND COMPRESSOR INTERMEDIATE CASE ASSY

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	84		NO NUMBER		NO. 3 BEARING REAR SEAL ASSY, REAR .... COMPRESSOR STATOR VARIABLE INLET VANES, EXIT FAN STATOR, AND COMPRESSOR INTERMEDIATE CASE ASSY SEE FIG. 76-41 FOR NHA	REF		
	- 1		4075036-01	52661	. SEAL ASSY-NO. 3 BEARING REAR .... SEE FIG. 93 FOR DETAIL PARTS	1	LX/LZ/MB/ MD/MF/ MH	AFF
		=	4068215	52661	. SEAL ASSY-NO. 3 BEARING REAR .... SEE FIG. 93 FOR DETAIL PARTS	1	LY/MA/MC/ ME/MG/ MJ	AFF
		=	4080875-01	52661	. SEAL ASSY-NO. 3 BEARING REAR .... SEE FIG. 93 FOR DETAIL PARTS	1	LY/MA/MC/ ME/MG/ MJ	AFF
	- 2		MS9741-07	96906	. BOLT (AP) .... FOR 4075036-1	60	LX/LZ/MB/ MD/MF/ MH	PAFZZ
	- 3		MS9741-07	96906	. BOLT (AP) .... FOR 4068215 AND 4080875-01	30	LY/MA/MC/ ME/MG/ MJ	PAFZZ
	- 4		4080809	52661	. BOLT-MACHINE, COUNTERSUNK HEX .... 0.190-32UNJF-3A X 0.675 IN. LONG (AP) FOR 4068215 AND 4080875-01	30	LY/MA/MC/ ME/MG/ MJ	PAFZZ
	- 5		4038728	52661	. GASKET-SPIRAL WOUND, ASSY OF .... 15.045 ID X 15.375 OD	1		PAFZZ
	- 6		ST2605-05	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX .... 0.190-32UNJF-3A X 0.438 IN. LONG	36		PAFZZ
	- 7		ST2601-12	52661	. BOLT-MACHINE, DOUBLE HEX .... 0.250-28UNJF-3A X 0.875 IN. LONG	58		PAFZZ
R	- 8	=	4078245	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF ... USE ONLY ON 4068722-801, -803, 4082657-801, AND -803 SEE FIG. 94 FOR DETAIL PARTS	1	LZ/ZM	PAFDD
R		=	4078248	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF ... USE ONLY ON 4068722-801, -803, 4082657-801, AND -803 SEE FIG. 94 FOR DETAIL PARTS	1	BL/DA/MB/ ZP	PAFDD
R			4079419	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF ... USE ONLY ON 4068722-806, -807, 4082657-806, AND -807 SEE FIG. 94 FOR DETAIL PARTS	1	BM/DB/LV/ MD/ZR	PAFDD
R			4080483	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF ... USE ONLY ON 4068722-806, -807, 4082657-806, AND -807 SEE FIG. 94 FOR DETAIL PARTS	1	LW/LX/MF/ MH/ZT	PAFDD
R			4080829	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF ... USE ONLY ON 4068722-806, -807, 4082657-806, AND -807 SEE FIG. 94 FOR DETAIL PARTS	1	LY/MG/MJ/ AAB	PAFDD
R			4080877	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF ... USE ONLY ON 4068722-801, -803, 4082657-801, AND -803 SEE FIG. 94 FOR DETAIL PARTS	1	MA/ZV	PAFDD
R			4080879	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF ... USE ONLY ON 4068722-801, -803, 4082657-801, AND -803 SEE FIG. 94 FOR DETAIL PARTS	1	MC/ZX	PAFDD
R			4080882	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF ... USE ONLY ON 4068722-806, -807, 4082657-806, AND -807 SEE FIG. 94 FOR DETAIL PARTS	1	ME/ZZ	PAFDD
R R R R			4084430	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF ... USE ONLY ON 4068722-801, -803, 4082657-801, AND -803 SEE FIG. 94 FOR DETAIL PARTS	1	ZN	PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	84 - 8	4084431	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . USE ONLY ON 4068722-801, -803, 4082657-801, AND -803 SEE FIG. 94 FOR DETAIL PARTS	1	ZQ	PAFDD
R		4084432	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . USE ONLY ON 4068722-806, -807, 4082657-806, AND -807 SEE FIG. 94 FOR DETAIL PARTS	1	ZS	PAFDD
R		4084433	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . USE ONLY ON 4068722-806, -807, 4082657-806, AND -807 SEE FIG. 94 FOR DETAIL PARTS	1	ZU	PAFDD
R		4084434	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . USE ONLY ON 4068722-801, -803, 4082657-801, AND -803 SEE FIG. 94 FOR DETAIL PARTS	1	ZW	PAFDD
R		4084435	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . USE ONLY ON 4068722-801, -803, 4082657-801, AND -803 SEE FIG. 94 FOR DETAIL PARTS	1	ZY	PAFDD
R		4084436	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . USE ONLY ON 4068722-806, -807, 4082657-806, AND -807 SEE FIG. 94 FOR DETAIL PARTS	1	AAA	PAFDD
R		4084443	52661	. CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . USE ONLY ON 4068722-806, -807, 4082657-806, AND -807 SEE FIG. 94 FOR DETAIL PARTS	1	AAC	PAFDD
	- 9	4070947	52661	. FAN STATOR-EXIT	1		PAFDD
	- 10	4076790-01	52661	. SHROUD SET-REAR COMPRESSOR STATOR, ... INLET PARTIAL BREAKDOWN FOLLOWS	1		PAFLD
	- 11	647178	52661	.. PIN-STRAIGHT, HEADLESS . . . . 0.1246 X 0.500 IN. LONG	1		PAFZZ
	- 12	4076924	52661	. BEARING OPTION . . . . SEE OPTION TABLE	58		PAFZZ
	- 13	4077250	52661	. VANE-REAR COMPRESSOR STATOR, VARIABLE . . INLET	58		PAFDD
	- 14	4066816	52661	. WASHER-BEARING, THRUST . . . . 0.500 ID X 0.650 OD X 0.040 IN. THK	58		PAFZZ
	- 15	4074448	52661	. BEARING OPTION . . . . SEE OPTION TABLE	58		PAFZZ
	- 16	4076124-01	52661	. DUCT SEGMENT-COMPRESSOR, 4TH STAGE	3	CW	PAFDD
		4078484-01	52661	. DUCT SEGMENT-COMPRESSOR, 4TH STAGE	3	EW/MP	PAFDD
		4081672-01	52661	. DUCT SEGMENT-COMPRESSOR, 4TH STAGE	3	EW/MM/MQ	PAFDD
		4082871-01	52661	. DUCT SEGMENT-COMPRESSOR, 4TH STAGE	3	MN	PAFDD
	- 17	4076124-02	52661	. DUCT SEGMENT-COMPRESSOR, 4TH STAGE	3	CW	PAFDD
		4078484-02	52661	. DUCT SEGMENT-COMPRESSOR, 4TH STAGE	3	EW/MP	PAFDD
		4081672-02	52661	. DUCT SEGMENT-COMPRESSOR, 4TH STAGE	3	EW/MM/MQ	PAFDD
		4082871-02	52661	. DUCT SEGMENT-COMPRESSOR, 4TH STAGE	3	MN	PAFDD
	- 18	4075420	52661	. CASE-COMPRESSOR, 4TH STAGE, ASSY OF . . . . . . WHEN EXH USE 4079279	1		PAFDD
		4079279	52661	. CASE-COMPRESSOR, 4TH STAGE, ASSY OF . . . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
	- 19	4075421	52661	.. BUMPER-REAR COMPRESSOR CASE . . . . USE ONLY ON 4075420	8		PADZZ
		4079278	52661	.. BUMPER-REAR COMPRESSOR CASE . . . . USE ONLY ON 4079279	8		PADZZ
	- 20	MS9318-052	96906	.. RIVET (AP)	2		PAFZZ
	- 21	2181046	52661	.. PIN-SHOULDER, HEADLESS . . . . 0.18705 AND 0.245 X 0.395 IN. LONG	1		PADZZ

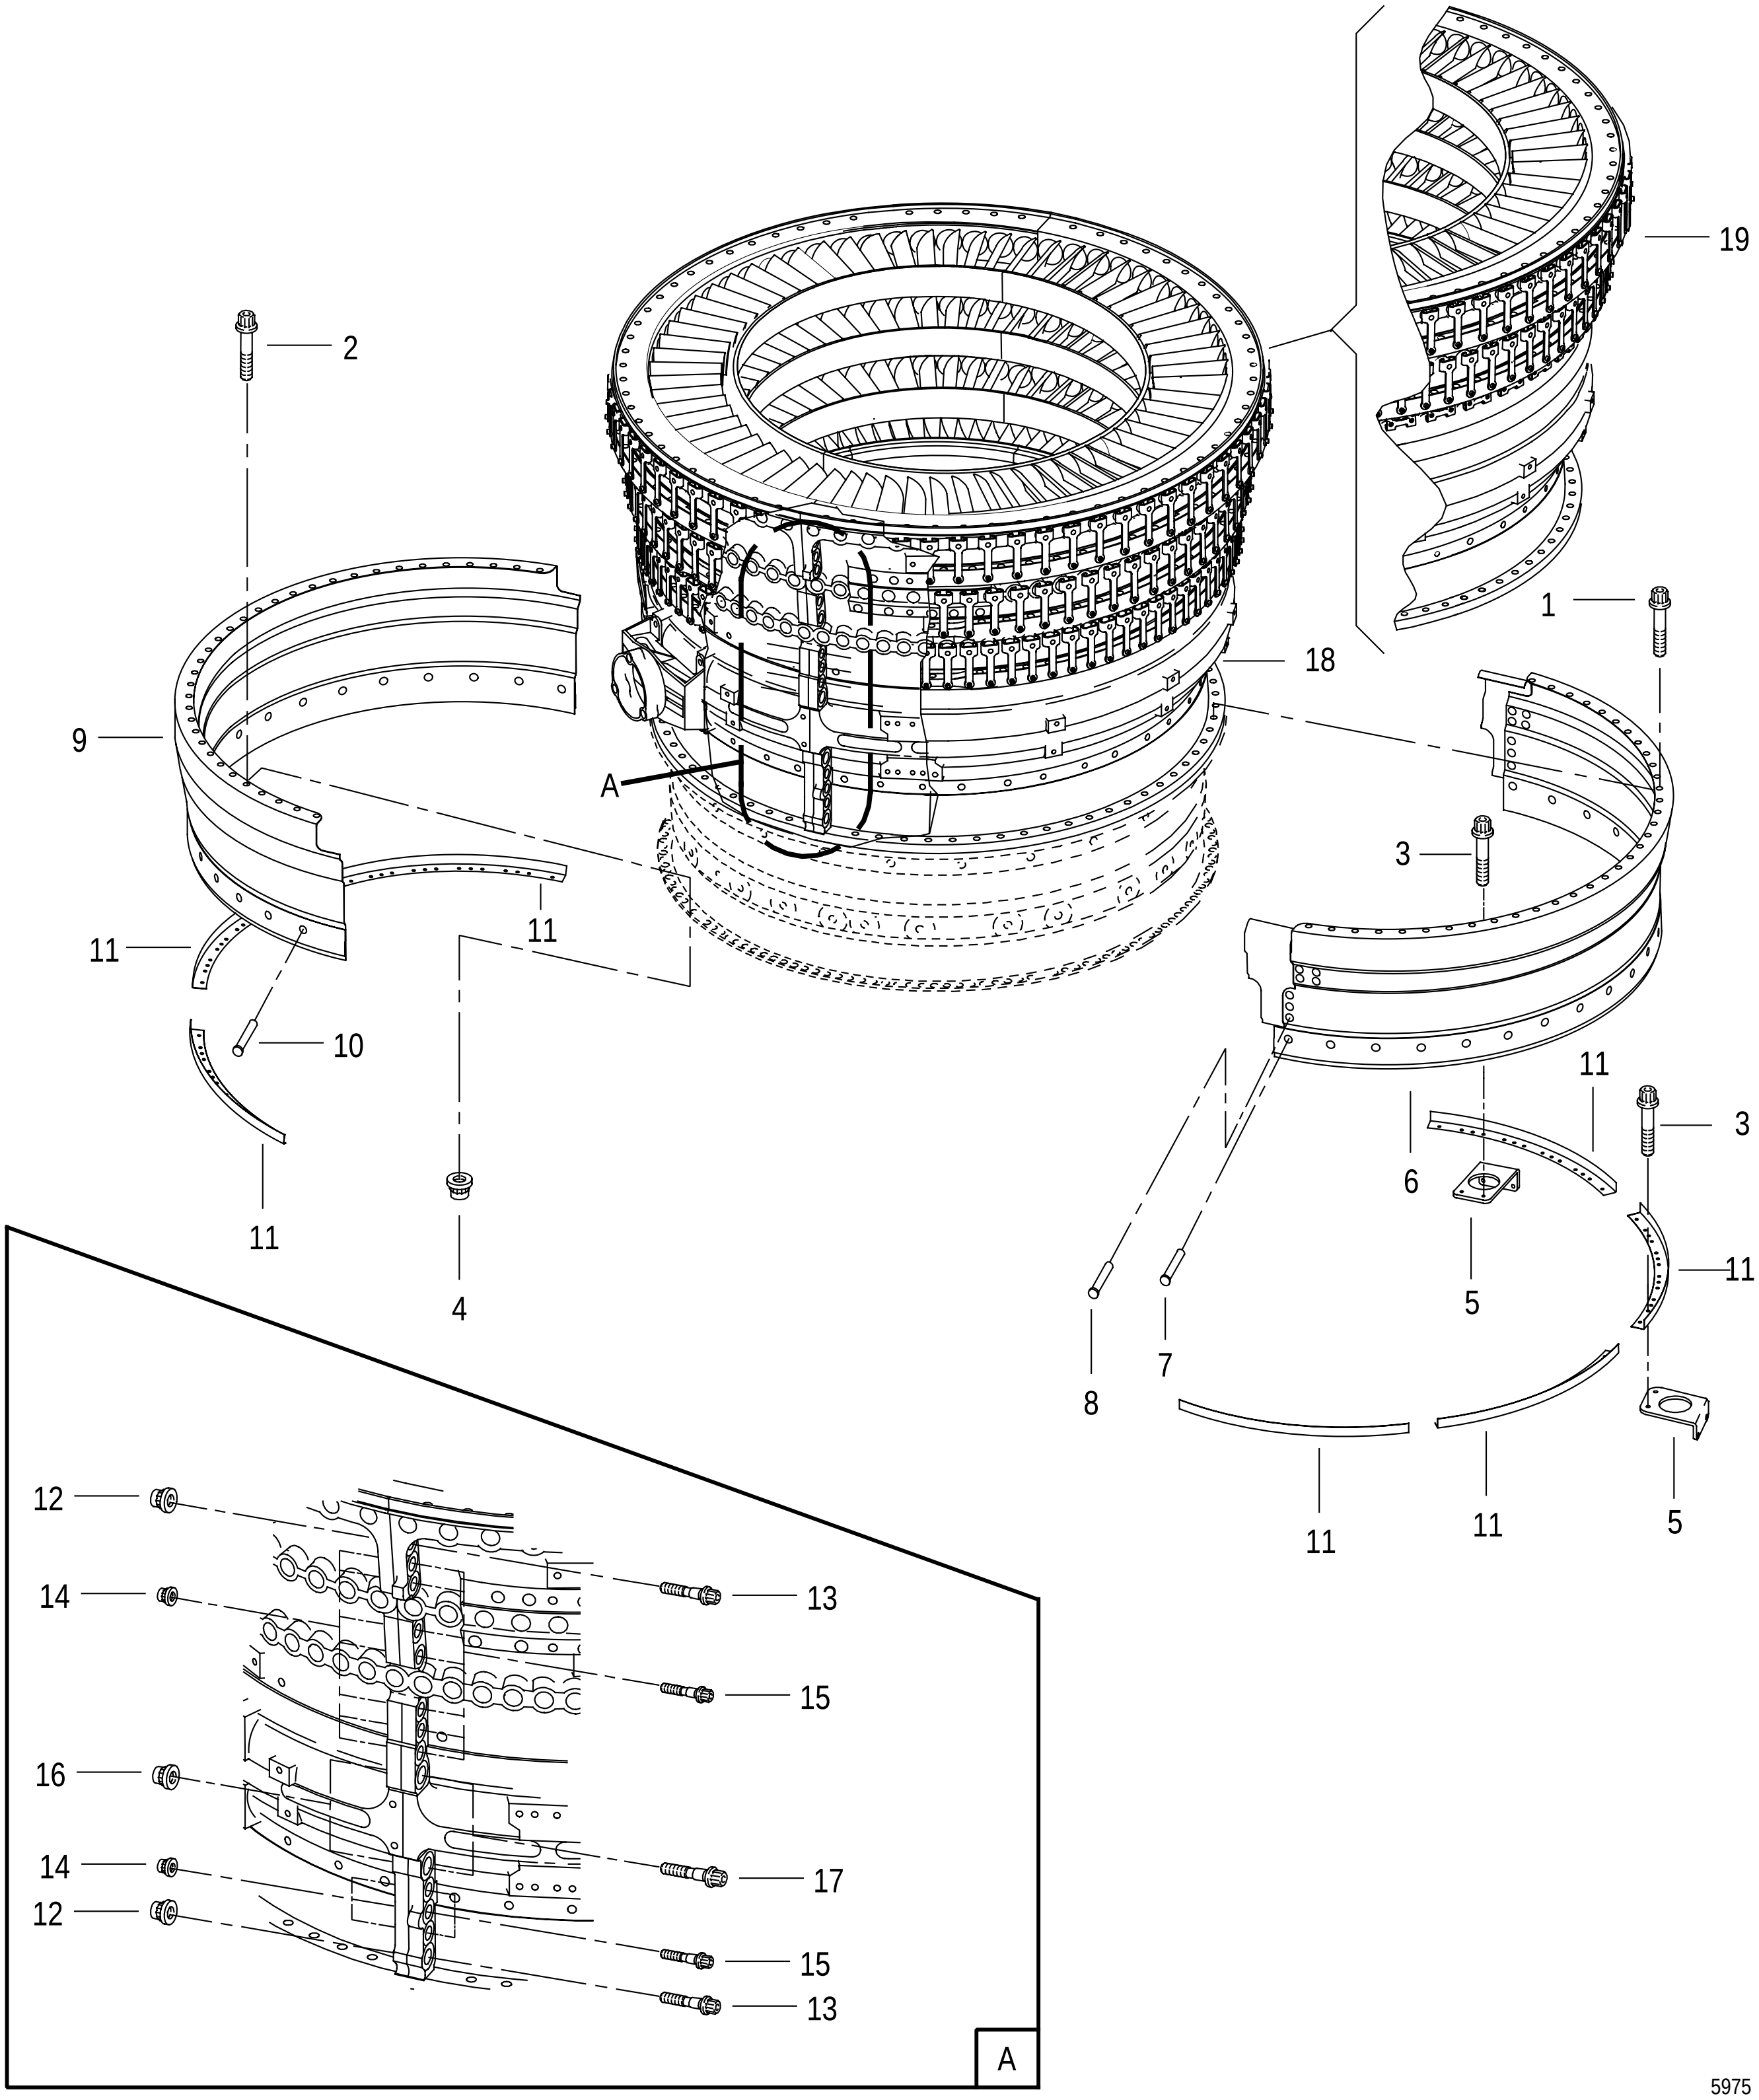


FIGURE 85. SPLIT CASE BOLTS, 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY, AND COMPRESSOR STATOR HEAT SHIELDS

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	85		NO NUMBER		SPLIT CASE BOLTS, 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY, AND COMPRESSOR STATOR HEAT SHIELDS SEE FIG. 76-42 FOR NHA	REF		
	- 1		ST2601-14	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 1.000 IN. LONG	68	AU	PAFZZ
			MS9697-14	96906	. BOLT	68	AV	PAOZZ
	- 2		MS9724-08	96906	. BOLT	66	AU	PAFZZ
			MS9697-14	96906	. BOLT	66	AV	PAOZZ
	- 3		MS9724-08	96906	. BOLT	4	AU	PAFZZ
			MS9697-16	96906	. BOLT REPLACES MS9697-14	4	AV	PAOZZ
	- 4		ST2745-10	52661	. NUT OPTION SEE OPTION TABLE	70	AU	PAFZZ
			4023466	52661	. NUT OPTION SEE OPTION TABLE	70	AV	PAFZZ
R	- 5		4060449	52661	. BRACKET-ANGLE	2	AAZ	PAFZZ
R			4084824	52661	. BRACKET-ANGLE	2	ABA	PAFZZ
	- 6		4077646-01	52661	. SHIELD-HEAT, COMPRESSOR STATOR, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
	- 7		AN123334	88044	.. RIVET	18		PAFZZ
	- 8		AN123318	88044	.. RIVET	14		PAFZZ
	- 9		4077646-02	52661	. SHIELD-HEAT, COMPRESSOR STATOR, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
	- 10		AN123334	88044	.. RIVET	18		PAFZZ
	- 11		4077647	52661	. SHIELD SEGMENT-COMPRESSOR STATOR	7		PAFZZ
	- 12		83533-720	56878	. NUT-SELF-LOCKING, DOUBLE HEX 0.4375-20UNJF-3B X 0.7375 IN. THK P&WA PART NO. ST2343-13	4		PAFZZ
	- 13		4070922	52661	. BOLT-EXTERNALLY RELIEVED BODY, DOUBLE HEX 0.4375-20UNJF-3A X 1.745 IN. LONG	4		PAFZZ
	- 14		83533-624	56878	. NUT-SELF-LOCKING, DOUBLE HEX 0.3750-24UNJF-3B X 0.6375 IN. THK P&WA PART NO. ST2343-12	20		PAFZZ
	- 15		4069321	52661	. BOLT-EXTERNALLY RELIEVED BODY, DOUBLE HEX 0.375-24UNJF-3A X 1.645 IN. LONG	20		PAFZZ
	- 16		83533-820	56878	. NUT-SELF-LOCKING, DOUBLE HEX 0.500-20UNJF-3B X 0.8225 IN. THK P&WA PART NO. ST2343-14	4		PAFZZ
	- 17		4069371	52661	. BOLT-EXTERNALLY RELIEVED BODY, DOUBLE HEX 0.500-20UNJF-3A X 1.810 IN. LONG	4		PAFZZ
	- 18	=	4077081-01	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) USE ONLY ON 4068722-801, -806, 4082657-801, AND -806 WHEN EXH USE 4077081-03 SEE FIG. 95 FOR DETAIL PARTS	1	AN/CX	ADD
		=	4077081-03	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) USE ONLY ON 4068722-801, -806, 4082657-801, AND -806 SEE FIG. 95 FOR DETAIL PARTS	1	AN/CX/PH	ADD
			4079595-08	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) USE ONLY ON 4068722-801, -806, 4082657-801, AND -806 SEE FIG. 95 FOR DETAIL PARTS	1	AN/CX/PJ/ PK	ADD

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	85 - 18		4079595-09	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) USE ONLY ON 4068722-801, -806, 4082657-801, AND -806 SEE FIG. 95 FOR DETAIL PARTS	1	AN/CX/PL/ PM/PP	ADD
			4079595-10	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) USE ONLY ON 4068722-801, -806, 4082657-801, AND -806 SEE FIG. 95 FOR DETAIL PARTS	1	AN/EX/PN	ADD
			4079595-07	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) USE ONLY ON 4068722-801, -806, 4082657-801, AND -806 SEE FIG. 95 FOR DETAIL PARTS	1	AN/EX/PQ	ADD
R	- 19	=	4080084-03	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4077081-03 DO NOT PROCURE FROM P&WA USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/CX/YT	ADD
R		=	4080084-04	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4077081-01 DO NOT PROCURE FROM P&WA USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/AQ/CX/ ZB	ADD
R			4080084-08	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4080084-04 DO NOT PROCURE FROM P&WA USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/AR/CX/ YZ	ADD
R			4080084-02	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4079595-08 DO NOT PROCURE FROM P&WA USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/CX/EY/ YR	ADD
R			4080084-06	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4080084-02 DO NOT PROCURE FROM P&WA USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/CX/EZ/ YX	ADD
R			4080084-01	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4079595-09 DO NOT PROCURE FROM P&WA USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/CX/KA/ YP	ADD
R			4080084-05	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4080084-01 DO NOT PROCURE FROM P&WA USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/CX/KB/ YV	ADD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
85 - 19	4080302-01	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/EX	ADD
	4080302-02	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803 AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/BQ/EX/ LG/LJ	ADD
	4080302-04	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803 AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/BQ/EX/ LH	ADD
	4079598-06	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803 AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/BQ/EX/ LK/NL	ADD
	= 4079598-07	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803 AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/BQ/EX/ NM	ADD
	= 4079598-09	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803 AND -807 SUPERSEDED BY 4084254-01 SEE FIG. 96 FOR DETAIL PARTS	1	AP/BQ/EX/ MM/NM	ADD
	4084254-01	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SUPERSEDES 4079598-09 SEE FIG. 96 FOR DETAIL PARTS	1		ADD
	4079598-11	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 96 FOR DETAIL PARTS	1	MN	ADD
R	4077081-17	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	AP/CX/YQ	ADD
R	4077081-18	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	YS	ADD
R	4077081-19	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	YU	ADD
R	4077081-20	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	ZC	ADD
R	4077081-23	52661	. CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	YW	ADD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R R R R R	85 - 19	4077081-24	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	YY	ADD
R R R R R		4077081-26	52661	. CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) USE ONLY ON 4068722-803, -807, 4082657-803, AND -807 SEE FIG. 96 FOR DETAIL PARTS	1	ZA	ADD

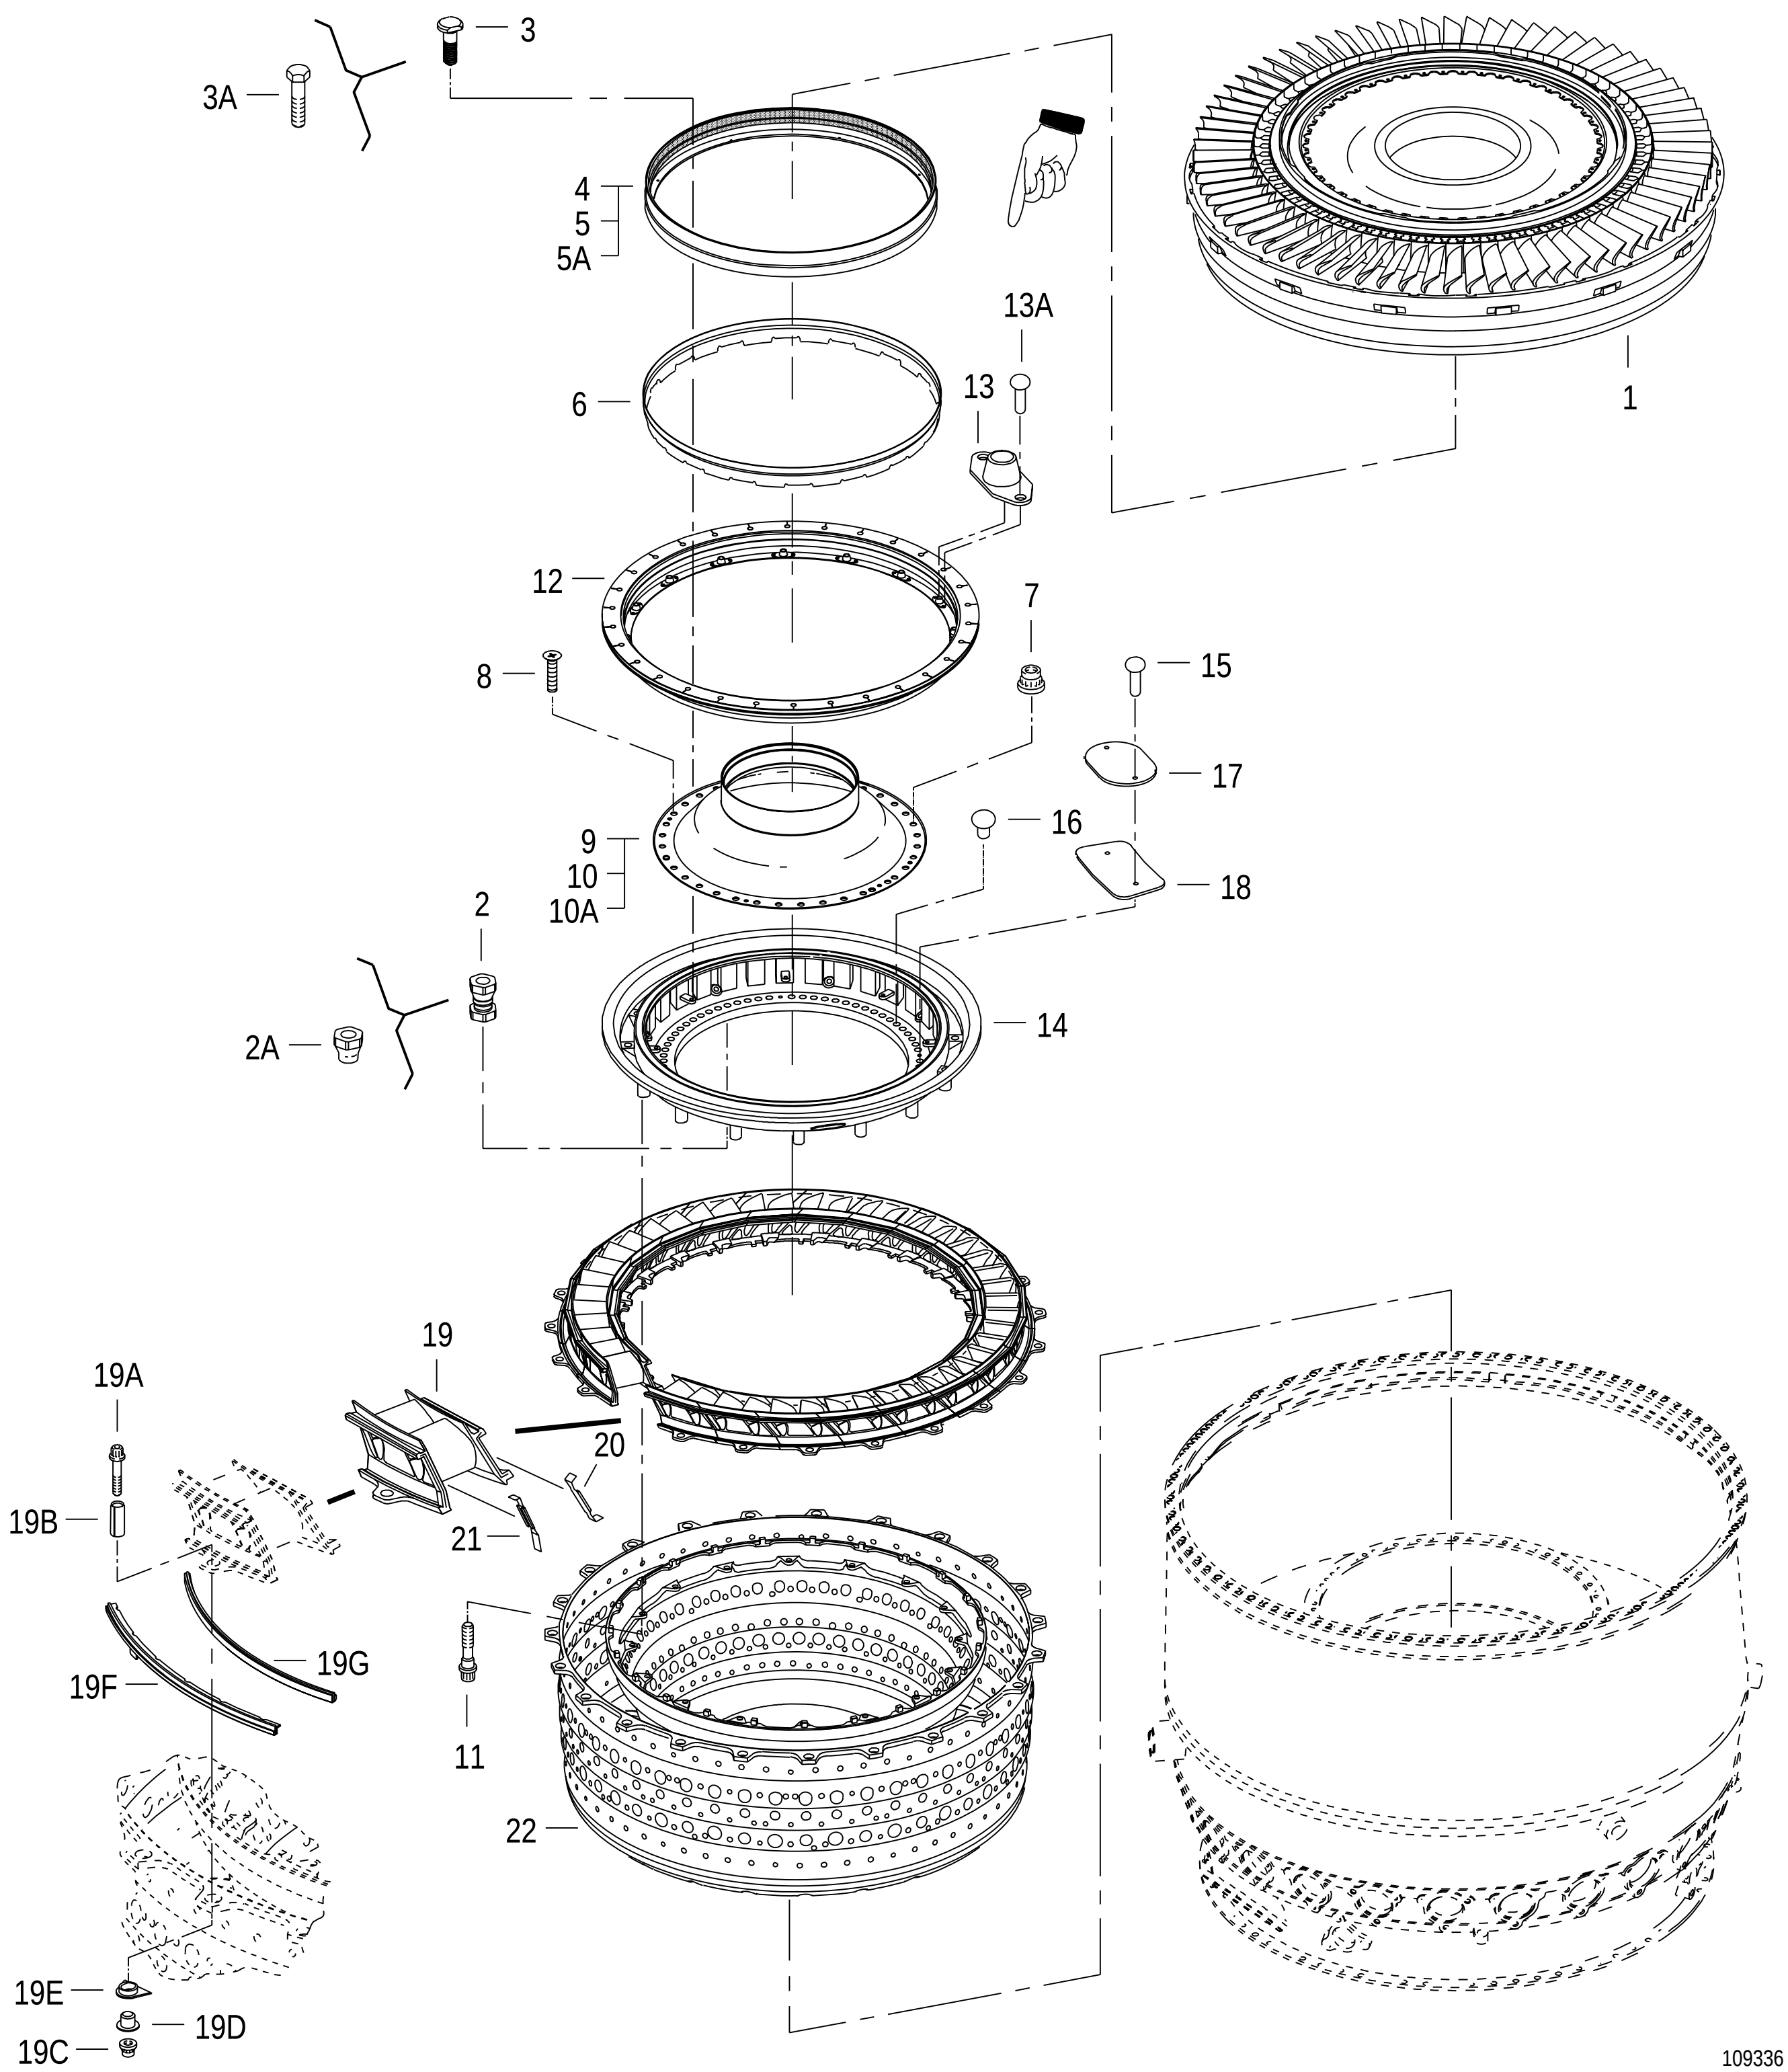


FIGURE 86. REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR ASSY, 1ST STAGE TURBINE STATOR SUPPORT, VANES, INNER AIR SEALING RING, AND COMBUSTION CHAMBER

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
86	NO NUMBER		REAR COMPRESSOR DRIVE TURBINE ROTOR ..... AND STATOR ASSY, 1ST STAGE TURBINE STATOR SUPPORT, VANES, INNER AIR SEALING RING, AND COMBUSTION CHAMBER SEE FIG. 76-43 FOR NHA	REF		
- 1	4068717-700	52661	. ROTOR AND STATOR ASSY-TURBINE, REAR ...... COMPRESSOR DRIVE SEE FIG. 99 FOR DETAIL PARTS	1	N	PAFDD
	4068717-701	52661	. ROTOR AND STATOR ASSY-TURBINE, REAR ...... COMPRESSOR DRIVE SEE FIG. 99 FOR DETAIL PARTS	1	P	PAFDD
	4068717-702	52661	. ROTOR AND STATOR ASSY-TURBINE, REAR ...... COMPRESSOR DRIVE USE ONLY ON 4068722-811 SEE FIG. 99 FOR DETAIL PARTS	1		PAFDD
	4084517-700	52661	. ROTOR AND STATOR ASSY-TURBINE, REAR ...... COMPRESSOR DRIVE USE ONLY ON 4084522-800, -801, -802, AND 4082657-808 SEE FIG. 99 FOR DETAIL PARTS	1		PAFDD
	4083015-700	52661	. ROTOR AND STATOR ASSY-TURBINE, REAR ...... COMPRESSOR DRIVE USE ONLY ON 4082654-802 SEE FIG. 99 FOR DETAIL PARTS	1		PAFDD
	4083015-701	52661	. ROTOR AND STATOR ASSY-TURBINE, REAR ...... COMPRESSOR DRIVE USE ONLY ON 4082654-803 SEE FIG. 99 FOR DETAIL PARTS	1		PAFDD
R R R R	4068717-703	52661	. ROTOR AND STATOR ASSY-TURBINE, REAR ...... COMPRESSOR DRIVE USE ONLY ON 4068722-812 SEE FIG. 99 FOR DETAIL PARTS	1		PAFDD
- 2	HL599KF-5	56878 73197	. COLLAR-PIN-RIVET, THREADED, SELF-LOCKING .. 0.164-32UNJC-3B X 0.490 IN. LONG P&WA PART NO. 4061774 SUPERSEDED BY H54475-08 AND 76467-832	8		PAFZZ
- 2A	= H54475-08	15653	. NUT-SELF-LOCKING, HEX .... P&WA PART NO. 4082753-01 SUPERSEDES HL599KF-5	8		PAFZZ
	= 76467-832	56878	. NUT-SELF-LOCKING, HEX .... P&WA PART NO. 4082753-01 SUPERSEDES HL599KF-5	8		PAFZZ
R	4083241	52661	. NUT-SELF-LOCKING, HEX .... 0.190-32 X 0.280 IN. USE ONLY ON 4068722-812, 4084522-800, -801, -802, 4082654-803, AND 4082657-808	8		PAFZZ
- 3	= 4069895	52661	. PIN-THREADED, FLAT .... 0.164-32UNJC-3A X 0.188 IN. GRIP	8		PAFZZ
	= HL722-5-3	0ZZV1 56878 73197 92215	. PIN-RIVET-THREADED, SLAB .... 0.164-32UNJC-3A X 0.188 IN. GRIP P&WA PART NO. 4077452	8		PAFZZ
- 3A R	4084102	52661	. BOLT-MACHINE, HEX .... 0.190-32 X 0.505 IN. USE ONLY ON 4068722-812, 4084522-800, -801, -802, 4082654-803, AND 4082657-808	8		PAFZZ
- 4	= 4070004-01	52661	. RING-AIR SEALING, TURBINE, 1ST STAGE, ASSY .. OF	1		PAFDD
	= 4080430-01	52661	. RING-AIR SEALING, TURBINE, 1ST STAGE, ASSY .. OF	1		PAFDD
	4083559-01	52661	. RING-AIR SEALING, TURBINE, 1ST STAGE, ASSY .. OF USE ONLY ON 4084522-801 AND -802	1		PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
86 - 4	4083237-01	52661	. RING-AIR SEALING, TURBINE, 1ST STAGE, ASSY OF USE ONLY ON 4068722-812, 4084522-800, 4082654-803, AND 4082657-808 PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 5	4070004-02	52661	.. RING-AIR SEALING, TURBINE, 1ST STAGE USE ONLY ON 4070004-01	1		XA
	4080430-02	52661	.. RING-AIR SEALING, TURBINE, 1ST STAGE USE ONLY ON 4080430-01	1		XA
	4083559-02	52661	.. RING-AIR SEALING, TURBINE, 1ST STAGE USE ONLY ON 4083559-01	1		XA
	4083237-02	52661	.. RING-AIR SEALING, TURBINE, 1ST STAGE USE ONLY ON 4083237-01	1		XA
- 5A	4084073	52661	.. RING-CELLULAR, STRUCTURAL, TURBINE, 1ST STAGE SERVICE REPAIR PART FOR 4080430-01	1		PADZZ
- 6	4070702	52661	. SUPPORT-AIR SEALING RING, 1ST STAGE	1		PAFBZ
- 7	4069338	52661	. NUT OPTION SEE OPTION TABLE REPLACED BY 4301682	37		PAFZZ
	4301682	52661	. NUT OPTION SEE OPTION TABLE REPLACES 4069338	37		PAFZZ
- 8	ST2178-10	52661	. SCREW-MACHINE, COUNTERSUNK 0.190-32UNJF-3A X 0.625 IN. LONG	4	CY	PAFZZ
	ST2563-10	52661	. SCREW-MACHINE, COUNTERSUNK 0.190-32UNJF-3A X 0.625 IN. LONG	4	CZ	PAFZZ
- 9	4070980-01	52661	. RING-AIR SEALING, TURBINE, INNER, 1ST STAGE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 10	4070980-04	52661	.. DAMPER-RING, AIR SEALING, TURBINE, INNER, 1ST STAGE	1		PADZZ
- 10A	4084072	52661	.. RING-CELLULAR, STRUCTURAL, TURBINE, INNER, 1 STAGE SERVICE REPAIR PART	1		PADZZ
- 11	4080005	52661	. BOLT-SHOULDER, DOUBLE HEX 0.250-28UNJF-3A X 1.495 IN. LONG	16		PAFZZ
- 12	4080012-01	52661	. RING-AIR SEALING, TURBINE, OUTER, 1ST STAGE, ASSY OF	1	AAR	PAFDD
(R)	4082788-01	52661	. RING-AIR SEALING, TURBINE, OUTER, 1ST STAGE, ASSY OF SUPERSEDED BY 4085123-01	1	AAS	PAFDD
(R)	4085123-01	52661	. RING-AIR SEALING, TURBINE, OUTER, 1ST STAGE, ASSY OF SUPERSEDES 4082788-01 PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 13	ST2596-04	52661	.. NUT OPTION SEE OPTION TABLE	16		PAFZZ
(R) - 13A	AN123319	88044	.. RIVET	32		PAFZZ
- 14	4078357	52661	. SUPPORT-TURBINE STATOR, 1ST STAGE, ASSY OF	1	L	PAFDD
	= 4080080	52661	. SUPPORT-TURBINE STATOR, 1ST STAGE, ASSY OF	1	M	PAFDD
	= 4077398	52661	. SUPPORT-TURBINE STATOR, 1ST STAGE, ASSY OF	1	M	PAFDD
	4083563	52661	. SUPPORT-TURBINE STATOR, 1ST STAGE, ASSY OF	1		PAFDD
	4083556	52661	. SUPPORT-TURBINE STATOR, 1ST STAGE, ASSY OF USE ONLY ON 4084522-801	1		PAFDD
	4083970	52661	. SUPPORT-TURBINE STATOR, 1ST STAGE, ASSY OF USE ONLY ON 4068722-812, 4082654-803, 4082657-808, AND 4084522-800 PARTIAL BREAKDOWN FOLLOWS	1		PAFDD

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	86 - 15		AN123340	88044	.. RIVET . . . . USE ONLY ON 4078357 AND 4083563	8		PAFZZ
R			AN123336	88044	.. RIVET . . . . USE ONLY ON 4077398, 4080080, 4083556 AND 4083970	8		PAFZZ
R	- 16		AN123387	88044	.. RIVET . . . . USE ONLY ON 4078357 AND 4080080	3		PAFZZ
R R	- 17		4060764	52661	.. SEAL-TURBINE RING AND SUPPORT, 1ST STAGE . USE ONLY ON 4078357 AND 4083563	4		PAFZZ
R R	- 18		4033002	52661	.. SEAL-TURBINE RING AND SUPPORT, 1ST STAGE . USE ONLY ON 4080080, 4077398, 4083556 AND 4083970	4		PAFZZ
	- 19	=	4069391	52661	. VANE-TURBINE STATOR, 1ST STAGE, ASSY OF	23		PAFZZ
		=	4082991	52661	. VANE-TURBINE STATOR, 1ST STAGE, ASSY OF	23		PAFZZ
			4083091	52661	. VANE-TURBINE STATOR, 1ST STAGE, ASSY OF . . . . USE ONLY 4084522-800, -801, -802, 4082654-803, AND 4082657-808	23		PAFZZ
	- 19A		4083597	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.250-28 X 1.542 IN. USE ONLY ON 4084522-800, -801, -802, 4082654-803, AND 4082657-808	23		PAFZZ
	- 19B		4083942	52661	. SLEEVE-TURBINE, 1ST STAGE VANE . . . . USE ONLY ON 4084522-800, -801, -802, 4082654-803, AND 4082657-808	23		PAFZZ
	- 19C		ST2590-10	52661	. NUT OPTION . . . . USE ONLY ON 4084522-800, -801, -802, 4082654-803, AND 4082657-808 SEE OPTION TABLE	23		PAFZZ
	- 19D		4083690	52661	. SLEEVE-FRONT TURBINE CASE . . . . USE ONLY ON 4084522-800, -801, -802, 4082654-803, AND 4082657-808	23		PAFZZ
	- 19E		4083667	52661	. BUSHING-SLEEVE . . . . USE ONLY ON 4083194, 4083560, AND 4083565	23		PAFZZ
	- 19F		4083197-01	52661	. SEAL-BRUSH, COMBUSTION CHAMBER, OUTER, . . ASSY OF USE ONLY ON 4083194, 4083560, AND 4083565	1		PAFZZ
	- 19G		4082748-01	52661	. SEAL-BRUSH, COMBUSTION CHAMBER, INNER, . . . ASSY OF USE ONLY ON 4083194, 4083560, AND 4083565	1		PAFZZ
	- 20		4076201	52661	. SEAL-TURBINE STATOR, 1ST STAGE, ASSY OF	23		PAFZZ
			4084007	52661	. SEAL-TURBINE STATOR, 1ST STAGE, ASSY OF . . . . USE ONLY ON 4084522-800, -801, -802, 4082654-803, AND 4082657-808	23		PAFZZ
	- 21		4060982	52661	. SEAL-TURBINE STATOR, 1ST STAGE	23		PAFZZ
			4084008	52661	. SEAL-TURBINE STATOR, 1ST STAGE, ASSY OF . . . . USE ONLY ON 4084522-800, -801, -802, 4082654-803, AND 4082657-808	23		PAFZZ
	- 22		4077820	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	DC/DE	PAFDD
			4077232	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	DD/DG/DJ	PAFDD
			4079375	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	DH/DL	PAFDD
			4080008	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . REOP AND REID OF 4077820 DO NOT PROCURE FROM P&W SEE FIG. 100 FOR DETAIL PARTS	1	DF/XV/YB/ AAV	PAFDD
			4080575	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . REOP AND REID OF 4077232 DO NOT PROCURE FROM P&W SEE FIG. 100 FOR DETAIL PARTS	1	DK/XX/YD/ AAV	PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
86 - 22	4077670	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	DM/XZ/YF/ AAV	PAFDD
	4083214	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . REOP AND REID OF 4077670 SEE FIG. 100 FOR DETAIL PARTS DO NOT PROCURE FROM P&W	1	SJ/YG	PAFDD
	4083947	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	SK	PAFDD
	4083215	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . REOP AND REID OF 4080008 SEE FIG. 100 FOR DETAIL PARTS DO NOT PROCURE FROM P&W	1	SL/YC	PAFDD
	4083948	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	SM	PAFDD
	4083216	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . REOP AND REID OF 4080575 SEE FIG. 100 FOR DETAIL PARTS DO NOT PROCURE FROM P&W	1	SN/YE	PAFDD
	4083949	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	SP	PAFDD
	4083095	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	SQ/YA	PAFDD
	4083944	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	MR/SR	PAFDD
	4083127	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	SS/XW	PAFDD
	4083945	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	ST	PAFDD
	4083129	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	SU/XY	PAFDD
	4083946	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	SV	PAFDD
	4084089	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	MS	PAFDD
	4083194	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 100 FOR DETAIL PARTS	1	AAW	PAFDD
	4083560	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . USE ONLY ON 4084522-801 SEE FIG. 100 FOR DETAIL PARTS	1		PAFDD
	4083565	52661	. CHAMBER-COMBUSTION, ASSY OF . . . . USE ONLY ON 4084522-802 SEE FIG. 100 FOR DETAIL PARTS	1		PAFDD

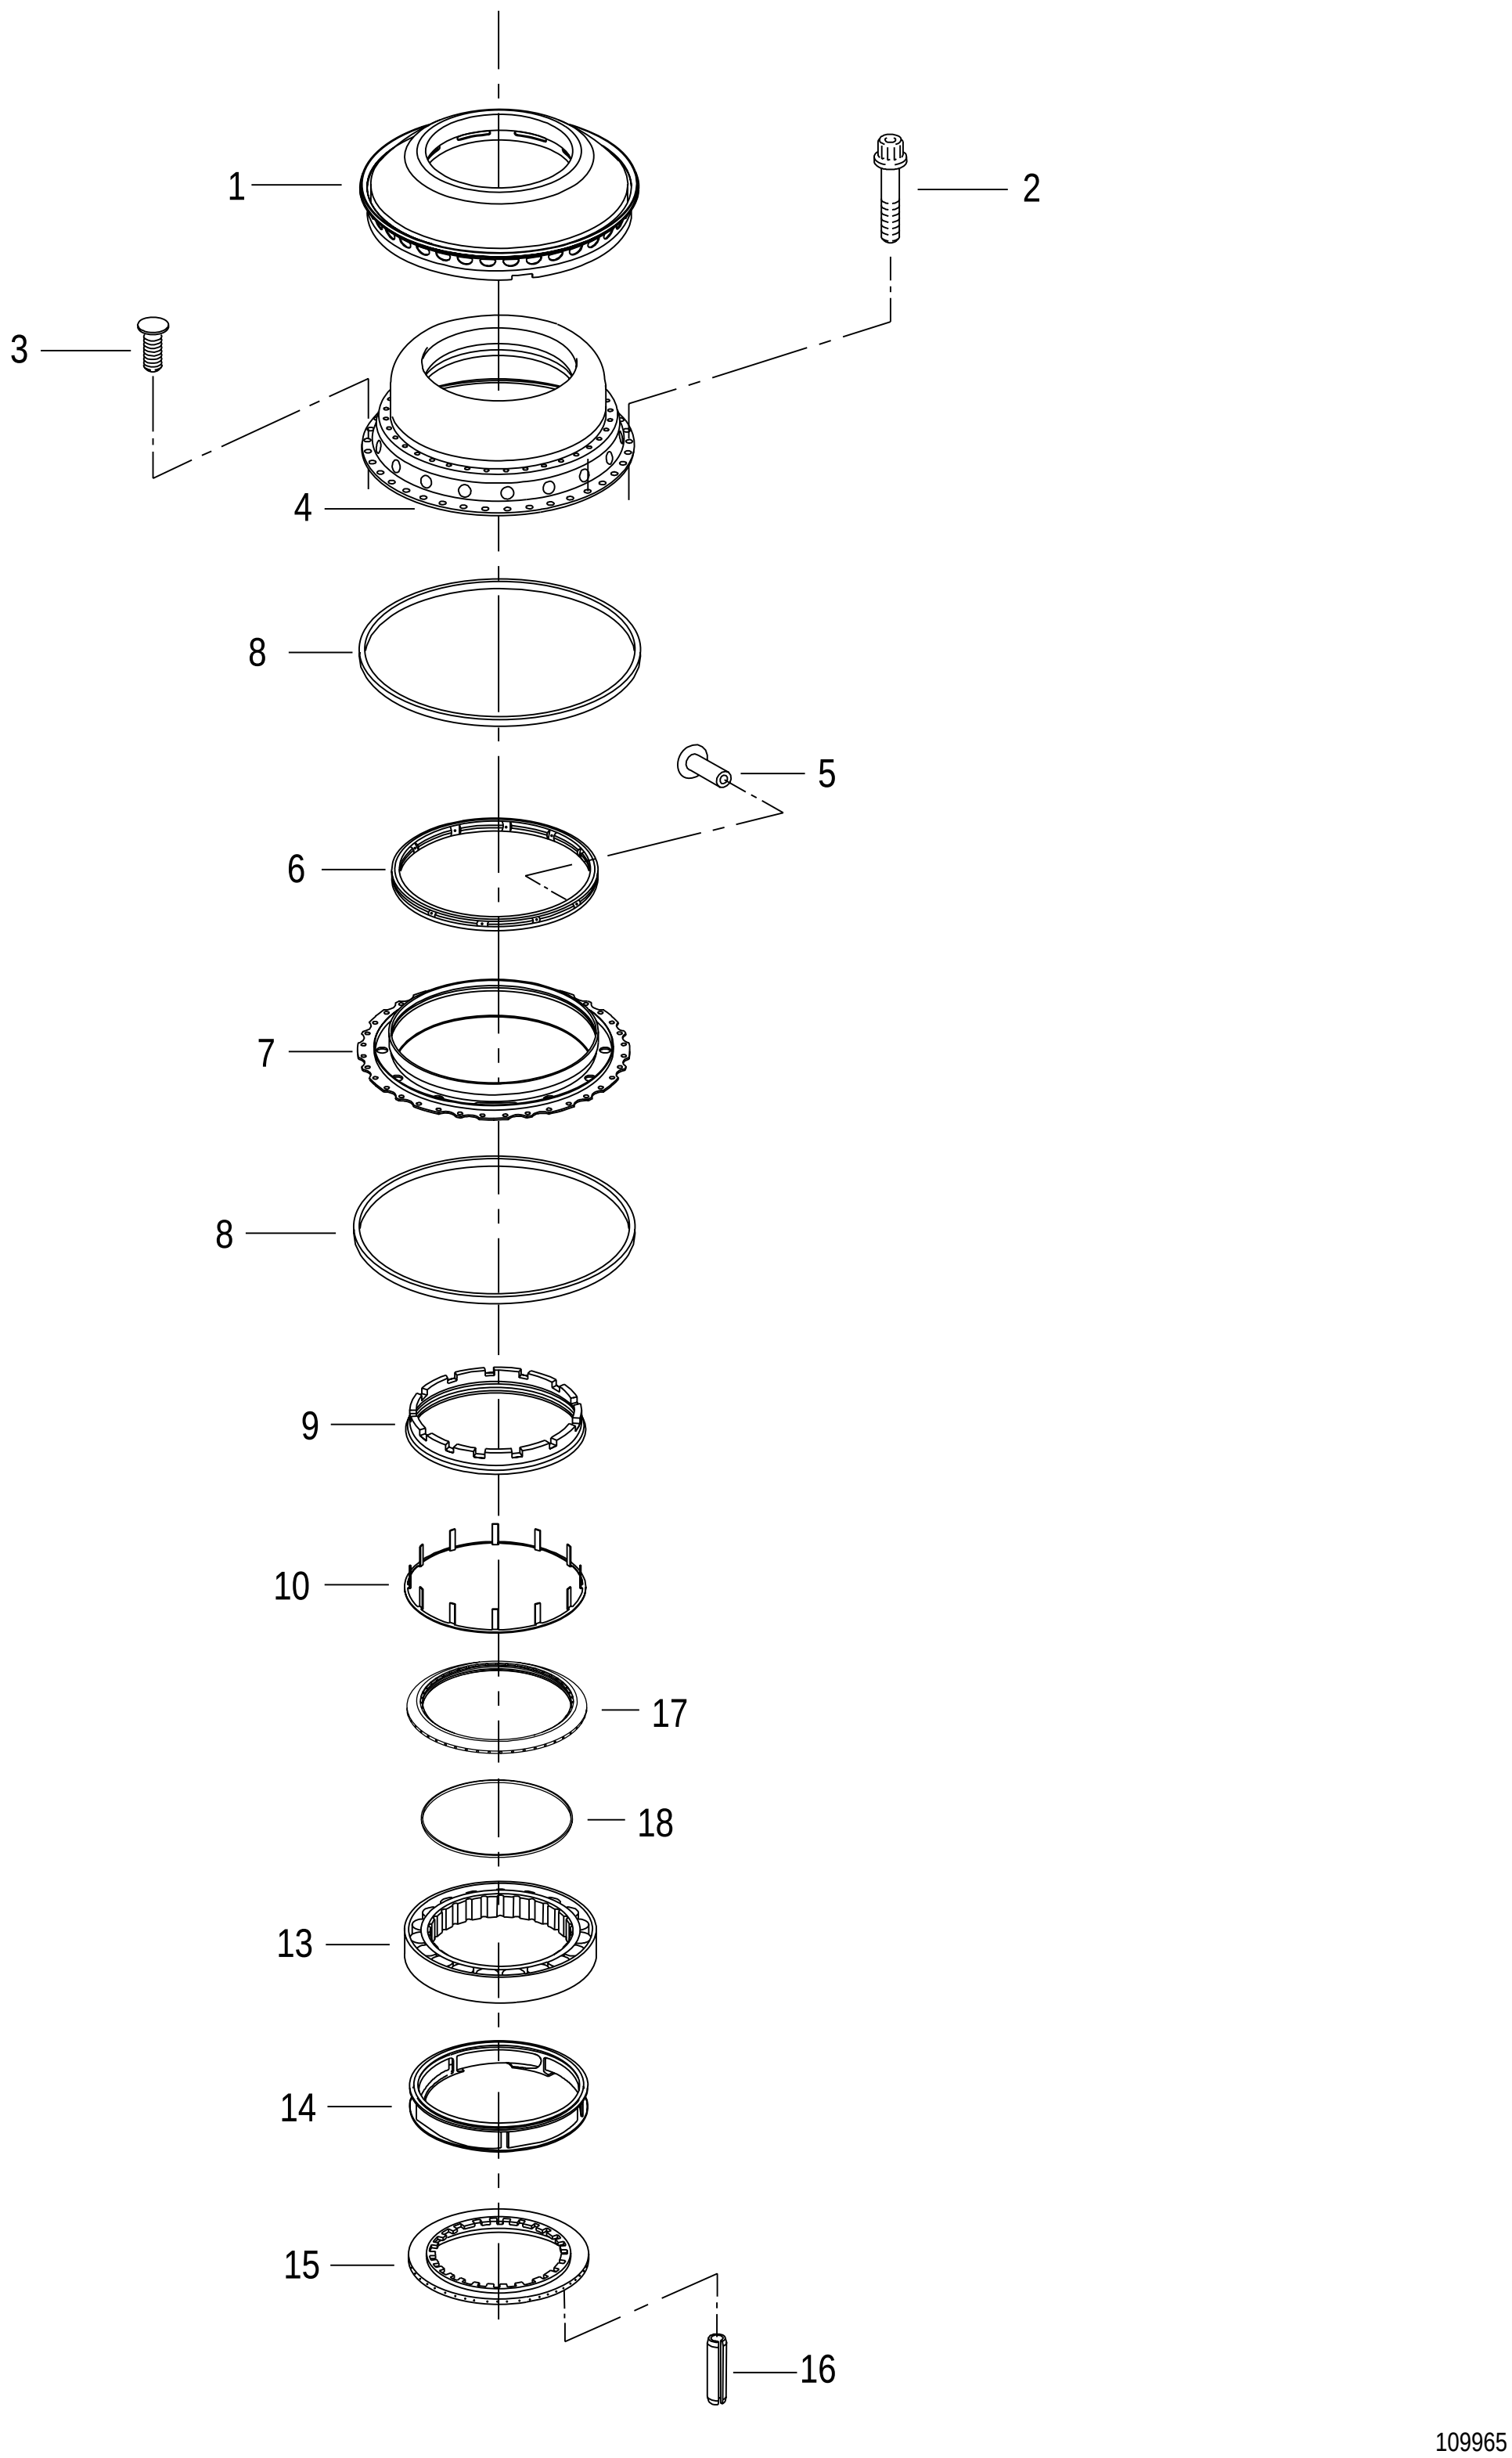


FIGURE 87. NO. 4 BEARING, NO. 4 BEARING AIR SEALING RING, REAR SEAL ASSY AND HOUSING

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	87		NO NUMBER		NO. 4 BEARING, NO. 4 BEARING AIR SEALING . . . . . RING, REAR SEAL ASSY AND HOUSING SEE FIG. 76-44 FOR NHA	REF		
	- 1		4075870-01	52661	. RING-AIR SEALING, NO. 4 BEARING, REAR, ASSY . OF	1		PAFLD
	- 2		MS9565-08	96906	. BOLT . . . . REPLACES ST2151-020	42		PAFZZ
	- 3		ST2178-06	52661	. SCREW-MACHINE, COUNTERSUNK . . . . 0.190-32UNJF-3A X 0.375 IN. LONG	2		PAFZZ
	- 4	=	4072349	52661	. SEAL ASSY-NO. 4 BEARING REAR . . . . SEE FIG. 101 FOR DETAIL PARTS	1		AFF
		=	4065871	52661	. SEAL ASSY-NO. 4 BEARING, REAR. . . . . SEE FIG. 101 FOR DETAIL PARTS	1		AFF
	- 5		4007054	52661	. RIVET-TUBULAR . . . . 0.094 DIA X 0.312 IN. LONG	1		PAFZZ
	- 6		4002513	52661	. NUT-BEARING RETAINING, EXTERNALLY . . . . THREADED 9.000-18UNJS-3A-LH X 0.305 IN. THK	1		PAFBZ
	- 7		4035897	52661	. HOUSING-NO. 4 BEARING	1		PAFLD
	- 8		4035921	52661	. GASKET-SPIRAL WOUND, ASSY OF . . . . 10.595 ID X 10.810 OD	2		PAFZZ
	- 9		4007568	52661	. NUT-BEARING RETAINING, INTERNALLY . . . . THREADED 6.4375-16UNJS-3B-LH X 0.810 IN. THK	1		PAFBZ
	- 10		4002452	52661	. WASHER-KEY . . . . 6.470 ID X 0.043 IN. THK	1		PAFZZ
R	- 11		DELETED					
R	- 12		DELETED					
	- 13		4059349	52661	. BEARING-NO. 4-OPTION . . . . SEE OPTION TABLE	1		PAFLD
	- 14		4032667	52661	. SCOOP-NO. 4 BEARING	1		PAFDD
	- 15		4032669	52661	. SEAT ASSY-NO. 4 BEARING SEAL, FRONT . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAFLD
	- 16		MS171432	96906	.. PIN	1		PADZZ
			MS171462	96906	.. PIN . . . . SERVICE REPAIR PART	1		PADZZ
R	- 17		4083144	52661	. SEAT-NO. 4 BEARING SEAL, REAR	1		PAFDD
R	- 18		4083151	52661	. SEAL-PLAIN . . . . 6.460 ID X 0.093 X 0.069 IN.	1		PAFZZ


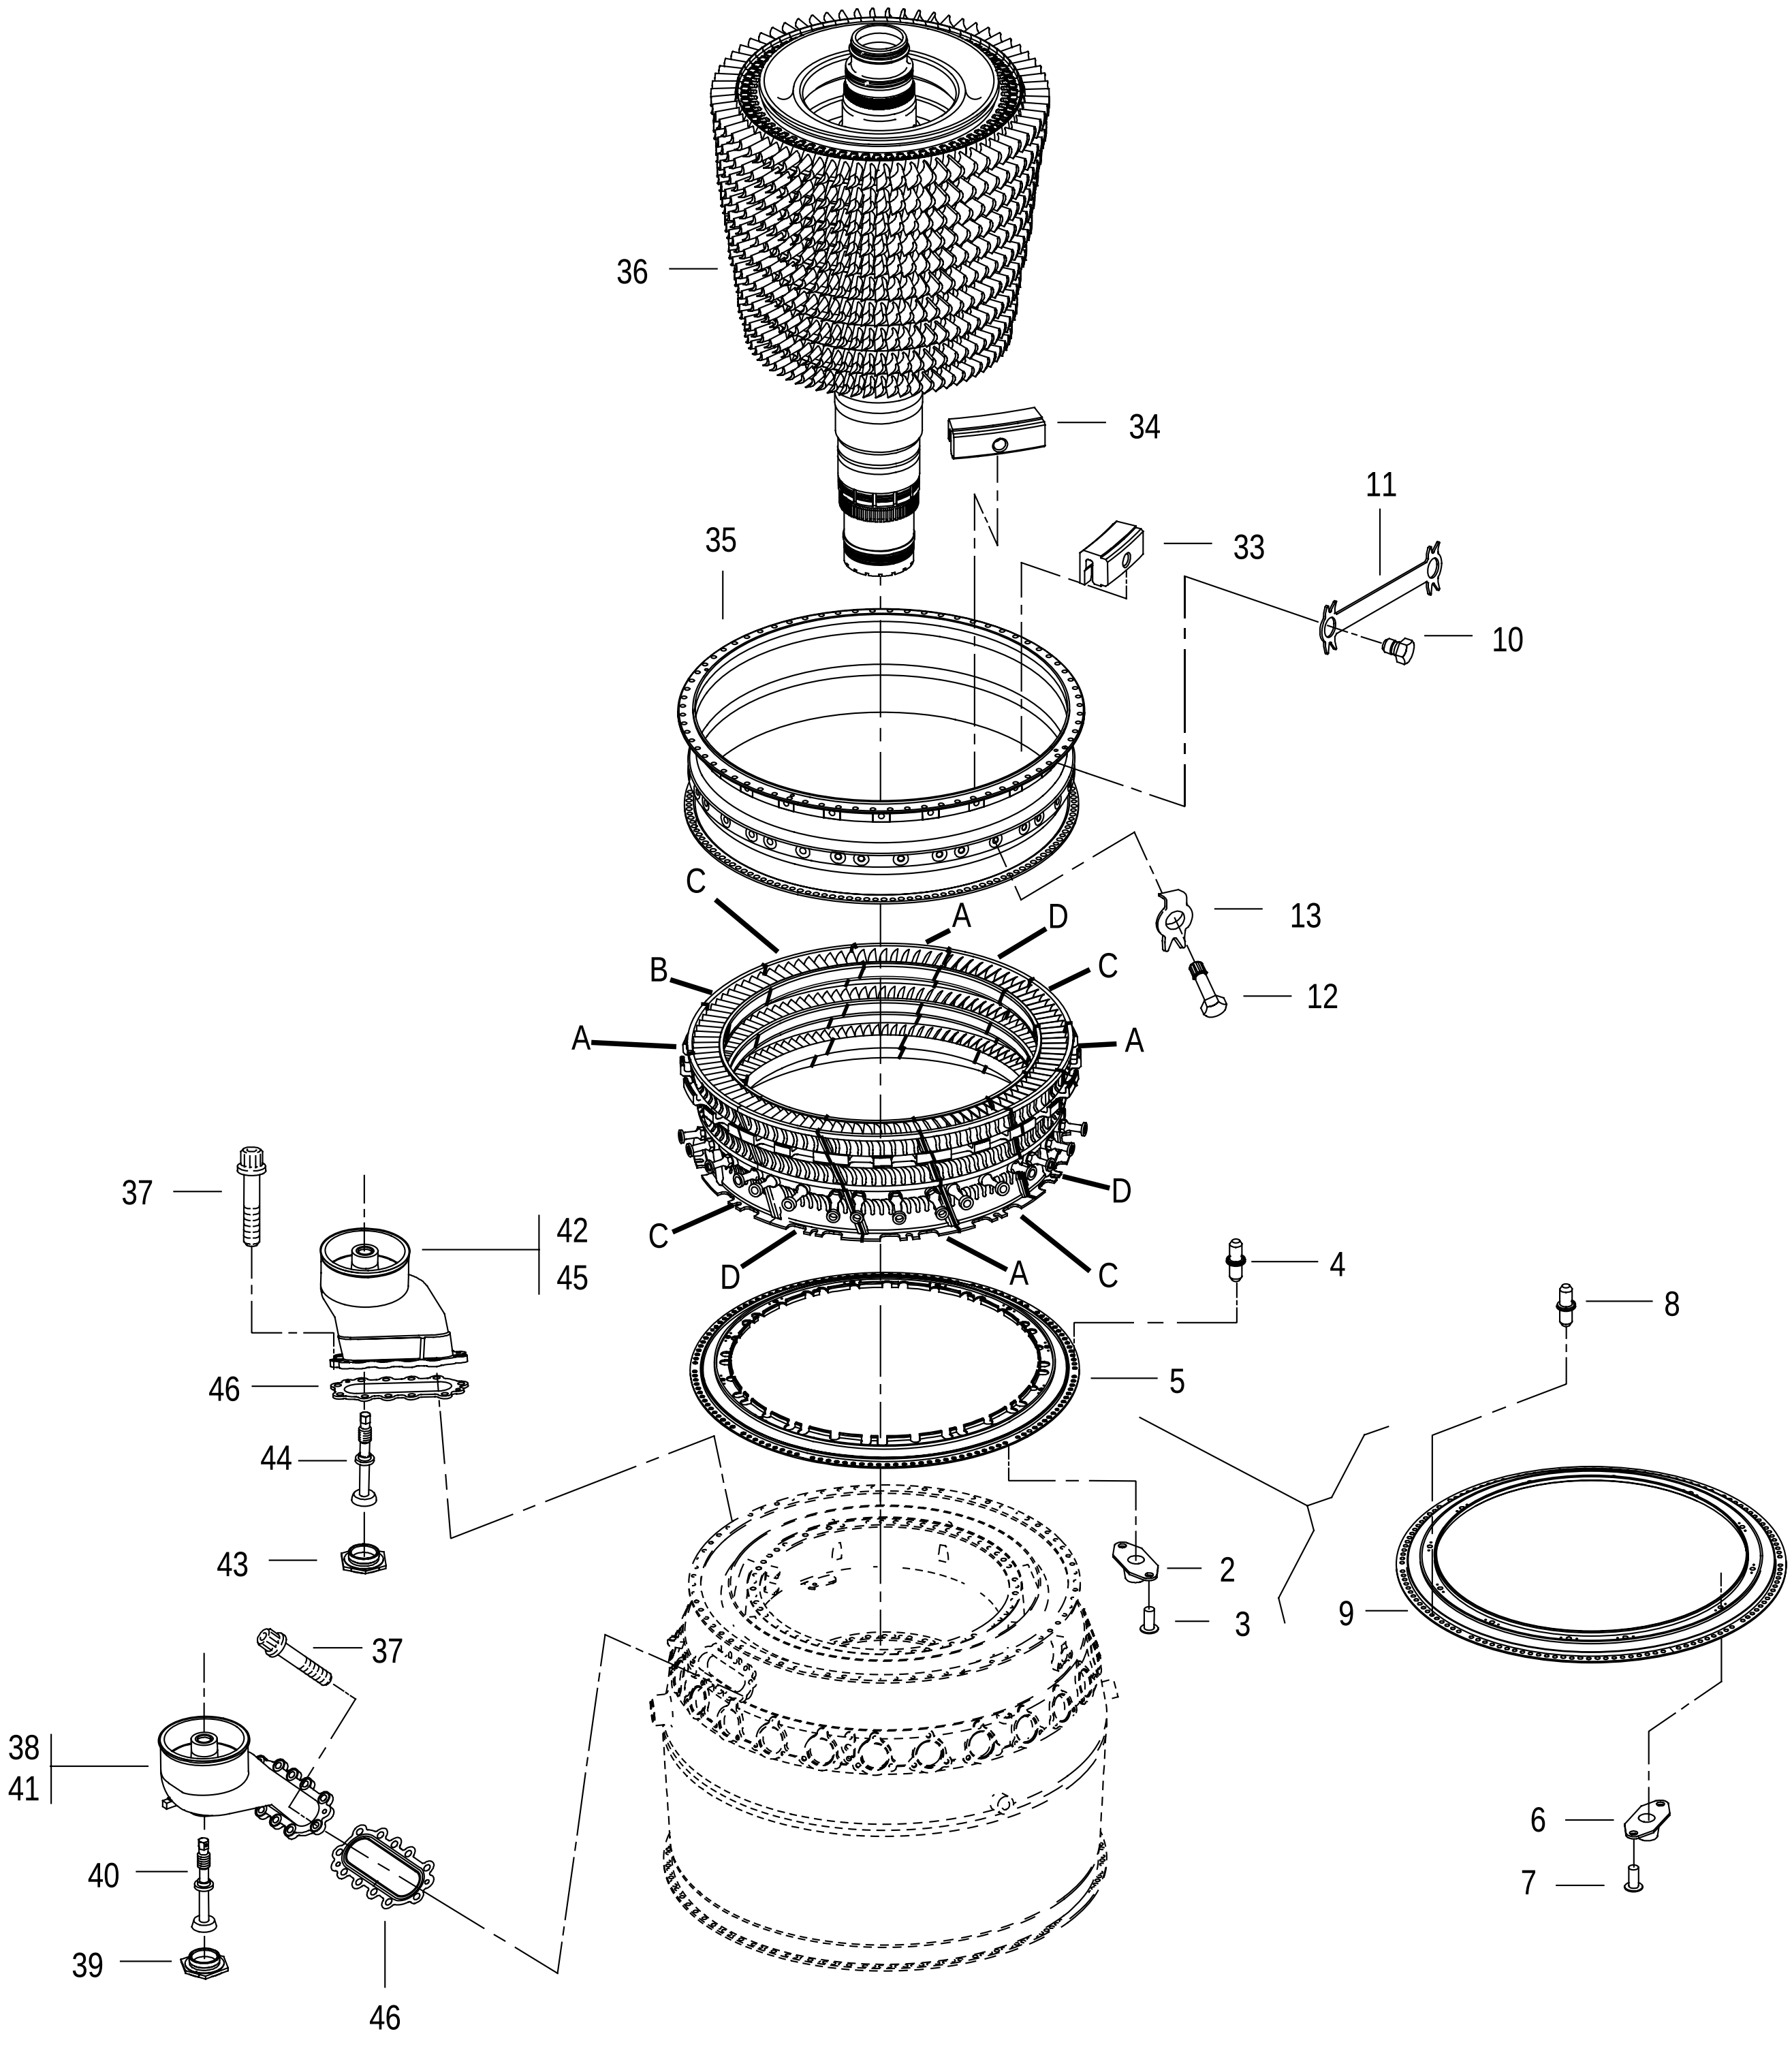


FIGURE 88. COMPRESSOR DISCHARGE MANIFOLDS, 10TH-12TH STAGE COMPRESSOR STATOR SEGMENTS AND CASE ASSY, AND COMPRESSOR ROTOR ASSY (SHEET 1 OF 2)

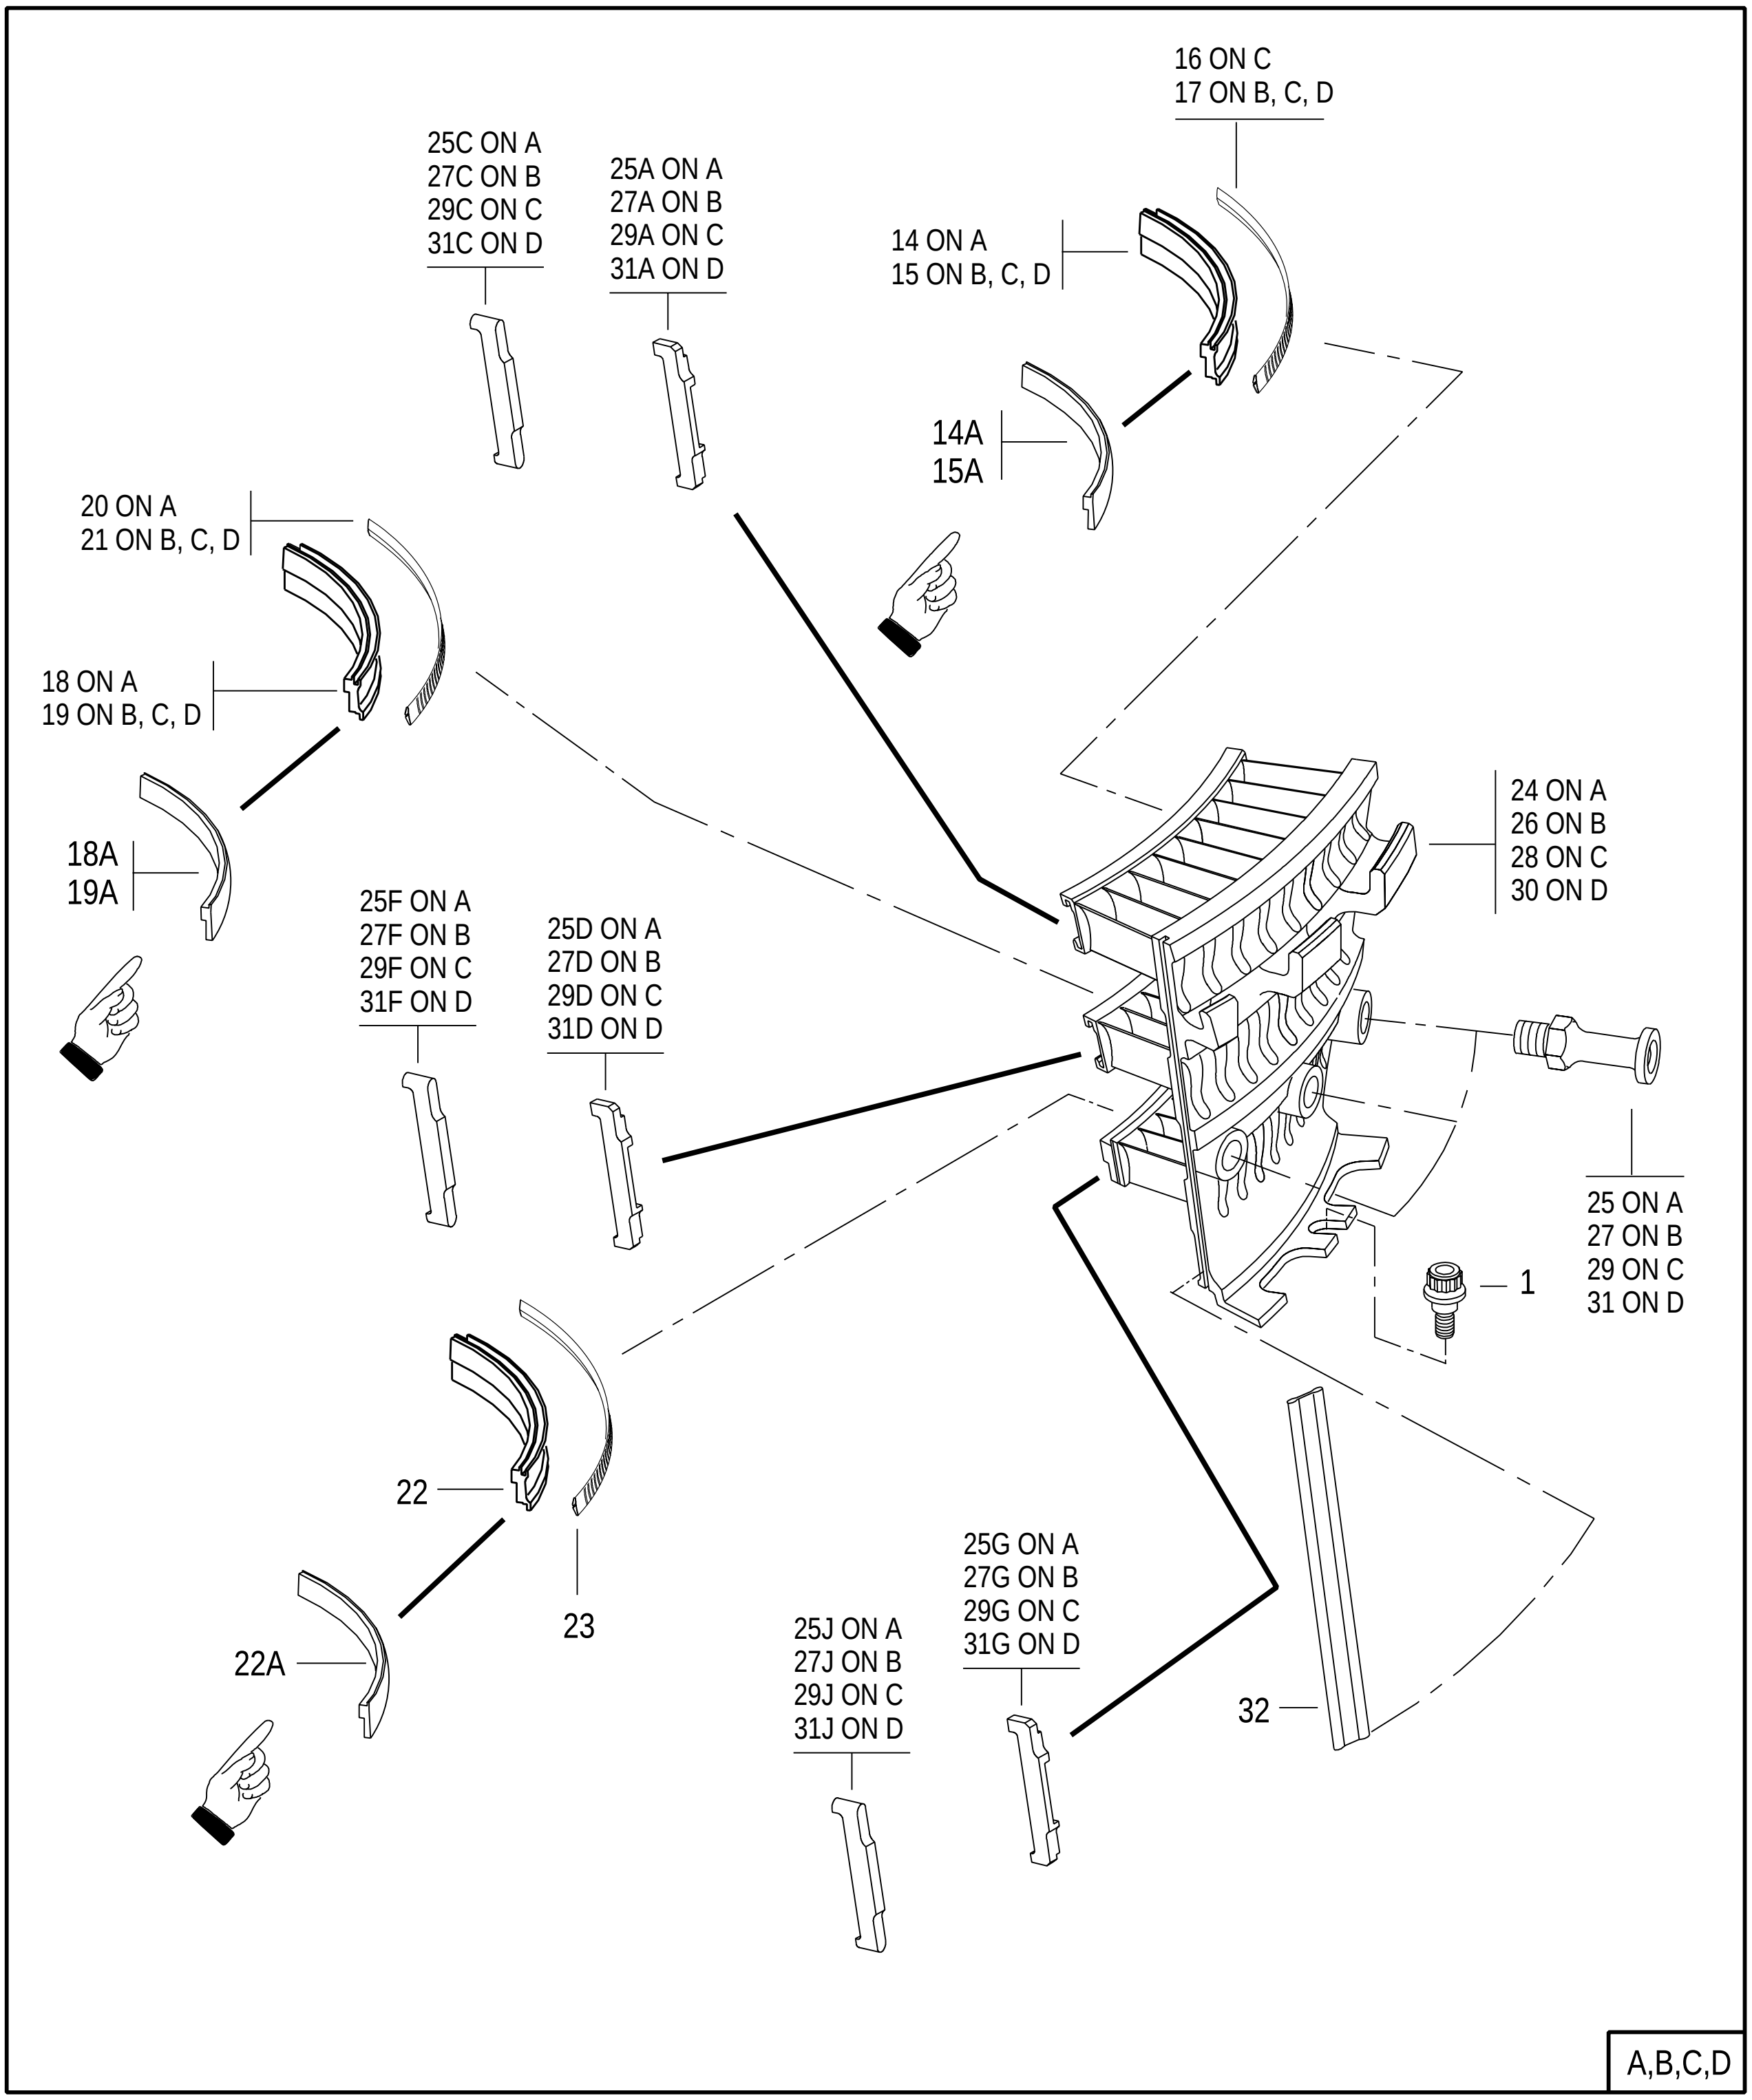

109335

FIGURE 88. COMPRESSOR DISCHARGE MANIFOLDS, 10TH-12TH STAGE COMPRESSOR STATOR SEGMENTS AND CASE ASSY, AND COMPRESSOR ROTOR ASSY (SHEET 2 OF 2)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	88	NO NUMBER		COMPRESSOR DISCHARGE MANIFOLDS, ...	REF		
				10TH-12TH STAGE COMPRESSOR STATOR			
				SEGMENTS AND CASE ASSY, AND			
				COMPRESSOR ROTOR ASSY			
				SEE FIG. 76-45 FOR NHA			
	- 1	4075455	52661	. BOLT-SHOULDER, DOUBLE HEX	12	AL/MW	PAFZZ
				0.250-28UNJF-3A X 0.562 IN. LONG			
				USE ONLY WITH 4076490 OR 4077876			
		4079928	52661	. BOLT-SHOULDER, DOUBLE HEX	12	AM/MX	PAFZZ
				0.250-28UNJF-3A X 0.654 IN. LONG			
				USE ONLY WITH 4079927 OR 4081300			
		4076490	52661	. SUPPORT-COMPRESSOR STATOR, ASSY OF	1	U/MW	PADDD
		4081300	52661	. SUPPORT-COMPRESSOR STATOR, ASSY OF	1	MX	PADDD
	- 2	4070347	52661	.. NUT OPTION	12		PAFZZ
				SEE OPTION TABLE			
				USE ONLY ON 4076490			
		4079926	52661	.. NUT OPTION	12		PAFZZ
				SEE OPTION TABLE			
				USE ONLY ON 4081300			
	- 3	AN123619	88044	.. RIVET (AP)	2		PAFZZ
	- 4	4075753	52661	.. PIN-SHOULDER, HEADLESS	1		XB
				0.188 DIA X 0.660 IN. LONG			
	- 5	4076488	52661	.. SUPPORT-COMPRESSOR STATOR	1		PAFZZ
		4077876	52661	. SUPPORT-COMPRESSOR STATOR, ASSY OF	1	V/AL	PADDD
		4079927	52661	. SUPPORT-COMPRESSOR STATOR, ASSY OF	1	AM	PADDD
	- 6	4070347	52661	.. NUT OPTION	12		PAFZZ
				SEE OPTION TABLE			
				USE ONLY ON 4077876			
		4079926	52661	.. NUT OPTION	12		PAFZZ
				SEE OPTION TABLE			
				USE ONLY ON 4079927			
	- 7	AN123619	88044	.. RIVET (AP)	2		PAFZZ
	- 8	4075753	52661	.. PIN-SHOULDER, HEADLESS	1		XB
				0.188 DIA X 0.660 IN. LONG			
	- 9	4077875	52661	.. SUPPORT-COMPRESSOR STATOR	1		PADDD
	- 10	4075890	52661	. BOLT-EXTERNALLY RELIEVED BODY, HEX	24		PAFZZ
				0.3125-24UNJF-3A X 0.475 IN. LONG			
	- 11	4074496	52661	. WASHER-KEY, DOUBLE	12		PAFZZ
				0.325 ID X 3.046 IN. LONG			
	- 12	4075449	52661	. BOLT-MACHINE, HEX	36		PAFZZ
				0.250-28UNJF-3A X 1.330 IN. LONG			
	- 13	4074457	52661	. WASHER-KEY	36		PAFZZ
				0.495 OD X 0.031 IN. THK			
	- 14	4080380-01	52661	. SHROUD-COMPRESSOR STATOR, 10TH STAGE, . . .	4		PAFDD
				ASSY OF			
				SUPERSEDES 4079370-01			
R	- 14A	4086413-02	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . .	2		PADZZ
R				STATOR, 10TH STAGE			
R				SERVICE REPAIR PART			
	- 15	4080390-01	52661	. SHROUD-COMPRESSOR STATOR, 10TH STAGE, . . .	8		PAFDD
				ASSY OF			
				SUPERSEDES 4079380-01			
R	- 15A	4086413-01	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . .	2		PADZZ
R				STATOR, 10TH STAGE			
R				SERVICE REPAIR PART			
	- 16	4079366	52661	. DAMPER-COMPRESSOR STATOR, 10TH STAGE	4	JW	PAFZZ
		4079320	52661	. DAMPER-COMPRESSOR STATOR, 10TH STAGE	4	JX	PAFZZ
	- 17	4079367	52661	. DAMPER-COMPRESSOR STATOR, 10TH STAGE	8	JW	PAFZZ
		4079321	52661	. DAMPER-COMPRESSOR STATOR, 10TH STAGE	8	JX	PAFZZ
	- 18	4079371-01	52661	. SHROUD-COMPRESSOR STATOR, 11TH STAGE, . . .	4		PAFDD
				ASSY OF			
				SUPERSEDED BY 4080381-01			
		4080381-01	52661	. SHROUD-COMPRESSOR STATOR, 11TH STAGE, . . .	4		PAFDD
				ASSY OF			
				SUPERSEDES 4079371-01			

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R R R	88 - 18A	4086415-02	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 11TH STAGE SERVICE REPAIR PART FOR 4079371-01	2		PADZZ
R R R		4086415-04	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 11TH STAGE SERVICE REPAIR PART FOR 4080381-01	2		PADZZ
	- 19	4079381-01	52661	. SHROUD-COMPRESSOR STATOR, 11TH STAGE, . . . ASSY OF SUPERSEDED BY 4080291-01	8		PAFDD
		4080291-01	52661	. SHROUD-COMPRESSOR STATOR, 11TH STAGE, . . . ASSY OF SUPERSEDES 4079381-01	8		PAFDD
R R R	- 19A	4086415-01	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 11TH STAGE SERVICE REPAIR PART FOR 4079381-01	2		PADZZ
R R R		4086415-03	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 11TH STAGE SERVICE REPAIR PART FOR 4080291-01	2		PADZZ
	- 20	4079368	52661	. DAMPER-COMPRESSOR STATOR, 11TH STAGE	4	JW	PAFZZ
		4079322	52661	. DAMPER-COMPRESSOR STATOR, 11TH STAGE	4	JX	PAFZZ
	- 21	4079369	52661	. DAMPER-COMPRESSOR STATOR, 11TH STAGE	8	JW	PAFZZ
		4079323	52661	. DAMPER-COMPRESSOR STATOR, 11TH STAGE	8	JX	PAFZZ
	- 22	4079372-01	52661	. SHROUD-COMPRESSOR STATOR, 12TH STAGE, . . . ASSY OF SUPERSEDED BY 4080382-01	12		PAFDD
		4080382-01	52661	. SHROUD-COMPRESSOR STATOR, 12TH STAGE, . . . ASSY OF SUPERSEDES 4079372-01	12		PAFDD
R R R	- 22A	4086419-01	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 12TH STAGE SERVICE REPAIR PART FOR 4079372-01	2		PADZZ
R R R		4086419-02	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 12TH STAGE SERVICE REPAIR PART FOR 4080382-01	2		PADZZ
	- 23	4079373	52661	. DAMPER-COMPRESSOR STATOR, 12TH STAGE	12	JW	PAFZZ
		4079324	52661	. DAMPER-COMPRESSOR STATOR, 12TH STAGE	12	JX	PAFZZ
	- 24	4077920-01	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF INDIVIDUAL SEGMENTS OF 4077920-01 MAY BE USED INDISCRIMINATELY WITH 4080030-01 BUT SETS RESTRICTIONS ON DAMPERS MUST BE RESPECTED	4	JW/ZF/ZH	PAFDD
		= 4084480-01	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF	4	ZG	PAFDD
		= 4080730-01	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF	4	ZJ	PAFDD
		4080030-01	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF INDIVIDUAL SEGMENTS OF 4080030-01 MAY BE USED INDISCRIMINATELY WITH 4077920-01 BUT SETS RESTRICTIONS ON DAMPERS MUST BE RESPECTED	4	JX/JY/ZD	PAFDD
		4084530-01	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF	4	ZE	PAFDD
		4077880-01	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF SUPERSEDED BY 4083880-01	4	JZ	PAFDD
		4083880-01	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF SUPERSEDES 4077880-01 PARTIAL BREAKDOWN FOLLOWS	4		PAFDD
	- 25	4075445	52661	.. BOLT-INTERNALLY RELIEVED BODY, ... COMPRESSOR STATOR USE ONLY ON 4077920-01 AND 4084530-01	3		PADZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
88 - 25	4080299	52661	.. BOLT-INTERNALLY RELIEVED BODY, ... COMPRESSOR STATOR USE ONLY ON 4077880-01, 4080030-01, AND 4084480-01	3		PADZZ
- 25A	4083727	52661	.. LUG-ANTI-ROTATION, 10 STAGE	1		PAFZZ
- 25B	DELETED					
- 25C	4077266	52661	.. LUG-ANTI-ROTATION, 10 STAGE . . . . USE ONLY ON 4077920-01 AND 4080730-01	1		PAFZZ
- 25D	4083726	52661	.. LUG-ANTI-ROTATION, 11 STAGE	1		PAFZZ
- 25E	DELETED					
- 25F	4077267	52661	.. LUG-ANTI-ROTATION, 11 STAGE . . . . USE ONLY ON 4077920-01 AND 4080730-01	1		PAFZZ
- 25G	4083725	52661	.. LUG-ANTI-ROTATION, 12 STAGE	1		PAFZZ
- 25H	DELETED					
- 25J	4077910	52661	.. LUG-ANTI-ROTATION, 12 STAGE . . . . USE ONLY ON 4077920-01 AND 4080730-01	1		PAFZZ
- 26	4077920-04	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF INDIVIDUAL SEGMENTS OF 4077920-04 MAY BE USED INDISCRIMINATELY WITH 4080030-04 BUT SETS RESTRICTIONS ON DAMPERS MUST BE RESPECTED	1	JW/ZF/ZH	PAFDD
	= 4084480-04	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF	1	ZG	PAFDD
	= 4080730-04	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF	1	ZJ	PAFDD
	4080030-04	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF INDIVIDUAL SEGMENTS OF 4080030-04 MAY BE USED INDISCRIMINATELY WITH 4077920-04 BUT SETS RESTRICTIONS ON DAMPERS MUST BE RESPECTED	1	JX/JY/ZD	PAFDD
	4084530-04	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE	1	ZE	PAFDD
	4077880-04	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF SUPERSEDED BY 4083880-04	1	JZ	PAFDD
	4083880-04	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF SUPERSEDES 4077880-04 PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 27	4075445	52661	.. BOLT-INTERNALLY RELIEVED BODY, ... COMPRESSOR STATOR USE ONLY ON 4077920-04 AND 4084530-04	3		PADZZ
	4080299	52661	.. BOLT-INTERNALLY RELIEVED BODY, ... COMPRESSOR STATOR USE ONLY ON 4077880-04, 4080030-04, AND 4084480-04	3		PADZZ
- 27A	4083727	52661	.. LUG-ANTI-ROTATION, 10 STAGE	1		PAFZZ
- 27B	DELETED					
- 27C	4077266	52661	.. LUG-ANTI-ROTATION, 10 STAGE . . . . USE ONLY ON 4077920-04 AND 4080730-04	1		PAFZZ
- 27D	4083726	52661	.. LUG-ANTI-ROTATION, 11 STAGE	1		PAFZZ
- 27E	DELETED					
- 27F	4077267	52661	.. LUG-ANTI-ROTATION, 11 STAGE . . . . USE ONLY ON 4077920-04 AND 4080730-04	1		PAFZZ
- 27G	4083725	52661	.. LUG-ANTI-ROTATION, 12 STAGE	1		PAFZZ
- 27H	DELETED					
- 27J	4077910	52661	.. LUG-ANTI-ROTATION, 12 STAGE . . . . USE ONLY ON 4077920-04 AND 4080730-04	1		PAFZZ
- 28	4077920-02	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH . . . . . STAGE, ASSY OF INDIVIDUAL SEGMENTS OF 4077920-02 MAY BE USED INDISCRIMINATELY WITH 4080030-02 BUT SETS RESTRICTIONS ON DAMPERS MUST BE RESPECTED	4	JW/ZF/ZH	PAFDD

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
88 - 28	=	4084480-02	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE, ASSY OF	4	ZG	PAFDD
	=	4080730-02	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE, ASSY OF	4	ZJ	PAFDD
		4080030-02	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE, ASSY OF INDIVIDUAL SEGMENTS OF 4080030-02 MAY BE USED INDISCRIMINATELY WITH 4077920-02 BUT SETS RESTRICTIONS ON DAMPERS MUST BE RESPECTED	4	JX/JY/ZD	PAFDD
		4084530-02	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE	4	ZE/ZH	PAFDD
		4077880-02	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE, ASSY OF SUPERSEDED BY 4083880-02	4	JZ	PAFDD
		4083880-02	52661	. COMPRESSOR STATOR SEGMENT-10TH-13TH. . . . . STAGE, ASSY OF SUPERSEDES 4077880-02 PARTIAL BREAKDOWN FOLLOWS	4	ZJ	PAFDD
- 29		4075445	52661	.. BOLT-INTERNALLY RELIEVED BODY, ... COMPRESSOR STATOR USE ONLY ON 4077920-02 AND 4084530-02	3		PADZZ
		4080299	52661	.. BOLT-INTERNALLY RELIEVED BODY, ... COMPRESSOR STATOR USE ONLY ON 4077880-02, 4080030-02, AND 4084480-02	3		PADZZ
- 29A		4083727	52661	.. LUG-ANTI-ROTATION, 10 STAGE.	1		PAFZZ
- 29B		DELETED					
- 29C		4077266	52661	.. LUG-ANTI-ROTATION, 10 STAGE. . . . . USE ONLY ON 4077920-02 AND 4080730-02	1		PAFZZ
- 29D		4083726	52661	.. LUG-ANTI-ROTATION, 11 STAGE.	1		PAFZZ
- 29E		DELETED					
- 29F		4077267	52661	.. LUG-ANTI-ROTATION, 11 STAGE. . . . . USE ONLY ON 4077920-02 AND 4080730-02	1		PAFZZ
- 29G		4083725	52661	.. LUG-ANTI-ROTATION, 12 STAGE.	1		PAFZZ
- 29H		DELETED					
- 29J		4077910	52661	.. LUG-ANTI-ROTATION, 12 STAGE. . . . . USE ONLY ON 4077920-02 AND 4080730-02	1		PAFZZ
- 30		4077920-03	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE, ASSY OF INDIVIDUAL SEGMENTS OF 4077920-03 MAY BE USED INDISCRIMINATELY WITH 4080030-03 BUT SETS RESTRICTIONS ON DAMPERS MUST BE RESPECTED	3	JW/ZF/ZH	PAFDD
	=	4084480-03	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE, ASSY OF	3	ZG	PAFDD
	=	4080730-03	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE, ASSY OF	3	ZJ	PAFDD
		4080030-03	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE, ASSY OF INDIVIDUAL SEGMENTS OF 4080030-03 MAY BE USED INDISCRIMINATELY WITH 4077920-03 BUT SETS RESTRICTIONS ON DAMPERS MUST BE RESPECTED	3	JX/JY/ZD	PAFDD
		4084530-03	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE	3	ZE	PAFDD
		4077880-03	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE, ASSY OF SUPERSEDED BY 4083880-03	3	JZ	PAFDD
		4083880-03	52661	. COMPRESSOR STATOR SEGMENT-10TH-12TH. . . . . STAGE, ASSY OF SUPERSEDES 4077880-03 PARTIAL BREAKDOWN FOLLOWS	3		PAFDD
- 31		4075445	52661	.. BOLT-INTERNALLY RELIEVED BODY, ... COMPRESSOR STATOR USE ONLY ON 4077920-03 AND 4084530-03	3		PADZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
88 - 31	4080299	52661	.. BOLT-INTERNALLY RELIEVED BODY, COMPRESSOR STATOR USE ONLY ON 4077880-03, 4080030-03, AND 4084480-03	3		PADZZ
- 31A	4083727	52661	.. LUG-ANTI-ROTATION, 10 STAGE	1		PAFZZ
- 31B	DELETED		...			
- 31C	4077266	52661	.. LUG-ANTI-ROTATION, 10 STAGE USE ONLY ON 4077920-03 AND 4080730-03	1		PAFZZ
- 31D	4083726	52661	.. LUG-ANTI-ROTATION, 11 STAGE	1		PAFZZ
- 31E	DELETED		...			
- 31F	4077267	52661	.. LUG-ANTI-ROTATION, 11 STAGE USE ONLY ON 4077920-03 AND 4080730-03	1		PAFZZ
- 31G	4083725	52661	.. LUG-ANTI-ROTATION, 12 STAGE	1		PAFZZ
- 31H	DELETED		...			
- 31J	4077910	52661	.. LUG-ANTI-ROTATION, 12 STAGE USE ONLY ON 4077920-03 AND 4080730-03	1		PAFZZ
- 32	4079137	52661	. SEAL-COMPRESSOR STATOR	12		PAFZZ
- 33	4076566	52661	. RING SEGMENT-COMPRESSOR STATOR SUPPORT, 10TH-12TH STAGE	12		PAFDD
- 34	4076567	52661	. RING SEGMENT-COMPRESSOR STATOR SUPPORT, 10TH-12TH STAGE	12		PAFDD
- 35	4077074	52661	. CASE-COMPRESSOR, 10TH-12TH STAGE, ASSY OF SEE FIG. 98 FOR DETAIL PARTS	1	AU	PADDD
	4078507	52661	. CASE-COMPRESSOR, 10TH-12TH STAGE, ASSY OF REPLACES 4078257 SEE FIG. 98 FOR DETAIL PARTS	1	AV	PADDD
- 36	4079349-01	52661	. ROTOR ASSY-AXIAL COMPRESSOR SEE FIG. 104 FOR DETAIL PARTS	1	DN/KJ/LR	ADD
	4080101-01	52661	. ROTOR ASSY-AXIAL COMPRESSOR SEE FIG. 104 FOR DETAIL PARTS	1	DP/JY	ADD
	4079287-01	52661	. ROTOR ASSY-AXIAL COMPRESSOR SEE FIG. 104 FOR DETAIL PARTS	1	BR/JZ/KG	ADD
	4080405-01	52661	. ROTOR ASSY-AXIAL COMPRESSOR SEE FIG. 104 FOR DETAIL PARTS	1	BR/KH/LX/ LZ/MB/ MD	ADD
	4080407-01	52661	. ROTOR ASSY-AXIAL COMPRESSOR REOP AND REID OF 4079349-01 DO NOT PROCURE FROM P&W SEE FIG. 104 FOR DETAIL PARTS	1	KK/MF	ADD
	4080720-01	52661	. ROTOR ASSY-AXIAL COMPRESSOR SEE FIG. 104 FOR DETAIL PARTS	1	BR/LS/MH	ADD
	4080812-01	52661	. ROTOR ASSY-AXIAL COMPRESSOR SEE FIG. 104 FOR DETAIL PARTS	1	BR/LY/MA/ MC/ME	ADD
	4080883-01	52661	. ROTOR ASSY-AXIAL COMPRESSOR SEE FIG. 104 FOR DETAIL PARTS	1	MG	ADD
	4080884-01	52661	. ROTOR ASSY-AXIAL COMPRESSOR SEE FIG. 104 FOR DETAIL PARTS	1	BR/MJ	ADD
- 37	ST2348-06	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX 0.250-28UNJF-3A X 0.500 IN. LONG	22		PAFZZ
- 38	4074151	52661	. MANIFOLD ASSY-COMPRESSOR DISCHARGE, LEFT PARTIAL BREAKDOWN FOLLOWS	1		AFF
- 39	4074153	52661	.. CAP-COMPRESSOR DISCHARGE MANIFOLD	1		PAFZZ
- 40	4070186	52661	.. ROD-COMPRESSOR DISCHARGE MANIFOLD	1		PAFZZ
- 41	4070183	52661	.. MANIFOLD-COMPRESSOR DISCHARGE, LEFT	1		PAFDD
- 42	4074152	52661	. MANIFOLD ASSY-COMPRESSOR DISCHARGE, RIGHT PARTIAL BREAKDOWN FOLLOWS	1		AFF
- 43	4074153	52661	.. CAP-COMPRESSOR DISCHARGE MANIFOLD	1		PAFZZ
- 44	4070186	52661	.. ROD-COMPRESSOR DISCHARGE MANIFOLD	1		PAFZZ
- 45	4070187	52661	.. MANIFOLD-COMPRESSOR DISCHARGE, RIGHT	1		PAFDD
- 46	4070169	52661	. GASKET-COMPRESSOR DISCHARGE MANIFOLD	2		PAFZZ


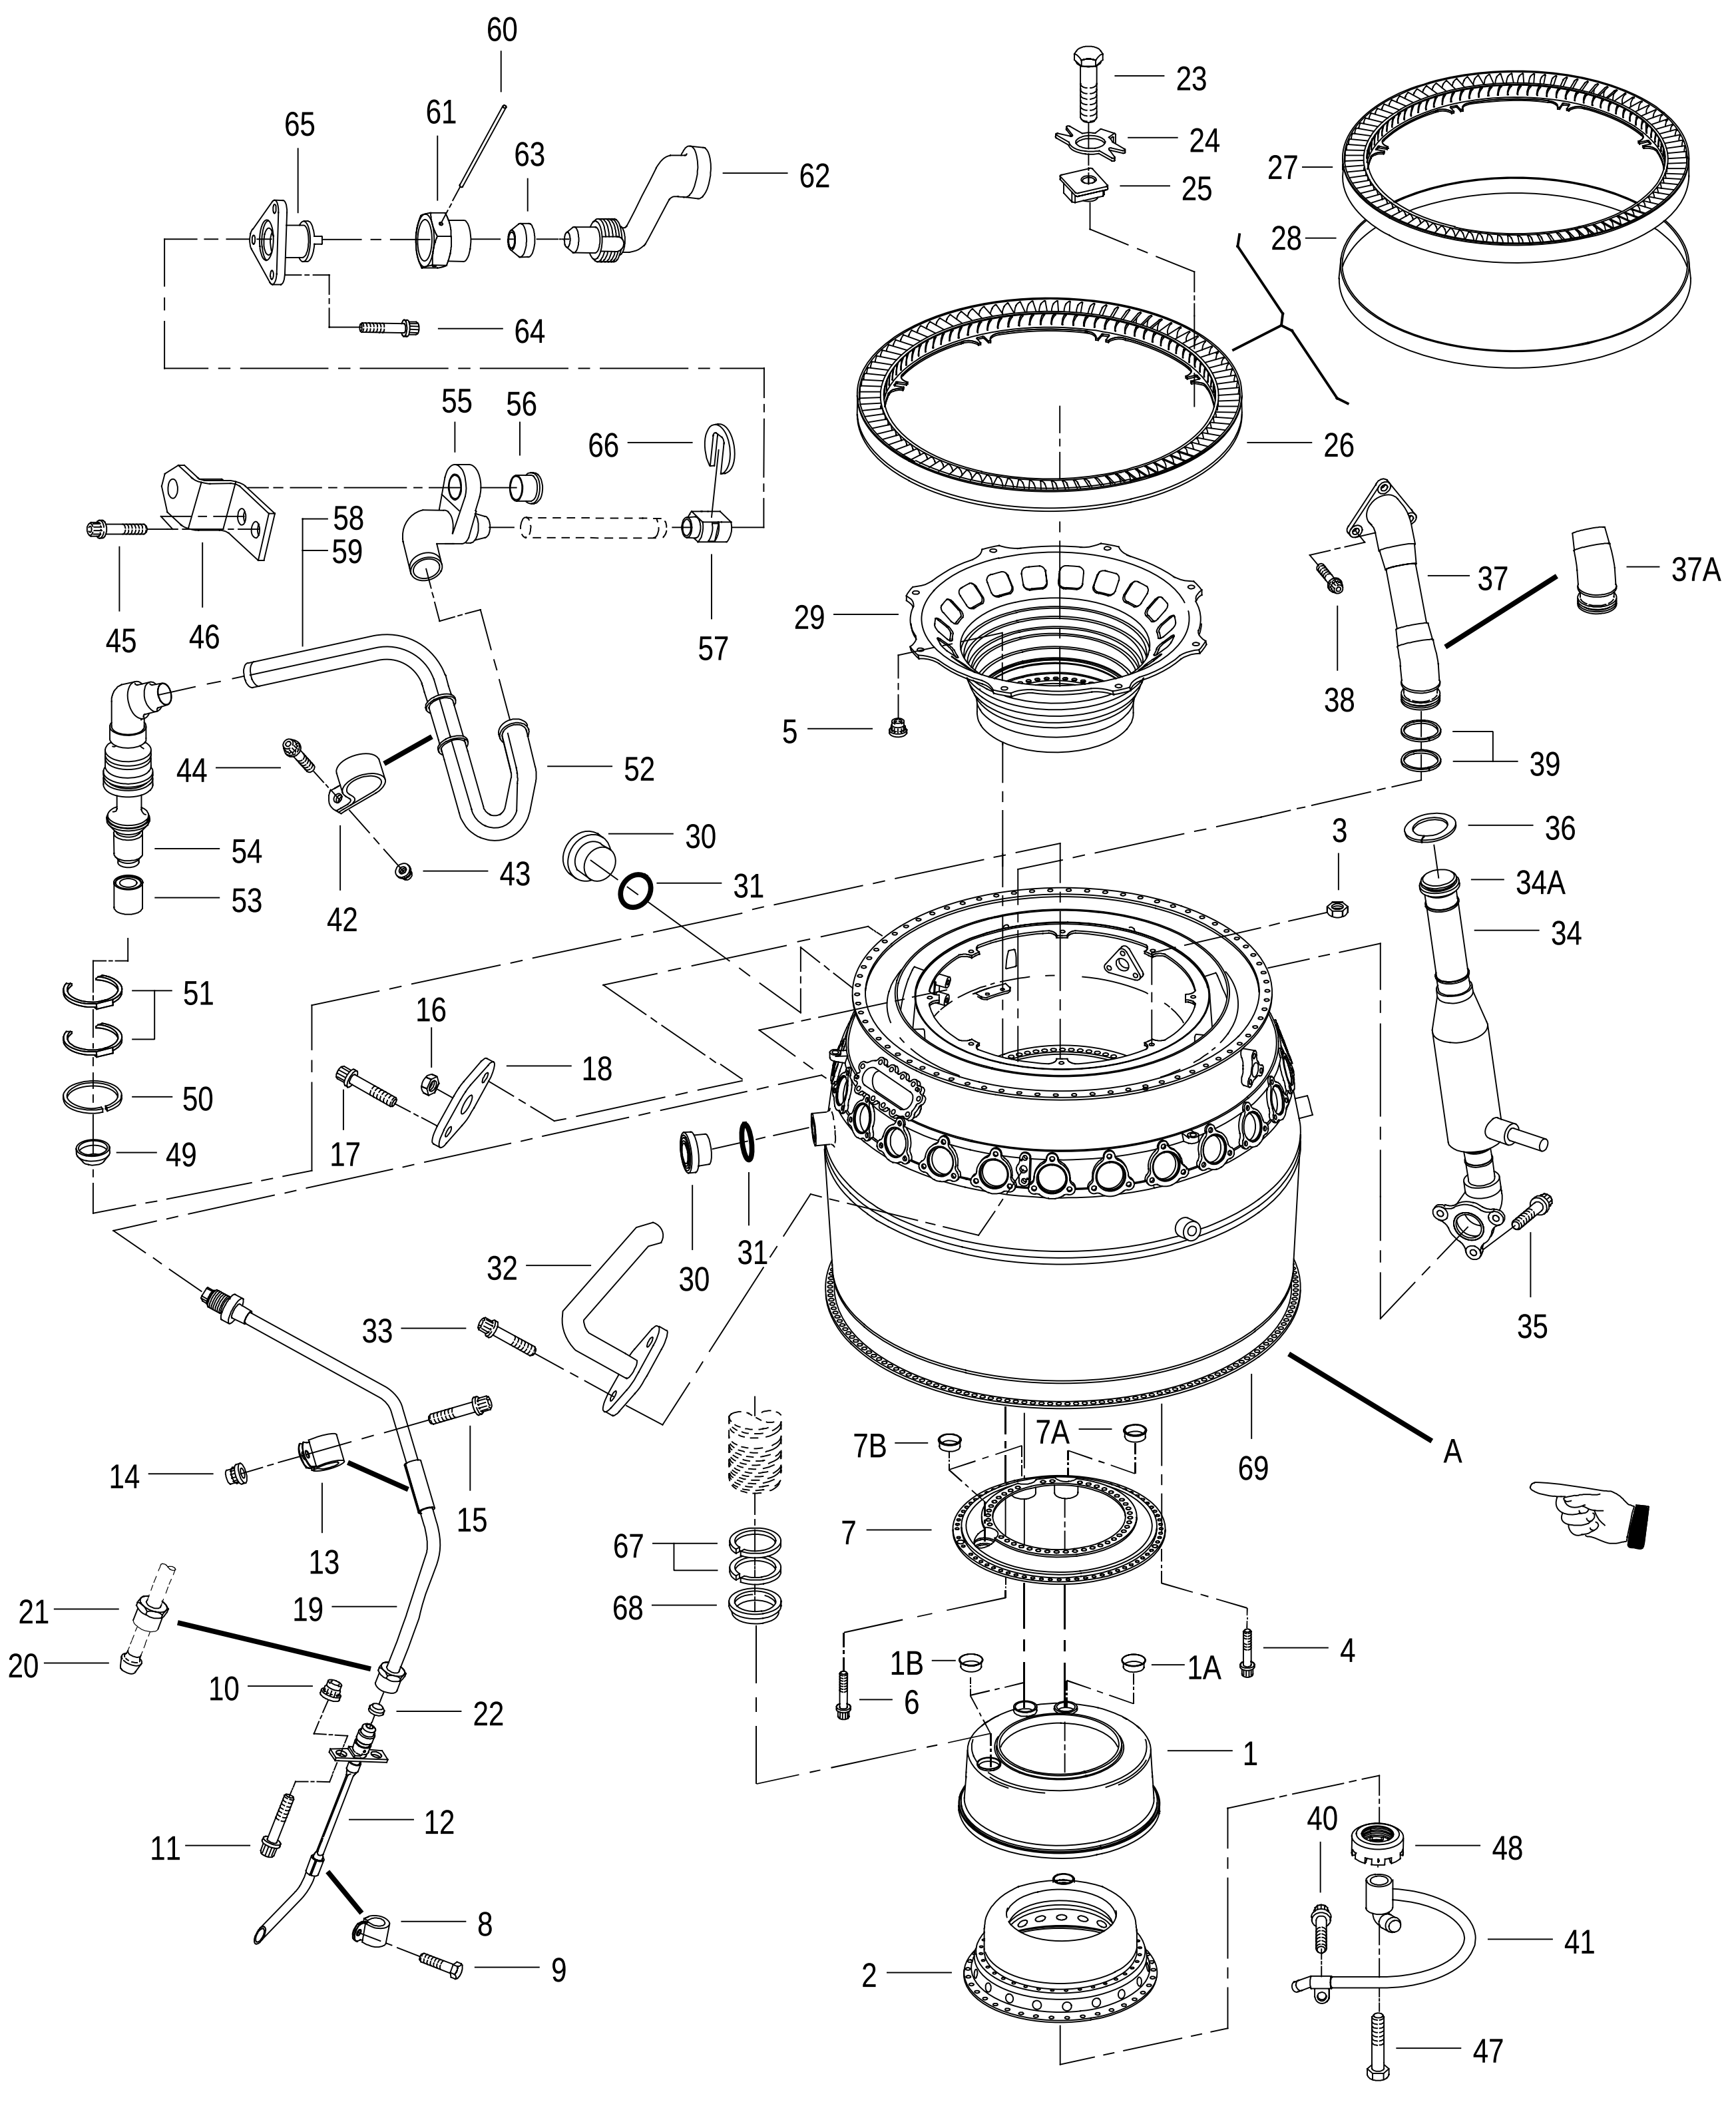


FIGURE 89. NO. 4 BEARING FRONT AIR SEALING RING, FRONT SEAL ASSY, COMPRESSOR EXIT STATOR, AND DIFFUSER CASE
(SHEET 1 OF 2)

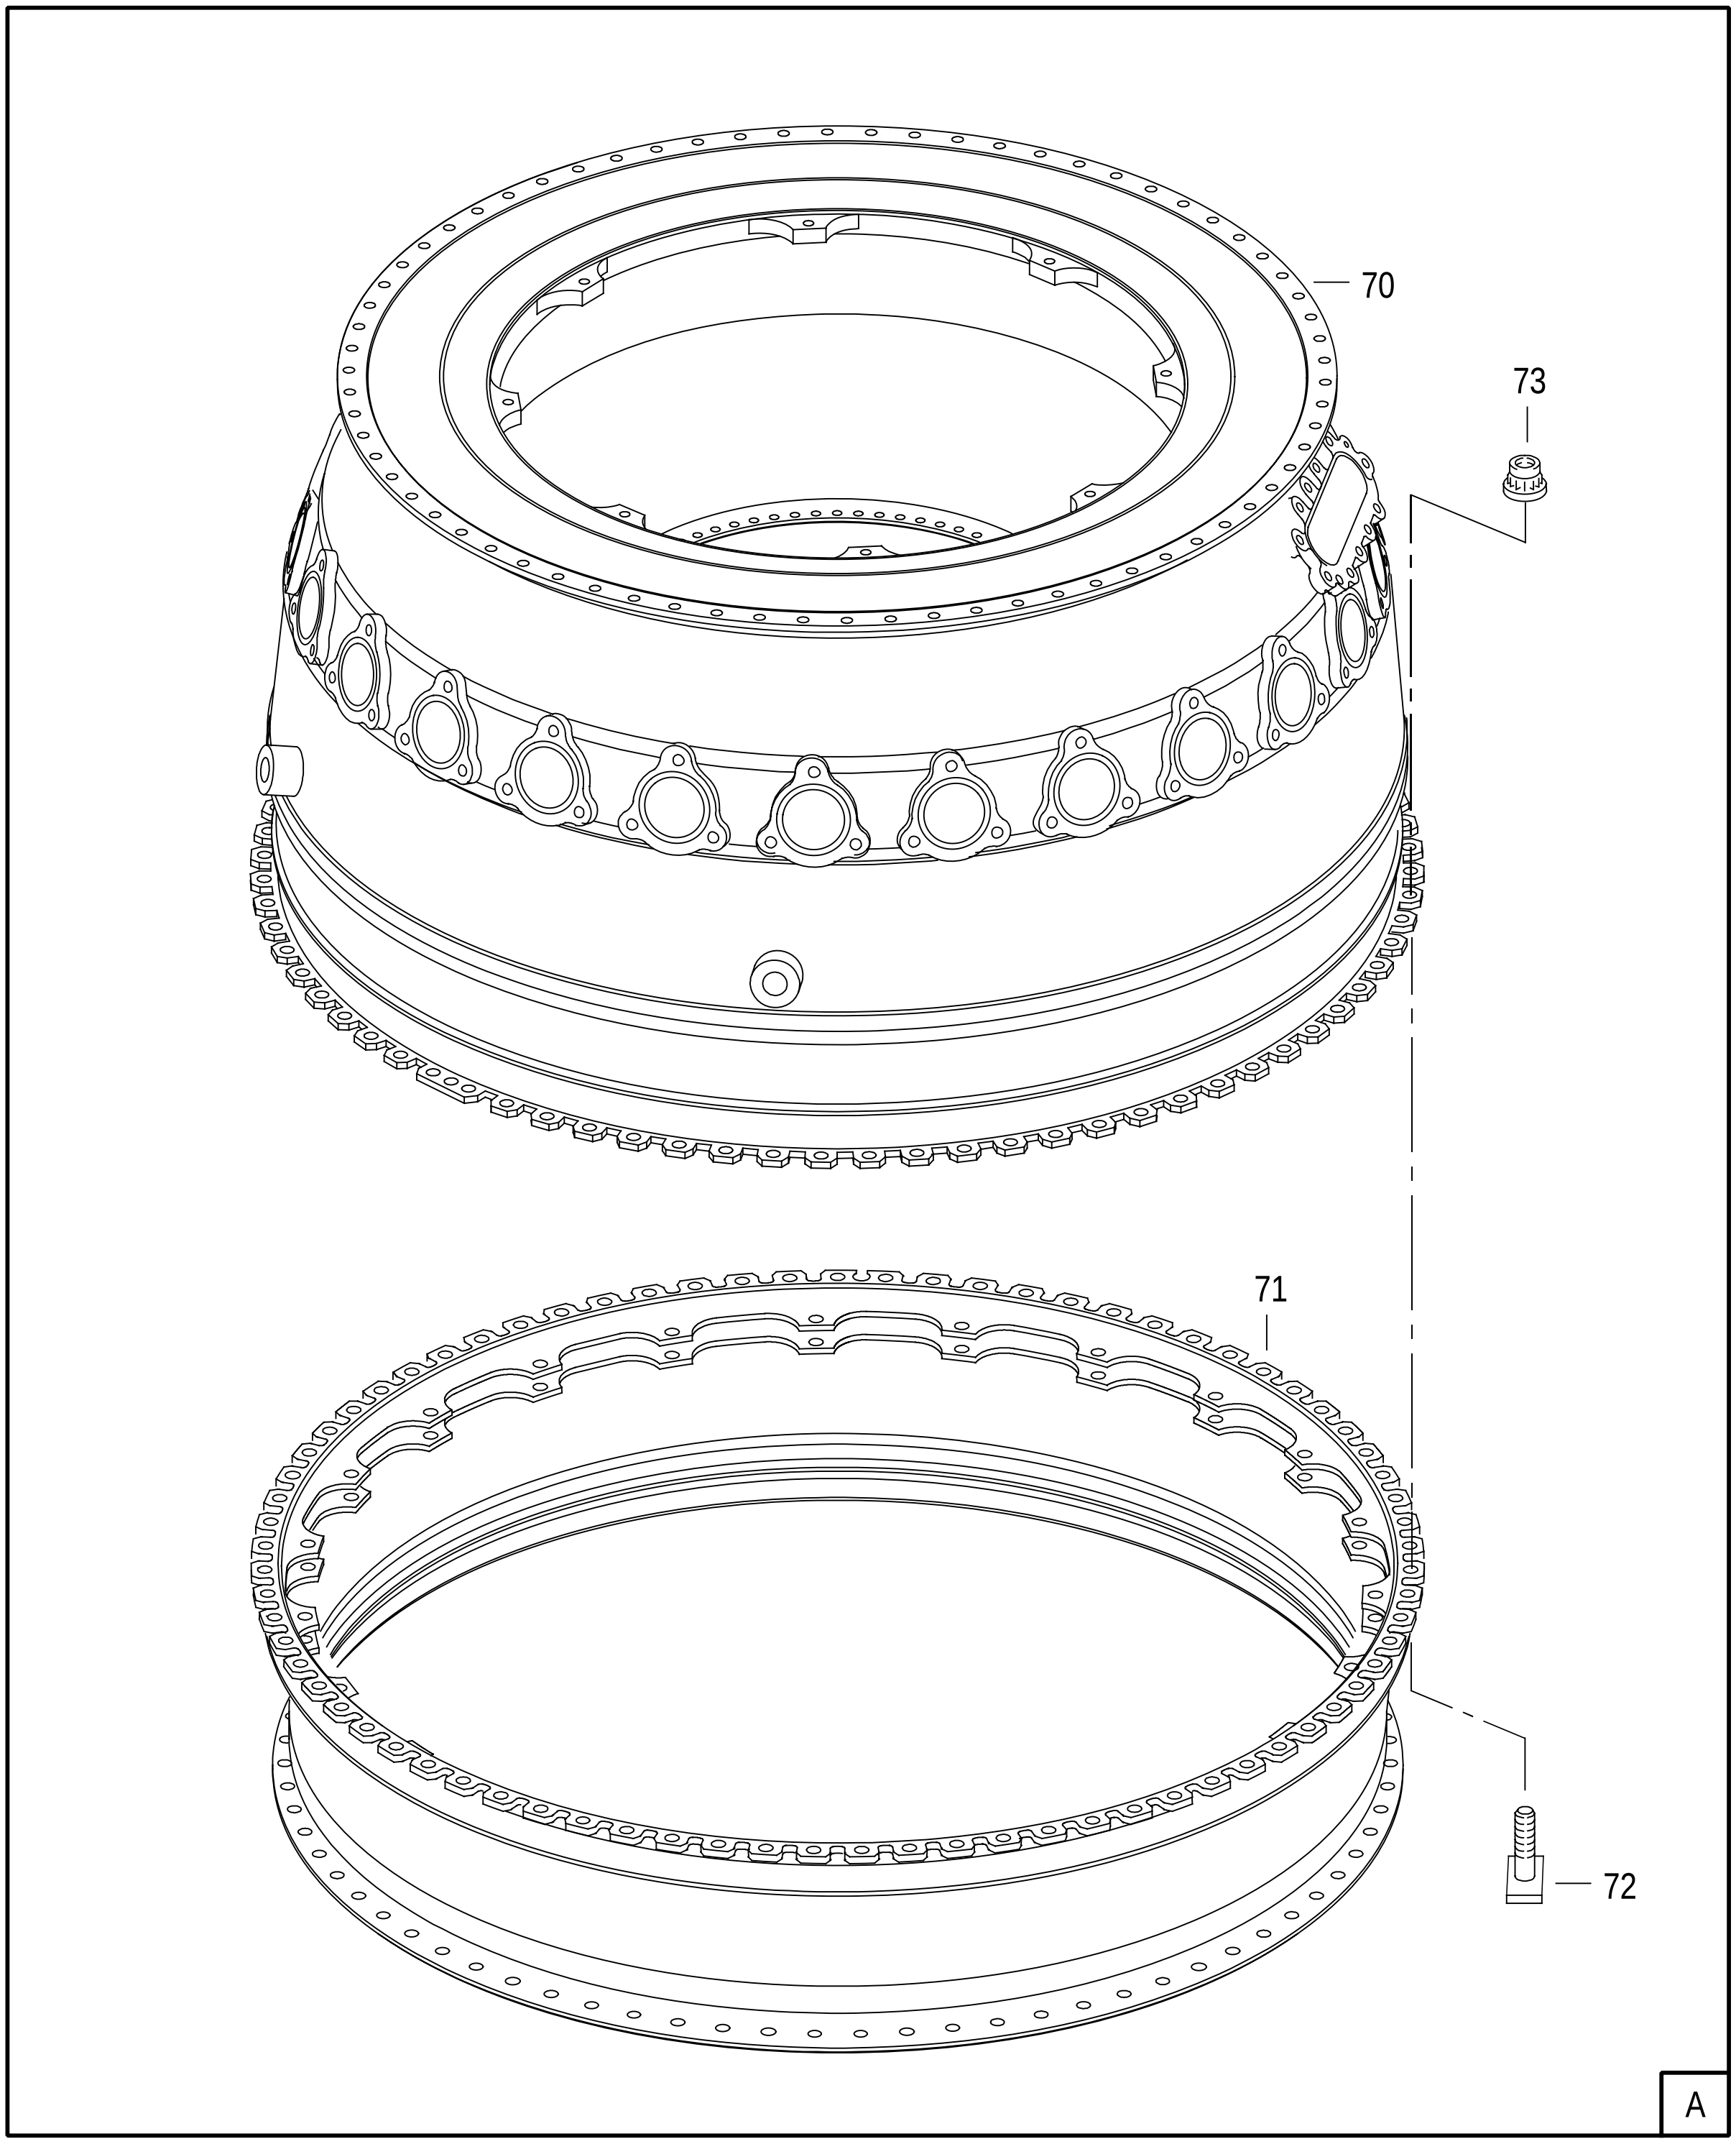

89819

FIGURE 89. NO. 4 BEARING FRONT AIR SEALING RING, FRONT SEAL ASSY, COMPRESSOR EXIT STATOR, AND DIFFUSER CASE
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
89	NO NUMBER		NO. 4 BEARING FRONT AIR SEALING RING, FRONT SEAL ASSY, COMPRESSOR EXIT STATOR, AND DIFFUSER CASE SEE FIG. 76-46 FOR NHA	REF		
- 1	4075867	52661	. RING-AIR SEALING, NO. 4 BEARING, FRONT, ASSY OF WHEN EXH USE 4079426	1		PAFDD
	4079426	52661	. RING-AIR SEALING, NO. 4 BEARING, FRONT, ASSY OF	1		PAFDD
- 1A	4082888	52661	.. BUSHING-SLEEVE, FLANGED 1.132 X 1.185 X 0.5625 SERVICE REPAIR PART	1		PADZZ
- 1B	4082889	52661	.. BUSHING-SLEEVE, FLANGED 1.282 X 1.335 X 0.6875 SERVICE REPAIR PART	2		PADZZ
- 2	4072348	52661	. SEAL ASSY-NO. 4 BEARING FRONT SEE FIG. 102 FOR DETAIL PARTS	1		AFF
- 3	4302197	52661	. NUT OPTION SEE OPTION TABLE	66		PAFZZ
- 4	MS9696-10	96906	. BOLT	66		PAFZZ
- 5	ST2590-10	52661	. NUT OPTION SEE OPTION TABLE	36		PAFZZ
- 6	MS9697-10	96906	. BOLT	36		PAFZZ
- 7	4076101	52661	. FLANGE-NO. 4 BEARING AIR SEALING RING	1		PAFZZ
- 7A	4080719	52661	.. BUSHING-SLEEVE, FLANGED 1.132 X 1.185 X 0.4785 SERVICE REPAIR PART	1		PADZZ
- 7B	4080978	52661	.. BUSHING-SLEEVE, FLANGED 1.282 X 1.335 X 0.5925 SERVICE REPAIR PART	2		PADZZ
- 8	MS122902	96906	. CLAMP	1		PAOZZ
- 9	490235	52661	. BOLT-MACHINE, DRILLED HEX 0.190-32UNJF-3A X 0.250 IN. LONG (AP)	1		PAFZZ
- 10	4302197	52661	. NUT OPTION SEE OPTION TABLE	2		PAFZZ
- 11	MS9696-12	96906	. BOLT	2		PAFZZ
- 12	4074872-01	52661	. TUBE-AIR VENT, NO. 4 BEARING, INTERNAL, ASSY OF	1		PAFZZ
- 13	X218-4	78570	. CLAMP-LOOP 0.250 IN. TUBE OD P&WA PART NO. 277398	1		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
89 - 14	4066226	52661	. NUT OPTION (AP) .... SEE OPTION TABLE	1		PAOZZ
- 15	MS9556-06	96906	. BOLT (AP)	1		PAOZZ
- 16	4006266	52661	. NUT-PLAIN, DRILLED HEX .... 0.375-24UNJF-3B X 0.219 IN. THK	1		PAFZZ
- 17	4038010	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX .... 0.190-32UNJF-3A X 0.375 IN. LONG	2		PAFZZ
- 18	4061726	52661	. PLATE-OIL VENT MANIFOLD	1		PAFZZ
- 19	4069897-01	52661	. TUBE-AIR VENT, NO. 4 BEARING, INTERNAL, ... ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
- 20	MS9483-04	96906	.. FERRULE	1		PAFZZ
- 21	MS9198-04	96906	.. NUT	1		PAFZZ
- 22	ST2284-04	52661	. GASKET OPTION................................ SEE OPTION TABLE	1		PAFZZ
- 23	ST2654-12	52661	. BOLT-MACHINE, HEX............................ 0.250-28UNJF-3A X 0.875 IN. LONG	8		PAFZZ
- 24	4076272	52661	. WASHER-KEY.................................... 0.2575 ID X 0.032 IN. THK	8		PAFZZ
- 25	4077320	52661	. BUSHING-COMPRESSOR AIR SEALING RING, 13 .. STAGE	8		PAFZZ
- 26	4077913	52661	. STATOR-COMPRESSOR EXIT	1	U	PAFDD
- 27	4077723	52661	. STATOR-COMPRESSOR EXIT .... PARTIAL BREAKDOWN FOLLOWS	1	V	PAFDD
- 28	4077422	52661	.. DAMPER-COMPRESSOR.........................	1		PADZZ
- 29	4077319	52661	. RING-AIR SEALING, NO. 4 BEARING, FRONT, ... ASSY OF	1		PAFDD
- 30	4080472	52661	. INSERT-SCREW THREAD......................... 1.0625-16UNJ-3B X 1.4375-18UNJEF-3A X 0.715 IN. LONG	2		PAFZZ
- 31	% 4071047	52661	. SPACER-RING .... 1.865 OD X 1.475 ID X 0.010 IN. THK	4		XA
	4071047CLA	52661	. SPACER-RING .... 0.005 - 0.015 IN. THK	AR		PAFZZ
	4071047CLB	52661	. SPACER-RING .... 0.015 - 0.025 IN. THK	AR		PAFZZ
	4071047CLC	52661	. SPACER-RING .... 0.025 - 0.045 IN. THK	AR		PAFZZ
	4071047CLD	52661	. SPACER-RING .... 0.045 - 0.065 IN. THK	AR		PAFZZ
	4071047CLE	52661	. SPACER-RING .... 0.065 - 0.085 IN. THK	AR		PAFZZ
	4071047CLF	52661	. SPACER-RING .... 0.085 - 0.105 IN. THK	AR		PAFZZ
	4071047CLG	52661	. SPACER-RING .... 0.105 - 0.125 IN. THK	AR		PAFZZ
	4071047CLH	52661	. SPACER-RING .... 0.125 - 0.145 IN. THK	AR		PAFZZ
	4071047CLJ	52661	. SPACER-RING .... 0.145 - 0.165 IN. THK	AR		PAFZZ
	4071047CLK	52661	. SPACER-RING .... 0.165 - 0.185 IN. THK	AR		PAFZZ
	4071047CLL	52661	. SPACER-RING .... 0.185 - 0.205 IN. THK	AR		PAFZZ
	4071047CLM	52661	. SPACER-RING .... 0.205 - 0.225 IN. THK	AR		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
89 - 31	4071047CLN	52661	. SPACER-RING . . . . 0.225 - 0.245 IN. THK	AR		PAFZZ
	4071047CLP	52661	. SPACER-RING . . . . 0.245 - 0.265 IN. THK	AR		PAFZZ
	4071047CLQ	52661	. SPACER-RING . . . . 0.265 - 0.285 IN. THK	AR		PAFZZ
	4071047CLR	52661	. SPACER-RING . . . . 0.285 - 0.305 IN. THK	AR		PAFZZ
	4071047CLS	52661	. SPACER-RING . . . . 0.305 - 0.325 IN. THK	AR		PAFZZ
	4071047CLT	52661	. SPACER-RING . . . . 0.325 - 0.345 IN. THK	AR		PAFZZ
- 32	4076957	52661	. CONNECTOR-TUBE, STATIC PRESSURE PROBE . . .	1		PAFBZ
- 33	ST2348-06	52661	. BOLT-MACHINE, DRILLED, DOUBLE HEX . . . . 0.250-28UNJF-3A X 0.500 IN. LONG (AP)	2		PAFZZ
- 34	4074520-01	52661	. MANIFOLD-AIR SUPPLY NO. 4 BEARING SEAL, ... ASSY OF	1		PAFDD
- 34A	4082905	52661	.. FERRULE-PACKING . . . . 1.000, 1 GROOVE SERVICE REPAIR PART	1		PADZZ
- 35	ST2151-020	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.625 IN. LONG (AP)	3		PAFZZ
- 36	4069774	52661	. SEAL RING-METAL . . . . 1.551 OD X 0.0565 IN. THK	1		PAFZZ
- 37	4070082	52661	. TUBE-AIR SUPPLY, NO. 4 BEARING SEAL, ASSY . . . OF	1		PAFDD
- 37A	4083184	52661	.. ELBOW-TUBE . . . . 1.000, 26 DEG 53' SERVICE REPAIR PART	1		PADZZ
- 38	ST2151-012	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.375 IN. LONG (AP)	3		PAOZZ
- 39	4036955	52661	. SEAL RING-METAL . . . . 1.270 OD X 0.0775 IN. THK	2		PAFZZ
- 40	ST2151-012	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.375 IN. LONG	1		PAOZZ
- 41	4035859	52661	. MANIFOLD-PRESSURE, NO. 4 BEARING, ... INTERNAL, ASSY OF	1		PAFBZ
- 42	4066513	52661	. CLAMP-LOOP . . . . 0.750 TUBE OD	1		PAFZZ
- 43	4066226	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	1		PAFZZ
- 44	MS9696-05	96906	. BOLT (AP)	1		PAFZZ
- 45	MS9714-06	96906	. BOLT	2		PAFZZ
- 46	4071898-01	52661	. BRACKET-DOUBLE ANGLE, ASSY OF	1		PAFBZ
- 47	MS9583-06	96906	. BOLT	1		PAFZZ
- 48	4028240	52661	. NUT-PLAIN, ROUND . . . . 0.625-18UNJF-3B X 0.400 IN. THK	1		PAFZZ
- 49	ST2284-12	52661	. GASKET OPTION . . . . SEE OPTION TABLE	1		PAOZZ
- 50	4077615	52661	. SEAL RING-METAL . . . . 1.120 OD X 0.0845 IN. THK REPLACES 4076793 REPLACES 4077824	1		PAFZZ
- 51	4077614	52661	. SEAL RING-METAL . . . . 1.120 OD X 0.1395 WIDE X 0.041 IN. THK REPLACES 4066509 REPLACES 4077821	2		PAFZZ
R - 52	4069160	52661	. TUBE-PRESSURE, NO. 4 BEARING, INTERNAL, ... ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFBZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	89 - 53	4069175	52661	.. CONNECTOR END-TUBE, NO. 4 BEARING	1		PADZZ
	- 54	4069174	52661	.. CONNECTOR-TUBE, NO. 4 BEARING	1		PADZZ
	- 55	4069167	52661	.. ELBOW-TUBE, 1 HOLE, 90 DEG	1		PADZZ
				0.438 X 0.500 IN. DIA.			
	- 56	4066527	52661	.. BUSHING-SLEEVE, FLANGED	1		PADZZ
				0.2835 ID X 0.4945 OD X 0.395 IN. LONG			
	- 57	4031916	52661	.. FERRULE-NO. 4 BEARING PRESSURE TUBE	1		PADZZ
				SUPERSEDES 4072599			
	- 58	2161929	52661	.. TAPE OPTION	AR		PAFZZ
				SEE OPTION TABLE			
	- 59	2072968	52661	.. TAPE-INSULATION, THERMAL	AR		PAFZZ
				0.500 WIDE X 0.125 IN. THK			
	- 60	483220	52661	. WIRE-THRUST	1		PAFZZ
				0.094 DIA X 3.770 IN. LONG			
	- 61	360583	52661	. NUT-TUBE COUPLING THRUST WIRE	1	CS	PAFZZ
				1.0625-12UNJF-3B			
		= ST2100-12	52661	. NUT-TUBE COUPLING, THRUST WIRE	1	CT	PAFZZ
				1.0625-12UNJF-3B X 0.750 IN. TUBE OD			
		= ST2121-12	52661	. NUT-TUBE COUPLING, THRUST WIRE	1	CT	PAFZZ
				1.0625-12UNJF-3B X 0.750 IN. TUBE OD			
	- 62	4070467	52661	. TUBE-PRESSURE, NO. 4 BEARING	1	CS	PAFZZ
		4071508	52661	. TUBE-PRESSURE, NO. 4 BEARING	1	CT	PAFZZ
	- 63	ST2286-07	52661	. GASKET	1	CT	PAOZZ
				SUPERSEDES ST2284-07			
	- 64	ST2605-07	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX	3		PAFZZ
				0.190-32UNJF-3A X 0.562 IN. LONG			
	- 65	4070469	52661	. ADAPTER-NO. 4 BEARING	1		PAFZZ
	- 66	4031904	52661	. PLATE-RETAINING, TUBE	1		PAFZZ
	- 67	4036955	52661	. SEAL RING-METAL	2		PAFZZ
				1.270 OD X 0.0775 IN. THK			
	- 68	ST2284-14	52661	. GASKET OPTION	1		PAFZZ
				SEE OPTION TABLE			
	- 69	4075716	52661	. CASE-DIFFUSER, ASSY OF	1	Q	PAFDD
R				REPLACED BY 4084235			
				SEE FIG. 103 FOR DETAIL PARTS			
		4079134	52661	. CASE-DIFFUSER, ASSY OF	1	R/CY	PAFDD
R				REPLACED BY 4083913			
				SEE FIG. 103 FOR DETAIL PARTS			
		4079831	52661	. CASE-DIFFUSER, ASSY OF	1	CZ	PAFDD
R				REPLACED BY 4084234			
				SEE FIG. 103 FOR DETAIL PARTS			
R		4084235	52661	. CASE-DIFFUSER, ASSY OF	1		PAFDD
R				REPLACES 4075716			
R				SEE FIG. 103 FOR DETAIL PARTS			
R		4083913	52661	. CASE-DIFFUSER, ASSY OF	1		PAFDD
R				REPLACES 4079134			
R				SEE FIG. 103 FOR DETAIL PARTS			
R		4084234	52661	. CASE-DIFFUSER, ASSY OF	1		PAFDD
R				REPLACES 4079831			
R				SEE FIG. 103 FOR DETAIL PARTS			
	- 70	4083830	52661	. CASE-DIFFUSER, ASSY OF	1		PAFDD
				USE ONLY ON 4084522-800 AND 4082654-803			
R				REPLACED BY 4084237			
				SEE FIG. 103 FOR DETAIL PARTS			
		4083558	52661	. CASE-DIFFUSER, ASSY OF	1		PAFDD
				USE ONLY ON 4084522-801			
				SEE FIG. 103 FOR DETAIL PARTS			
		4083564	52661	. CASE-DIFFUSER, ASSY OF	1		PAFDD
				USE ONLY ON 4084522-802			
				SEE FIG. 103 FOR DETAIL PARTS			

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
89 - 70	4084237	52661	. CASE-DIFFUSER, ASSY OF . . . . USE ONLY ON 4084522-800, 4082654-803, AND 4082657-808 REPLACES 4083830 SEE FIG. 103 FOR DETAIL PARTS	1		PAFDD
- 71	4083210	52661	. CASE-TURBINE, FRONT . . . . USE ONLY ON 4084522-800, -801, -802, 4082654-803, AND 4082657-808	1		PADLD
- 72	ST1341-09	52661	. BOLT-MACHINE, SLAB . . . . 0.3125-24 USE ONLY ON 4084522-800, -801, -802, 4082654-803, AND 4082657-808	75		PAFZZ
- 73	ST2785-11	52661	. NUT OPTION . . . . USE ONLY ON 4084522-800, -801, -802, 4082654-803, AND 4082657-808 SEE OPTION TABLE	75		PAFZZ

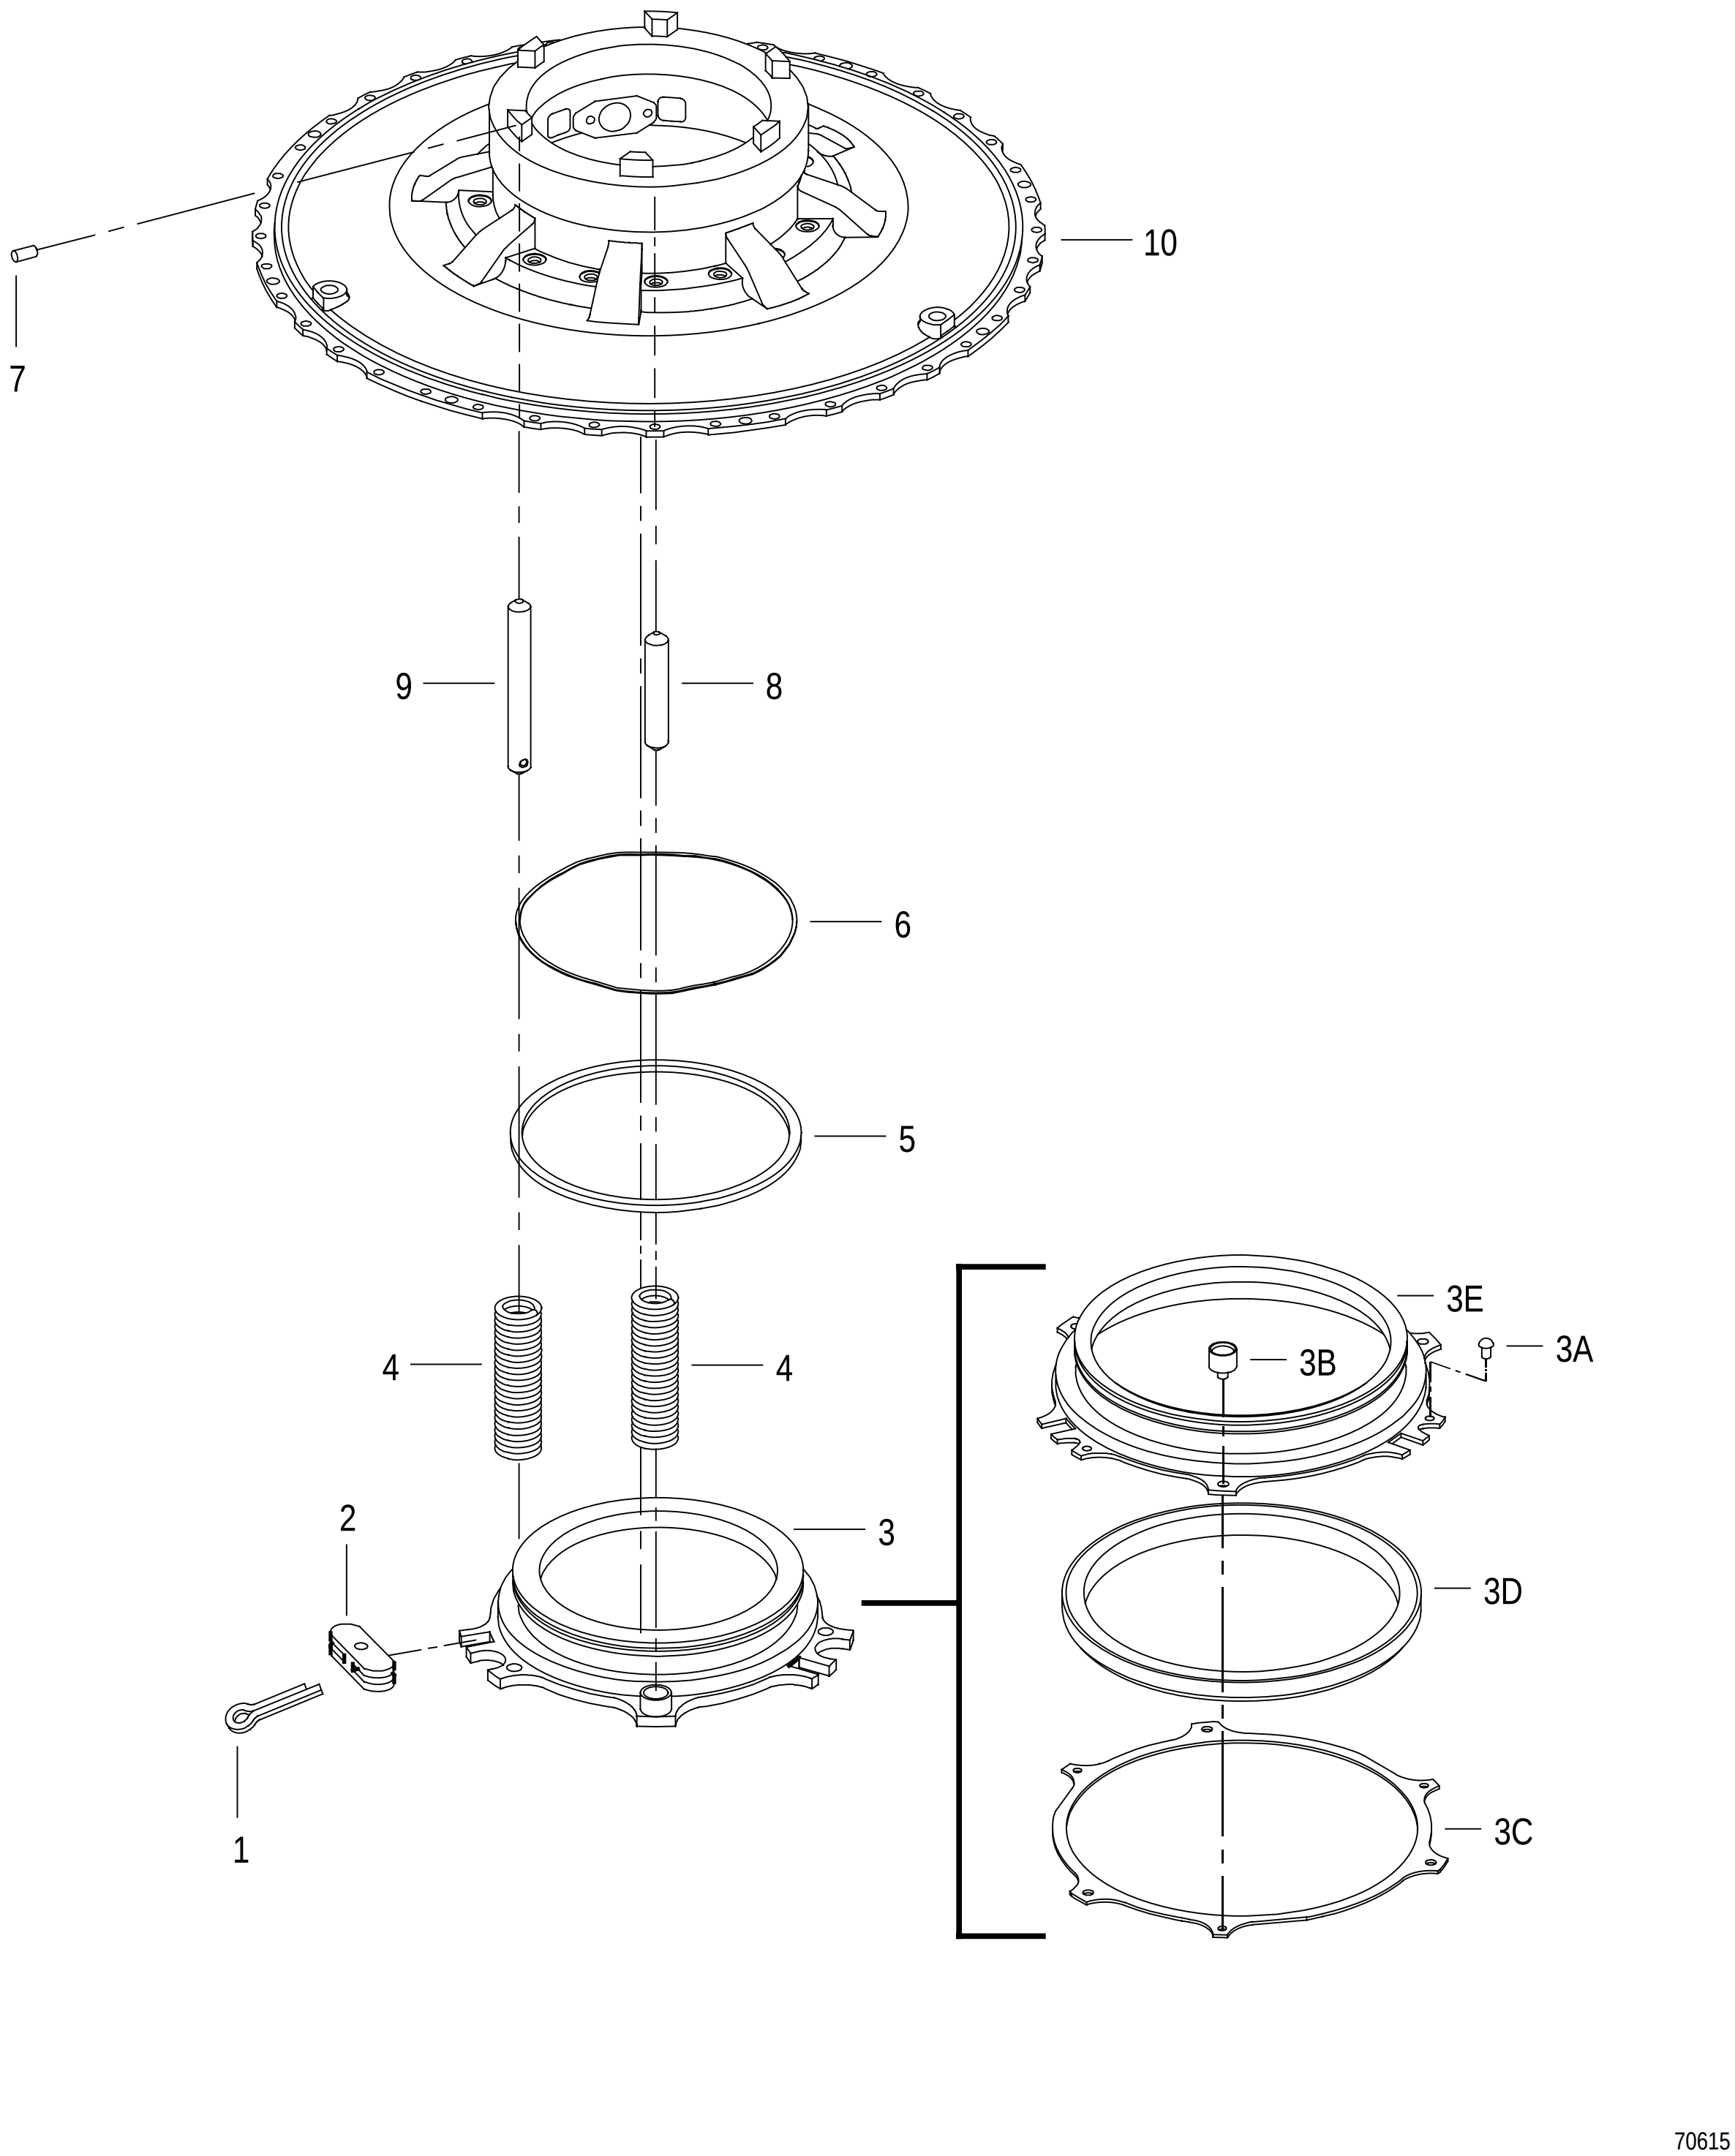


FIGURE 90. NO. 2 BEARING SEAL AND SUPPORT ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
90	4072842	52661	SEAL AND SUPPORT ASSY-NO. 2 BEARING . . . . SEE FIG. 81-8 FOR NHA	1		PAFLD
- 1	MS9245-23	96906	. PIN	3		PAOZZ
- 2	4001624	52661	. GUIDE-NO. 2 AND NO. 3 BEARING SEAL	3		PAFZZ
- 3	4074010	52661	. SEAL OPTION . . . . PROCUREMENT NO. CONSISTS OF	1		PAFDD
	4072837	52661	.. SEAL-ASSY OF, FACE, NO. 2 BEARING . . . . OPTIONAL TO 4072839	1		XA
	4072839	52661	.. SEAL-ASSY OF, FACE, NO. 2 BEARING . . . . OPTIONAL TO 4072837	1		XA
- 3A	2150048	52661	... RIVET-TUBULAR, UNIVERSAL . . . . 0.125 DIA X 0.180 IN. LONG	3		PADZZ
- 3B	4032083	52661	... SEAT-HELICAL COMPRESSION SPRING	3		XA
- 3C	4055045	52661	... PLATE-POSITIONING, NO. 2 BEARING SEAL	1		PADZZ
- 3D	4001518	52661	... SEAL-FACE, NO. 2 AND 3 BEARING . . . . USE ONLY ON 4072837	1		PADZZ
	4001532	52661	... SEAL-FACE, NO. 2 AND 3 BEARING . . . . USE ONLY ON 4072839	1		PADZZ
- 3E	4072838	52661	... HOUSING-NO. 2 BEARING SEAL	1		XA
- 4	4001619	52661	. SPRING-HELICAL COMPRESSION . . . . 0.288 OD X 0.027 IN. DIA WIRE	6		PAFZZ
- 5	% 4001629	52661	. SEAL RING-METAL . . . . 5.180 OD X 0.150 WIDE X 0.15325 IN. THK	1		PAFZZ
	4001629P10	52661	. SEAL RING-METAL . . . . 5.180 OD X 0.150 WIDE X 0.16325 IN. THK	AR		PAFZZ
	4001629P15	52661	. SEAL RING-METAL . . . . 5.180 OD X 0.150 WIDE X 0.16825 IN. THK	AR		PAFZZ
	4001629P20	52661	. SEAL RING-METAL . . . . 5.180 OD X 0.150 WIDE X 0.17325 IN. THK	AR		PAFZZ
	4001629P25	52661	. SEAL RING-METAL . . . . 5.180 OD X 0.150 WIDE X 0.17825 IN. THK	AR		PAFZZ
- 6	4044108	52661	. WASHER-SPRING TENSION . . . . 5.1025 OD X 0.070 WIDE X 0.0165 IN. LONG	1		PADZZ
	4072841	52661	. SUPPORT-NO. 2 BEARING, ASSY OF	1		PAFLD
- 7	4044206	52661	.. PIN-STRAIGHT, HEADLESS . . . . 0.09325 DIA X 0.188 IN. LONG	6		PADZZ
- 8	4023734	52661	.. PIN-STRAIGHT, HEADLESS . . . . 0.2205 DIA X 1.250 IN. LONG	3		PADZZ
- 9	4018610	52661	.. PIN-NO. 3 BEARING SEAL . . . . 1.925 IN. LONG	3		PADZZ
- 10	4072840	52661	.. SUPPORT-NO. 2 BEARING	1		XA

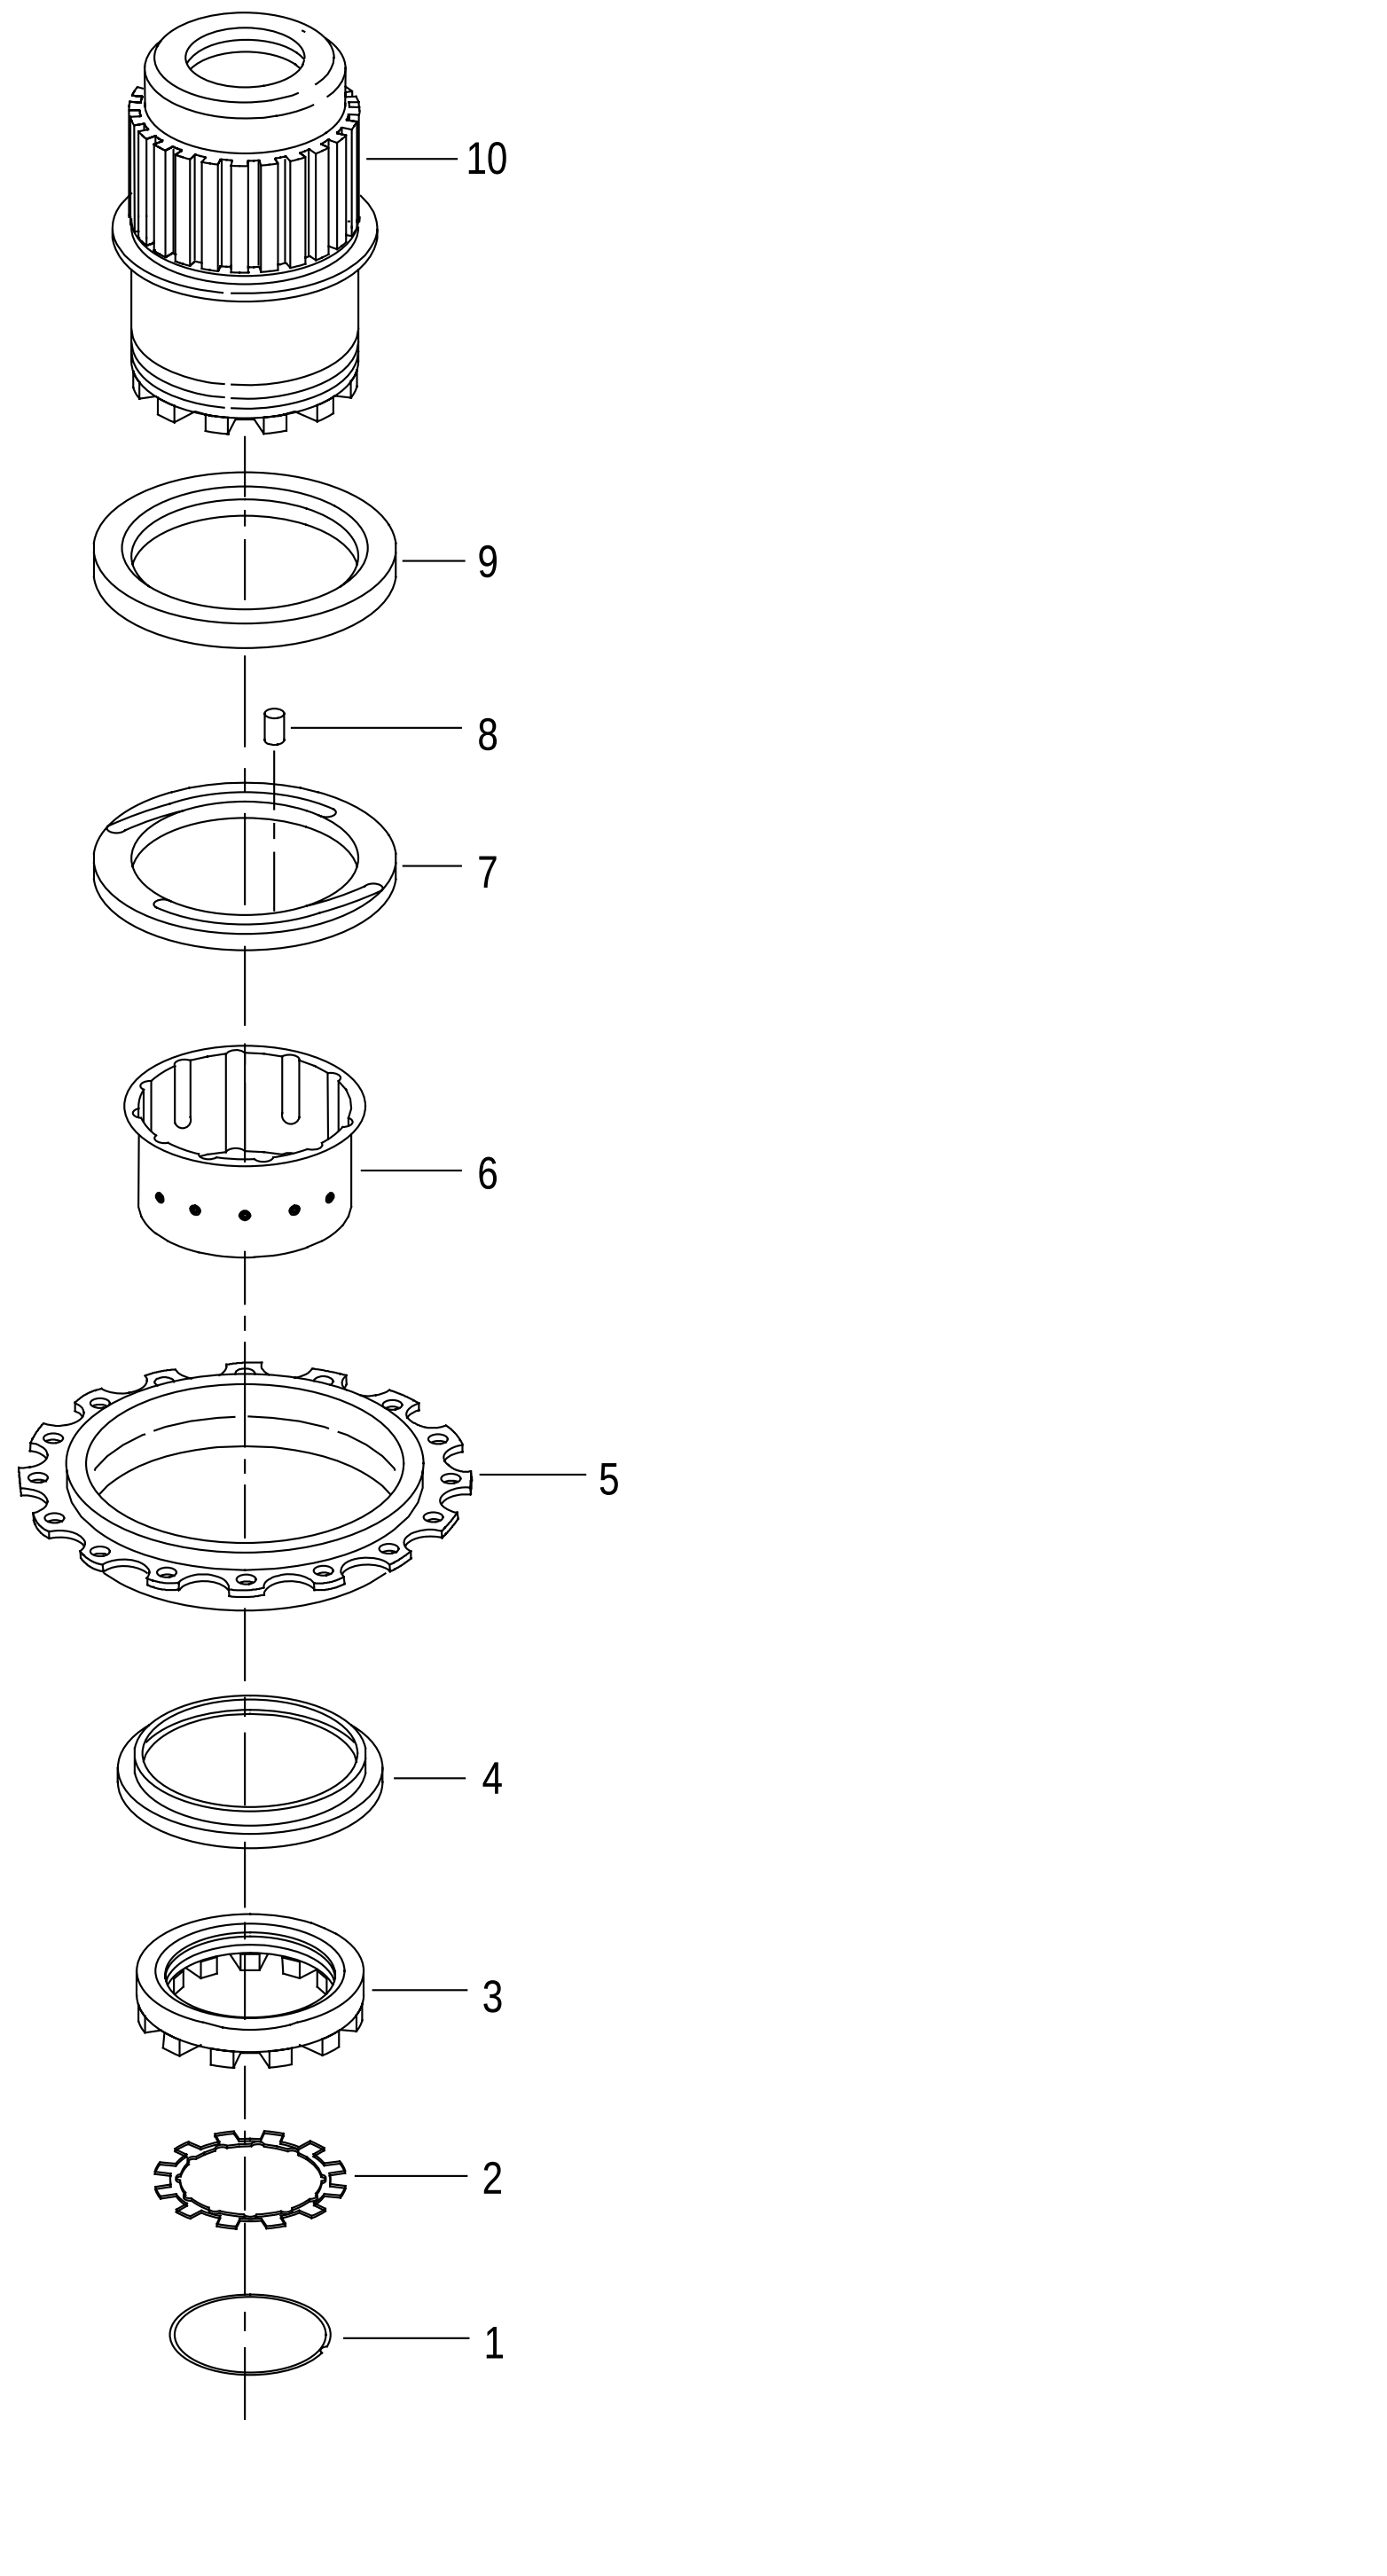


FIGURE 91. NO. 2 BEARING AND COUPLING ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
91	4072536	52661	BEARING AND COUPLING ASSY-NO. 2 . . . . SEE FIG. 82-1 FOR NHA	1		AFF
- 1	4010239	52661	. RING-RETAINING . . . . 3.700 ID X 0.0625 IN. DIA WIRE	1		PAFZZ
- 2	4010238	52661	. WASHER-KEY . . . . 3.860 ID X 0.0525 IN. THK	1		PAFZZ
- 3	4010237	52661	. NUT-BEARING RETAINING, INTERNALLY . . . . THREADED 3.9375-16UNJS-3B-LH X 1.050 IN. THK	1		PAFBZ
- 4	4001529	52661	. SEAT-NO. 2 BEARING SEAL, REAR	1		PAFLD
- 5	= 4075349	52661	. BEARING OPTION-NO. 2 . . . . SEE OPTION TABLE	1		PAFLD
	= 4081024	52661	. BEARING OPTION-NO. 2 . . . . SEE OPTION TABLE	1		PAFLD
- 6	4001857	52661	. SCOOP-NO. 2 BEARING, REAR	1		PAFBZ
- 7	4001799	52661	. SCOOP ASSY-NO. 2 BEARING, FRONT . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 8	4025382	52661	.. PIN-STRAIGHT, HEADLESS . . . . 0.09375 DIA X 0.025 IN. LONG	1		PAFZZ
- 9	4001528	52661	. SEAT-NO. 2 BEARING SEAL, FRONT	1		PAFLD
- 10	4071085	52661	. COUPLING-TURBINE SHAFT	1		PAFDD

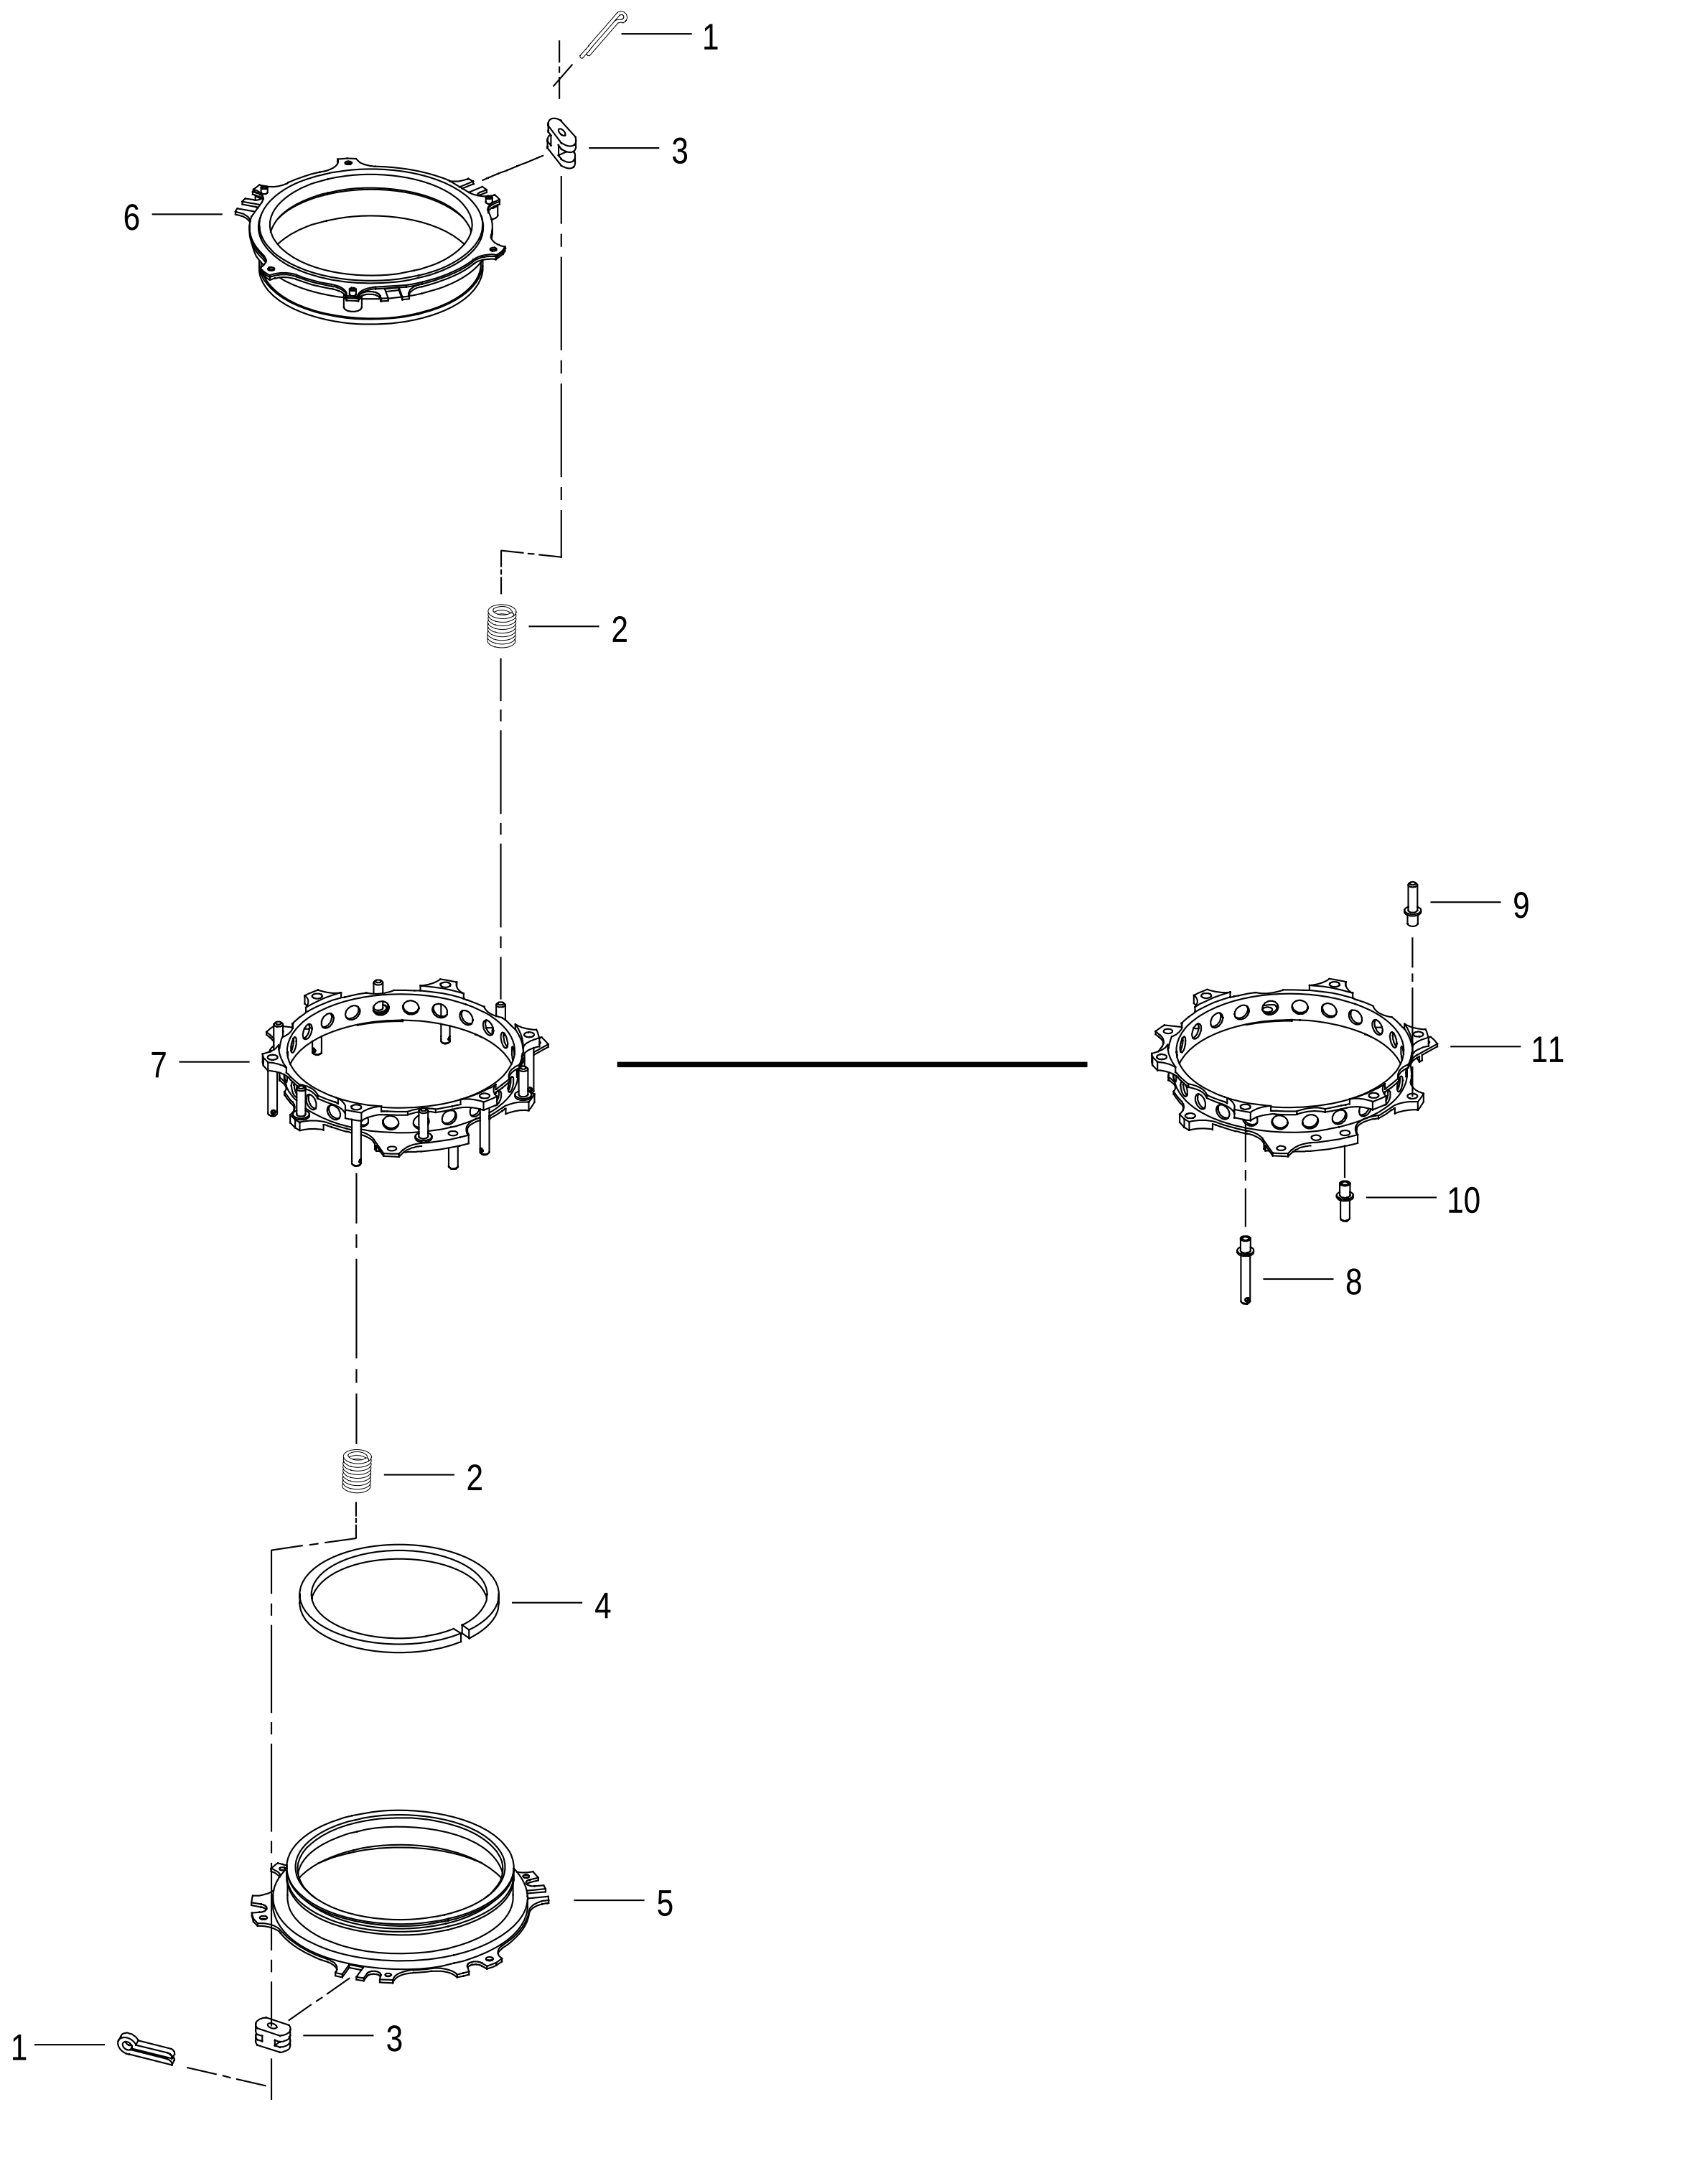


FIGURE 92. NO. 2 AND NO. 3 BEARING SEAL ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
92	4060816	52661	SEAL ASSY-NO. 2 AND NO. 3 BEARING .... SEE FIG. 82-29 FOR NHA	1		AFF
- 1	MS9245-23	96906	. PIN	6		PAOZZ
- 2	4001619	52661	. SPRING-HELICAL COMPRESSION .... 0.288 OD X 0.027 IN. DIA WIRE	12		PAFZZ
- 3	4001624	52661	. GUIDE-NO. 2 AND NO. 3 BEARING SEAL	6		PAFZZ
- 4	% 4001629	52661	. SEAL RING-METAL .... 5.180 OD X 0.150 WIDE X 0.15325 IN. THK	1		PAFZZ
	4001629P10	52661	. SEAL RING-METAL .... 5.180 OD X 0.150 WIDE X 0.16325 IN. THK	AR		PAFZZ
	4001629P15	52661	. SEAL RING-METAL .... 5.180 OD X 0.150 WIDE X 0.16825 IN. THK	AR		PAFZZ
	4001629P20	52661	. SEAL RING-METAL .... 5.180 OD X 0.150 WIDE X 0.17325 IN. THK	AR		PAFZZ
	4001629P25	52661	. SEAL RING-METAL .... 5.180 OD X 0.150 WIDE X 0.17825 IN. THK	AR		PAFZZ
- 5	4018381	52661	. SEAL OPTION .... SEE OPTION TABLE	1		PAFDD
- 6	4033286	52661	. SEAL OPTION .... SEE OPTION TABLE	1		PAFDD
- 7	4069178	52661	. SUPPORT OPTION .... PROCUREMENT NO. CONSISTS OF	1		PAFDD
	4059492	52661	.. SUPPORT-NO. 2 AND NO. 3 BEARING SEAL, ... ASSY OF OPTIONAL TO 4060815	1		XA
	4060815	52661	.. SUPPORT-NO. 2 AND NO. 3 BEARING SEAL, ... ASSY OF OPTIONAL TO 4059492	1		XA
- 8	4062295	52661	... PIN-SHOULDER, HEADLESS..................... 0.2445 AND 0.390 DIA X 1.765 IN. LONG	6		PAFZZ
- 9	4062296	52661	... PIN-SHOULDER, HEADLESS..................... 0.2445 AND 0.390 DIA X 1.105 IN. LONG	6		PAFZZ
- 10	4062297	52661	... PIN-SHOULDER, HEADLESS..................... 0.2375 AND 0.390 DIA X 0.890 IN. LONG	1		PAFZZ
- 11	4059491	52661	... SUPPORT-NO. 2 AND NO. 3 BEARING SEAL...... USE ONLY ON 4059492	1		XA
	4059496	52661	... SUPPORT-NO. 2 AND NO. 3 BEARING SEAL...... USE ONLY ON 4060815	1		XA

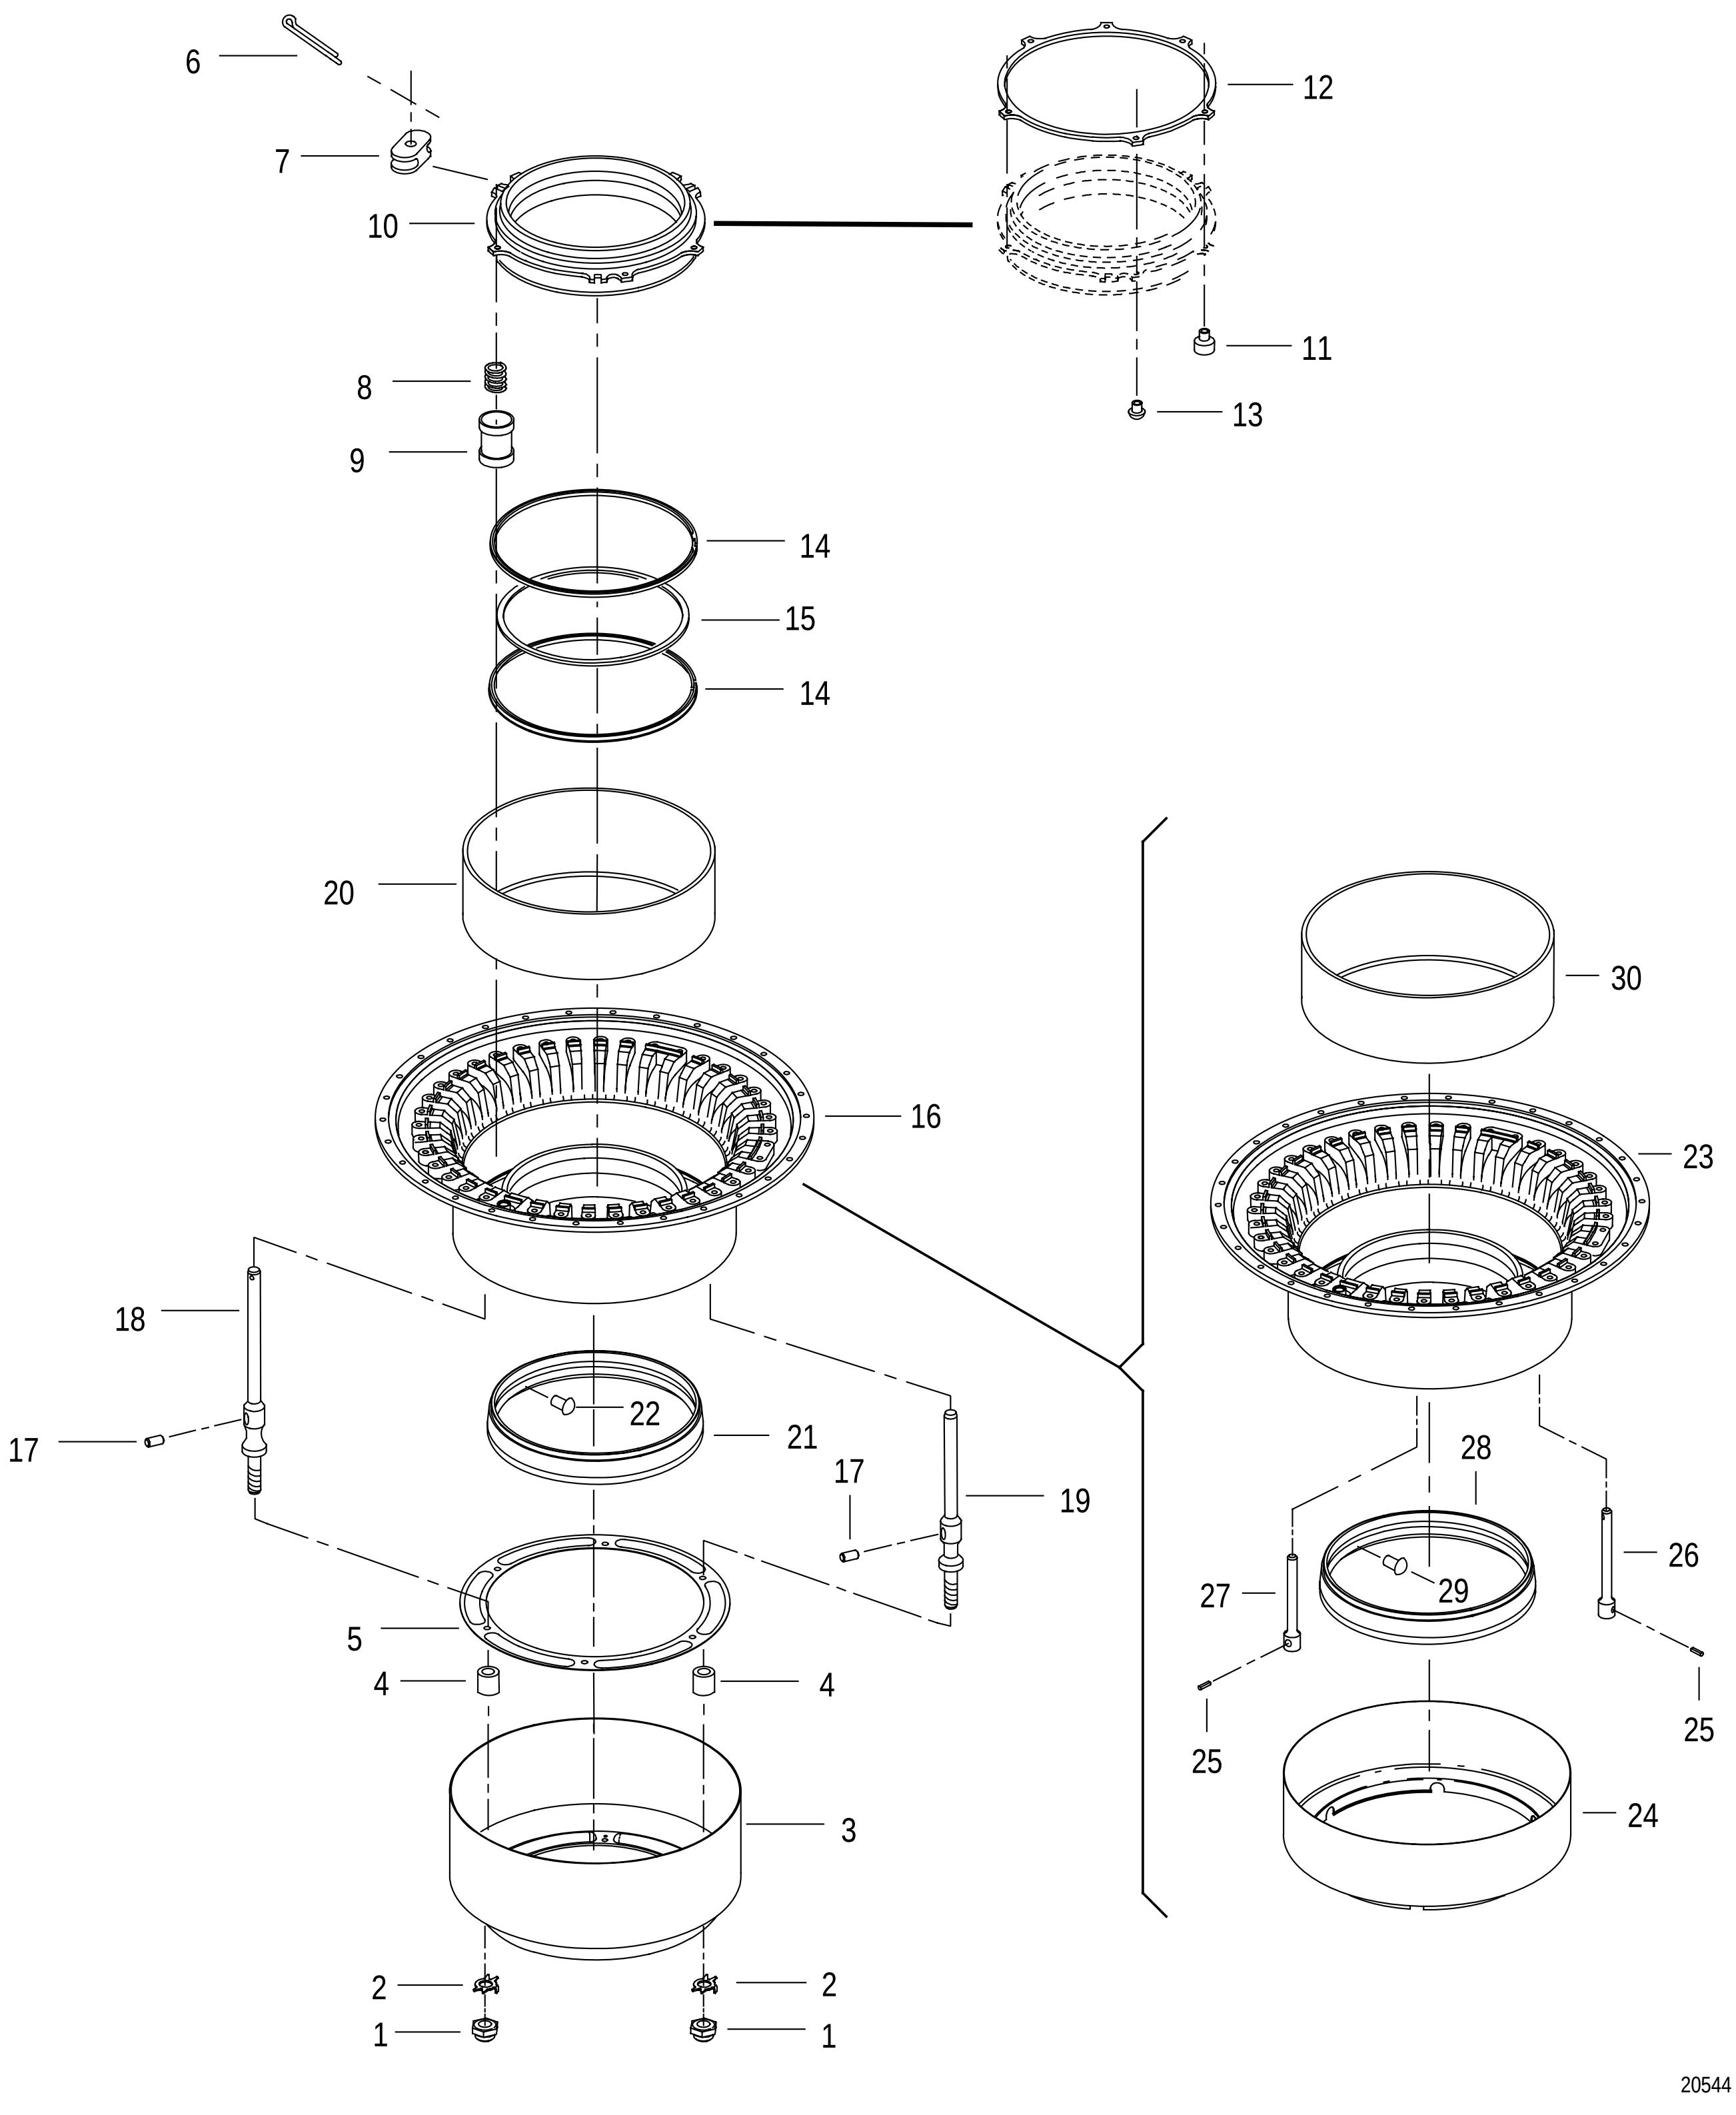


FIGURE 93. NO. 3 BEARING REAR SEAL ASSY

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
93		4075036-01	52661	SEAL ASSY-NO. 3 BEARING REAR . . . . SEE FIG. 84-1 FOR NHA	1	LX/LZ/MB/ MD/MF/ MH	AFF
	=	4068215	52661	SEAL ASSY-NO. 3 BEARING REAR . . . . SEE FIG. 84-1 FOR NHA	1	LY/MA/MC/ ME/MG/ MJ	AFF
	=	4080875-01	52661	SEAL ASSY-NO. 3 BEARING REAR . . . . SEE FIG. 84-1 FOR NHA	1	LY/MA/MC/ ME/MG/ MJ	AFF
- 1		4021812	52661	. NUT OPTION . . . . SEE OPTION TABLE USE ONLY ON 4075036-01	6		PAOZZ
- 2		4042849	52661	. WASHER-KEY . . . . 0.2125 ID X 0.022 IN. THK USE ONLY ON 4075036-01	6		PADZZ
- 3		4075539	52661	. SHIELD-NO. 3 BEARING . . . . USE ONLY ON 4075036-01	1	RY	PADZZ
		4082826	52661	. SHIELD-NO. 3 BEARING . . . . USE ONLY ON 4075036-01	1	RZ	PADZZ
- 4		4075195	52661	. SPACER-SLEEVE . . . . 0.210 ID X 0.365 OD X 0.400 IN. LONG USE ONLY ON 4075036-01	6		PADZZ
- 5		4075540	52661	. BAFFLE-NO. 3 BEARING . . . . USE ONLY ON 4075036-01	1		PAFZZ
- 6		MS9245-23	96906	. PIN	3		PAOZZ
- 7		4001624	52661	. GUIDE-NO. 2 AND NO. 3 BEARING SEAL	3		PAFZZ
- 8		4001619	52661	. SPRING-HELICAL COMPRESSION . . . . 0.288 OD X 0.027 IN. DIA WIRE	6		PAFZZ
- 9		4054588	52661	. SEAT-HELICAL COMPRESSION SPRING	6		PADZZ
- 10		4036995	52661	. SEAL OPTION . . . . PROCUREMENT NO. CONSISTS OF	1		PAFLD
		4036993	52661	.. SEAL-FACE, NO. 3 BEARING, REAR, ASSY OF . . . . OPTIONAL TO 4036994	1		XA
		4036994	52661	.. SEAL-FACE, NO. 3 BEARING, REAR, ASSY OF . . . . OPTIONAL TO 4036993 PARTIAL BREAKDOWN FOLLOWS	1		XA
- 11		4032083	52661	... SEAT-HELICAL COMPRESSION SPRING	3		XA
- 12		4012495	52661	... PLATE-POSITIONING, NO. 3 BEARING SEAL	1		XA
- 13		2150048	52661	... RIVET-TUBULAR, UNIVERSAL . . . . 0.125 DIA X 0.180 IN. LONG	3		PADZZ
- 14	%	4001642	52661	. SEAL RING-METAL . . . . 7.140 OD X 0.150 WIDE X 0.15325 IN. THK	2		PAFZZ
		4001642P05	52661	. SEAL RING . . . . 7.140 OD X 0.150 WIDE X 0.1575 - 0.1590 IN. THK	AR		PAFZZ
		4001642P10	52661	. SEAL RING . . . . 7.140 OD X 0.150 WIDE X 0.1625 - 0.1640 IN. THK	AR		PAFZZ
		4001642P15	52661	. SEAL RING . . . . 7.140 OD X 0.150 WIDE X 0.1675 - 0.1690 IN. THK	AR		PAFZZ
- 15		4035878	52661	. WASHER-SPRING TENSION . . . . 7.0625 OD X 0.070 WIDE X 0.0165 IN. THK	1		PAFZZ
- 16		4076389	52661	. SUPPORT-NO. 3 BEARING SEAL, ASSY OF . . . . USE ONLY ON 4075036-01	1		PAFDD
- 17		4075171-01	52661	.. PIN-STRAIGHT, HEADLESS . . . . 0.15305 DIA X 0.312 IN. LONG	6		PADZZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	93 - 18		4075033	52661	.. PIN-NO. 3 BEARING SEAL .... 4.450 IN. LONG	3		PADZZ
	- 19		4075034	52661	.. PIN-NO. 3 BEARING SEAL .... 3.780 IN. LONG	3		PADZZ
	- 20		4068183	52661	.. DAMPER-NO. 3 BEARING SEAL SUPPORT	1		PADZZ
R	- 21		4061536	52661	.. RING-AIR SEALING, NO. 3 BEARING, ASSY OF	1		PADZZ
	- 22		AN123320	88044	.. RIVET (AP)	12		PAFZZ
	- 23		4068182	52661	. SUPPORT-NO. 3 BEARING SEAL, ASSY OF .... USE ONLY ON 4068215	1		PAFDD
			4080874	52661	. SUPPORT-NO. 3 BEARING SEAL, ASSY OF .... USE ONLY ON 4080875-01 PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
	- 24		4061533	52661	.. SHIELD-HEAT, NO. 3 BEARING	1		PADZZ
	- 25	%	4036990	52661	.. PIN-STRAIGHT, HEADLESS .... 0.09325 DIA X 0.312 IN. LONG	6		PADZZ
			4036990P05	52661	.. PIN-STRAIGHT, HEADLESS .... 0.09825 DIA X 0.312 IN. LONG	AR		PADZZ
			4036990P10	52661	.. PIN-STRAIGHT, HEADLESS .... 0.10325 DIA X 0.312 IN. LONG	AR		PADZZ
			4036990P15	52661	.. PIN-STRAIGHT, HEADLESS .... 0.10825 DIA X 0.312 IN. LONG	AR		PADZZ
			4036990P20	52661	.. PIN-STRAIGHT, HEADLESS .... 0.11325 DIA X 0.312 IN. LONG	AR		PADZZ
			4036990P25	52661	.. PIN-STRAIGHT, HEADLESS .... 0.11825 DIA X 0.312 IN. LONG	AR		PADZZ
	- 26		4061534	52661	.. PIN-NO. 3 BEARING SEAL .... 3.100 IN. LONG	3		PADZZ
	- 27		4061535	52661	.. PIN-NO. 3 BEARING SEAL .... 2.425 IN. LONG	3		PADZZ
R	- 28		4061536	52661	.. RING-AIR SEALING, NO. 3 BEARING, ASSY OF	1		PADZZ
	- 29		AN123320	88044	.. RIVET (AP)	12		PAFZZ
	- 30		4068183	52661	.. DAMPER-NO. 3 BEARING SEAL SUPPORT	1		PADZZ

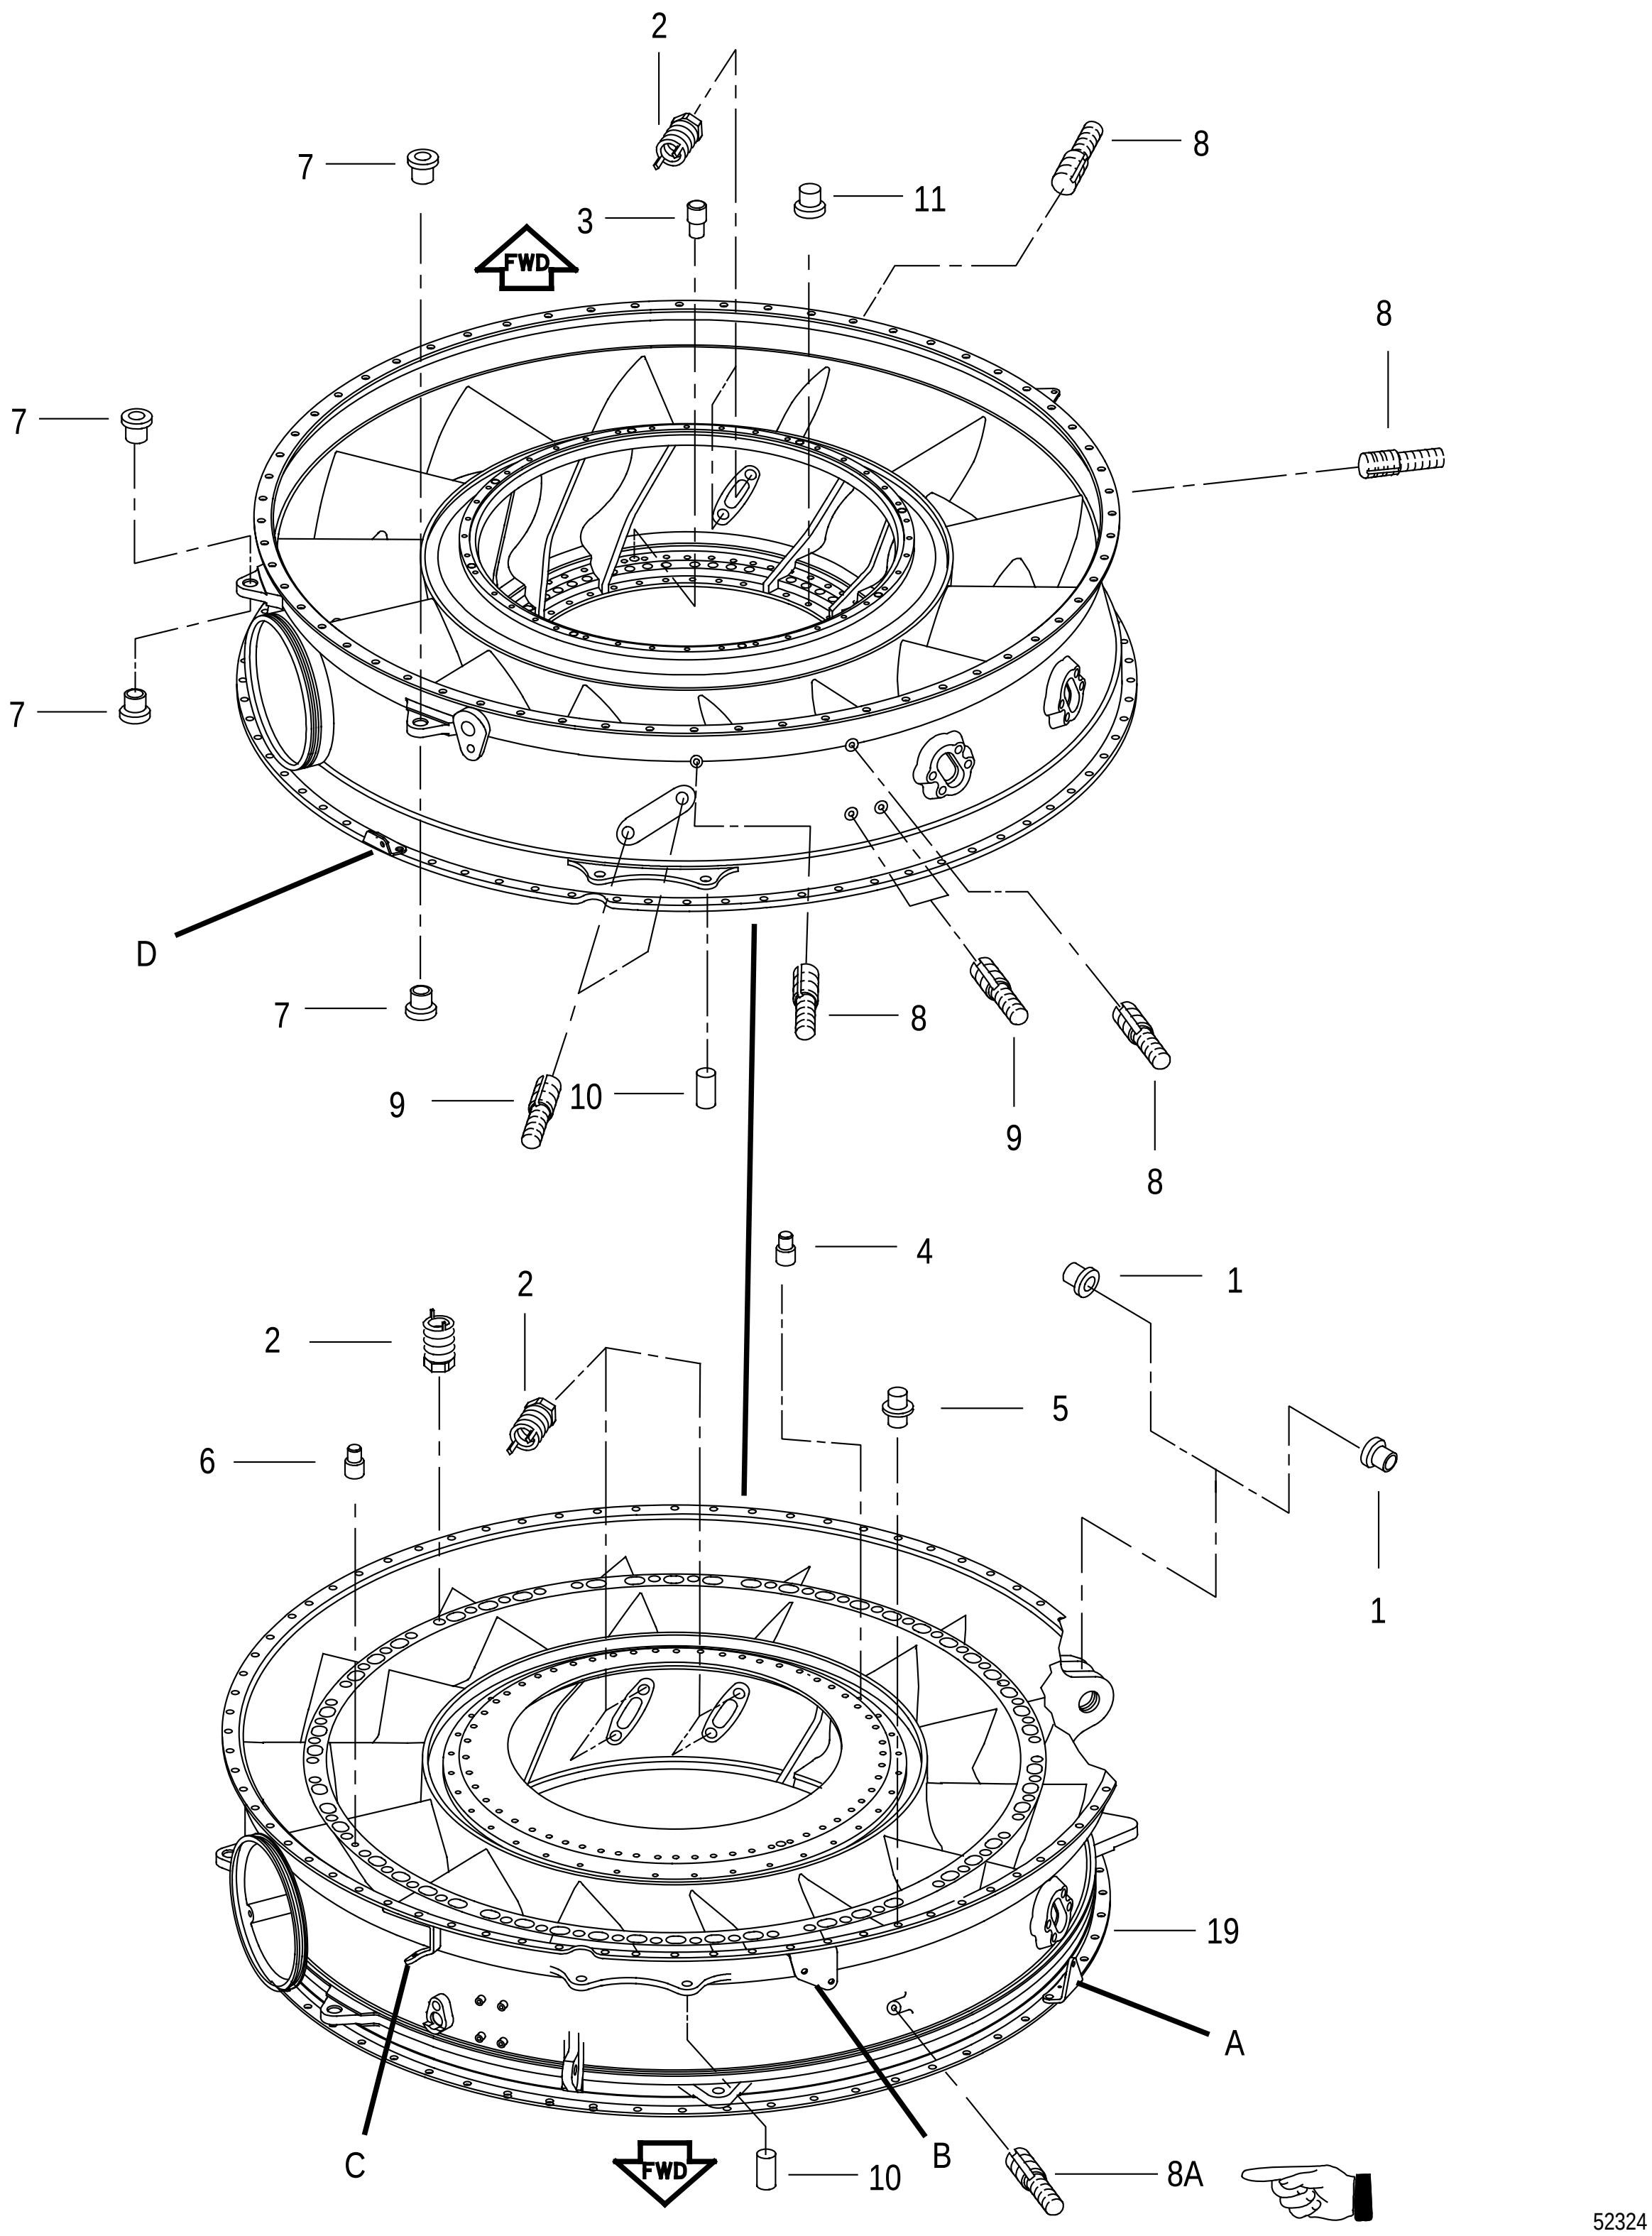


FIGURE 94. COMPRESSOR INTERMEDIATE CASE ASSY
(SHEET 1 OF 2)

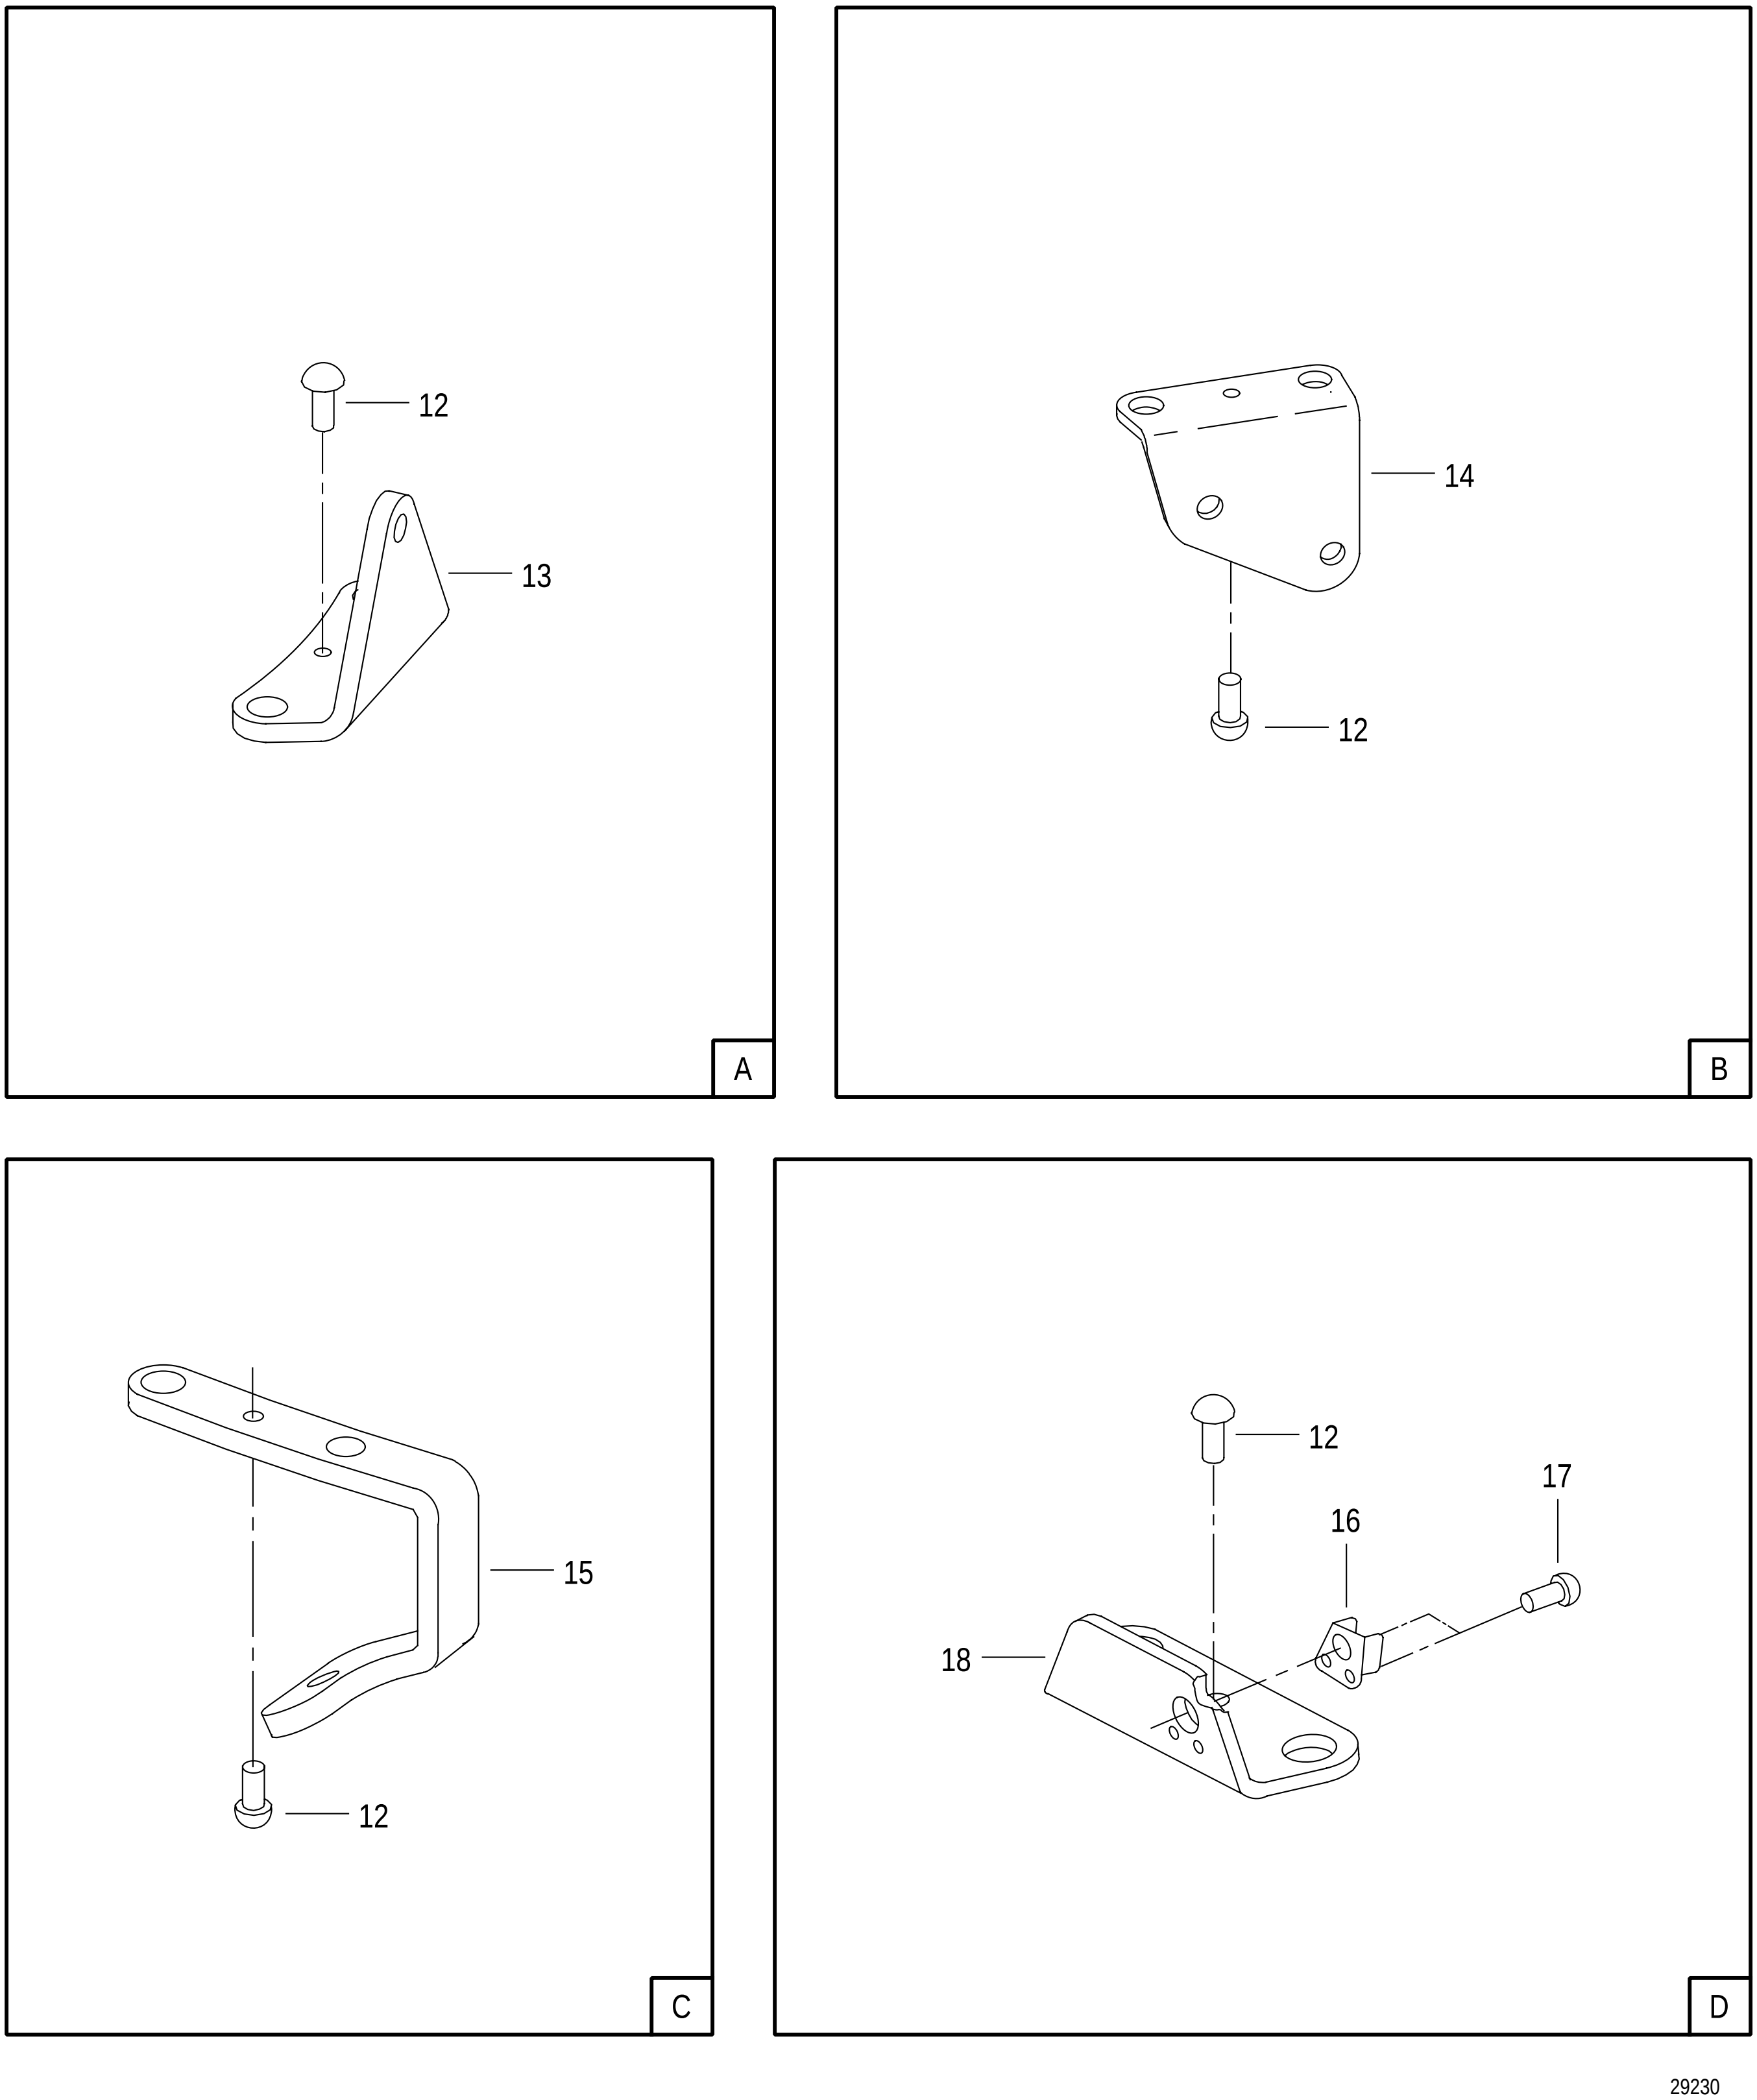


FIGURE 94. COMPRESSOR INTERMEDIATE CASE ASSY
(SHEET 2 OF 2)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	94	= 4078245	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	LZ/ZM	PAFDD
R		= 4078248	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	BL/DA/MB/ ZP	PAFDD
R		4079419	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	BM/DB/LV/ MD/ZR	PAFDD
R		4080483	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	LW/LX/MF/ MH/ZT	PAFDD
R		4080829	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	LY/MG/MJ/ AAB	PAFDD
R		4080877	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	MA/ZV	PAFDD
R		4080879	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	MC/ZX	PAFDD
R		4080882	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	ME/ZZ	PAFDD
R R		4084430	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	ZN	PAFDD
R R		4084431	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	ZQ	PAFDD
R R		4084432	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	ZS	PAFDD
R R		4084433	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	ZU	PAFDD
R R		4084434	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	ZW	PAFDD
R R		4084435	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	ZY	PAFDD
R R		4084436	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	AAA	PAFDD
R R		4084443	52661	CASE-COMPRESSOR INTERMEDIATE, ASSY OF . . . . SEE FIG. 84-8 FOR NHA	1	AAC	PAFDD
	- 1	4009663	52661	. BUSHING-SLEEVE, FLANGED . . . . 0.563 ID X 0.75225 OD X 0.350 IN. THK	2		PAFZZ
	- 2	ST2786-02	52661	. INSERT OPTION . . . . SEE OPTION TABLE	61		PAFZZ
		TR26036N-428SBVX	29372	. INSERT-SCREW THREAD, SELF-LOCKING . . . . P&WA PART NO. ST2609-02 WHEN EXH USE ST2786-02	61		PAFZZ
	- 3	4069985	52661	. PIN-SHOULDER, HEADLESS . . . . 0.1875 AND 0.250 DIA X 0.585 IN. LONG USE ONLY ON 4078245, 4078248, 4079419, AND 4080483 REPLACES 444613	1		PAFZZ
	- 4	4069985	52661	. PIN-SHOULDER, HEADLESS . . . . 0.1875 AND 0.250 DIA X 0.585 IN. LONG REPLACES 444613	1		PAFZZ
	- 5	476067	52661	. PIN-SHOULDER, HEADLESS . . . . 0.1875 AND 0.312 DIA X 0.445 IN. LONG	1		PAFZZ
	- 6	4069985	52661	. PIN-SHOULDER, HEADLESS . . . . 0.1875 AND 0.250 DIA X 0.585 IN. LONG	1		PAFZZ
	- 7	4070771	52661	. BUSHING-SLEEVE, FLANGED . . . . 0.3771 ID X 0.50125 OD X 0.240 IN. THK	4		PAFZZ
	- 8	TR28009-16	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 1.000 IN. LONG P&WA PART NO. ST2665-16	4		PAFZZ
	- 8A	TR28009-8	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.500 IN. LONG P&WA PART NO. ST2665-08 USE ONLY ON 4078245, 4078248, 4079419, 4080877, 4080879, AND 4080882	1		PAFZZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
94 - 9		TR28009-8	29372	. STUD-LOCKED IN . . . . 0.190-32 X 0.250-28 X 0.500 IN. LONG P&WA PART NO. ST2665-08	4		PAFZZ
- 10		425422	52661	. PIN-STRAIGHT, HEADLESS . . . . 0.375 DIA X 1.000 IN. LONG	2		PAFZZ
- 11		4001894	52661	. PIN-STRAIGHT, HEADED, FILLISTER . . . . 0.18705 DIA X 0.280 IN. LONG	1		PAFZZ
- 12		MS9318-100	96906	. RIVET	4		PAFZZ
- 13		4074053	52661	. BRACKET-ANGLE	1		PAOZZ
- 14		4075633	52661	. BRACKET-LOOP CLAMP	1		PAFZZ
- 15		4077354	52661	. BRACKET-LOOP CLAMP . . . . USE ONLY ON 4078245, 4078248, 4080877, AND 4080879	1		PAFZZ
		4078237	52661	. BRACKET-LOOP CLAMP . . . . USE ONLY ON 4079419, 4080483, 4080829, AND 4080882	1		PAFZZ
		4077222	52661	. BRACKET-ANGLE, ASSY OF	1		PAFZZ
- 16	=	4046367	52661	.. NUT OPTION . . . . SEE OPTION TABLE	1		PAFZZ
	=	ST5030-09	52661	.. NUT OPTION . . . . SEE OPTION TABLE	1		PAFZZ
- 17		AN123469	88044	.. RIVET (AP)	2		PAOZZ
- 18		4077223	52661	.. BRACKET-ANGLE	1		XA
- 19		4078247	52661	. CASE-COMPRESSOR INTERMEDIATE . . . . USE ONLY ON 4078245	1		XA
		4078246	52661	. CASE-COMPRESSOR INTERMEDIATE . . . . USE ONLY ON 4078248 AND 4079419	1		XA
		4080480	52661	. CASE-COMPRESSOR INTERMEDIATE . . . . USE ONLY ON 4080483	1		XA
		4080830	52661	. CASE-COMPRESSOR INTERMEDIATE . . . . USE ONLY ON 4080829	1		XA
		4080878	52661	. CASE-COMPRESSOR INTERMEDIATE . . . . USE ONLY ON 4080877	1		XA
		4080880	52661	. CASE-COMPRESSOR INTERMEDIATE . . . . USE ONLY ON 4080879 AND 4080882	1		XA

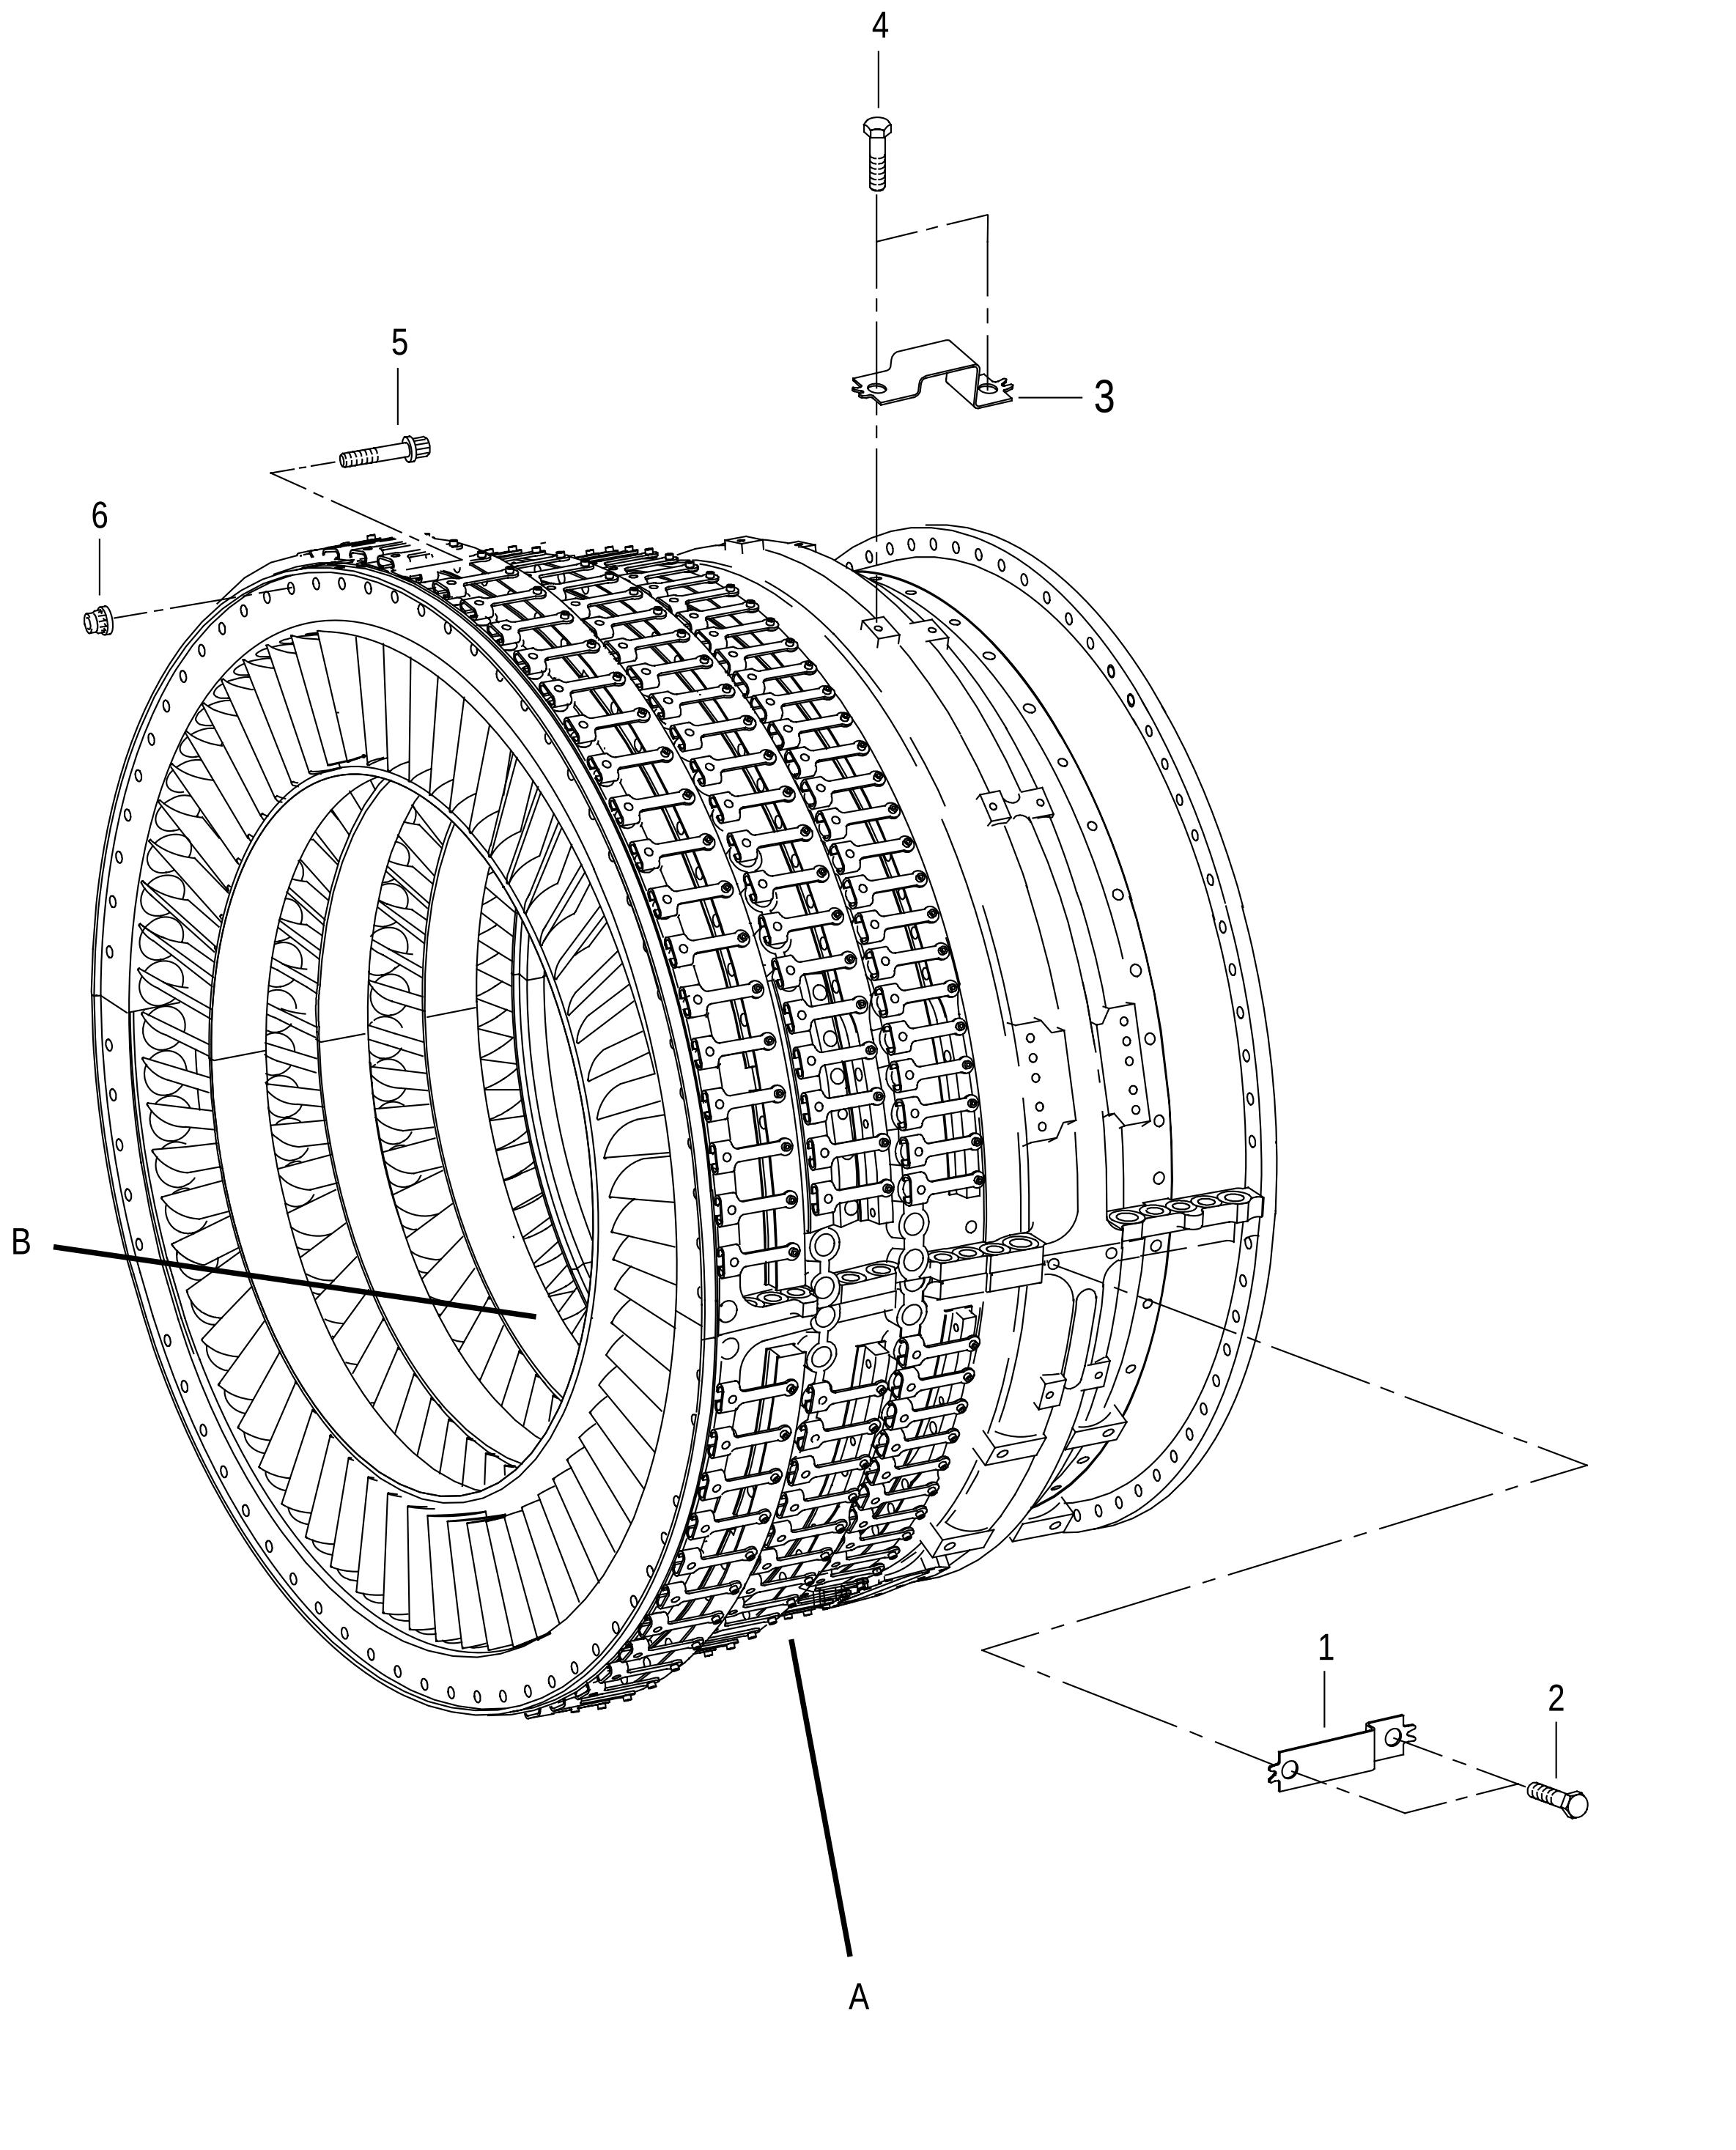


FIGURE 95. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (VARIABLE 6TH STAGE VANES)
(SHEET 1 OF 7)

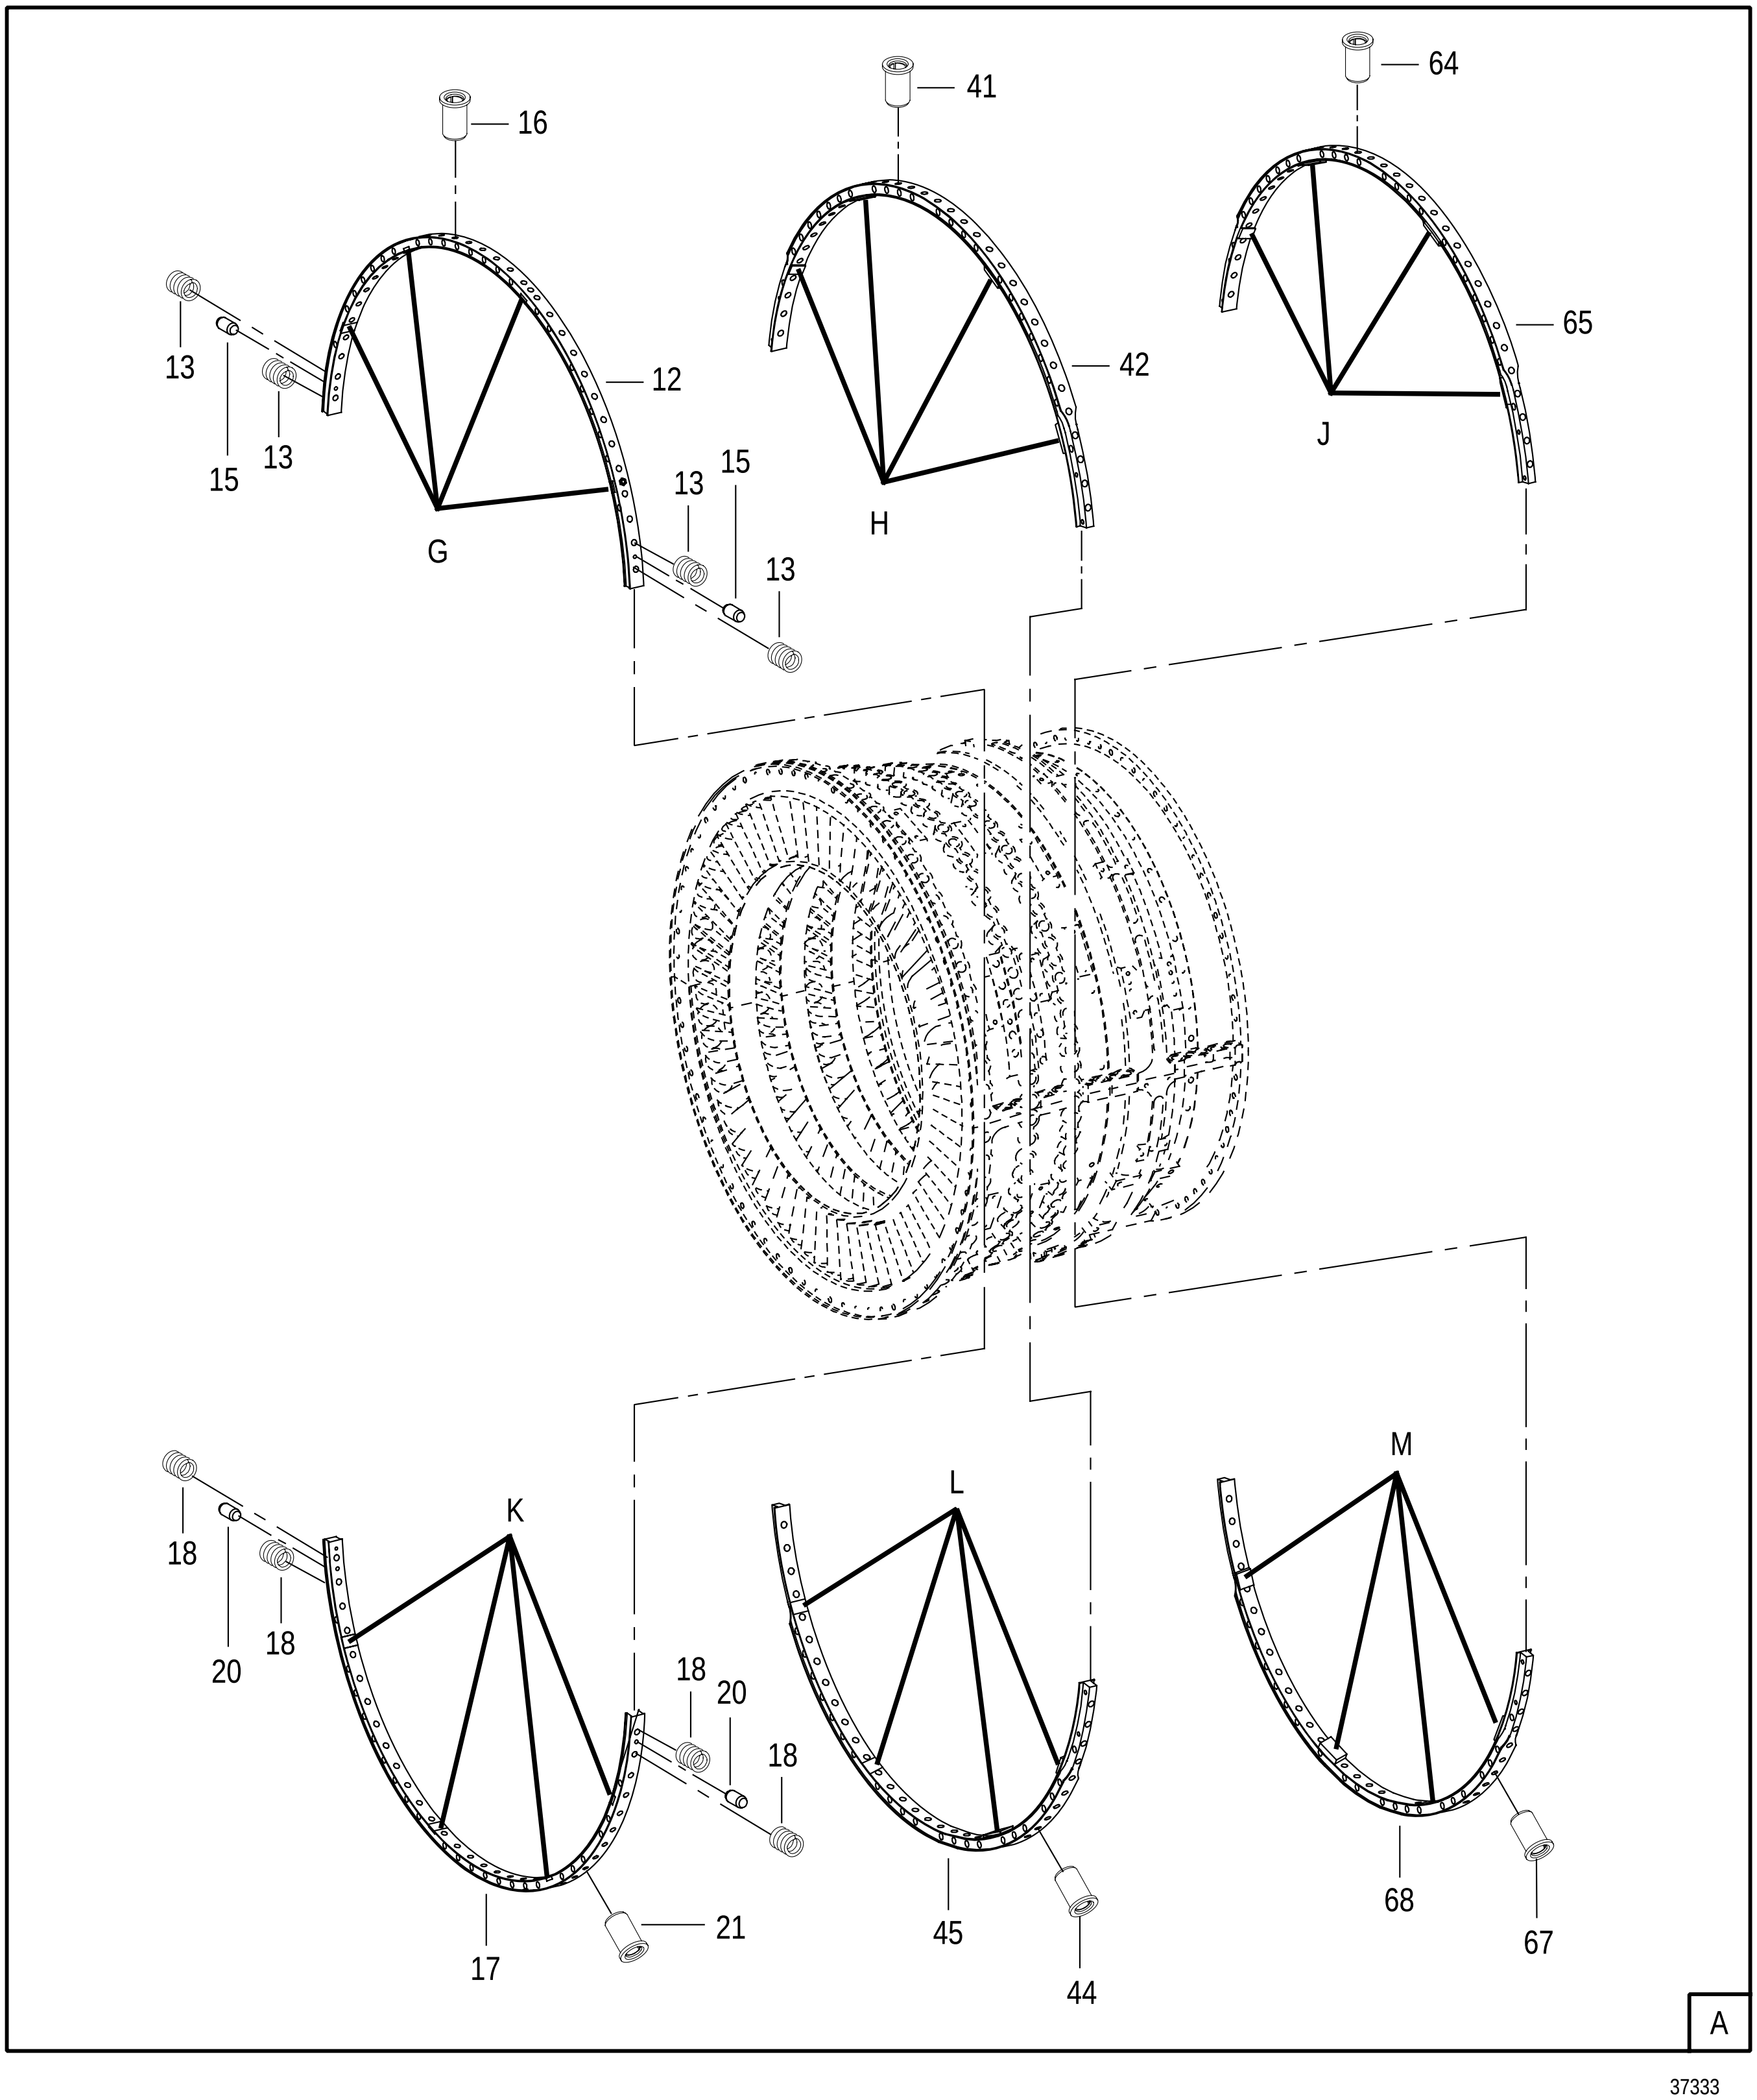


FIGURE 95. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (VARIABLE 6TH STAGE VANES)
(SHEET 2 OF 7)

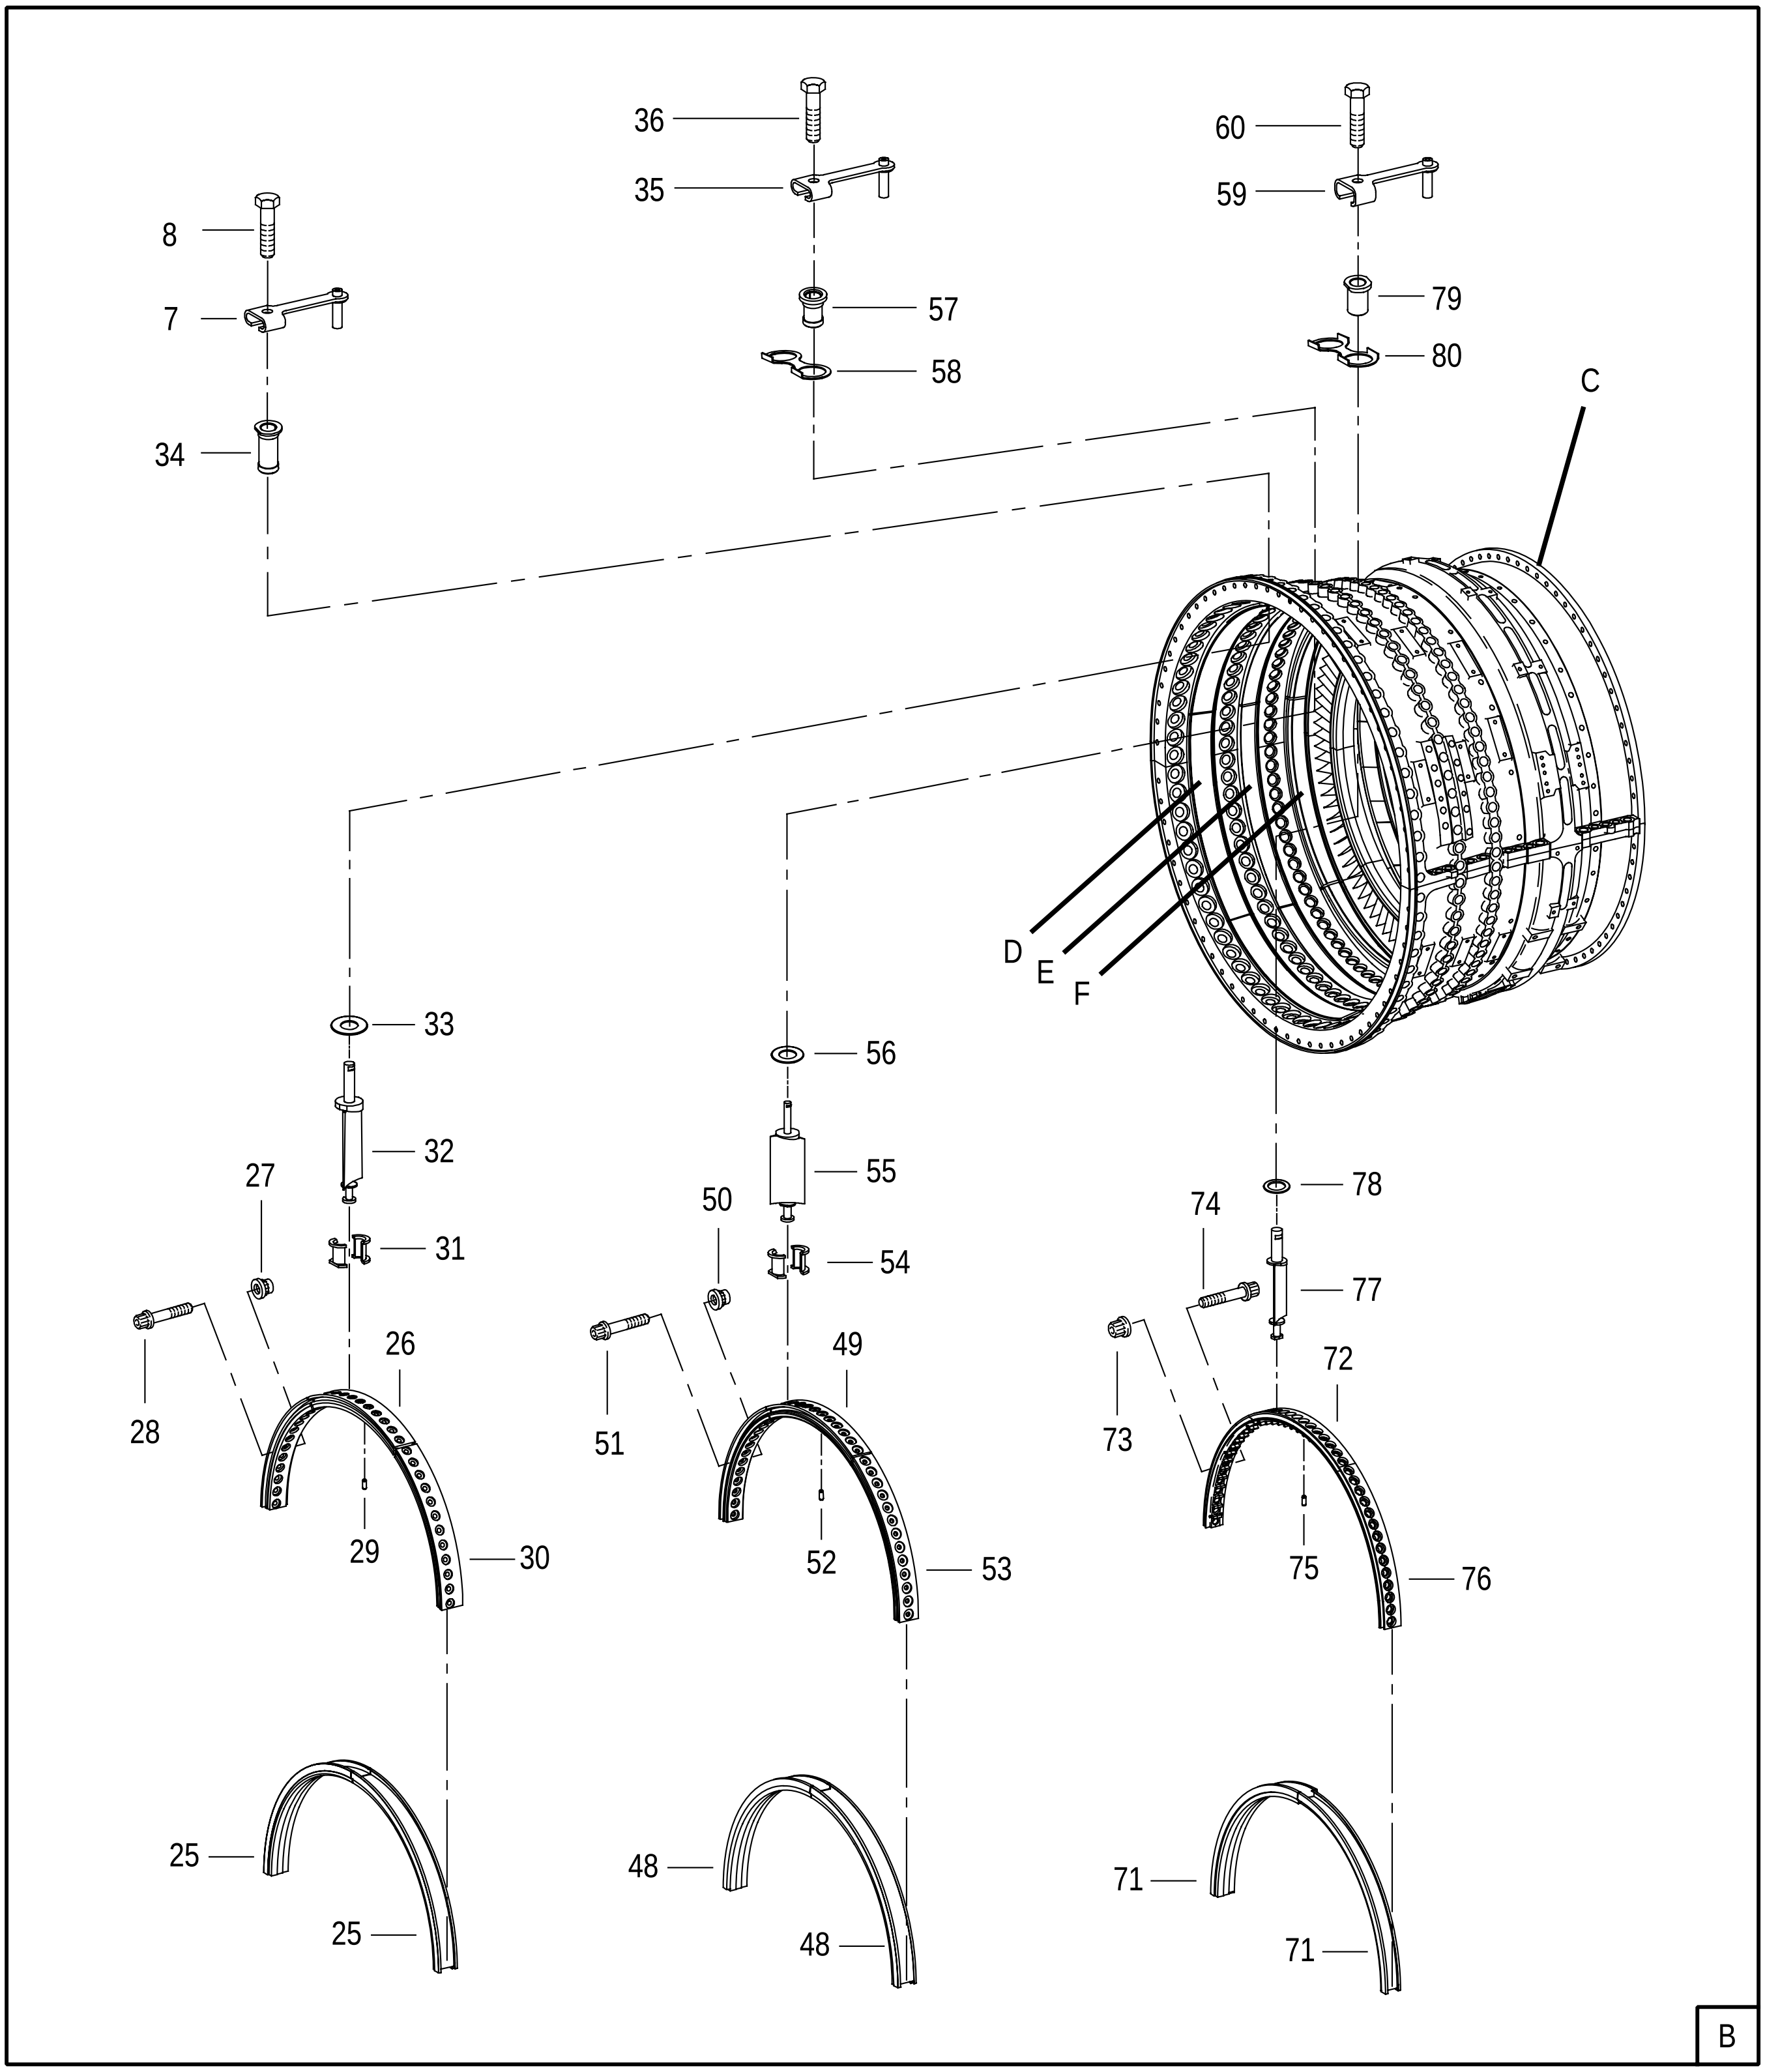


FIGURE 95. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (VARIABLE 6TH STAGE VANES)
(SHEET 3 OF 7)

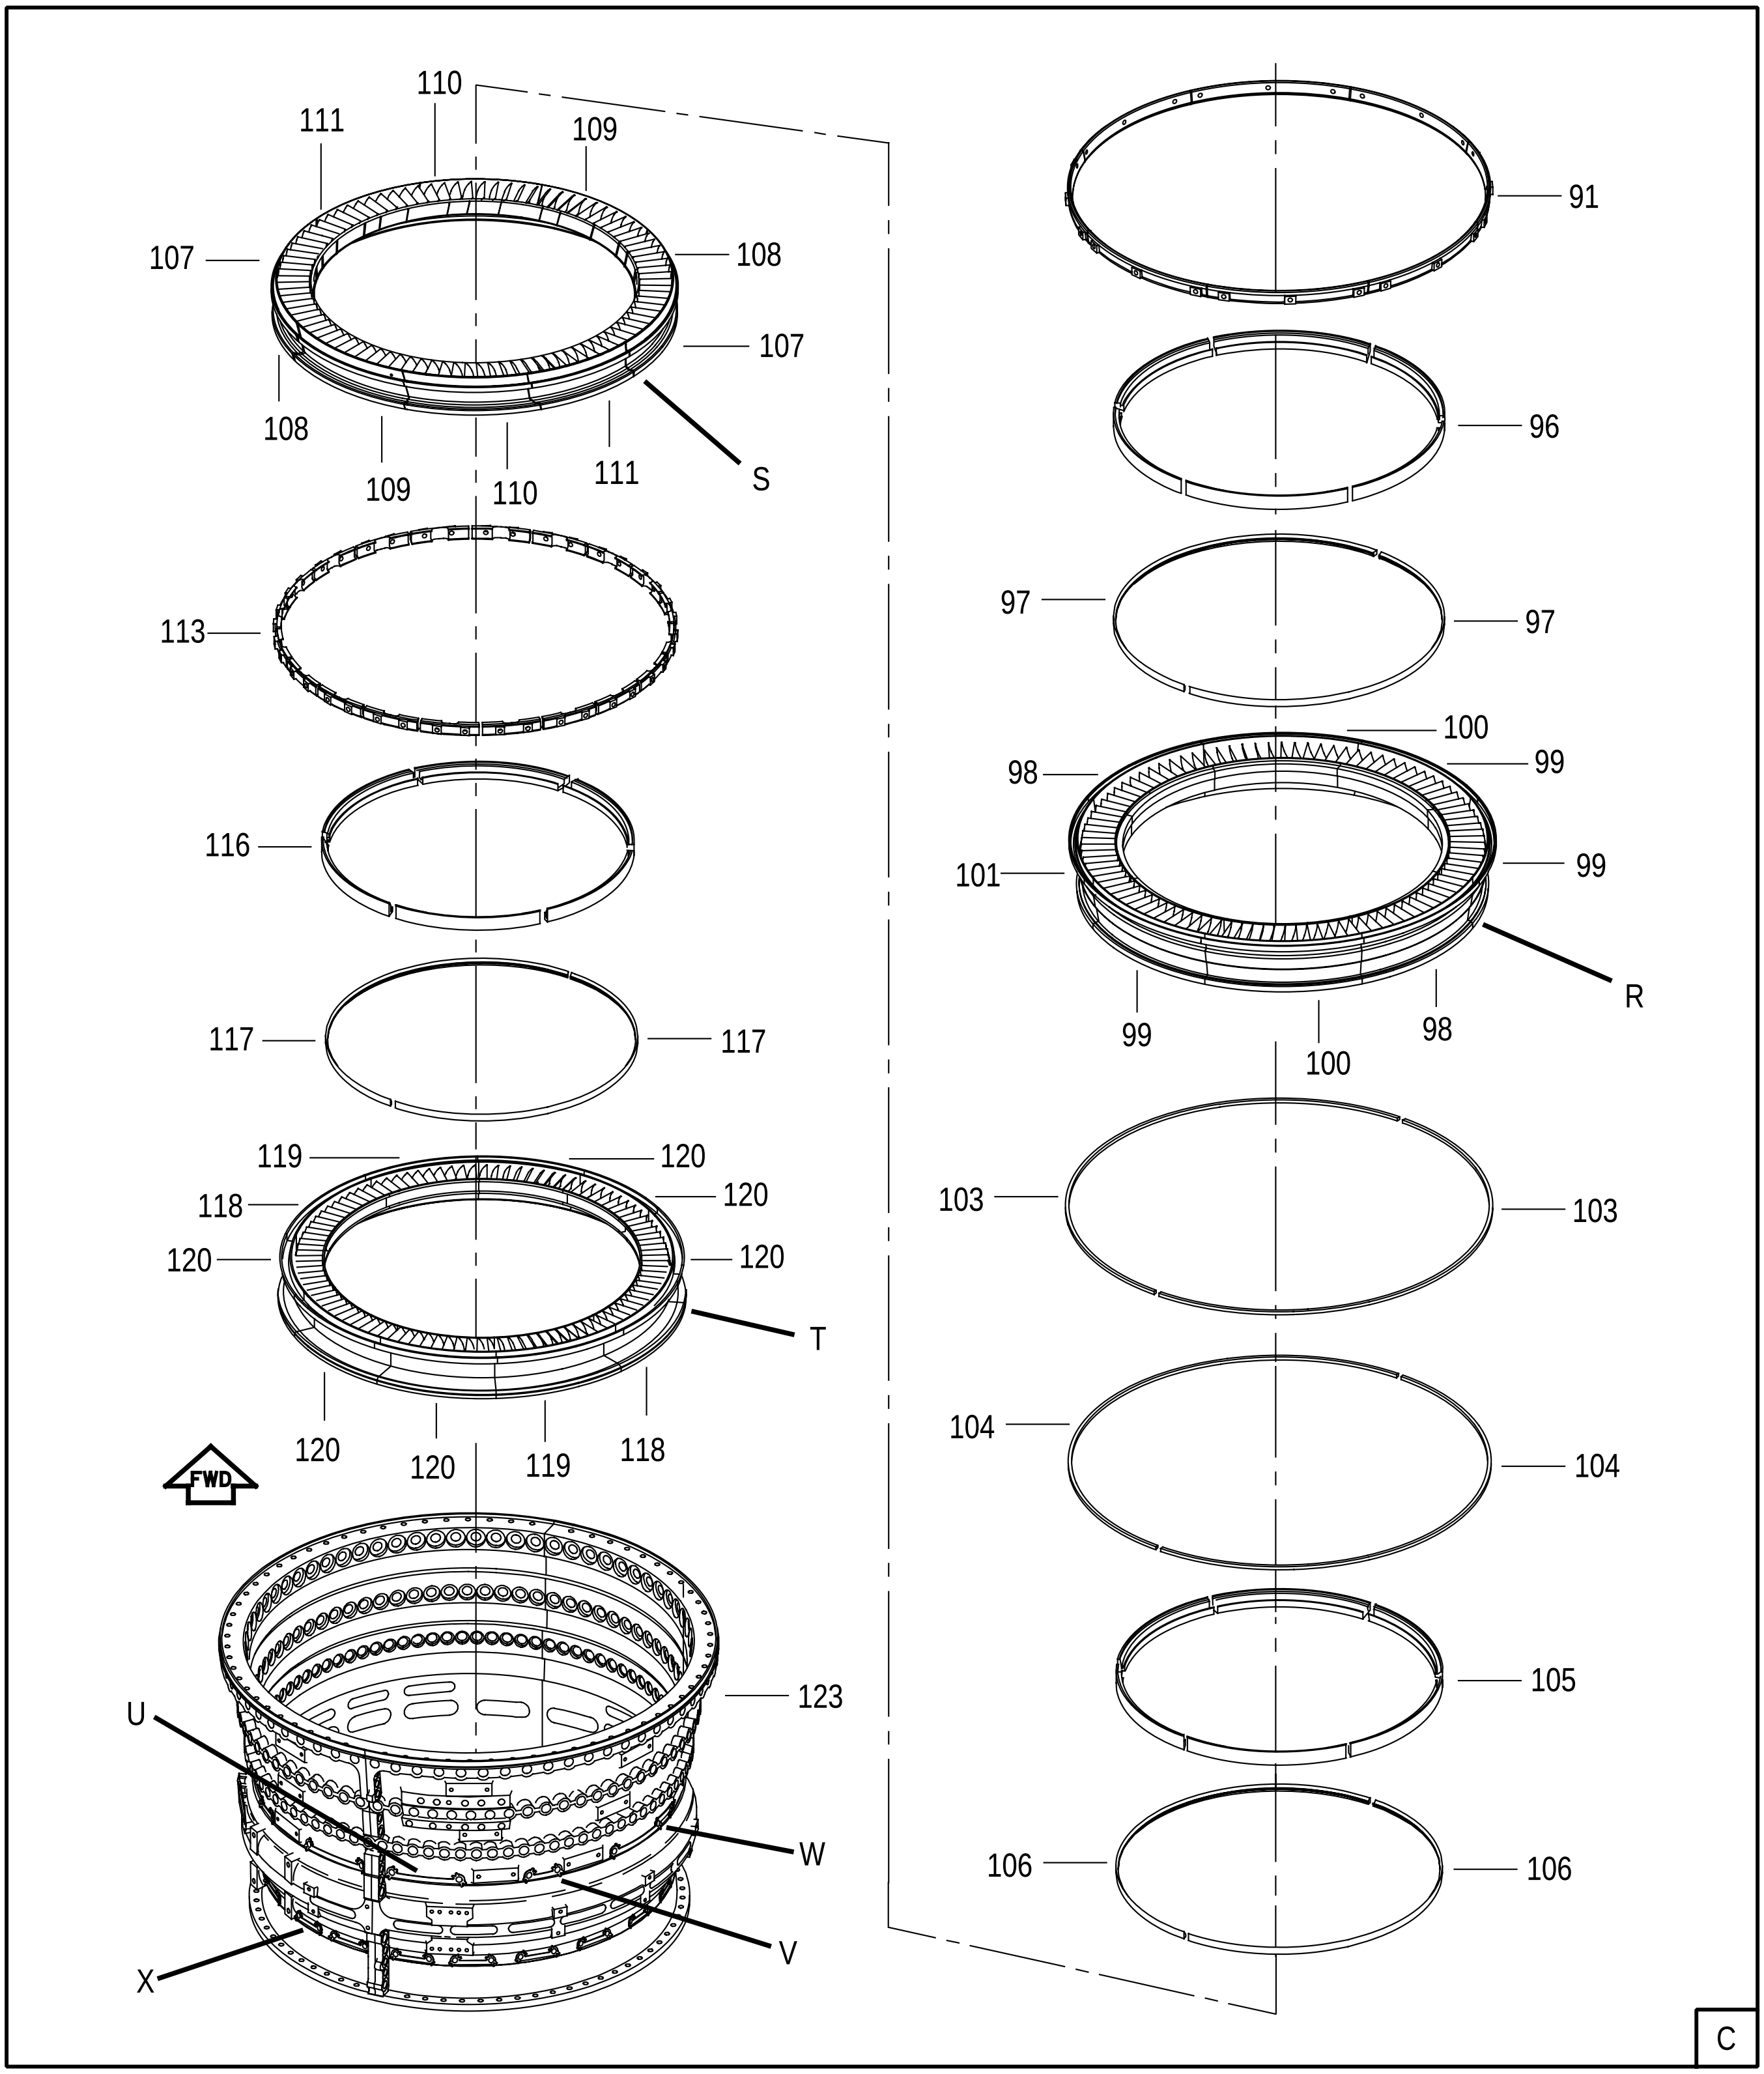


FIGURE 95. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (VARIABLE 6TH STAGE VANES)
(SHEET 4 OF 7)


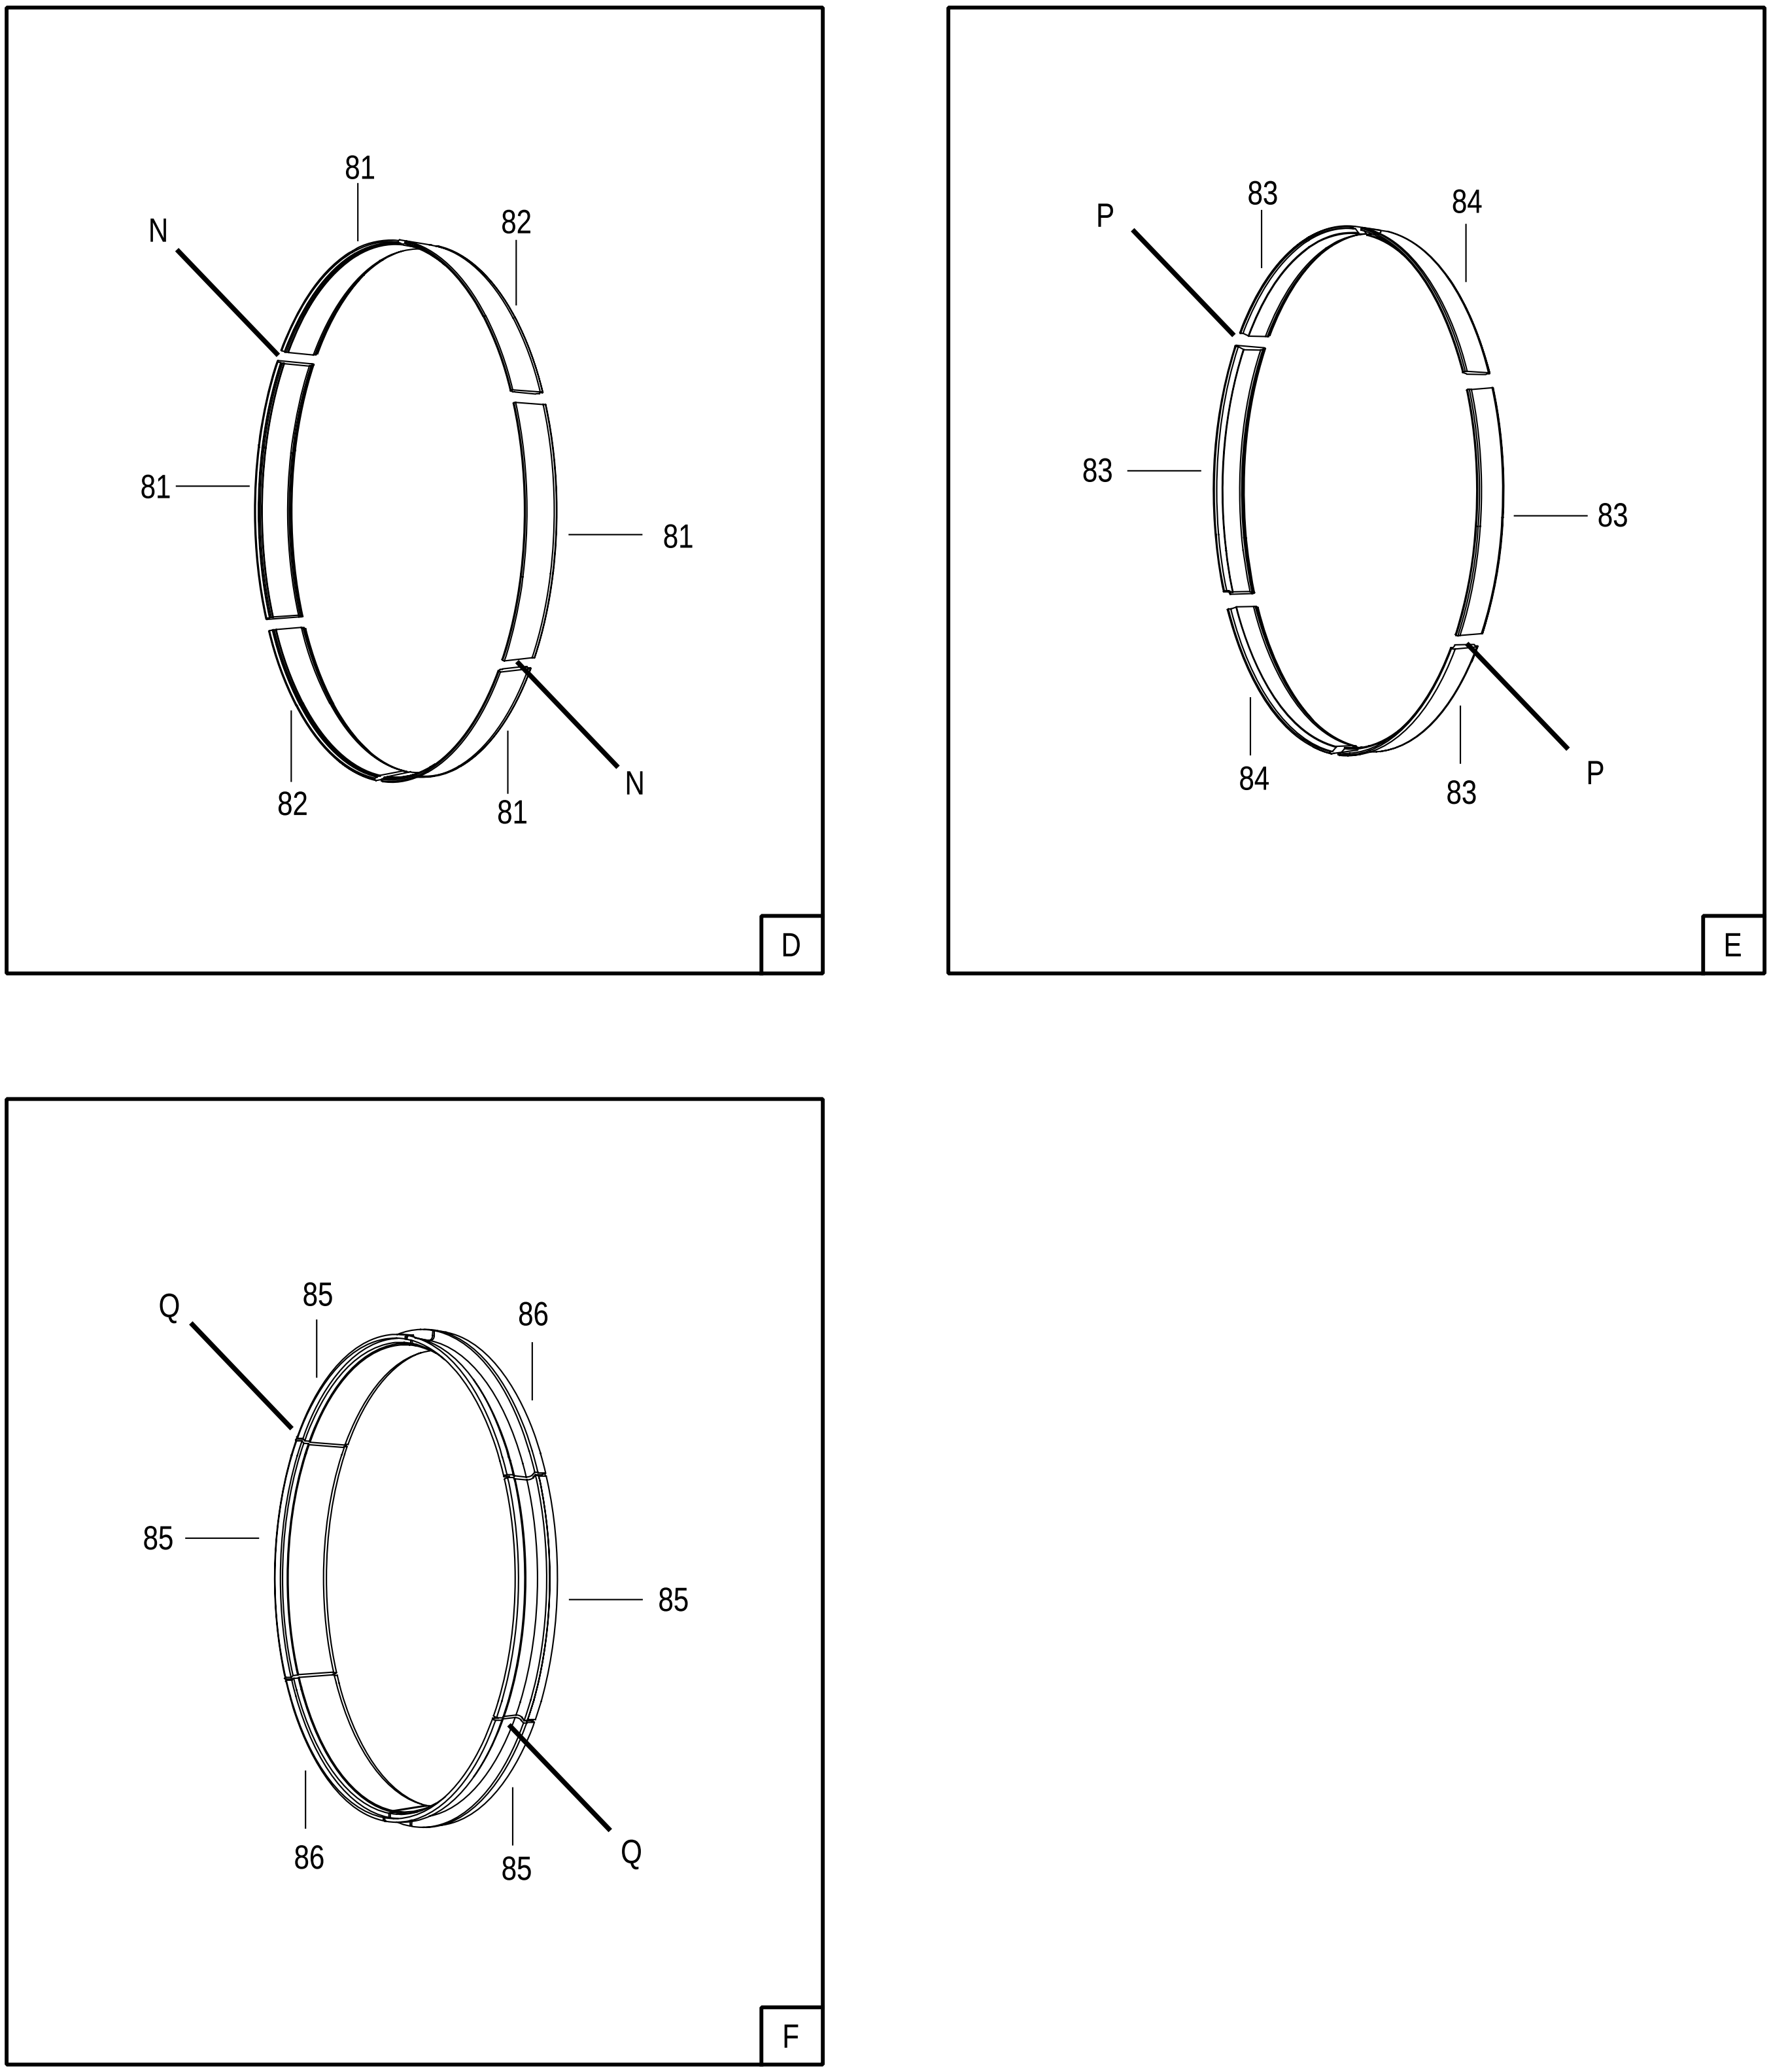


FIGURE 95. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (VARIABLE 6TH STAGE VANES)
(SHEET 5 OF 7)

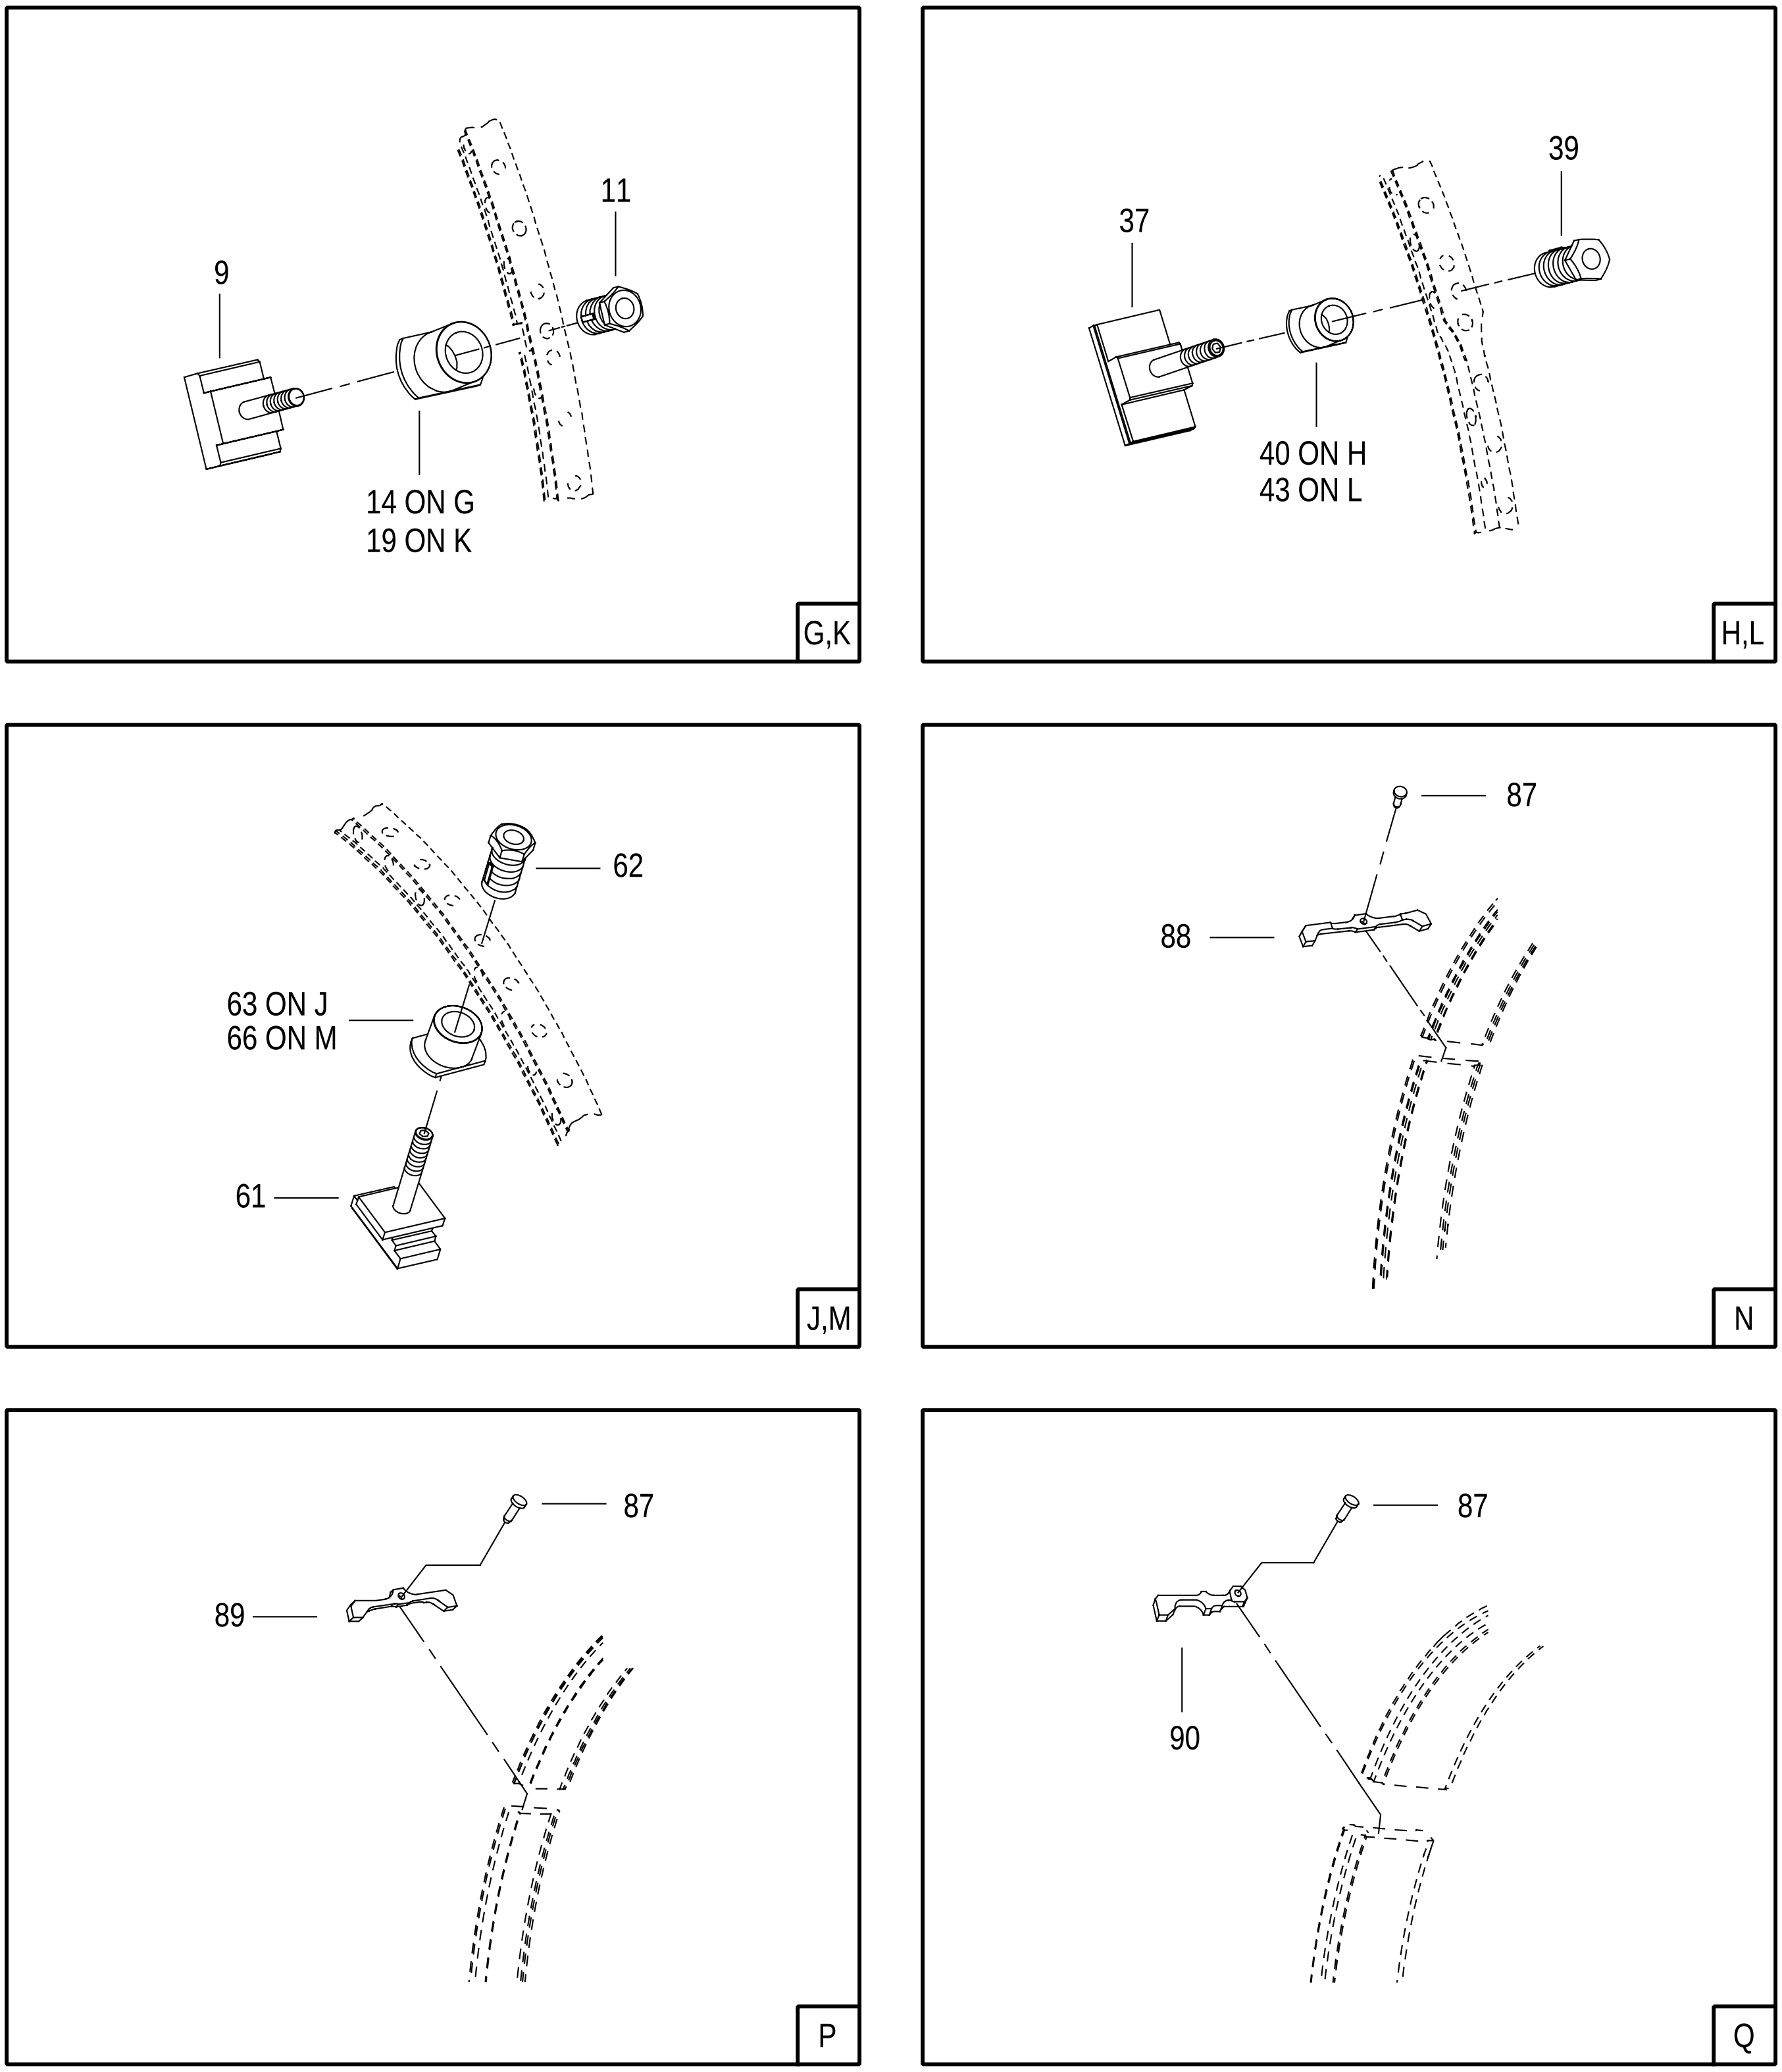

37334

FIGURE 95. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (VARIABLE 6TH STAGE VANES)
(SHEET 6 OF 7)

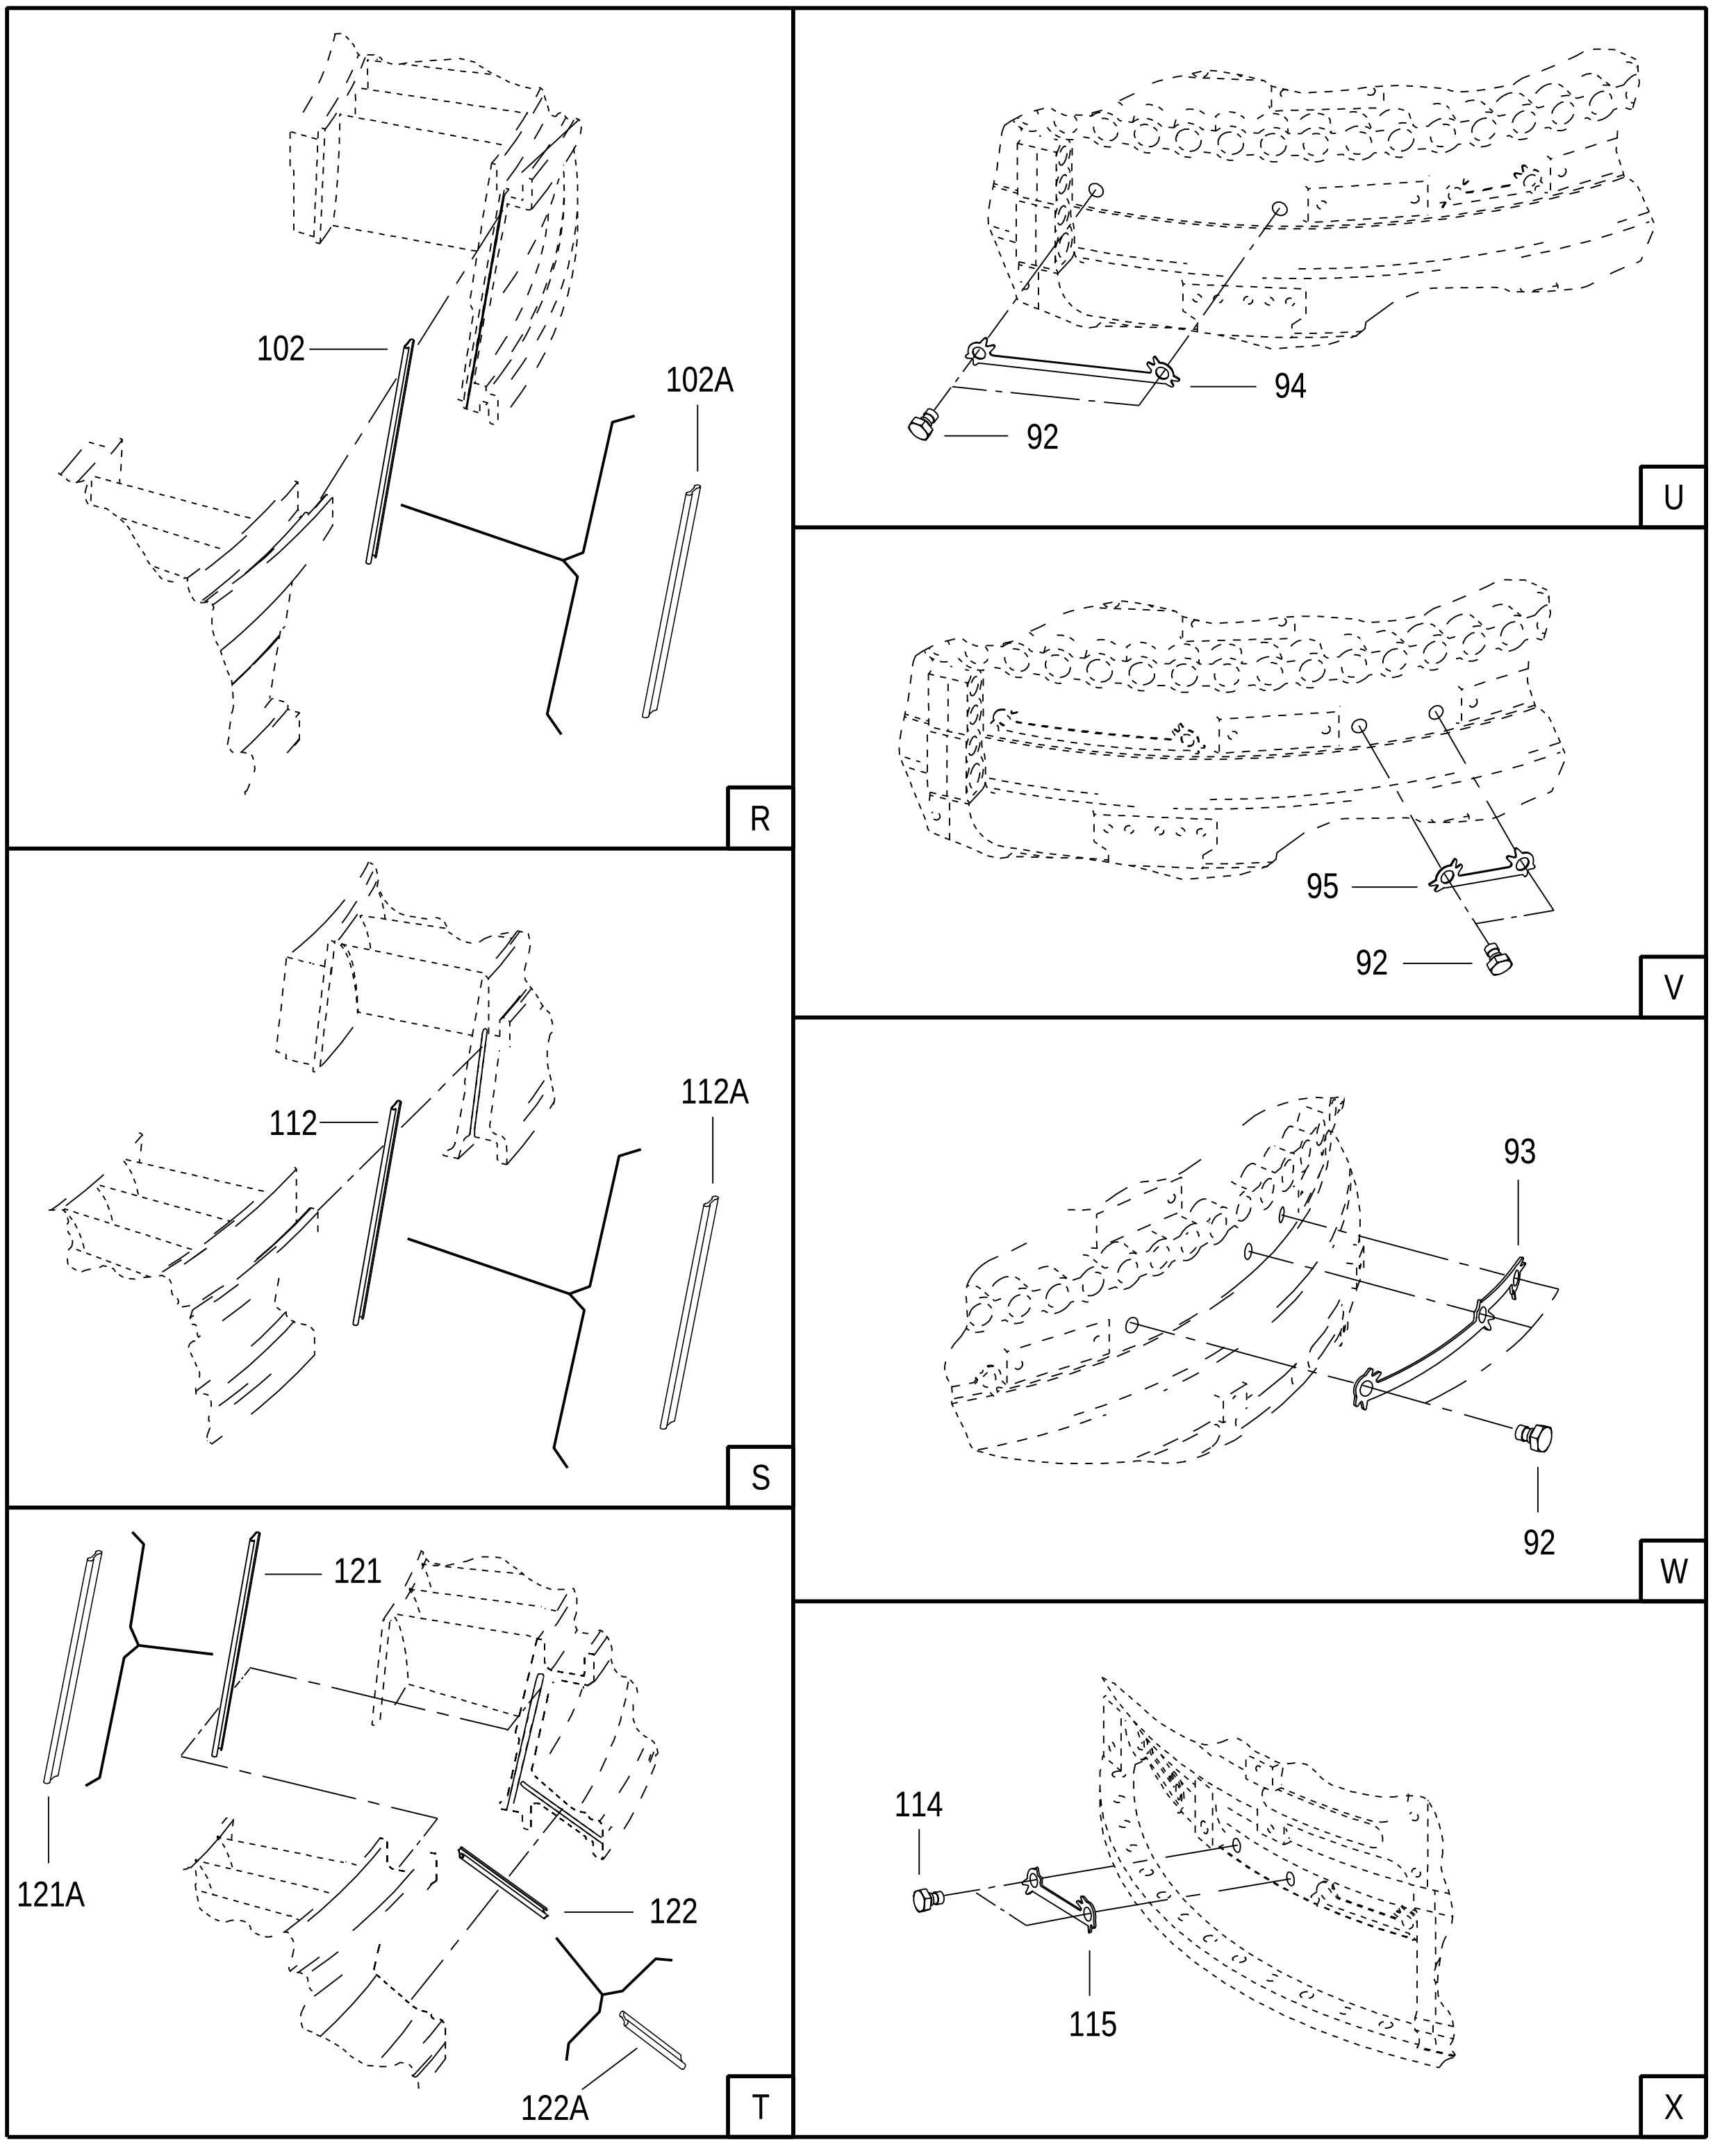


FIGURE 95. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (VARIABLE 6TH STAGE VANES)
(SHEET 7 OF 7)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	95	= 4077081-01	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) WHEN EXH USE 4077081-03 SEE FIG. 85-18 FOR NHA	1	AN/CX	ADD
		= 4077081-03	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) SEE FIG. 85-18 FOR NHA	1	AN/CX/PH	ADD
		4079595-08	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) SEE FIG. 85-18 FOR NHA	1	AN/CX/PJ/ PK	ADD
		4079595-09	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) SEE FIG. 85-18 FOR NHA	1	AN/CX/PL/ PM/PP	ADD
		4079595-10	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) SEE FIG. 85-18 FOR NHA	1	AN/EX/PN	ADD
		4079595-07	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (VARIABLE 6TH STAGE VANES) SEE FIG. 85-18 FOR NHA	1	AN/EX/PQ	ADD
	- 1	4075574	52661	. SEAT-BLEED VALVE STRAP, LOCKING	2		PAFZZ
	- 2	ST2606-04	52661	. BOLT-MACHINE, HEX 0.190-32UNJF-3A X 0.375 IN. LONG (AP) REPLACES ST2606-05	2		PAFZZ
	- 3	4075572	52661	. SEAT-BLEED VALVE STRAP, LOCKING	9		PAFZZ
	- 4	ST2606-04	52661	. BOLT-MACHINE, HEX 0.190-32UNJF-3A X 0.375 IN. LONG (AP) REPLACES ST2606-05	2		PAFZZ
	- 5	ST2601-22	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 1.500 IN. LONG REPLACES ST2345-22	68	CQ	PAFZZ
		MS9697-22	96906	. BOLT	68	CR	PAFZZ
	- 6	4042344	52661	. NUT OPTION SEE OPTION TABLE	68	CQ	PAFZZ
		ST2745-10	52661	. NUT OPTION SEE OPTION TABLE	68	CR	PAFZZ
	- 7	4066847	52661	. ARM-COMPRESSOR STATOR, ASSY OF	66		PAFZZ
R R R R R	- 8	111167-018	56878	. BOLT-SELF-LOCKING, HEX 0.190-32UNJF-3A X 0.562 IN. LONG (AP) P&W PART NO. ST2276-018 REPLACES SC2682-018 P&W PART NO. ST2277-018	1		PAFZZ
	- 9	4075681	52661	. BUMPER OPTION SEE OPTION TABLE	8		PAFZZ
	- 10	DELETED		...			
	- 11	4075672	52661	. BUSHING OPTION SEE OPTION TABLE	8		PAFZZ
	- 12	4075698	52661	. RING HALF-SYNCHRONIZING, COMPRESSOR STATOR, 4TH STAGE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
	- 13	MS124656	96906	.. INSERT	4		PAFZZ
	- 14	4075677	52661	.. INSERT-SCREW THREAD 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
	- 15	4009810	52661	.. PIN-STRAIGHT, HEADLESS 0.24925 DIA X 0.500 IN. LONG	2		PAFZZ
	- 16	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	33		PAFZZ
	- 17	4075699	52661	. RING HALF-SYNCHRONIZING, COMPRESSOR STATOR, 4TH STAGE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
95 - 18	MS124656	96906	.. INSERT	4		PAFZZ
- 19	4075677	52661	.. INSERT-SCREW THREAD 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
- 20	4009810	52661	.. PIN-STRAIGHT, HEADLESS 0.24925 DIA X 0.500 IN. LONG	2		PAFZZ
- 21	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	33		PAFZZ
- 22	DELETED		...			
- 23	DELETED		...			
- 24	DELETED		...			
- 25	4077433-01	52661	. RING SEGMENT-COMPRESSOR STATOR LOCK, 4TH STAGE, ASSY OF	4		PAFZZ
- 26	4077434-02	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, 4TH STAGE	2		PAFDD
- 27	4066226	52661	. NUT OPTION (AP) SEE OPTION TABLE	9		PAFZZ
- 28	4076827	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.755 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	9		PAFZZ
- 29	4076952	52661	.. PIN-SHOULDER, HEADLESS 0.09375 AND 0.135 IN. DIA X 0.440 IN. LONG	1		PAFZZ
- 30	4077434-01	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, 4TH STAGE	4		PAFDD
- 31	4077734	52661	. BEARING HALF-COMPRESSOR STATOR, 4TH AND 5TH STAGE	140		PAFZZ
- 32	4075974	52661	. VANE OPTION-4TH STAGE SEE OPTION TABLE	70		PAFDD
- 33	4066814	52661	. BEARING-WASHER, THRUST 0.500 ID X 1.040 OD X 0.041 IN. THK	70		PAFZZ
- 34	4071383	52661	. BEARING OPTION SEE OPTION TABLE	70		PAFZZ
- 35	4066847	52661	. ARM-COMPRESSOR STATOR, ASSY OF	68		PAFZZ
R - 36	111167-018	56878	. BOLT-SELF-LOCKING, HEX R 0.190-32UNJF-3A X 0.562 IN. LONG (AP) R P&W PART NO. ST2276-018 R REPLACES SC2682-018 R P&W PART NO. ST2277-018	1		PAFZZ
- 37	4075682	52661	. BUMPER OPTION SEE OPTION TABLE	8		PAFZZ
- 38	DELETED		...			
- 39	4075672	52661	. BUSHING OPTION SEE OPTION TABLE	8		PAFZZ
	4075668	52661	. RING HALF-SYNCHRONIZING, COMPRESSOR STATOR, 5TH STAGE, ASSY OF	1		PAFDD
- 40	4075677	52661	.. INSERT-SCREW THREAD 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
- 41	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	34		PAFZZ
- 42	4075662-01	52661	.. RING HALF-SYNCHRONIZING, COMPRESSOR STATOR, 5TH STAGE	1		XA
	4075669	52661	. RING HALF-SYNCHRONIZING, COMPRESSOR STATOR, 5TH STAGE, ASSY OF	1		PAFDD
- 43	4075677	52661	.. INSERT-SCREW THREAD 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
- 44	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	34		PAFZZ
- 45	4075662-02	52661	.. RING HALF-SYNCHRONIZING, COMPRESSOR STATOR, 5TH STAGE	1		XA
- 46	DELETED		...			
- 47	DELETED		...			

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
95 - 48	4077011-01	52661	. RING SEGMENT-COMPRESSOR STATOR LOCK, . . . 5TH STAGE, ASSY OF	4		PAFZZ
- 49	4076475-02	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, . 5TH STAGE	2		PAFDD
- 50	4066226	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	9		PAFZZ
- 51	4076828	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.650 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	9		PAFZZ
- 52	4076952	52661	.. PIN-SHOULDER, HEADLESS . . . . 0.09375 AND 0.135 IN. DIA X 0.440 IN. LONG	1		PAFZZ
- 53	4076475-01	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, . 5TH STAGE	4		PAFDD
- 54	4077734	52661	. BEARING HALF-COMPRESSOR STATOR, 4TH . . . . . . AND 5TH STAGE	152		PAFZZ
- 55	4075975	52661	. VANE OPTION-5TH STAGE . . . . SEE OPTION TABLE	76		PAFDD
- 56	4066813	52661	. BEARING-WASHER, THRUST . . . . 0.500 ID X 0.915 OD X 0.041 IN. THK	76		PAFZZ
- 57	4074428	52661	. BEARING OPTION . . . . SEE OPTION TABLE	76		PAFZZ
- 58	4074426	52661	. WASHER-KEY, DOUBLE . . . . 0.563 ID X 1.102 IN. LONG	38		PAFZZ
- 59	4075759	52661	. ARM-COMPRESSOR STATOR, ASSY OF	80		PAFZZ
R - 60	111167-018	56878	. BOLT-SELF-LOCKING, HEX . . . . 0.190-32UNJF-3A X 0.562 IN. LONG (AP) P&W PART NO. ST2276-018 REPLACES SC2682-018 P&W PART NO. ST2277-018	1		PAFZZ
- 61	4076830	52661	. BUMPER OPTION . . . . SEE OPTION TABLE	8		PAFZZ
- 62	4075658	52661	. BUSHING OPTION . . . . SEE OPTION TABLE	8		PAFZZ
	4075670	52661	. RING HALF-SYNCHRONIZING, COMPRESSOR . . . . . STATOR, 6TH STAGE, ASSY OF	1		PAFDD
- 63	4075678	52661	.. INSERT-SCREW THREAD . . . . 0.375-24UNJF-3B X 0.3725 IN. LONG	4		PAFZZ
- 64	4075460	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	40		PAFZZ
- 65	4075663-01	52661	.. RING HALF-SYNCHRONIZING, COMPRESSOR . . . . STATOR, 6TH STAGE	1		XA
	4075671	52661	. RING HALF-SYNCHRONIZING, COMPRESSOR . . . . . STATOR, 6TH STAGE, ASSY OF	1		PAFDD
- 66	4075678	52661	.. INSERT-SCREW THREAD . . . . 0.375-24UNJF-3B X 0.3725 IN. LONG	4		PAFZZ
- 67	4075460	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	40		PAFZZ
- 68	4075663-02	52661	.. RING HALF-SYNCHRONIZING, COMPRESSOR . . . . STATOR, 6TH STAGE	1		XA
- 69	DELETED					
- 70	DELETED					
- 71	4077012-01	52661	. RING SEGMENT-COMPRESSOR STATOR LOCK, . . . 6TH STAGE, ASSY OF	4		PAFZZ
- 72	4076826-02	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, . 6TH STAGE	2		PAFDD
- 73	4066226	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	9		PAFZZ
- 74	4076829	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.535 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	9		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
95 - 75	4076952	52661	.. PIN-SHOULDER, HEADLESS .... 0.09375 AND 0.135 IN. DIA X 0.440 IN. LONG	1		PAFZZ
- 76	4076826-01	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, . 6TH STAGE	4		PAFDD
- 77	4075976	52661	. VANE OPTION-6TH STAGE .... SEE OPTION TABLE USE ONLY ON 4077081-01 WHEN EXH USE 4079286	88		PAFDD
	4079286	52661	. VANE OPTION-6TH STAGE .... SEE OPTION TABLE	88		PAFDD
- 78	4066815	52661	. BEARING-WASHER, THRUST .... 0.500 ID X 0.740 OD X 0.041 IN. THK	88		PAFZZ
- 79	4074432	52661	. BEARING OPTION .... SEE OPTION TABLE	88		PAFZZ
- 80	4074427	52661	. WASHER-KEY, DOUBLE .... 0.600 ID X 0.923 IN. LONG	44		PAFZZ
- 81	4076125	52661	. DUCT SEGMENT-COMPRESSOR, 5TH STAGE...... USE ONLY ON 4077081-01, -03, 4079595-08, AND -09	4		PAFDD
	4078485	52661	. DUCT SEGMENT-COMPRESSOR, 5TH STAGE...... USE ONLY ON 4079595-07 AND -10	4		PAFDD
- 82	4076125-02	52661	. DUCT SEGMENT-COMPRESSOR, 5TH STAGE...... USE ONLY ON 4077081-01 REPLACED BY 4076125 IN PAIRS ONLY	2		XA
	4076125	52661	. DUCT SEGMENT-COMPRESSOR, 5TH STAGE...... REOP AND REID OF 4076125-02 USE ONLY ON 4077081-01, -03, 4079595-08, AND -09 REPLACES 4076125-02 IN PAIRS ONLY	2		PAFDD
	4078485	52661	. DUCT SEGMENT-COMPRESSOR, 5TH STAGE...... USE ONLY ON 4079595-07 AND -10	2		PAFDD
- 83	4076126	52661	. DUCT SEGMENT-COMPRESSOR, 6TH STAGE......	4		PAFDD
- 84	4076126-02	52661	. DUCT SEGMENT-COMPRESSOR, 6TH STAGE...... REPLACED BY 4076126 IN PAIRS ONLY	2		XA
	4076126	52661	. DUCT SEGMENT-COMPRESSOR, 6TH STAGE...... REOP AND REID OF 4076126-02 REPLACES 4076126-02 IN PAIRS ONLY	2		PAFDD
- 85	4076127	52661	. DUCT SEGMENT-COMPRESSOR, 7TH STAGE......	4		PAFDD
- 86	4076127-02	52661	. DUCT SEGMENT-COMPRESSOR, 7TH STAGE...... REPLACED BY 4076127 IN PAIRS ONLY	2		XA
	4076127	52661	. DUCT SEGMENT-COMPRESSOR, 7TH STAGE...... REOP AND REID OF 4076127-02 REPLACES 4076127-02 IN PAIRS ONLY	2		PAFDD
- 87	2184930	52661	. PIN-STRAIGHT, HEADED, FLAT .... 0.0938 X 0.265 IN. LONG	6		PAFZZ
- 88	4059947	52661	. KEY-COMPRESSOR DUCT, 5TH STAGE	2		PAFZZ
- 89	4059948	52661	. KEY-COMPRESSOR DUCT, 6TH STAGE	2		PAFZZ
- 90	4059949	52661	. KEY-COMPRESSOR DUCT, 7TH STAGE	2		PAFZZ
- 91	4075438	52661	. RAIL-COMPRESSOR STATOR, 7TH STAGE	8		PAFBZ
- 92	4075434	52661	. BOLT-EXTERNALLY RELIEVED BODY, HEX .... 0.250-28UNJF-3A X 0.450 IN. LONG (AP)	3		PAFZZ
- 93	4075435	52661	. WASHER-KEY, TRIPLE .... 0.2575 ID	4		PAFZZ
- 94	4075436	52661	. WASHER-KEY, DOUBLE .... 0.2575 ID X 4.000 IN. LONG	4		PAFZZ
- 95	4075437	52661	. WASHER-KEY, DOUBLE .... 0.2575 ID X 1.725 IN. LONG	2		PAFZZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	95 - 96		4077287-01	52661	. SHROUD-COMPRESSOR STATOR, 7TH STAGE, ASSY OF	6		PAFDD
	- 97		4079170	52661	. DAMPER-COMPRESSOR STATOR, 7TH STAGE SUPERSEDES 4077047	2		PAFZZ
	- 98	=	4077077-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, ASSY OF	2		PAFDD
		=	4079087-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, ASSY OF	2		PAFDD
	- 99	=	4077077-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE	3		PAFDD
		=	4079087-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE	3		PAFDD
	- 100	=	4077077-03	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE	2		PAFDD
		=	4079087-03	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE	2		PAFDD
	- 101	=	4077077-04	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE	1		PAFDD
		=	4079087-04	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE	1		PAFDD
R	- 102		4076385	52661	. SEAL-COMPRESSOR STATOR	6	VX	PAFZZ
R	- 102A		4086309-01	52661	. SEAL-COMPRESSOR STATOR	6	VY	PAFZZ
	- 103		4075433	52661	. GASKET OPTION SEE OPTION TABLE	2		PAFZZ
	- 104		11155-I	15284	. GASKET-COMPRESSOR STATOR, 8TH STAGE P&W PART NO. 4075429	2		PAFZZ
	- 105		4077288-01	52661	. SHROUD-COMPRESSOR STATOR, 8TH STAGE, ASSY OF	6		PAFDD
	- 106		4079171	52661	. DAMPER-COMPRESSOR STATOR, 8TH STAGE SUPERSEDES 4077048	2		PAFZZ
	- 107	=	4077078-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, ASSY OF	2		PAFDD
		=	4079088-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, ASSY OF	2		PAFDD
	- 108	=	4077078-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE	2		PAFDD
		=	4079088-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE	2		PAFDD
	- 109	=	4077078-03	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE	2		PAFDD
		=	4079088-03	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE	2		PAFDD
	- 110	=	4077078-04	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE	2		PAFDD
		=	4079088-04	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE	2		PAFDD
	- 111	=	4077078-05	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE	2		PAFDD
		=	4079088-05	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE	2		PAFDD
R	- 112		4076386	52661	. SEAL-COMPRESSOR STATOR	8	VZ	PAFZZ
R	- 112A		4086309-02	52661	. SEAL-COMPRESSOR STATOR	8	WA	PAFZZ
	- 113		4075440	52661	. RAIL-COMPRESSOR STATOR, 8TH-9TH STAGE	20		PAFBZ
	- 114		4075434	52661	. BOLT-EXTERNALLY RELIEVED BODY, HEX 0.250-28UNJF-3A X 0.450 IN. LONG (AP)	2		PAFZZ
	- 115		4075439	52661	. WASHER-KEY, DOUBLE 0.2575 ID X 1.635 IN. LONG	20		PAFZZ
	- 116		4077289-01	52661	. SHROUD-COMPRESSOR STATOR, 9TH STAGE, ASSY OF	6		PAFDD
	- 117		4079173	52661	. DAMPER-COMPRESSOR STATOR, 9TH STAGE SUPERSEDES 4077049	2		PAFZZ
	- 118	=	4077079-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ASSY OF	2		PAFDD
		=	4079089-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ASSY OF	2		PAFDD
	- 119	=	4077079-02	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE	2		PAFDD
		=	4079089-02	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE	2		PAFDD
	- 120	=	4077079-03	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE	6		PAFDD
		=	4079089-03	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE	6		PAFDD
R	- 121		4076387	52661	. SEAL-COMPRESSOR STATOR	8	WB	PAFZZ
R	- 121A		4086309-03	52661	. SEAL-COMPRESSOR STATOR	8	WC	PAFZZ
R	- 122		4076388	52661	. SEAL-COMPRESSOR STATOR	8	WB	PAFZZ
R	- 122A		4086310	52661	. SEAL-COMPRESSOR STATOR, 9TH STAGE	8	WC	PAFZZ
	- 123		4075413-01	52661	. CASE SET-COMPRESSOR, 4TH-9TH STAGE SEE FIG. 97 FOR DETAIL PARTS	1		PAFDD

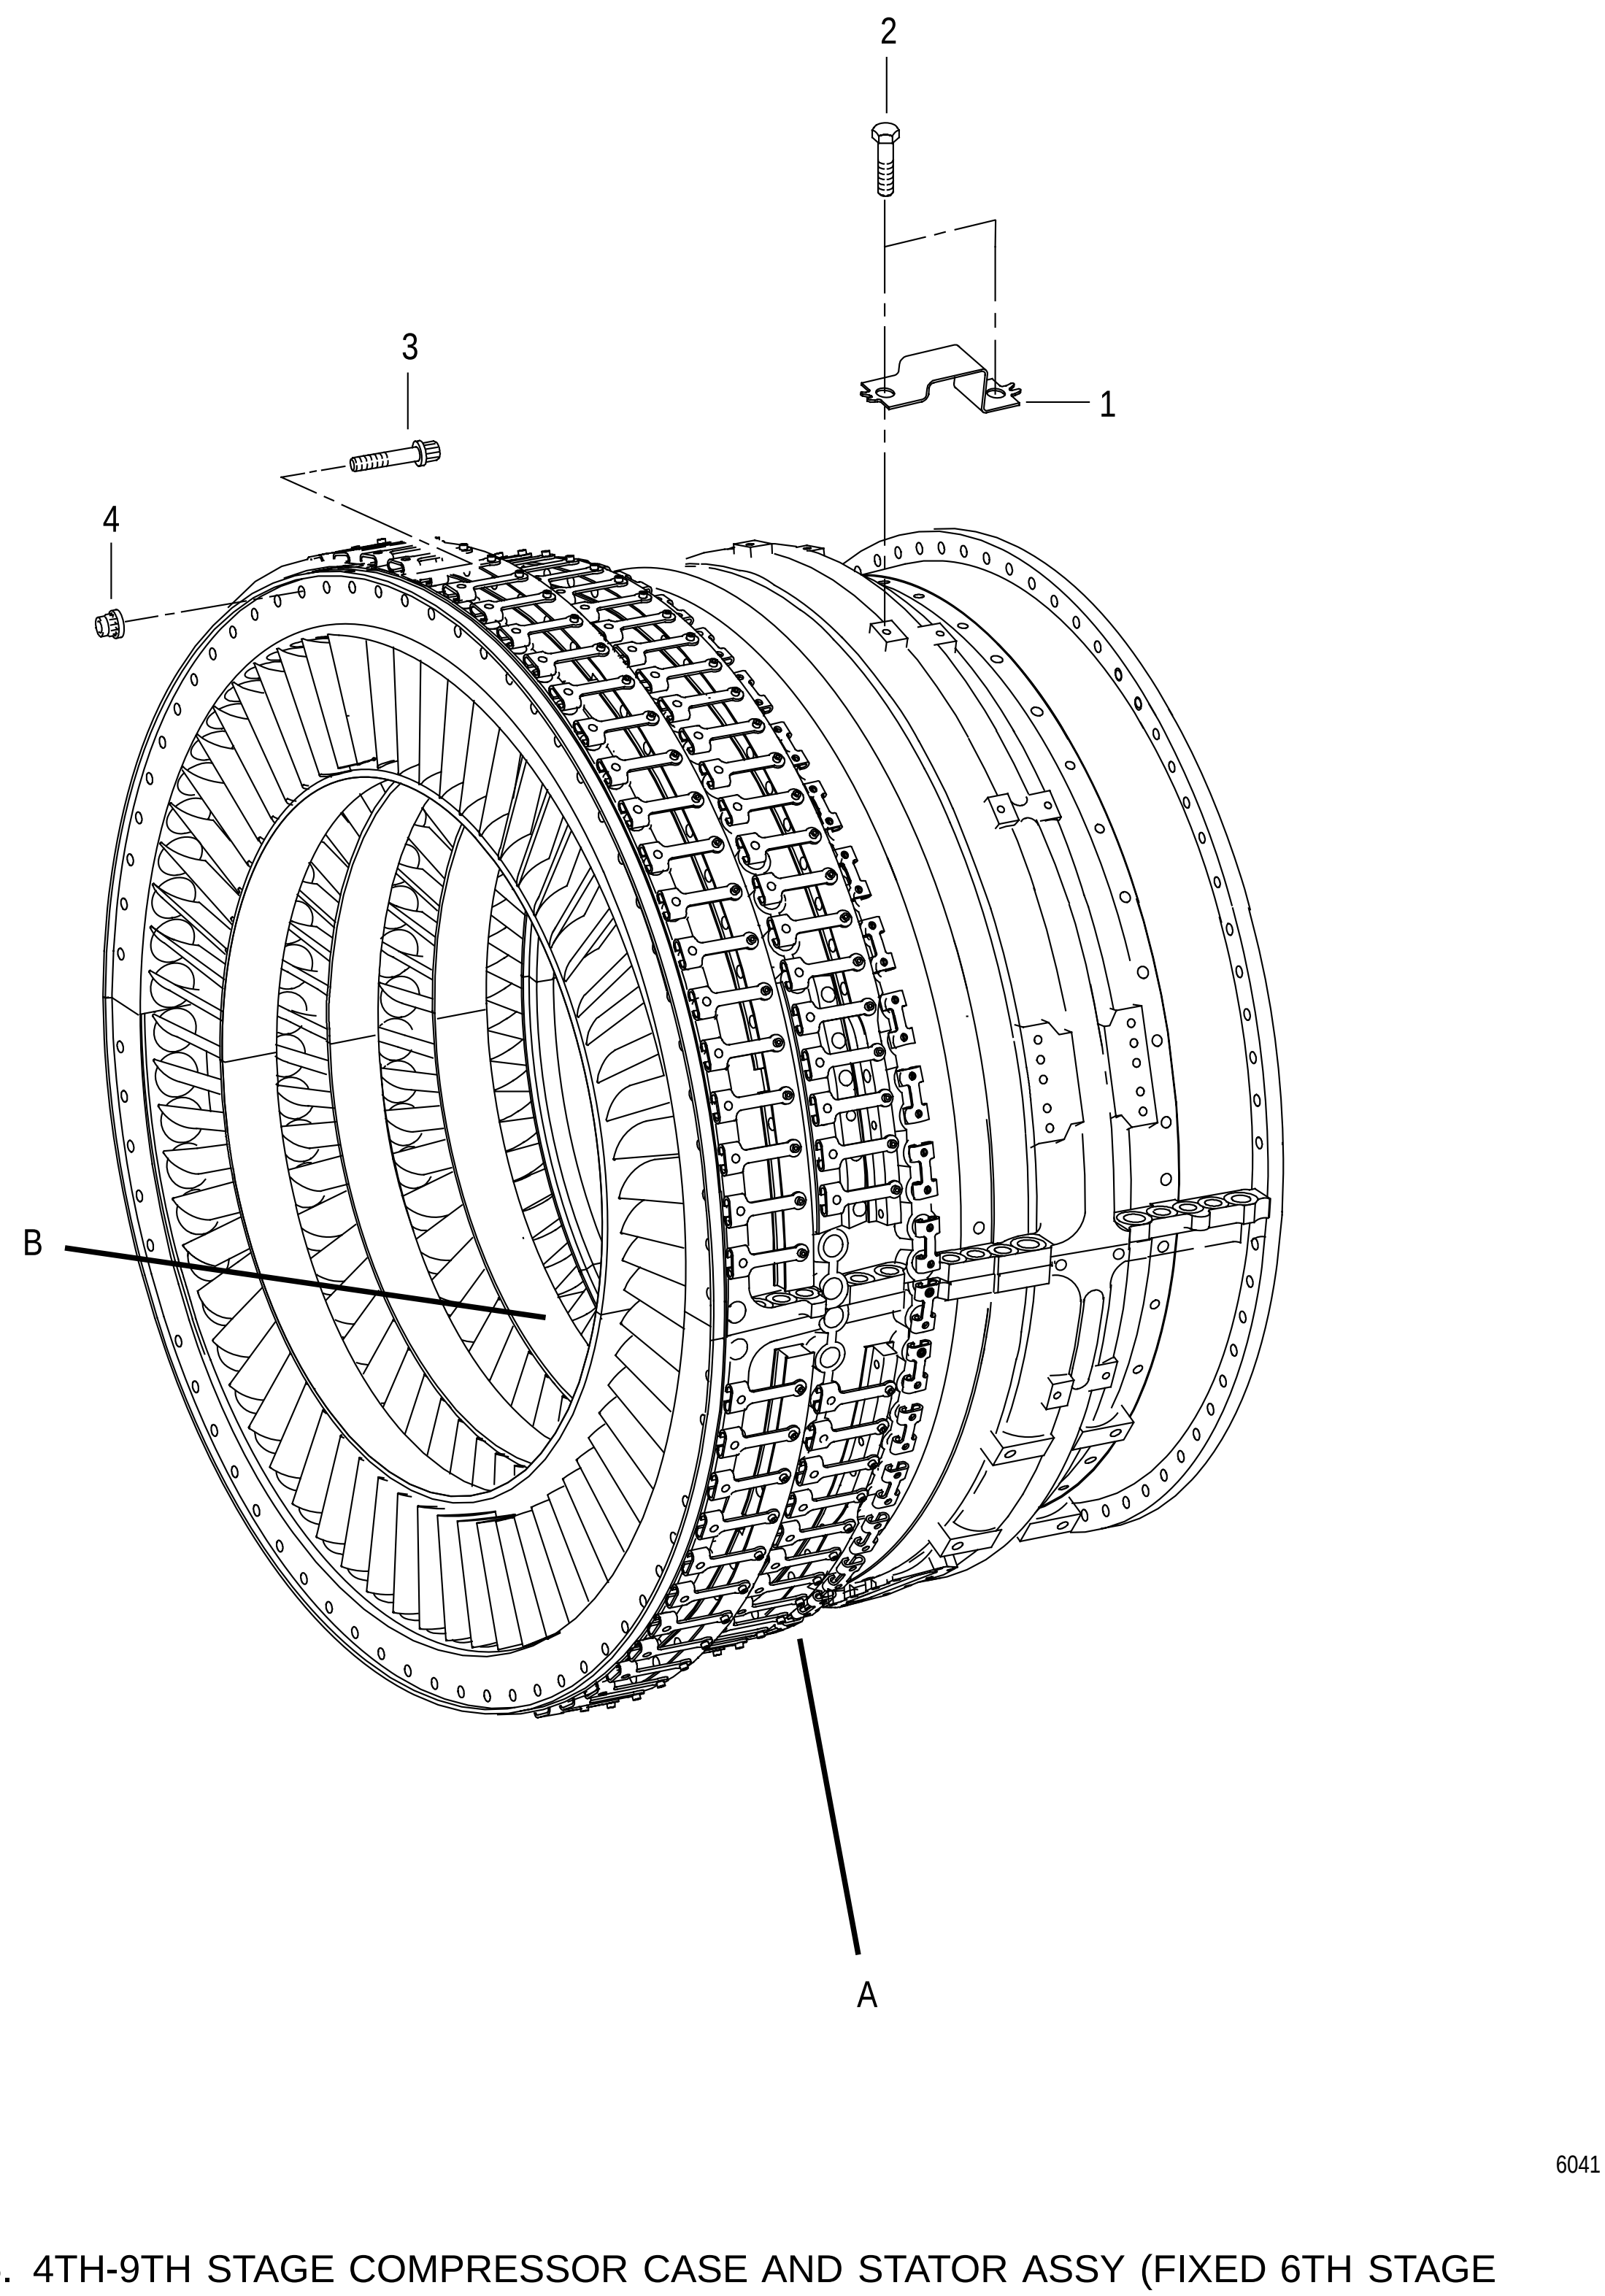


FIGURE 96. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (FIXED 6TH STAGE VANES)
(SHEET 1 OF 8)


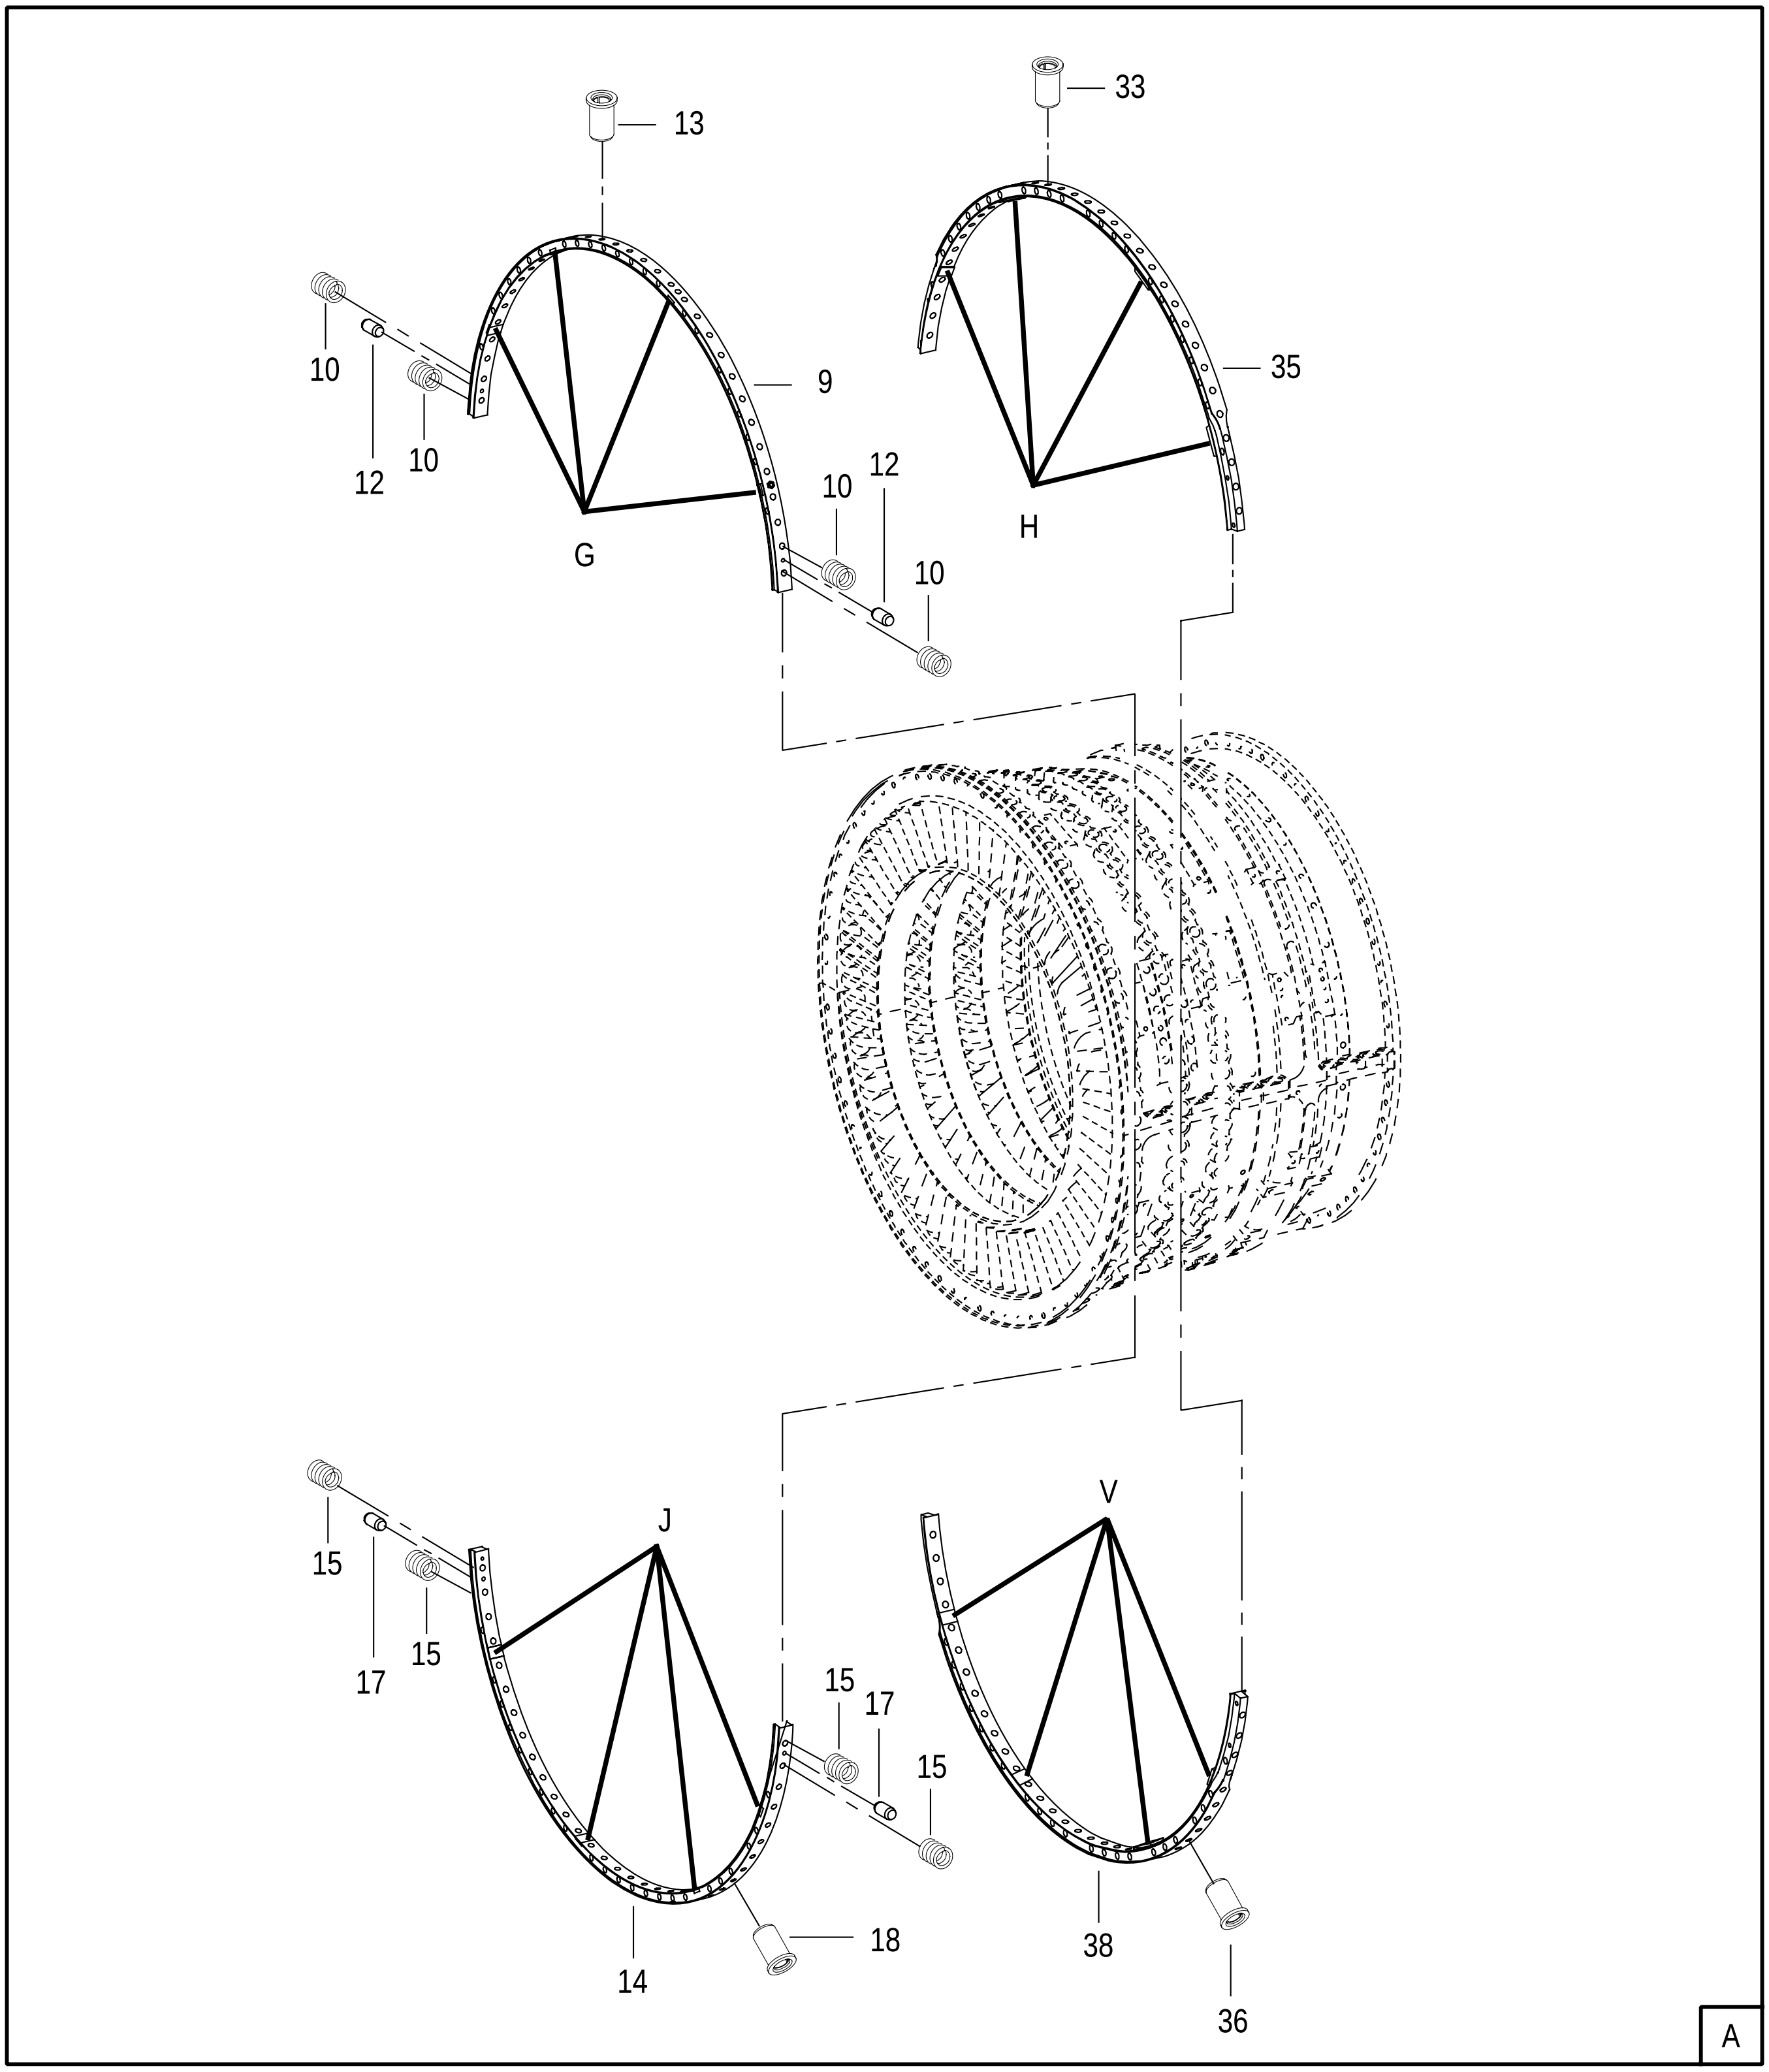


FIGURE 96. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (FIXED 6TH STAGE VANES)
(SHEET 2 OF 8)

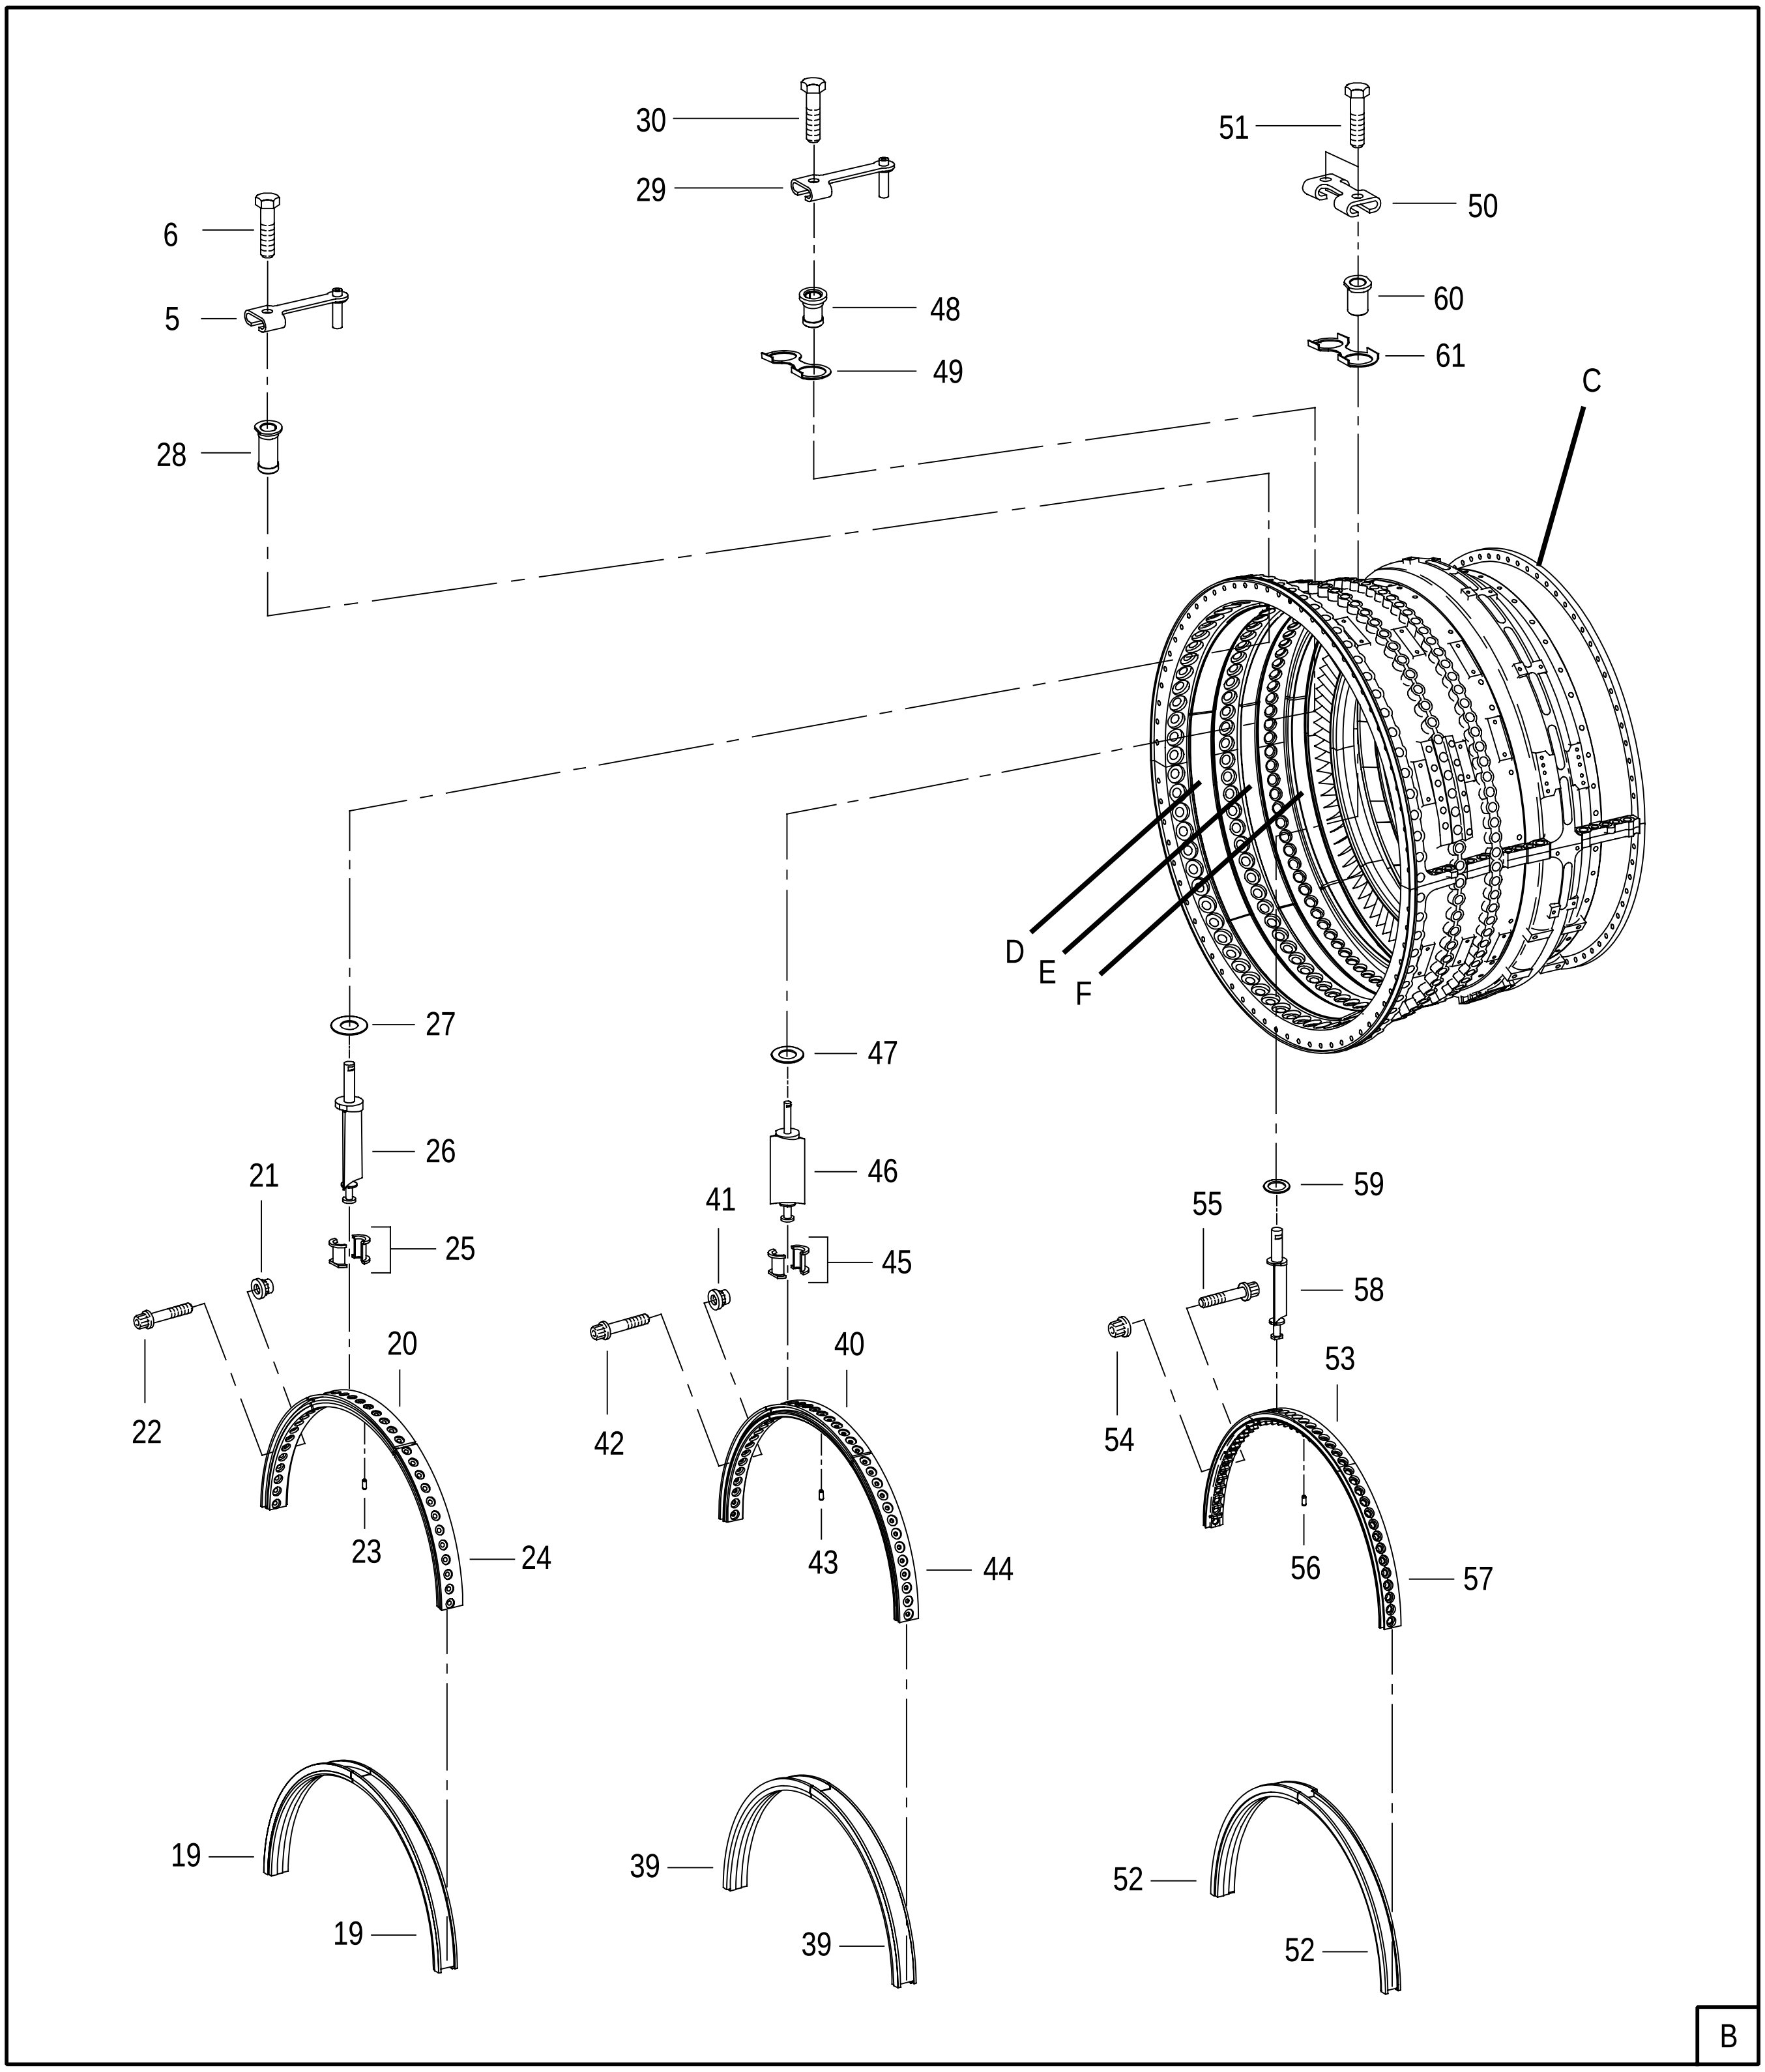

97387

FIGURE 96. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (FIXED 6TH STAGE VANES)
(SHEET 3 OF 8)




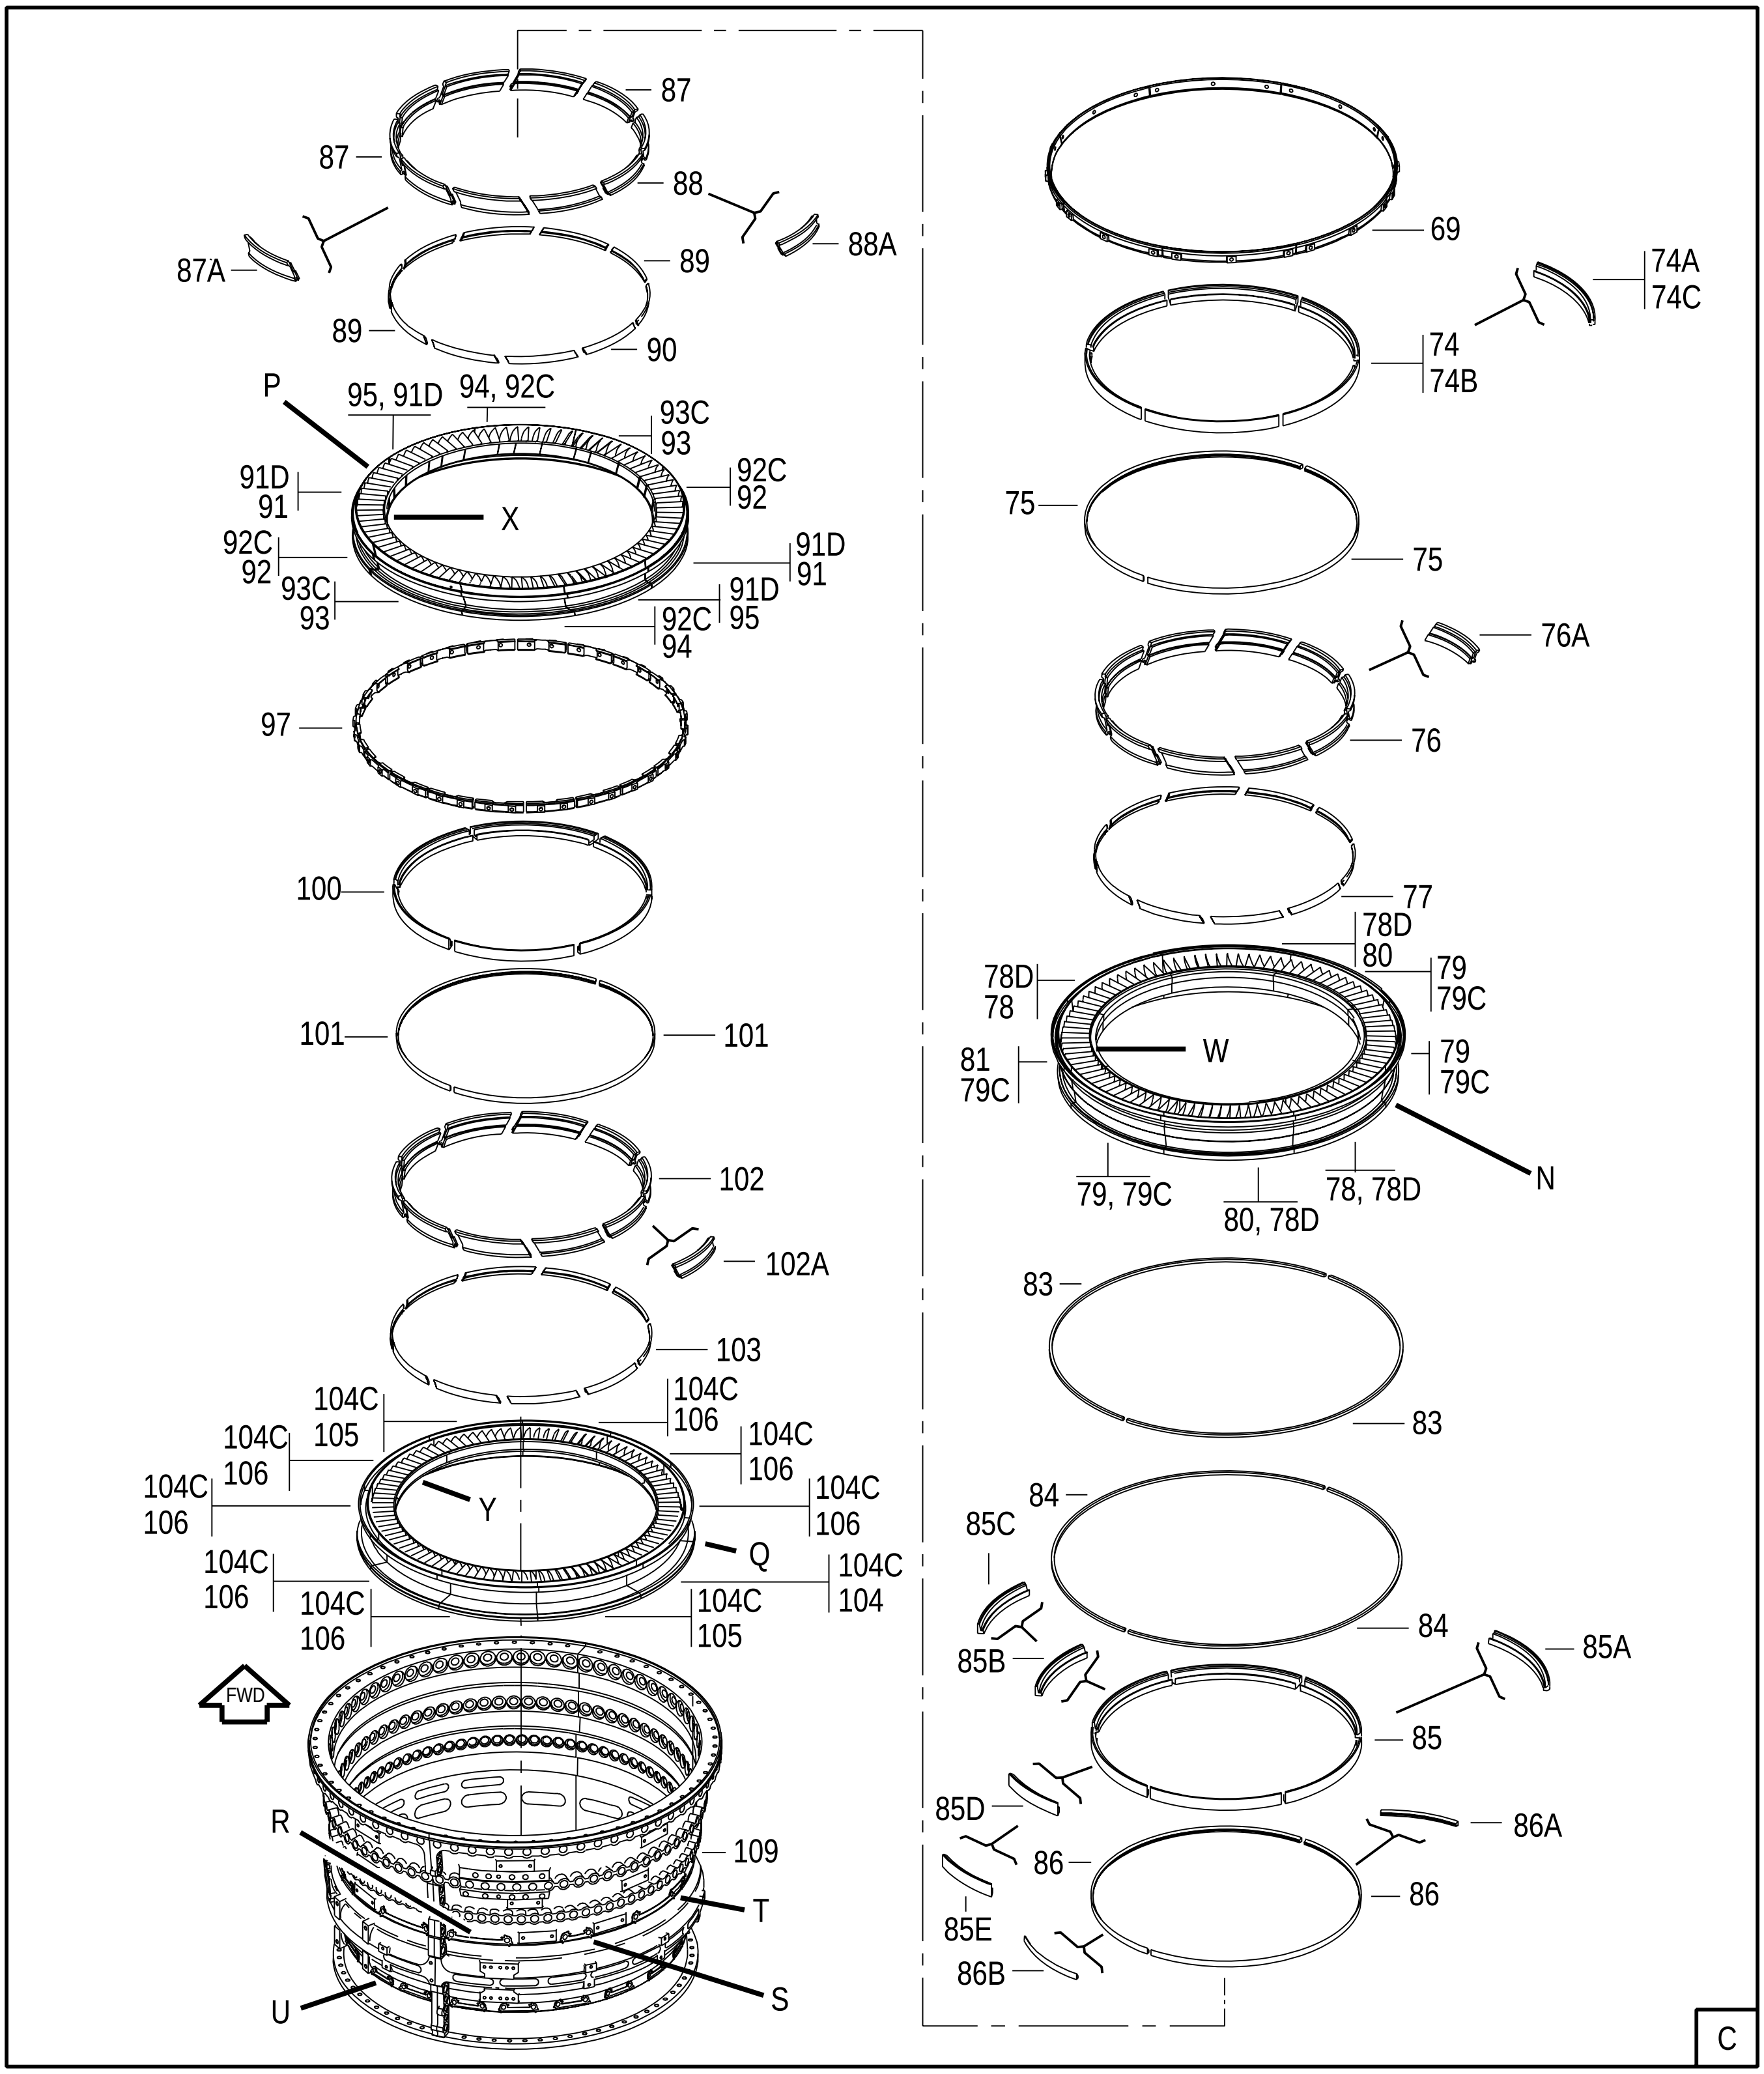


FIGURE 96. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (FIXED 6TH STAGE VANES)
(SHEET 4 OF 8)

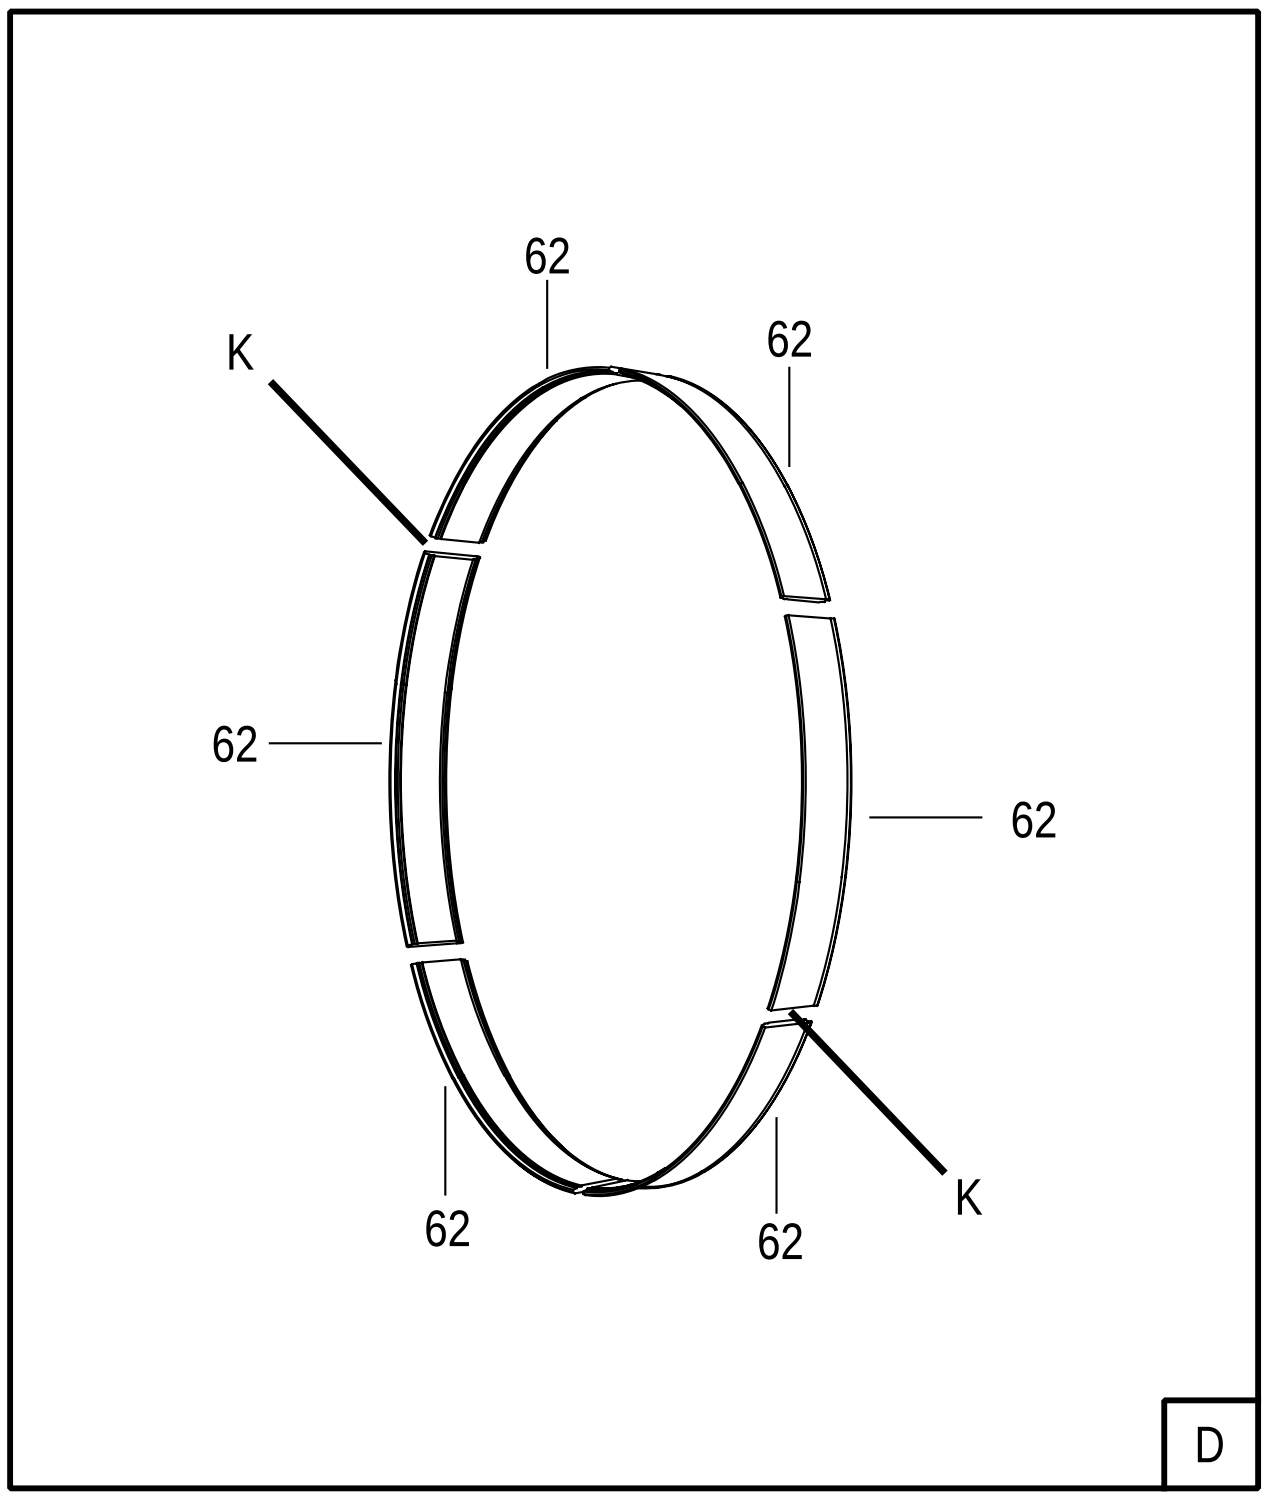

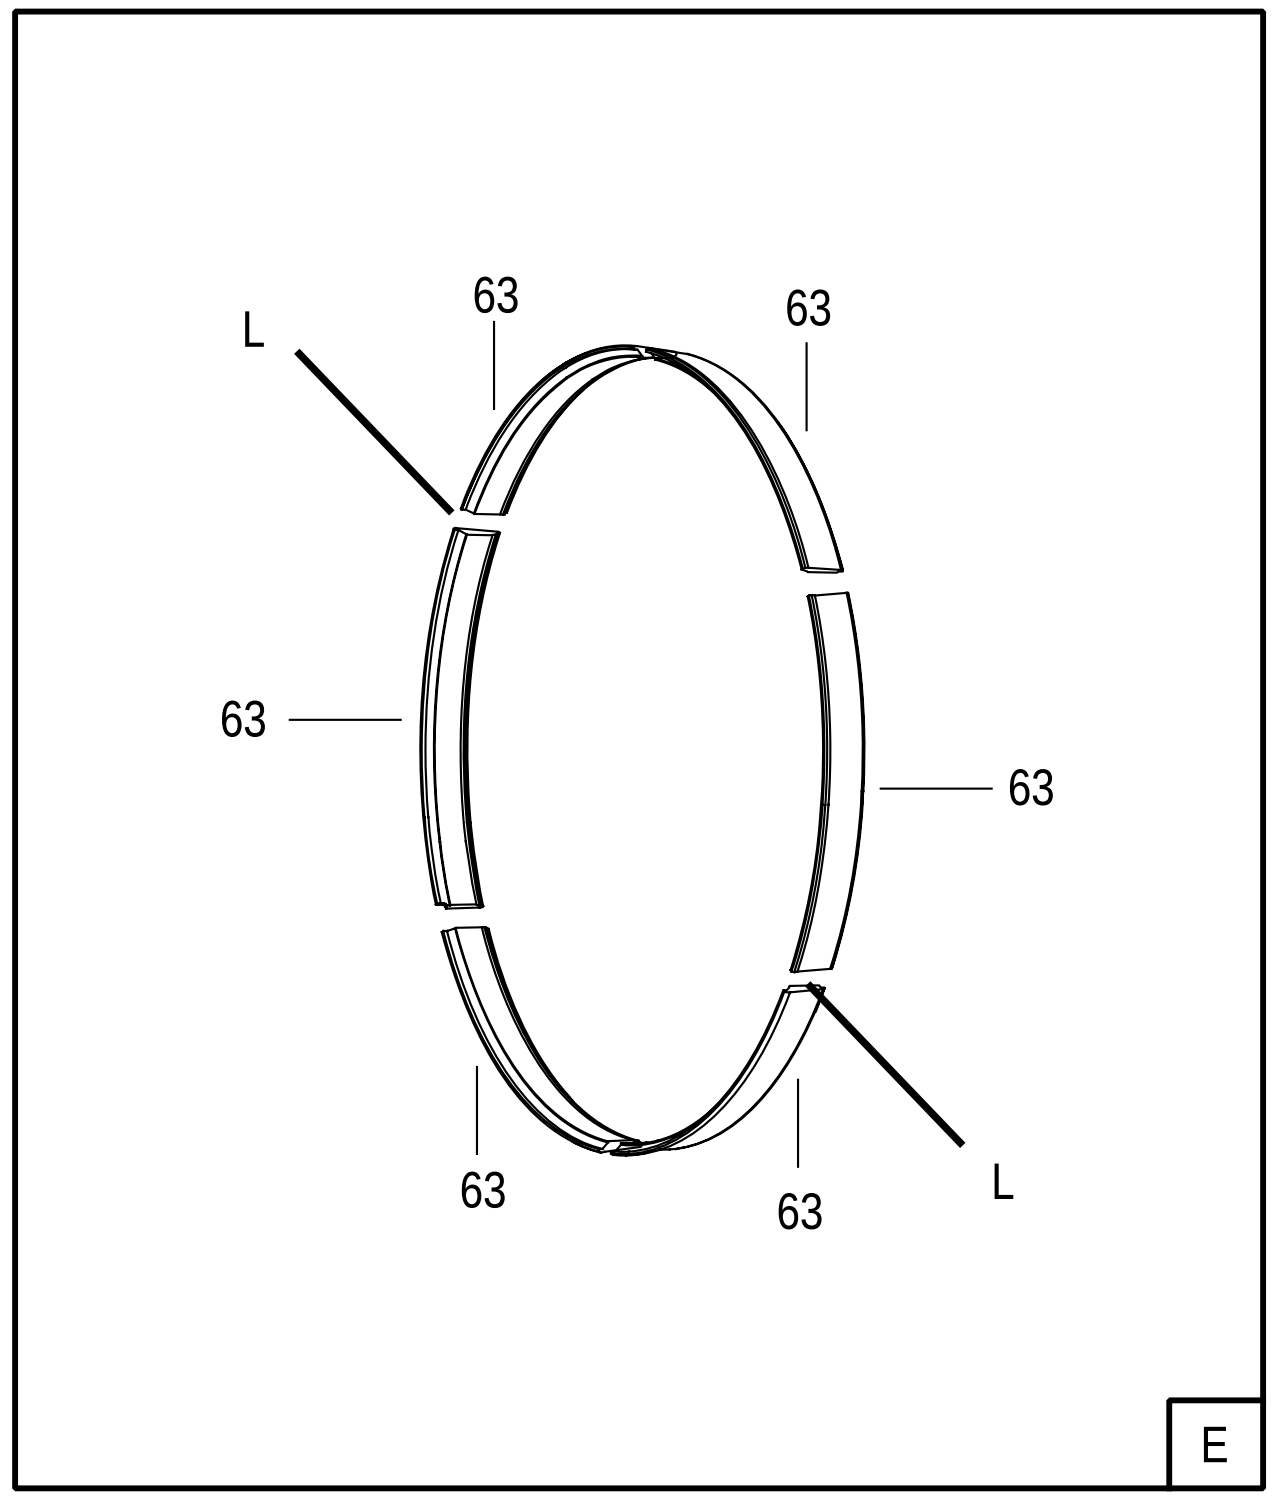

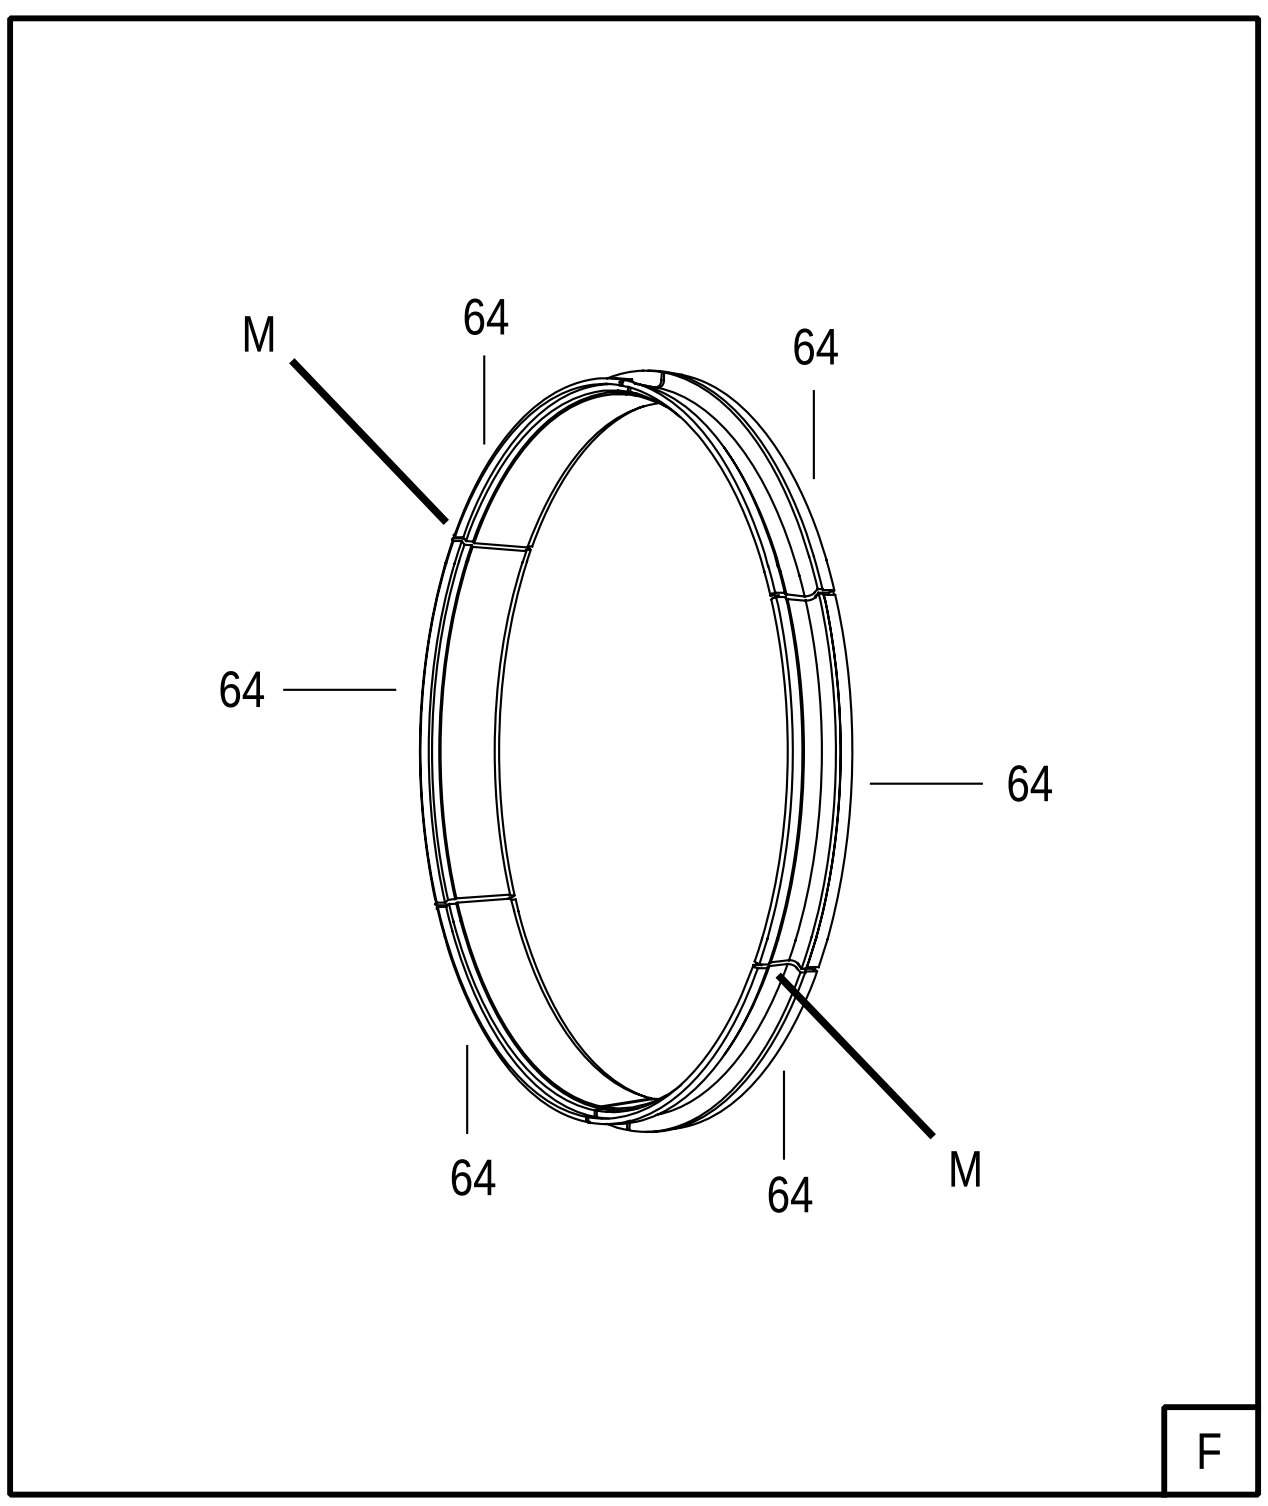

29234

FIGURE 96. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (FIXED 6TH STAGE VANES)
(SHEET 5 OF 8)

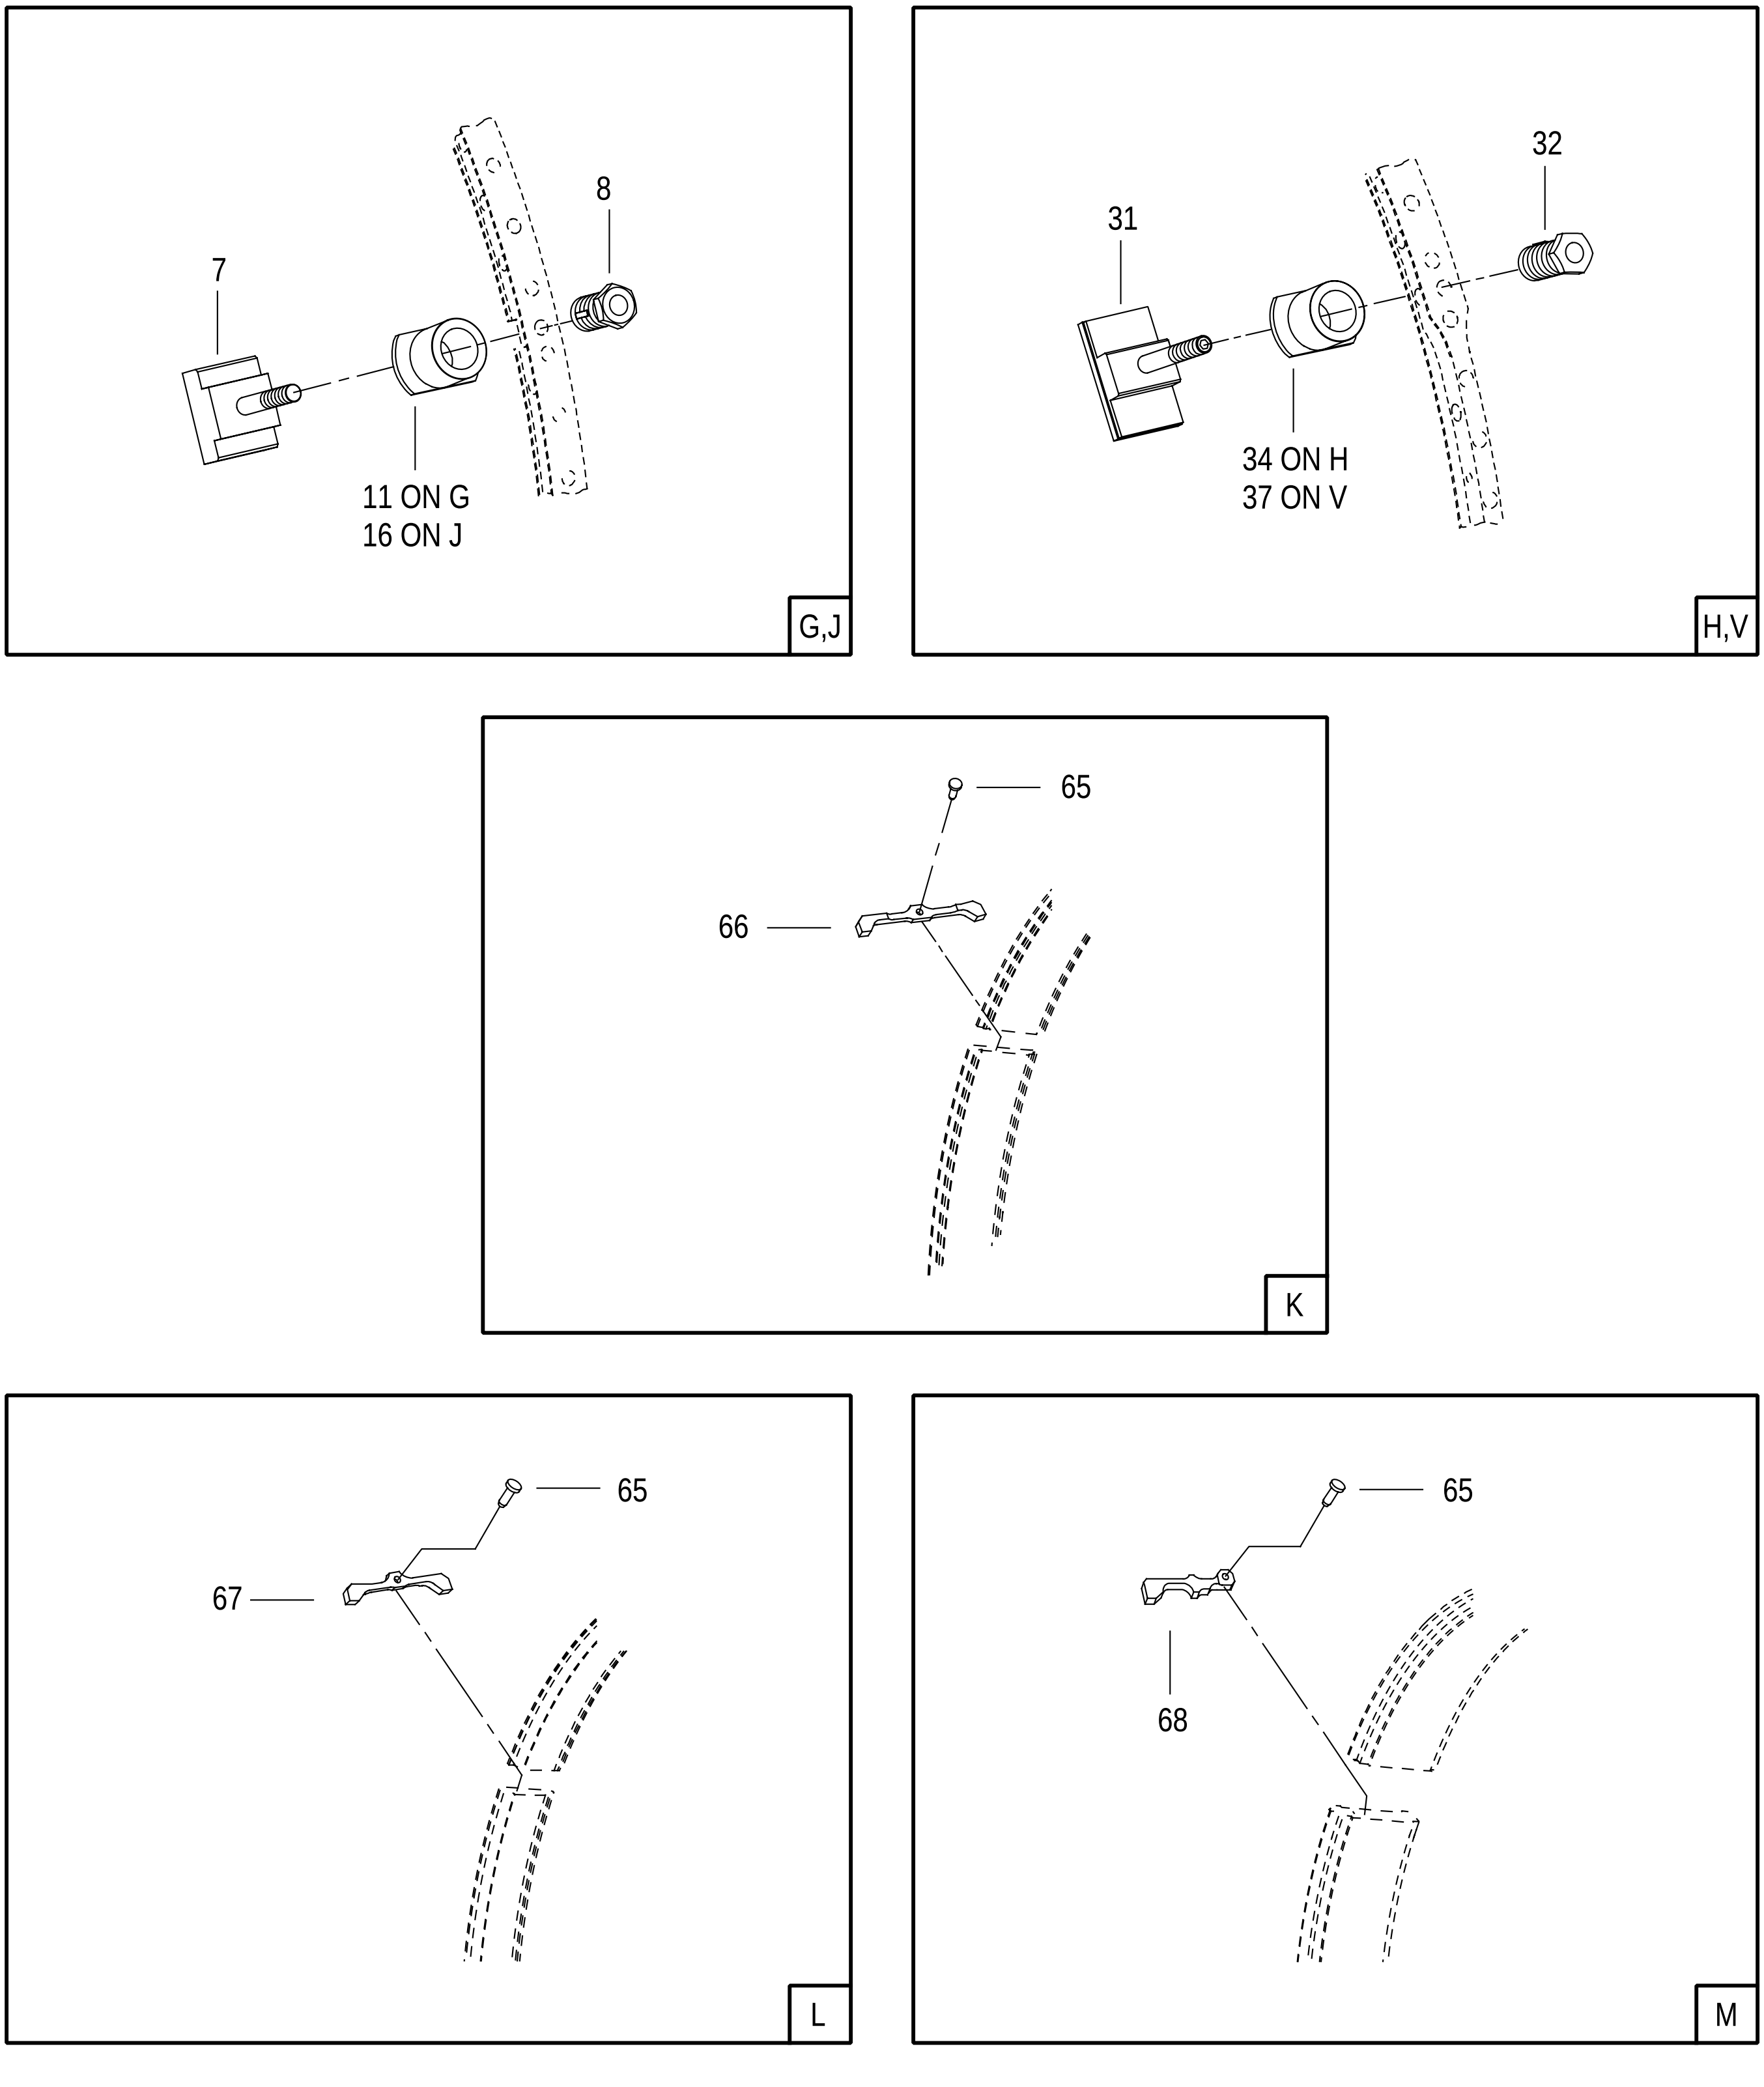


FIGURE 96. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (FIXED 6TH STAGE VANES)
(SHEET 6 OF 8)

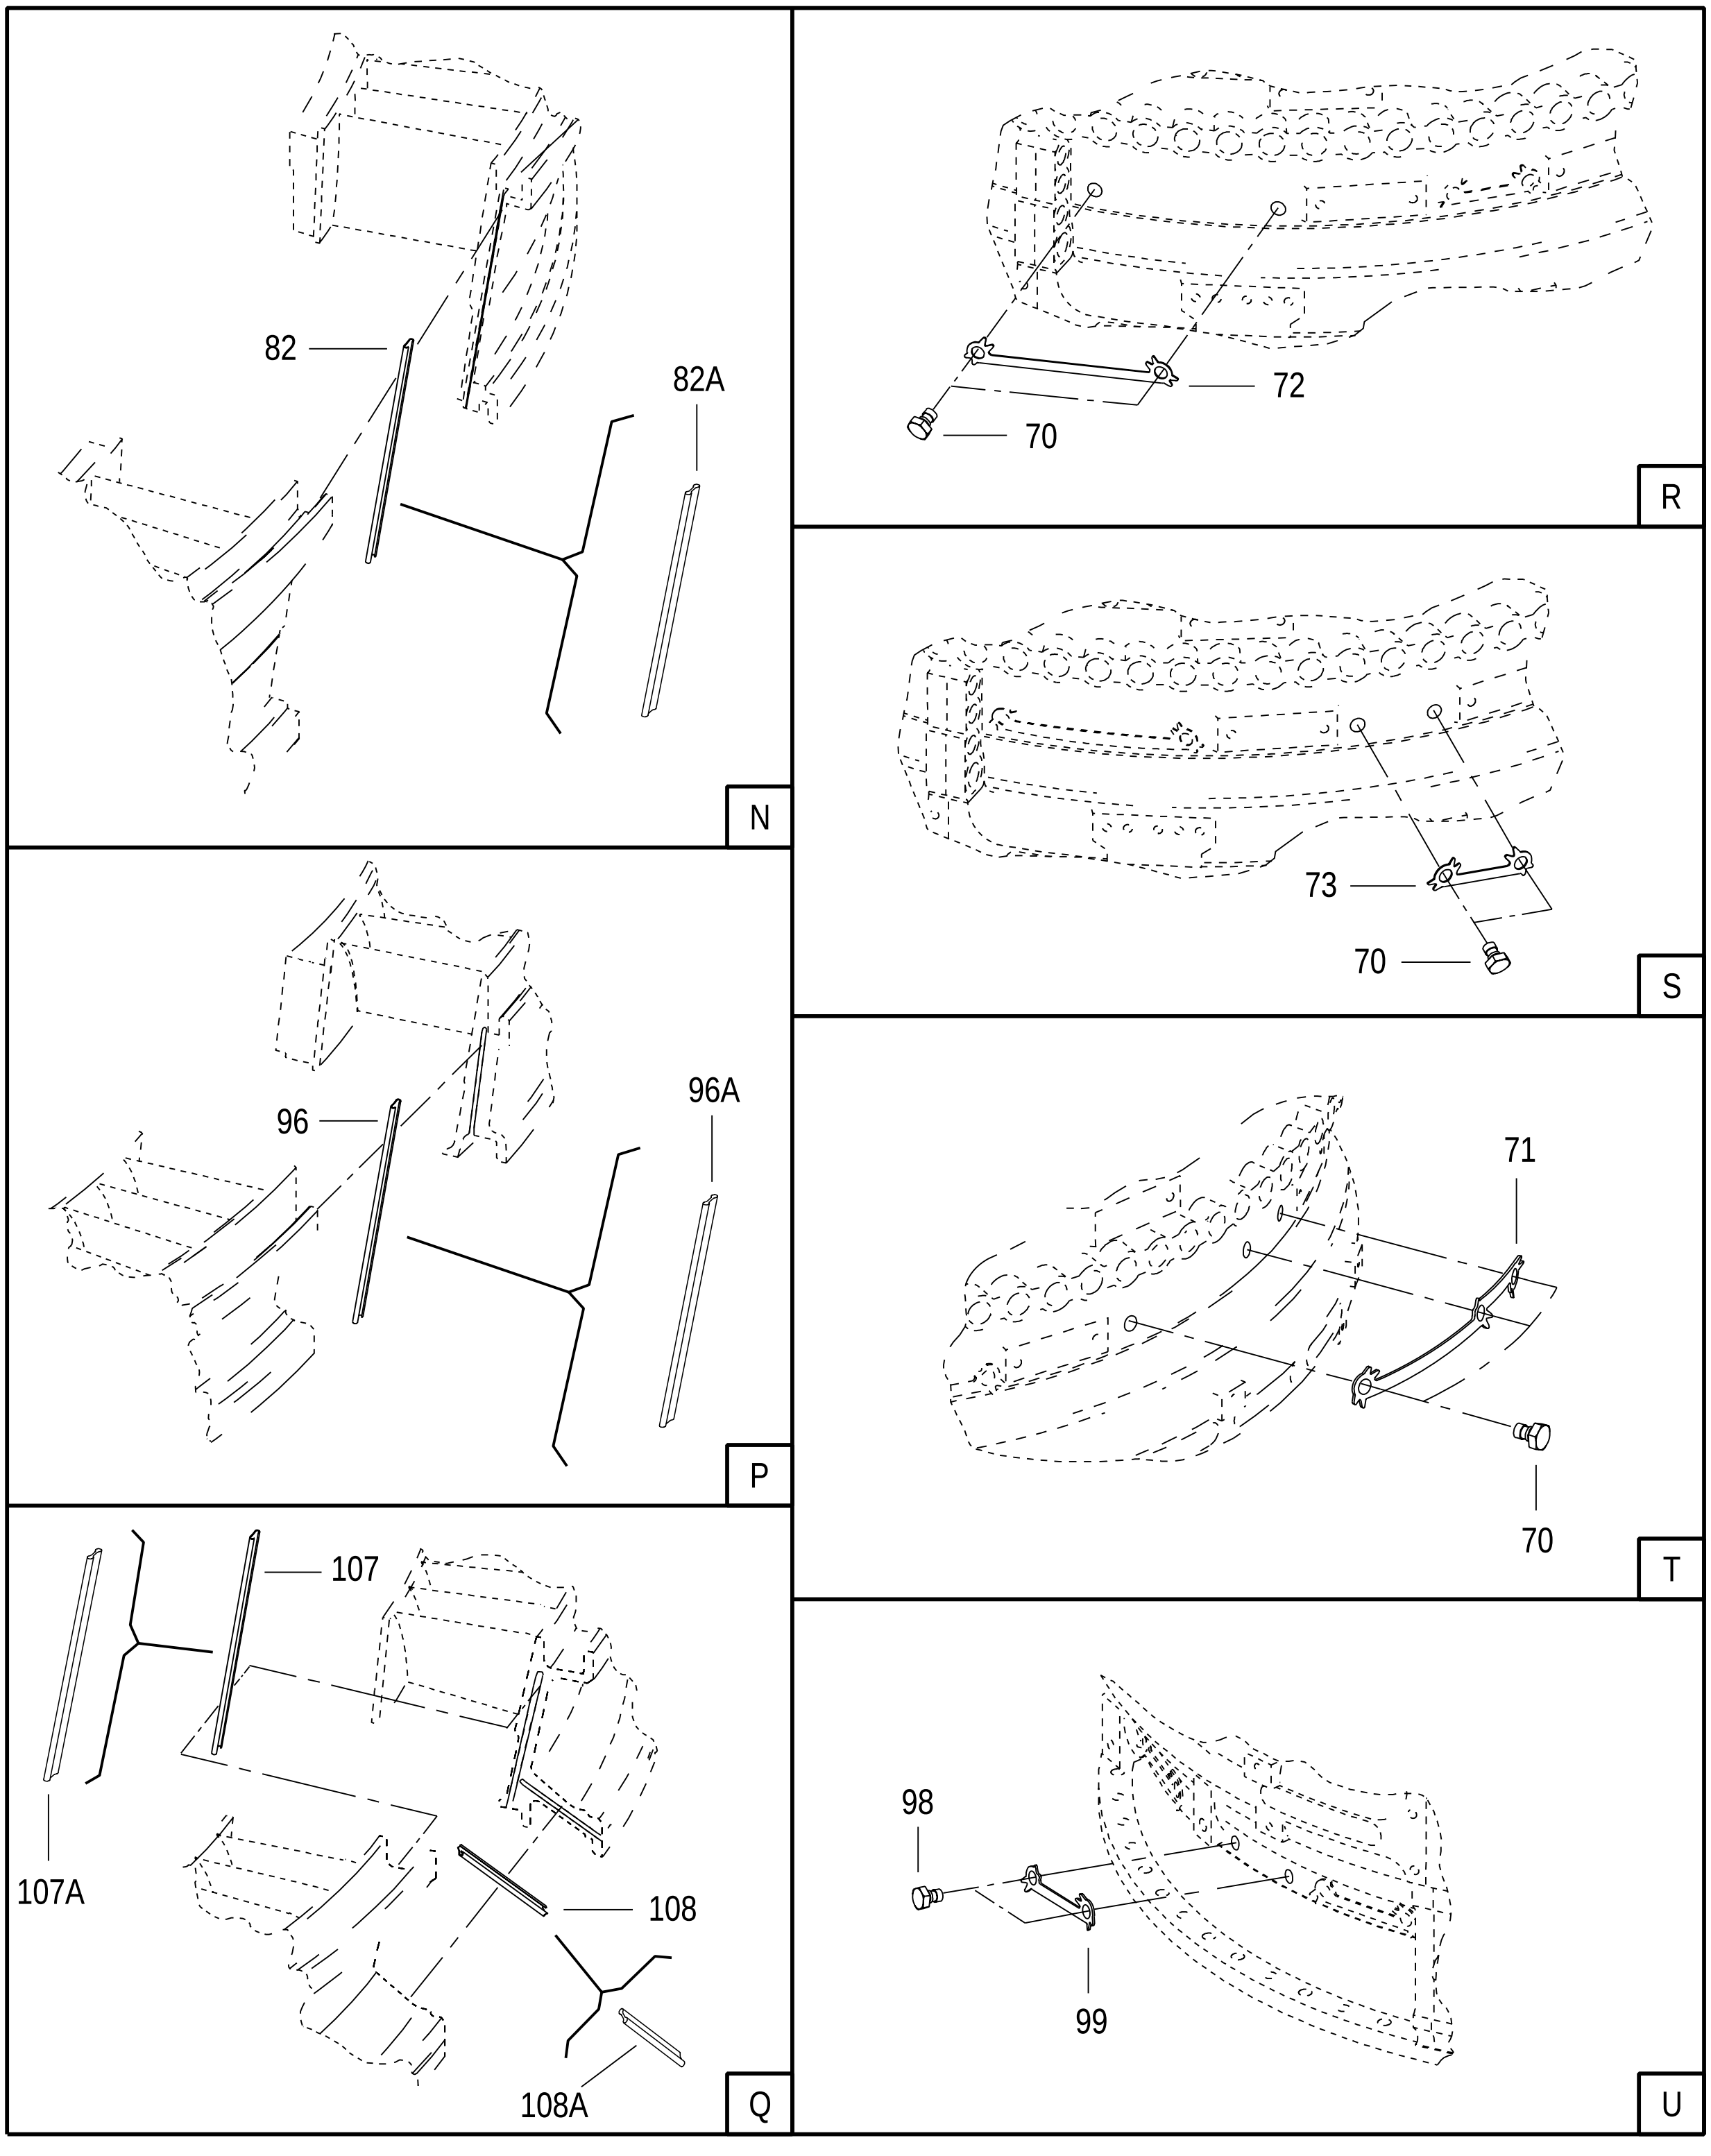


FIGURE 96. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (FIXED 6TH STAGE VANES)
(SHEET 7 OF 8)

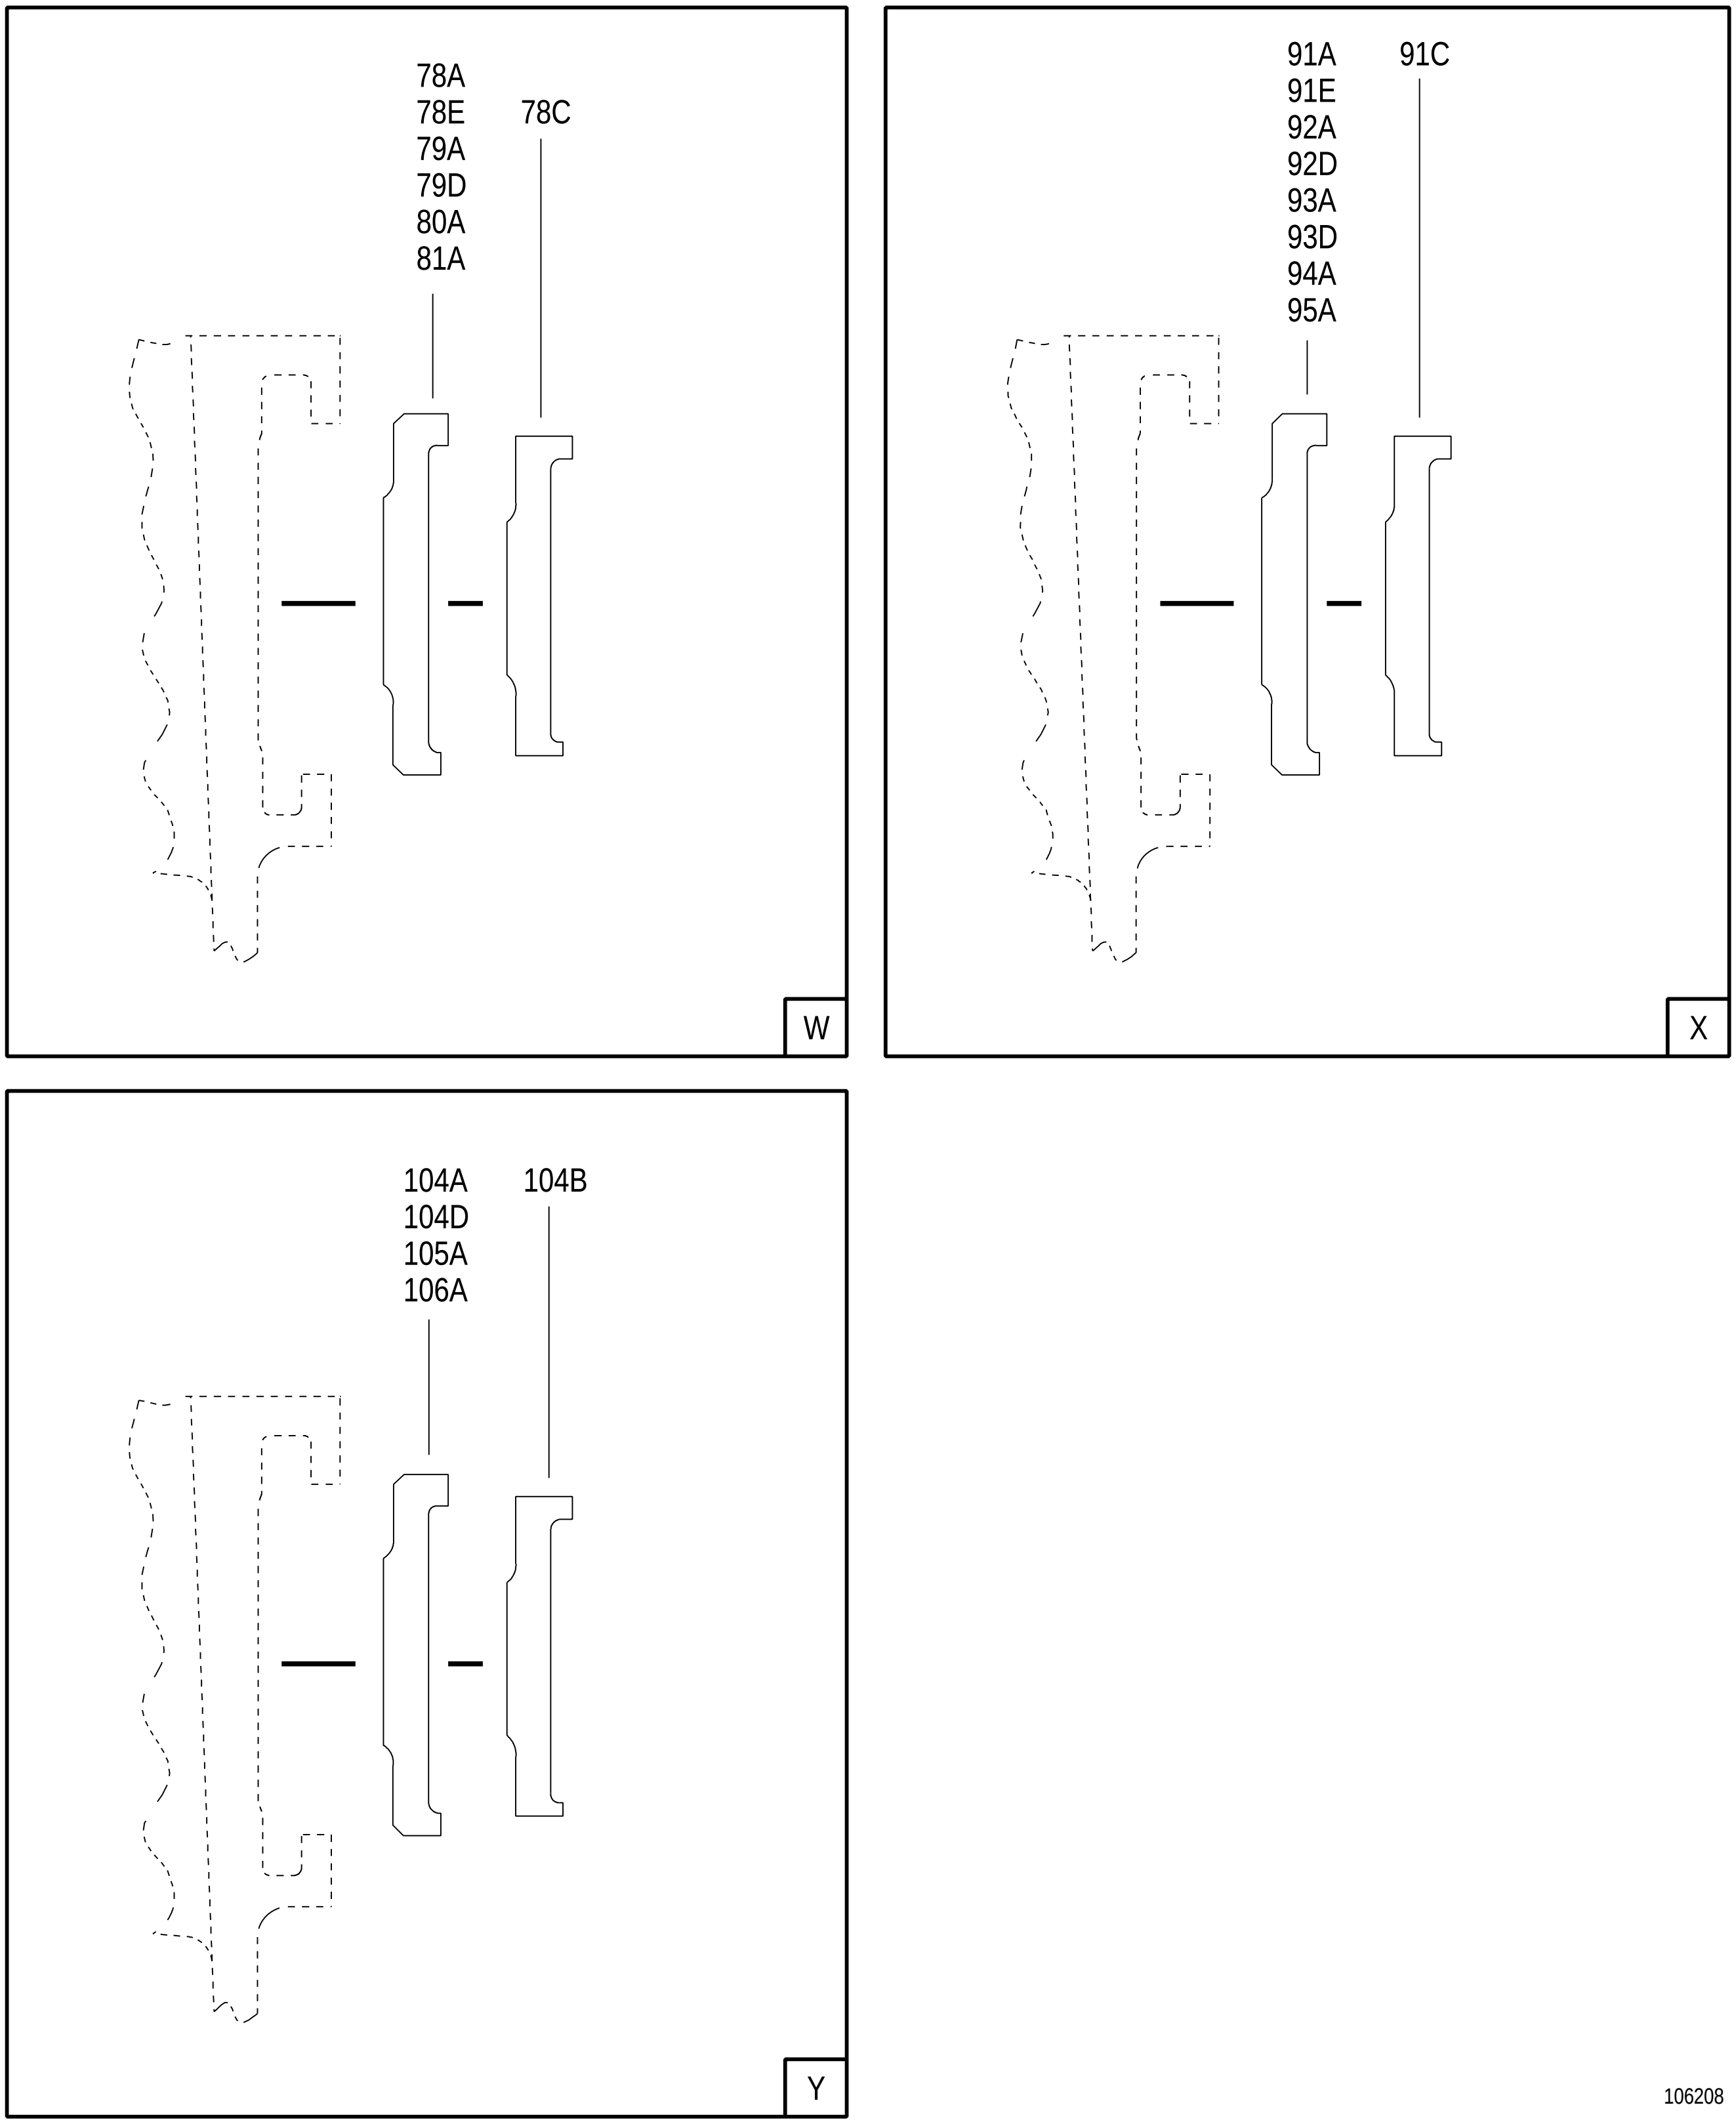


FIGURE 96. 4TH-9TH STAGE COMPRESSOR CASE AND STATOR ASSY (FIXED 6TH STAGE VANES)
(SHEET 8 OF 8)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
96	= 4080084-03	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4077081-03 DO NOT PROCURE FROM P&WA SEE FIG. 85-19 FOR NHA	1	AP/CX/YT	ADD
	= 4080084-04	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4077081-01 DO NOT PROCURE FROM P&WA SEE FIG. 85-19 FOR NHA	1	AP/AQ/CX/ ZB	ADD
	4080084-08	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4080084-04 DO NOT PROCURE FROM P&WA SEE FIG. 85-19 FOR NHA	1	AP/AR/CX/ YZ	ADD
	4080084-02	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4079595-08 DO NOT PROCURE FROM P&WA SEE FIG. 85-19 FOR NHA	1	AP/CX/EY/ YR	ADD
	4080084-06	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4080084-02 DO NOT PROCURE FROM P&WA SEE FIG. 85-19 FOR NHA	1	AP/CX/EZ/ YX	ADD
	4080084-01	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4079595-09 DO NOT PROCURE FROM P&WA SEE FIG. 85-19 FOR NHA	1	AP/CX/KA/ YP	ADD
	4080084-05	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) REOP AND REID OF 4080084-01 DO NOT PROCURE FROM P&WA SEE FIG. 85-19 FOR NHA	1	AP/CX/KB/ YV	ADD
	4080302-01	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/EX	ADD
	4080302-02	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/BQ/EX/ LG/LJ	ADD
	4080302-04	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/BQ/EX/ LH	ADD
	4079598-06	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/BQ/EX/ LK/NL	ADD
	= 4079598-07	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/BQ/EX/ NM	ADD
	= 4079598-09	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SUPERSEDED BY 4084254-01 SEE FIG. 85-19 FOR NHA	1	AP/BQ/EX/ MM/NM	ADD
	4084254-01	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SUPERSEDES 4079598-09 SEE FIG. 85-19 FOR NHA	1		ADD
	4079598-11	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	MN	ADD
	4077081-17	52661	CASE AND STATOR ASSY-COMPRESSOR, ... 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/CX/YQ	ADD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
96	4077081-18	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/CX/YS	ADD
	4077081-19	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/CX/YU	ADD
	4077081-20	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/CX/ZC	ADD
	4077081-23	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/CX/YW	ADD
	4077081-24	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/CX/YY	ADD
	4077081-26	52661	CASE AND STATOR ASSY-COMPRESSOR, 4TH-9TH STAGE (FIXED 6TH STAGE VANES) SEE FIG. 85-19 FOR NHA	1	AP/CX/ZA	ADD
- 1	4075572	52661	. SEAT-BLEED VALVE STRAP, LOCKING	9		PAFZZ
- 2	ST2606-04	52661	. BOLT-MACHINE, HEX 0.190-32UNJF-3A X 0.375 IN. LONG (AP) REPLACES ST2606-05	2		PAFZZ
- 3	ST2601-22	52661	. BOLT-MACHINE, DOUBLE HEX 0.250-28UNJF-3A X 1.500 IN. LONG REPLACES ST2345-22	68	CN	PAFZZ
	MS9697-22	96906	. BOLT	68	CP	PAFZZ
- 4	4042344	52661	. NUT OPTION SEE OPTION TABLE	68	CN	PAFZZ
	ST2745-10	52661	. NUT OPTION SEE OPTION TABLE	68	CP	PAFZZ
- 5	4081056	52661	. ARM-COMPRESSOR STATOR, ASSY OF REPLACES 4066847	66		PAFZZ
R - 6	111167-018	56878	. BOLT-SELF-LOCKING, HEX 0.190-32UNJF-3A X 0.562 IN. LONG (AP) P&W PART NO. ST2276-018 REPLACES SC2682-018 P&W PART NO. ST2277-018	1		PAFZZ
- 7	4075681	52661	. BUMPER OPTION SEE OPTION TABLE	8		PAFZZ
- 8	4075672	52661	. BUSHING OPTION SEE OPTION TABLE	8		PAFZZ
- 9	4075698	52661	. RING HALF-SYNCHRONIZING, COMPRESSOR STATOR, 4TH STAGE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 10	MS124656	96906	.. INSERT	4		PAFZZ
- 11	4075677	52661	.. INSERT-SCREW THREAD 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
- 12	4009810	52661	.. PIN-STRAIGHT, HEADLESS 0.24925 DIA X 0.500 IN. LONG	2		PAFZZ
- 13	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	33		PAFZZ
- 14	4075699	52661	. RING HALF-SYNCHRONIZING, COMPRESSOR STATOR, 4TH STAGE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 15	MS124656	96906	.. INSERT	4		PAFZZ
- 16	4075677	52661	.. INSERT-SCREW THREAD 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
- 17	4009810	52661	.. PIN-STRAIGHT, HEADLESS 0.24925 DIA X 0.500 IN. LONG	2		PAFZZ
- 18	4075460	52661	.. BEARING OPTION SEE OPTION TABLE	33		PAFZZ
- 19	4077433-01	52661	. RING SEGMENT-COMPRESSOR STATOR LOCK, 4TH STAGE, ASSY OF	4		PAFZZ
- 20	4077434-02	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, 4TH STAGE	2		PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
96 - 21	4066226	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	9		PAFZZ
- 22	4076827	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.755 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	9		PAFZZ
- 23	4076952	52661	.. PIN-SHOULDER, HEADLESS . . . . 0.09375 AND 0.135 IN. DIA X 0.440 IN. LONG	1		PAFZZ
- 24	4077434-01	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, . 4TH STAGE	4		PAFDD
- 25	4077734	52661	. BEARING HALF-COMPRESSOR STATOR, 4TH . . . . . . AND 5TH STAGE	140		PAFZZ
- 26	4075974	52661	. VANE OPTION-4TH STAGE . . . . SEE OPTION TABLE	70		PAFDD
- 27	4066814	52661	. BEARING-WASHER, THRUST . . . . 0.500 ID X 1.040 OD X 0.041 IN. THK USE ONLY ON 4079598-06, -07, 4080084-01 THRU -06, -08, 4080302-01, -02, AND -04	70		PAFZZ
	4080717	52661	. BEARING-WASHER, THRUST . . . . 0.505 ID X 1.030 OD X 0.042 IN. THK USE ONLY ON 4079598-09	70		PAFZZ
- 28	4071383	52661	. BEARING OPTION . . . . SEE OPTION TABLE USE ONLY ON 4079598-06, 4080084-01 THRU -05, -06, -08, 4080302-01, -02, AND -04	70	C	PAFZZ
	4081053-01	52661	. BEARING-COMPRESSOR STATOR, 4TH STAGE	70	D	PAFZZ
- 29	4081056	52661	. ARM-COMPRESSOR STATOR, ASSY OF . . . . REPLACES 4066847	68		PAFZZ
R - 30	111167-018	56878	. BOLT-SELF-LOCKING, HEX . . . . 0.190-32UNJF-3A X 0.562 IN. LONG (AP) P&W PART NO. ST2276-018 REPLACES SC2682-018 P&W PART NO. ST2277-018	1		PAFZZ
- 31	4079445	52661	. BUMPER OPTION . . . . SEE OPTION TABLE	8		PAFZZ
- 32	4075672	52661	. BUSHING OPTION . . . . SEE OPTION TABLE	8		PAFZZ
	4077392	52661	. RING HALF-SYNCHRONIZING, COMPRESSOR . . . . . STATOR, 5TH STAGE, ASSY OF	1		PAFDD
- 33	4075460	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	34		PAFZZ
- 34	4075677	52661	.. INSERT-SCREW THREAD . . . . 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
- 35	4078426-01	52661	.. RING HALF-SYNCHRONIZING, COMPRESSOR . . . . STATOR, 5TH STAGE, ASSY OF	1		XA
	4077393	52661	. RING HALF-SYNCHRONIZING, COMPRESSOR . . . . . STATOR, 5TH STAGE, ASSY OF	1		PAFDD
- 36	4075460	52661	.. BEARING OPTION . . . . SEE OPTION TABLE	34		PAFZZ
- 37	4075677	52661	.. INSERT-SCREW THREAD . . . . 0.375-24UNJF-3B X 0.430 IN. LONG	4		PAFZZ
- 38	4078426-02	52661	.. RING HALF-SYNCHRONIZING, COMPRESSOR . . . . STATOR, 5TH STAGE	1		XA
- 39	4077011-01	52661	. RING SEGMENT-COMPRESSOR STATOR LOCK, . . . 5TH STAGE, ASSY OF	4		PAFZZ
- 40	4076475-02	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, . 5TH STAGE	2		PAFDD
- 41	4066226	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	9		PAFZZ
- 42	4076828	52661	. BOLT-MACHINE, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.650 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	9		PAFZZ
- 43	4076952	52661	.. PIN-SHOULDER, HEADLESS . . . . 0.09375 AND 0.135 IN. DIA X 0.440 IN. LONG	1		PAFZZ
- 44	4076475-01	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, . 5TH STAGE	4		PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
96 - 45	4077734	52661	. BEARING HALF-COMPRESSOR STATOR, 4TH AND 5TH STAGE	152		PAFZZ
- 46	4080325	52661	. VANE OPTION-5TH STAGE SEE OPTION TABLE	76		PAFDD
- 47	4066813	52661	. BEARING-WASHER, THRUST 0.500 ID X 0.915 OD X 0.041 IN. THK USE ONLY ON 4079598-06, -07, 4080084-01 THRU -06, -08, 4080302-01, -02, AND -04	76		PAFZZ
	4080718	52661	. BEARING-WASHER, THRUST 0.505 ID X 0.905 OD X 0.042 IN. THK USE ONLY ON 4079598-09	76		PAFZZ
- 48	4074428	52661	. BEARING OPTION SEE OPTION TABLE USE ONLY ON 4079598-06, 4080084-01 THRU -05, -06, -08, 4080302-01, -02, AND -04	76	C	PAFZZ
	4081054-01	52661	. BEARING-COMPRESSOR STATOR, 5TH STAGE	76	D	PAFZZ
- 49	4074426	52661	. WASHER-KEY, DOUBLE 0.563 ID X 1.102 IN. LONG	38		PAFZZ
- 50	4079610	52661	. LOCK-COMPRESSOR STATOR VANE, 6TH STAGE	44	ZK	PAFZZ
	4084157	52661	. LOCK-COMPRESSOR STATOR VANE, 6TH STAGE	44	ZL	PAFZZ
R - 51	111167-018	56878	. BOLT-SELF-LOCKING, HEX R 0.190-32UNJF-3A X 0.562 IN. LONG (AP) R P&W PART NO. ST2276-018 R REPLACES SC2682-018 R P&W PART NO. ST2277-018	2		PAFZZ
- 52	4077012-01	52661	. RING SEGMENT-COMPRESSOR STATOR LOCK, 6TH STAGE, ASSY OF	4		PAFZZ
- 53	4076826-02	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, 6TH STAGE	2		PAFDD
- 54	4066226	52661	. NUT OPTION (AP) SEE OPTION TABLE	9		PAFZZ
- 55	4076829	52661	. BOLT-MACHINE, DOUBLE HEX 0.190-32UNJF-3A X 0.535 IN. LONG (AP) PARTIAL BREAKDOWN FOLLOWS	9		PAFZZ
- 56	4076952	52661	.. PIN-SHOULDER, HEADLESS 0.09375 AND 0.135 IN. DIA X 0.440 IN. LONG	1		PAFZZ
- 57	4076826-01	52661	. SHROUD SEGMENT SET-COMPRESSOR STATOR, 6TH STAGE	4		PAFDD
- 58	4079696	52661	. VANE OPTION-6TH STAGE SEE OPTION TABLE	88		PAFDD
- 59	4066815	52661	. BEARING-WASHER, THRUST 0.500 ID X 0.740 OD X 0.041 IN. THK	88		PAFZZ
- 60	4074432	52661	. BEARING OPTION SEE OPTION TABLE USE ONLY ON 4080084-01 THRU -05, -06, -08, 4080302-01, -02, AND -04 SUPERSEDED BY 4079117	88		PAFZZ
	4079117	52661	. BEARING-COMPRESSOR STATOR, 6TH STAGE SUPERSEDES 4074432	88		PAFZZ
- 61	4074427	52661	. WASHER-KEY, DOUBLE 0.600 ID X 0.923 IN. LONG	44		PAFZZ
- 62	= 4076125	52661	. DUCT SEGMENT-COMPRESSOR, 5TH STAGE	6		PAFDD
	= 4078485	52661	. DUCT SEGMENT-COMPRESSOR, 5TH STAGE	6		PAFDD
	4082851	52661	. DUCT SEGMENT-COMPRESSOR, 5TH STAGE USE ONLY ON 4079598-11	6		PAFDD
- 63	4076126	52661	. DUCT SEGMENT-COMPRESSOR, 6TH STAGE	6		PAFDD
	4082849	52661	. DUCT SEGMENT-COMPRESSOR, 6TH STAGE USE ONLY ON 4079598-11	6		PAFDD
- 64	4076127	52661	. DUCT SEGMENT-COMPRESSOR, 7TH STAGE	6		PAFDD
	4082848	52661	. DUCT SEGMENT-COMPRESSOR, 7TH STAGE USE ONLY ON 4079598-11	6		PAFDD
- 65	2184930	52661	. PIN-STRAIGHT, HEADED, FLAT 0.0938 X 0.265 IN. LONG	6		PAFZZ
- 66	4059947	52661	. KEY-COMPRESSOR DUCT, 5TH STAGE	2		PAFZZ
- 67	4059948	52661	. KEY-COMPRESSOR DUCT, 6TH STAGE	2		PAFZZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
96 - 68		4059949	52661	. KEY-COMPRESSOR DUCT, 7TH STAGE	2		PAFZZ
- 69		4075438	52661	. RAIL-COMPRESSOR STATOR, 7TH STAGE	8		PAFBZ
- 70		4075434	52661	. BOLT-EXTERNALLY RELIEVED BODY, HEX .... 0.250-28UNJF-3A X 0.450 IN. LONG (AP)	3		PAFZZ
- 71		4075435	52661	. WASHER-KEY, TRIPLE .... 0.2575 ID	4		PAFZZ
- 72		4075436	52661	. WASHER-KEY, DOUBLE .... 0.2575 ID X 4.000 IN. LONG	4		PAFZZ
- 73		4075437	52661	. WASHER-KEY, DOUBLE .... 0.2575 ID X 1.725 IN. LONG	2		PAFZZ
- 74		4077287-01	52661	. SHROUD-COMPRESSOR STATOR, 7TH STAGE, ... ASSY OF USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	6		PAFDD
- 74A		4084995-02	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR .. STATOR, 7 STAGE SERVICE REPAIR PART	2		PADZZ
- 74B		4079207-01	52661	. SHROUD-COMPRESSOR STATOR, 7TH STAGE, ... ASSY OF REOP AND REID OF 4077287-01 USE ONLY ON 4077081-17, -18, -20, -23, -24, AND -26	8		PAFDD
- 74C		4084995-01	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR .. STATOR, 7 STAGE SERVICE REPAIR PART	2		PADZZ
- 75		4079170	52661	. DAMPER-COMPRESSOR STATOR, 7TH STAGE ..... USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01 SUPERSEDES 4077047	2		PAFZZ
- 75A		4079267	52661	. DAMPER-COMPRESSOR STATOR, 7TH STAGE ..... REOP AND REID OF 4079170 USE ONLY ON 4077081-17, -18, -19, -20, -23, -24, AND -26	8		PAFZZ
- 76		4079207-01	52661	. SHROUD-COMPRESSOR STATOR, 7TH STAGE, ... ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04	8		PAFDD
- 76A		4084995-01	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR .. STATOR, 7 STAGE SERVICE REPAIR PART	2		PADZZ
- 77		4079267	52661	. DAMPER-COMPRESSOR STATOR, 7TH STAGE ..... USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04	8		PAFZZ
- 78	=	4077077-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, ... ASSY OF USE ONLY ON 4080084-01 THRU -05, -06, AND -08	2		PAFDD
	=	4080487-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, ... ASSY OF USE ONLY ON 4080084-01 THRU -05, -06, AND -08	2		PAFDD
	=	4079087-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, ... ASSY OF USE ONLY ON 4080084-01 THRU -05, -06, AND -08	2		PAFDD
		4080497-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, ... ASSY OF USE ONLY ON 4080302-01	2		PAFDD
		4077877-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, ... ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083877-01	2		PAFDD
		4083877-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, ... ASSY OF SUPERSEDES 4077877-01	2		PAFDD
- 78A		4083730	52661	.. LUG-ANTI-ROTATION, 7 STAGE	1		PAFZZ
- 78B		DELETED					

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
96 - 78C	4077263	52661	.. LUG-ANTI-ROTATION, 7 STAGE . . . . USE ONLY ON 4077077-01, 4079087-01, 4080487-01, AND 4080497-01	1		PAFZZ
- 78D	4084477-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, . . . ASSY OF USE ONLY ON 4077081-18, -20, -24, AND -26 REOP AND REID OF 4077077-01	7		PAFDD
	= 4084257-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, . . . ASSY OF USE ONLY ON 4077081-17, AND -23	7		PAFDD
	= 4080737-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, . . . ASSY OF	7		PAFDD
- 78E	4083730	52661	.. LUG-ANTI-ROTATION, 7 STAGE	1		PAFZZ
- 79	= 4077077-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, AND -08	3		PAFDD
	= 4080487-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, AND -08	3		PAFDD
	= 4079087-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, AND -08	3		PAFDD
	4080497-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080302-01	3		PAFDD
	4077877-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, . . . ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083877-01	3		PAFDD
	4083877-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, . . . ASSY OF SUPERSEDES 4077877-01	3		PAFDD
- 79A	4083730	52661	.. LUG-ANTI-ROTATION, 7 STAGE . . . . USE ONLY ON 4077877-01 AND 4083877-01	1		PAFZZ
- 79B	DELETED					
- 79C	4084477-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . REOP AND REID OF 4077077-02 USE ONLY ON 4077081-18, -20, -24, AND -26	1		PAFDD
	= 4084257-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4077081-17, AND -23	1		PAFDD
	= 4080737-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE	1		PAFDD
- 79D	4083730	52661	.. LUG-ANTI-ROTATION, 7 STAGE . . . . USE ONLY ON 4084477-02 AND 4084257-02	1		PAFZZ
- 80	= 4077077-03	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, AND -08	2		PAFDD
	= 4080487-03	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, AND -08	2		PAFDD
	= 4079087-03	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, AND -08	2		PAFDD
	4080497-03	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080302-01	2		PAFDD
	4077877-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, . . . ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083877-01	2		PAFDD
	4083877-01	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, . . . ASSY OF SUPERSEDES 4077877-01	2		PAFDD
- 80A	4083730	52661	.. LUG-ANTI-ROTATION, 7 STAGE . . . . USE ONLY ON 4077877-01 AND 4083877-01	1		PAFZZ
- 81	= 4077077-04	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, AND -08	1		PAFDD
	= 4080487-04	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, AND -08	1		PAFDD
	= 4079087-04	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, AND -08	1		PAFDD
	4080497-04	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE . . . . USE ONLY ON 4080302-01	1		PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
96 - 81	4077877-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, . . . ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083877-02	1		PAFDD
	4083877-02	52661	. COMPRESSOR STATOR SEGMENT-7TH STAGE, . . . ASSY OF SUPERSEDES 4077877-02	1		PAFDD
- 81A	4083730	52661	.. LUG-ANTI-ROTATION, 7 STAGE . . . . USE ONLY ON 4077877-02 AND 4083877-02	1		PAFZZ
R - 82	4076385	52661	. SEAL-COMPRESSOR STATOR	6	WD	PAFZZ
R - 82A	4086309-01	52661	. SEAL-COMPRESSOR STATOR	6	WE	PAFZZ
- 83	4075433	52661	. GASKET OPTION . . . . SEE OPTION TABLE	2		PAFZZ
- 84	11155-I	15284	. GASKET-COMPRESSOR STATOR, 8TH STAGE . . . . . P&W PART NO. 4075429	2		PAFZZ
- 85	4077288-01	52661	. SHROUD-COMPRESSOR STATOR, 8TH STAGE, ... ASSY OF USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	6		PAFDD
- 85A	4084996-02	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 8 STAGE SERVICE REPAIR PART	2		PADZZ
- 85B	4079208-01	52661	. SHROUD-ASSY OF . . . . REOP AND REID OF 4077288-01 USE ONLY ON 4077081-17, -18, -19, -20, -23, -24, AND -26	2		PAFDD
- 85C	4084996-01	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 8 STAGE SERVICE REPAIR PART	2		PADZZ
- 85D	4079214-01	52661	. SHROUD-ASSY OF . . . . USE ONLY ON 4077081-17, -18, -19, -20, -23, -24, AND -26	8		PAFDD
- 85E	4084996-03	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 8 STAGE SERVICE REPAIR PART	2		PADZZ
- 86	4079171	52661	. DAMPER-COMPRESSOR STATOR, 8TH STAGE . . . . . USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01 SUPERSEDES 4077048	2		PAFZZ
- 86A	4079268	52661	. DAMPER-COMPRESSOR STATOR, 8TH STAGE . . . . . REOP AND REID OF 4079171 USE ONLY ON 4077081-17, -18, -19, -20, -23, -24, AND -26	2		PAFZZ
- 86B	4079215	52661	. DAMPER-COMPRESSOR STATOR, 8TH STAGE . . . . . USE ONLY ON 4077081-17, -18, -19, -20, -23, -24, AND -26	8		PAFZZ
- 87	4079208-01	52661	. SHROUD-ASSY OF . . . . USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04	2		PAFDD
- 87A	4084996-01	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 8 STAGE SERVICE REPAIR PART	2		PADZZ
- 88	4079214-01	52661	. SHROUD-ASSY OF . . . . USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04	8		PAFDD
- 88A	4084996-03	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR . . STATOR, 8 STAGE SERVICE REPAIR PART	2		PADZZ
- 89	4079268	52661	. DAMPER-COMPRESSOR STATOR, 8TH STAGE . . . . . USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04	2		PAFZZ
- 90	4079215	52661	. DAMPER-COMPRESSOR STATOR, 8TH STAGE . . . . . USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04	8		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	96 - 91	= 4077078-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	2		PAFDD
		= 4079088-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	2		PAFDD
		4077878-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083978-01 REPLACES 4078348-01	2		PAFDD
		4083978-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF SUPERSEDES 4077878-01	2		PAFDD
R	- 91A	4083729	52661	.. LUG-ANTI-ROTATION, 8 STAGE	1		PAFZZ
R	- 91B	DELETED					
R	- 91C	4077264	52661	.. LUG-ANTI-ROTATION, 8 STAGE . . . . USE ONLY ON 4077078-01 AND 4079088-01	1		PAFZZ
	- 91D	= 4084258-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4077081-17, -18, -23, AND -24	4		PAFDD
		= 4080738-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF	4		PAFDD
		4084478-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4077081-19, -20, AND -26	4		PAFDD
R	- 91E	4083729	52661	.. LUG-ANTI-ROTATION, 8 STAGE . . . . USE ONLY ON 4080738-01, 4084478-01, AND 4084258-01	1		PAFZZ
R	- 91F	DELETED					
	- 92	= 4077078-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, 06, -08, AND 4080302-01	2		PAFDD
		= 4079088-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	2		PAFDD
		4077878-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083978-01 REPLACES 4078348-01	2		PAFDD
		4083978-01	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF SUPERSEDES 4077878-01	2		PAFDD
R	- 92A	4083729	52661	.. LUG-ANTI-ROTATION, 8 STAGE . . . . USE ONLY ON 4077878-01 AND 4083978-01	1		PAFZZ
R	- 92B	DELETED					
	- 92C	= 4084258-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4077081-17, -18, -23, AND -24	4		PAFDD
		= 4080738-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF	4		PAFDD
		4084478-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE . . . . USE ONLY ON 4077081-19, -20, AND -26	4		PAFDD
R	- 92D	4083729	52661	.. LUG-ANTI-ROTATION, 8 STAGE . . . . USE ONLY ON 4080738-02, 4084478-02, AND 4084258-02	1		PAFZZ
R	- 92E	DELETED					

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	96 - 93	=	4077078-03	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	2		PAFDD
		=	4079088-03	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	2		PAFDD
			4077878-03	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083978-03 REPLACES 4078348-03	2		PAFDD
			4083978-03	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF SUPERSEDES 4077878-03	2		PAFDD
R	- 93A		4083729	52661	.. LUG-ANTI-ROTATION, 8 STAGE . . . . USE ONLY ON 4077878-03 AND 4083978-03	1		PAFZZ
R	- 93B		DELETED					
	- 93C	=	4084258-03	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4077081-17, -18, -23, AND -24	2		PAFDD
		=	4080738-03	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF	2		PAFDD
			4084478-03	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE . . . . USE ONLY ON 4077081-19, -20, AND -26	2		PAFDD
R	- 93D		4083729	52661	.. LUG-ANTI-ROTATION, 8 STAGE	1		PAFZZ
R	- 93E		DELETED					
	- 94	=	4077078-04	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	2		PAFDD
		=	4079088-04	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	2		PAFDD
			4077878-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083978-02 REPLACES 4078348-02	2		PAFDD
			4083978-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF SUPERSEDES 4077878-02	2		PAFDD
R	- 94A		4083729	52661	.. LUG-ANTI-ROTATION, 8 STAGE . . . . USE ONLY ON 4077878-02 AND 4083978-02	1		PAFZZ
R	- 94B		DELETED					
	- 95	=	4077078-05	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	2		PAFDD
		=	4079088-05	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE . . . . USE ONLY ON 4080084-01 THRU -05, -06, -08, AND 4080302-01	2		PAFDD
			4077878-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF USE ONLY ON 4079598-06, -07, 4080302-02, AND -04 SUPERSEDED BY 4083978-02 REPLACES 4078348-02	2		PAFDD
			4083978-02	52661	. COMPRESSOR STATOR SEGMENT-8TH STAGE, . . . ASSY OF SUPERSEDES 4077878-02	2		PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	96 - 95A	4083729	52661	.. LUG-ANTI-ROTATION, 8 STAGE .... USE ONLY ON 4077878-02 AND 4083978-02	1		PAFZZ
R	- 96	4076386	52661	. SEAL-COMPRESSOR STATOR	8	WF	PAFZZ
R	- 96A	4086309-02	52661	. SEAL-COMPRESSOR STATOR	8	WG	PAFZZ
	- 97	4075440	52661	. RAIL-COMPRESSOR STATOR, 8TH-9TH STAGE	20		PAFBZ
	- 98	4075434	52661	. BOLT-EXTERNALLY RELIEVED BODY, HEX .... 0.250-28UNJF-3A X 0.450 IN. LONG (AP)	2		PAFZZ
	- 99	4075439	52661	. WASHER-KEY, DOUBLE .... 0.2575 ID X 1.635 IN. LONG	20		PAFZZ
	- 100	4077289-01	52661	. SHROUD-COMPRESSOR STATOR, 9TH STAGE, ... ASSY OF USE ONLY ON 4080084-01 THRU -04 AND 4080302-01	6		PAFDD
	- 101	4079173	52661	. DAMPER-COMPRESSOR STATOR, 9TH STAGE ..... USE ONLY ON 4080084-01 THRU -04 AND 4080302-01 SUPERSEDES 4077049	2		PAFZZ
	- 102	4079209-01	52661	. SHROUD-COMPRESSOR STATOR, 9TH STAGE, ... ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080084-05, -06, -08, 4080302-02, AND -04	10		PAFDD
	- 102A	4084997	52661	.. RING-CELLULAR, STRUCTURAL, COMPRESSOR .. STATOR, 9 STAGE SERVICE REPAIR PART	2		PADZZ
	- 103	4079269	52661	. DAMPER-COMPRESSOR STATOR, 9TH STAGE ..... USE ONLY ON 4079598-06, -07, -09, 4080084-05, -06, -08, 4080302-02, AND -04	10		PAFZZ
	- 104	= 4077079-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ... ASSY OF USE ONLY ON 4080084-01 THRU -04 AND 4080302-01	2		PAFDD
		= 4079089-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ... ASSY OF USE ONLY ON 4080084-01 THRU -04 AND 4080302-01	2		PAFDD
		4077879-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ... ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083979-01	2		PAFDD
		4083979-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ... ASSY OF SUPERSEDES 4077879-01	2		PAFDD
		4080179-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ... ASSY OF USE ONLY ON 4080084-05, -06, AND -08	2		PAFDD
	- 104A	4083728	52661	.. LUG-ANTI-ROTATION, 9TH STAGE .... USE ONLY ON 4083979-01, 4077879-01, 4077079-01, AND 4079089-01	1		PAFZZ
	- 104B	4077265	52661	.. LUG-ANTI-ROTATION, 9TH STAGE .... USE ONLY ON 4077079-01 AND 4079089-01	1		PAFZZ
	- 104C	= 4084579-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ... ASSY OF USE ONLY ON 4077081-17, -18, -20, -24, AND -26	10		PAFDD
		= 4080739-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ... ASSY OF	10		PAFDD

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	96 - 104C		4084259-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ASSY OF REOP AND REID OF 4079089-01, -02, AND -03 USE ONLY ON 4077081-17, -23, -24, AND -26	10		PAFDD
	- 104D		4083728	52661	.. LUG-ANTI-ROTATION, 9TH STAGE	1		PAFZZ
	- 105	=	4077079-02	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE USE ONLY ON 4080084-01 THRU -04 AND 4080302-01	2		PAFDD
		=	4079089-02	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE USE ONLY ON 4080084-01 THRU -04 AND 4080302-01	2		PAFDD
			4077879-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083979-01	2		PAFDD
			4083979-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ASSY OF SUPERSEDES 4077879-01	2		PAFDD
			4080179-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ASSY OF USE ONLY ON 4080084-05, -06, AND -08	2		PAFDD
	- 105A		4083728	52661	.. LUG-ANTI-ROTATION, 9TH STAGE USE ONLY ON 4083979-01 AND 4077879-01	1		PAFZZ
	- 106	=	4077079-03	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE USE ONLY ON 4080084-01 THRU -04 AND 4080302-01	6		PAFDD
		=	4079089-03	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE USE ONLY ON 4080084-01 THRU -04 AND 4080302-01	6		PAFDD
			4077879-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ASSY OF USE ONLY ON 4079598-06, -07, -09, 4080302-02, AND -04 SUPERSEDED BY 4083979-01	6		PAFDD
			4083979-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ASSY OF SUPERSEDES 4077879-01	6		PAFDD
			4080179-01	52661	. COMPRESSOR STATOR SEGMENT-9TH STAGE, ASSY OF USE ONLY ON 4080084-05, -06, AND -08	6		PAFDD
	- 106A		4083728	52661	.. LUG-ANTI-ROTATION, 9TH STAGE USE ONLY ON 4083979-01 AND 4077879-01	1		PAFZZ
R	- 107		4076387	52661	. SEAL-COMPRESSOR STATOR	8	WH	PAFZZ
R	- 107A		4086309-03	52661	. SEAL-COMPRESSOR STATOR	8	WJ	PAFZZ
R	- 108		4076388	52661	. SEAL-COMPRESSOR STATOR	8	WH	PAFZZ
R	- 108A		4086310	52661	. SEAL-COMPRESSOR STATOR, 9TH STAGE	8	WJ	PAFZZ
	- 109		4075413-01	52661	. CASE SET-COMPRESSOR, 4TH-9TH STAGE USE ONLY ON 4080084-01 THRU -05, -06, -08, 4080302-01, -02, AND -04 SUPERSEDED BY 4080545-01 SEE FIG. 97 FOR DETAIL PARTS	1		PAFDD
			4080545-01	52661	. CASE SET-COMPRESSOR, 4TH-9TH STAGE SUPERSEDES 4075413-01 SEE FIG. 97 FOR DETAIL PARTS	1		PAFDD

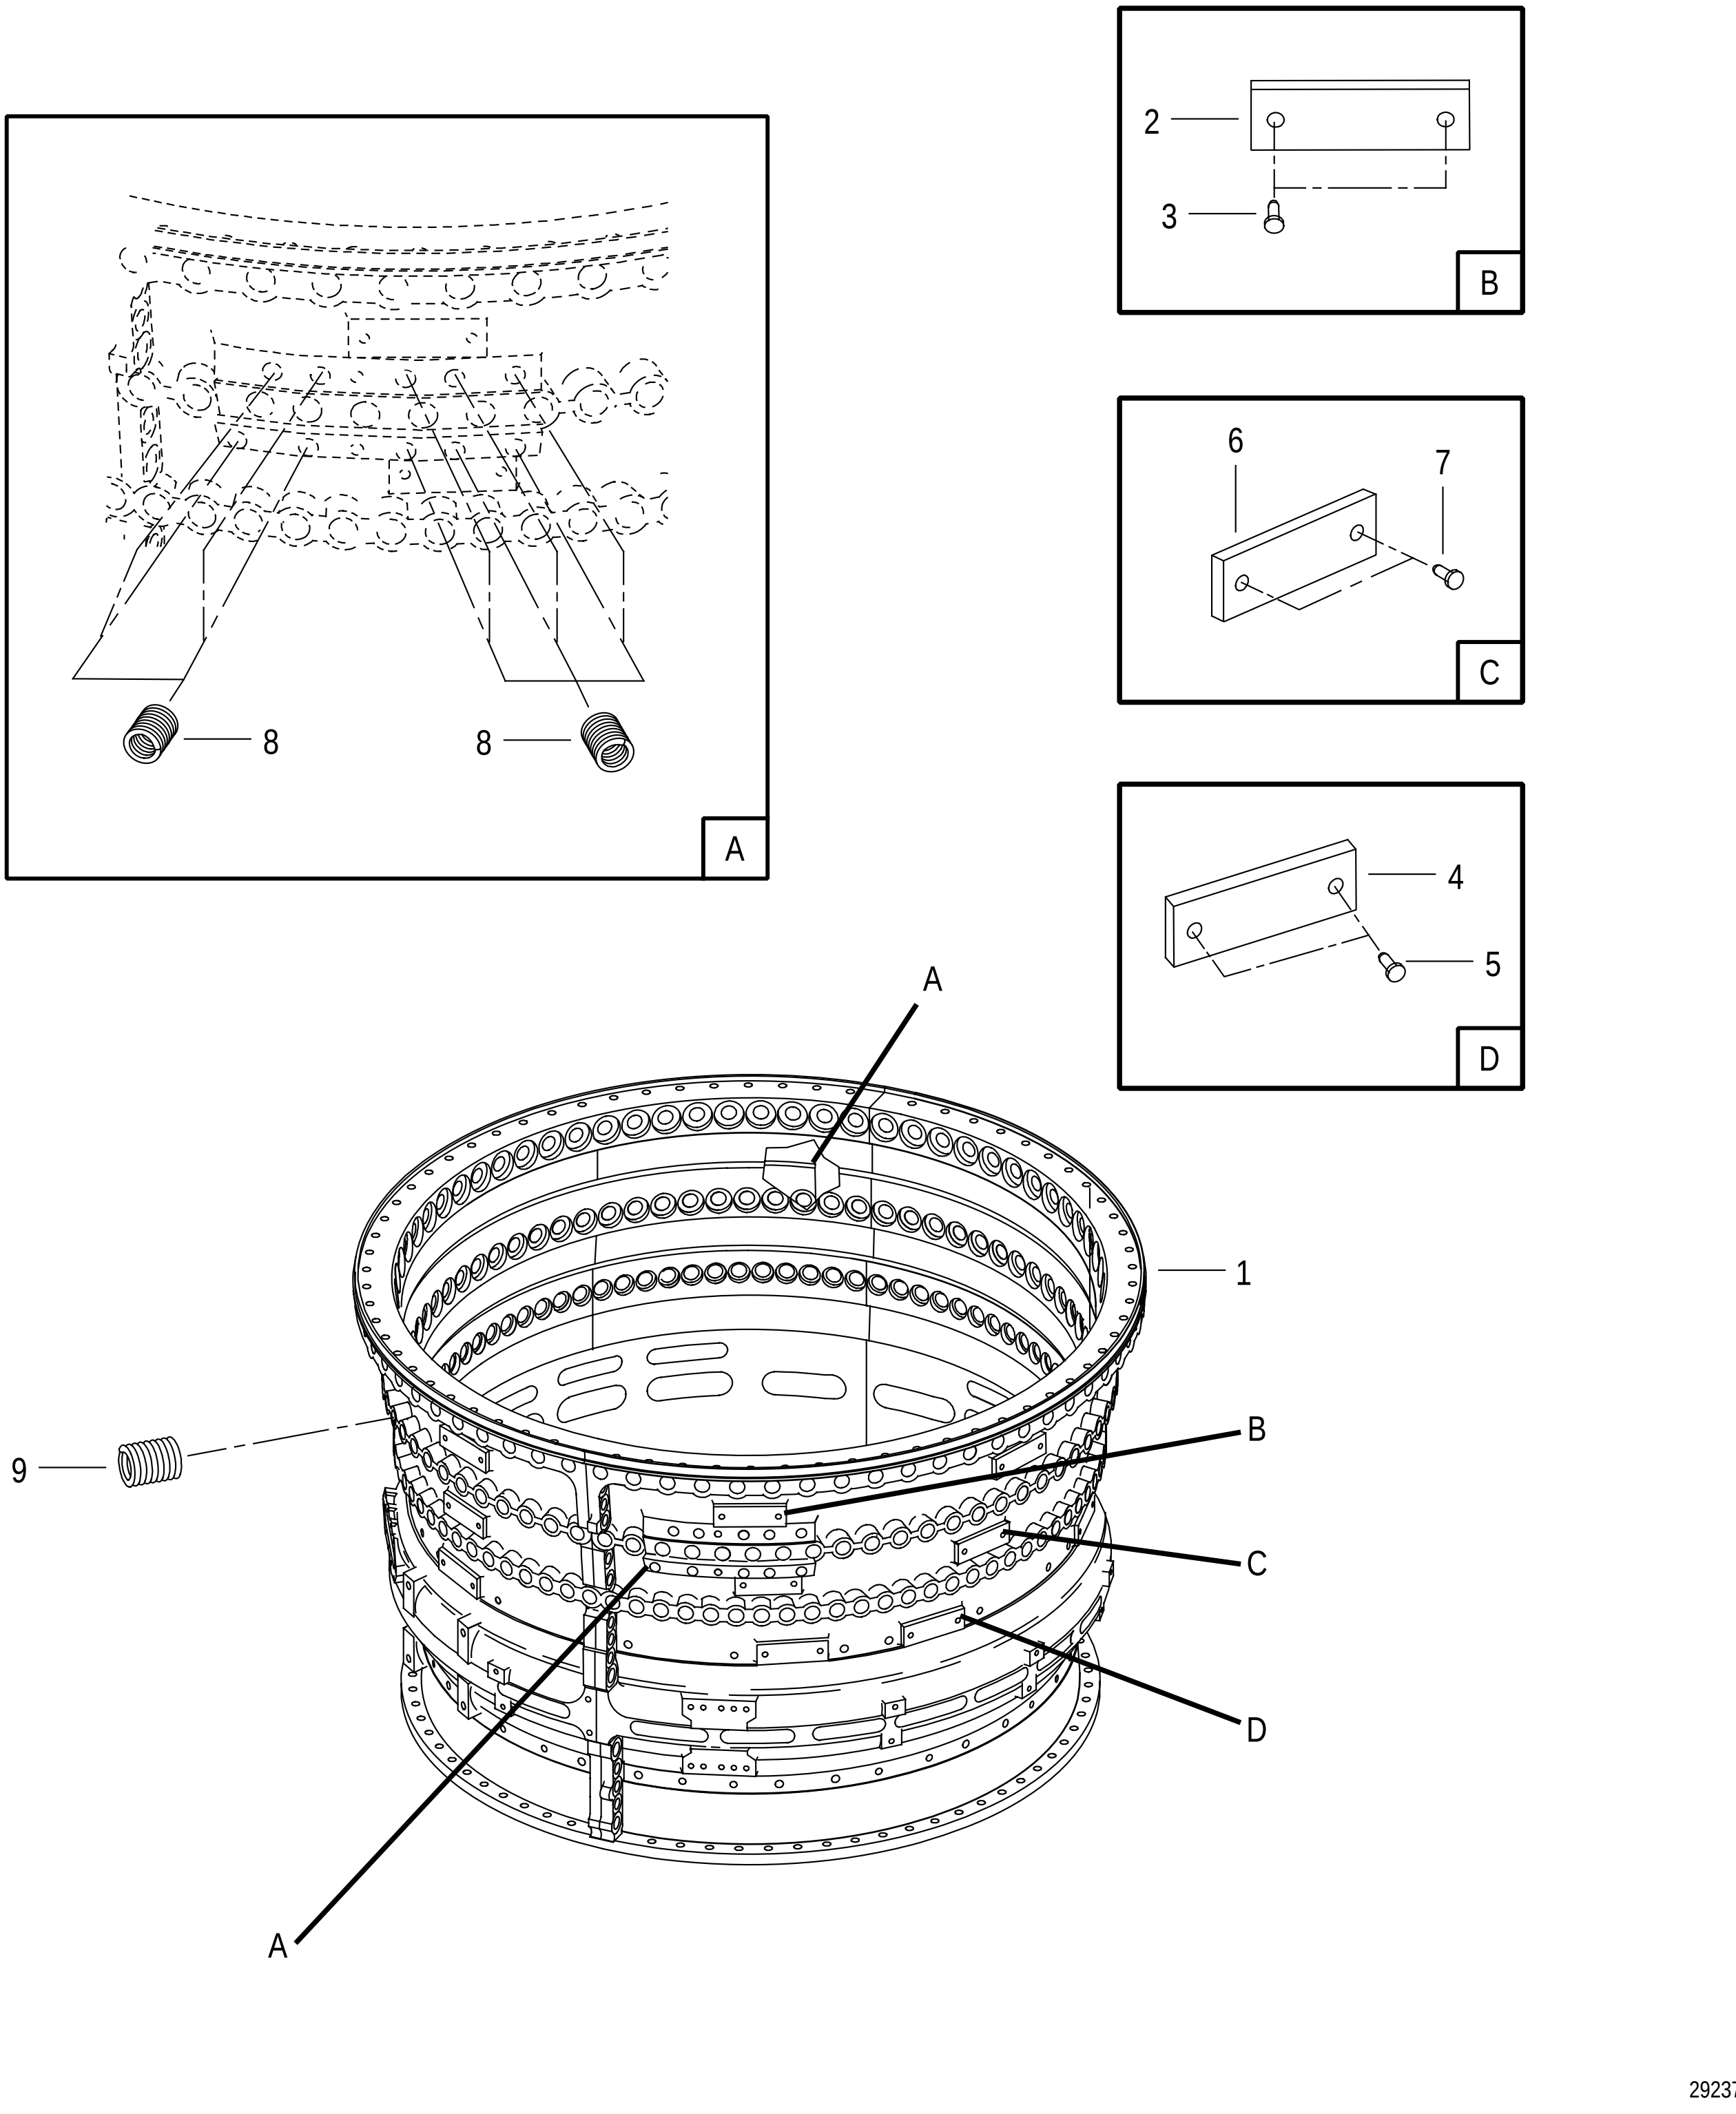


FIGURE 97. 4TH-9TH STAGE COMPRESSOR CASE SET

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
97 - 1	4075413-01	52661	CASE SET-COMPRESSOR, 4TH-9TH STAGE .... SEE FIG. 95-123 OR 96-109 FOR NHA	1		PAFDD
	4080545-01	52661	CASE SET-COMPRESSOR, 4TH-9TH STAGE .... SEE FIG. 96-109 FOR NHA PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 2	4077054	52661	. BUMPER-REAR COMPRESSOR CASE	8		PAFZZ
- 3	% AN123683	88044	. RIVET (AP)......................................	2		PADZZ
	AN123637	88044	. RIVET (AP)......................................	AR		PADZZ
	AN123638	88044	. RIVET (AP)......................................	AR		PADZZ
	AN123685	88044	. RIVET (AP)......................................	AR		PADZZ
- 4	4077055	52661	. BUMPER-REAR COMPRESSOR CASE	8		PAFZZ
- 5	% AN123641	88044	. RIVET (AP)......................................	2		PADZZ
	AN123698	88044	. RIVET (AP)......................................	AR		PADZZ
	AN123699	88044	. RIVET (AP)......................................	AR		PADZZ
	AN123700	88044	. RIVET (AP)......................................	AR		PADZZ
- 6	4077056	52661	. BUMPER-REAR COMPRESSOR CASE .... USE ONLY ON 4075413-01	8		PAFZZ
- 7	2099409	52661	. RIVET-SOLID, COUNTERSUNK .... 0.125 DIA. X 0.250 IN. LONG (AP) USE ONLY ON 4075413-01	2		PAFZZ
- 8	TR26036N-1032SBVX	29372	. INSERT-SCREW THREAD, SELF-LOCKING .... P&WA PART NO. ST2609-01 WHEN EXH USE ST2786-01	20		PAFZZ
	ST2786-01	52661	. INSERT OPTION .... SEE OPTION TABLE	20		PAFZZ
- 9	TR26036N-428SBVX	29372	. INSERT-SCREW THREAD, SELF-LOCKING .... P&WA PART NO. ST2609-02 WHEN EXH USE ST2786-02	1		PAFZZ
	ST2786-02	52661	. INSERT OPTION .... SEE OPTION TABLE	1		PAFZZ

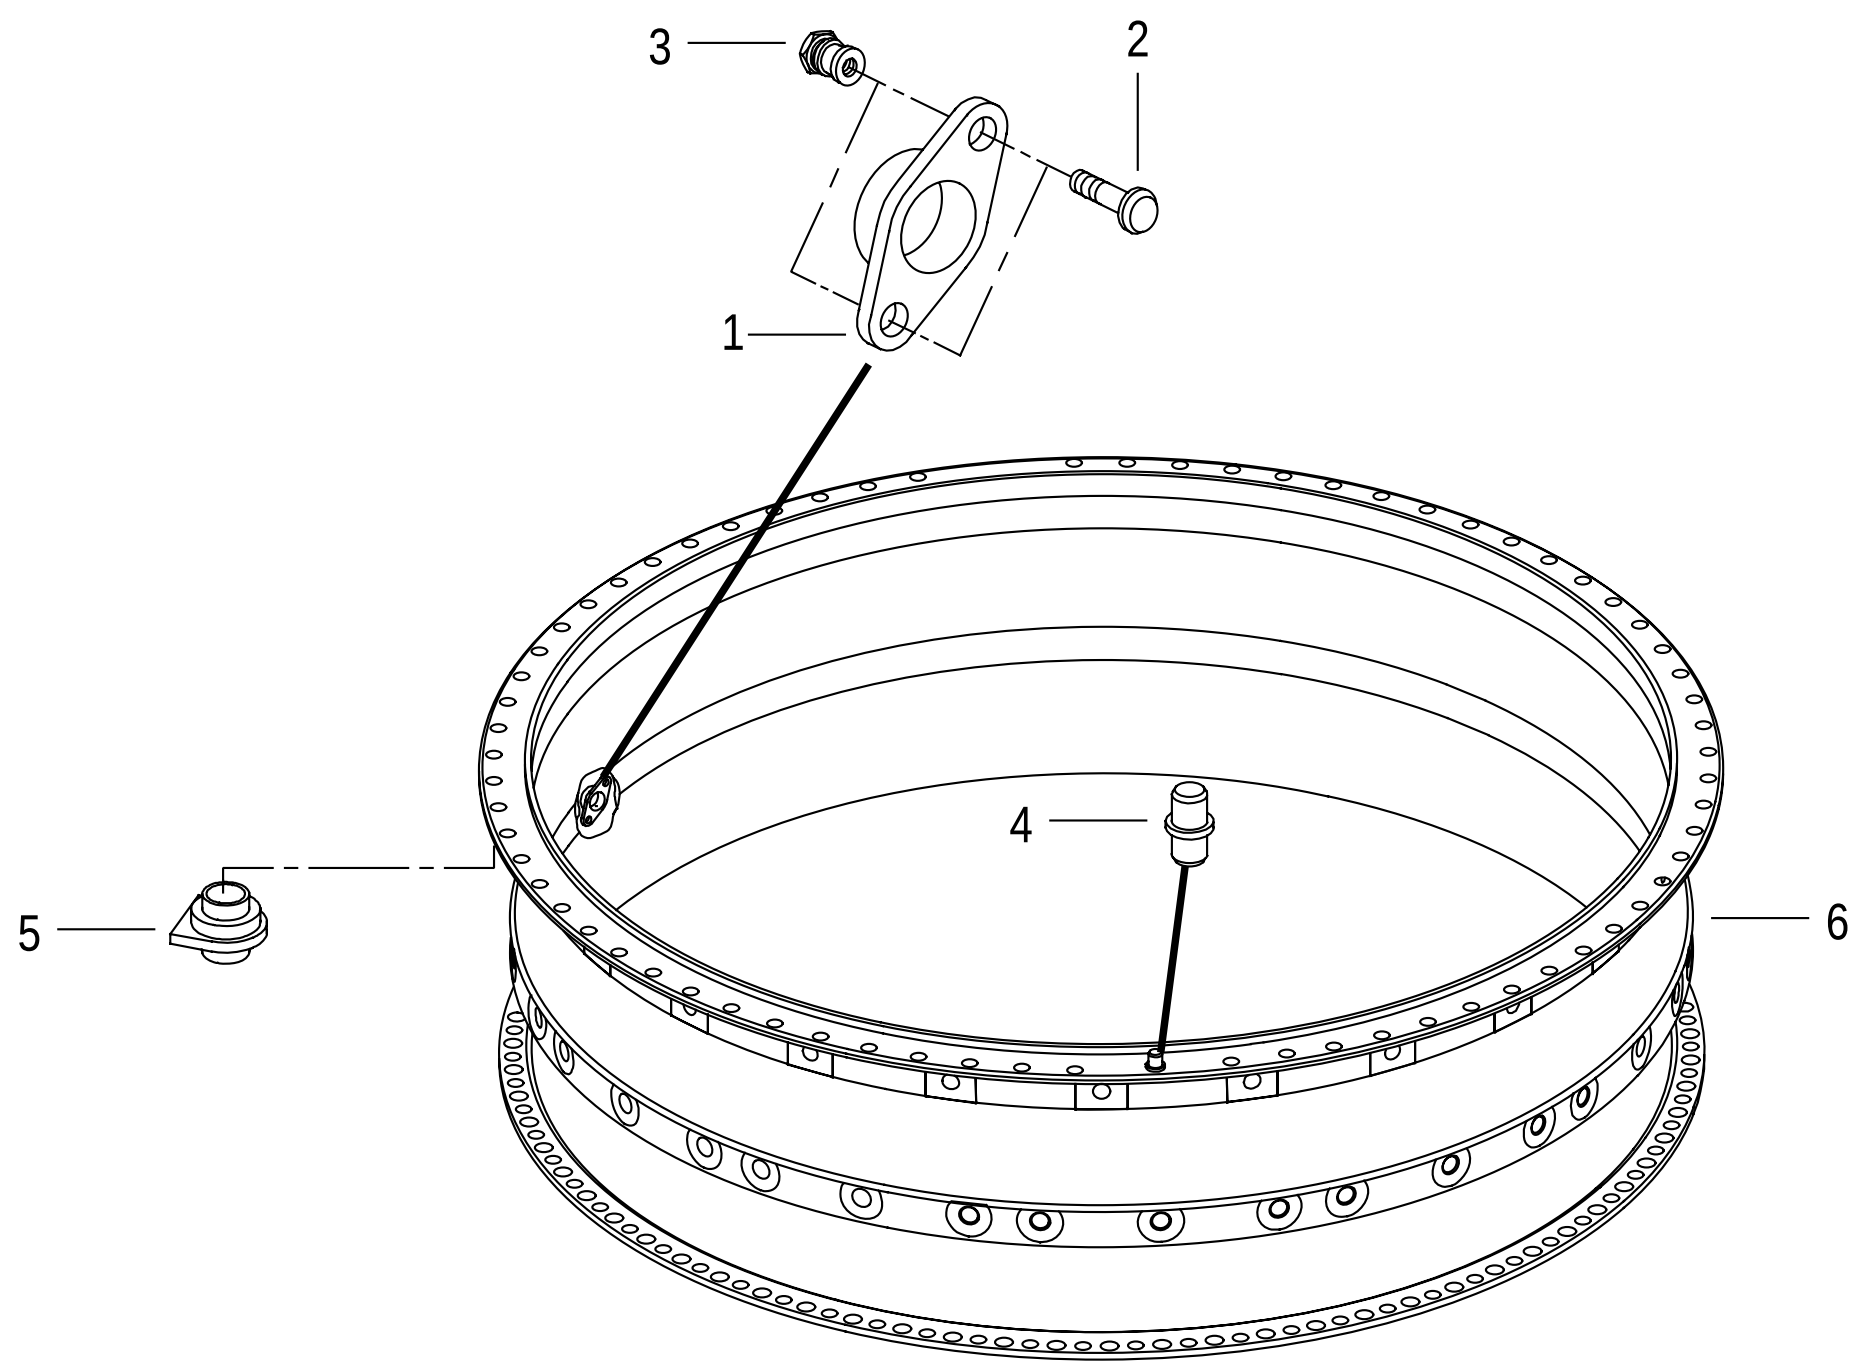


FIGURE 98. 10TH-12TH STAGE COMPRESSOR CASE ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
98	4077074	52661	CASE-COMPRESSOR, 10TH-12TH STAGE, ASSY OF SEE FIG. 88-53 FOR NHA	1	AU	PADDD
	4078507	52661	CASE-COMPRESSOR, 10TH-12TH STAGE, ASSY OF SEE FIG. 88-53 FOR NHA REPLACES 4078257	1	AV	PADDD
- 1	4077303	52661	. BOSS-BORESCOPE, COMPRESSOR CASE	1		PADZZ
- 2	HL244-6-8	56878 73197 92215	. PIN-RIVET-THREADED, FLAT...................... 0.190-32 (AP) P&WA PART NO. ST2484-08	2		PAFZZ
- 3	HL688DU-6	56878 73197 92215	. COLLAR-PIN-RIVET, THREADED, SELF-LOCKING .. (AP) P&WA PART NO. ST2485-09	2		PAFZZ
- 4	4077008	52661	. PIN-SHOULDER HEADLESS....................... 0.18705 AND 0.245 X 0.205	1		PADZZ
- 5	4075466	52661	. NUT OPTION..................................... SEE OPTION TABLE USE ONLY ON 4077074	68	AU	PADZZ
	494677	52661	. NUT OPTION..................................... SEE OPTION TABLE USE ONLY ON 4078507	68	AV	PADZZ
- 6	4076723	52661	. CASE-COMPRESSOR, 10TH-12TH STAGE..........	1		XA

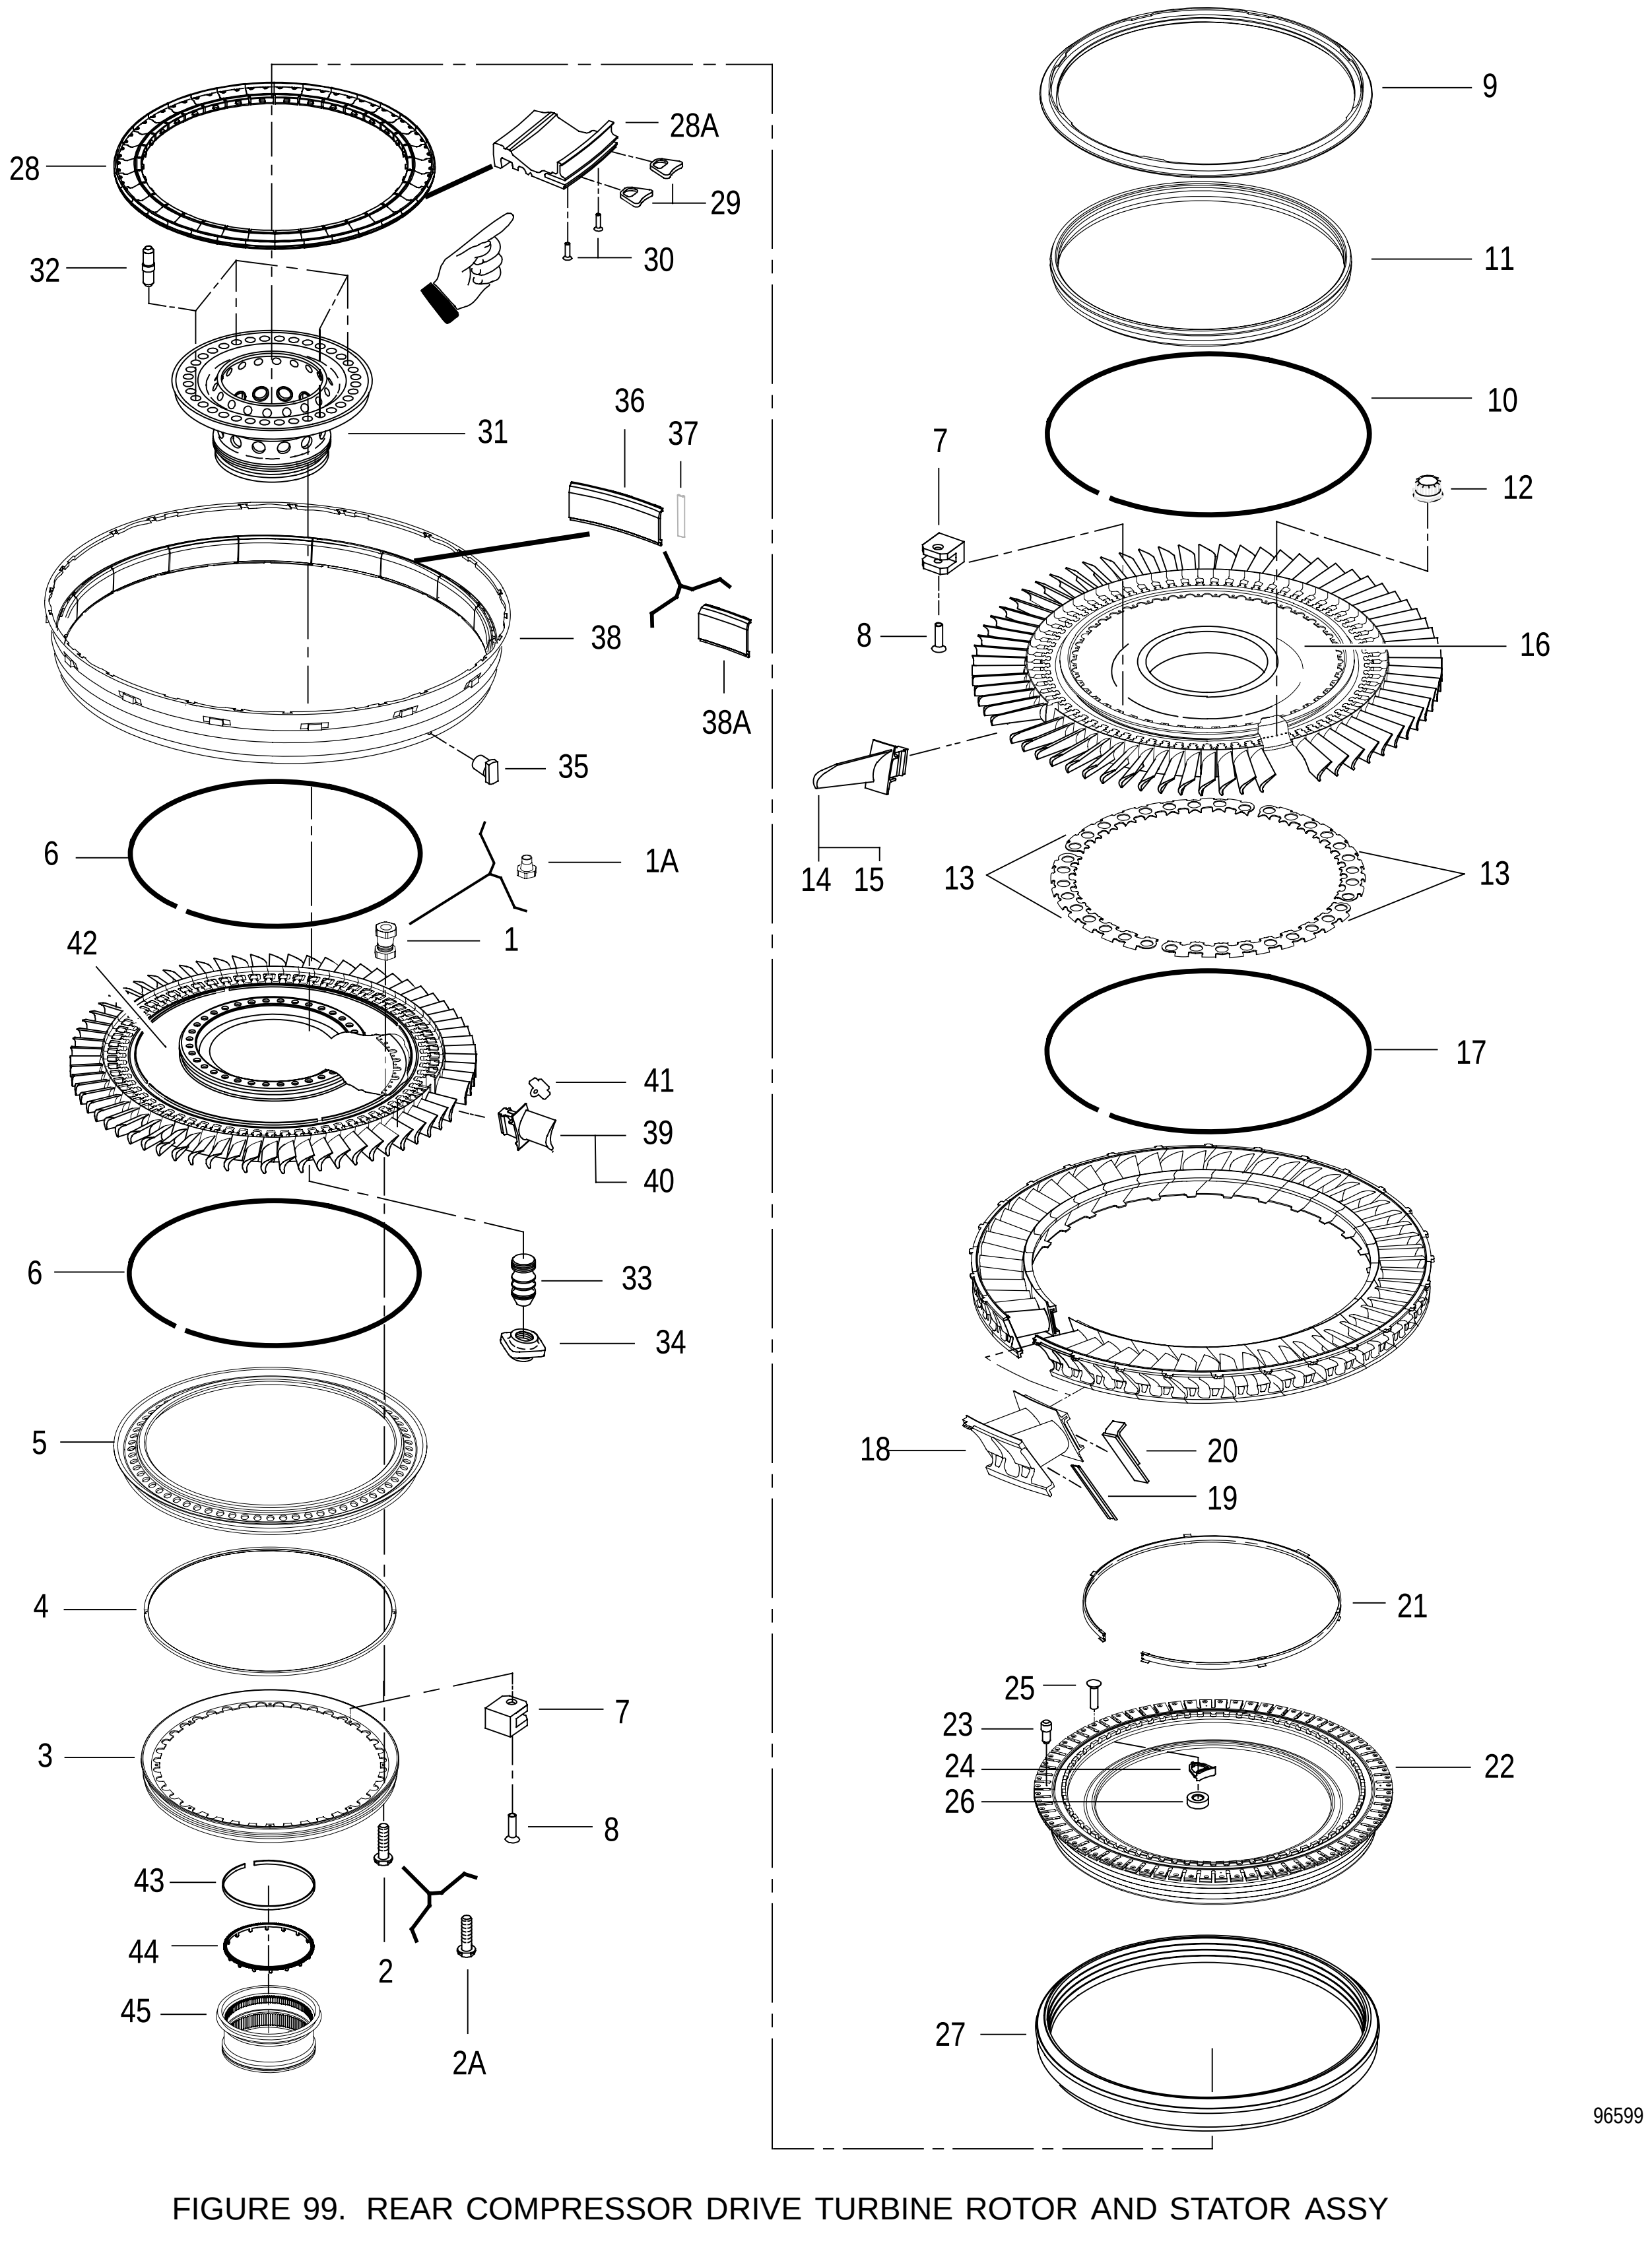


FIGURE 99. REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR ASSY

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
99		4068717-700	52661	ROTOR AND STATOR ASSY-TURBINE, REAR .... COMPRESSOR DRIVE SEE FIG. 86-1 FOR NHA	1	N	PAFDD
		4068717-701	52661	ROTOR AND STATOR ASSY-TURBINE, REAR .... COMPRESSOR DRIVE SEE FIG. 86-1 FOR NHA	1	P	PAFDD
		4068717-702	52661	ROTOR AND STATOR ASSY-TURBINE, REAR .... COMPRESSOR DRIVE USE ONLY ON 4068722-811 SEE FIG. 86-1 FOR NHA	1		PAFDD
		4068717-703	52661	ROTOR AND STATOR ASSY-TURBINE, REAR .... COMPRESSOR DRIVE USE ONLY ON 4068722-812	1		PAFDD
		4084517-700	52661	ROTOR AND STATOR ASSY-TURBINE, REAR .... COMPRESSOR DRIVE USE ONLY ON 4084522-800, -801, -802, AND 4082657-808 SEE FIG. 86-1 FOR NHA	1		PAFDD
		4083015-700	52661	ROTOR AND STATOR ASSY-TURBINE, REAR .... COMPRESSOR DRIVE USE ONLY ON 4082654-802 SEE FIG. 86-1 FOR NHA	1		PAFDD
		4083015-701	52661	ROTOR AND STATOR ASSY-TURBINE, REAR .... COMPRESSOR DRIVE USE ONLY ON 4082654-803 SEE FIG. 86-1 FOR NHA	1		PAFDD
- 1		HL599KF-5	56878 73197	. COLLAR-PIN-RIVET, THREADED, SELF-LOCKING .. 0.164-32UNJC-3B X 0.490 IN. LONG P&WA PART NO. 4061774 SUPERSEDED BY H54475-08 AND 76467-832	8		PAFZZ
- 1A	=	H54475-08	15653	. NUT-SELF-LOCKING, HEX .... P&WA PART NO. 4082753-01 SUPERSEDES HL599KF-5	8		PAFZZ
	=	76467-832	56878	. NUT-SELF-LOCKING, HEX .... P&WA PART NO. 4082753-01 SUPERSEDES HL599KF-5	8		PAFZZ
		4083241	52661	. NUT-SELF-LOCKING, HEX .... 0.190-32 X 0.280 IN. USE ONLY ON 4084517-700 AND 4083015-701	8		PAFZZ
- 2		4069895	52661	. PIN-THREADED, FLAT .... 0.164-32UNJC-3A X 0.188 IN. GRIP WHEN EXH USE HL722-5-3	8		PAFZZ
		HL722-5-3	06725 56878 73197 92215	. PIN-RIVET-THREADED, SLAB .... 0.164-32UNJC-3A X 0.188 IN. GRIP P&WA PART NO. 4077452	8		PAFZZ
- 2A		4084102	52661	. BOLT-MACHINE, HEX .... 0.190-32 X 0.505 IN. USE ONLY ON 4084517-700 AND 4083015-701	8		PAFZZ
- 3	=	4069949	52661	. SEAL-AIR, TURBINE, 1ST STAGE	1		PADLD
	=	4080429	52661	. SEAL-AIR, TURBINE, 1ST STAGE	1		PADLD
		4083562	52661	. SEAL-AIR, TURBINE, 1ST STAGE .... USE ONLY ON 4084517-700	1		PADLD
		4083238	52661	. SEAL-AIR, TURBINE, 1ST STAGE .... USE ONLY ON 4068717-703, 4084517-700, AND 4083015-701	1		PADLD
- 4		4061748	52661	. SPACER-TURBINE AIR SEAL	1		PADBZ
R - 5		4069990	52661	. PLATE-RETAINING, BLADE, TURBINE, FRONT, ... 1ST STAGE	1		PAFDD
- 6		4064308	52661	. SEAL-TURBINE ROTOR, 1ST STAGE	2		PAFZZ
- 7	%	4070419	52661	. COUNTERWEIGHT .... USE 0-8 AS REQUIRED	AR		XC
		4070419CL1	52661	. COUNTERWEIGHT .... 0.153 - 0.155 OZ	AR		PADZZ
		4070419CL2	52661	. COUNTERWEIGHT .... 0.162 - 0.164 OZ	AR		PADZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	99 - 7	4070419CL3	52661	. COUNTERWEIGHT 0.182 - 0.184 OZ	AR		PADZZ
		4070419CL4	52661	. COUNTERWEIGHT 0.205 - 0.207 OZ	AR		PADZZ
	- 8	4028248	52661	. RIVET-TUBULAR, CSK 0.094 DIA X 0.320 IN. LONG (AP)	1		PADZZ
	- 9	4061632	52661	. PLATE-RETAINING, BLADE, TURBINE, REAR, 2ND STAGE	1		PAFZZ
	- 10	4064311	52661	. SEAL-TURBINE ROTOR, 2ND STAGE	1		PAFZZ
	- 11	4060966	52661	. RING-BLADE RETAINING PLATE	1		PADZZ
	- 12	4069047	52661	. NUT-TIE ROD 0.375-24UNJF-3B X 0.320 IN. THK	32		PAFZZ
	- 13	4069336	52661	. WASHER-KEY, TURBINE TIE ROD NUT	4		PAFZZ
	- 14	4070292	52661	. BLADE-TURBINE ROTOR, 2ND STAGE, ASSY OF FOR SPARES REPLACEMENT USE 4076972 SUPERSEDED BY 4080342	72		PADLD
		4080342	52661	. BLADE-TURBINE ROTOR, 2ND STAGE, ASSY OF SUPERSEDES 4070292 SUPERSEDED BY 4086342 FOR SPARES REPLACEMENT USE 4080392	72		PADLD
		4086342	52661	. BLADE-TURBINE ROTOR, 2ND STAGE, ASSY OF SUPERSEDES 4080342 FOR SPARES REPLACEMENT USE 4086392	72		PADLD
		4076972	52661	. BLADE SET-TURBINE ROTOR, 2ND STAGE SPARES REPLACEMENT FOR 4070292	36		PAFDD
		4080392	52661	. BLADE SET-TURBINE ROTOR, 2ND STAGE SPARES REPLACEMENT FOR 4080342	36		PAFDD
		4086392	52661	. BLADE SET-TURBINE ROTOR, 2ND STAGE SPARES REPLACEMENT FOR 4086342	36		PAFDD
	- 15	4070292	52661	.. BLADE-TURBINE ROTOR, 2ND STAGE, ASSY OF USE ONLY ON 4076972	2		PADLD
		4080342	52661	.. BLADE-TURBINE ROTOR, 2ND STAGE, ASSY OF USE ONLY ON 4080392	2		PADLD
		4086342	52661	.. BLADE-TURBINE ROTOR, 2ND STAGE, ASSY OF USE ONLY ON 4086392	2		PADLD
	- 16	4077902	52661	. DISK-TURBINE, 2ND STAGE REPLACES 4069902	1		PADLD
	- 17	4064312	52661	. SEAL-TURBINE ROTOR, 2ND STAGE	1		PAFZZ
	- 18	= 4072682	52661	. VANE-TURBINE STATOR, 2ND STAGE REPLACED BY 4079932	29		PAFDD
		= 4079192	52661	. VANE-TURBINE STATOR, 2ND STAGE REPLACED BY 4079932 OR 4079942	29		PAFDD
		4079932	52661	. VANE-TURBINE STATOR, 2ND STAGE REPLACES 4072682 REPLACES 4079192 SUPERSEDED BY 4080352	29		PAFDD
		4079942	52661	. VANE-TURBINE STATOR, 2ND STAGE REPLACES 4079192 SUPERSEDED BY 4080352	29		PAFDD
		4080352	52661	. VANE-TURBINE STATOR, 2ND STAGE SUPERSEDES 4079932 SUPERSEDES 4079942	29		PAFDD
		4083582	52661	. VANE-TURBINE STATOR, 2ND STAGE, ASSY OF USE ONLY ON 4084517-700 AND 4083015-701	29		PAFDD
	- 19	4060186	52661	. SEAL-TURBINE STATOR, 2ND STAGE	29		PAFZZ
		4084046	52661	. SEAL-TURBINE STATOR, 2ND STAGE, ASSY OF USE ONLY ON 4084517-700 AND 4083015-701	29		PAFZZ
	- 20	4076116	52661	. SEAL-TURBINE STATOR, 2ND STAGE, ASSY OF	29		PAFZZ
		4081119	52661	. SEAL-TURBINE STATOR, 2ND STAGE, ASSY OF USE ONLY ON 4084517-700 AND 4083015-701	29		PAFZZ
R	- 21	4082885	52661	. DAMPER-TURBINE BLADE RETAINING PLATE	1		PADZZ
	- 22	4070147	52661	. PLATE-RETAINING, BLADE, TURBINE, 2ND STAGE, ASSY OF	1	KQ	PADLD

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
99 - 22		4079623	52661	. PLATE-RETAINING, BLADE, TURBINE, 2ND . . . . STAGE, ASSY OF USE ONLY ON 4068717-701 PARTIAL BREAKDOWN FOLLOWS	1	KR	PADLD
- 23		4060785	52661	.. PIN-SHOULDER, HEADLESS . . . . 0.061 AND 0.0785 OD X 0.180 IN. LONG	2		PADZZ
- 24		4057120	52661	.. DAMPER-TURBINE ROTOR, 2ND STAGE . . . . USE ONLY ON 4070147	72		PAFZZ
		4079618	52661	.. DAMPER-TURBINE ROTOR, 2ND STAGE . . . . USE ONLY ON 4079623	72		PAFZZ
- 25		637287	52661	.. RIVET-SOLID, COUNTERSUNK . . . . 0.125 DIA X 0.281 IN. LONG (AP)	1		PAFZZ
- 26		2116034	52661	.. BUSHING-SLEEVE . . . . 0.129 ID X 0.204 OD X 0.0875 IN. THK	72		PAFZZ
- 27	=	4079961-01	52661	. RING-AIR SEALING, TURBINE, 2ND STAGE, ASSY . . OF	1		PAFBZ
	=	4080394-01	52661	. RING-AIR SEALING, TURBINE, 2ND STAGE, ASSY . . OF	1		PAFBZ
		4082791-01	52661	. RING-AIR SEALING, TURBINE, 2ND STAGE, ASSY . . OF USE ONLY ON 4084517-700 AND 4083015-701	1		PAFBZ
- 28		4077403	52661	. PLATE-RETAINING, BLADE, TURBINE, REAR, 1ST . . STAGE, ASSY OF USE ONLY ON 4068717-700	34		PAFFF
		4079003	52661	. PLATE-ASSY OF, RETAINING, BLADE, TURBINE, . . . REAR, 1ST STAGE USE ONLY ON 4068717-701	34	KQ	PAFFF
	=	4079621	52661	. PLATE-RETAINING, BLADE, TURBINE, REAR, 1ST . . STAGE, ASSY OF USE ONLY ON 4068717-701	34	KR	PAFFF
	=	4080632	52661	. PLATE-RETAINING, BLADE, TURBINE, REAR, 1ST . . STAGE, ASSY OF USE ONLY ON 4068717-701 REOP AND REID OF 4077403 DO NOT PROCURE FROM P&WA	34	KR	PAFFF
- 28A		4079002	52661	.. PLATE-RETAINING, BLADE, TURBINE, REAR, 1 . . . . STAGE	1		PADDD
- 29		4055953	52661	.. DAMPER-TURBINE ROTOR, 1ST STAGE . . . . USE ONLY ON 4077403 AND 4079003	2		PADZZ
		4079617	52661	.. DAMPER-TURBINE ROTOR, 1ST STAGE . . . . USE ONLY ON 4079621 AND 4080632	2		PADZZ
- 30		AS3230-005	81343	.. RIVET (AP)	1		PADZZ
- 31		4069333	52661	. HUB ASSY-TURBINE, REAR COMPRESSOR DRIVE . PARTIAL BREAKDOWN FOLLOWS	1		PADDD
- 32	%	4075335	52661	.. PIN-SHOULDERED, HEADLESS . . . . 0.41715 AND 0.53215 OD X 1.145 IN. LONG	4		PAFZZ
		4075335P2	52661	.. PIN . . . . 0.41715 AND 0.53415 OD OVERSIZE	AR		PAFZZ
		4075335P4	52661	.. PIN . . . . 0.41715 AND 0.53615 OD OVERSIZE	AR		PAFZZ
		4075335P6	52661	.. PIN . . . . 0.41715 AND 0.53815 OD OVERSIZE	AR		PAFZZ
		4075335P8	52661	.. PIN . . . . 0.41715 AND 0.54015 OD OVERSIZE	AR		PAFZZ
		4075335P10	52661	.. PIN . . . . 0.41715 AND 0.54215 OD OVERSIZE	AR		PAFZZ
- 33		4071799	52661	. TIE ROD . . . . 0.375-24UNJF-3A - 32UNJF-3A X 1.590 IN. LONG	32		PAFZZ
- 34		4071798	52661	. NUT-TIE ROD . . . . 0.375-32UNJEF-3B X 0.465 IN. THK	32		PAFZZ
	=	4079937	52661	. DUCT AND SUPPORT SET-TURBINE, 1ST STAGE . . WHEN EXH USE 4079332	1	NZ/RQ	PAFLD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	99 - 34	= 4079968	52661	. DUCT AND SUPPORT SET-TURBINE, 1ST STAGE . . REOP AND REID OF 4076505 DO NOT PROCURE FROM P&W WHEN EXH USE 4079332	1	PB/RS	PAFLD
		4079332	52661	. DUCT AND SUPPORT SET-TURBINE, 1ST STAGE . .	1	PD/RU	PAFLD
		4080635	52661	. DUCT AND SUPPORT SET-TURBINE, 1ST STAGE . .	1	PA/PC/PE/ RW/SG	PAFLD
		4082486	52661	. DUCT AND SUPPORT SET-TURBINE, 1ST STAGE . .	1	RR/RT/RV/ RX/SG	PAFLD
		4082862	52661	. DUCT AND SUPPORT SET-TURBINE, 1ST STAGE . . USE ONLY ON 4068717-702 AND 4083015-700	1	SH	PAFLD
		4083681-01	52661	. SUPPORT-TURBINE DUCT AND VANE, ASSY OF . . . USE ONLY ON 4084517-700 AND 4083015-701	1		PAFLD
R	- 35	4072926	52661	.. PIN-STRAIGHT, HEADED, SLAB . . . . 0.12465 OD X 0.150 IN. LONG USE ONLY ON 4079937, 4079968, AND 4079332	18		PAFZZ
R		4080705	52661	.. PIN-STRAIGHT, HEADED, SLAB . . . . 0.12465 OD X 0.290 IN. LONG USE ONLY ON 4080635 AND 4082486	18		PAFZZ
R		4080705	52661	.. PIN-STRAIGHT, HEADED, SLAB . . . . 0.12465 OD X 0.290 IN. LONG USE ONLY ON 4083681-01	36		PAFZZ
	- 36	4076206	52661	.. DUCT SEGMENT-TURBINE, 1ST STAGE . . . . USE ONLY ON 4079937 AND 4079968	18		PADBZ
		4077954	52661	.. DUCT SEGMENT-TURBINE, 1ST STAGE . . . . USE ONLY ON 4079332	18		PADBZ
		4080636	52661	.. DUCT SEGMENT-TURBINE, 1ST STAGE . . . . USE ONLY ON 4080635	18		PADBZ
		4082503	52661	.. DUCT SEGMENT-TURBINE, 1ST STAGE . . . . USE ONLY ON 4082486	18		PADBZ
		4082861	52661	.. DUCT SEGMENT-TURBINE, 1ST STAGE . . . . USE ONLY ON 4082862	18		PADBZ
	- 37	4060689	52661	.. SEAL-TURBINE STATOR, 1ST STAGE . . . . USE ONLY ON 4079937, 4079968, 4079332, 4080635, 4082486, AND 4082862	18		PAFZZ
	- 38	4079857	52661	.. SUPPORT-TURBINE DUCT AND VANE . . . . USE ONLY ON 4079937	1		PADZZ
		4079969	52661	.. SUPPORT-TURBINE DUCT AND VANE . . . . USE ONLY ON 4079968 REOP AND REID OF 4076291 DO NOT PROCURE FROM P&W	1		PADZZ
		4078268	52661	.. SUPPORT-TURBINE DUCT AND VANE . . . . USE ONLY ON 4079332	1		PADZZ
		4080637	52661	.. SUPPORT-TURBINE DUCT AND VANE . . . . USE ONLY ON 4080635	1		PADZZ
		4082487	52661	.. SUPPORT-TURBINE DUCT AND VANE . . . . USE ONLY ON 4082486	1		PADZZ
		4082863	52661	.. SUPPORT-TURBINE DUCT AND VANE . . . . USE ONLY ON 4082862	1		PADZZ
		4083681-02	52661	.. SUPPORT-TURBINE DUCT AND VANE . . . . USE ONLY ON 4083681-01	1		PADZZ
	- 38A	4083683-01	52661	. DUCT SEGMENT-TURBINE, 1ST STAGE, ASSY OF . USE ONLY ON 4084517-700 AND 4083015-701	36		PADBZ
	- 39	= 4070801	52661	. BLADE-TURBINE ROTOR, 1ST STAGE . . . . FOR SPARES REPLACEMENT USE 4074041	68		PADDD
		= 4080201	52661	. BLADE-TURBINE ROTOR, 1ST STAGE . . . . FOR SPARES REPLACEMENT USE 4080171	68		PADZZ
		= 4084901	52661	. BLADE-TURBINE ROTOR, 1ST STAGE . . . . FOR SPARES REPLACEMENT USE 4082971	68		PADDD
		= 4074041	52661	. BLADE SET-TURBINE ROTOR, 1ST STAGE . . . . SPARES REPLACEMENT FOR 4070801	34		PAFDD
		= 4080171	52661	. BLADE SET-TURBINE ROTOR, 1ST STAGE . . . . SPARES REPLACEMENT FOR 4080201	34		PAFZZ
		= 4082971	52661	. BLADE SET-TURBINE ROTOR, 1ST STAGE . . . . SPARES REPLACEMENT FOR 4084901	34		PAFDD

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	99 - 39	=	4086401	52661	. BLADE SET-TURBINE ROTOR, 1ST STAGE	34		PAFDD
			4084171	52661	. BLADE SET-TURBINE ROTOR, 1ST STAGE .... SUPERSEDED BY 4086361 USE ONLY ON 4084517-700 AND 4083015-701	34		PAFDD
			4086361	52661	. BLADE SET-TURBINE ROTOR, 1ST STAGE .... SUPERSEDES 4084171	34		PAFDD
			4084771	52661	. BLADE SET-TURBINE ROTOR, 1ST STAGE .... USE UNTIL 4084171 BECOMES AVAILABLE	34		PAFZZ
	- 40	=	4070801	52661	.. BLADE-TURBINE ROTOR, 1ST STAGE	2		PADDD
		=	4080201	52661	.. BLADE-TURBINE ROTOR, 1ST STAGE	2		PADZZ
		=	4084901	52661	.. BLADE-TURBINE ROTOR, 1ST STAGE	2		PADDD
			4087101	52661	.. BLADE-TURBINE ROTOR, 1ST STAGE .... USE ONLY ON 4084171	2		PADDD
			4085301	52661	.. BLADE-TURBINE ROTOR, 1ST STAGE .... USE ONLY ON 4084771	2		PADZZ
			4086701	52661	.. BLADE-TURBINE ROTOR, 1ST STAGE .... USE ONLY ON 4086361	2		PADDD
R R			4086301	52661	.. BLADE-TURBINE ROTOR, 1ST STAGE .... USE ONLY ON 4086401	2		PADDD
	- 41		4061180	52661	. SEAL-TURBINE ROTOR BLADE, 1ST STAGE	68		PAFZZ
	- 42		4069901	52661	. DISK-TURBINE, 1ST STAGE	1		PADLD
			4087201	52661	. DISK-TURBINE, 1ST STAGE .... USE ONLY ON 4084517-700	1		PADLD
			4080301	52661	. DISK-TURBINE, 1ST STAGE	1		PADLD
			4085001	52661	. DISK-TURBINE, 1ST STAGE .... USE ONLY ON 4068722-812, 4084517-700, AND 4083015-701	1		PADLD
			4068700	52661	ENGINE ASSY-TURBO FAN	REF	A	ADD
			4068800	52661	ENGINE ASSY-TURBO FAN	REF	B	ADD
		=	4068722-801	52661	. ENGINE CORE MODULE (VARIABLE 6TH STAGE ... VANES)	1	AN/BL	PAFDD
		=	4082657-801	52661	. ENGINE CORE MODULE (VARIABLE 6TH STAGE ... VANES)	1	AN/BL	PAFDD
		=	4068722-806	52661	. ENGINE CORE MODULE (VARIABLE 6TH STAGE ... VANES)	1	AN/BM	PAFDD
		=	4082657-806	52661	. ENGINE CORE MODULE (VARIABLE 6TH STAGE ... VANES)	1	AN/BM	PAFDD
		=	4068722-803	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AP/DA/ AAK	PAFDD
		=	4082657-803	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AP/DA	PAFDD
		=	4068722-807	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AP/DB/XH/ XK/AAH	PAFDD
		=	4082657-807	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AP/DB/ AAM	PAFDD
		=	4068722-810	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AP/DB/XJ/ XK/XR	PAFDD
		=	4082654-800	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AP/DB/SE/ XL/XT	PAFDD
		=	4082654-801	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AP/DB/SF/ XL	PAFDD
		=	4068722-811	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	XS/AAD	PAFDD
		=	4082654-802	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	XU/AAF	PAFDD
			4084522-800	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AAE	PAFDD
			4082654-803	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AAG	PAFDD
			4084522-801	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AAJ	PAFDD
			4084522-802	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AAL	PAFDD
			4082657-808	52661	. ENGINE CORE MODULE (FIXED 6TH STAGE .... VANES)	1	AAN	PAFDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
99 - 43	4026826	52661	.. RING-RETAINING . . . . 5.7945 SHAFT DIA X 0.0625 IN. DIA WIRE	1		PAFZZ
- 44	4026825	52661	.. LOCK-REAR COMPRESSOR DRIVESHAFT NUT . . .	1		PAFZZ
- 45	4069335	52661	.. NUT-REAR COMPRESSOR DRIVESHAFT	1		PAFDD

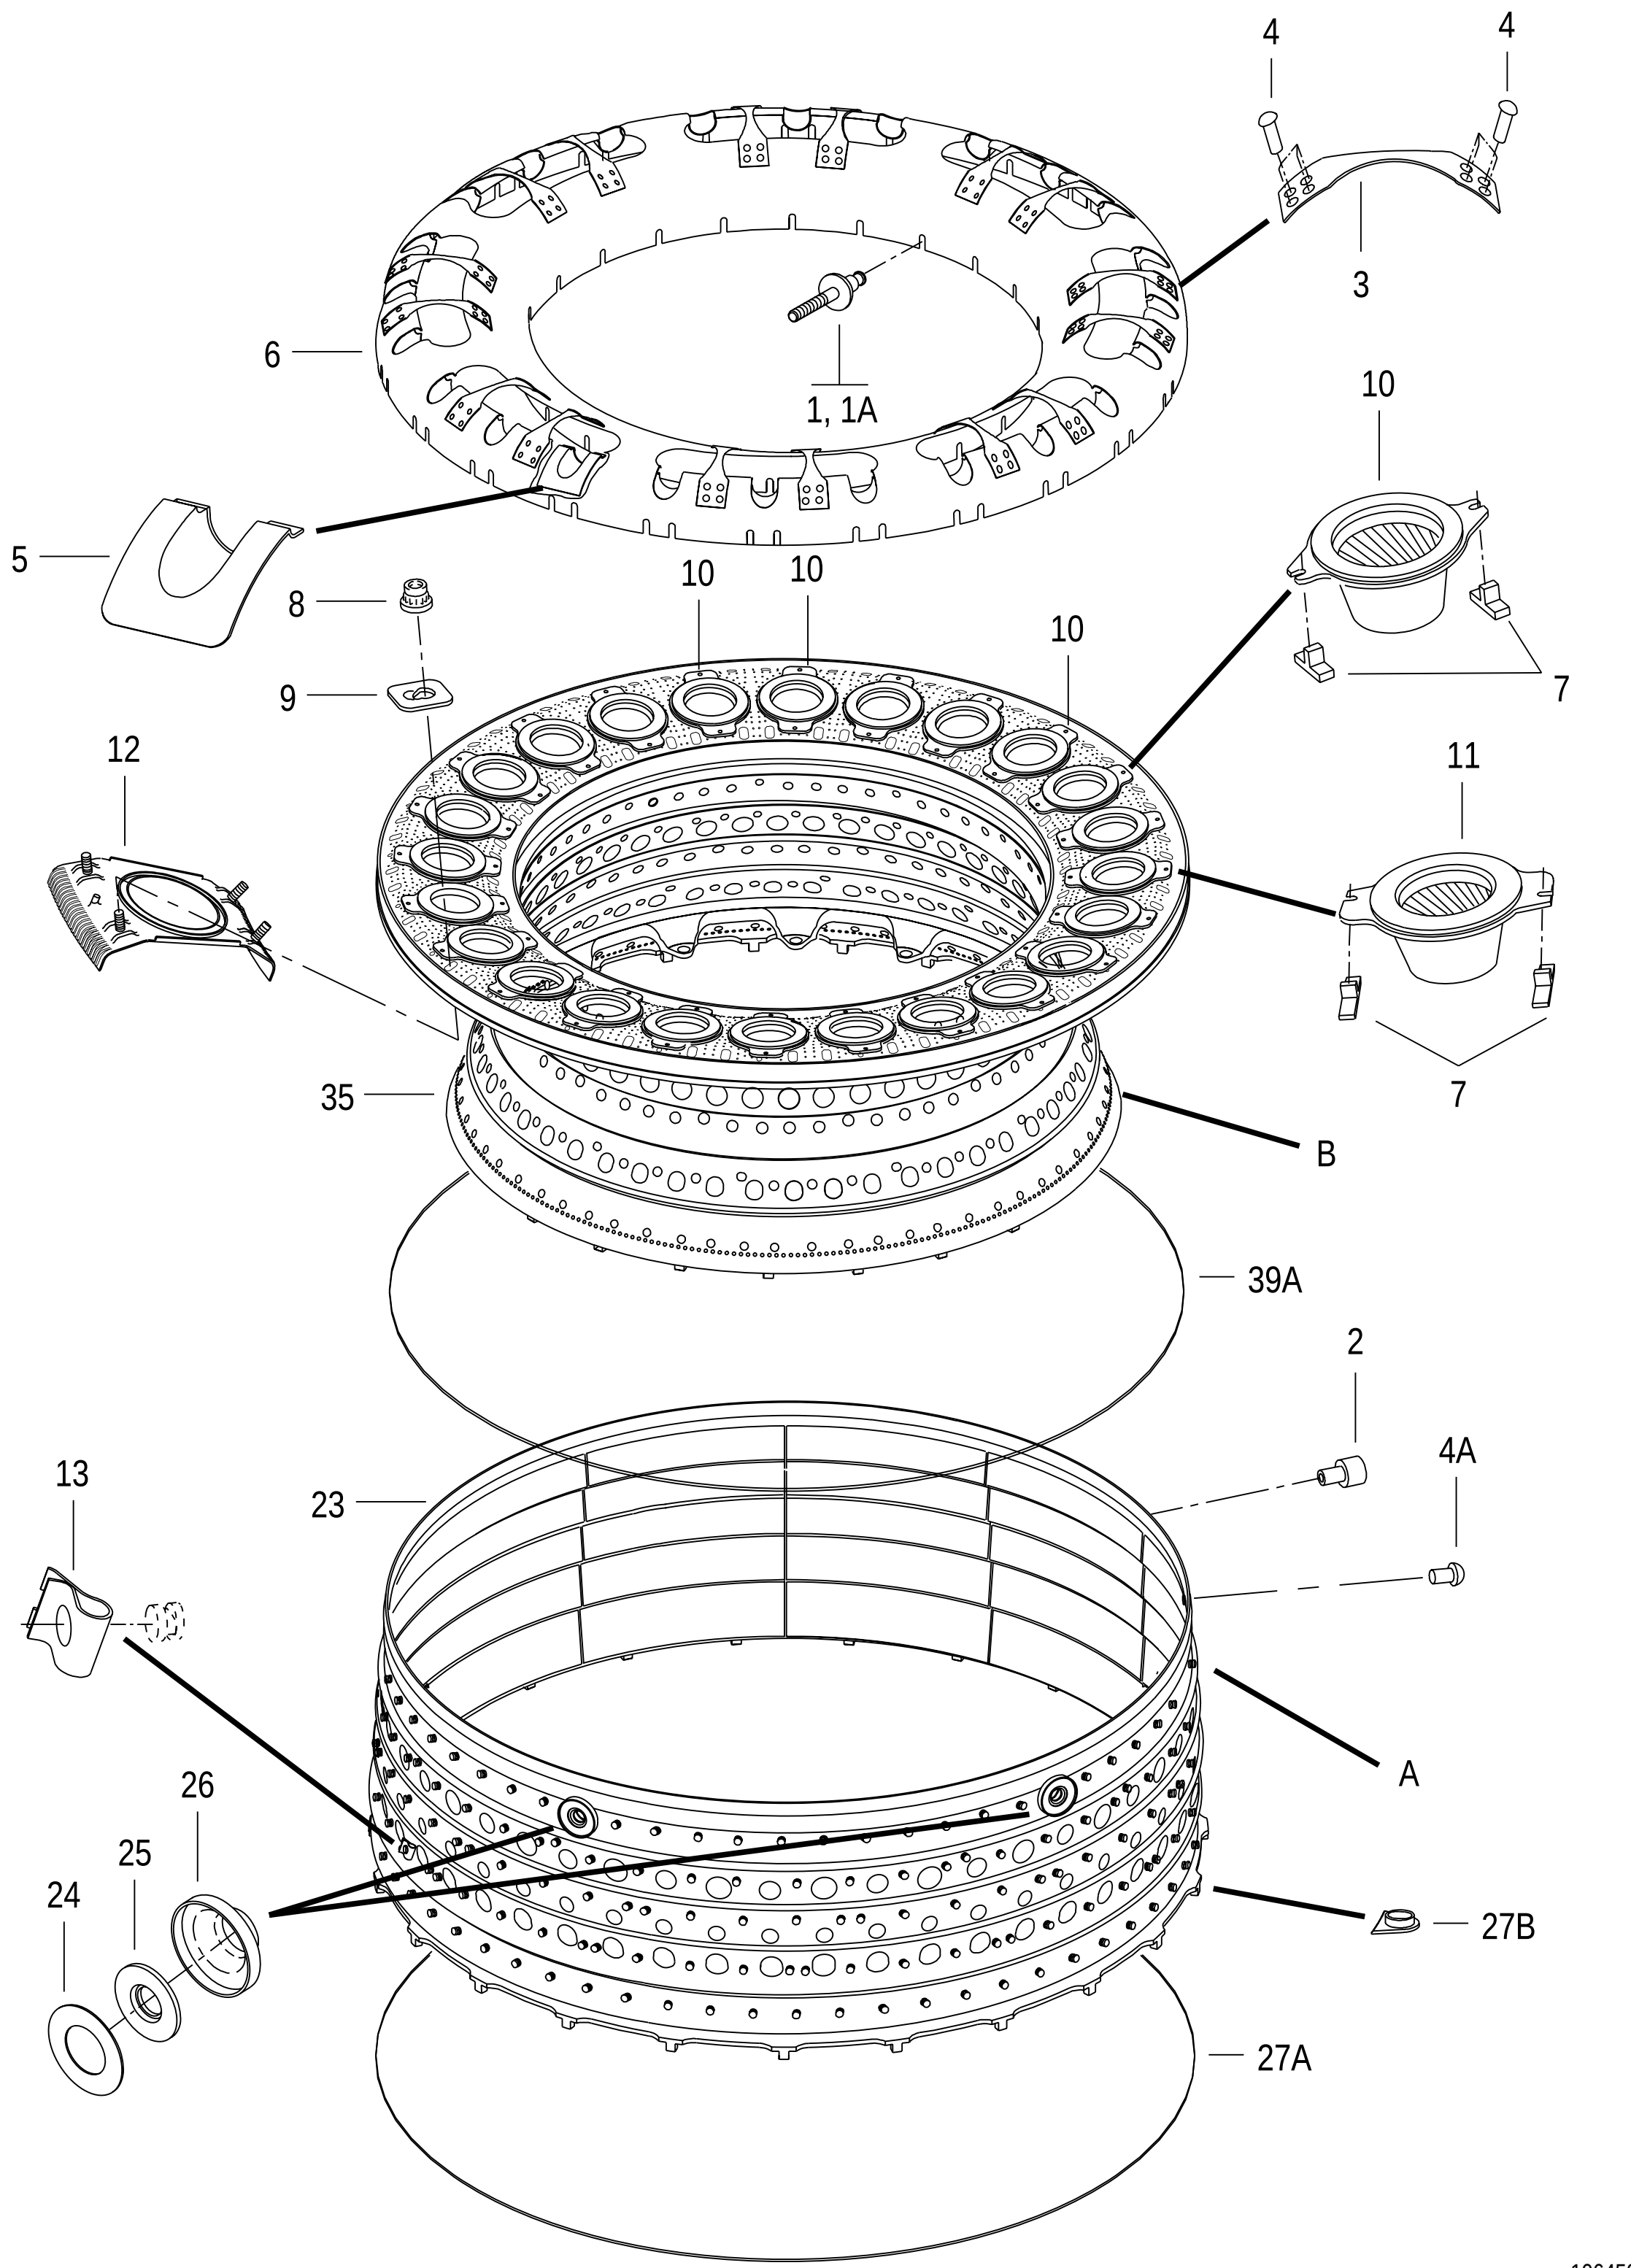


FIGURE 100. COMBUSTION CHAMBER ASSY
(SHEET 1 OF 3)


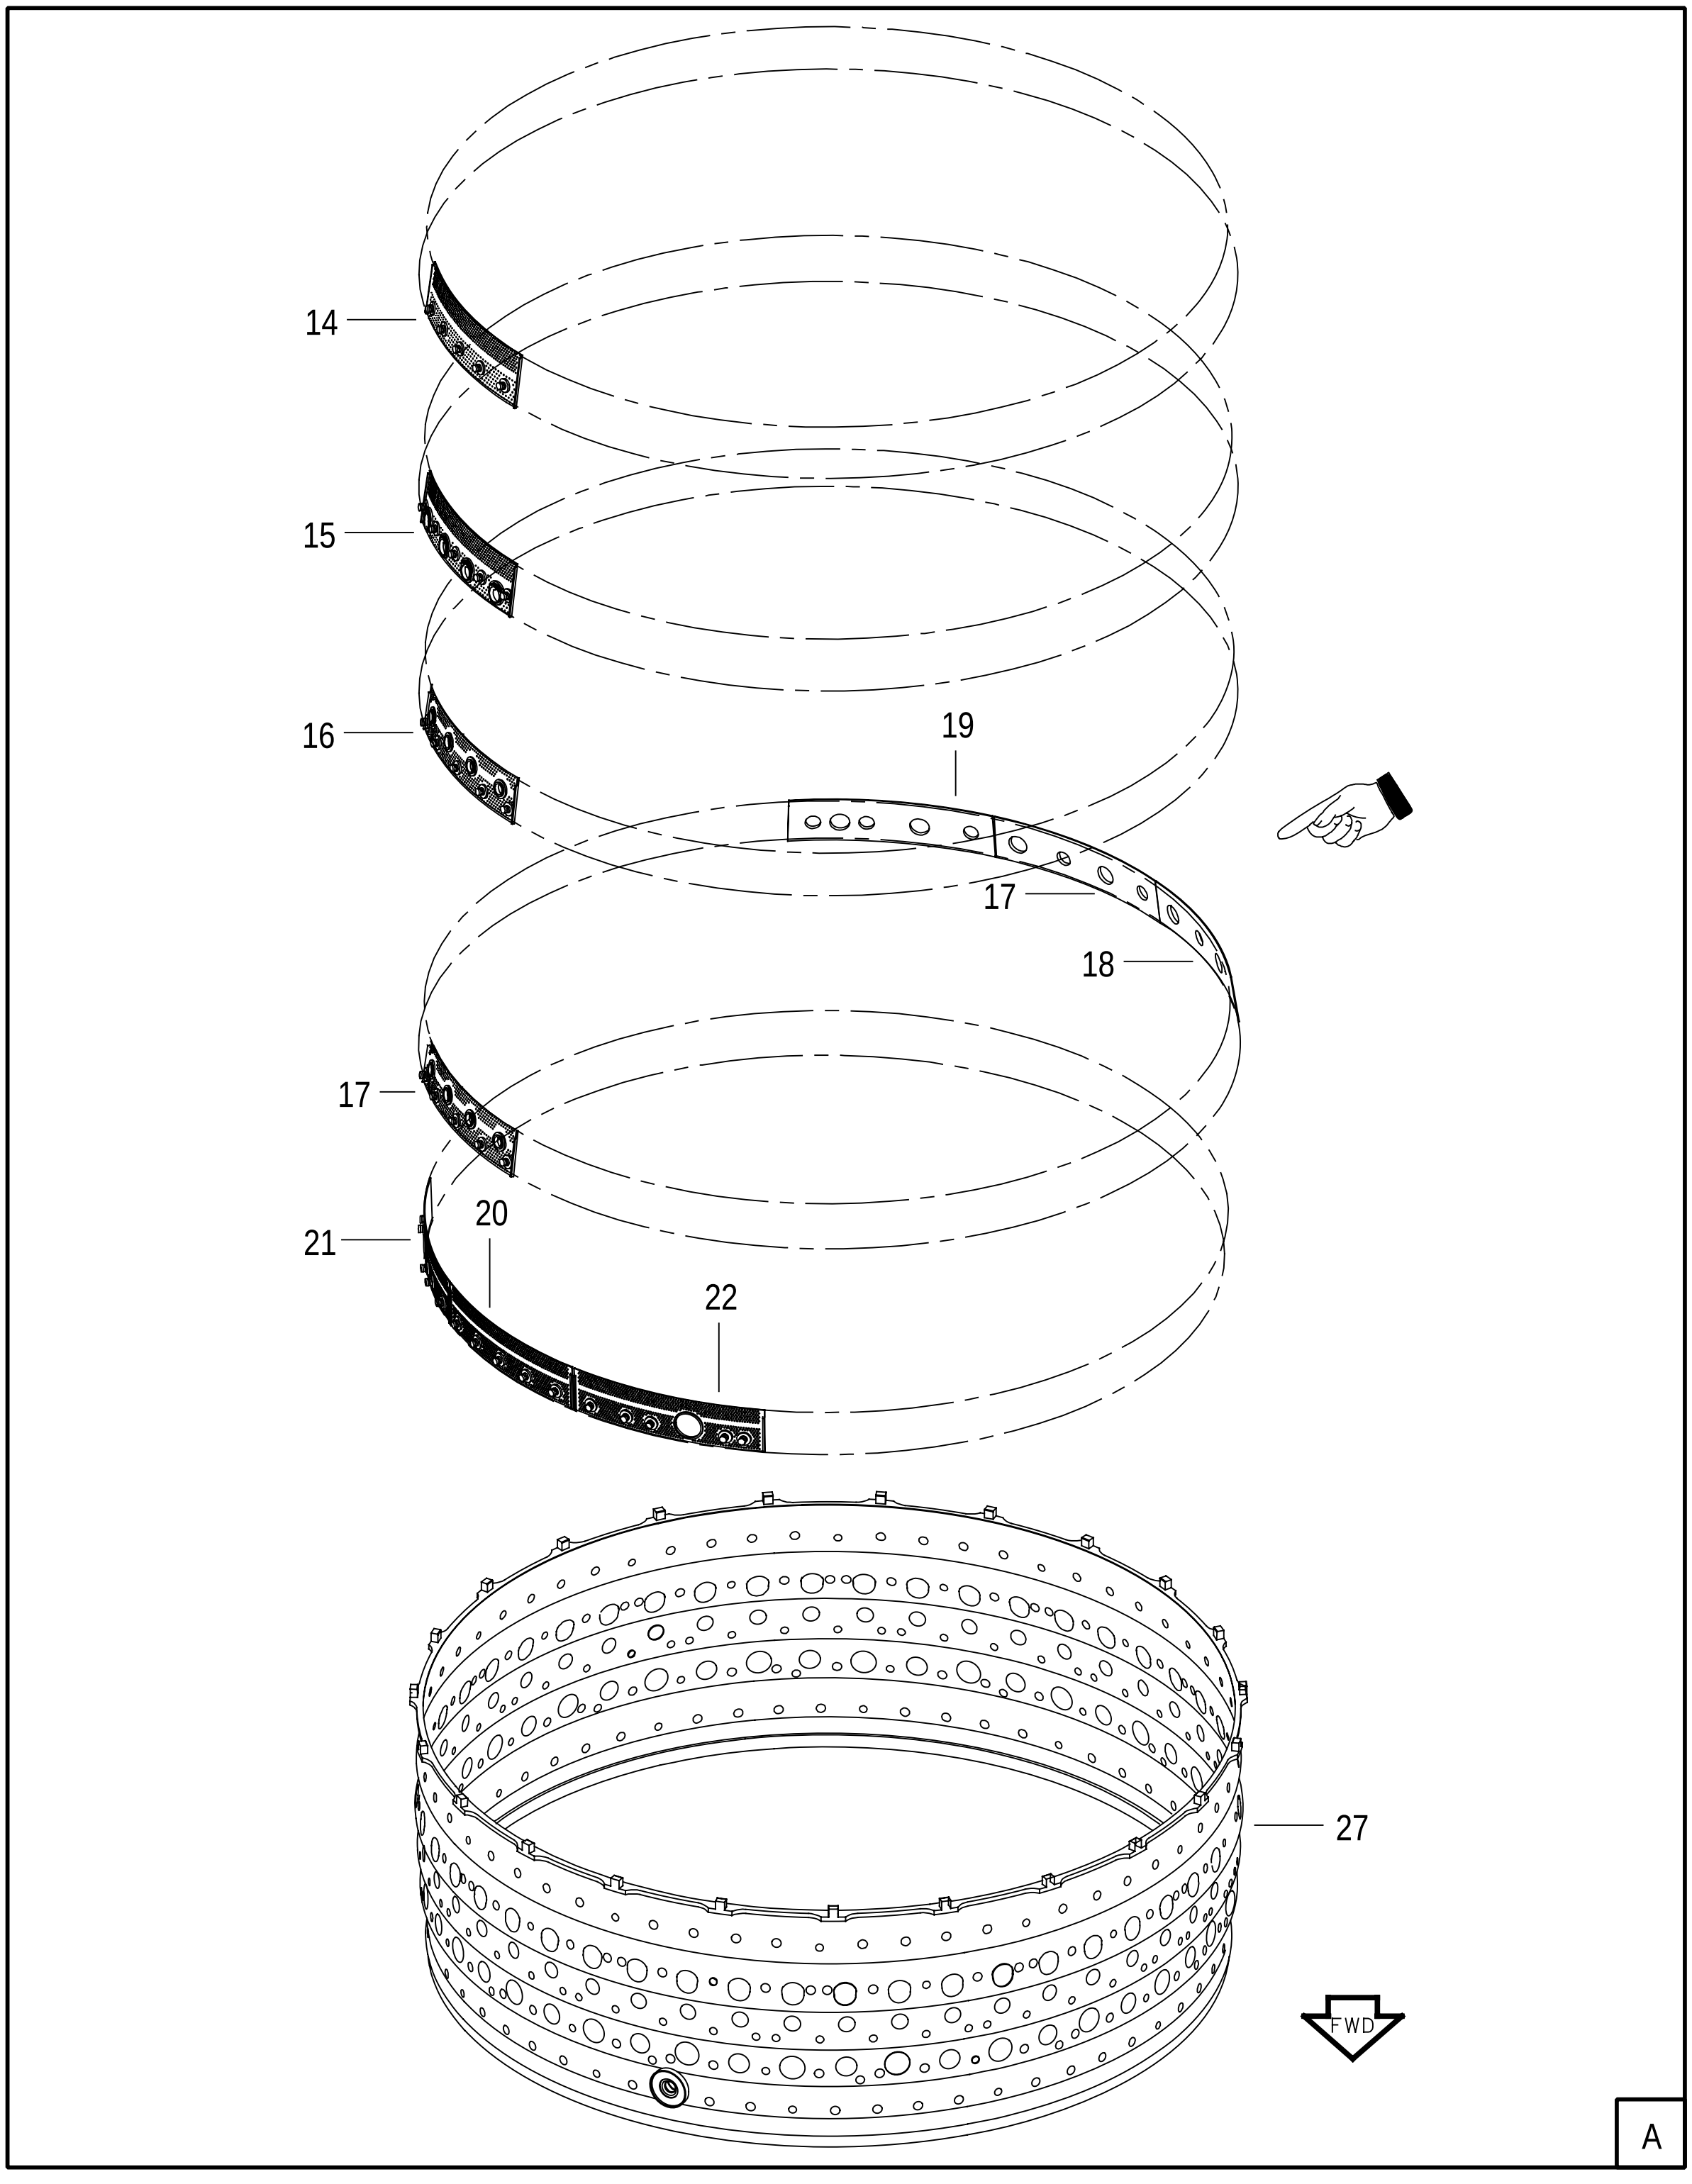


FIGURE 100. COMBUSTION CHAMBER ASSY
(SHEET 2 OF 3)

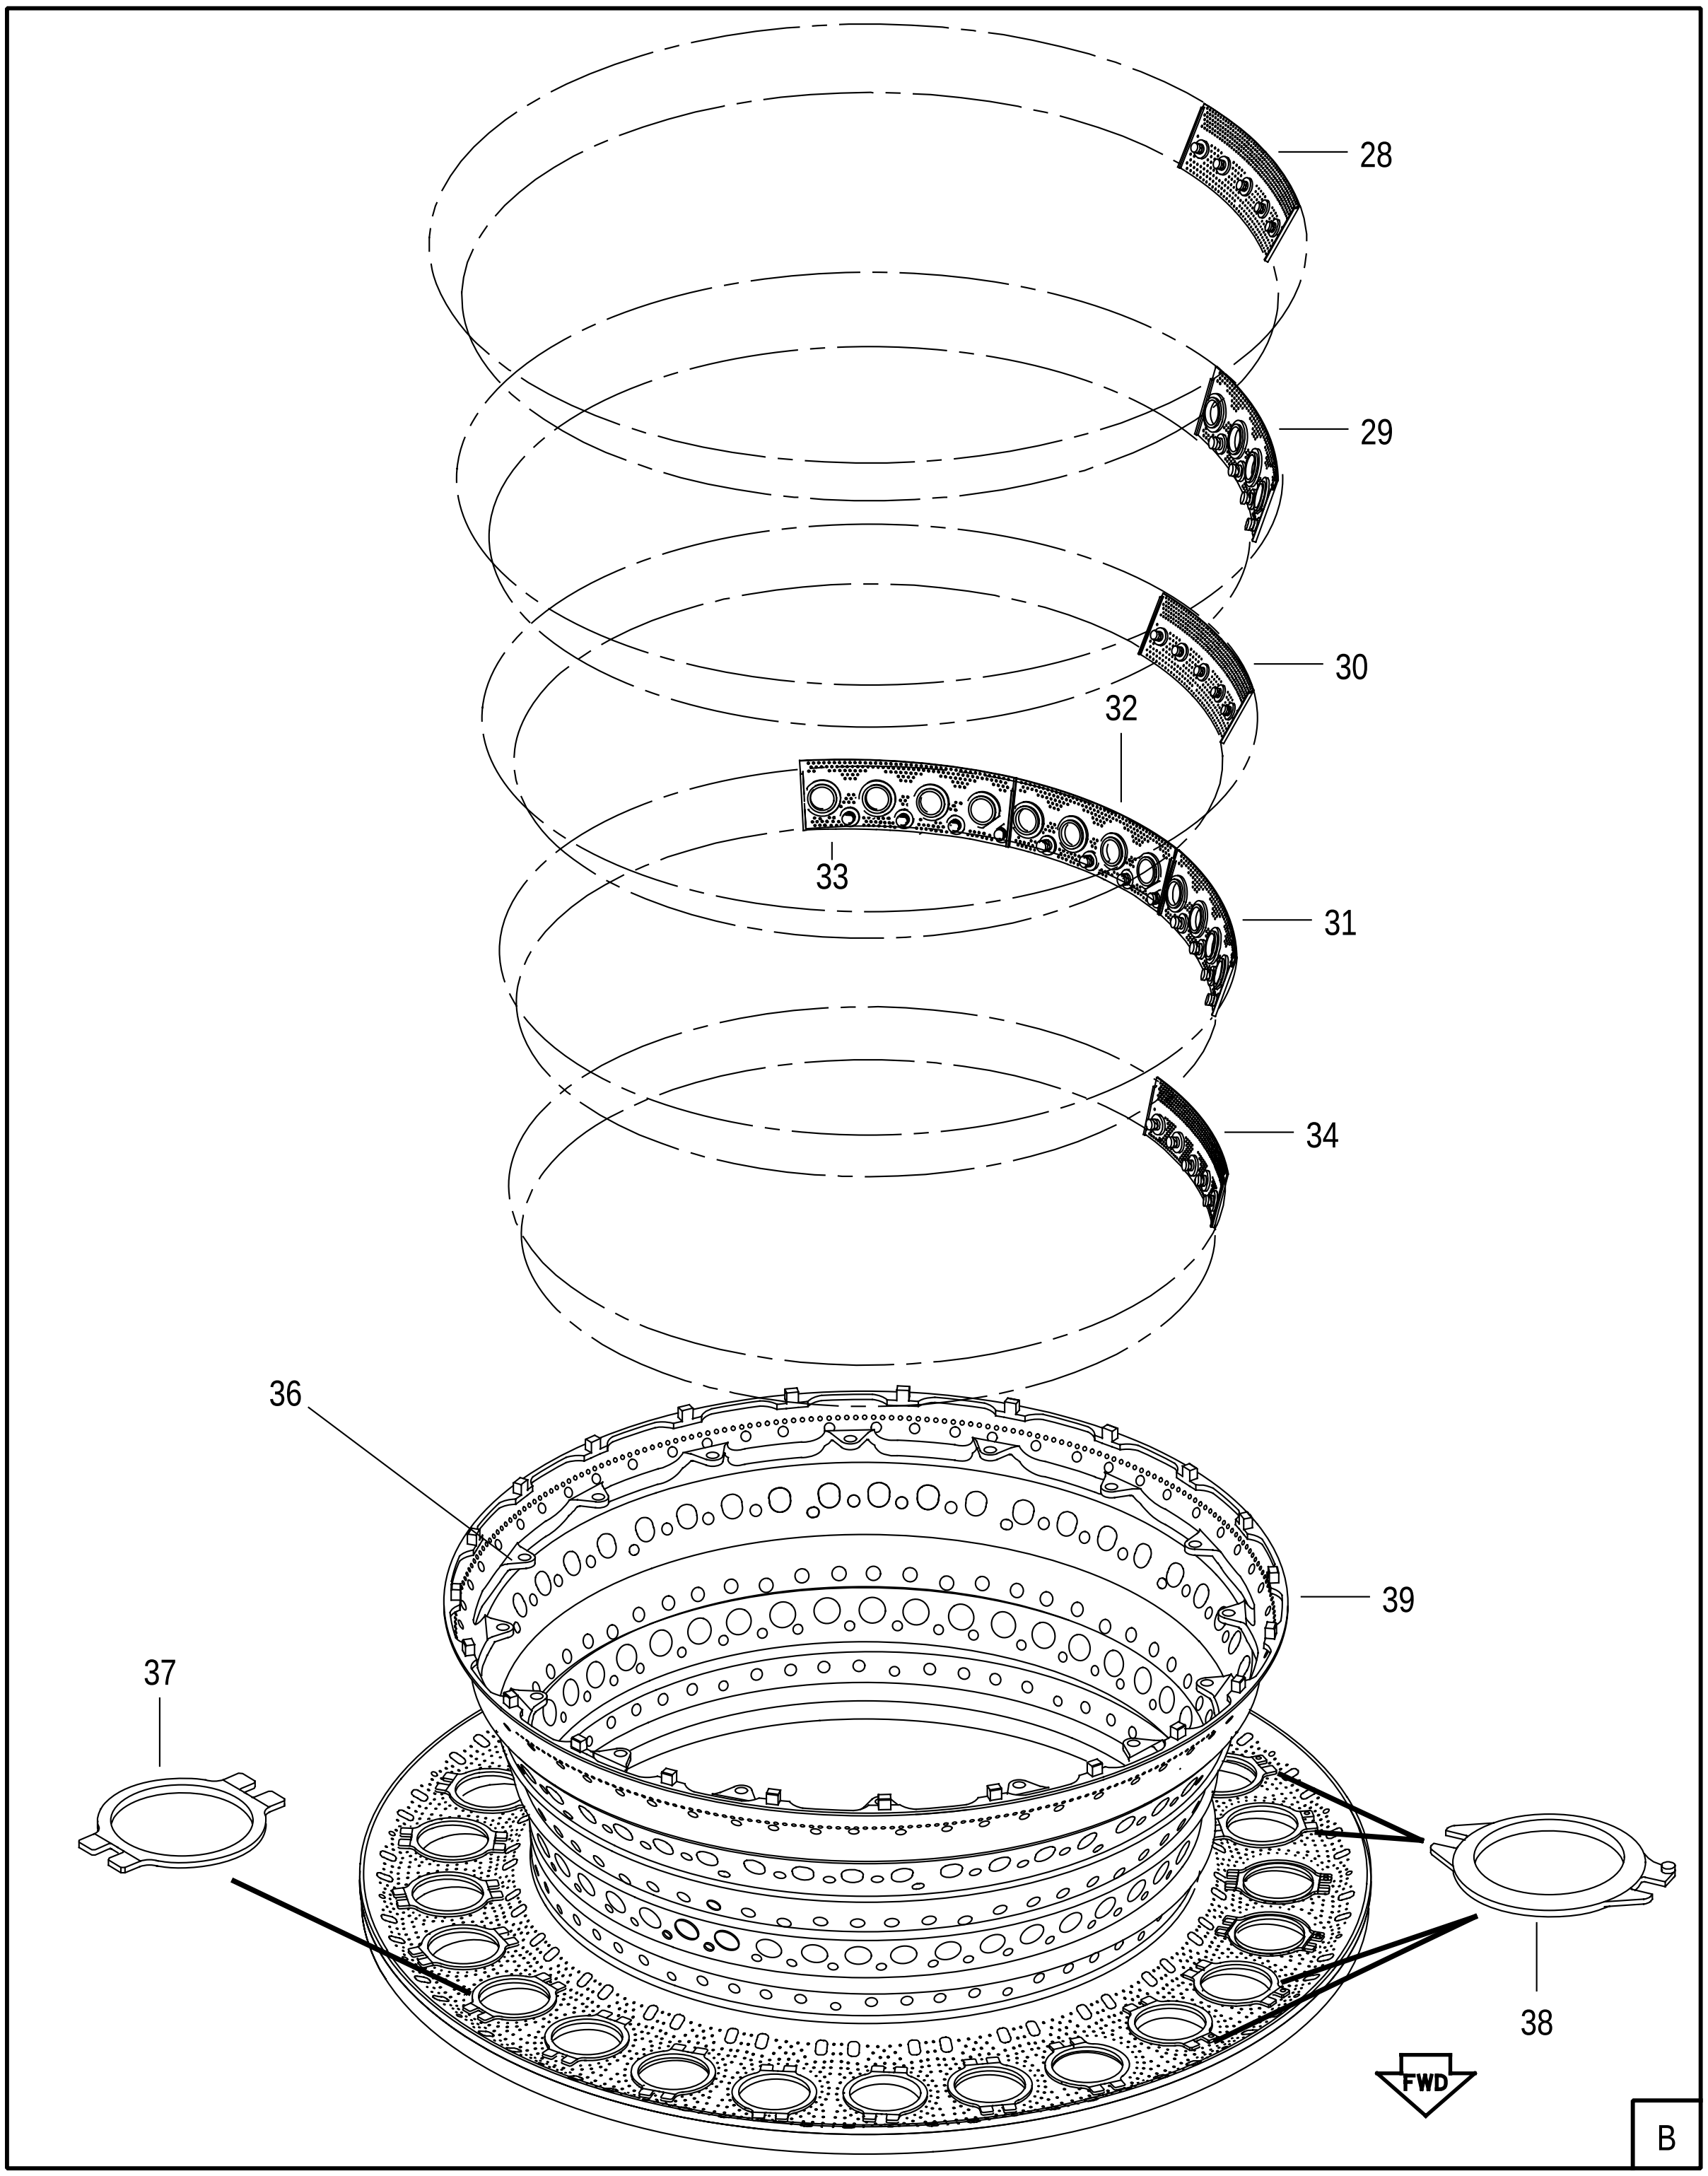

8268

FIGURE 100. COMBUSTION CHAMBER ASSY
(SHEET 3 OF 3)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	100	4077820	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	DC/DE	PAFDD
		4077232	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	DD/DG/DJ	PAFDD
		4079375	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	DH/DL	PAFDD
R		4080008	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA REOP AND REID OF 4077820 DO NOT PROCURE FROM P&WA	1	DF/XV/YB/ AAV	PAFDD
R		4080575	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA REOP AND REID OF 4077232 DO NOT PROCURE FROM P&WA	1	DK/XX/YD/ AAV	PAFDD
R		4077670	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	DM/XZ/YF/ AAV	PAFDD
		4083214	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA REOP AND REID OF 4077670 DO NOT PROCURE FROM P&WA	1	SJ/YG	PAFDD
		4083947	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	SK	PAFDD
		4083215	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA REOP AND REID OF 4080008 DO NOT PROCURE FROM P&WA	1	SL/YC	PAFDD
		4083948	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	SM	PAFDD
		4083216	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA REOP AND REID OF 4080575 DO NOT PROCURE FROM P&WA	1	SN/YE	PAFDD
		4083949	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	SP	PAFDD
		4083095	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	SQ/YA	PAFDD
		4083944	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	MR/SR	PAFDD
		4084089	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	MS	PAFDD
		4083127	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	SS/XW	PAFDD
		4083945	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	ST	PAFDD
		4083129	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	SU/XY	PAFDD
		4083946	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	SV	PAFDD
R		4083194	52661	CHAMBER-COMBUSTION, ASSY OF . . . . SEE FIG. 86-22 FOR NHA	1	AAW	PAFDD
		4083560	52661	CHAMBER-COMBUSTION, ASSY OF . . . . USE ONLY ON 4084522-801 SEE FIG. 86-22 FOR NHA	1		PAFDD
		4083565	52661	CHAMBER-COMBUSTION, ASSY OF . . . . USE ONLY ON 4084522-802 SEE FIG. 86-22 FOR NHA	1		PAFDD
		4076227-01	52661	. DEFLECTOR-COMBUSTION CHAMBER, ASSY OF . .	1		PADDD
	- 1	CR2653-6-4	05693	. RIVET-BLIND, UNIVERSAL HEAD (AP) . . . . P&WA PART NO. ST2766-604	96		PADZZ
	- 1A	= CR4653EA-6-4	05693	. RIVET-OD OVERSIZE (AP) . . . . SERVICE REPAIR PART	48		PADZZ
		= CR4623EA-6-3.5	05693	. RIVET-ID SHORT ASSY (AP) . . . . SERVICE REPAIR PART	48		PADZZ
		= CR4653EA-6-3.5	05693	. RIVET-ID OVERSIZE SHORT ASSY (AP) . . . . SERVICE REPAIR PART	48		PADZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	100 - 2	4070874	52661	. RIVET-TUBULAR, FILLISTER . . . . 0.094 DIA X 0.140 IN. LONG (AP)	1		PADZZ
	- 3	4076722	52661	.. BRACE-DEFLECTOR, COMBUSTION CHAMBER . . .	16		PADZZ
	- 4	AN123335	88044	.. RIVET . . . . SERVICE REPAIR PART	128		PADZZ
	- 4A	AN123669	88044	.. RIVET . . . . SERVICE REPAIR PART	47		PADZZ
	- 5	4076227-03	52661	.. DEFLECTOR-COMBUSTION CHAMBER	24		PADZZ
	- 6	4076227-02	52661	.. DEFLECTOR-COMBUSTION CHAMBER	1		PADZZ
	- 7	4062773	52661	. PLATE-RETAINING, NOZZLE STATOR	48		PADZZ
	- 8	4023115	52661	. NUT OPTION . . . . SEE OPTION TABLE	96		PAOZZ
	- 9	4075754	52661	. WASHER-COMBUSTION CHAMBER DEFLECTOR . . .	96		PAFZZ
	- 10	4076770	52661	. NOZZLE STATOR-FUEL, COUNTERCLOCKWISE	4		PADZZ
	- 11	4077094	52661	. NOZZLE STATOR-FUEL, COUNTERCLOCKWISE	20		PADZZ
R R	- 12	4081117	52661	. DEFLECTOR-COMBUSTION CHAMBER . . . . REPLACES 4075749 REPLACES 4080361	24		PAFZZ
	- 13	4077276	52661	. RETAINER-COMBUSTION CHAMBER LINER . . . . USE ONLY ON 4077820, 4077232, 4080008, AND 4080575 REPLACED BY 4079951 OR 4081406	575		PAFZZ
		= 4079951	52661	. RETAINER-COMBUSTION CHAMBER LINER . . . . REPLACES 4077276	575		PAFZZ
		= 4081406	52661	. RETAINER-COMBUSTION CHAMBER LINER . . . . REPLACES 4077276	575		PAFZZ
R R	- 14	4083065	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 5 OD REPLACES 4074789 REPLACES 4080360	12		PAFZZ
R R	- 15	4083064	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 4 OD REPLACES 4076469 REPLACES 4080359	12		PAFZZ
R R	- 16	4083063	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 3 OD REPLACES 4074787 REPLACES 4080358	12		PAFZZ
R R	- 17	4083060	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 2 OD REPLACES 4074784 REPLACES 4080353	10		PAFZZ
R R	- 18	4083061	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 2 OD REPLACES 4074785 REPLACES 4080354	1		PAFZZ
R R	- 19	4083062	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 2 OD REPLACES 4074786 REPLACES 4080357	1		PAFZZ
R R	- 20	4083057	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 1 OD REPLACES 4074781 REPLACES 4080349	10		PAFZZ
		4084086	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 1 OD	10		PAFZZ
R R	- 21	4083058	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 1 OD REPLACES 4074782 REPLACES 4080350	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	100 - 21	4084087	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, .	1		PAFZZ
				1 OD			
	- 22	4083059	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, .	1		PAFZZ
				1 OD			
R				REPLACES 4074783			
R				REPLACES 4080351			
		4084088	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, .	1		PAFZZ
				1 OD			
	- 23	4083566	52661	. CHAMBER-COMBUSTION, OUTER, ASSY OF	1		PADDD
				USE ONLY ON 4083565			
		4083561	52661	. CHAMBER-COMBUSTION, OUTER, ASSY OF	1		PADDD
				USE ONLY ON 4083560			
		4083096	52661	. CHAMBER-COMBUSTION, OUTER, ASSY OF	1		PADDD
R				REPLACES 4079736			
		4083195	52661	. CHAMBER-COMBUSTION, OUTER, ASSY OF	1		PADDD
				USE ONLY ON 4083194			
		4083128	52661	. CHAMBER-COMBUSTION, OUTER, ASSY OF	1		PADDD
R				REPLACES 4077819			
				PARTIAL BREAKDOWN FOLLOWS			
	- 24	4074775	52661	.. LOCK-SPARK IGNITER GUIDE	2		PADZZ
	- 25	4074774	52661	.. GUIDE-SPARK IGNITER	2		PADZZ
	- 26	4074773	52661	.. SLEEVE-SPARK IGNITER GUIDE	2		PADZZ
	- 27	4074717	52661	.. CHAMBER-COMBUSTION, OD LINER	1		XA
		4082786	52661	.. CHAMBER-COMBUSTION, OD LINER	1		XA
				USE ONLY ON 4083195, 4083561, AND 4083566			
R	- 27A	4083197-01	52661	. SEAL-BRUSH, COMBUSTION CHAMBER, OUTER, . .	1		PAFZZ
R				ASSY OF			
R				USE ONLY ON 4083194			
R	- 27B	4083667	52661	. BUSHING-SLEEVE	23		PAFZZ
R				USE ONLY ON 4083194			
	- 28	4083056	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, .	12		PAFZZ
				5 ID			
R				REPLACES 4074780			
R				REPLACES 4080348			
	- 29	4083055	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, .	12		PAFZZ
				4 ID			
R				REPLACES 4076467			
R				REPLACES 4080347			
	- 30	4083054	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, .	12		PAFZZ
				3 ID			
R				REPLACES 4074778			
R				REPLACES 4080346			
	- 31	4083053	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, .	4		PAFZZ
				2 ID			
R				REPLACES 4074777			
R				REPLACES 4080344			
		4084083	52661	. LINER SEGMENT-COMBUSTION CHAMBER	4		PAFZZ
				DUCT, 2 ID			
	- 32	4074777	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, .	4		PAFZZ
				2 ID			
				USE ONLY ON 4077820, 4077232, AND 4079375			
		4083066	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, .	4		PAFZZ
				2 ID			
R				REPLACES 4079981			
R				REPLACES 4080362			
		4084084	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, .	4		PAFZZ
				2 ID			

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	100 - 33	4074777	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 2 ID USE ONLY ON 4077820, 4077232, AND 4079375	4		PAFZZ
		4083067	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 2 ID	4		PAFZZ
R				REPLACES 4079982			
R				REPLACES 4080363			
		4084085	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 2 ID	4		PAFZZ
	- 34	4083052	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 1 ID	12		PAFZZ
R				REPLACES 4074776			
R				REPLACES 4080343			
		4084082	52661	. LINER SEGMENT-COMBUSTION CHAMBER DUCT, . 1 ID	12		PAFZZ
	- 35	4074766	52661	. CHAMBER-COMBUSTION, INNER, ASSY OF .... USE ONLY ON 4077232, 4077820, AND 4079375	1		PADDD
		4077671	52661	. CHAMBER-COMBUSTION, INNER, ASSY OF .... USE ONLY ON 4077670, 4080008, 4080575, 4083095, AND 4083945	1		PADDD
		4083973	52661	. CHAMBER-COMBUSTION, INNER, ASSY OF .... USE ONLY ON 4083194, 4083560, AND 4083565	1		PADDD
	- 36	4074769	52661	.. FLANGE-INNER COMBUSTION CHAMBER......... USE ONLY ON 4074766 AND 4077671	1		XA
		4082785	52661	.. FLANGE-INNER COMBUSTION CHAMBER......... USE ONLY ON 4083973	1		XA
	- 37	4077095	52661	.. GUIDE-COMBUSTION CHAMBER	20		PADZZ
	- 38	4077096	52661	.. GUIDE-COMBUSTION CHAMBER	4		PADZZ
	- 39	4074716	52661	.. CHAMBER-COMBUSTION, ID LINER	1		XA
R	- 39A	4082748-01	52661	. SEAL-BRUSH, COMBUSTION CHAMBER, INNER, ...	1		PAFZZ
R				ASSY OF			
R				USE ONLY ON 4083194			

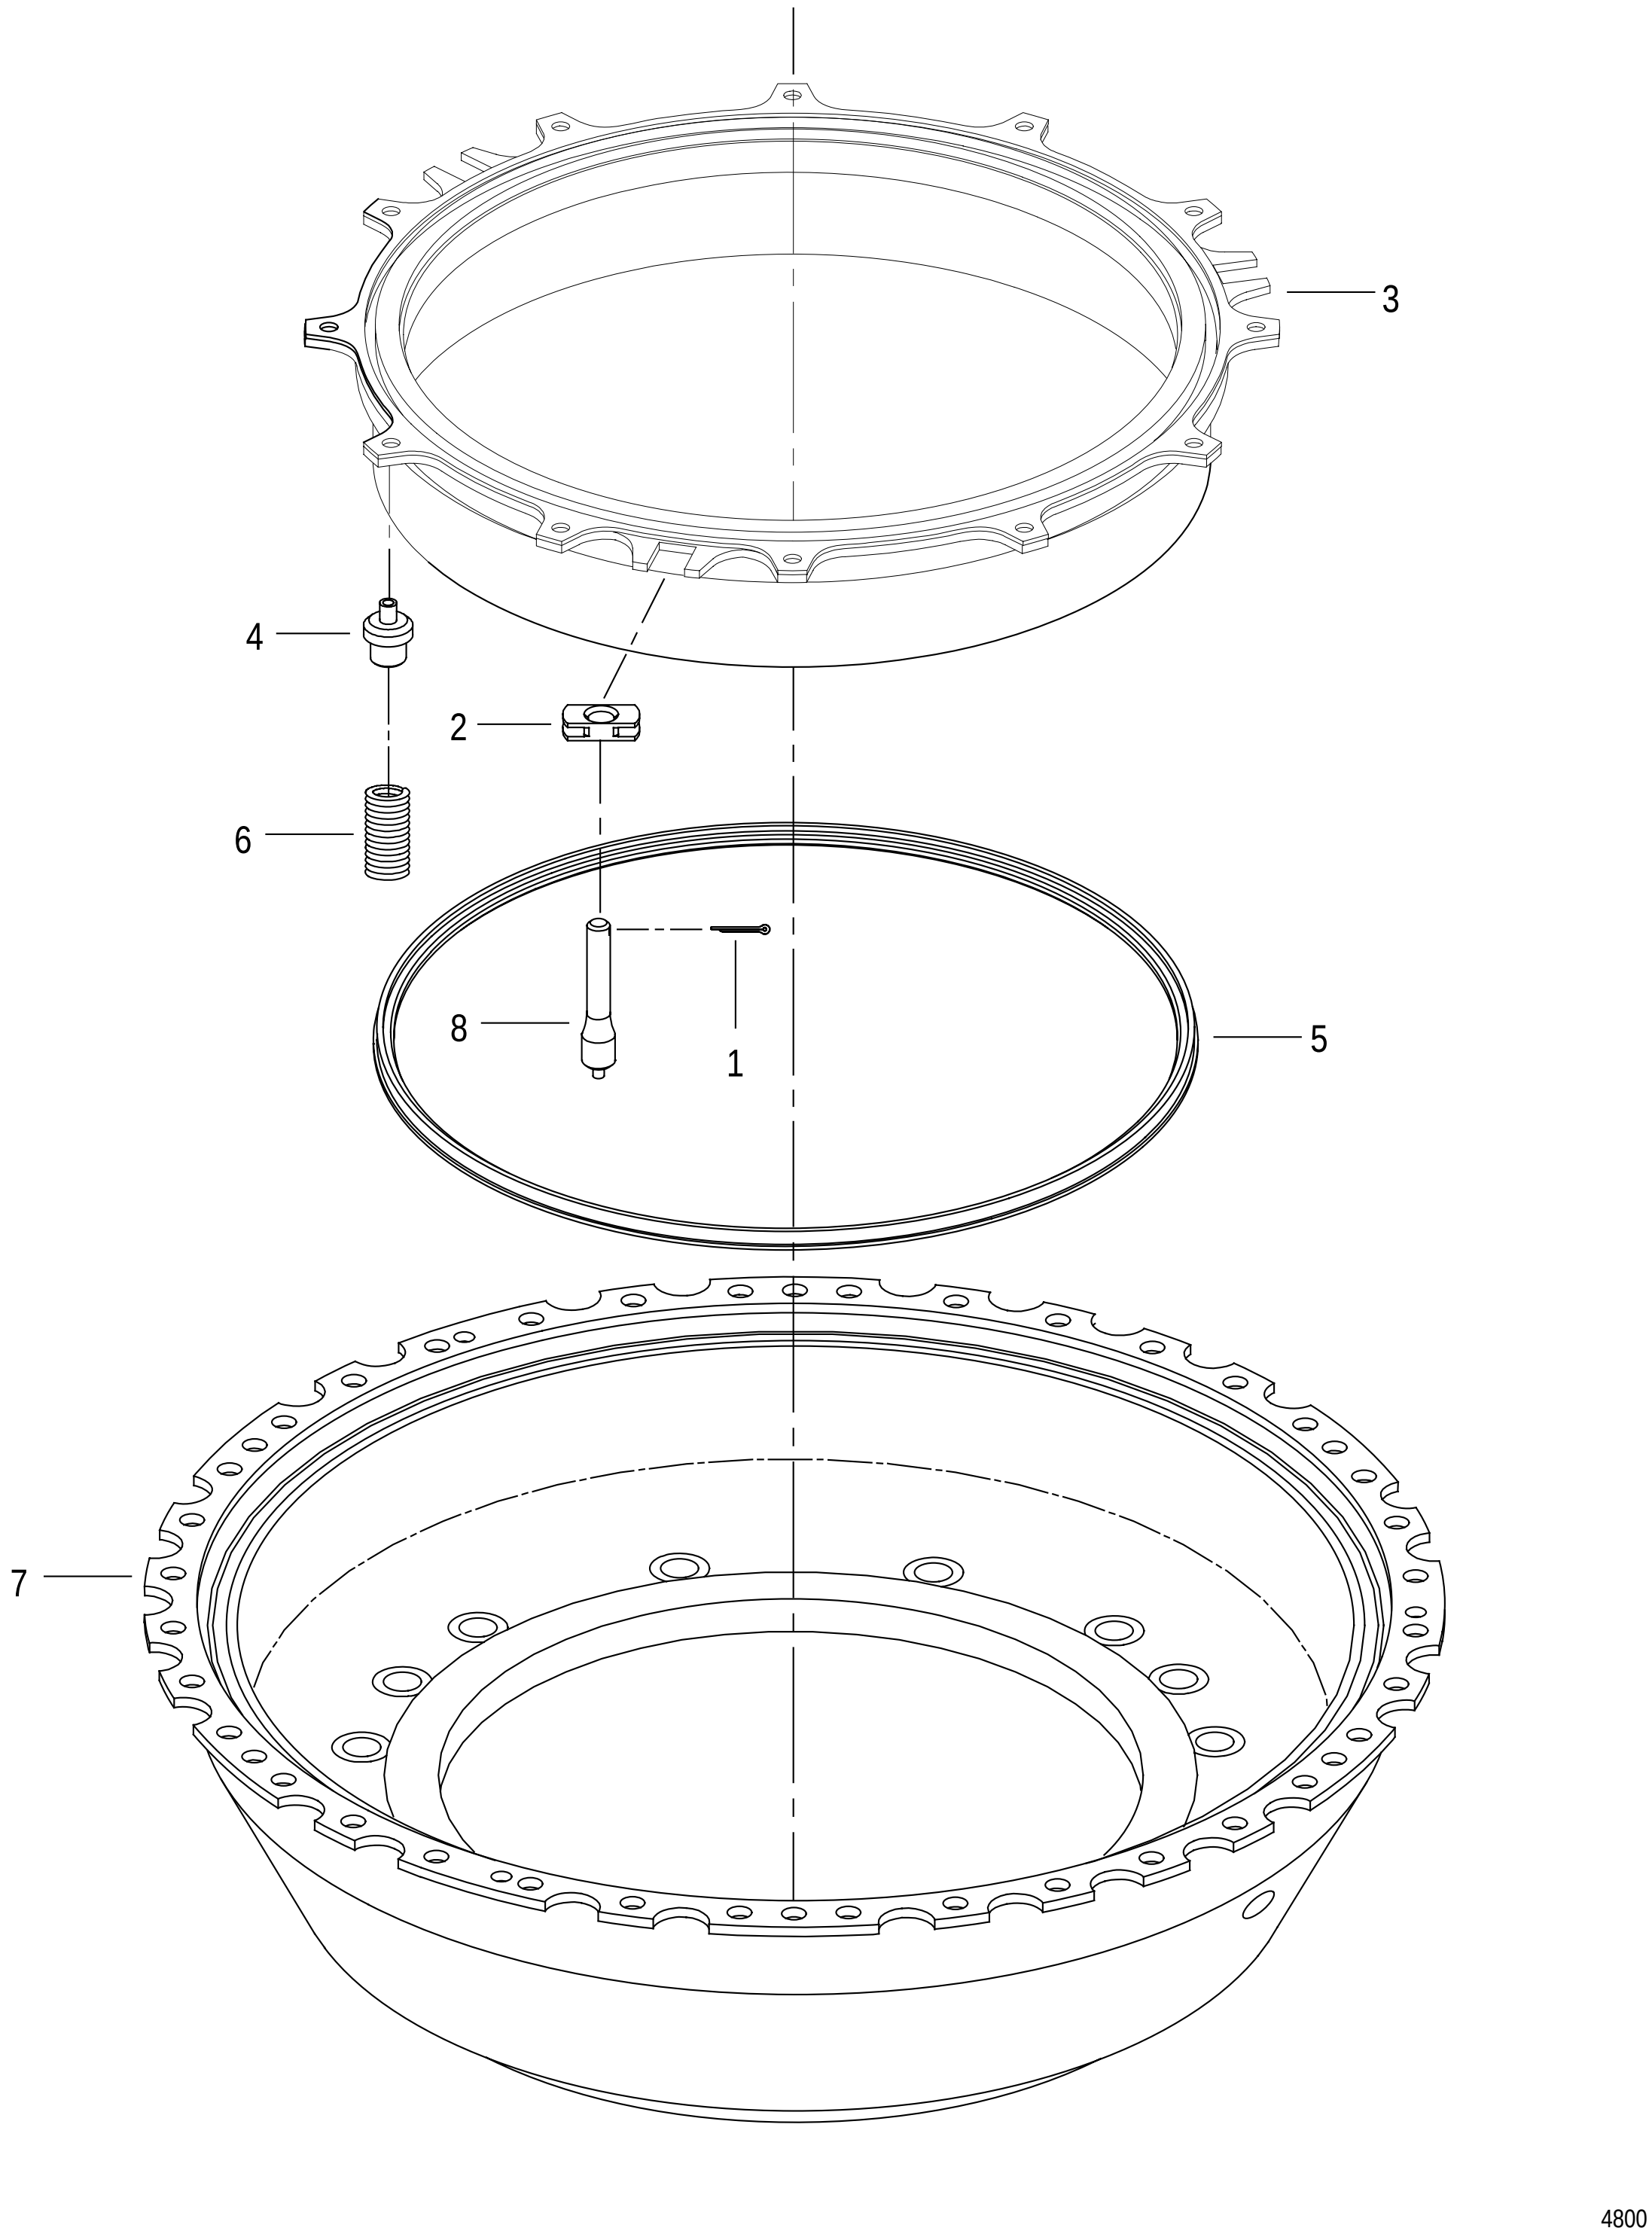


FIGURE 101. NO. 4 BEARING REAR SEAL ASSY

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
101	=	4072349	52661	SEAL ASSY-NO. 4 BEARING REAR . . . . SEE FIG. 87-4 FOR NHA	1		AFF
	=	4065871	52661	SEAL ASSY-NO. 4 BEARING, REAR . . . . SEE FIG. 87-4 FOR NHA	1		AFF
- 1		MS9245-23	96906	. PIN	3		PAOZZ
- 2		4035894	52661	. BUSHING-NO. 4 BEARING SEAL	3		PAFZZ
- 3		4035886	52661	. SEAL OPTION . . . . PROCUREMENT NO. CONSISTS OF	1		PAFLD
		4035882	52661	.. SEAL-FACE, NO. 4 BEARING, ASSY OF . . . . OPTIONAL TO 4035883	1		XA
		4035883	52661	.. SEAL-ASSY OF, FACE, NO. 4 BEARING . . . . OPTIONAL TO 4035882 PARTIAL BREAKDOWN FOLLOWS	1		XA
- 4		4009527	52661	... SEAT-HELICAL COMPRESSION SPRING	12		PAFZZ
- 5	%	4002454	52661	. SEAL RING-METAL . . . . 7.606 OD X 0.185 WIDE X 0.15325 IN. THK	1		PAFZZ
		4002454P10	52661	. SEAL RING-METAL . . . . 7.606 OD X 0.185 WIDE X 0.16325 IN. THK	AR		PAFZZ
		4002454P15	52661	. SEAL RING-METAL . . . . 7.606 OD X 0.185 WIDE X 0.16825 IN. THK	AR		PAFZZ
		4002454P20	52661	. SEAL RING-METAL . . . . 7.606 OD X 0.185 WIDE X 0.17325 IN. THK	AR		PAFZZ
		4002454P25	52661	. SEAL RING-METAL . . . . 7.606 OD X 0.185 WIDE X 0.17825 IN. THK	AR		PAFZZ
- 6		2146188	52661	. SPRING-HELICAL COMPRESSION . . . . 0.408 OD X 0.033 IN. DIA WIRE X 13.5 COILS	12		PAFZZ
- 7		4067915	52661	. SUPPORT-NO. 4 BEARING SEAL, REAR, ASSY OF . USE ONLY ON 4072349	1		PAFLD
		4065652	52661	. SUPPORT-ASSY OF, NO. 4 BEARING SEAL, REAR . USE ONLY ON 4065871	1		PAFLD
- 8		4035860	52661	.. PIN-NO. 4 BEARING SEAL	3		PADZZ

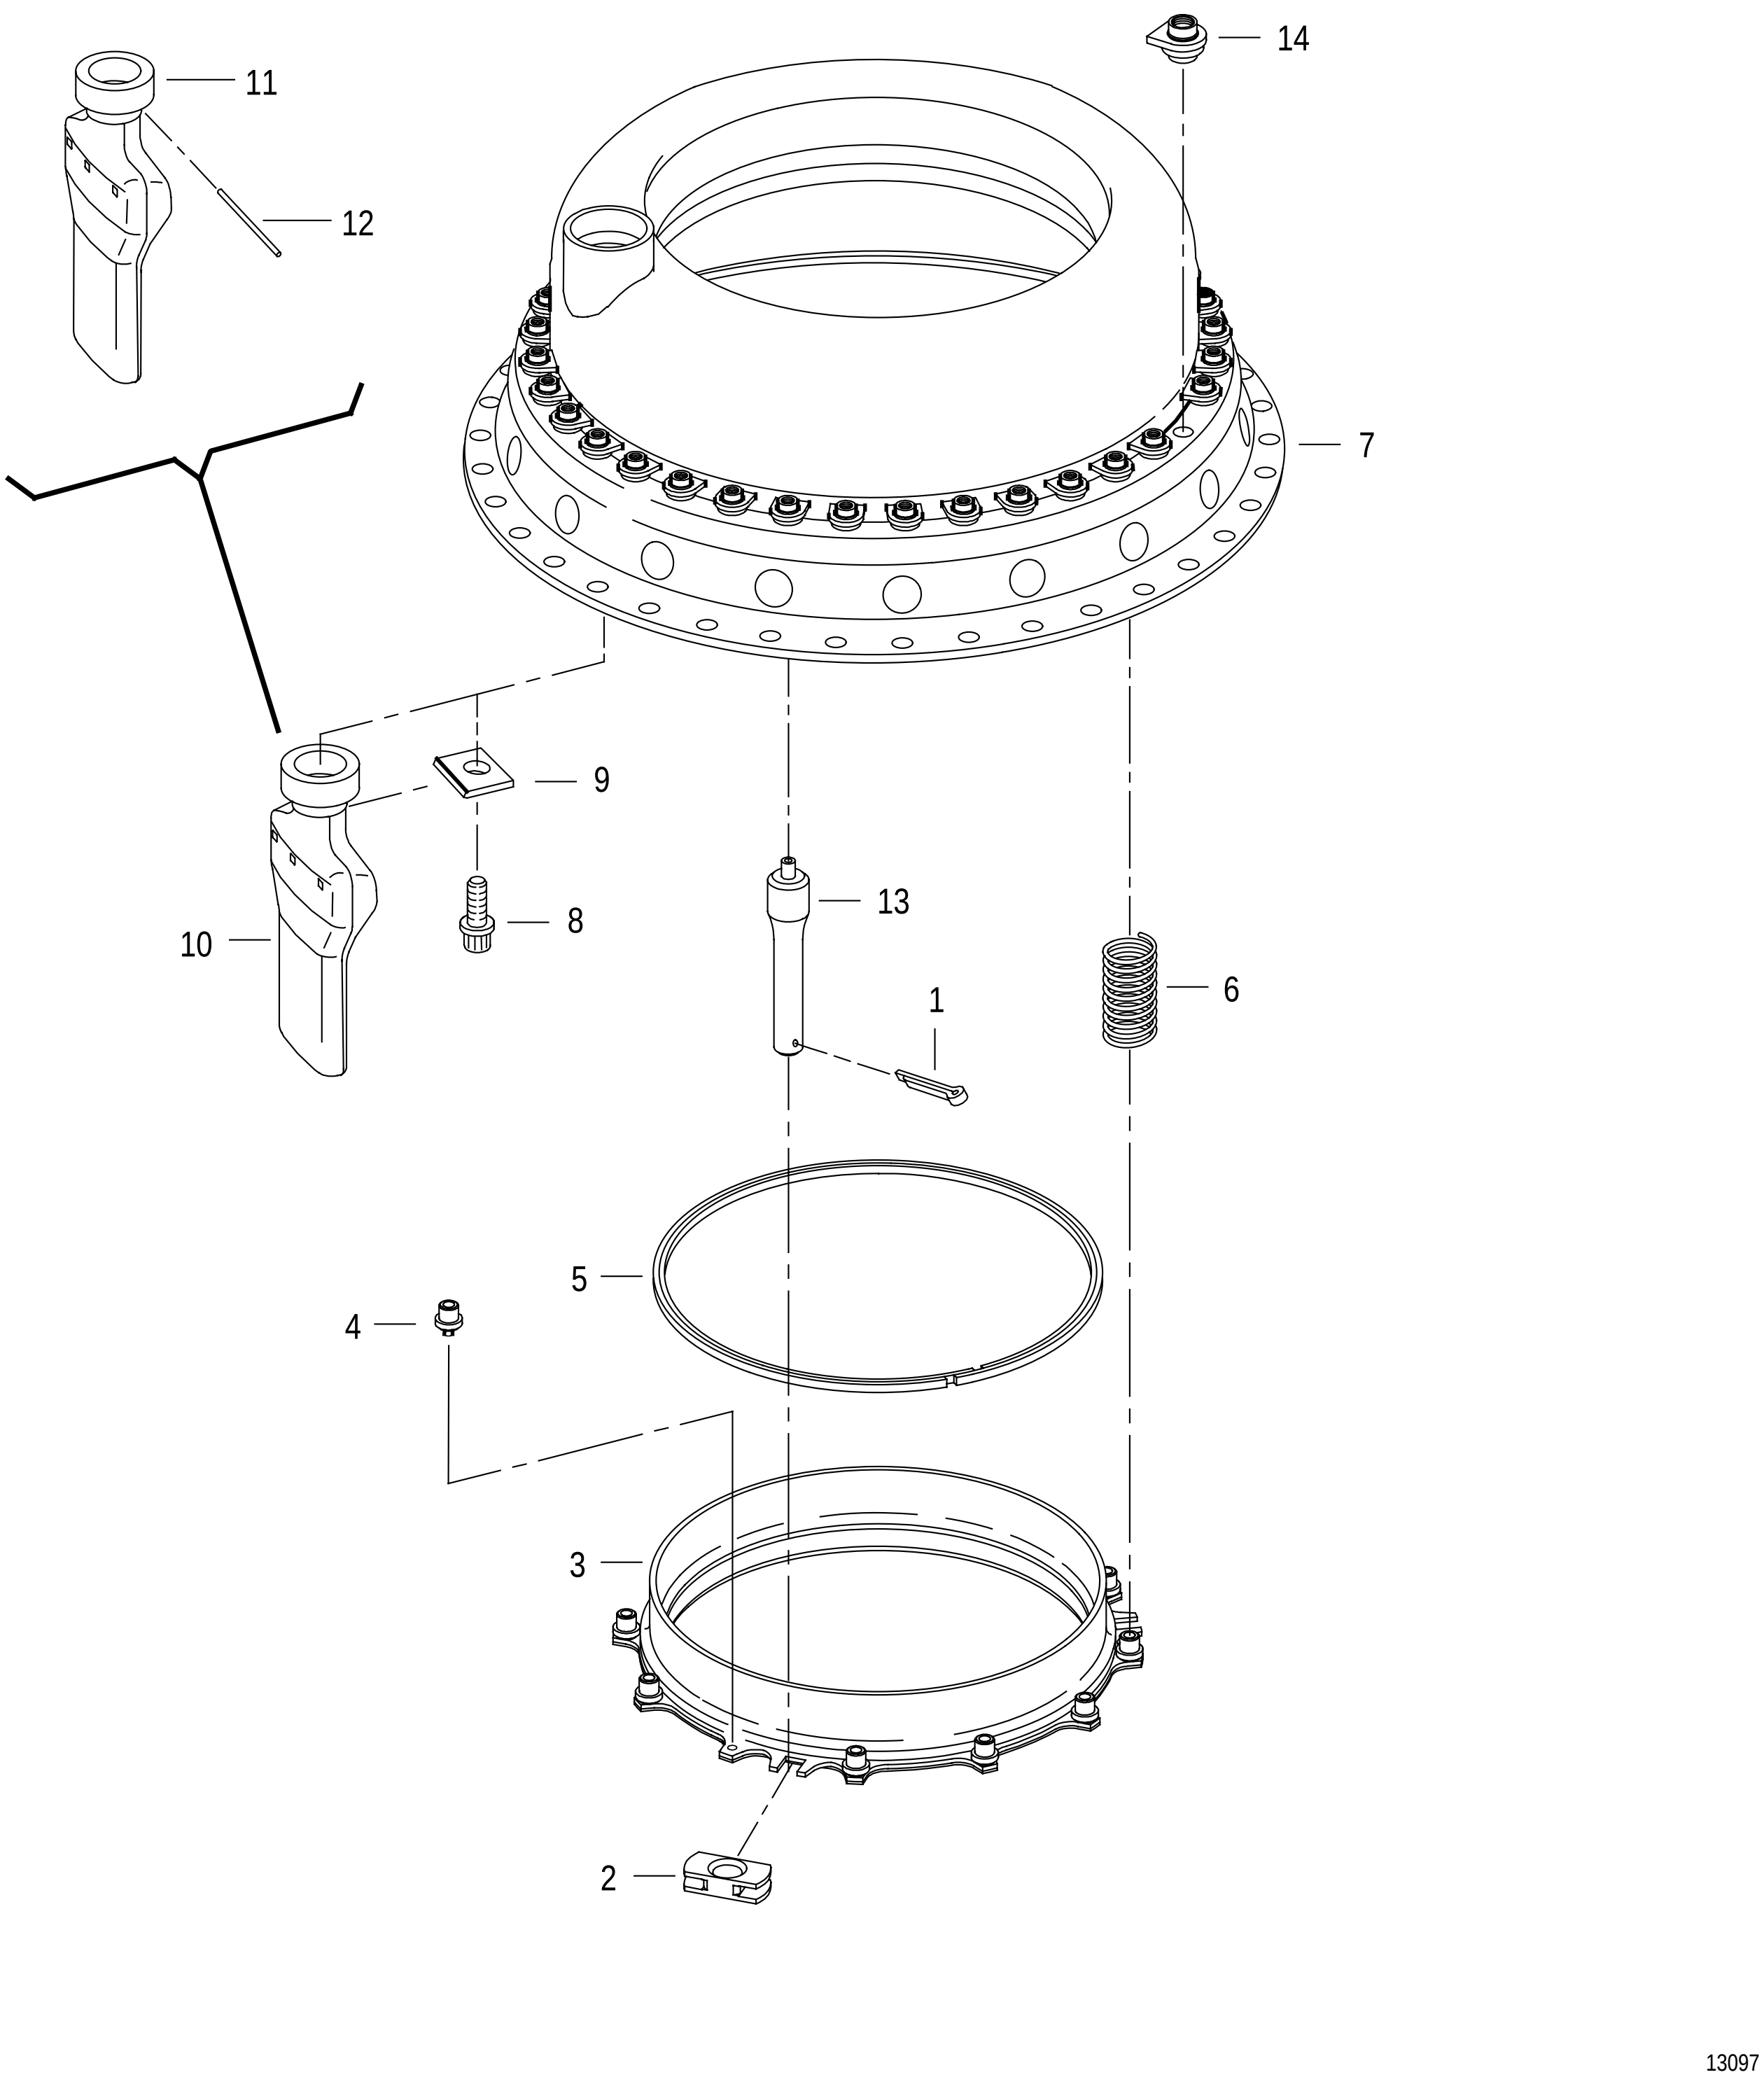


FIGURE 102. NO. 4 BEARING FRONT SEAL ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
102	4072348	52661	SEAL ASSY-NO. 4 BEARING FRONT . . . . SEE FIG. 89-2 FOR NHA	1		AFF
- 1	MS9245-23	96906	. PIN	3		PAOZZ
- 2	4035894	52661	. BUSHING-NO. 4 BEARING SEAL	3		PAFZZ
- 3	4035886	52661	. SEAL OPTION . . . . PROCUREMENT NO. CONSISTS OF	1		PAFLD
	4035882	52661	.. SEAL-FACE, NO. 4 BEARING, ASSY OF . . . . OPTIONAL TO 4035883	1		XA
	4035883	52661	.. SEAL-ASSY OF, FACE, NO. 4 BEARING . . . . OPTIONAL TO 4035882 PARTIAL BREAKDOWN FOLLOWS	1		XA
- 4	4009527	52661	... SEAT-HELICAL COMPRESSION SPRING	12		PAFZZ
- 5	% 4002454	52661	. SEAL RING-METAL . . . . 7.606 OD X 0.185 WIDE X 0.15325 IN. THK	1		PAFZZ
	4002454P10	52661	. SEAL RING-METAL . . . . 7.606 OD X 0.185 WIDE X 0.16325 IN. THK	AR		PAFZZ
	4002454P15	52661	. SEAL RING-METAL . . . . 7.606 OD X 0.185 WIDE X 0.16825 IN. THK	AR		PAFZZ
	4002454P20	52661	. SEAL RING-METAL . . . . 7.606 OD X 0.185 WIDE X 0.17325 IN. THK	AR		PAFZZ
	4002454P25	52661	. SEAL RING-METAL . . . . 7.606 OD X 0.185 WIDE X 0.17825 IN. THK	AR		PAFZZ
- 6	2146188	52661	. SPRING-HELICAL COMPRESSION . . . . 0.408 OD X 0.033 IN. DIA WIRE X 13.5 COILS	12		PAFZZ
- 7	= 4074882	52661	. SUPPORT-NO. 4 BEARING SEAL, FRONT, ASSY . . . OF	1		PAFLD
	= 4080082	52661	. SUPPORT-NO. 4 BEARING SEAL, FRONT, ASSY . . . OF PARTIAL BREAKDOWN FOLLOWS	1		PAFLD
- 8	4038010	52661	.. BOLT-MACHINE, DRILLED, DOUBLE HEX . . . . 0.190-32UNJF-3A X 0.375 IN. LONG USE ONLY ON 4074882	1		PAFZZ
- 9	4076772	52661	.. RETAINER-NO. 4 BEARING, SUMP . . . . USE ONLY ON 4074882	1		PADZZ
- 10	4068407	52661	.. SUMP-NO. 4 BEARING, ASSY OF . . . . USE ONLY ON 4074882	1		PADZZ
- 11	4053992	52661	.. SUMP-NO. 4 BEARING, ASSY OF . . . . USE ONLY ON 4080082	1		PADZZ
- 12	MS9390-200	96906	.. PIN (AP) . . . . USE ONLY ON 4080082	1		PAFZZ
- 13	4035860	52661	.. PIN-NO. 4 BEARING SEAL	3		PADZZ
- 14	4042812	52661	.. NUT OPTION . . . . SEE OPTION TABLE WHEN EXH USE 4078299	36		PAFZZ
	4078299	52661	.. NUT OPTION . . . . SEE OPTION TABLE	36		PAFZZ


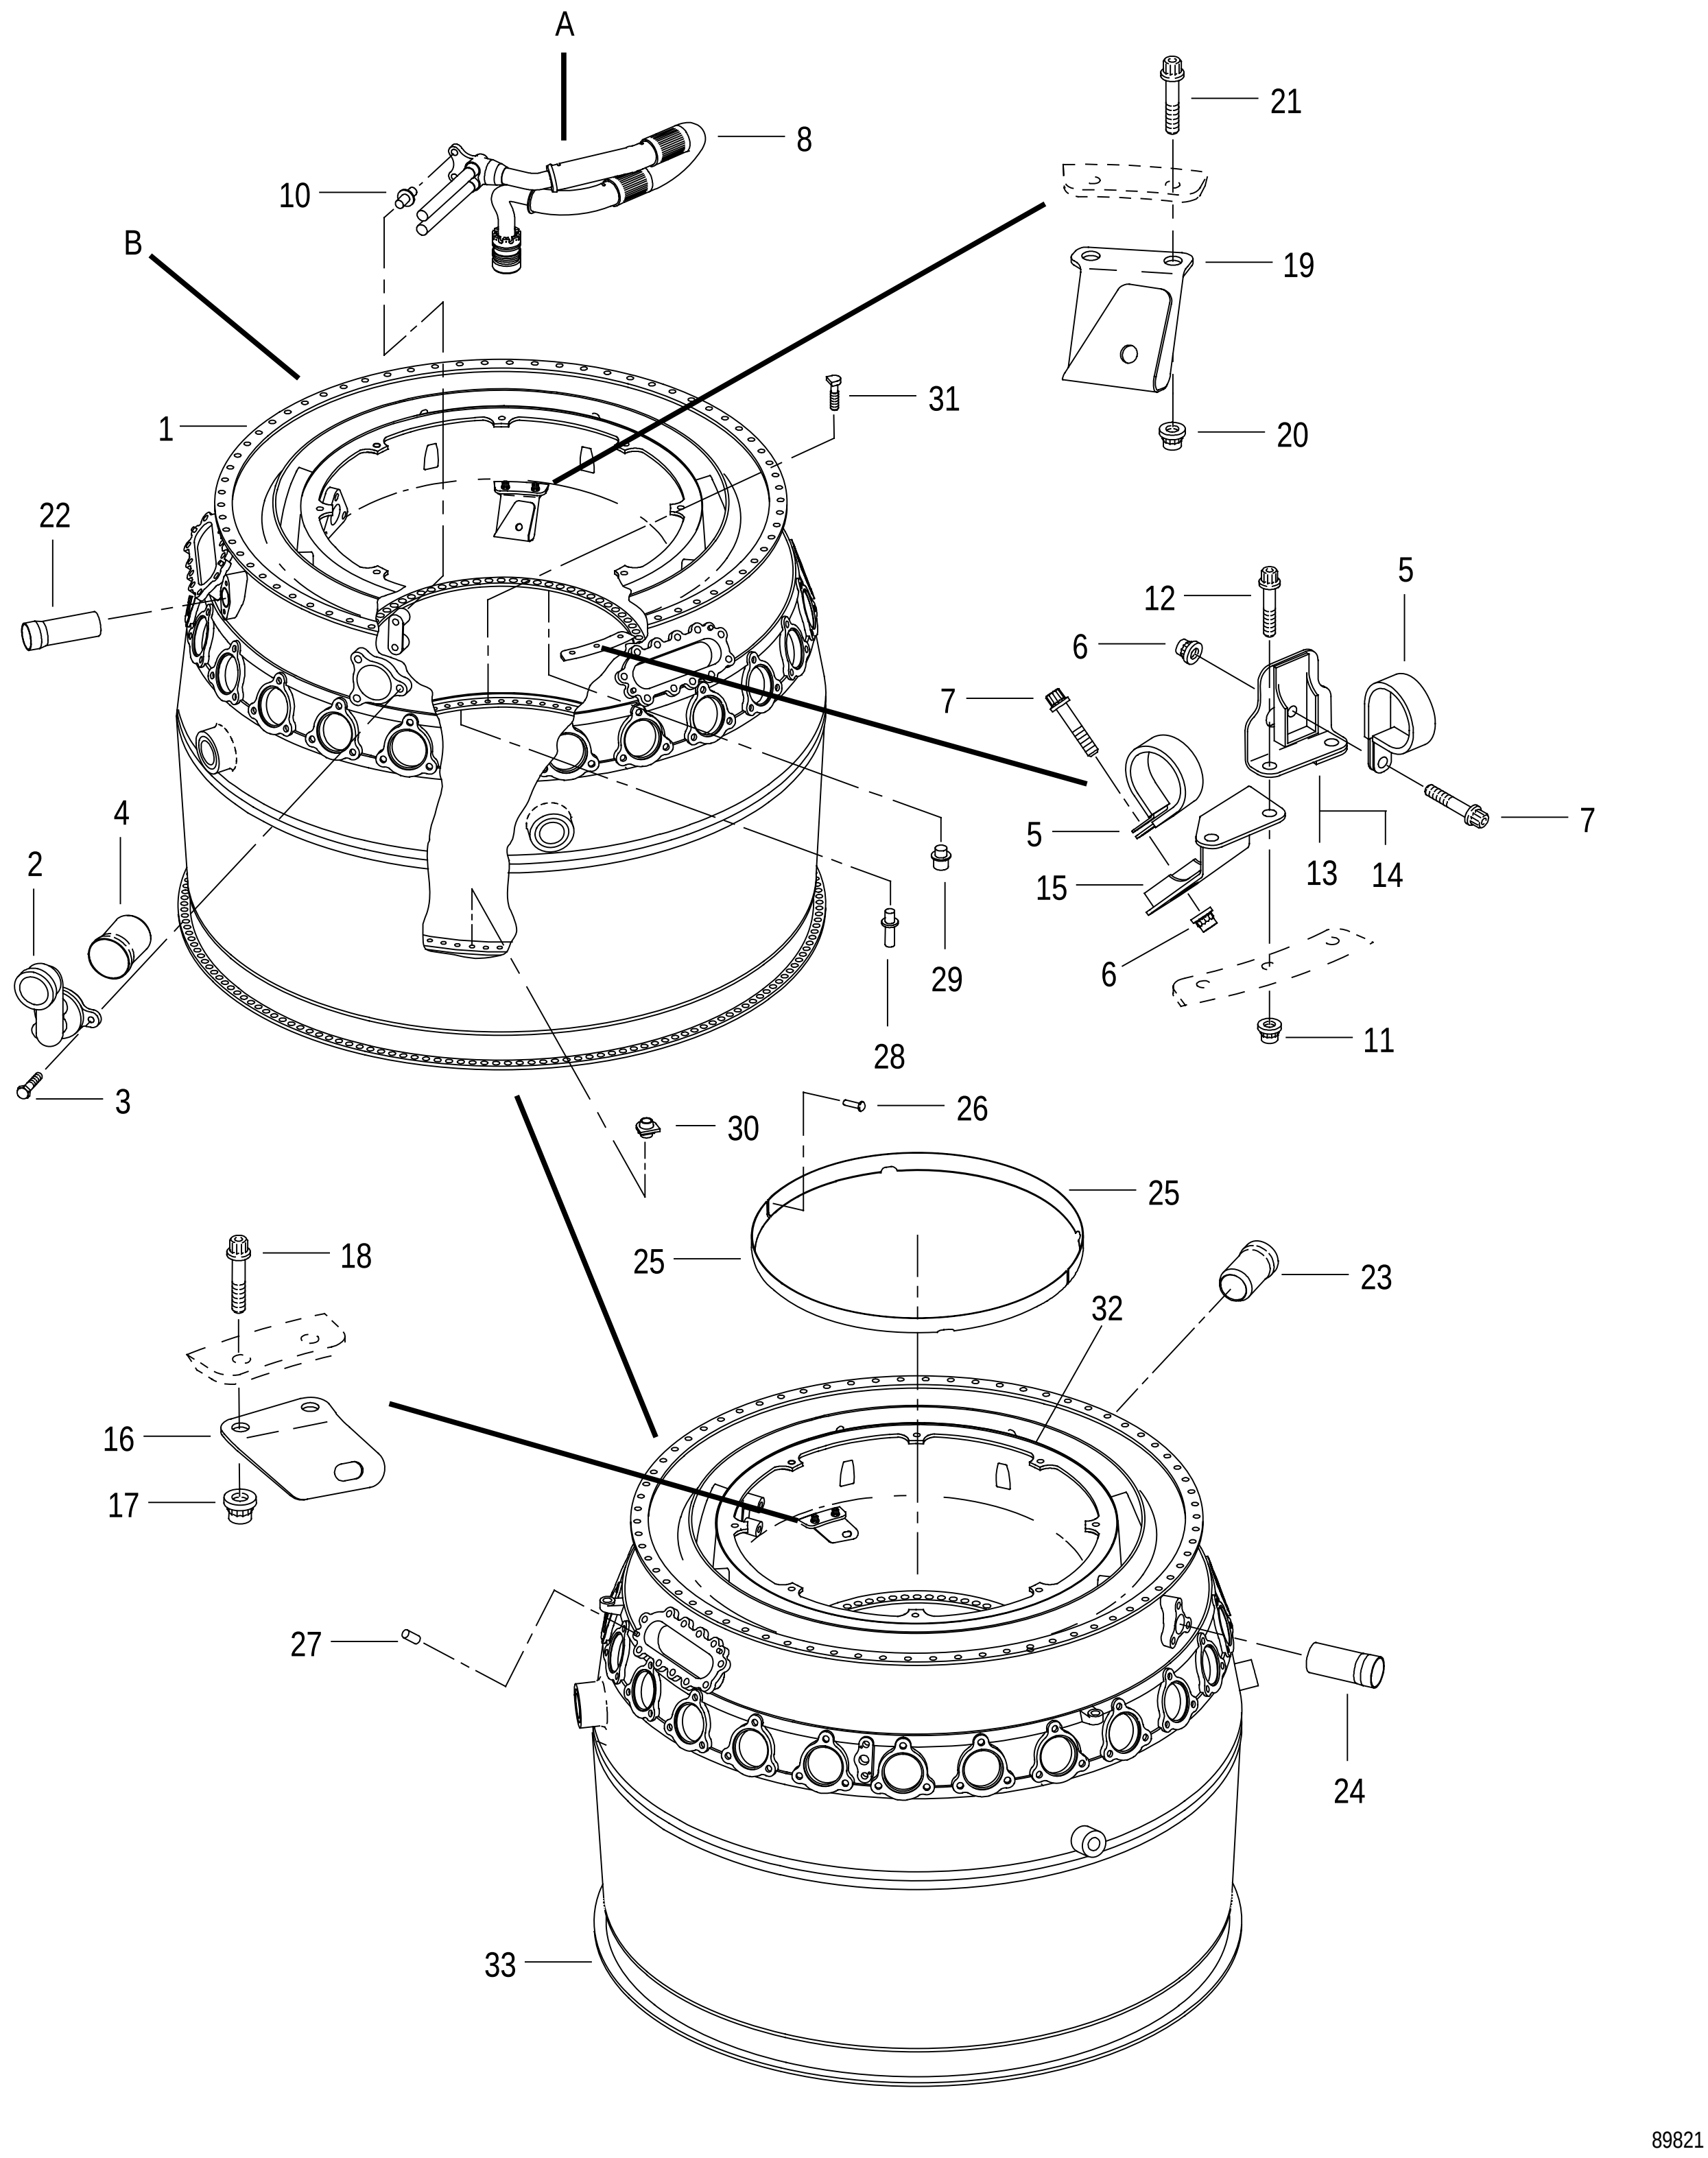


FIGURE 103. DIFFUSER CASE ASSY
(SHEET 1 OF 3)

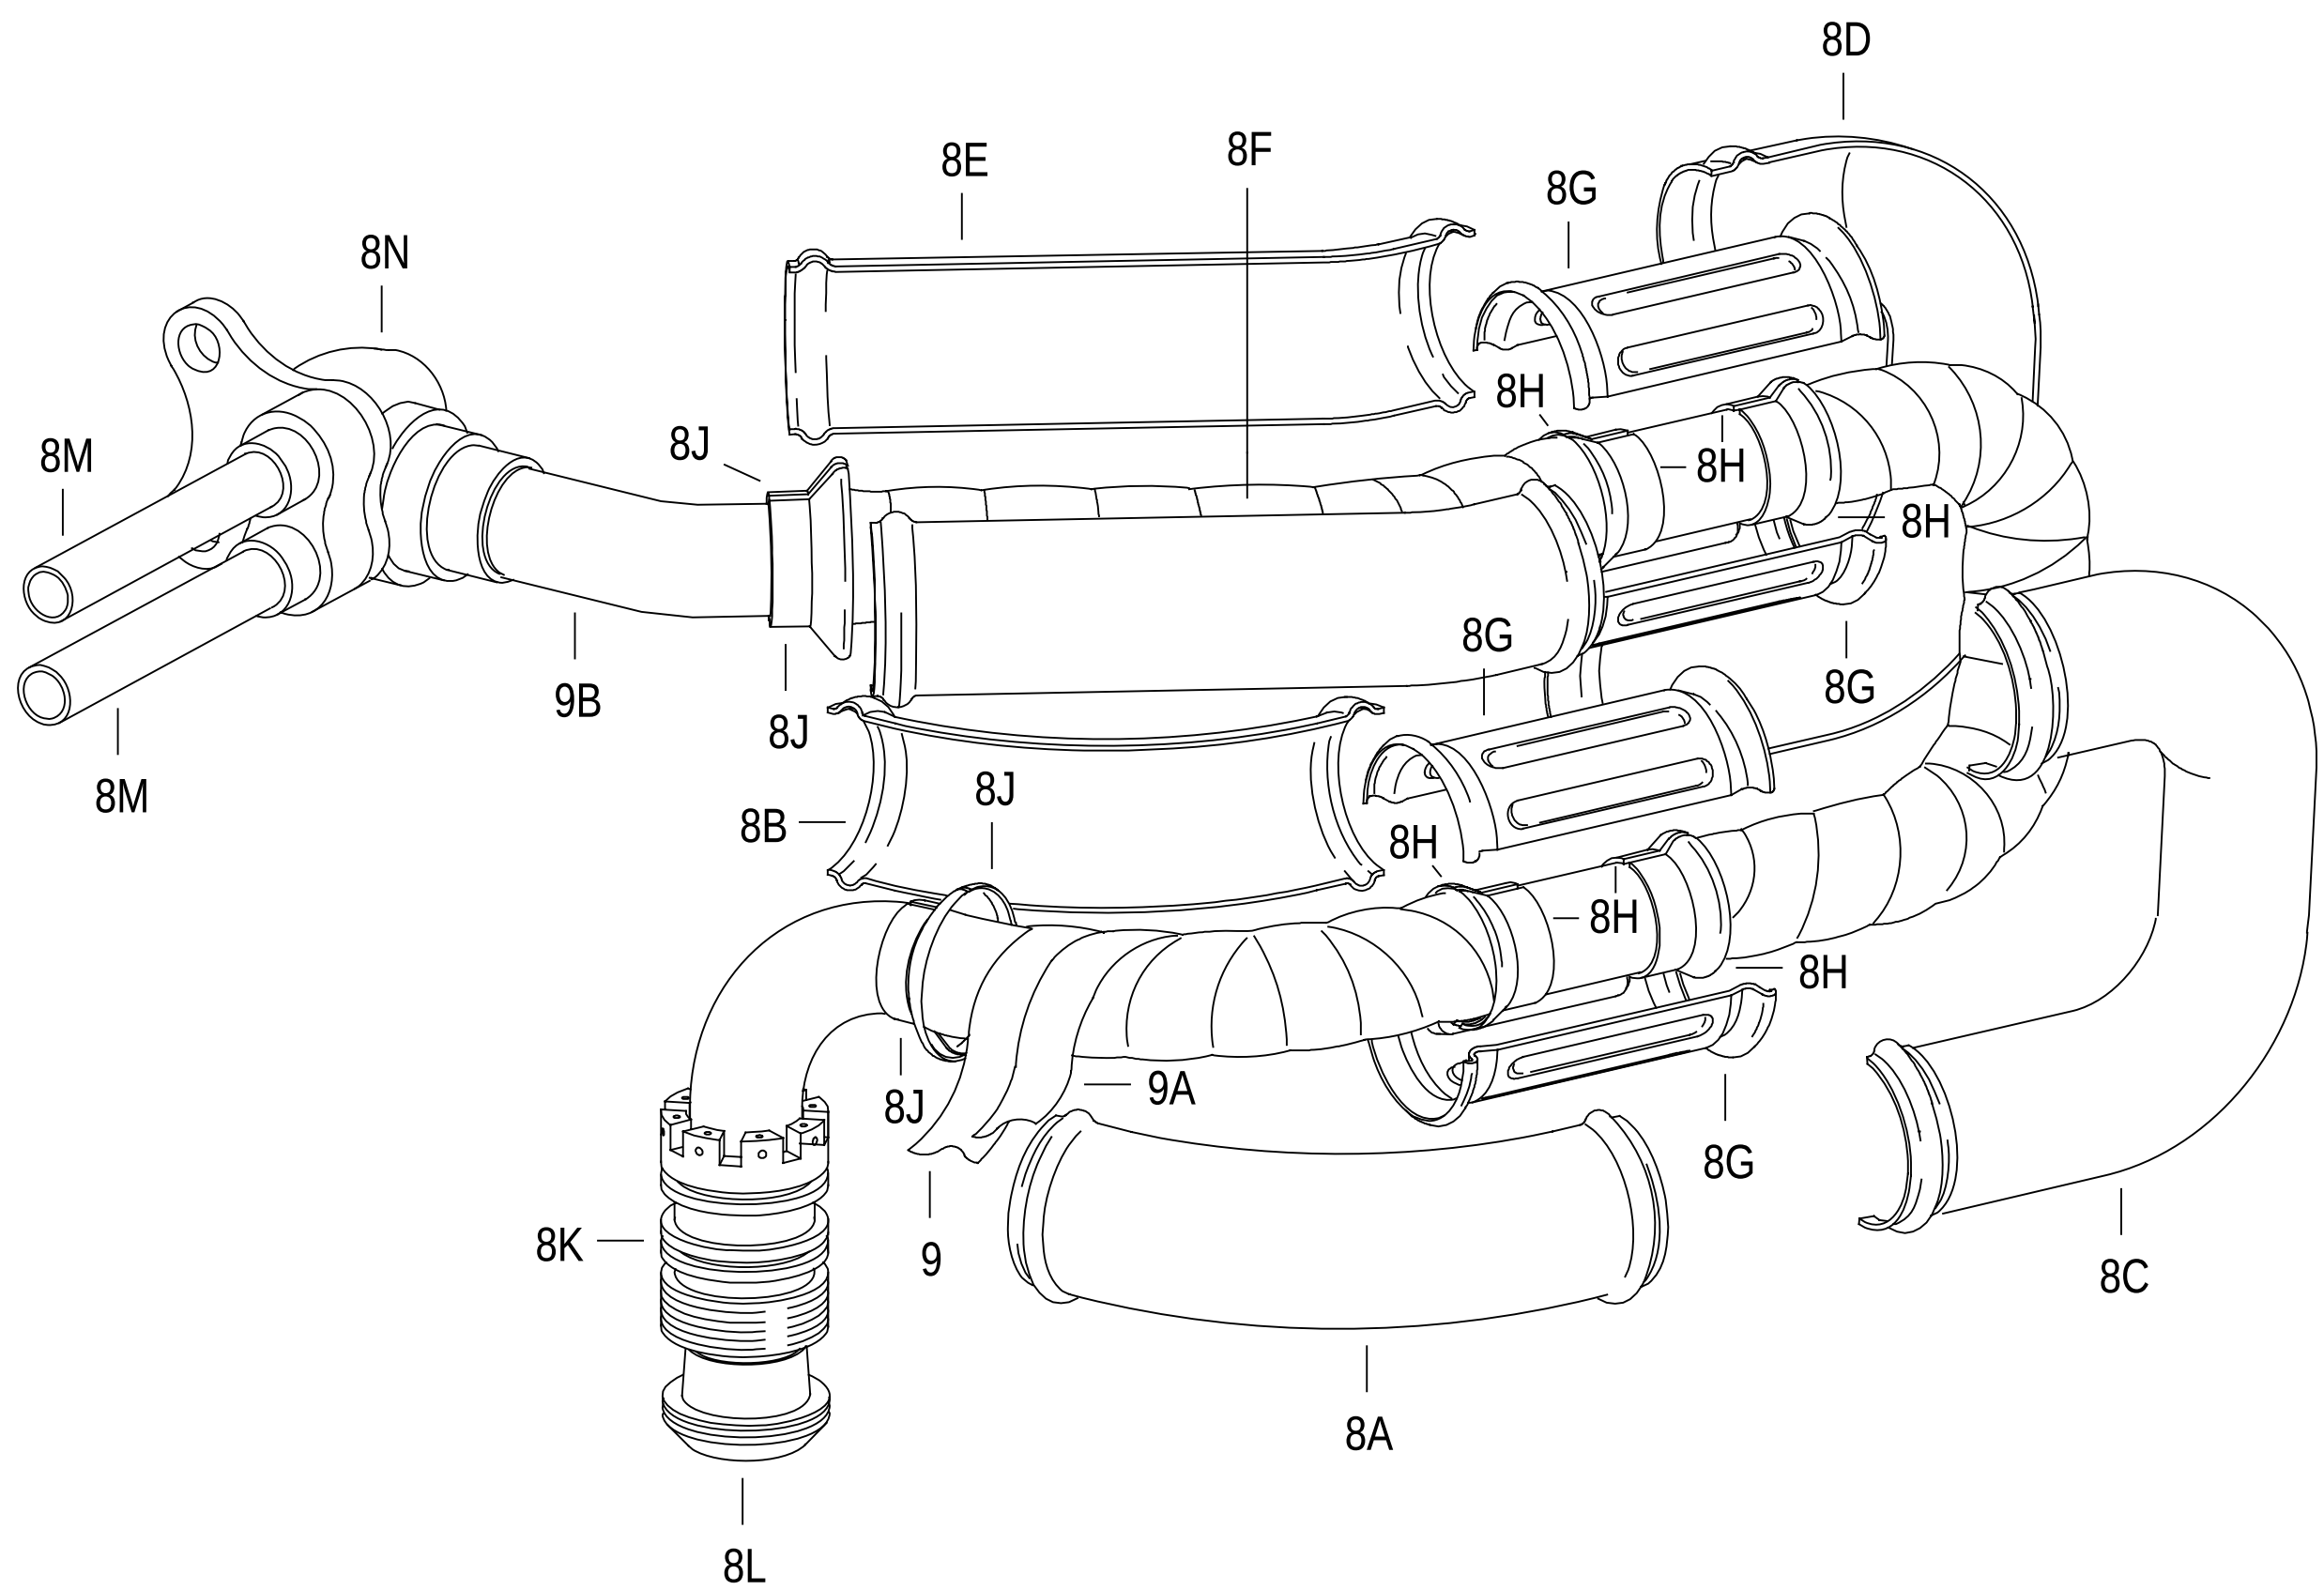

74194

FIGURE 103. DIFFUSER CASE ASSY
(SHEET 2 OF 3)

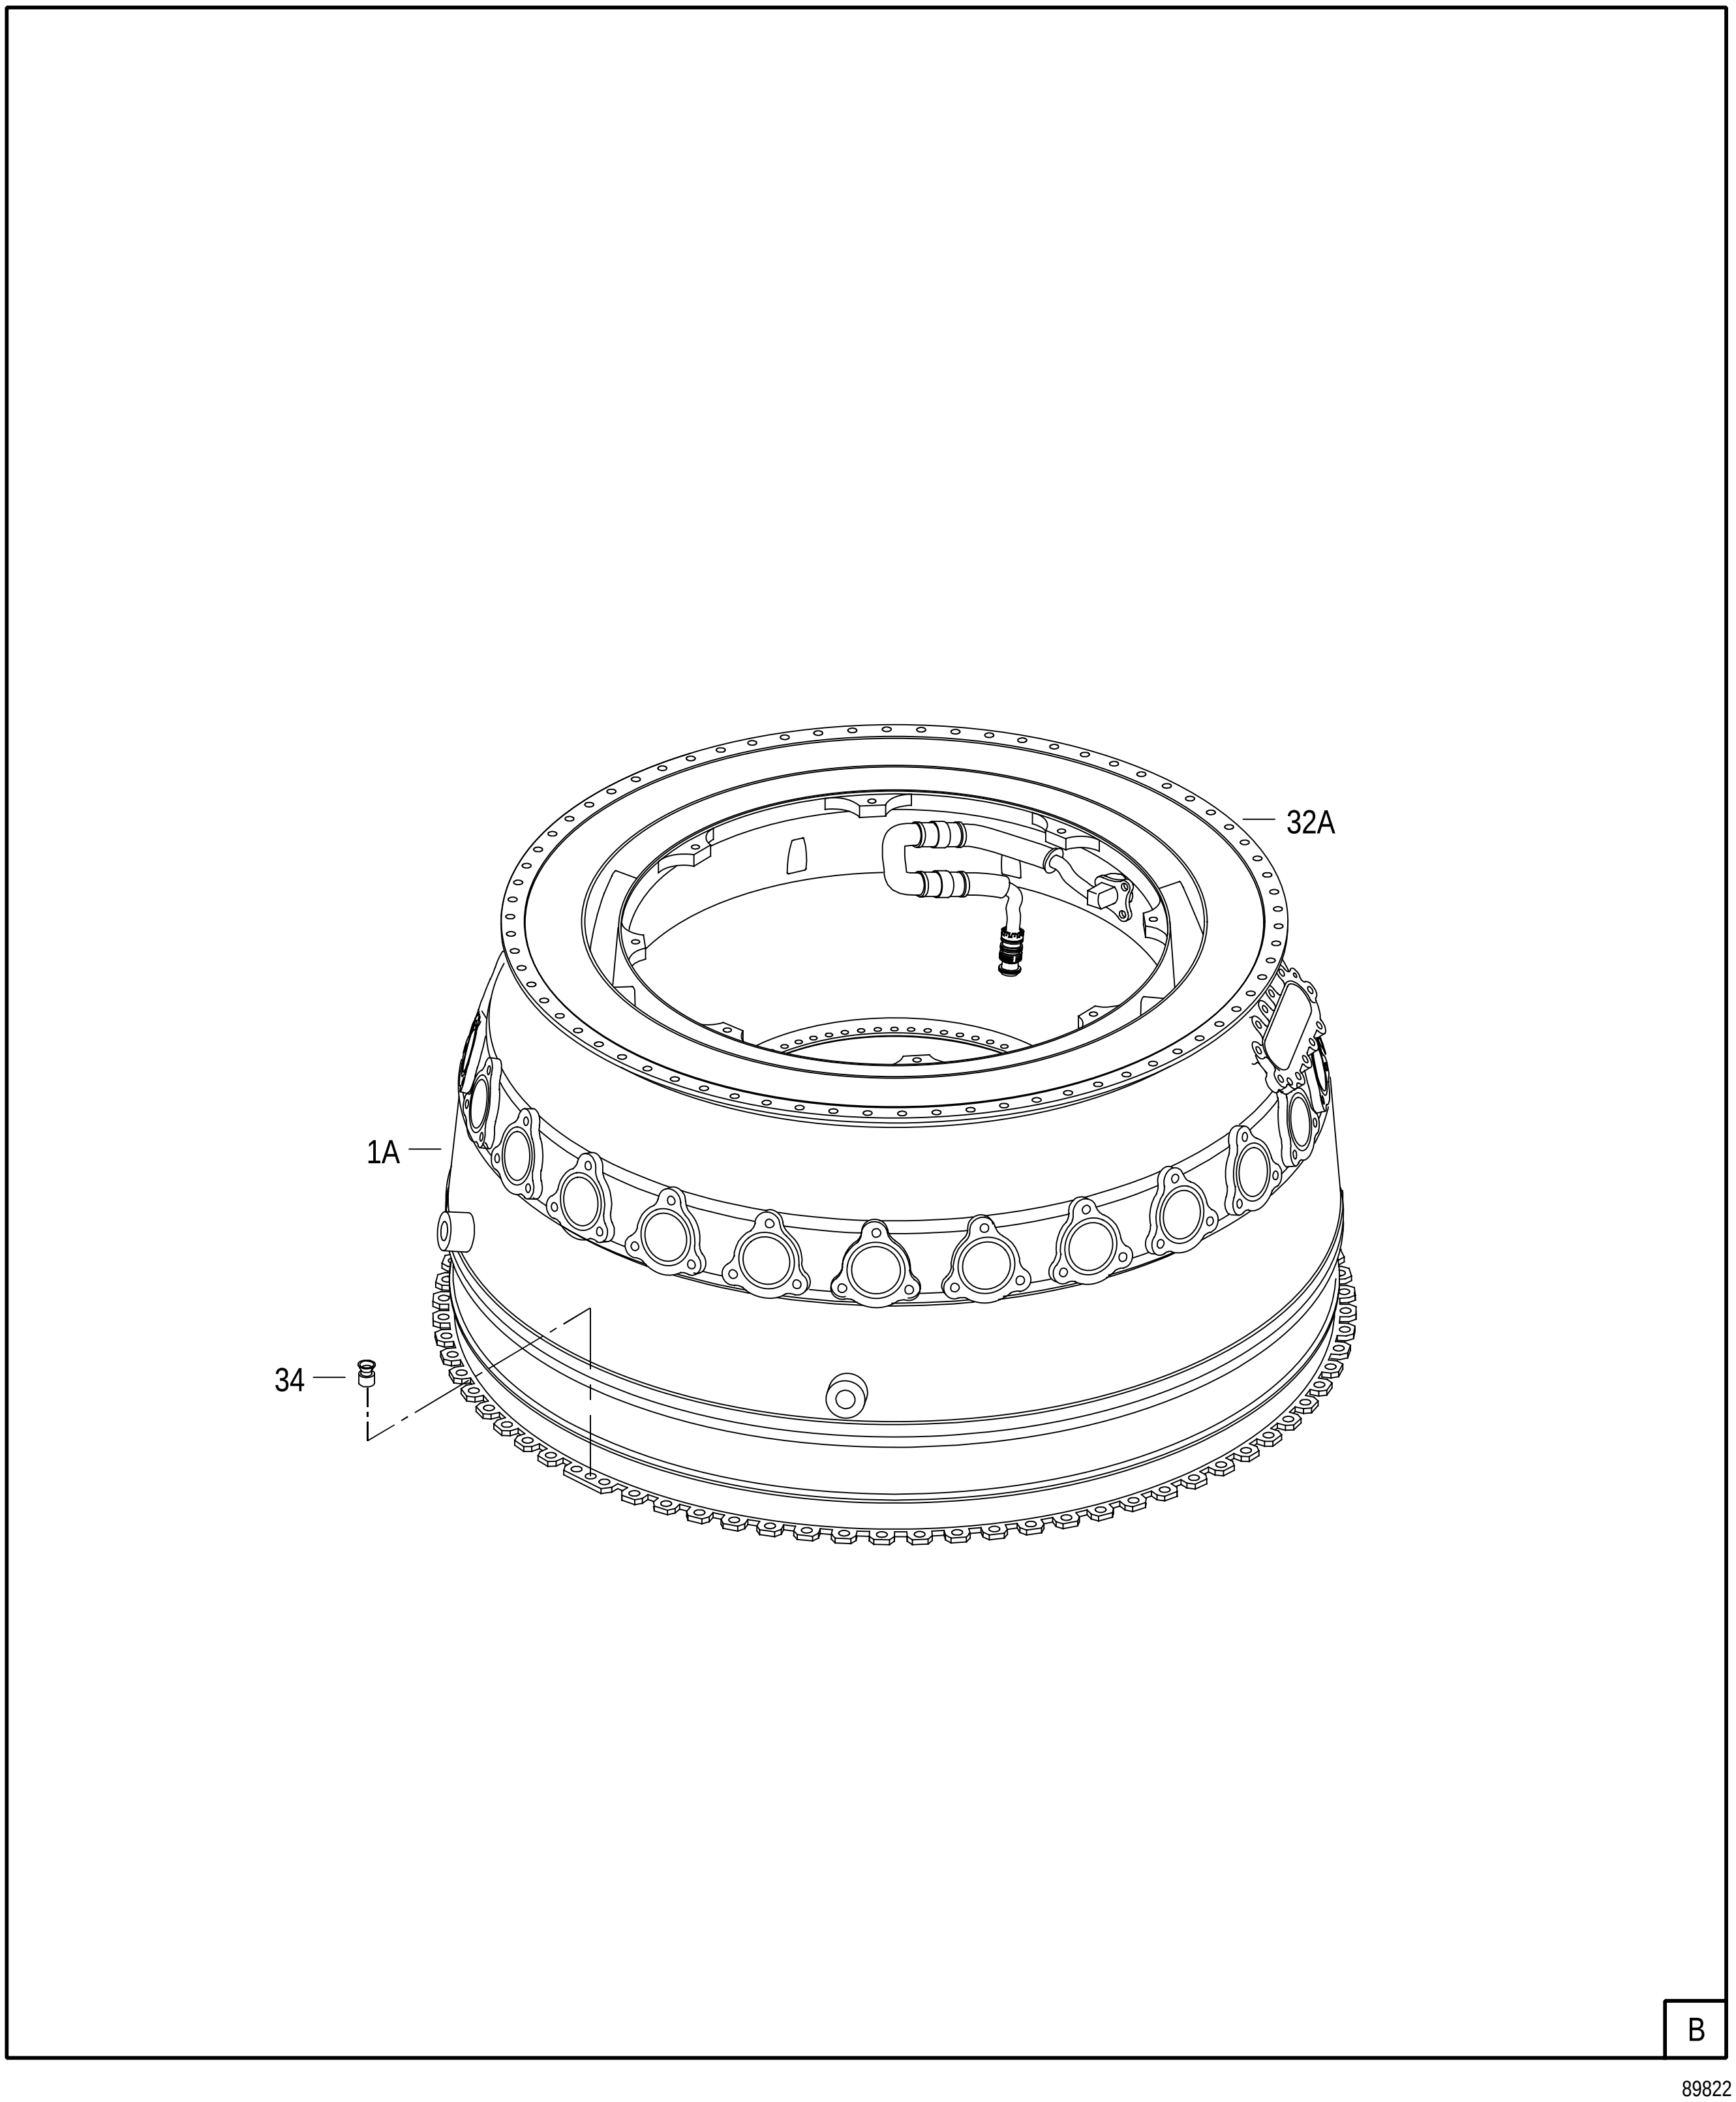


FIGURE 103. DIFFUSER CASE ASSY
(SHEET 3 OF 3)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	103 - 1	4075716	52661	CASE-DIFFUSER, ASSY OF	1	Q	PAFDD
R				REPLACED BY 4084235			
				SEE FIG. 89-69 FOR NHA			
		4079134	52661	CASE-DIFFUSER, ASSY OF	1	R/CY	PAFDD
R				REPLACED BY 4083913			
				SEE FIG. 89-69 FOR NHA			
		4079831	52661	CASE-DIFFUSER, ASSY OF	1	CZ	PAFDD
R				REPLACED BY 4084234			
				SEE FIG. 89-69 FOR NHA			
R		4084235	52661	CASE-DIFFUSER, ASSY OF	1		PAFDD
R				REPLACES 4075716			
R				SEE FIG. 89-69 FOR NHA			
R		4083913	52661	CASE-DIFFUSER, ASSY OF	1		PAFDD
R				REPLACES 4079134			
R				SEE FIG. 89-69 FOR NHA			
R		4084234	52661	CASE-DIFFUSER, ASSY OF	1		PAFDD
R				REPLACES 4079831			
R				SEE FIG. 89-69 FOR NHA			
	- 1A	4083830	52661	CASE-DIFFUSER, ASSY OF	1		PAFDD
				USE ONLY ON 4084522-800 AND 4082654-803			
R				REPLACED BY 4084237			
				SEE FIG. 89-70 FOR NHA			
		4083558	52661	CASE-DIFFUSER, ASSY OF	1		PAFDD
				USE ONLY ON 4084522-801			
				SEE FIG. 89-70 FOR NHA			
		4084237	52661	CASE-DIFFUSER, ASSY OF	1		PAFDD
R				USE ONLY ON 4084522-800, 4082654-803, AND			
R				4082657-808			
R				REPLACES 4083830			
				SEE FIG. 89-70 FOR NHA			
		4083564	52661	CASE-DIFFUSER, ASSY OF	1		PAFDD
				USE ONLY ON 4084522-802			
				SEE FIG. 89-70 FOR NHA			
				PARTIAL BREAKDOWN FOLLOWS			
	- 2	4069179	52661	. CONNECTOR-NO. 4 BEARING	1		PAFZZ
	- 3	ST2151-020	52661	. BOLT-MACHINE, DRILLED DOUBLE HEX	3		PAFZZ
				0.190-32UNJF-3A X 0.625 IN. LONG (AP)			
	- 4	4069149	52661	. TUBE-DIFFUSER CASE SEAL	1		PAFZZ
	- 5	2108637	52661	. CLAMP-LOOP	2		PAFZZ
				1.000 IN. ID			
	- 6	4066226	52661	. NUT OPTION (AP)	1		PAFZZ
				SEE OPTION TABLE			
	- 7	MS9696-07	96906	. BOLT (AP)	1		PAFZZ
				REPLACES MS9696-06			
	- 8	= 4072991-01	52661	. TUBE-SCAVENGE, NO. 4 BEARING INTERNAL, ...	1		PADDD
				ASSY OF			
		= 4081460-01	52661	. TUBE-SCAVENGE, NO. 4 BEARING INTERNAL, ...	1		PADDD
				ASSY OF			
	- 8A	4072993	52661	.. SHIELD-HEAT, NO. 4 BEARING SCAVENGE TUBE .	1		PAFZZ
	- 8B	4072992	52661	.. SHIELD-HEAT, NO. 4 BEARING SCAVENGE TUBE .	1		PAFZZ
	- 8C	4069630	52661	.. SHIELD-HEAT, NO. 4 BEARING SCAVENGE TUBE .	1		PAFZZ
	- 8D	4069638	52661	.. SHIELD-HEAT, NO. 4 BEARING SCAVENGE TUBE .	1		PAFZZ
	- 8E	4069636	52661	.. SHIELD-HEAT, NO. 4 BEARING SCAVENGE TUBE .	1		PAFZZ
	- 8F	4069629	52661	.. SHIELD-HEAT, NO. 4 BEARING SCAVENGE TUBE .	1		PAFZZ
	- 8G	4069632	52661	.. SLEEVE-HALF, CONVOLUTED	4		PADZZ
				0.750 TUBE X 1.740 IN. LONG			
	- 8H	ST2182-12	52661	.. SPACER-HEATSHIELD	8		PADZZ
	- 8J	ST2180-12	52661	.. SPACER-HEATSHIELD	4		PADZZ
	- 8K	4053767	52661	.. RING-EXTERNALLY THREADED	1		PADZZ
				1.1875-12UNJF-3A X 1.680 IN. THK			
	- 8L	4036617	52661	.. FERRULE-TUBE FITTING	1		PADZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	103 - 8M	4069628	52661	.. TUBE-TRANSFER . . . . 0.500 X 0.035 X 5.147 IN. LONG	2		PADLD
R	- 8N	4069627	52661	.. CONNECTOR-TUBE, NO. 4 BEARING	1		PADLD
R	- 9	2072968	52661	.. TAPE-INSULATION, THERMAL . . . . 0.500 WIDE X 0.125 IN. THK	AR		PAFZZ
R	- 9A	2161929	52661	.. TAPE OPTION . . . . SEE OPTION TABLE	AR		PAFZZ
R	- 9B	4072991-02	52661	.. TUBE . . . . USE ONLY ON 4072991-01	1		PADLD
R		4081460-02	52661	.. TUBE . . . . USE ONLY ON 4081460-01	1		PADLD
	- 10	4036723	52661	. PIN-SHOULDER, HEADLESS . . . . 0.25045 AND 0.500 DIA X 0.825 IN. LONG	2		PADZZ
	- 11	4066226	52661	. NUT OPTION . . . . SEE OPTION TABLE	3		PAFZZ
	- 12	MS9696-07	96906	. BOLT	3		PAFZZ
	- 13	4069633	52661	. BRACKET-ANGLE, ASSY OF . . . . PARTIAL BREAKDOWN FOLLOWS	1		PAFZZ
	- 14	4069634-01	52661	.. BRACKET-LOOP CLAMP, ASSY OF	1		PAFZZ
	- 15	4070793	52661	. BRACKET-LOOP CLAMP, ASSY OF	1		PAFZZ
	- 16	4070087	52661	. BRACKET-LOOP CLAMP	1		PAFZZ
	- 17	4066226	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAFZZ
	- 18	MS9696-05	96906	. BOLT (AP)	2		PAFZZ
	- 19	4069169	52661	. BRACKET-LOOP CLAMP	1		PAFZZ
	- 20	4066226	52661	. NUT OPTION (AP) . . . . SEE OPTION TABLE	2		PAFZZ
	- 21	MS9696-05	96906	. BOLT (AP)	2		PAFZZ
	- 22	4069146	52661	. TUBE-DIFFUSER CASE SEAL	1		PAFZZ
	- 23	4069148	52661	. TUBE-DIFFUSER CASE SEAL	1		PAFZZ
	- 24	4069147	52661	. TUBE-DIFFUSER CASE SEAL	1		PAFZZ
	- 25	4071404	52661	. RETAINER-DIFFUSER	2		PAFZZ
	- 26	AN123320	88044	. RIVET (AP)	6		PAFZZ
	- 27	MS9389-80	96906	. PIN	4		PAFZZ
	- 28	4045421	52661	. PIN-SHOULDER, HEADLESS . . . . 0.197 AND 0.365 DIA X 0.830 IN. LONG	1		PAFZZ
	- 29	4069865	52661	. PIN-SHOULDER, HEADLESS . . . . 0.250 AND 0.31155 DIA X 0.465 IN. LONG	1		PAFZZ
	- 30	4069778	52661	. NUT OPTION . . . . SEE OPTION TABLE USE ONLY ON 4075716 AND 4079134	4	CY	PAFZZ
		4079798	52661	. NUT OPTION . . . . SEE OPTION TABLE USE ONLY ON 4079831	4	CZ	PAFZZ
	- 31	4076478	52661	. BOLT-EXTERNALLY RELIEVED BODY, DEE . . . . 0.3125-24UNJF-3A X 1.195 IN. LONG	37		PAFZZ
	- 32	4075717	52661	. CASE-DIFFUSER	1		XA
R R R	- 32A	4083212	52661	. CASE-DIFFUSER . . . . USE ONLY ON 4083830, 4083558, 4083564, AND 4084237	1		PADDD
	- 33	4076049	52661	. CASE OPTION . . . . SEE OPTION TABLE	1		PADDD
R R R R	- 34	4083925	52661	. PIN-SHOULDER, HEADLESS . . . . 0.3127 AND 0.3675 X 0.680 IN. LONG USE ONLY ON 4083830, 4083558, 4083564, AND 4084237	1		PAFZZ

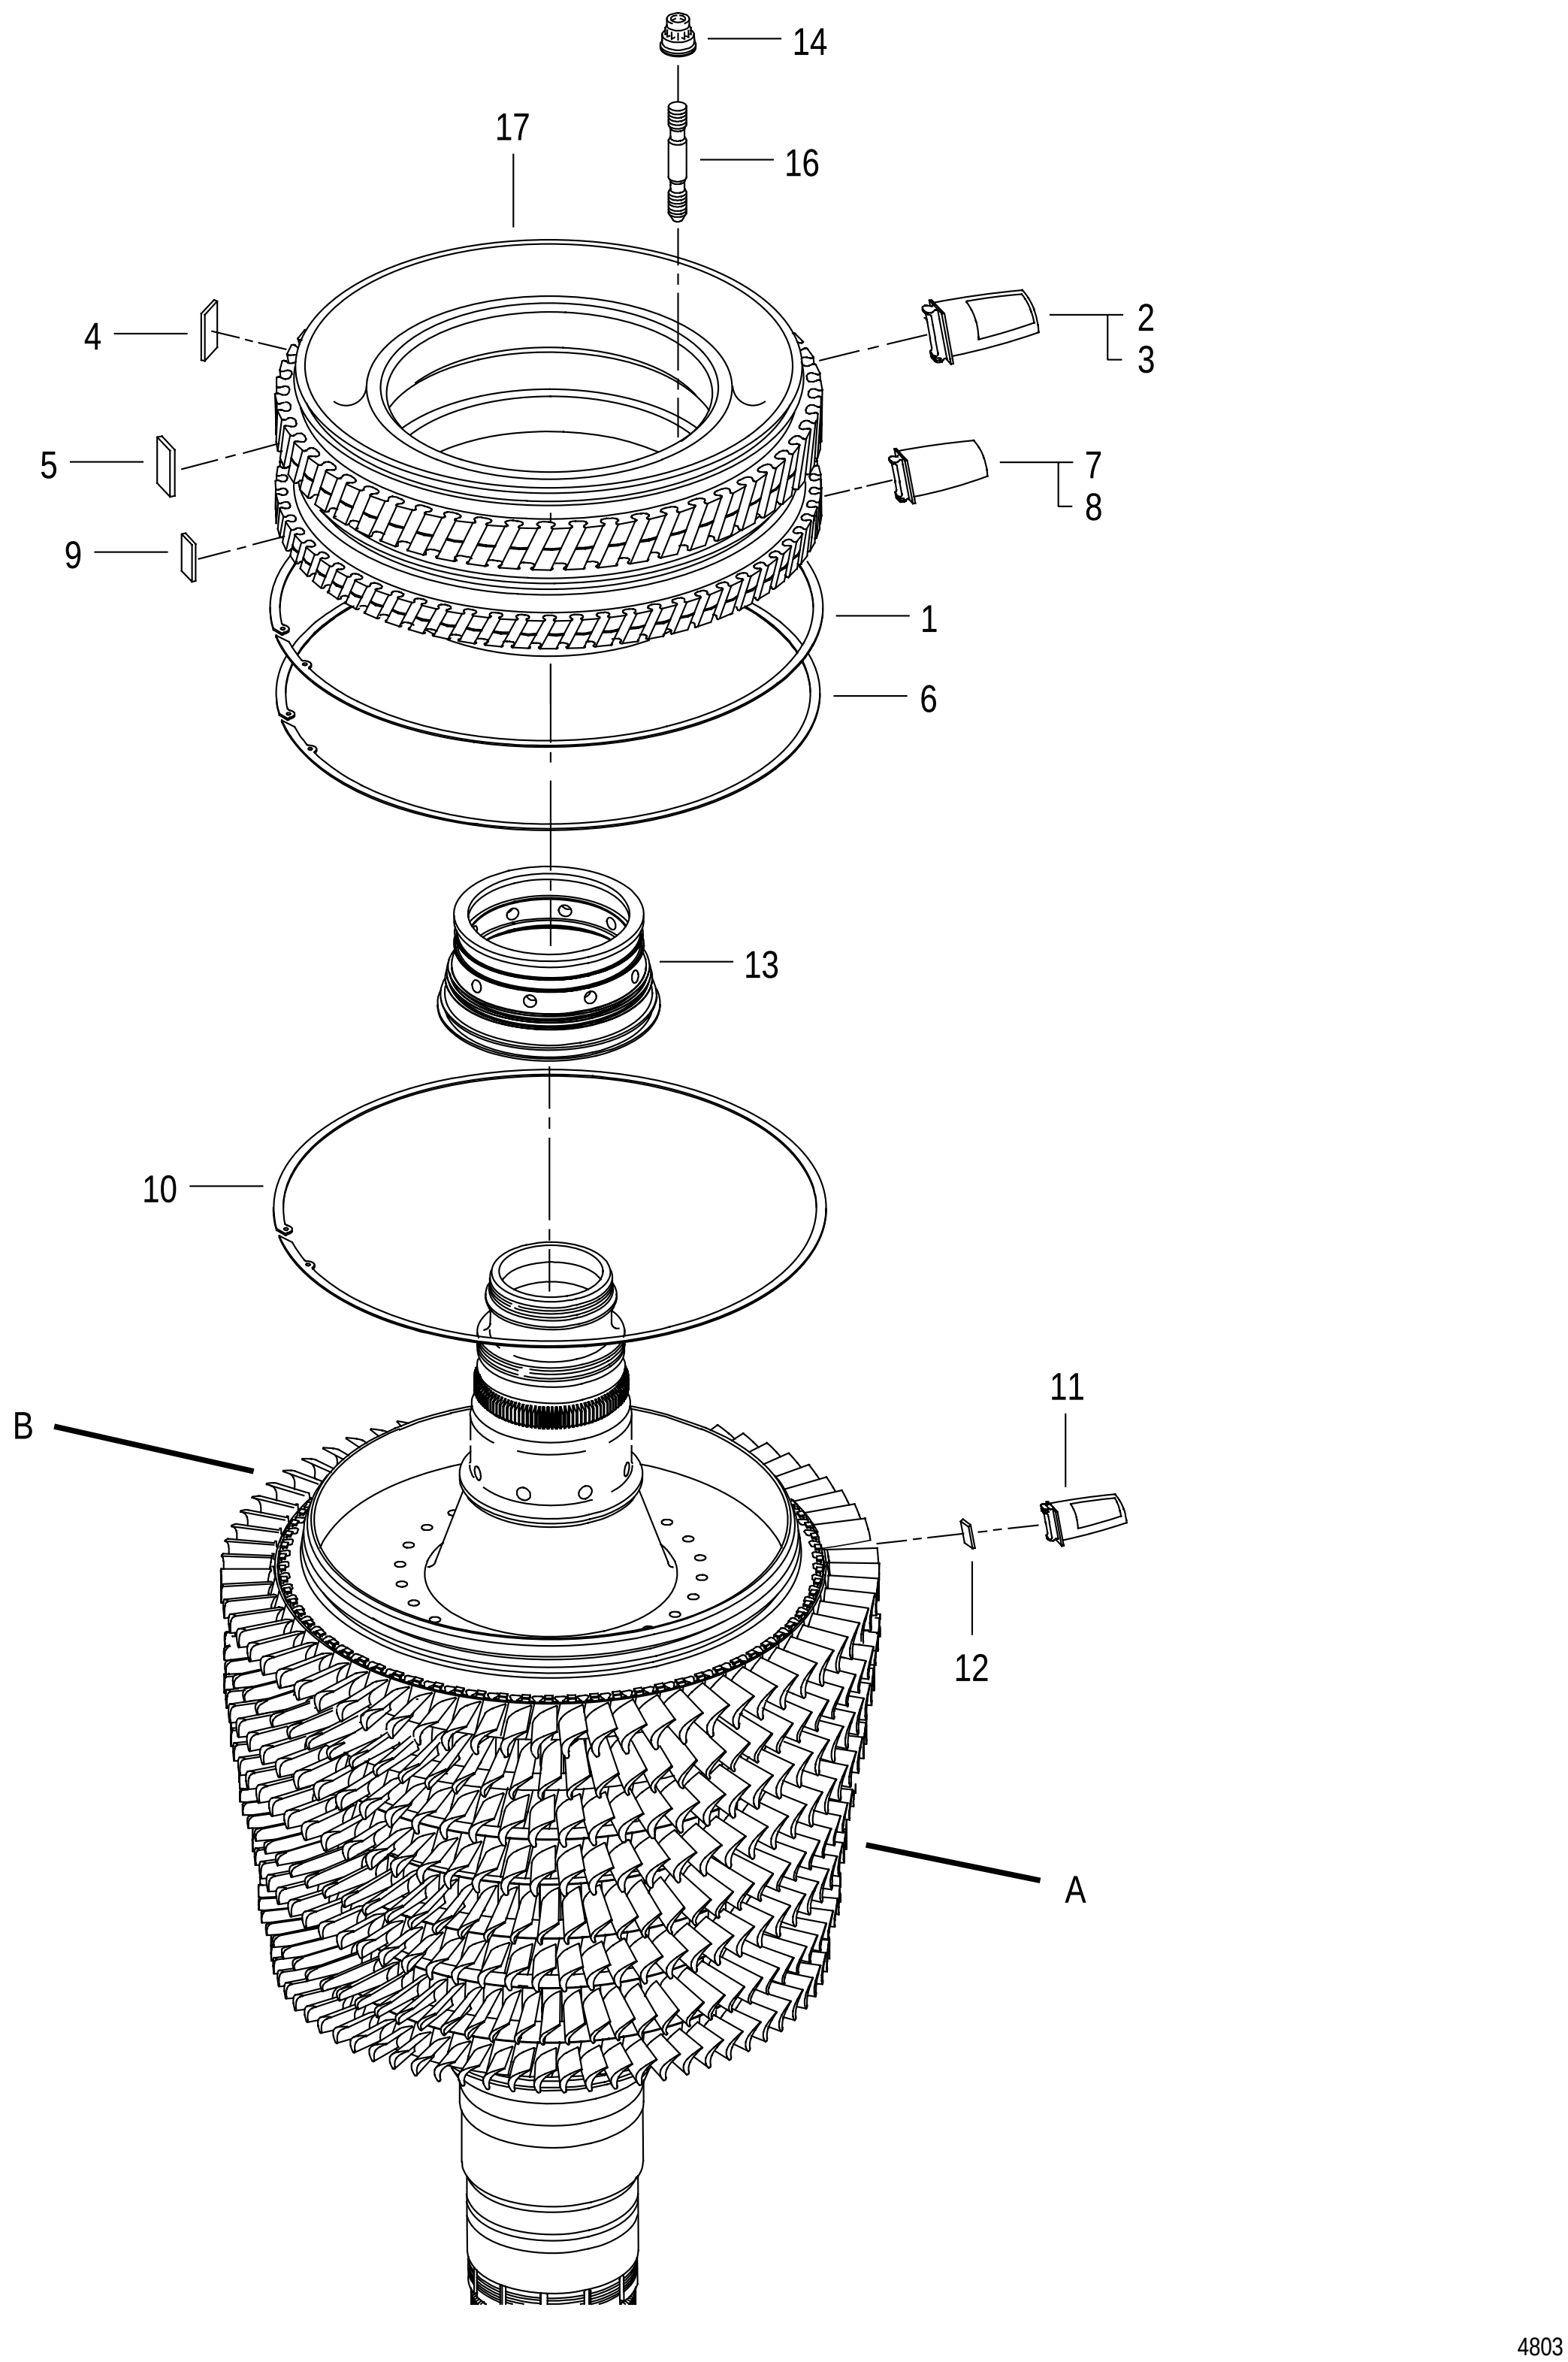


FIGURE 104. AXIAL COMPRESSOR ROTOR ASSY
(SHEET 1 OF 3)

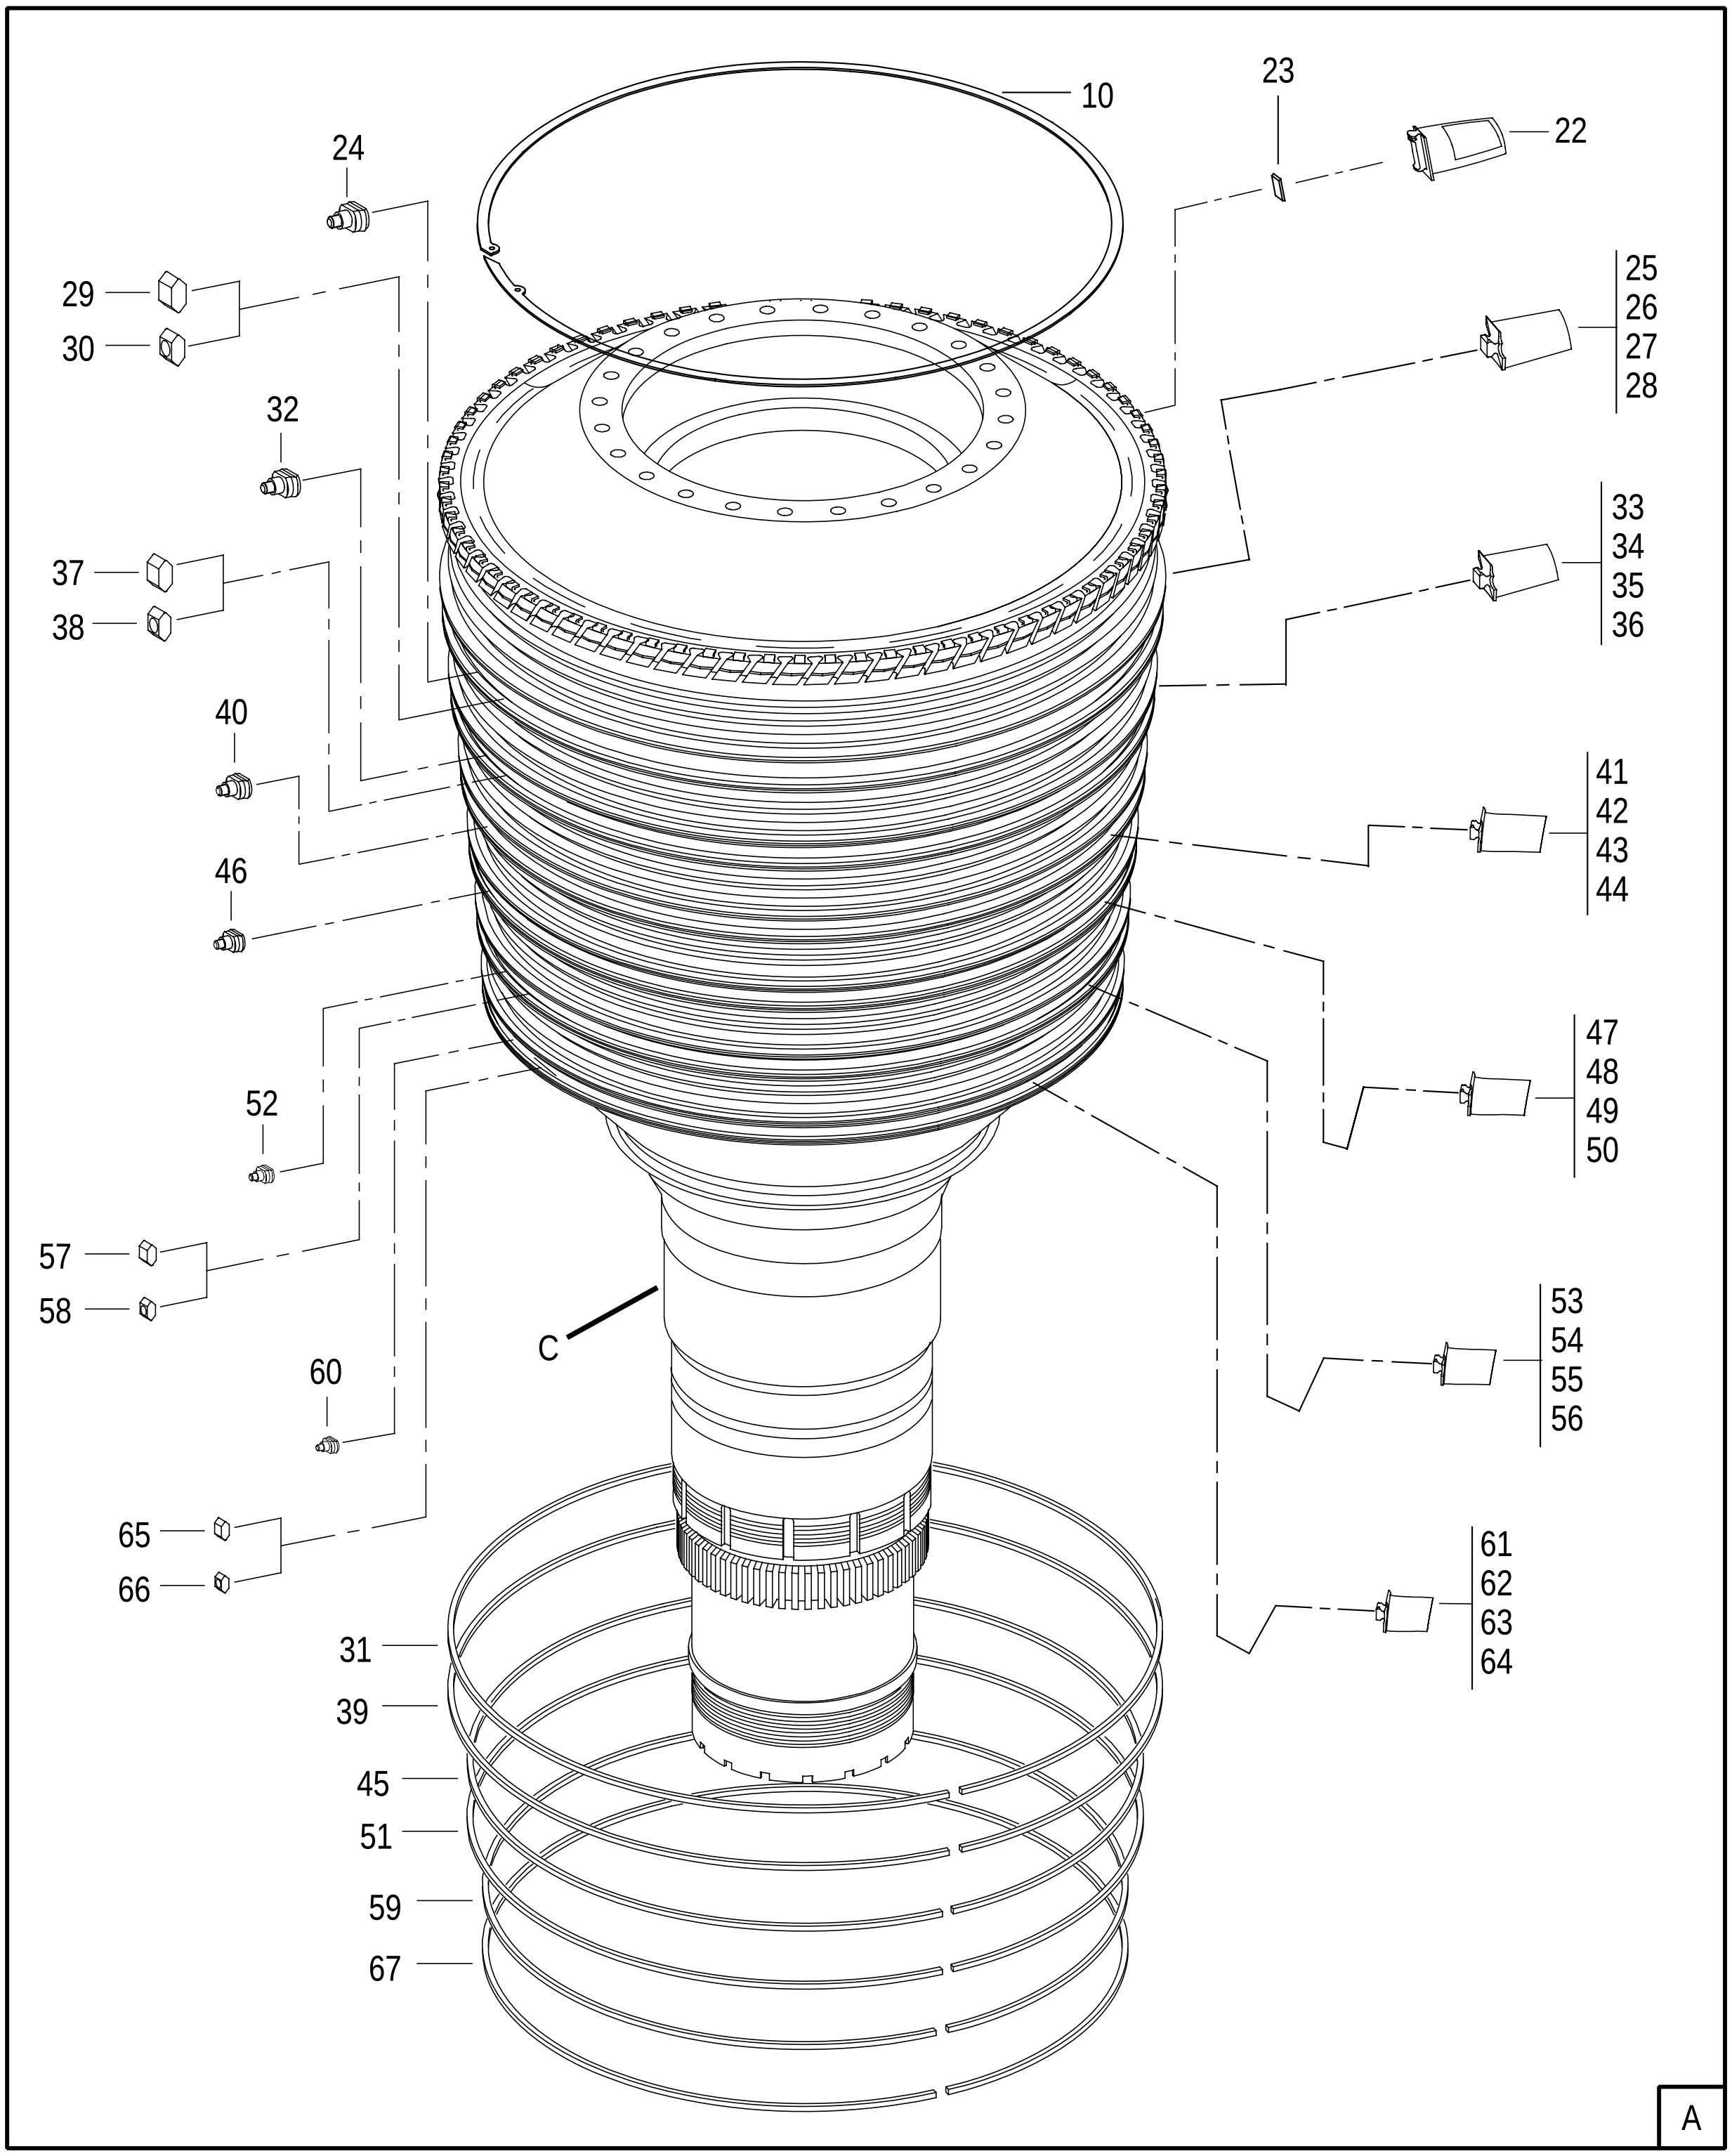


FIGURE 104. AXIAL COMPRESSOR ROTOR ASSY
(SHEET 2 OF 3)

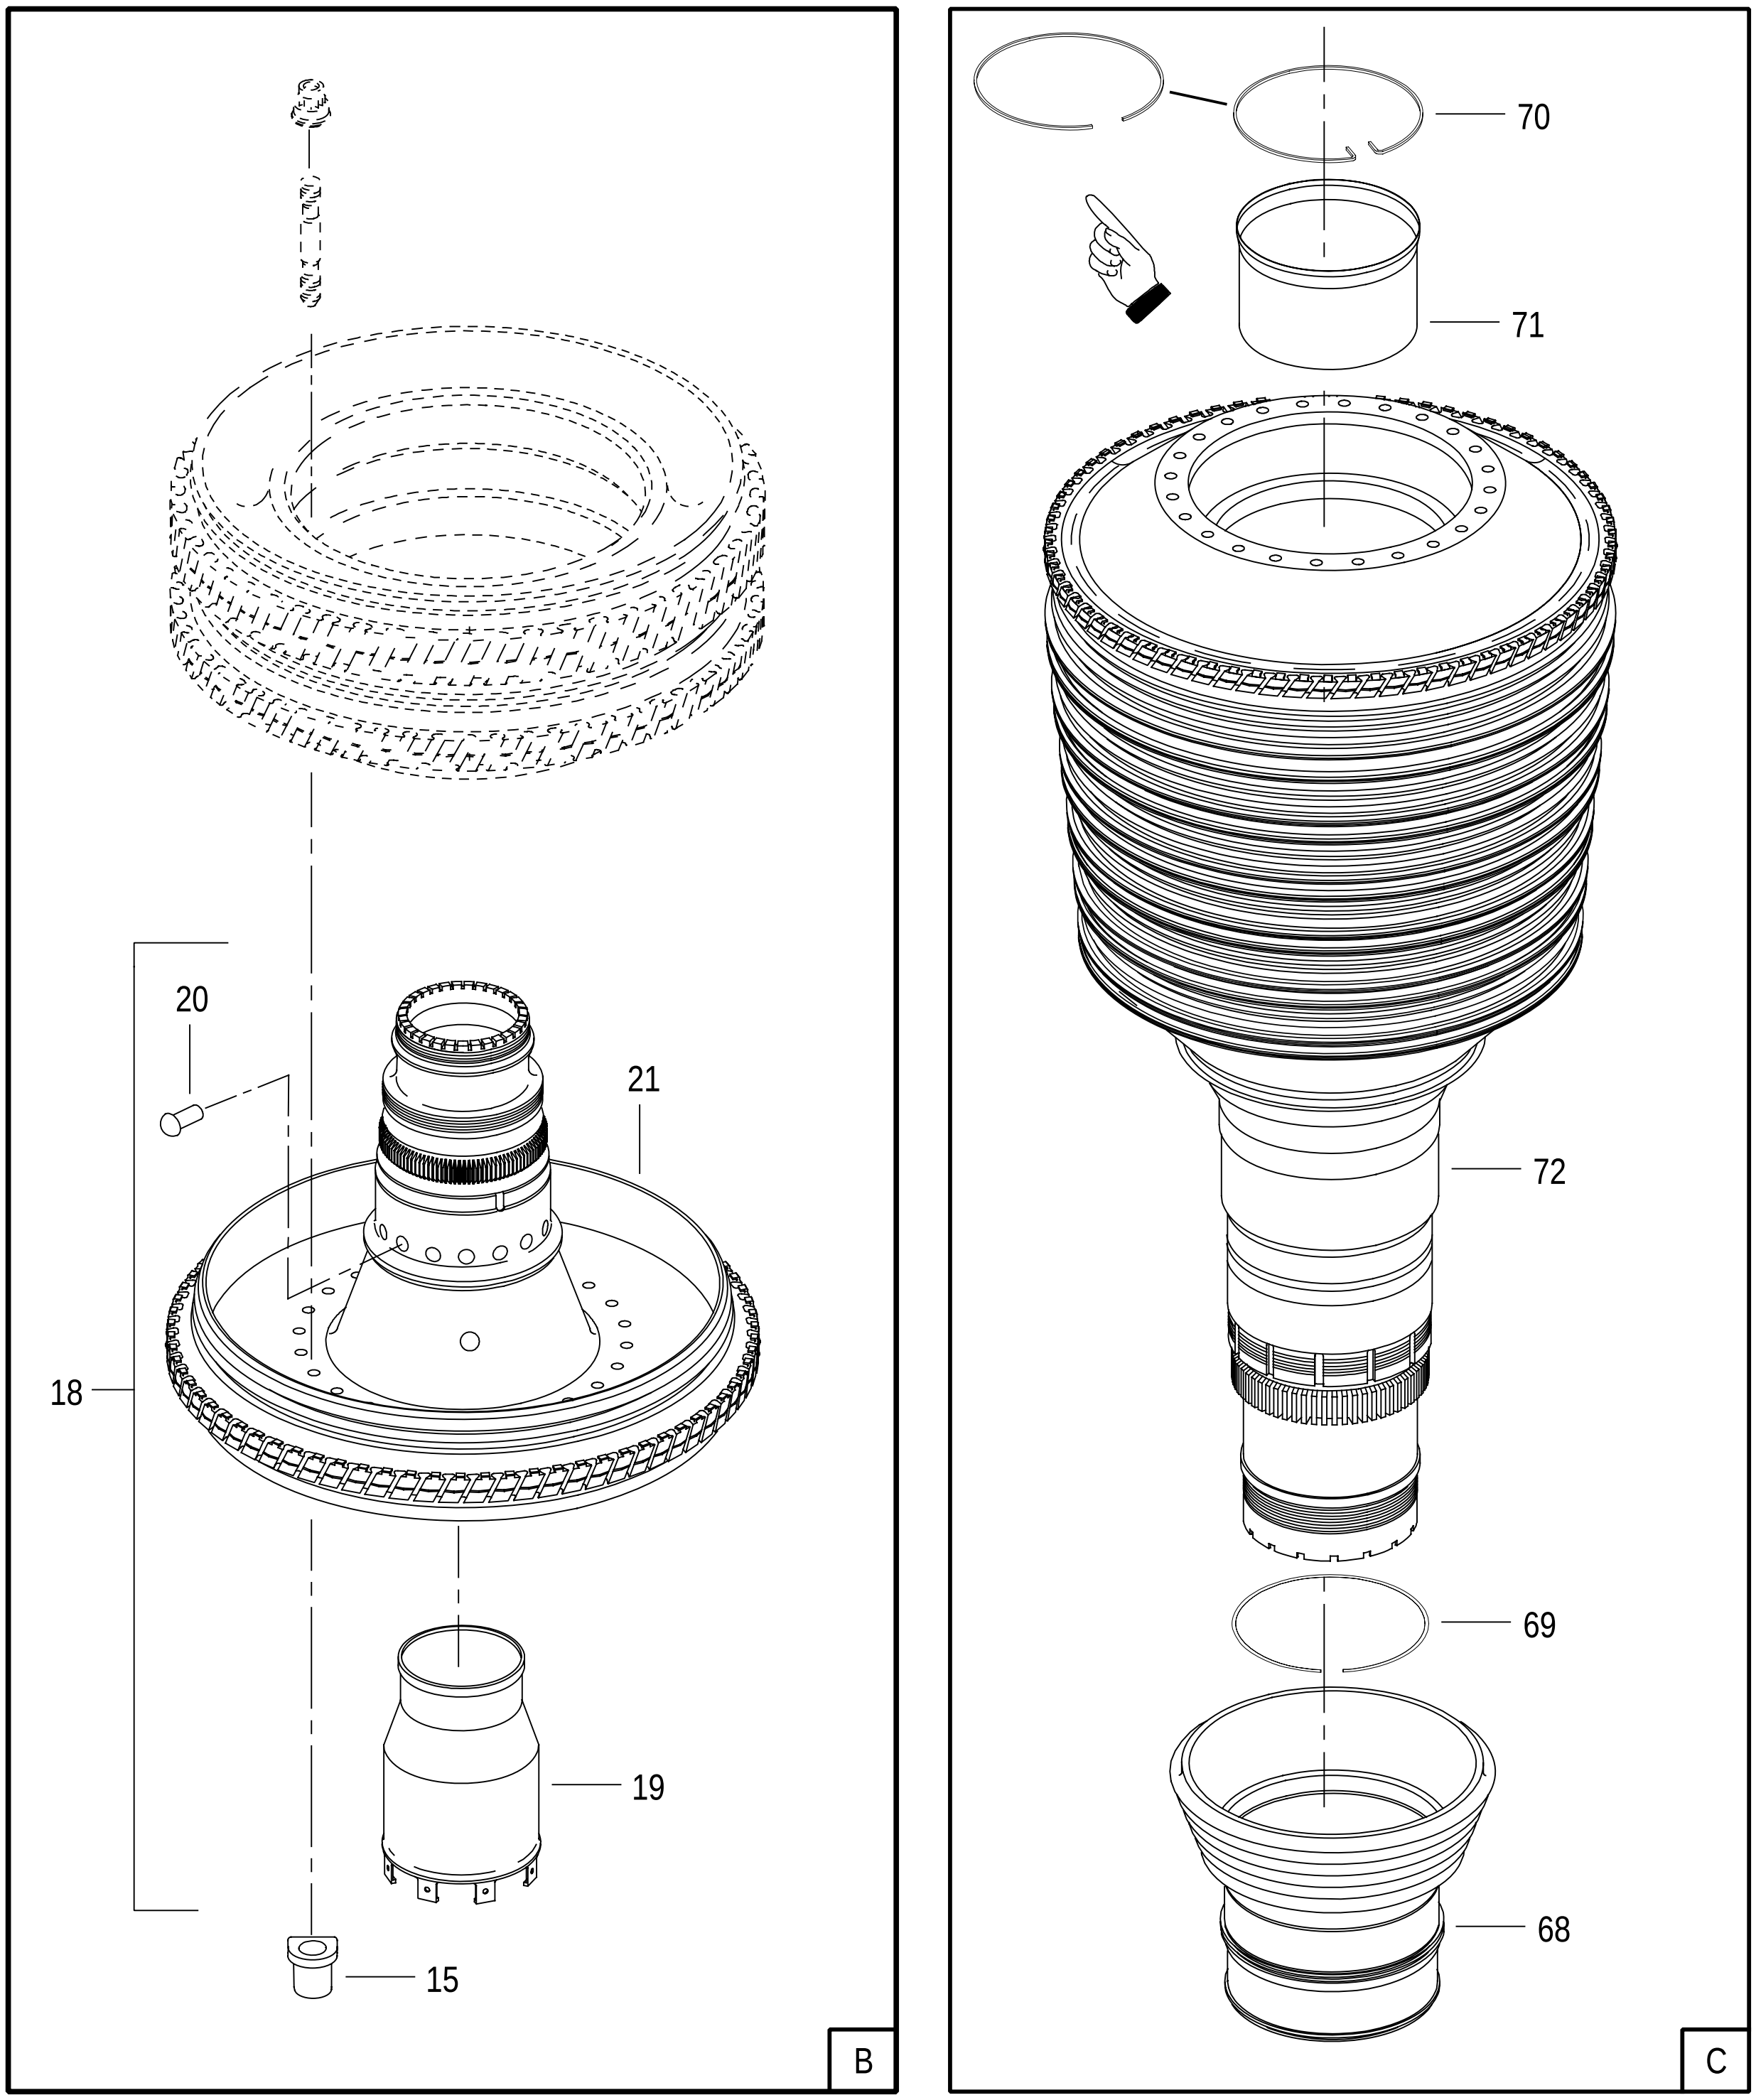


FIGURE 104. AXIAL COMPRESSOR ROTOR ASSY
(SHEET 3 OF 3)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
104	4079349-01	52661	ROTOR ASSY-AXIAL COMPRESSOR . . . . SEE FIG. 88-36 FOR NHA	1	DN/KJ/LR	ADD
	4080101-01	52661	ROTOR ASSY-AXIAL COMPRESSOR . . . . SEE FIG. 88-36 FOR NHA	1	DP/JY	ADD
	4079287-01	52661	ROTOR ASSY-AXIAL COMPRESSOR . . . . SEE FIG. 88-36 FOR NHA	1	BR/JZ/KG	ADD
	4080405-01	52661	ROTOR ASSY-AXIAL COMPRESSOR . . . . SEE FIG. 88-36 FOR NHA	1	BR/KH/LX/ LZ/MB/ MD	ADD
	4080407-01	52661	ROTOR ASSY-AXIAL COMPRESSOR . . . . SEE FIG. 88-36 FOR NHA REOP AND REID OF 4079349-01 DO NOT PROCURE FROM P&WA	1	KK/MF	ADD
	4080720-01	52661	ROTOR ASSY-AXIAL COMPRESSOR . . . . SEE FIG. 88-36 FOR NHA	1	BR/LS/MH	ADD
	4080812-01	52661	ROTOR ASSY-AXIAL COMPRESSOR . . . . SEE FIG. 88-36 FOR NHA	1	BR/FE/LY/ MA/MC/ ME	ADD
	4080883-01	52661	ROTOR ASSY-AXIAL COMPRESSOR . . . . SEE FIG. 88-36 FOR NHA	1	MG	ADD
	4080884-01	52661	ROTOR ASSY-AXIAL COMPRESSOR . . . . SEE FIG. 88-36 FOR NHA	1	BR/MJ	ADD
	4081522-01	52661	ROTOR ASSY-AXIAL COMPRESSOR . . . . SEE FIG. 88-36 FOR NHA	1	BR/FF	ADD
- 1	4069092	52661	. RING-COMPRESSOR BLADE LOCK, 4TH STAGE . . .	1		PAFZZ
- 2	4079404	52661	. BLADE-COMPRESSOR ROTOR, 4TH STAGE . . . . REPLACES 4075104-02 REPLACED BY 4081604 FOR SPARES REPLACEMENT USE 4079474 OR 4081524	52		PADDD
	4081604	52661	. BLADE-COMPRESSOR ROTOR, 4TH STAGE . . . . REPLACES 4079404 R REPLACED BY 4085004 R FOR SPARES REPLACEMENT USE 4081524 OR 4085004	26		PADDD
R	4085004	52661	. BLADE-COMPRESSOR ROTOR, 4TH STAGE . . . . R REPLACES 4081604 R FOR SPARES REPLACEMENT USE 4084124	26		PADDD
	4079474	52661	. BLADE SET-COMPRESSOR ROTOR, 4TH STAGE . . . REPLACED BY 4081524 SPARES REPLACEMENT FOR 4079404	26		PAFDD
	4081524	52661	. BLADE SET-COMPRESSOR ROTOR, 4TH STAGE . . . REPLACES 4079474 R REPLACED BY 4084124 SPARES REPLACEMENT FOR 4079404 AND 4081604	26		PAFDD
R	4084124	52661	. BLADE SET-COMPRESSOR ROTOR, 4TH STAGE . . . R REPLACES 4081524 R SPARES REPLACEMENT FOR 4079404, 4081604, R AND 4085004	26		
- 3	4079404	52661	.. BLADE-COMPRESSOR ROTOR, 4TH STAGE. . . . . . . USE ONLY ON 4079474	2		PADDD
	4081604	52661	.. BLADE-COMPRESSOR ROTOR, 4TH STAGE. . . . . . . USE ONLY ON 4081524	2		PADDD
R	4085004	52661	.. BLADE-COMPRESSOR ROTOR, 4TH STAGE. . . . . . . R USE ONLY ON 4084124	2		PADDD
- 4	4069995	52661	. COUNTERWEIGHT-COMPRESSOR, 4TH STAGE . . . . USE 0-7 AS REQUIRED	AR		PADZZ
- 5	4071745	52661	. COUNTERWEIGHT-COMPRESSOR, 4TH STAGE . . . . USE 0-5 AS REQUIRED	AR		PADZZ
- 6	4069093	52661	. RING-COMPRESSOR BLADE LOCK, 5TH STAGE . . .	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	104 - 7	4079405	52661	. BLADE-COMPRESSOR ROTOR, 5TH STAGE . . . . REPLACES 4075105-02 REPLACED BY 4081605 FOR SPARES REPLACEMENT USE 4080185 OR 4081525	62		PADDD
R R		4081605	52661	. BLADE-COMPRESSOR ROTOR, 5TH STAGE . . . . REPLACES 4079405 REPLACED BY 4084105 FOR SPARES REPLACEMENT USE 4081525 OR 4084125	31		PADDD
R R R		4084105	52661	. BLADE-COMPRESSOR ROTOR, 5TH STAGE . . . . REPLACES 4081605 FOR SPARES REPLACEMENT USE 4084125	31		PADDD
		4080185	52661	. BLADE SET-COMPRESSOR ROTOR, 5TH STAGE . . . REPLACED BY 4081525 SPARES REPLACEMENT FOR 4079405	31		PAFDD
R		4081525	52661	. BLADE SET-COMPRESSOR ROTOR, 5TH STAGE . . . REPLACES 4080185 REPLACED BY 4084125 SPARES REPLACEMENT FOR 4079405 AND 4081605	2		PAFDD
R R R R		4084125	52661	. BLADE SET-COMPRESSOR ROTOR, 5TH STAGE . . . REPLACES 4081525 SPARES REPLACEMENT FOR 4079405, 4081605, AND 4084105	2		PAFDD
	- 8	4079405	52661	.. BLADE-COMPRESSOR ROTOR, 5TH STAGE. . . . . . . USE ONLY ON 4080185	2		PADDD
		4081605	52661	.. BLADE-COMPRESSOR ROTOR, 5TH STAGE. . . . . . . USE ONLY ON 4081525	2		PADDD
	- 9	4069996	52661	. COUNTERWEIGHT-COMPRESSOR, 5TH STAGE . . . . USE 0-7 AS REQUIRED	AR		PADZZ
	- 10	4069094	52661	. RING-COMPRESSOR BLADE LOCK, 6TH AND 7TH . STAGE	2		PADZZ
	- 11	4079406	52661	. BLADE-COMPRESSOR ROTOR, 6TH STAGE . . . . REPLACED BY 4081506	74		PAFDD
R		4081506	52661	. BLADE-COMPRESSOR ROTOR, 6TH STAGE . . . . REPLACES 4079406 REPLACED BY 4084106	74		PAFDD
R R		4084106	52661	. BLADE-COMPRESSOR ROTOR, 6TH STAGE . . . . REPLACES 4081506	74		PAFDD
	- 12	4077107	52661	. SEAL-COMPRESSOR ROTOR BLADE, 6TH STAGE .	74		PAFZZ
	- 13	4076390	52661	. SEAL-AIR, NO. 3 BEARING . . . . USE ONLY ON 4079349-01, 4079287-01, 4080101-01, 4080405-01, 4080407-01, AND 4080720-01	1		PAFLD
		4080811	52661	. SEAL-AIR, NO. 3 BEARING . . . . USE ONLY ON 4080812-01, 4080883-01, 4080884-01, AND 4081522-01	1		PAFLD
	- 14	4069088	52661	. NUT-TIE ROD . . . . 0.375-24UNJF-3B X 0.6825 IN. THK	24		PADZZ
	- 15	4076308	52661	. NUT-TIE ROD . . . . 0.375-32UNJEF-3B X 0.780 IN. THK	24		PADZZ
	- 16	4074004	52661	. TIE ROD . . . . 0.375-24UNJF-3A - 32UNJEF-3A X 2.560 IN. LONG	24		PADZZ
	- 17	4074700-01	52661	. DISK-DRUM ROTOR, REAR COMPRESSOR, ... FRONT, ASSY OF USE ONLY ON 4079349-01, 4080720-01, AND 4080884-01	1		PADDD
		4079858-01	52661	. DISK-DRUM ROTOR, REAR COMPRESSOR, ... FRONT, ASSY OF USE ONLY ON 4079287-01 AND 4080101-01	1		PADDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	104 - 17	4080408-01	52661	. DISK-DRUM ROTOR, REAR COMPRESSOR, FRONT, ASSY OF REOP AND REID OF 4074700-01 DO NOT PROCURE FROM P&WA USE ONLY ON 4080407-01 AND 4080883-01	1		PADDD
		4080396-01	52661	. DISK-DRUM ROTOR, REAR COMPRESSOR, FRONT, ASSY OF USE ONLY ON 4080405-01, 4080812-01, AND 4081522-01	1		PADDD
	- 18	4070846	52661	. DISK AND HUB-COMPRESSOR, 6TH STAGE, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PADDD
	- 19	4031790	52661	.. SHIELD-HEAT, NO. 3 BEARING, ASSY OF	1		PADZZ
	- 20	AN123341	88044	.. RIVET (AP)	8		PADZZ
	- 21	4070836-01	52661	.. DISK AND HUB-COMPRESSOR, 6TH STAGE SUPERSEDES 4076106	1		XA
	- 22	4079707	52661	. BLADE-COMPRESSOR ROTOR, 7TH STAGE REPLACED BY 4081507	80		PAFDD
		4081507	52661	. BLADE-COMPRESSOR ROTOR, 7TH STAGE REPLACES 4079707	80		PAFDD
	- 23	4077108	52661	. SEAL-COMPRESSOR ROTOR BLADE, 7TH STAGE	80		PAFZZ
R	- 24	4080787-01	52661	. LOCK ASSY-COMPRESSOR BLADE, 8TH STAGE REPLACES 4079054-01	2		PAFZZ
R	- 25	4075608-01	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077508-01 OR 4079308-01 SUPERSEDED BY 4082208-01	33		PADDD
		4077508-01	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE SPARES REPLACEMENT FOR 4075608-01 SUPERSEDED BY 4079308-01 SUPERSEDED BY 4082208-01	33		XA
		4079308-01	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE SUPERSEDES 4077508-01 AS SPARES REPLACEMENT FOR 4075608-01 SUPERSEDED BY 4082208-01	33		PAFDD
		4082208-01	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE SUPERSEDES 4075608-01 SUPERSEDES 4077508-01 SUPERSEDES 4079308-01	33		PAFDD
R	- 26	4075608-02	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077508-02 OR 4079308-02 SUPERSEDED BY 4082208-02	33		PADDD
		4077508-02	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE SPARES REPLACEMENT FOR 4075608-02 SUPERSEDED BY 4079308-02 SUPERSEDED BY 4082208-02	33		XA
		4079308-02	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE SUPERSEDES 4077508-02 AS SPARES REPLACEMENT FOR 4075608-02 SUPERSEDED BY 4082208-02	33		PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	104 - 26	4082208-02	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE . . . . SUPERSEDES 4075608-02 SUPERSEDES 4077508-02 SUPERSEDES 4079308-02	33		PAFDD
R	- 27	4075608-03	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE . . . . USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077508-03 OR 4079308-03 SUPERSEDED BY 4082208-03	2		PADDD
		4077508-03	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE . . . . SPARES REPLACEMENT FOR 4075608-03 SUPERSEDED BY 4079308-03 SUPERSEDED BY 4082208-03	2		XA
		4079308-03	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE . . . . SUPERSEDES 4077508-03 AS SPARES REPLACEMENT FOR 4075608-03 SUPERSEDED BY 4082208-03	2		PAFDD
		4082208-03	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE . . . . SUPERSEDES 4075608-03 SUPERSEDES 4077508-03 SUPERSEDES 4079308-03	2		PAFDD
R	- 28	4075608-04	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE . . . . USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077508-04 OR 4079308-04 SUPERSEDED BY 4082208-04	2		PADDD
		4077508-04	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE . . . . SPARES REPLACEMENT FOR 4075608-04 SUPERSEDED BY 4079308-04 SUPERSEDED BY 4082208-04	2		XA
		4079308-04	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE . . . . SUPERSEDES 4077508-04 AS SPARES REPLACEMENT FOR 4075608-04 SUPERSEDED BY 4082208-04	2		PAFDD
		4082208-04	52661	. BLADE-COMPRESSOR ROTOR, 8TH STAGE . . . . SUPERSEDES 4075608-04 SUPERSEDES 4077508-04 SUPERSEDES 4079308-04	2		PAFDD
	- 29	4068998	52661	. COUNTERWEIGHT-COMPRESSOR, 8TH STAGE . . . . USE 0-4 AS REQUIRED	AR		PADZZ
	- 30	4071746	52661	. COUNTERWEIGHT-COMPRESSOR, 8TH STAGE . . . . USE 0-4 AS REQUIRED	AR		PADZZ
	- 31	4074839-01	52661	. SEAL-COMPRESSOR ROTOR	2		PAFZZ
R	- 32	4080787-02	52661	. LOCK ASSY-COMPRESSOR BLADE, 9TH STAGE . . . REPLACES 4079054-02	2		PAFZZ
R	- 33	4075609-01	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077509-01 OR 4079309-01 SUPERSEDED BY 4081609-01	35		PADDD
		4077509-01	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SPARES REPLACEMENT FOR 4075609-01 SUPERSEDED BY 4079309-01 SUPERSEDED BY 4081609-01	35		XA

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	104 - 33	4079309-01	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SUPERSEDES 4077509-01 AS SPARES REPLACEMENT FOR 4075609-01 SUPERSEDED BY 4081609-01	35		PAFDD
		4081609-01	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SUPERSEDES 4075609-01 SUPERSEDES 4077509-01 SUPERSEDES 4079309-01	35		PAFDD
R	- 34	4075609-02	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077509-02 OR 4079309-02 SUPERSEDED BY 4081609-02	35		PADDD
		4077509-02	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SPARES REPLACEMENT FOR 4075609-02 SUPERSEDED BY 4079309-02 SUPERSEDED BY 4081609-02	35		XA
		4079309-02	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SUPERSEDES 4077509-02 AS SPARES REPLACEMENT FOR 4075609-02 SUPERSEDED BY 4081609-02	35		PAFDD
		4081609-02	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SUPERSEDES 4075609-02 SUPERSEDES 4077509-02 SUPERSEDES 4079309-02	35		PAFDD
R	- 35	4075609-03	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077509-03 OR 4079309-03 SUPERSEDED BY 4081609-03	2		PADDD
		4077509-03	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SPARES REPLACEMENT FOR 4075609-03 SUPERSEDED BY 4079309-03 SUPERSEDED BY 4081609-03	2		XA
		4079309-03	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SUPERSEDES 4077509-03 AS SPARES REPLACEMENT FOR 4075609-03 SUPERSEDED BY 4081609-03	2		PAFDD
		4081609-03	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SUPERSEDES 4075609-03 SUPERSEDES 4077509-03 SUPERSEDES 4079309-03	2		PAFDD
R	- 36	4075609-04	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077509-04 OR 4079309-04 SUPERSEDED BY 4081609-04	2		PADDD
		4077509-04	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SPARES REPLACEMENT FOR 4075609-04 SUPERSEDED BY 4079309-04 SUPERSEDED BY 4081609-04	2		XA
		4079309-04	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE . . . . SUPERSEDES 4077509-04 AS SPARES REPLACEMENT FOR 4075609-04 SUPERSEDED BY 4081609-04	2		PAFDD

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	104 - 36	4081609-04	52661	. BLADE-COMPRESSOR ROTOR, 9TH STAGE .... SUPERSEDES 4075609-04 SUPERSEDES 4077509-04 SUPERSEDES 4079309-04	2		PAFDD
	- 37	4068999	52661	. COUNTERWEIGHT-COMPRESSOR, 9TH STAGE .... USE 0-4 AS REQUIRED	AR		PADZZ
	- 38	4071747	52661	. COUNTERWEIGHT-COMPRESSOR, 9TH STAGE .... USE 0-4 AS REQUIRED	AR		PADZZ
	- 39	4074839-02	52661	. SEAL-COMPRESSOR ROTOR	2		PAFZZ
R	- 40	4080787-03	52661	. LOCK ASSY-COMPRESSOR BLADE, 10TH STAGE .. REPLACES 4079054-03	2		PAFZZ
R	- 41	4075610-01	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077510-01 OR 4079310-01 SUPERSEDED BY 4082210-01	39		PADDD
		4077510-01	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SPARES REPLACEMENT FOR 4075610-01 SUPERSEDED BY 4079310-01 SUPERSEDED BY 4082210-01	39		XA
		4079310-01	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SUPERSEDES 4077510-01 AS SPARES REPLACEMENT FOR 4075610-01 SUPERSEDED BY 4082210-01	39		PAFDD
		4082210-01	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SUPERSEDES 4075610-01 SUPERSEDES 4077510-01 SUPERSEDES 4079310-01	39		PAFDD
R	- 42	4075610-02	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077510-02 OR 4079310-02 SUPERSEDED BY 4082210-02	39		PADDD
		4077510-02	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SPARES REPLACEMENT FOR 4075610-02 SUPERSEDED BY 4079310-02 SUPERSEDED BY 4082210-02	39		XA
		4079310-02	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SUPERSEDES 4077510-02 AS SPARES REPLACEMENT FOR 4075610-02 SUPERSEDED BY 4082210-02	39		PAFDD
		4082210-02	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SUPERSEDES 4075610-02 SUPERSEDES 4077510-02 SUPERSEDES 4079310-02	39		PAFDD
R	- 43	4075610-03	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077510-03 OR 4079310-03 SUPERSEDED BY 4082210-03	2		PADDD
		4077510-03	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SPARES REPLACEMENT FOR 4075610-03 SUPERSEDED BY 4079310-03 SUPERSEDED BY 4082210-03	2		XA

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	104 - 43	4079310-03	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SUPERSEDES 4077510-03 AS SPARES REPLACEMENT FOR 4075610-03 SUPERSEDED BY 4082210-03	2		PAFDD
		4082210-03	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SUPERSEDES 4075610-03 SUPERSEDES 4077510-03 SUPERSEDES 4079310-03	2		PAFDD
R	- 44	4075610-04	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077510-04 OR 4079310-04 SUPERSEDED BY 4082210-04	2		PADDD
		4077510-04	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SPARES REPLACEMENT FOR 4075610-04 SUPERSEDED BY 4079310-04 SUPERSEDED BY 4082210-04	2		XA
		4079310-04	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SUPERSEDES 4077510-04 AS SPARES REPLACEMENT FOR 4075610-04 SUPERSEDED BY 4082210-04	2		PAFDD
		4082210-04	52661	. BLADE-COMPRESSOR ROTOR, 10TH STAGE ...... SUPERSEDES 4075610-04 SUPERSEDES 4077510-04 SUPERSEDES 4079310-04	2		PAFDD
	- 45	4074839-03	52661	. SEAL-COMPRESSOR ROTOR	2		PAFZZ
R	- 46	4080787-04	52661	. LOCK ASSY-COMPRESSOR BLADE, 11TH STAGE . . REPLACES 4079054-04	2		PAFZZ
R	- 47	4075611-01	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077511-01 OR 4079411-01 SUPERSEDED BY 4081611-01	41		PADDD
		4077511-01	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SPARES REPLACEMENT FOR 4075611-01 SUPERSEDED BY 4079411-01 SUPERSEDED BY 4081611-01	41		XA
		4079411-01	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SUPERSEDES 4077511-01 AS SPARES REPLACEMENT FOR 4075611-01 SUPERSEDED BY 4081611-01	41		PAFDD
		4081611-01	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SUPERSEDES 4075611-01 SUPERSEDES 4077511-01 SUPERSEDES 4079411-01	41		PAFDD
R	- 48	4075611-02	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077511-02 OR 4079411-02 SUPERSEDED BY 4081611-02	41		PADDD
		4077511-02	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SPARES REPLACEMENT FOR 4075611-02 SUPERSEDED BY 4079411-02 SUPERSEDED BY 4081611-02	41		XA

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	104 - 48	4079411-02	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SUPERSEDES 4077511-02 AS SPARES REPLACEMENT FOR 4075611-02 SUPERSEDED BY 4081611-02	41		PAFDD
		4081611-02	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SUPERSEDES 4075611-02 SUPERSEDES 4077511-02 SUPERSEDES 4079411-02	41		PAFDD
R	- 49	4075611-03	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077511-03 OR 4079411-03 SUPERSEDED BY 4081611-03	2		PADDD
		4077511-03	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SPARES REPLACEMENT FOR 4075611-03 SUPERSEDED BY 4079411-03 SUPERSEDED BY 4081611-03	2		XA
		4079411-03	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SUPERSEDES 4077511-03 AS SPARES REPLACEMENT FOR 4075611-03 SUPERSEDED BY 4081611-03	2		PAFDD
		4081611-03	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SUPERSEDES 4075611-03 SUPERSEDES 4077511-03 SUPERSEDES 4079411-03	2		PAFDD
R	- 50	4075611-04	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077511-04 OR 4079411-04 SUPERSEDED BY 4081611-04	2		PADDD
		4077511-04	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SPARES REPLACEMENT FOR 4075611-04 SUPERSEDED BY 4079411-04 SUPERSEDED BY 4081611-04	2		XA
		4079411-04	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SUPERSEDES 4077511-04 AS SPARES REPLACEMENT FOR 4075611-04 SUPERSEDED BY 4081611-04	2		PAFDD
		4081611-04	52661	. BLADE-COMPRESSOR ROTOR, 11TH STAGE ...... SUPERSEDES 4075611-04 SUPERSEDES 4077511-04 SUPERSEDES 4079411-04	2		PAFDD
	- 51	4074839-04	52661	. SEAL-COMPRESSOR ROTOR	2		PAFZZ
R	- 52	4080787-05	52661	. LOCK ASSY-COMPRESSOR BLADE, 12TH STAGE .. REPLACES 4079054-05	2		PAFZZ
R	- 53	4075612-01	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077512-01 OR 4079412-01 SUPERSEDED BY 4082212-01	37		PADDD
		4077512-01	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... SPARES REPLACEMENT FOR 4075612-01 SUPERSEDED BY 4079412-01 SUPERSEDED BY 4082212-01	37		XA

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	104 - 53	4079412-01	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... SUPERSEDES 4077512-01 AS SPARES REPLACEMENT FOR 4075612-01 SUPERSEDED BY 4082212-01	37		PAFDD
		4082212-01	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... SUPERSEDES 4075612-01 SUPERSEDES 4077512-01 SUPERSEDES 4079412-01	37		PAFDD
R	- 54	4075612-02	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077512-02 OR 4079412-02 SUPERSEDED BY 4082212-02	37		PADDD
		4077512-02	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... SPARES REPLACEMENT FOR 4075612-02 SUPERSEDED BY 4079412-02 SUPERSEDED BY 4082212-02	37		XA
		4079412-02	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... SUPERSEDES 4077512-02 AS SPARES REPLACEMENT FOR 4075612-02 SUPERSEDED BY 4082212-02	37		PAFDD
		4082212-02	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... SUPERSEDES 4075612-02 SUPERSEDES 4077512-02 SUPERSEDES 4079412-02	37		PAFDD
R	- 55	4075612-03	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077512-03 OR 4079412-03 SUPERSEDED BY 4082212-03	2		PADDD
		4077512-03	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... SPARES REPLACEMENT FOR 4075612-03 SUPERSEDED BY 4079412-03 SUPERSEDED BY 4082212-03	2		XA
		4079412-03	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... SUPERSEDES 4077512-03 AS SPARES REPLACEMENT FOR 4075612-03 SUPERSEDED BY 4082212-03	2		PAFDD
		4082212-03	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... SUPERSEDES 4075612-03 SUPERSEDES 4077512-03 SUPERSEDES 4079412-03	2		PAFDD
R	- 56	4075612-04	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077512-04 OR 4079412-04 SUPERSEDED BY 4082212-04	2		PADDD
		4077512-04	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE ...... SPARES REPLACEMENT FOR 4075612-04 SUPERSEDED BY 4079412-04 SUPERSEDED BY 4082212-04	2		XA

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	104 - 56	4079412-04	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE . . . . . . SUPERSEDES 4077512-04 AS SPARES REPLACEMENT FOR 4075612-04 SUPERSEDED BY 4082212-04	2		PAFDD
		4082212-04	52661	. BLADE-COMPRESSOR ROTOR, 12TH STAGE . . . . . . SUPERSEDES 4075612-04 SUPERSEDES 4077512-04 SUPERSEDES 4079412-04	2		PAFDD
	- 57	4069002	52661	. COUNTERWEIGHT-COMPRESSOR, 12TH STAGE . . . USE 0-6 AS REQUIRED	AR		PADZZ
	- 58	4071748	52661	. COUNTERWEIGHT-COMPRESSOR, 12TH STAGE . . . USE 0-6 AS REQUIRED	AR		PADZZ
	- 59	4074839-05	52661	. SEAL-COMPRESSOR ROTOR	2		PAFZZ
R	- 60	4080787-06	52661	. LOCK ASSY-COMPRESSOR BLADE, 13TH STAGE . . REPLACES 4079054-06	2		PAFZZ
R	- 61	4075613-01	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE . . . . . . USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077513-01 OR 4079413-01 SUPERSEDED BY 4081613-01	40		PADDD
		4077513-01	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE . . . . . . SPARES REPLACEMENT FOR 4075613-01 SUPERSEDED BY 4079413-01 SUPERSEDED BY 4081613-01	40		XA
		4079413-01	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE . . . . . . SUPERSEDES 4077513-01 AS SPARES REPLACEMENT FOR 4075613-01 SUPERSEDED BY 4081613-01	40		PAFDD
		4081613-01	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE . . . . . . SUPERSEDES 4075613-01 SUPERSEDES 4077513-01 SUPERSEDES 4079413-01	40		PAFDD
R	- 62	4075613-02	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE . . . . . . USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077513-02 OR 4079413-02 SUPERSEDED BY 4081613-02	40		PADDD
		4077513-02	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE . . . . . . SPARES REPLACEMENT FOR 4075613-02 SUPERSEDED BY 4079413-02 SUPERSEDED BY 4081613-02	40		XA
		4079413-02	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE . . . . . . SUPERSEDES 4077513-02 AS SPARES REPLACEMENT FOR 4075613-02 SUPERSEDED BY 4081613-02	40		PAFDD
		4081613-02	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE . . . . . . SUPERSEDES 4075613-02 SUPERSEDES 4077513-02 SUPERSEDES 4079413-02	40		PAFDD
R	- 63	4075613-03	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE . . . . . . USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077513-03 OR 4079413-03 SUPERSEDED BY 4081613-03	2		PADDD

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
104 - 63	4077513-03	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE ...... SPARES REPLACEMENT FOR 4075613-03 SUPERSEDED BY 4079413-03 SUPERSEDED BY 4081613-03	2		XA
	4079413-03	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE ...... SUPERSEDES 4077513-03 AS SPARES REPLACEMENT FOR 4075613-03 SUPERSEDED BY 4081613-03	2		PAFDD
	4081613-03	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE ...... SUPERSEDES 4075613-03 SUPERSEDES 4077513-03 SUPERSEDES 4079413-03	2		PAFDD
R - 64	4075613-04	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE ...... USE ONLY ON 4079349-01, 4080101-01, 4080407-01, AND 4080883-01 FOR SPARES REPLACEMENT USE 4077513-04 OR 4079413-04 SUPERSEDED BY 4081613-04	2		PADDD
	4077513-04	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE ...... SPARES REPLACEMENT FOR 4075613-04 SUPERSEDED BY 4079413-04 SUPERSEDED BY 4081613-04	2		XA
	4079413-04	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE ...... SUPERSEDES 4077513-04 AS SPARES REPLACEMENT FOR 4075613-04 SUPERSEDED BY 4081613-04	2		PAFDD
	4081613-04	52661	. BLADE-COMPRESSOR ROTOR, 13TH STAGE ...... SUPERSEDES 4075613-04 SUPERSEDES 4077513-04 SUPERSEDES 4079413-04	2		PAFDD
- 65	4069003	52661	. COUNTERWEIGHT-COMPRESSOR, 13TH STAGE ... USE 0-7 AS REQUIRED	AR		PADZZ
- 66	4071749	52661	. COUNTERWEIGHT-COMPRESSOR, 13TH STAGE ... USE 0-7 AS REQUIRED	AR		PADZZ
- 67	4074839-06	52661	. SEAL-COMPRESSOR ROTOR	2		PAFZZ
- 68	4080807	52661	. SEAL ASSY-AIR, NO. 4 BEARING .... REPLACES 4074849 PARTIAL BREAKDOWN FOLLOWS	1		PADDD
- 69	4070452	52661	.. DAMPER-NO. 4 BEARING AIR SEAL	1		PADZZ
- 70	4074012	52661	. RING-RETAINING .... 5.9605 SHAFT DIA X 0.0825 DIA WIRE	1		PADZZ
- 71	4074013	52661	. SHIELD-HEAT, REAR COMPRESSOR HUB, REAR ..	1		PADZZ
- 72	4073123-01	52661	. DISK-DRUM ROTOR, REAR COMPRESSOR, ... REAR, ASSY OF USE ONLY ON 4079349-01, 4080407-01, AND 4080883-01	1		PADDD
	= 4080102-01	52661	. DISK-DRUM ROTOR, REAR COMPRESSOR, ... REAR, ASSY OF USE ONLY ON 4079287-01, 4080101-01, 4080405-01, 4080720-01, 4080812-01, 4080884-01, AND 4081522-01	1		PADDD
	= 4081469-01	52661	. DISK-DRUM ROTOR, REAR COMPRESSOR, ... REAR, ASSY OF USE ONLY ON 4079287-01, 4080101-01, 4080405-01, 4080720-01, 4080812-01, 4080884-01, AND 4081522-01	1		PADDD
	4082938-01	52661	. DISK-DRUM ROTOR, REAR COMPRESSOR, ... REAR, ASSY OF REOP AND REID OF 4073123-01 AND 4080102-01 DO NOT PROCURE FROM P&WA	1		PAFZZ

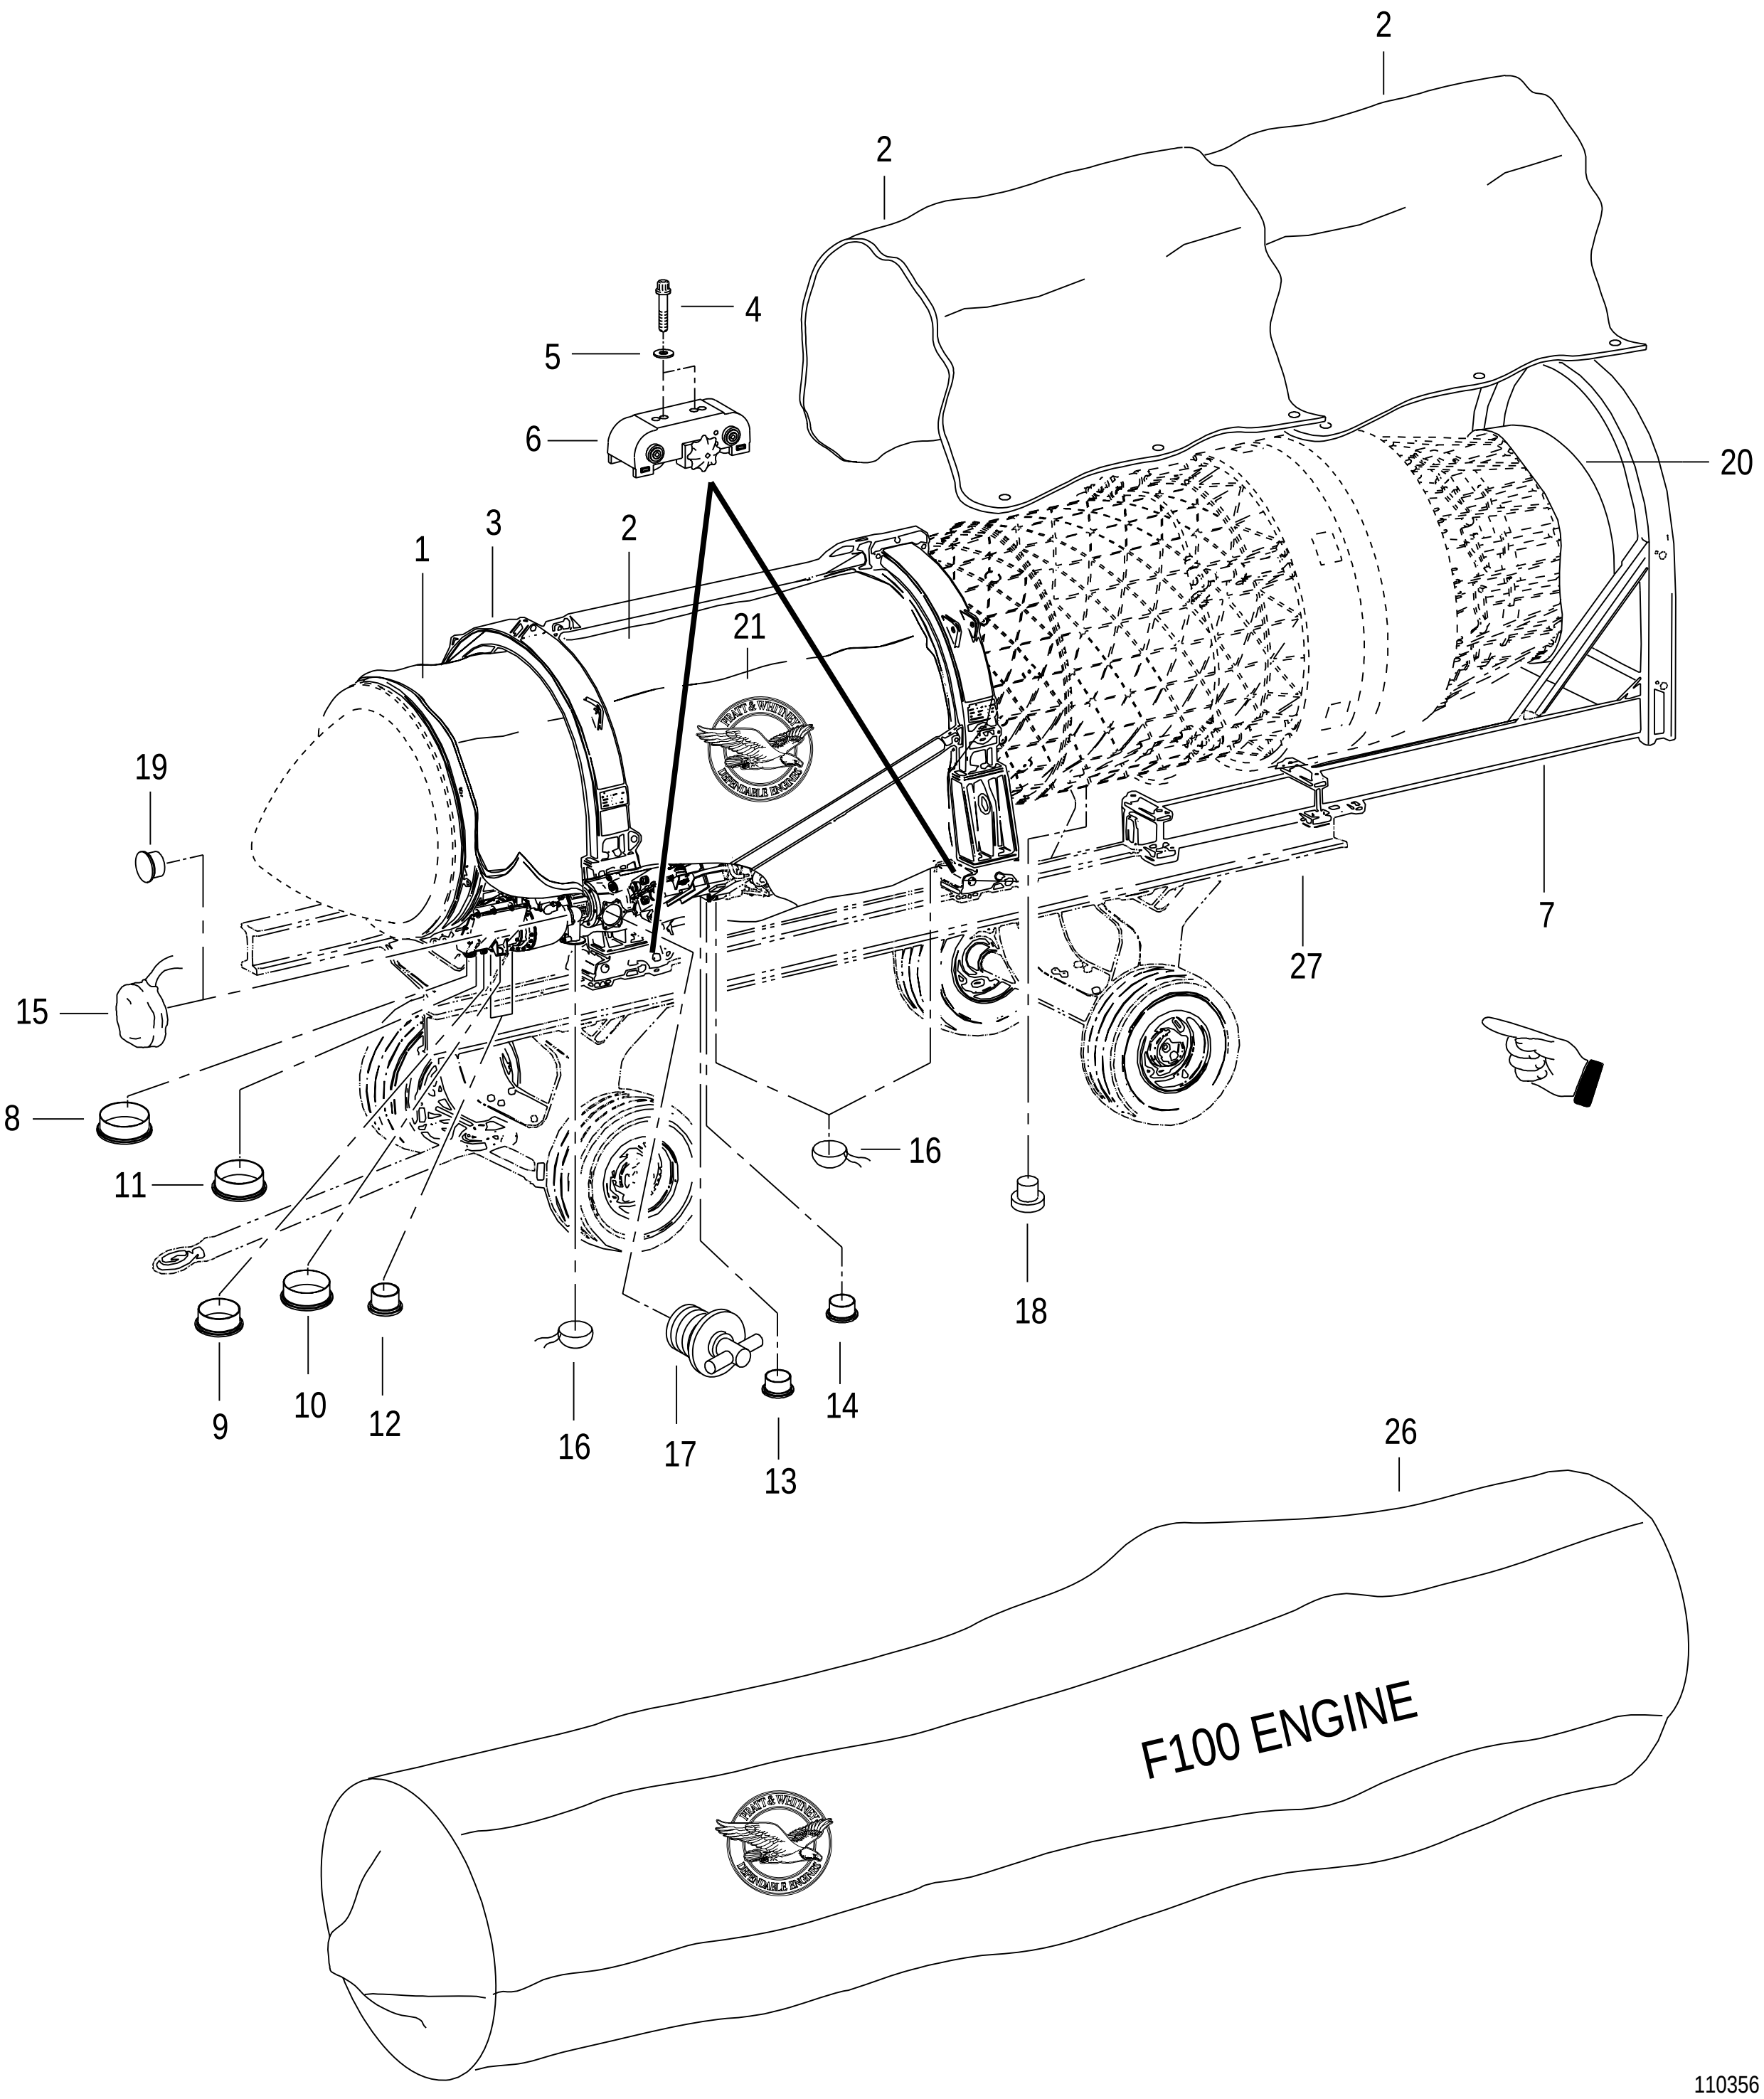


FIGURE 105. ENGINE ASSY SHIPPING EQUIPMENT

	FIGURE & INDEX NUMBER		PART NUMBER		CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	105		NO NUMBER			ENGINE ASSY SHIPPING EQUIPMENT	REF		
						SEE FIG. 1-17 FOR NHA			
			P4021629		52661	. SHIPPING EQUIPMENT ASSEMBLY-ENGINE	1		AOO
						TRAILER			
	- 1		P4006410		52661	.. COVER-AIRCRAFT ENGINE, FRONT	1		PAOBZ
	- 2		P4006411		52661	.. COVER SEGMENT-AIRCRAFT ENGINE, REAR	3		PAOBZ
	- 3		P4006409		52661	.. SUPPORT ASSY-ENGINE	1		AOO
						SEE FIG. 106 FOR DETAIL PARTS			
R						SUPERSEDED BY P4078837			
R			P4078837		52661	.. SUPPORT ASSY-ENGINE	1		AOO
R						SEE FIG. 106A FOR DETAIL PARTS			
R						SUPERSEDES P4006409			
	- 4		MS90726-135		96906	.. SCREW (AP)	8		PAOZZ
	- 5		MS35338-49		96906	.. WASHER (AP)	8		PAOZZ
	- 6		AM3885		30728	.. ADAPTER-DOUBLE ROLLER, SINGLE BRAKE	4		PAOBZ
						P&W PART NO. P4021555			
	- 7		P4030580		52661	.. BUMPER ASSY-ENGINE	1		AOO
						SEE FIG. 107 FOR DETAIL PARTS			
			P4021646		52661	. PACKAGING PARTS-CONSUMABLE, ENGINE ASSY .	1		PAFZZ
	- 8		EC-24		99017	.. CAP-SHIPPING CLOSURES	1		PAOZZ
						P&W PART NO. P10557			
						WHEN EXH USE P4070584-04			
			P4070584-04		52661	.. CAP-SHIPPING CLOSURES	1		PAOZZ
	- 9		EC-20		99017	.. CAP-SHIPPING CLOSURES	1		PAOZZ
						P&W PART NO. P10554			
						WHEN EXH USE P4070584-02			
			P4070584-02		52661	.. CAP-SHIPPING CLOSURES	1		PAOZZ
	- 10		EC-22		99017	.. CAP-SHIPPING CLOSURES	1		PAOZZ
						P&W PART NO. P10555			
	- 11		EC-23		99017	.. CAP-SHIPPING CLOSURES	1		PAOZZ
						P&W PART NO. P10556			
						WHEN EXH USE P4070584-03			
			P4070584-03		52661	.. CAP-SHIPPING CLOSURES	1		PAOZZ
	- 12		EC-10		99017	.. CAP-SHIPPING CLOSURES	2		PAOZZ
						P&W PART NO. P10548			
						WHEN EXH USE P4070584-01			
			P4070584-01		52661	.. CAP-SHIPPING CLOSURES	2		PAOZZ
	- 13		EC-12		99017	.. CAP-SHIPPING CLOSURES	1		PAOZZ
						P&W PART NO. P10549			
	- 14		EC-19		99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL ..	1		PAOZZ
						1.150 ID X 0.625 IN. DEEP			
						P&W PART NO. P10553			
	- 15		SK-10		98809	.. COVER-AIR BLEED VALVE SHIPPING	1		PAOZZ
						P&W PART NO. P11040			
	- 16		P14592		52661	.. COVER-PLASTIC	3		KF
						5.500 IN. DIA			
	- 17		EXP11017		01943	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL .	1		PAOZZ
						P&W PART NO. P4021628			
	- 18		P12776		52661	.. CAP-PLUG, PROTECTIVE	1		PAOZZ
	- 19		EC-19		99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL ..	1		PAOZZ
						1.150 ID X 0.625 IN. DEEP			
						P&W PART NO. P10553			
						REPLACES P10551			
	- 20		P4030583		52661	.. COVER-AFTERBURNER NOZZLE	1		PAOZZ
	- 21		P4078387-04	*	52661	.. DECAL-P&W INSIGNIA, LH	1		PAOZZ
			P4078386-04	*	52661	.. DECAL-P&W INSIGNIA, RH	1		PAOZZ
	- 22	<	P20399		52661	.. BARRIER MATERIAL-PLASTIC	AR		PAOZZ
	- 23	<	P4019449		52661	.. TWINE-COTTON	AR		PAOZZ
	- 24	<	P6153		52661	.. TAPE-WATERPROOF	AR		PAOZZ
						2.000 IN. WIDE X 772 IN. LONG			
						WHEN EXH USE P4070583			
		<	P4070583		52661	.. TAPE-WATERPROOF	AR		PAOZZ
						2.00 IN. WIDE			

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	105 - 25	< P6671	52661	.. TAPE-WATERPROOF .... 1.000 IN. WIDE WHEN EXH USE P4070582	AR		PAOZZ
		< P4070582	52661	.. TAPE-WATERPROOF .... 1.00 IN. WIDE	AR		PAOZZ
	- 26	P4078809	52661	.. CONTAINER, ENGINE-FLEXIBLE .... REUSABLE-TRANSPORT	AR		PAODD
R	- 27	P4078995	52661	. TRAILER-ENGINE	1		AOO

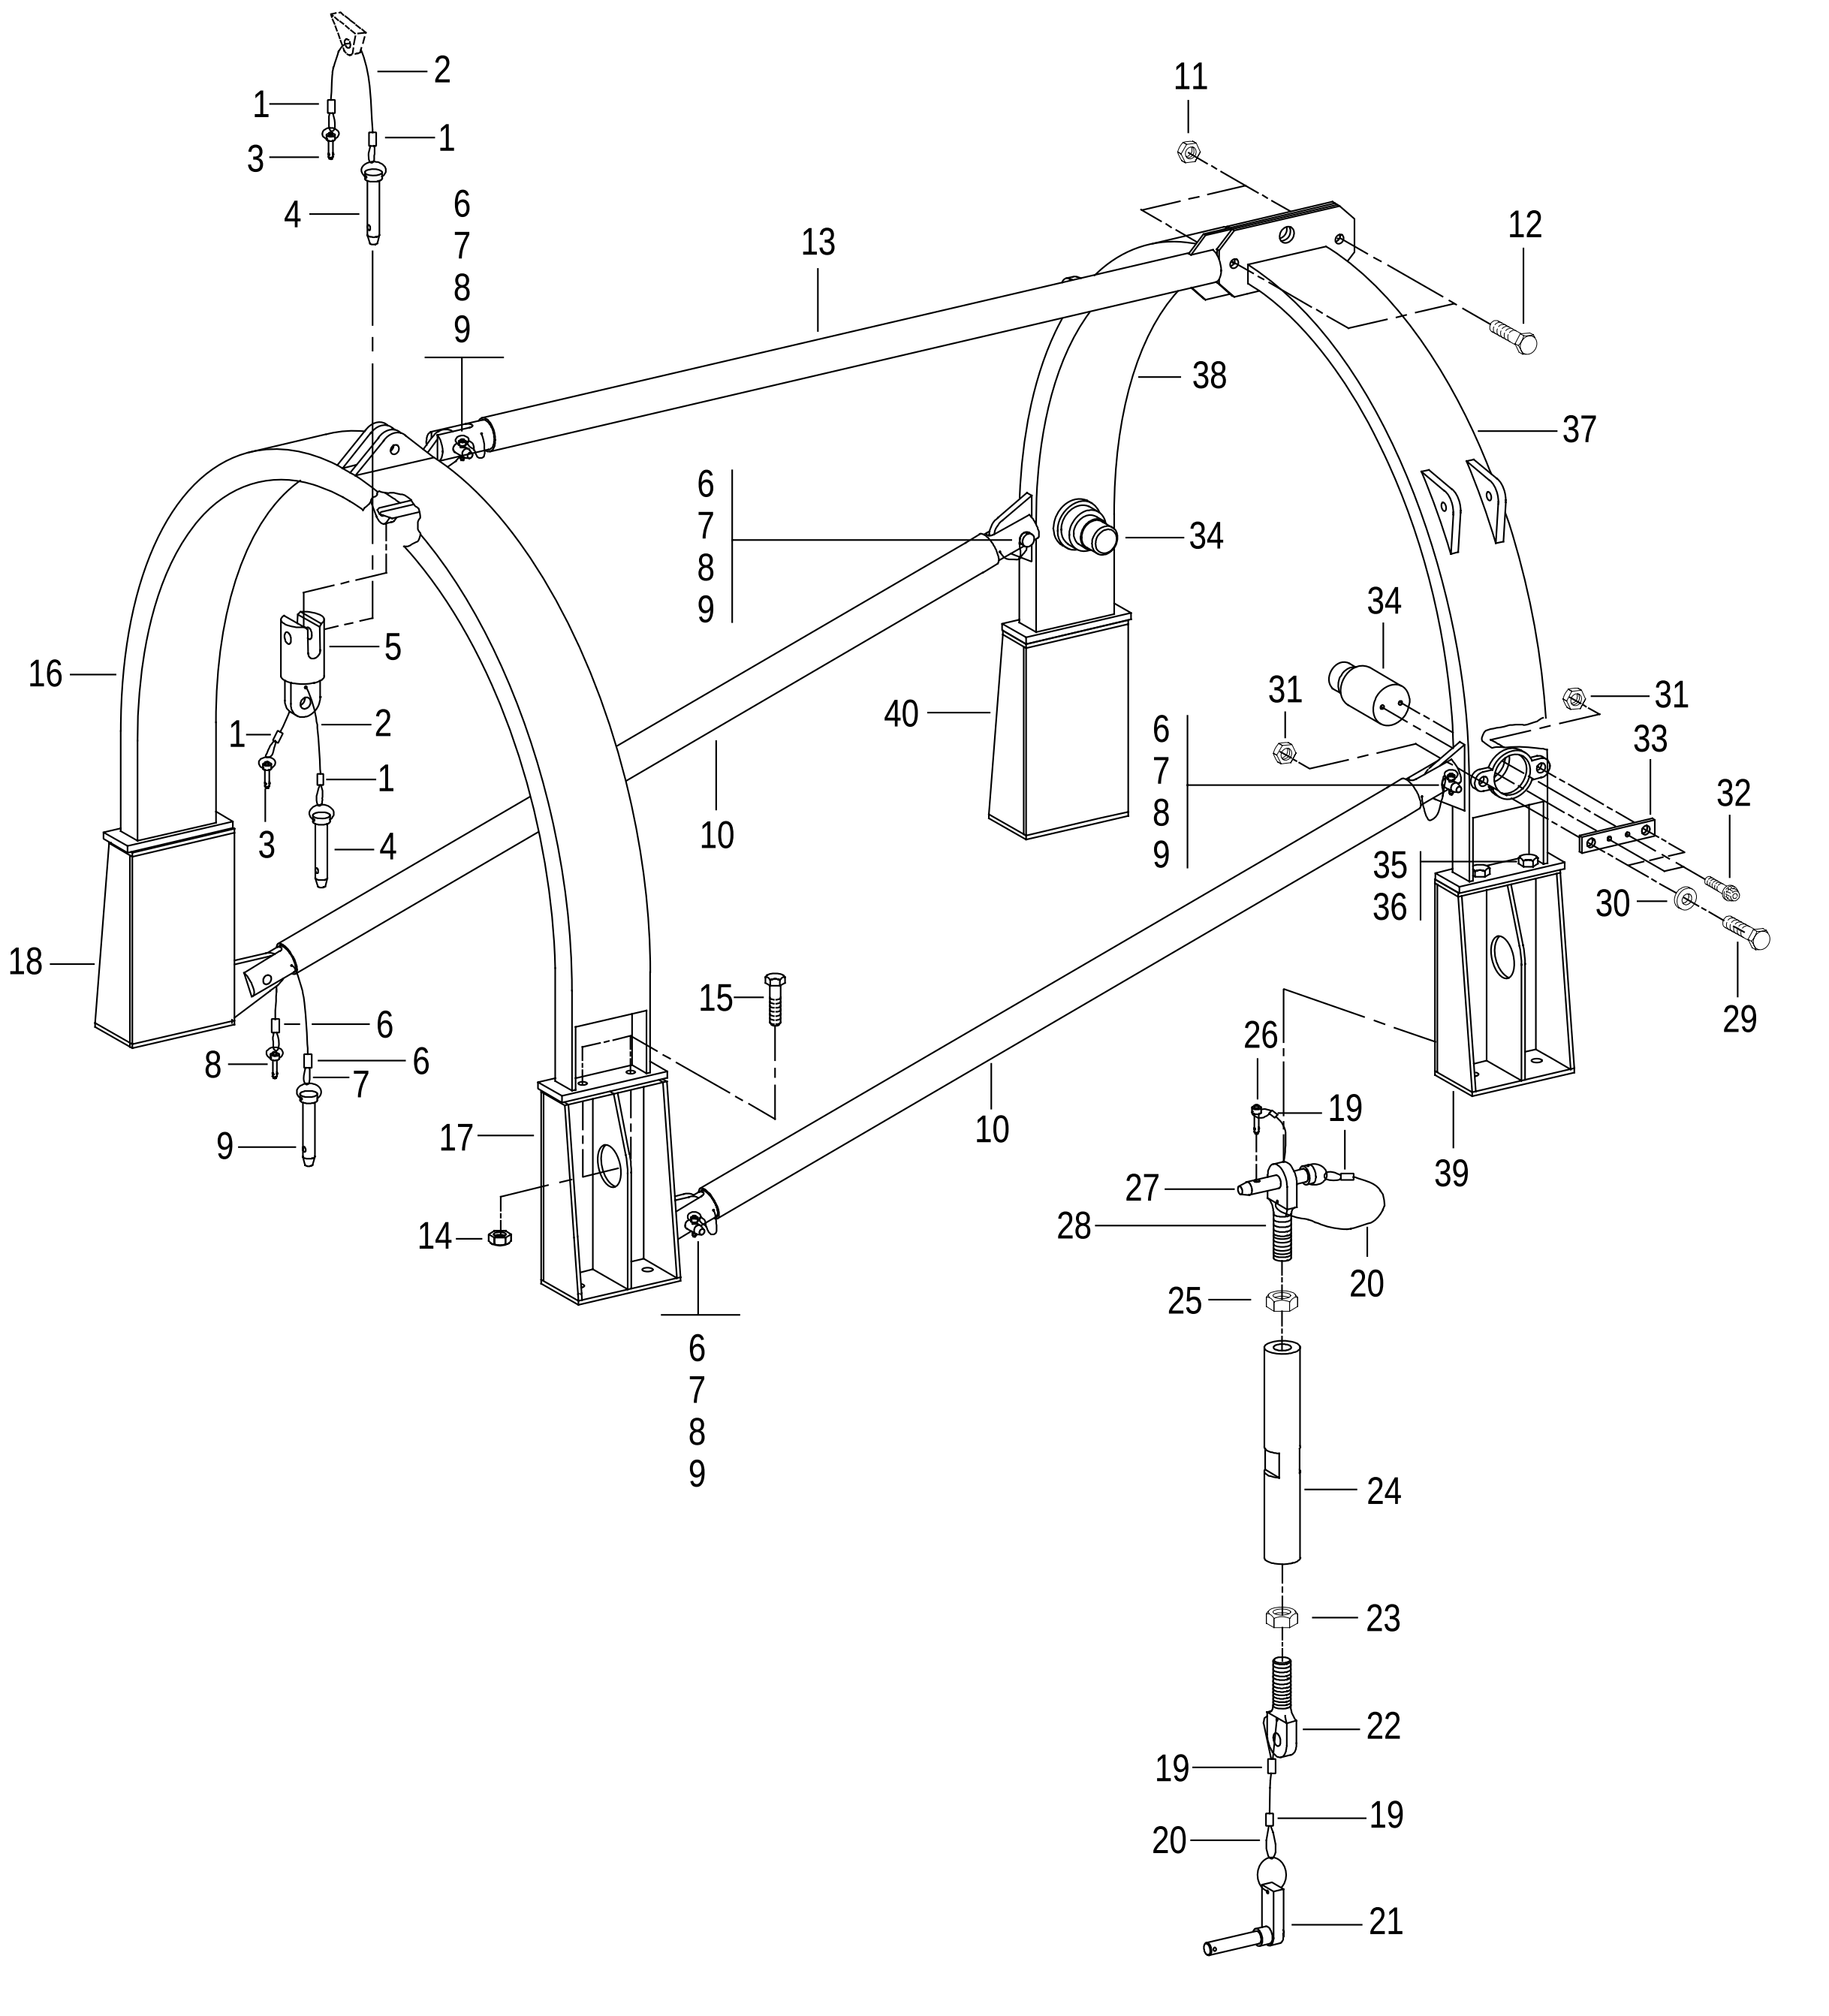


FIGURE 106. ENGINE SUPPORT ASSY

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
106		P4006409	52661	SUPPORT ASSY-ENGINE	1		AOO
				SEE FIG. 105-3 FOR NHA			
- 1	=	P32759	52661	. COLLAR-WIRE ROPE	4		PAOZZ
	=	P4021551	52661	. COLLAR-WIRE ROPE	4		PAOZZ
- 2		P32758	52661	. WIRE ROPE-STEEL..............................	2		PAOZZ
				0.063 DIA X 12.000 IN. LONG			
- 3		MS17987C407	96906	. PIN	2		PAOZZ
- 4		P4021553	52661	. PIN-ENGINE SUPPORT	2		PAOZZ
				0.560 IN. DIA X 3.200 IN. LONG			
- 5		P4021559	52661	. CLEVIS-ENGINE SHIPPING SUPPORT	1		PAOZZ
- 6	=	P32759	52661	. COLLAR-WIRE ROPE	10		PAOZZ
	=	P4021551	52661	. COLLAR-WIRE ROPE	10		PAOZZ
- 7		P32758	52661	. WIRE ROPE-STEEL..............................	5		PAOZZ
				0.063 DIA X 12.000 IN. LONG			
- 8		MS17987C407	96906	. PIN	5		PAOZZ
- 9		P4021553	52661	. PIN-ENGINE SUPPORT	5		PAOZZ
				0.560 IN. DIA X 3.200 IN. LONG			
- 10		P4006499	52661	. BRACE-ENGINE SHIPPING SUPPORT	2		PAOBZ
- 11	=	MS20365-820C	96906	. NUT	2		PAOZZ
	=	MS51922-37	96906	. NUT	2		PAOZZ
- 12		MS90726-114	96906	. SCREW..	2		PAOZZ
- 13		P4006459	52661	. BRACE-ENGINE SHIPPING SUPPORT	1		PAOBZ
- 14	=	MS20365-820C	96906	. NUT	4		PAOZZ
	=	MS51922-37	96906	. NUT	4		PAOZZ
- 15		MS90726-113	96906	. SCREW..	4		PAOZZ
- 16		P4021558	52661	. SUPPORT-ENGINE SHIPPING, FRONT, ASSY OF ...	1		PAOBZ
- 17		P4006451	52661	. BASE-ENGINE SHIPPING SUPPORT	1		PAOBZ
- 18		P4006443	52661	. BASE-ENGINE SHIPPING SUPPORT	1		PAOBZ
- 19	=	P32759	52661	. COLLAR-WIRE ROPE	4		PAOZZ
	=	P4021551	52661	. COLLAR-WIRE ROPE	4		PAOZZ
- 20		P32758	52661	. WIRE ROPE-STEEL..............................	2		PAOZZ
				0.063 DIA X 12.000 IN. LONG			
- 21		MS17986C833	96906	. PIN	1		PAOZZ
- 22		P4006422	52661	. CONNECTOR-ROD END	1		PAOZZ
				0.750-16 LH X 3.500 IN. LONG			
- 23		AN316-C12L	88044	. NUT-PLAIN, HEX	1		PAOZZ
				0.750-16 LH X 0.422 IN. THK			
				P&W PART NO. P4045515			
- 24		P4006421	52661	. TURNBUCKLE-ENGINE SHIPPING	1		PAOZZ
- 25		AN316-C12R	88044	. NUT	1		PAFZZ
				P&W PART NO. P4045516			
- 26		MS17987C407	96906	. PIN	1		PAOZZ
- 27		P4021553	52661	. PIN-ENGINE SUPPORT	1		PAOZZ
				0.560 IN. DIA X 3.200 IN. LONG			
- 28		P4006423	52661	. CONNECTOR-ROD END	1		PAOZZ
				0.750-16 X 3.500 IN. LONG			
- 29		MS90726-120	96906	. SCREW..	4		PAOZZ
- 30		MS27183-18	96906	. WASHER	AR		PAOZZ
				USE 0-4 AS REQUIRED EACH LOCATION			
- 31	=	MS20365-820C	96906	. NUT	4		PAOZZ
	=	MS51922-37	96906	. NUT	4		PAOZZ
- 32		MS90726-3	96906	. SCREW..	4		PAOZZ
- 33		P4006464	52661	. PLATE-LOCK, ENGINE SHIPPING SUPPORT	2		PAOZZ
- 34		P4030507	52661	. PIN-ENGINE SHIPPING	2		PAOZZ
- 35	=	MS20365-820C	96906	. NUT	4		PAOZZ
	=	MS51922-37	96906	. NUT	4		PAOZZ
- 36		MS90726-113	96906	. SCREW..	4		PAOZZ
- 37		P4006440	52661	. SUPPORT HALF-ENGINE SHIPPING, LEFT REAR, ..	1		PAOBZ
				ASSY OF			
- 38		P4006433	52661	. SUPPORT HALF-ENGINE SHIPPING, RIGHT REAR, .	1		PAOBZ
				ASSY OF			
- 39		P4006452	52661	. BASE-ENGINE SHIPPING SUPPORT	1		PAOBZ
- 40		P4030509	52661	. BASE-ENGINE SHIPPING SUPPORT	1		PAOBZ



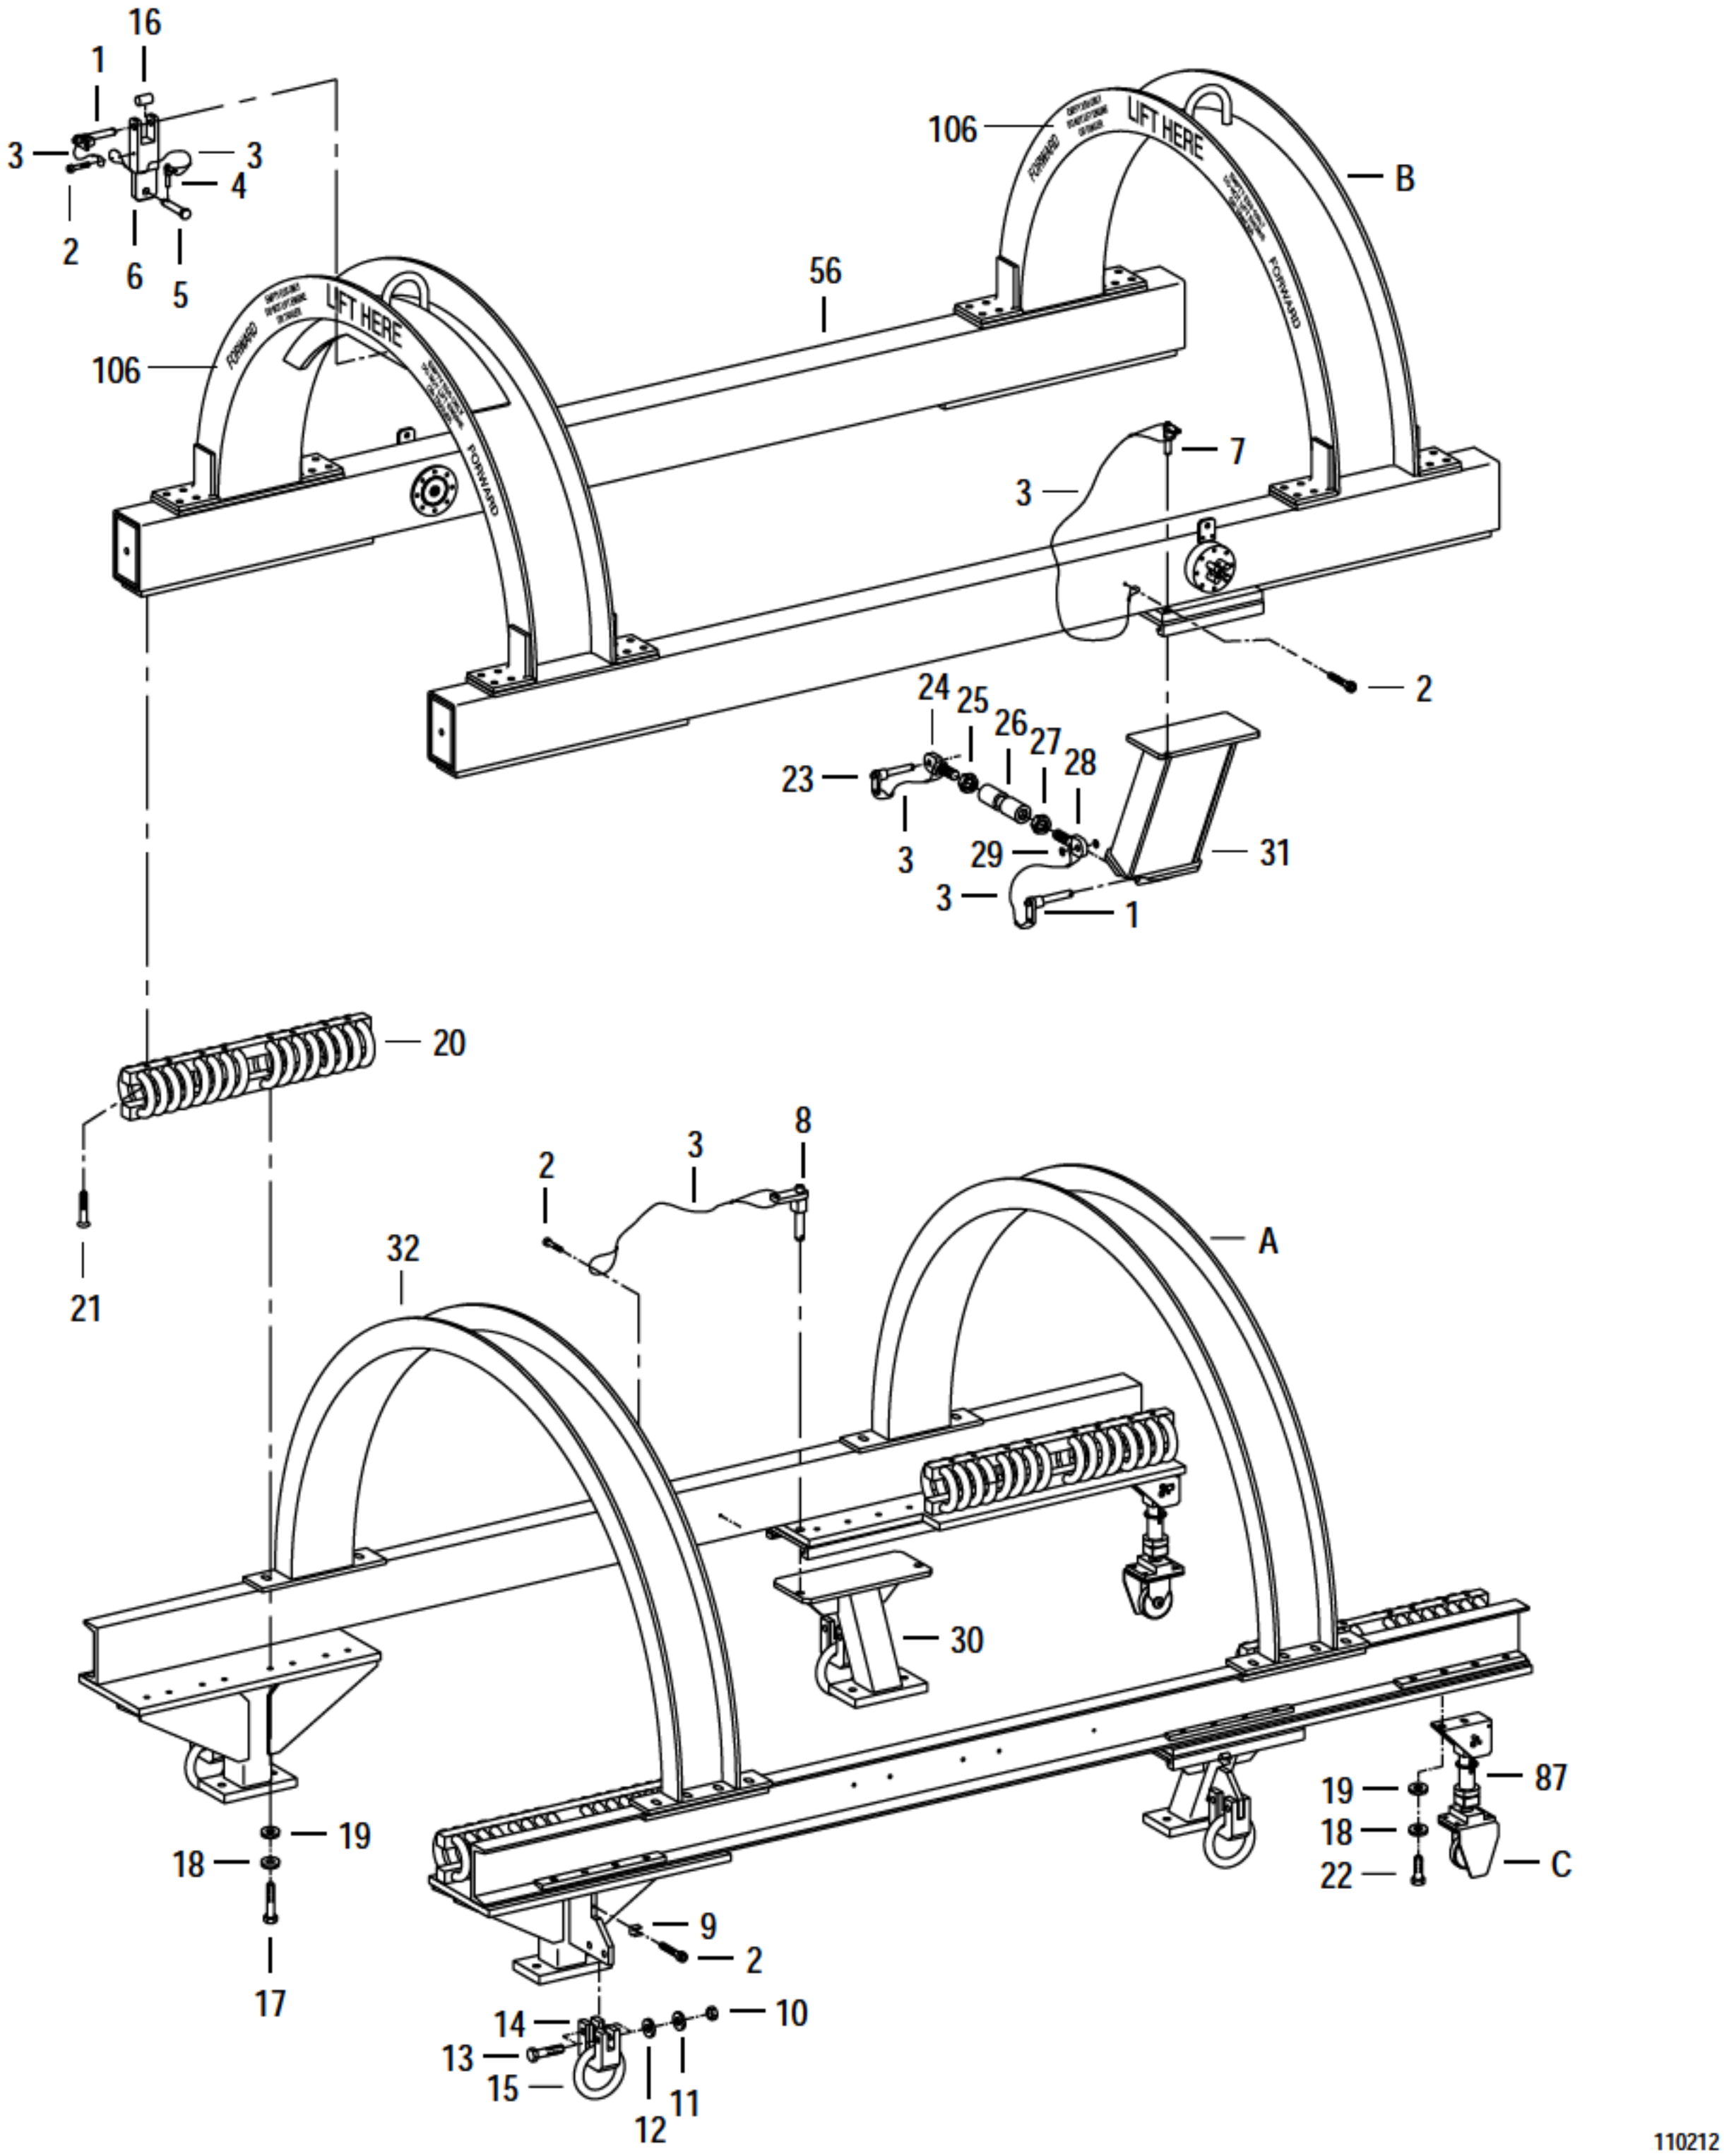


FIGURE 106A. ENGINE SUPPORT ASSY
(SHEET 1 OF 3)

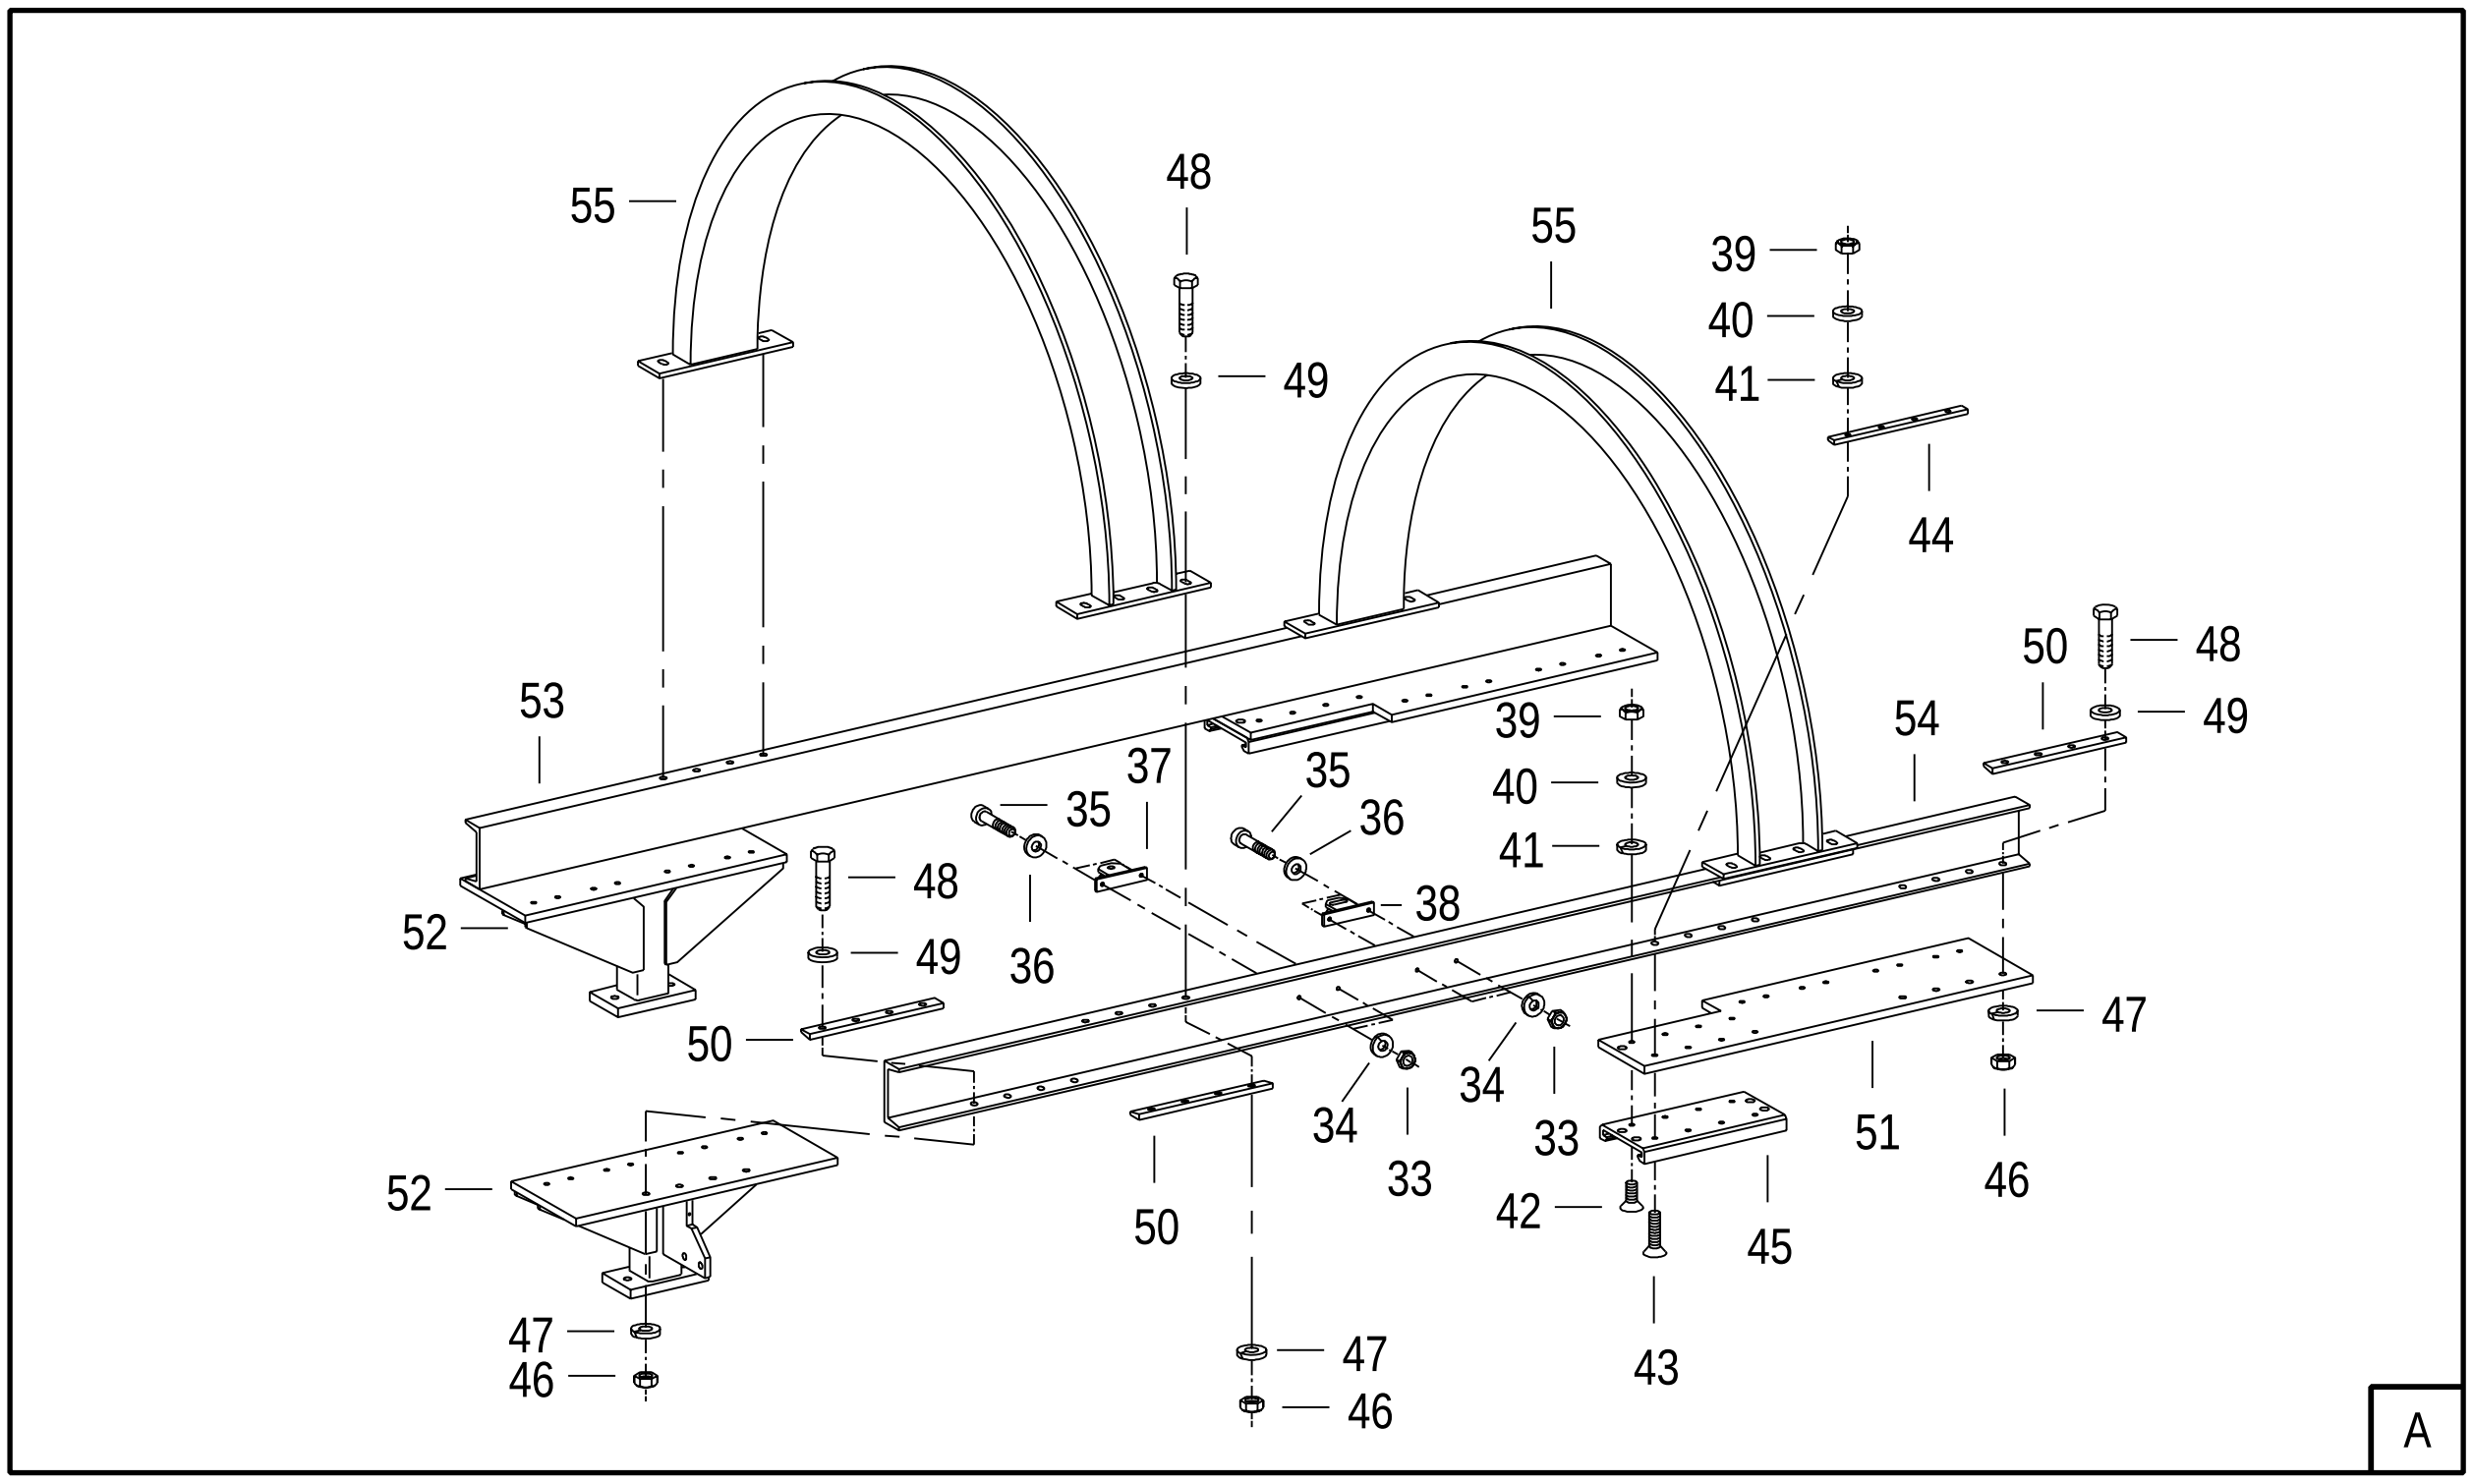

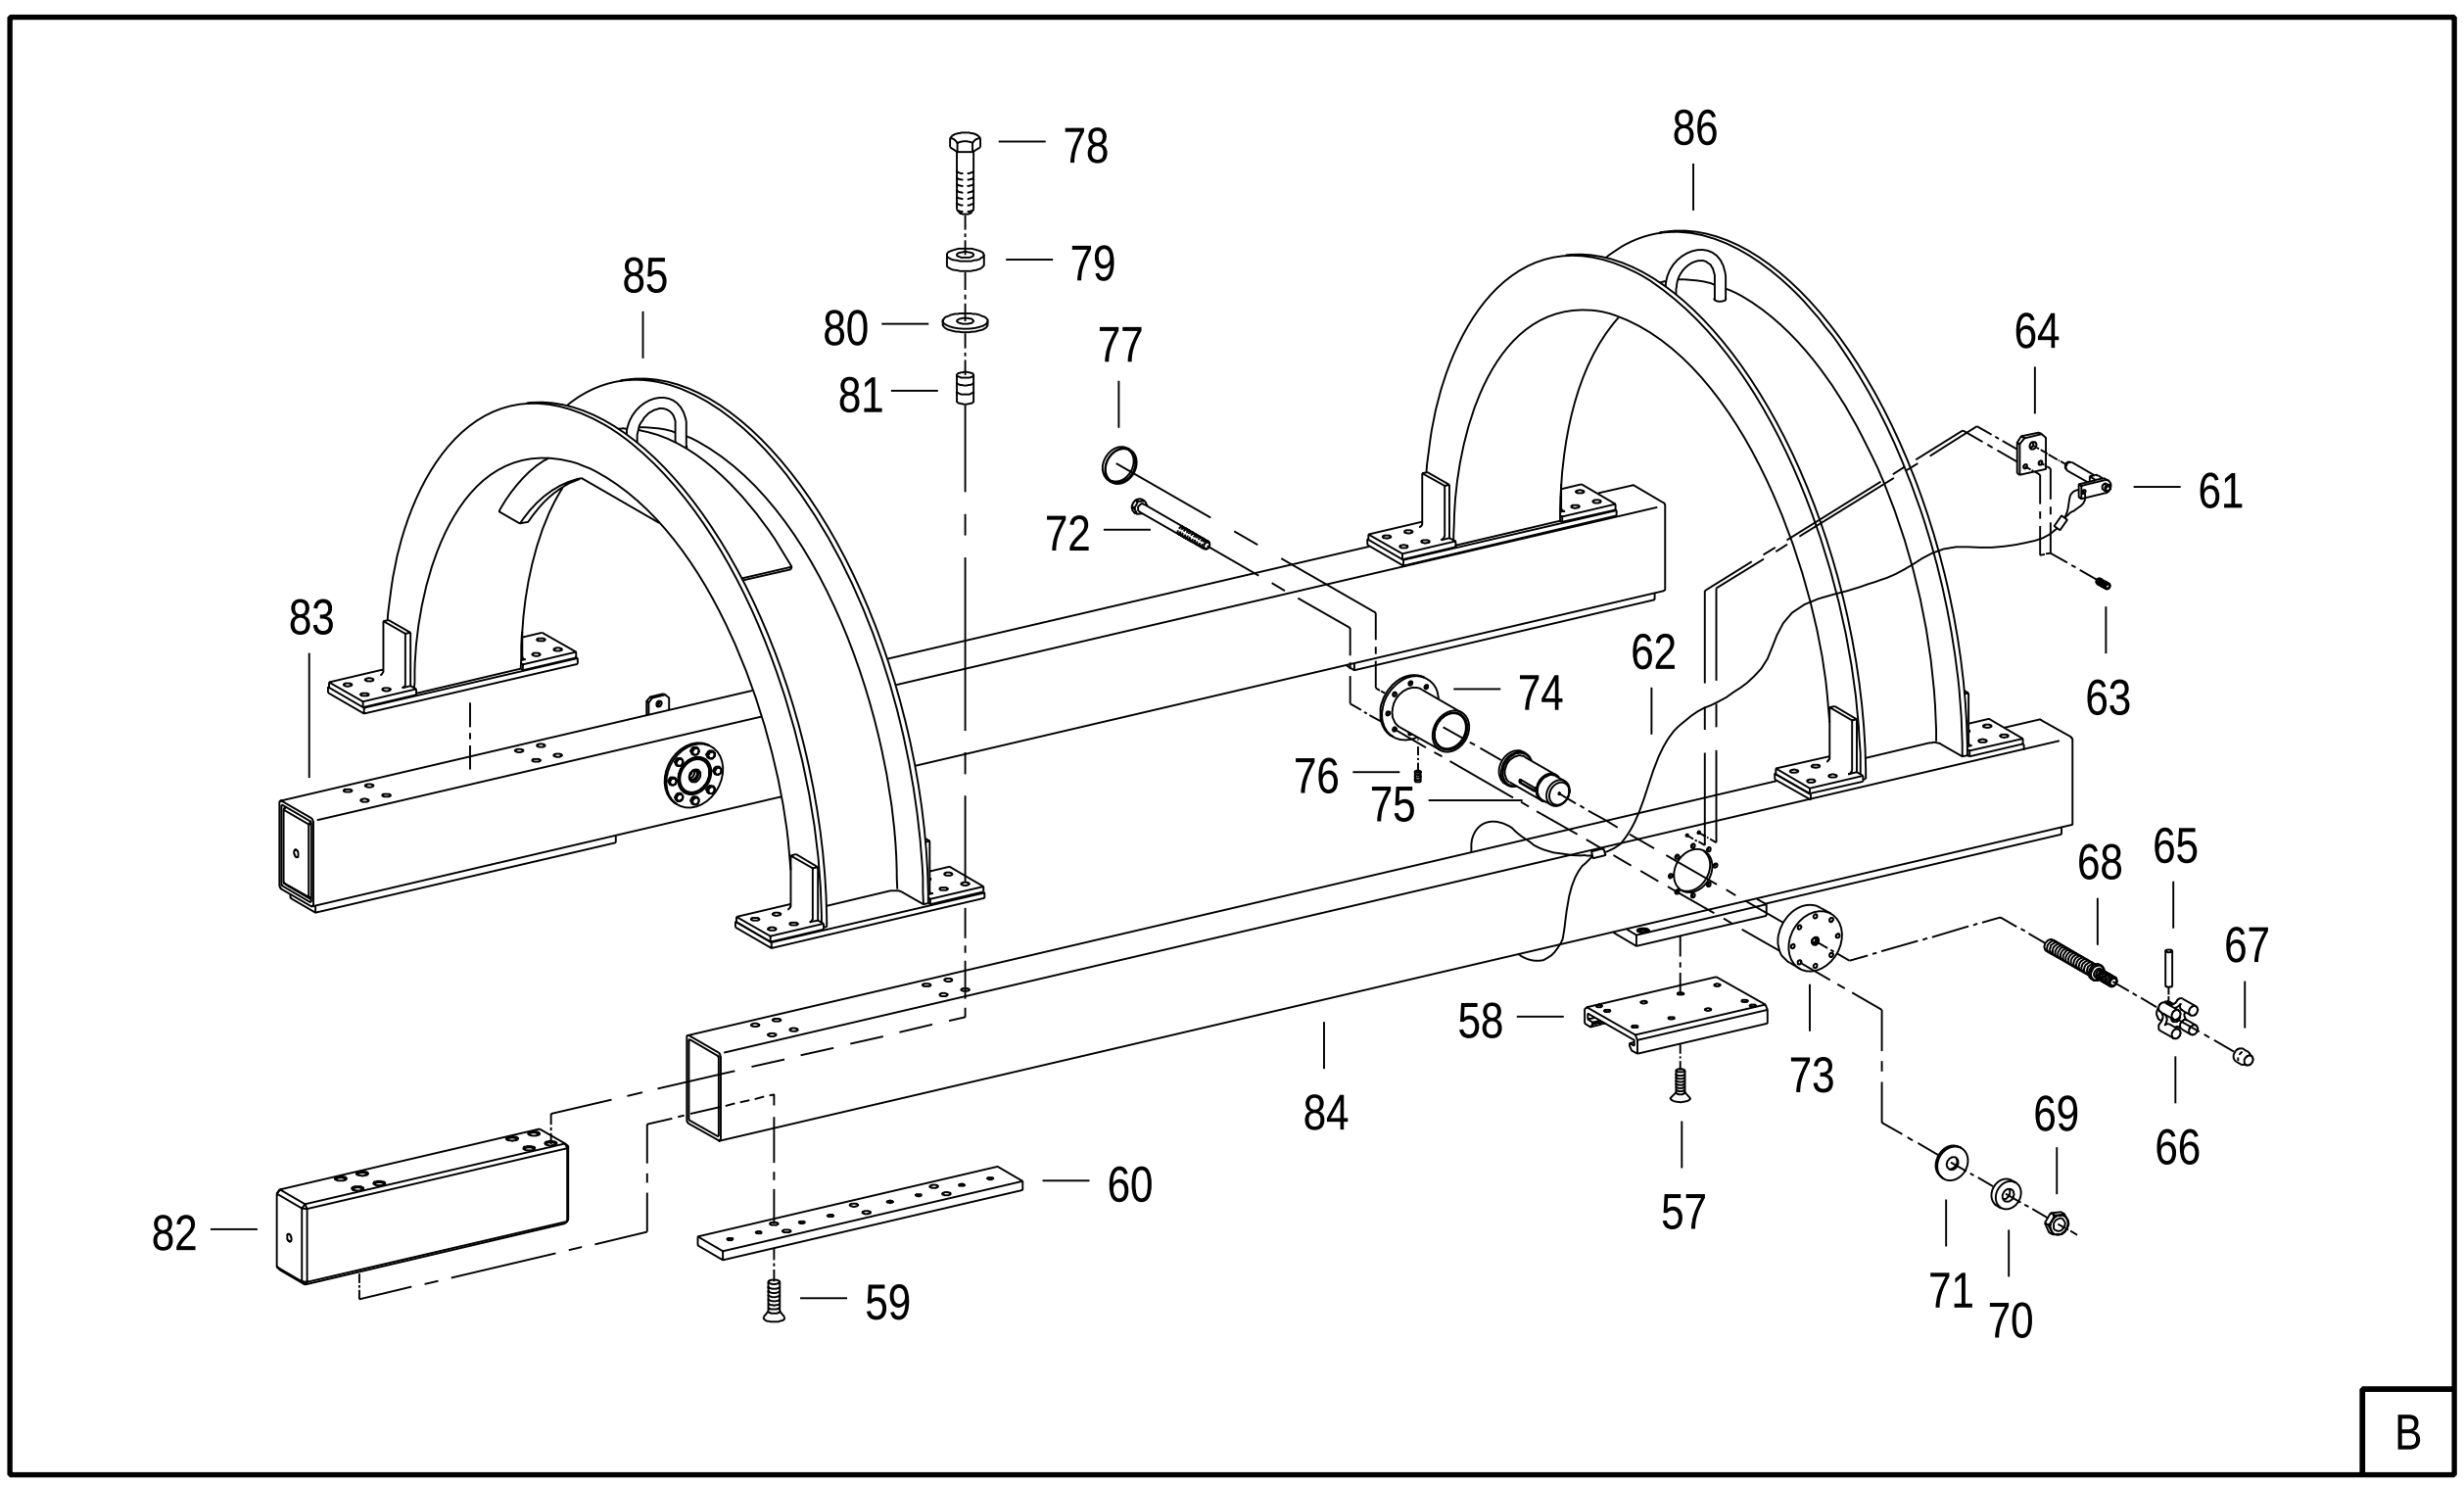

110213

FIGURE 106A. ENGINE SUPPORT ASSY
(SHEET 2 OF 3)

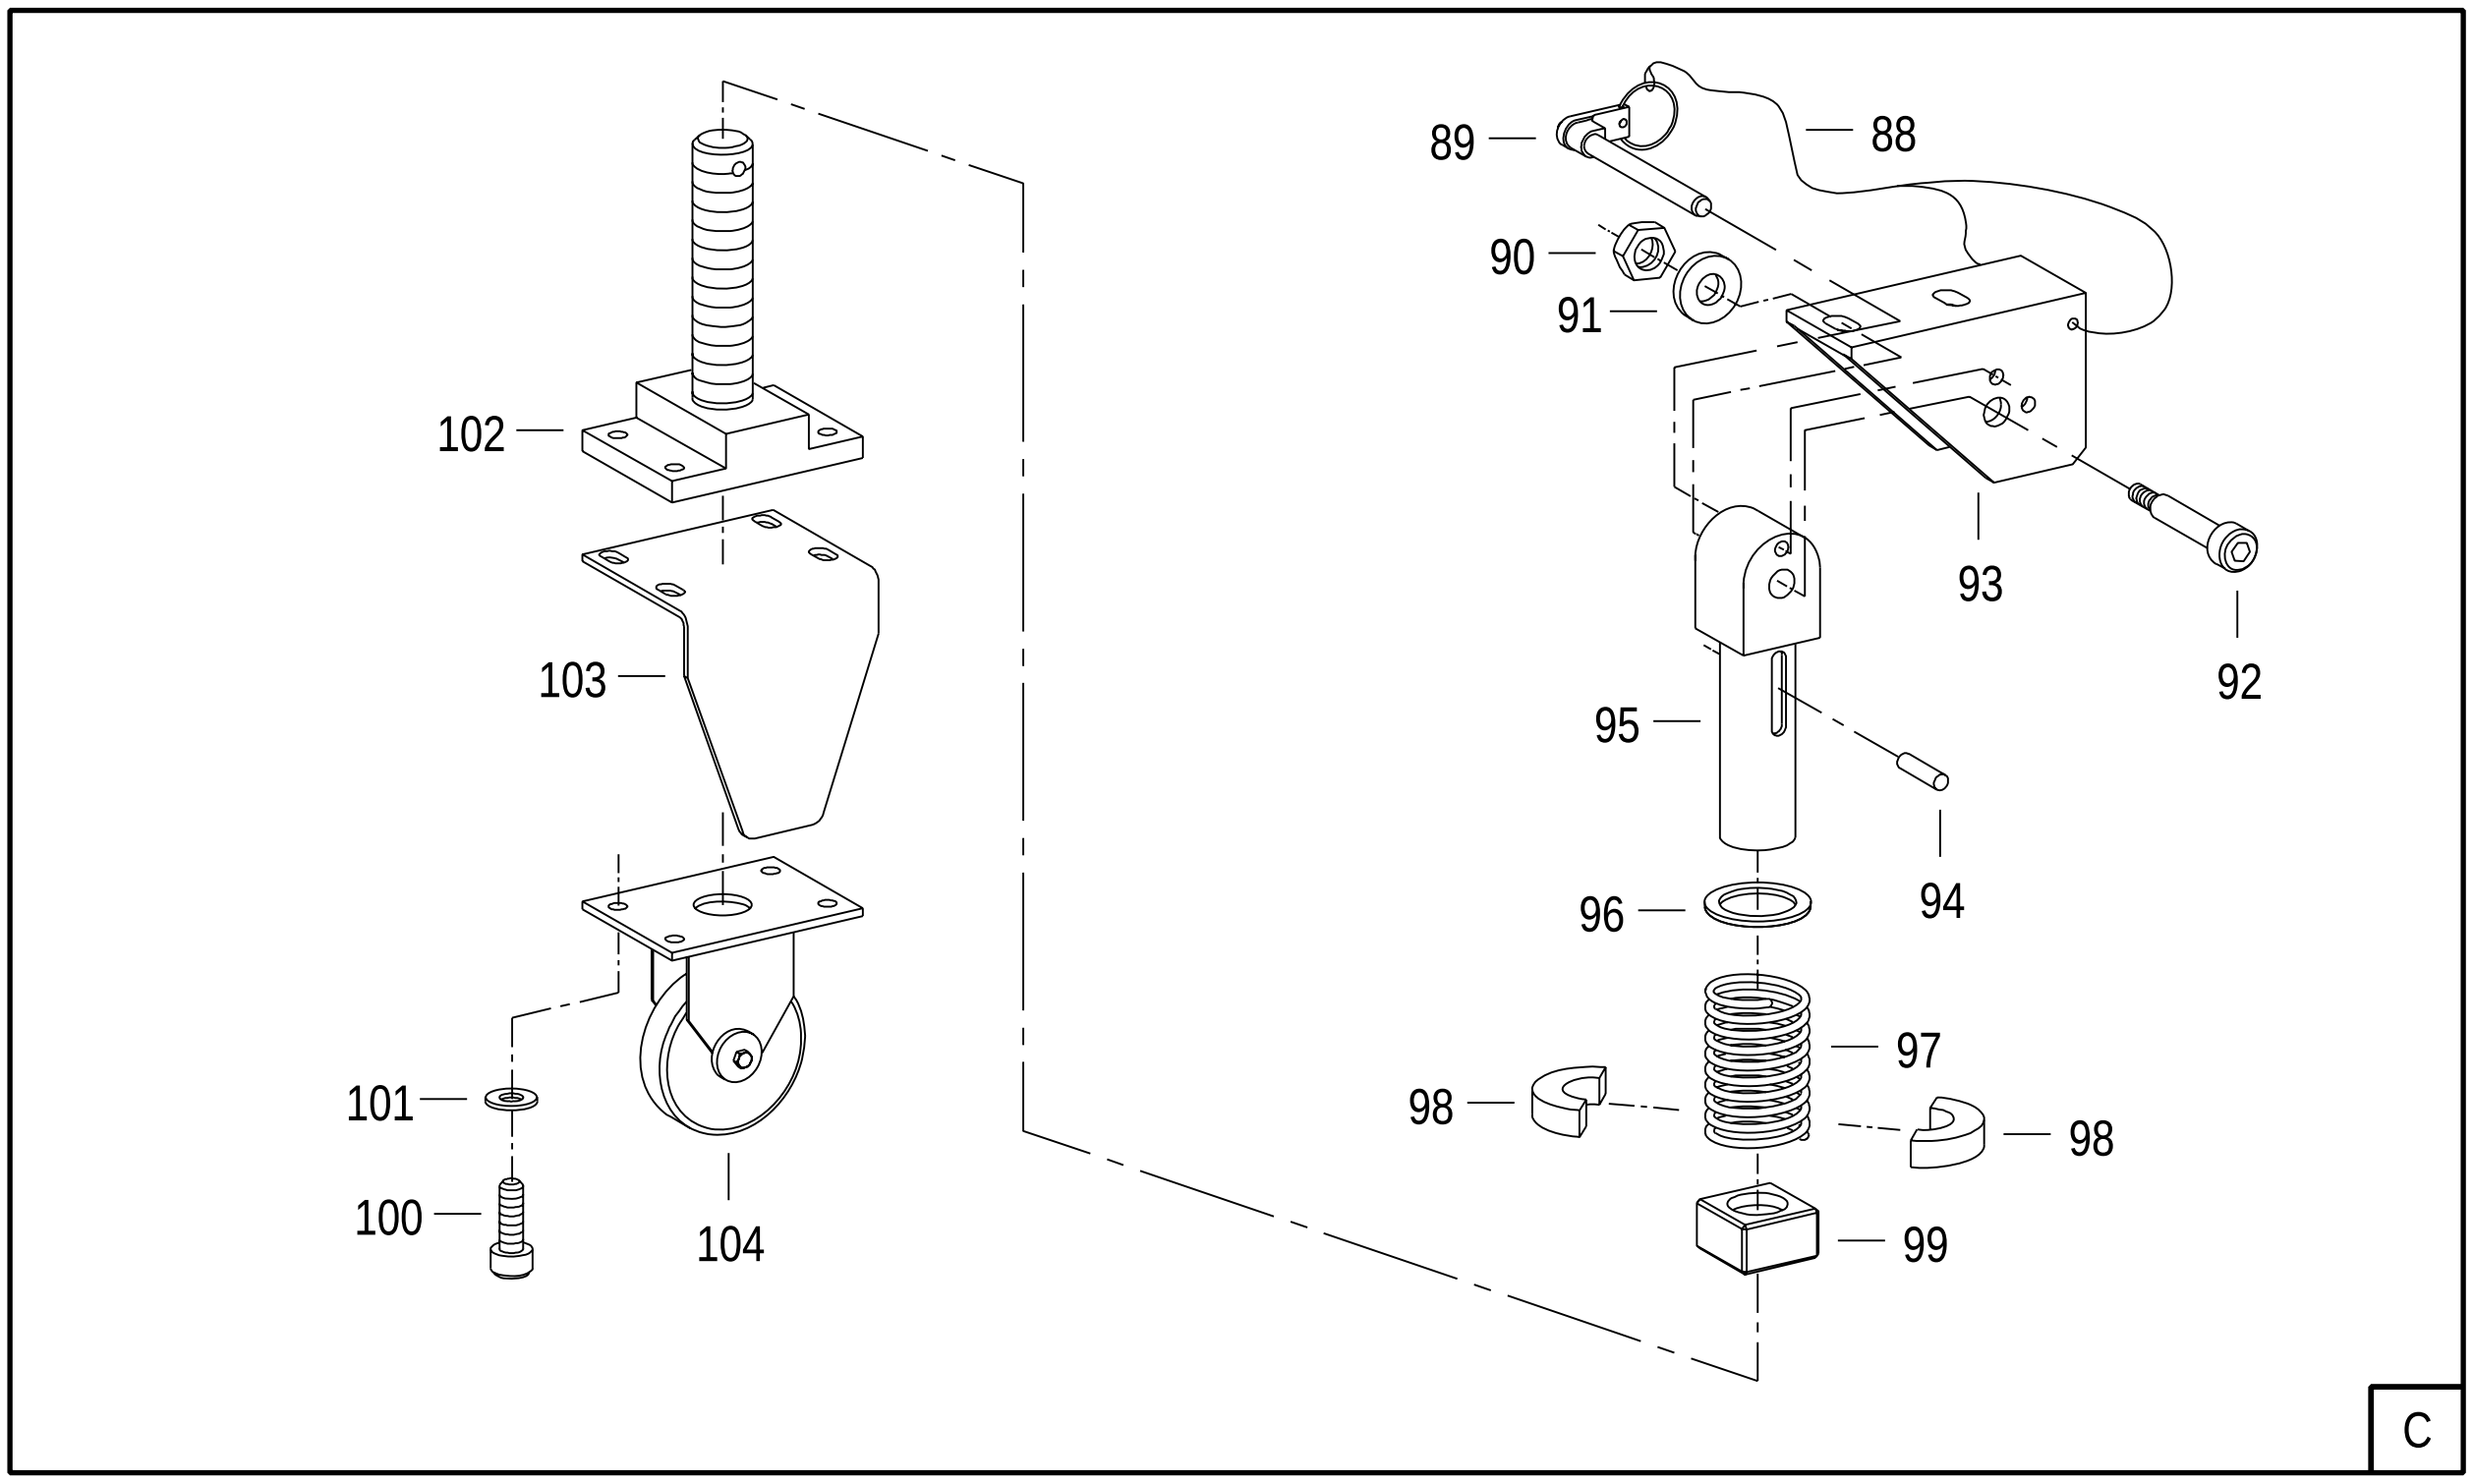


FIGURE 106A. ENGINE SUPPORT ASSY
(SHEET 3 OF 3)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	106A	P4078837	52661	SUPPORT ASSY-ENGINE	1		AOO
R				SEE FIG. 105-3 FOR NHA			
R	- 1	MS17986C821	96906	. PIN	2		
R	- 2	MS24630-46	96906	. SCREW	8		
R	- 3	97840A66	39428	. KIT-LANYARD	AR		
R				P&W PART NO. P4078837-24			
R	- 4	MS17986C407	96906	. PIN	1		
R	- 5	P4021553	52661	. PIN-ENGINE SUPPORT	1		PAOZZ
R				0.560 IN. DIA X 3.200 IN. LONG			
R	- 6	P4078956	52661	. SUPPORT-HANGER	1		
R	- 7	MS17986C620	96906	. PIN	1		
R	- 8	MS17986C1015	96906	. PIN	2		
R	- 9	1723A64	39428	. HOLDER-SPRING CLIP	4		
R				P&W PART NO. P4078837-23			
R	- 10	MS51971-5	96906	. NUT	8		PAFZZ
R	- 11	MS35338-143	96906	. WASHER	8		PAFZZ
R	- 12	MS15795-817	96906	. WASHER	16		PAFZZ
R	- 13	MS35307-417	96906	. SCREW	8		PAFZZ
R	- 14	P4078953	52661	. BRACKET-RETAINING, TIE DOWN RING	4		
R	- 15	S-643	75535	. RING-WELDLESS	4		
R				P&W PART NO. P4078837-8			
R	- 16	MS14237C08-063	96906	. BUSHING	1		
R	- 17	MS35308-365	96906	. SCREW	28		PAFZZ
R	- 18	AN960C616	88044	. WASHER	32		PAFZZ
R	- 19	MS35338-141	96906	. WASHER	32		PAFZZ
R	- 20	CB1500-30-CI	4U931	. ISOLATOR-SHOCK	8		
R				P&W PART NO. P4078837-17			
R	- 21	MS24671-55	96906	. SCREW	32		
R	- 22	MS35308-366	96906	. SCREW	4		
R	- 23	MS17986C834	96906	. PIN	1		
R	- 24	P4078957	52661	. CONNECTOR-ROD END	1		
R	- 25	P4045516	52661	. NUT-PLAIN, HEX	1		PAFZZ
R				0.750-16 X 0.422 IN. THK			
R	- 26	P4078966	52661	. TURNBUCKLE	1		
R	- 27	P4045515	52661	. NUT-PLAIN, HEX	1		PAFZZ
R				0.750-16 LH X 0.422 IN. LONG			
R	- 28	P4006422	52661	. CONNECTOR-ROD END	1		PAOZZ
R				0.750-16 LH X 3.500 IN. LONG			
R	- 29	MS14237C08-075	96906	. BUSHING	2		
R	- 30	P4078964	52661	. LEG-OUTER FRAME	2		
R	- 31	P4078965	52661	. SUPPORT-SIDE LINK	1		
R	- 32	P4078950	52661	. FRAME ASSY-OUTER	1		
R	- 33	MS51971-1	96906	.. NUT	4		PAFZZ
R	- 34	MS15795-810	96906	.. WASHER	8		PAFZZ
R	- 35	MS35307-310	96906	.. SCREW	4		PAFZZ
R	- 36	MS35338-139	96906	.. WASHER	4		PAFZZ
R	- 37	P4078980	52661	.. BRACKET-FIXED	1		
R	- 38	P4078981	52661	.. BRACKET-SLOTTED	1		
R	- 39	MS51971-3	96906	.. NUT	16		PAFZZ
R	- 40	MS35338-141	96906	.. WASHER	16		PAFZZ
R	- 41	MS15795-814	96906	.. WASHER	16		PAFZZ
R	- 42	MS24671-55	96906	.. SCREW	8		
R	- 43	MS24671-57	96906	.. SCREW	8		
R	- 44	P4078982	52661	.. PLATE-WASHER	2		
R	- 45	P4078968	52661	.. SLIDE-MOUNTING, OUTER FRAME	2		
R	- 46	MS51971-5	96906	.. NUT	32		PAFZZ
R	- 47	MS35338-143	96906	.. WASHER	32		PAFZZ
R	- 48	MS35307-415	96906	.. SCREW	32		PAFZZ
R	- 49	MS15795-855	96906	.. WASHER	64		PAFZZ
R	- 50	P4078954	52661	.. PLATE-WASHER	8		
R	- 51	P4078983	52661	.. PLATE-MOUNTING, OUTER FRAME	2		
R	- 52	P4078987	52661	.. LEG-FRONT, OUTER FRAME	2		

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	106A - 53	P4078985	52661	.. CHANNEL-RIGHT HAND, OUTER FRAME	1		
R	- 54	P4078984	52661	.. CHANNEL-LEFT HAND, OUTER FRAME	1		
R	- 55	P4078951	52661	.. SUPPORT-OUTER FRAME	2		
R	- 56	P4078952	52661	. FRAME ASSY-INNER	1		
R	- 57	MS24671-52	96906	.. SCREW	8		
R	- 58	P4078986	52661	.. SLIDE-MOUNTING, INNER FRAME	1		
R	- 59	MS24671-79	96906	.. SCREW	24		
R	- 60	P4078988	52661	.. PLATE-ISOLATOR MOUNTING	4		
R	- 61	MS17986C605	96906	.. PIN	2		
R	- 62	97840A66	39428	.. KIT-LANYARD	AR		
R				P&W PART NO. P4078952-17			
R	- 63	MS24630-46	96906	.. SCREW	4		
R	- 64	P4078963	52661	.. BRACKET-RETAINING	2		
R	- 65	MS16555-650	96906	.. PIN	2		PAFZZ
R	- 66	P4078955	52661	.. KNOB-BAR	2		
R	- 67	95630A248	39428	.. WASHER-TEFLON	2		
R				0.500 IN. NOM ID			
R				P&W PART NO. P4078952-25			
R	- 68	P4078962	52661	.. SCREW-DRIVE	2		
R	- 69	MS51972-1	96906	.. NUT	16		PAFZZ
R	- 70	MS35338-139	96906	.. WASHER	16		PAFZZ
R	- 71	AN960C416	88044	.. WASHER	16		PAFZZ
R	- 72	AN4-C60A	88044	.. BOLT	16		
R	- 73	P4078961	52661	.. PLATE-RETAINER	2		
R	- 74	P4078959	52661	.. HOUSING-THRUST PIN	2		
R	- 75	P4078960	52661	.. PIN-THRUST	2		
R	- 76	NAS1081C4D8	80205	.. SCREW	2		
R	- 77	MCU-1875-G	06GU9	.. SEAL-WIPER	2		
R				P&W PART NO. P4078952-20			
R	- 78	MS35307-415	96906	.. SCREW	32		PAFZZ
R	- 79	MS35338-143	96906	.. WASHER	32		PAFZZ
R	- 80	MS15795-855	96906	.. WASHER	32		PAFZZ
R	- 81	MS51830-110	96906	.. INSERT	32		
R	- 82	P4078991	52661	.. PLUG-INNER FRAME	4		
R	- 83	P4078993	52661	.. RAIL-RIGHT HAND, INNER FRAME	1		
R	- 84	P4078992	52661	.. RAIL-LEFT HAND, INNER FRAME	1		
R	- 85	P4078989	52661	.. SUPPORT-FRONT, INNER FRAME	1		
R	- 86	P4078990	52661	.. SUPPORT-REAR, INNER FRAME	1		
R	- 87	P4078973	52661	. SUPPORT LEG ASSY	2		
R	- 88	CL-23-KA-10.0	99862	.. CABLE ASSY	1		
R				P&W PART NO. P4078973-10			
R	- 89	MS17986C420	96906	.. PIN	1		
R	- 90	MS51971-3	96906	.. NUT	1		PAFZZ
R	- 91	MS15795-814	96906	.. WASHER	1		PAFZZ
R	- 92	MS51975-3	96906	.. SCREW	1		PAFZZ
R	- 93	P4078974	52661	.. CLEVIS	1		
R	- 94	MS16555-51	96906	.. PIN	1		PAFZZ
R	- 95	P4078975	52661	.. SWING ARM ASSY	1		
R	- 96	P4078976	52661	.. WASHER-FLAT	1		
R	- 97	C1687-135-2500S	06092	.. SPRING-COMPRESSION	1		
R				P&W PART NO. P4078973-8			
R	- 98	6436K21	39428	.. COLLAR-SPLIT	1		
R				P&W PART NO. P4078973-7			
R	- 99	P4078977	52661	.. NUT-SQUARE	1		
R	- 100	MS16995-66	96906	.. SCREW	4		PAFZZ
R	- 101	MS15795-812	96906	.. WASHER	4		PAFZZ
R	- 102	P4078978	52661	.. LOWER ARM ASSY	1		
R	- 103	P4078979	52661	.. BRACKET-GUIDE	1		
R	- 104	4X696	25795	.. CASTER	1		
R				P&W PART NO. P4048973-6			
R	- 105	< P4078958	52661	. MARKINGS-SUPPORT ASSY, ENGINE	1		
R	- 106	P52715	52661	.. PLATE-IDENTIFICATION, SPARE PARTS	2		PAFZZ
R				SHIPPING CONTAINER			

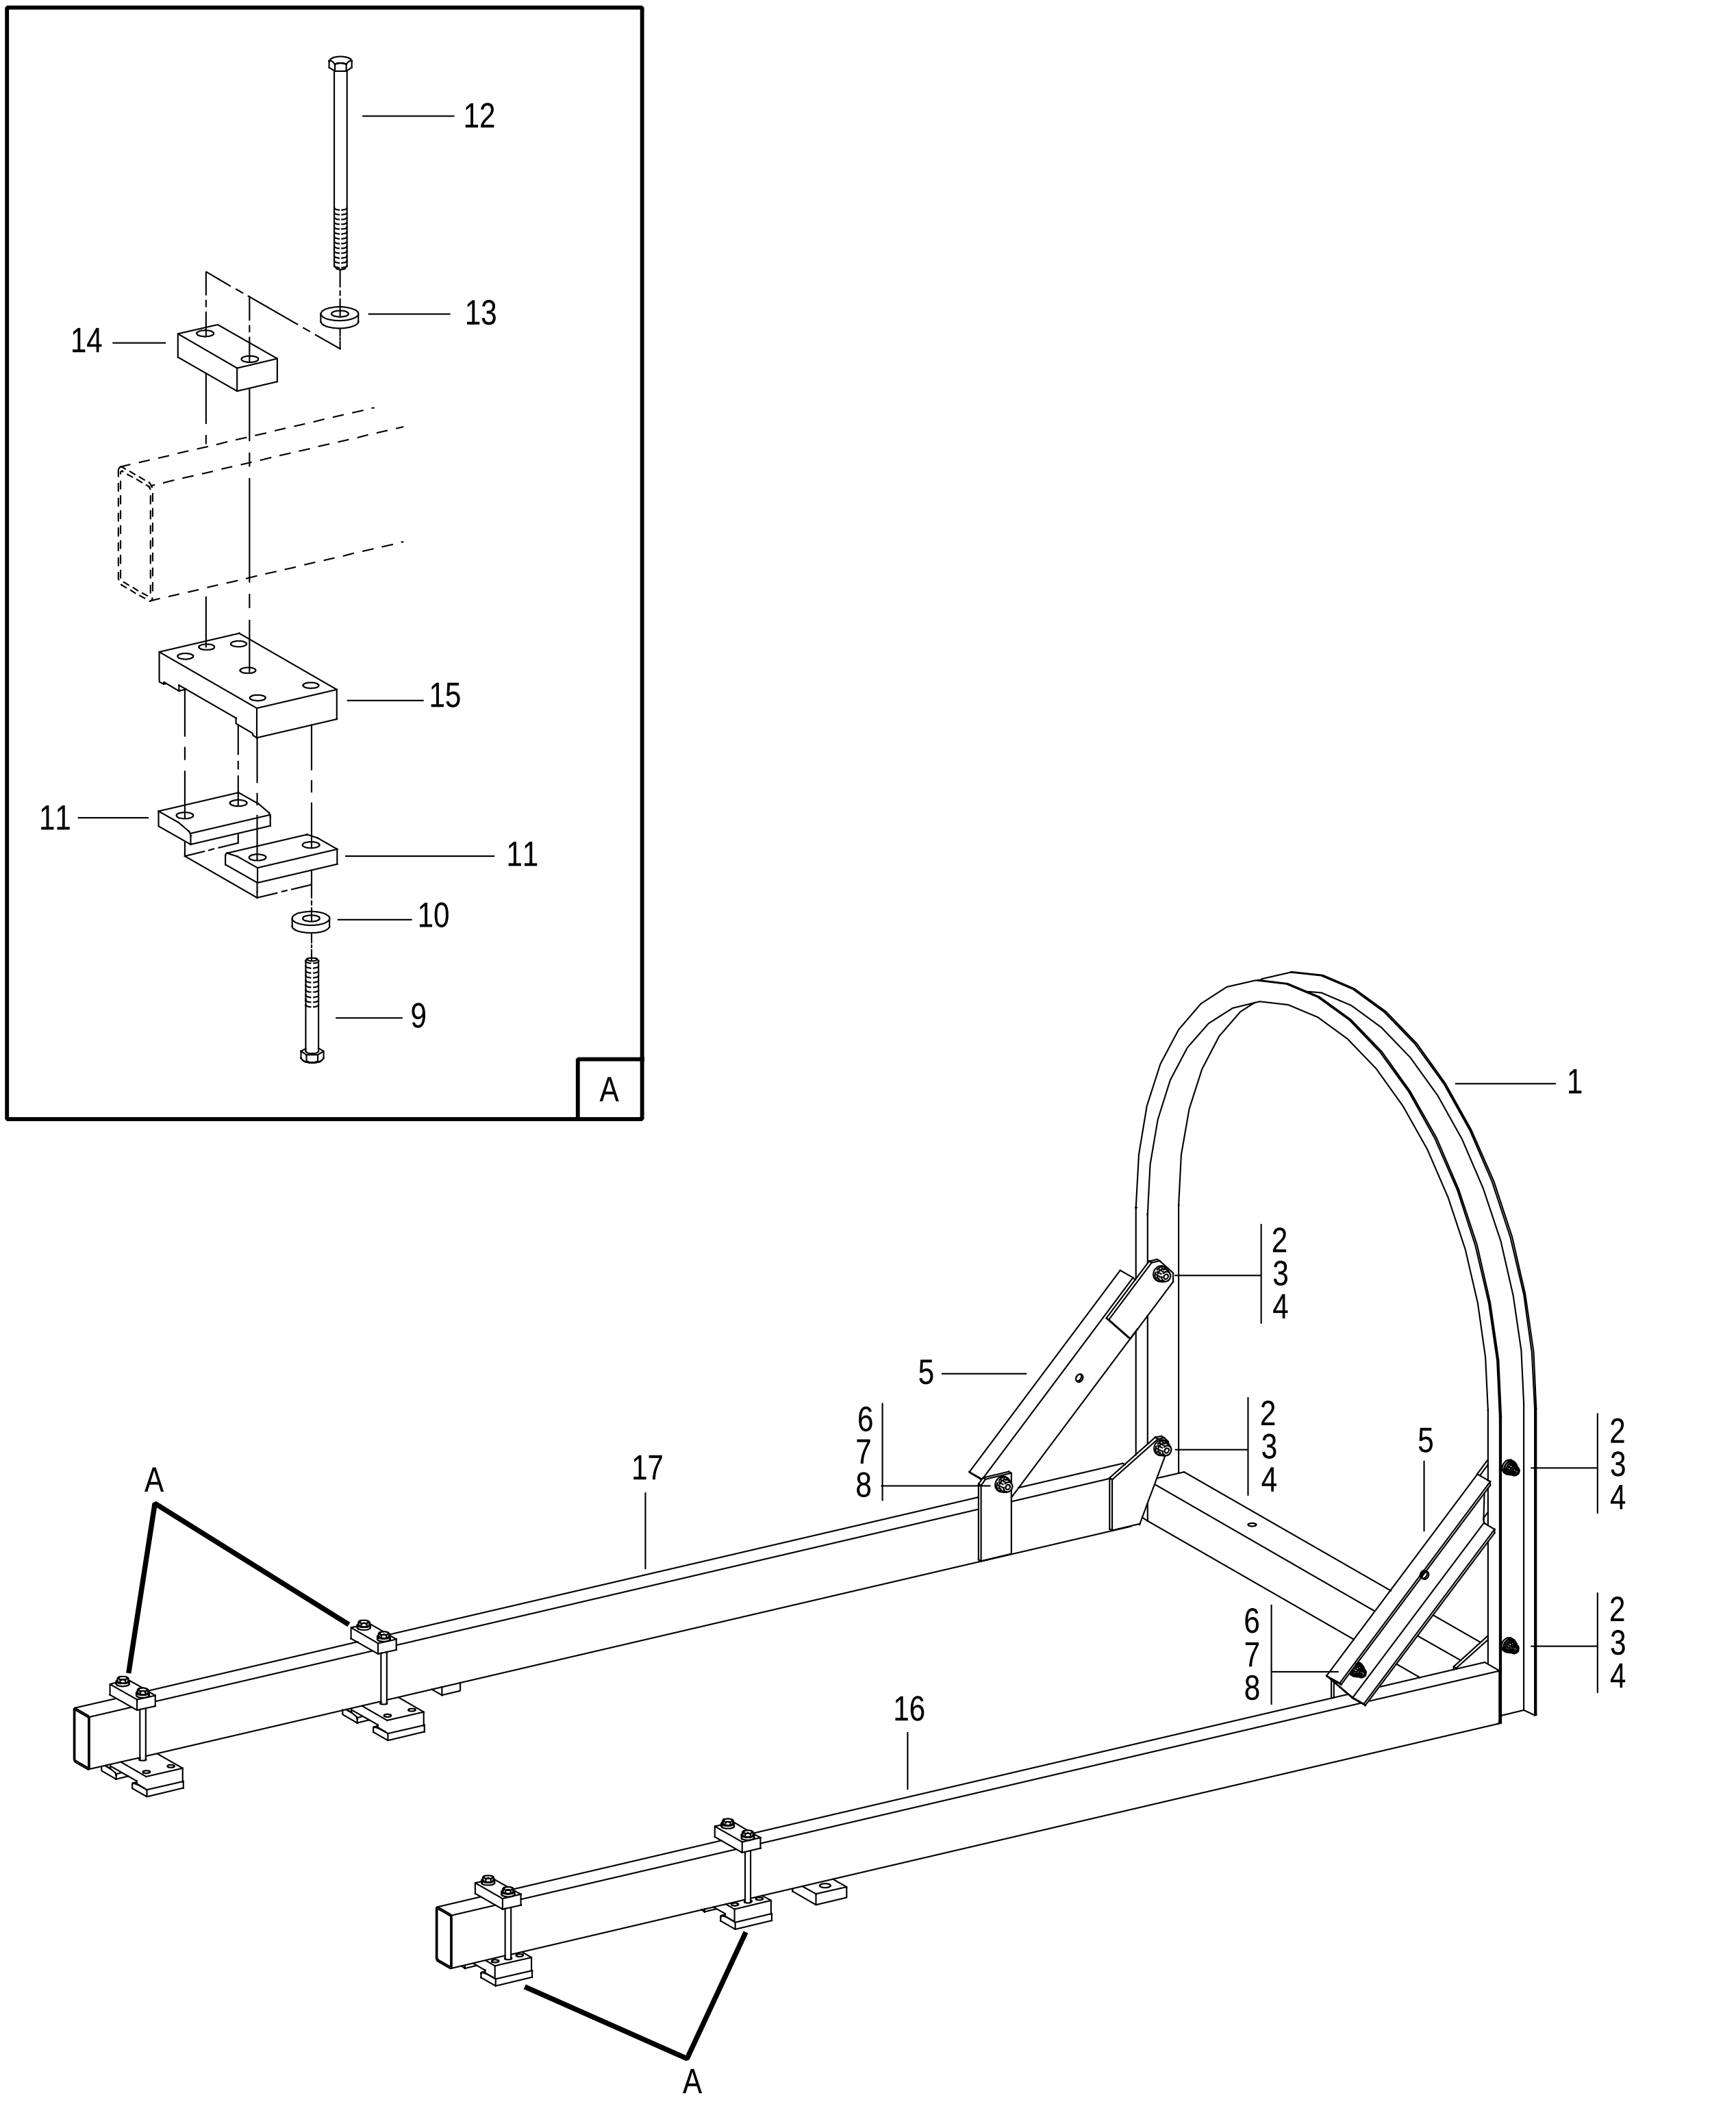


FIGURE 107. ENGINE BUMPER ASSY

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
107	P4030580	52661	BUMPER ASSY-ENGINE . . . . SEE FIG. 105-7 FOR NHA	1		AOO
- 1	P4030587	52661	. BUMPER-ENGINE SHIPPING	1		PAOBZ
- 2	MS21045-8	96906	. NUT (AP)	4		PAOZZ
- 3	MS27183-18	96906	. WASHER (AP)	4		PAOZZ
- 4	MS90726-113	96906	. SCREW (AP)	4		PAOZZ
- 5	P4030584	52661	. BRACE-ENGINE SHIPPING BUMPER, LH	1		PAOBZ
	P4030585	52661	. BRACE-ENGINE SHIPPING BUMPER, RH	1		PAOBZ
- 6	MS21045-8	96906	. NUT (AP)	1		PAOZZ
- 7	MS27183-18	96906	. WASHER (AP)	1		PAOZZ
- 8	MS90726-113	96906	. SCREW (AP)	1		PAOZZ
- 9	MS90726-113	96906	. SCREW	16		PAOZZ
- 10	MS35338-48	96906	. WASHER	16		PAFZZ
- 11	P4030592	52661	. PLATE-ENGINE SHIPPING BUMPER	8		PAOBZ
- 12	MS90726-128	96906	. SCREW	8		PAOZZ
- 13	MS35338-48	96906	. WASHER	8		PAFZZ
- 14	P4030591	52661	. PLATE-ENGINE SHIPPING BUMPER	4		PAOZZ
- 15	P4030590	52661	. PLATE-ENGINE SHIPPING BUMPER	4		PAOZZ
- 16	P4030579	52661	. BASE-ENGINE SHIPPING BUMPER	1		PAOBZ
- 17	P4030578	52661	. BASE-ENGINE SHIPPING BUMPER	1		PAOBZ

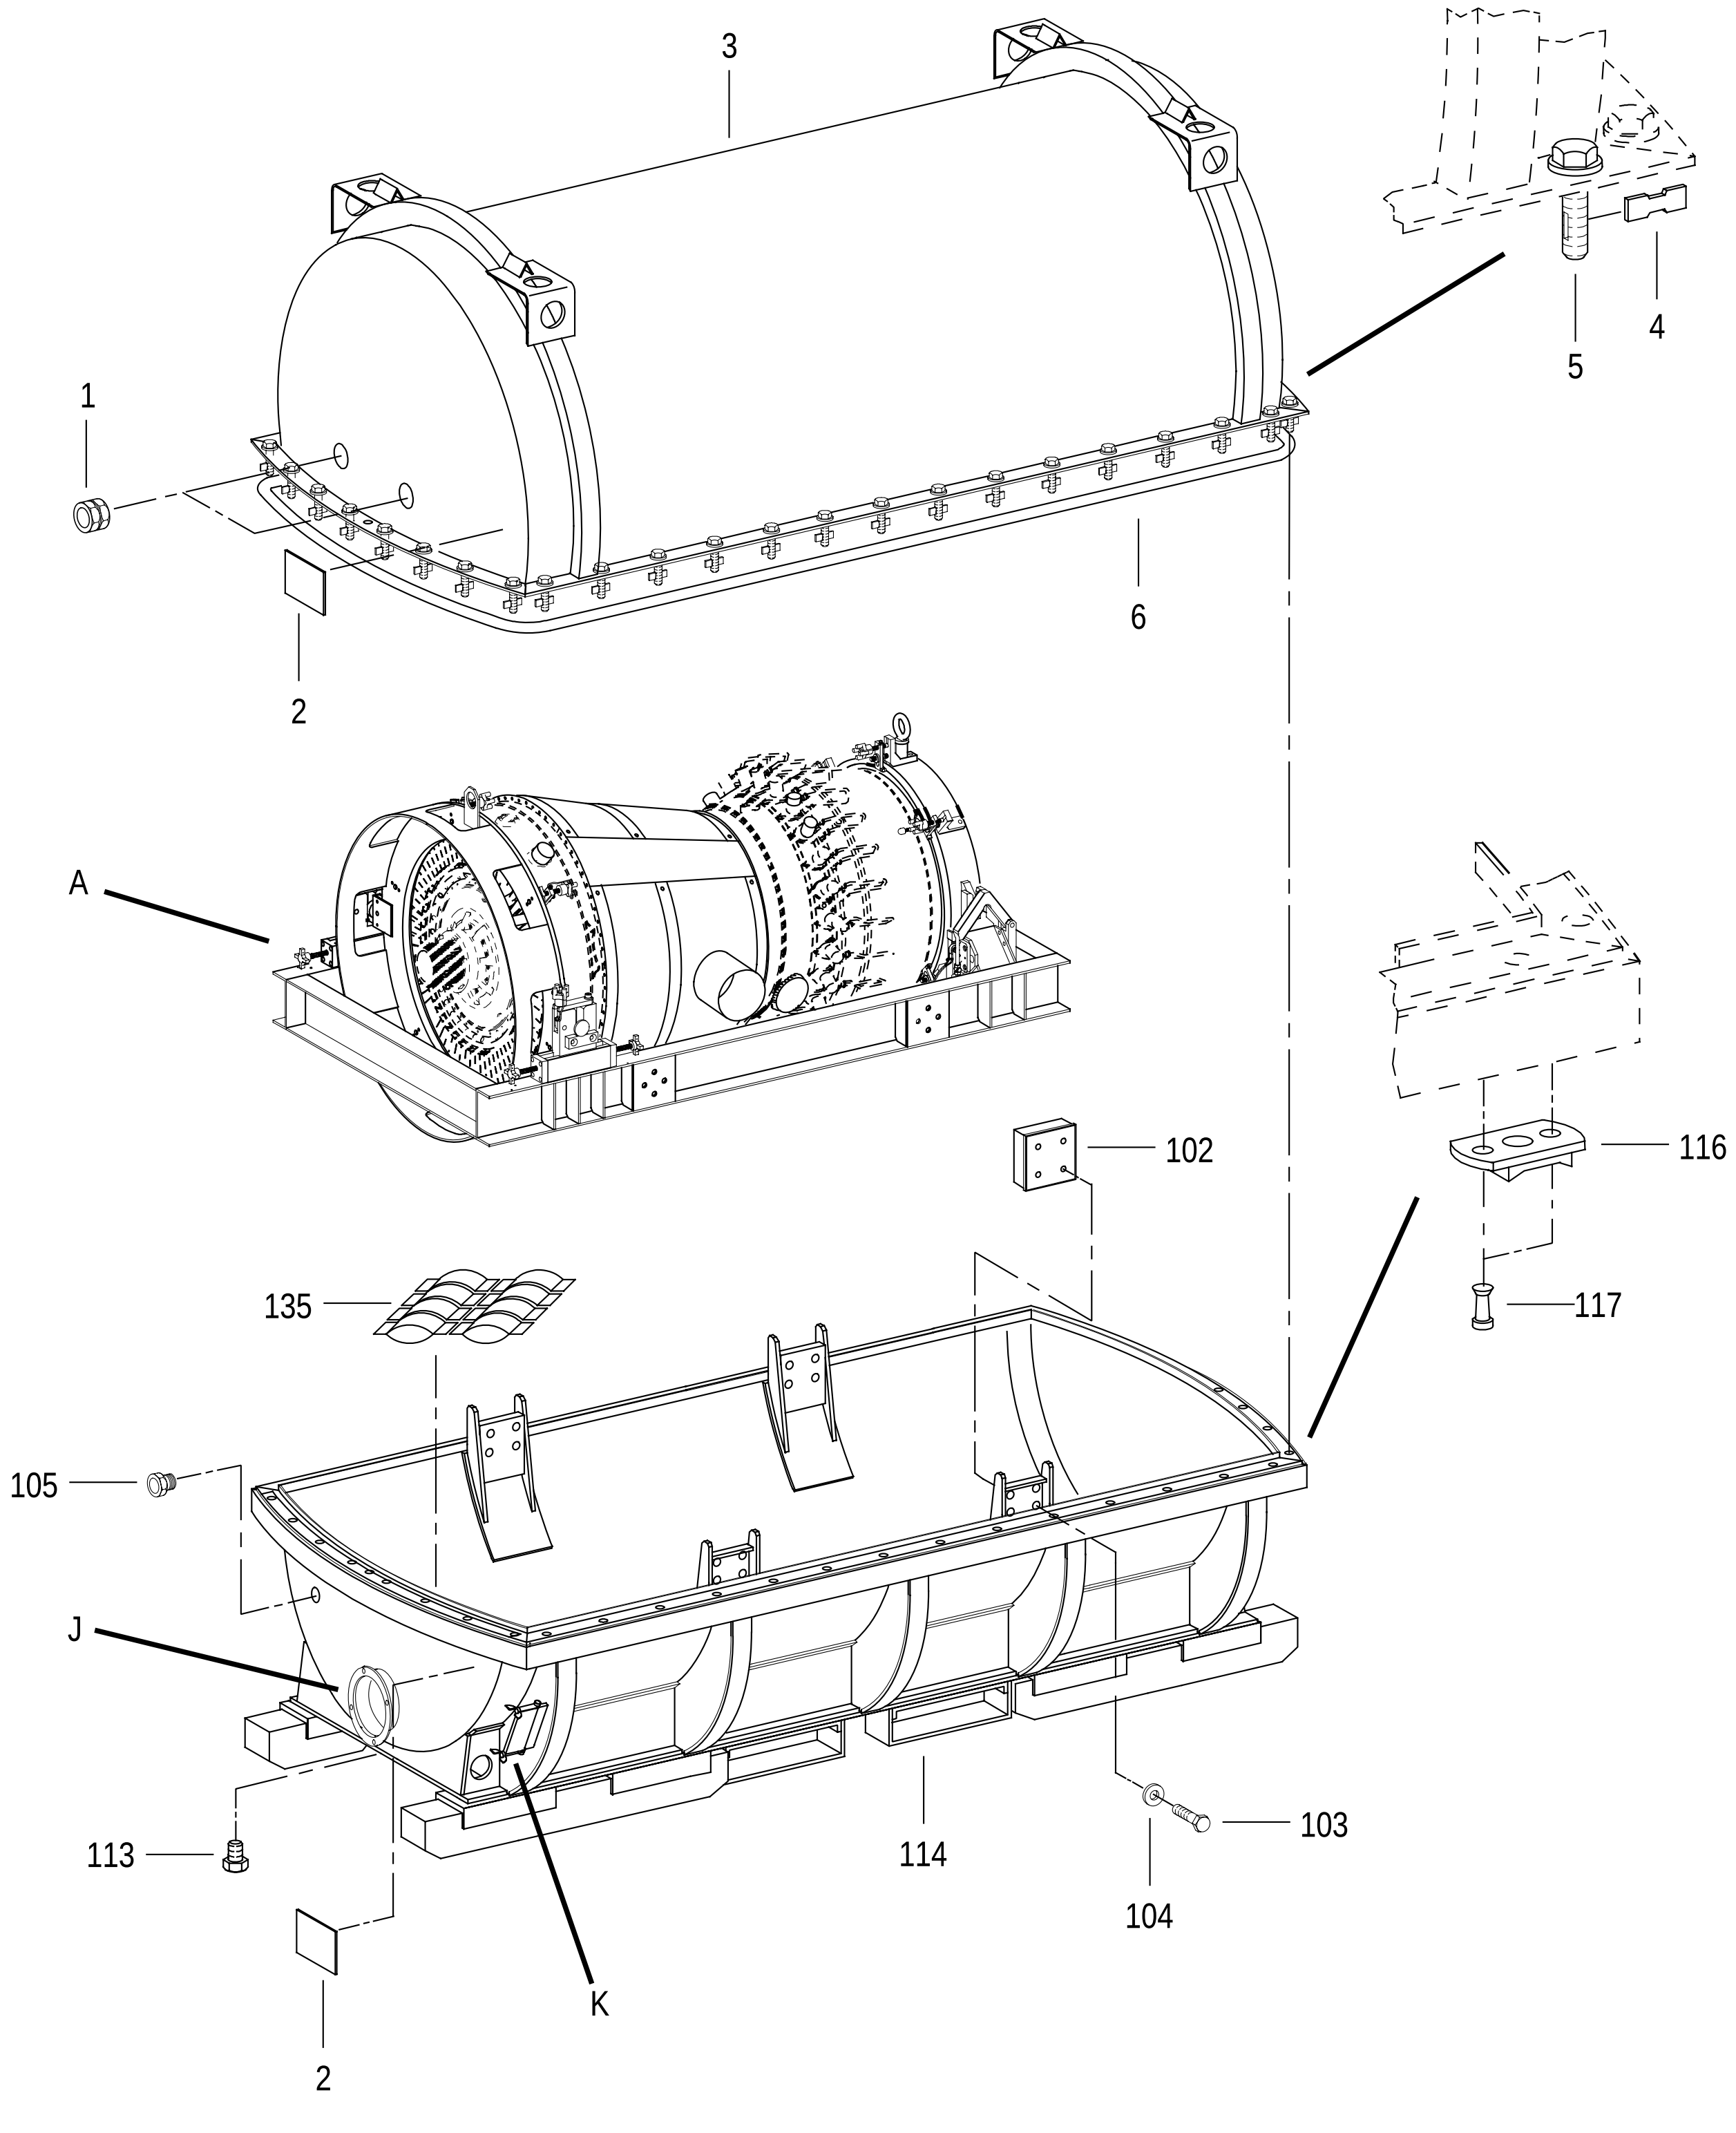


FIGURE 108. CORE ENGINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 1 OF 6)

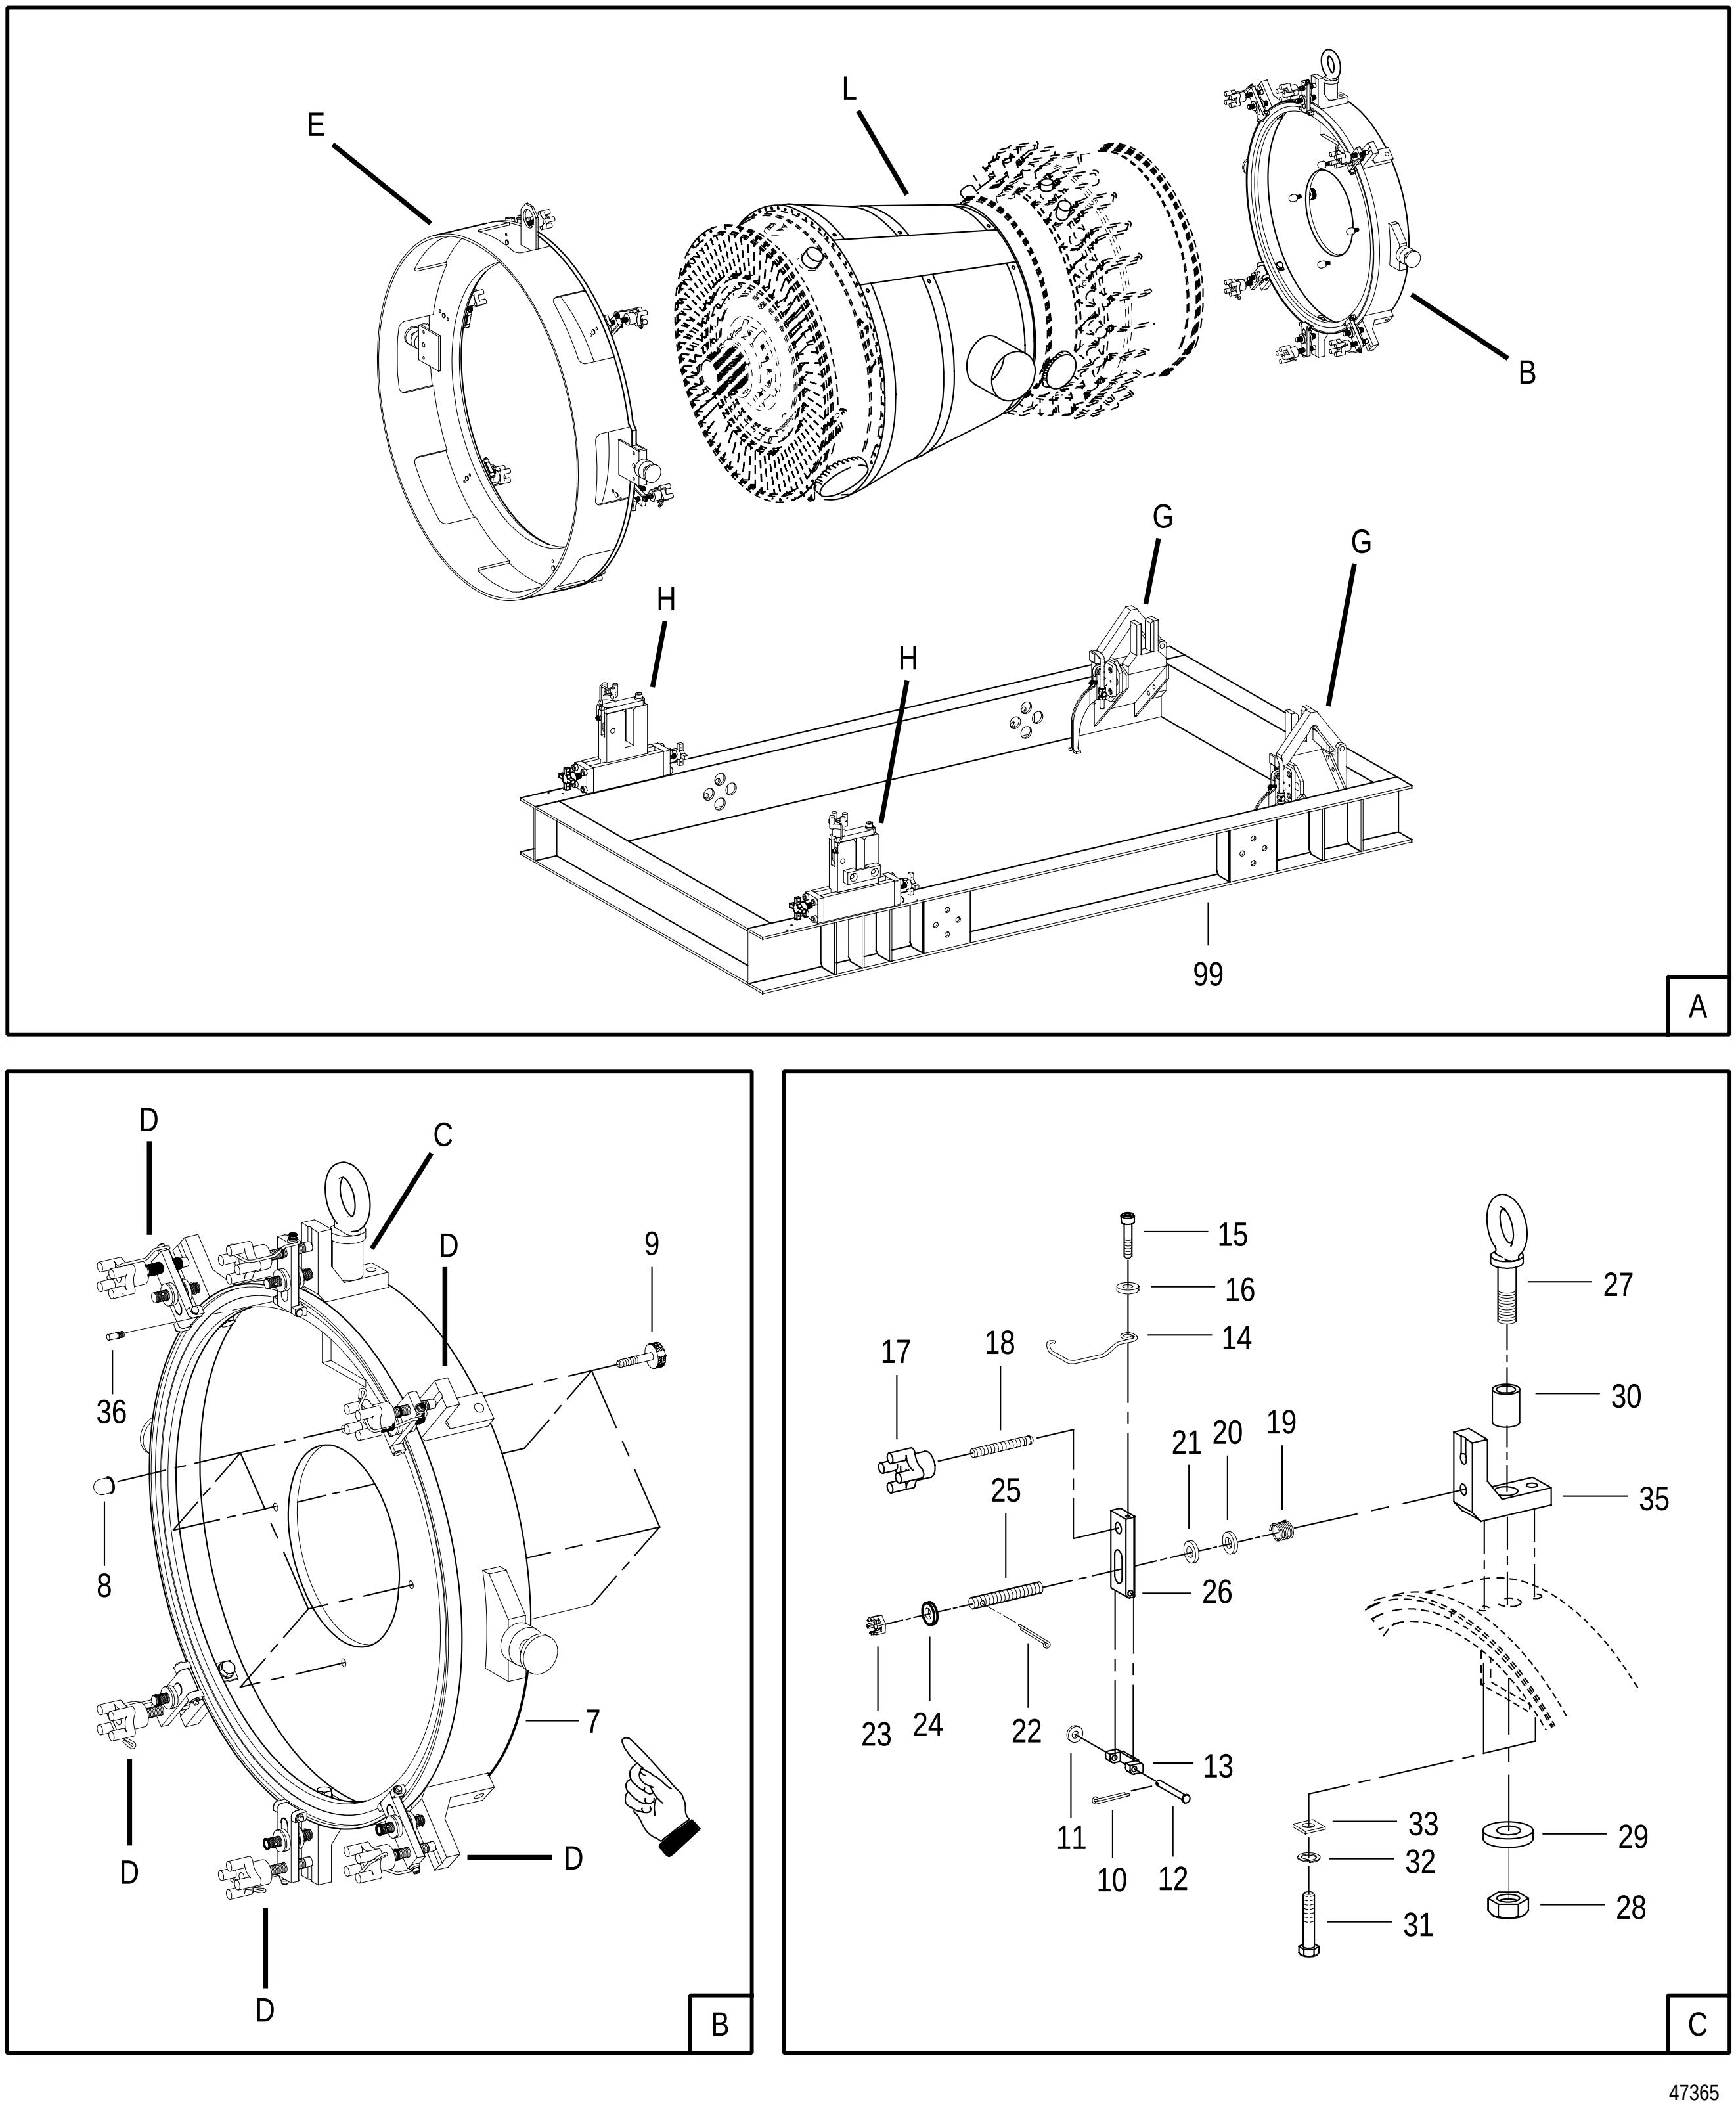


FIGURE 108. CORE ENGINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 2 OF 6)

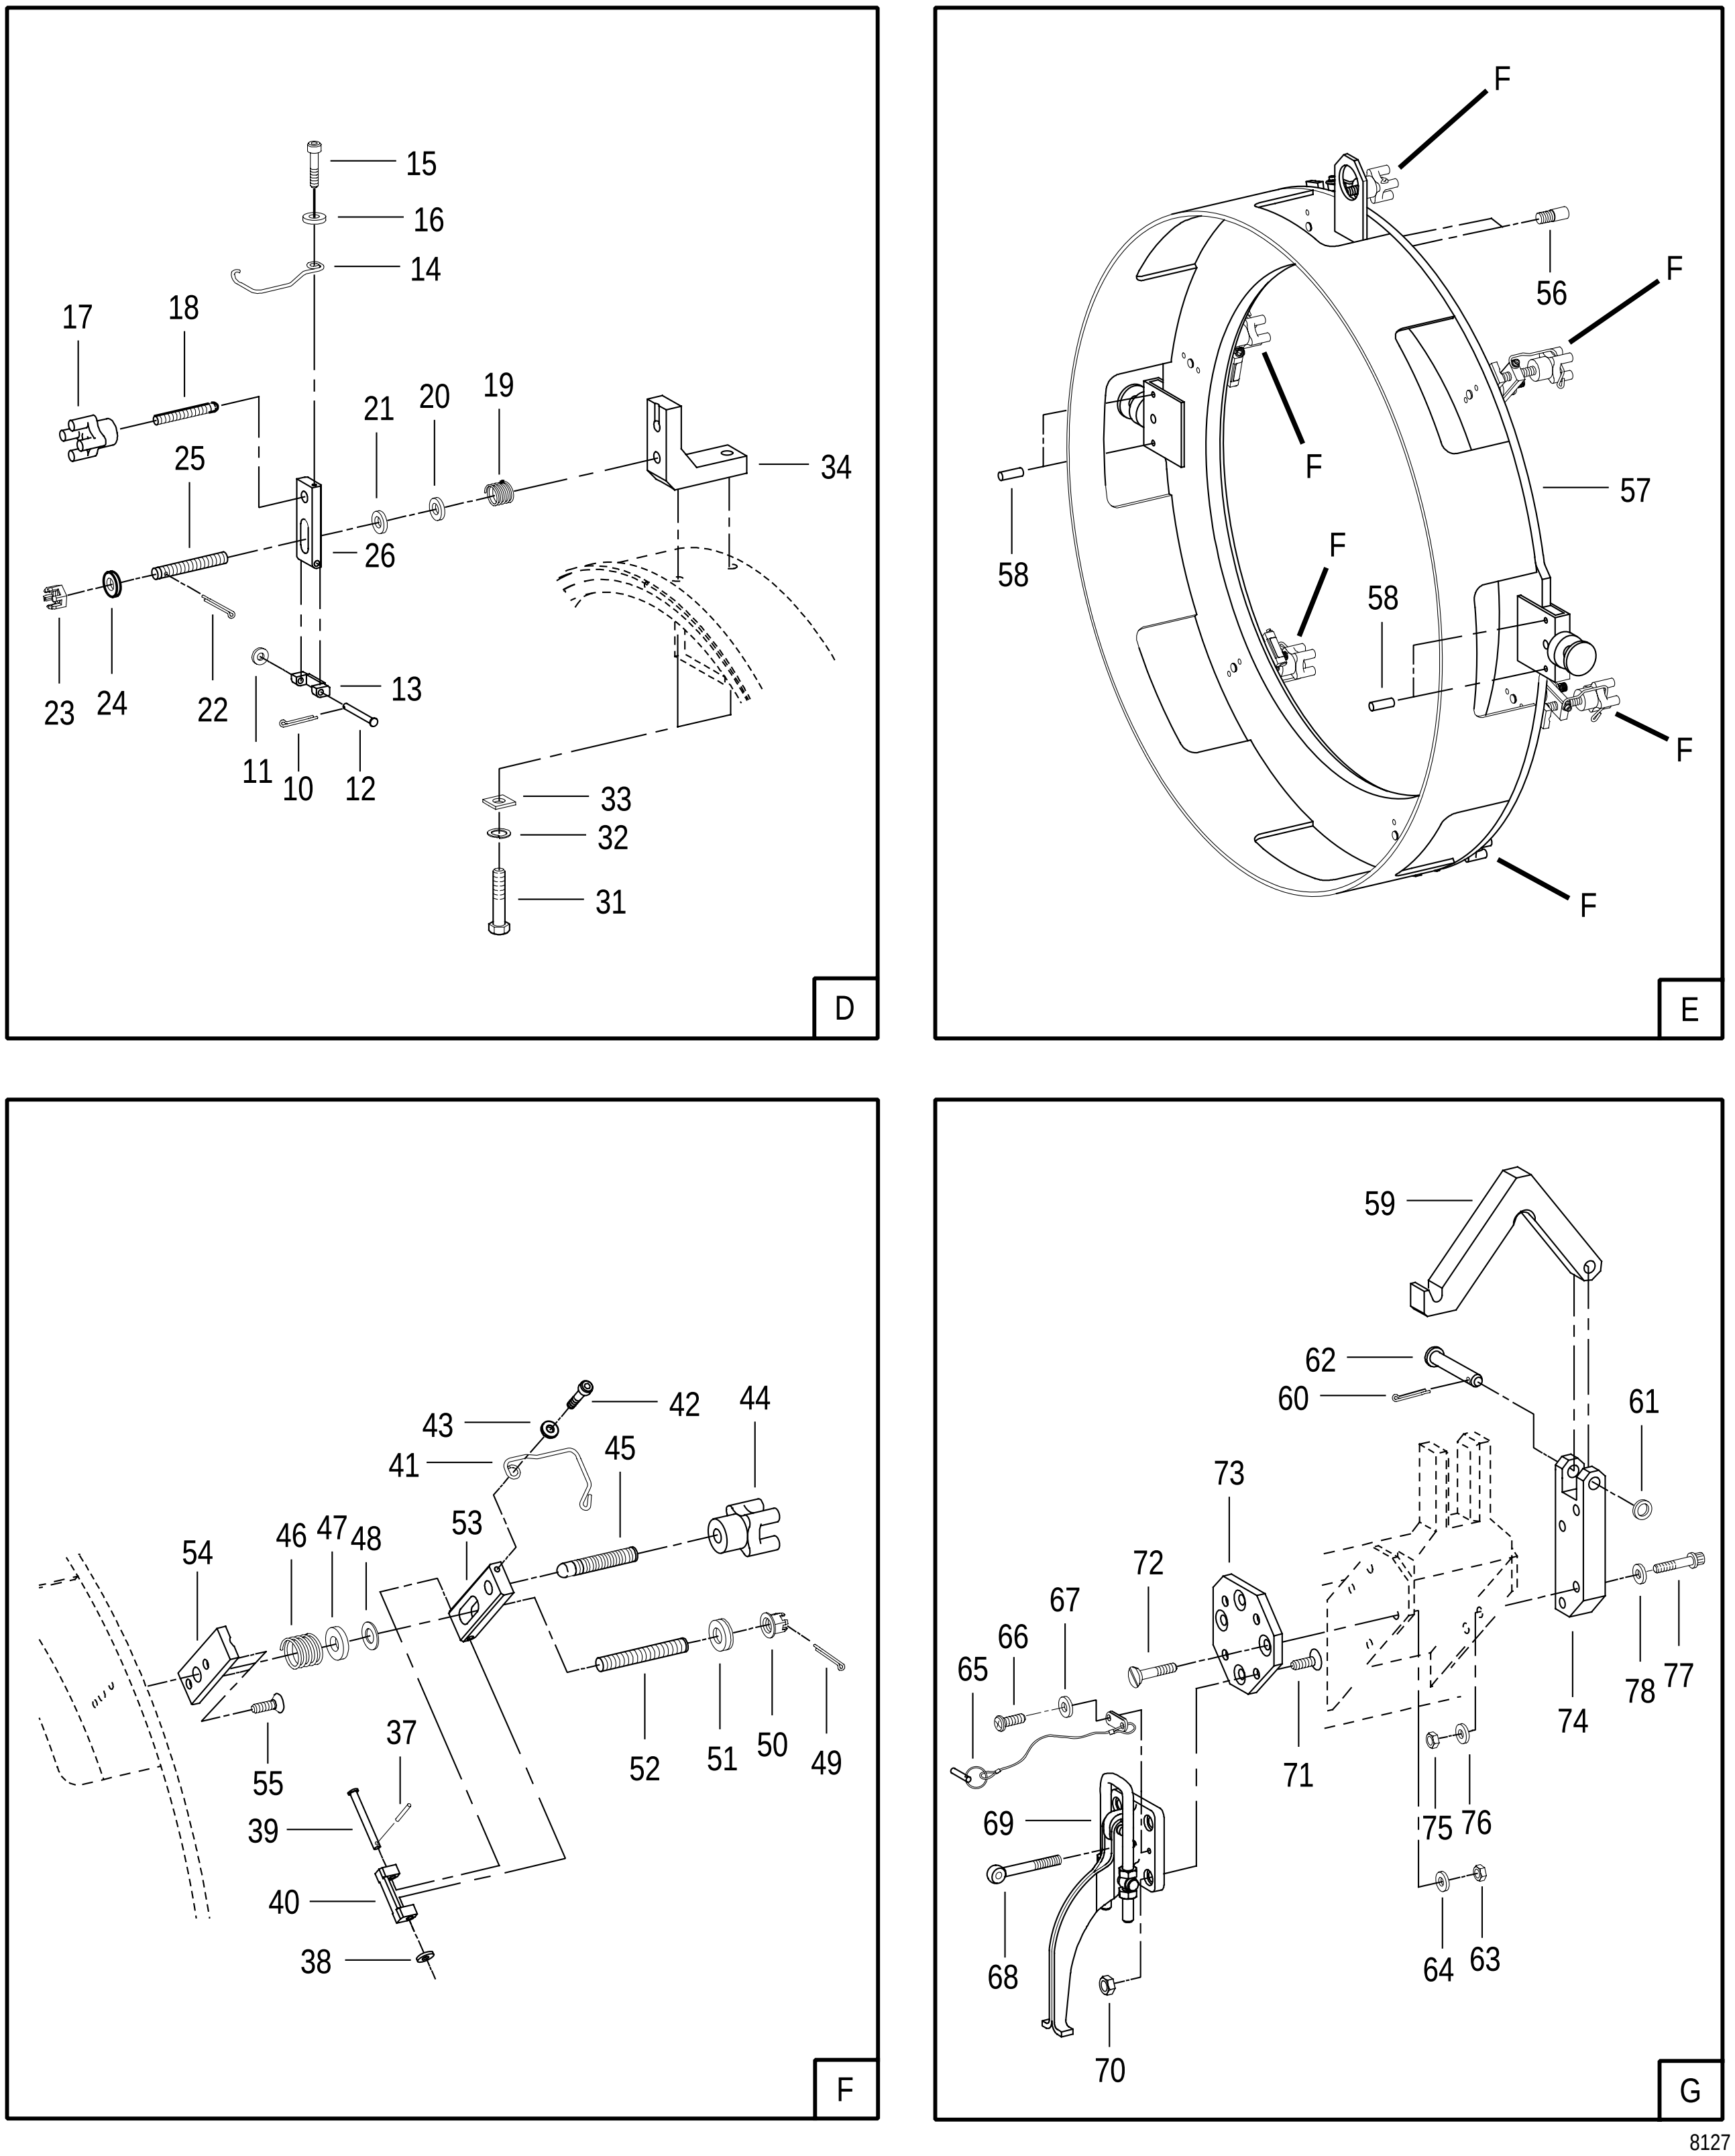


FIGURE 108. CORE ENGINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 3 OF 6)




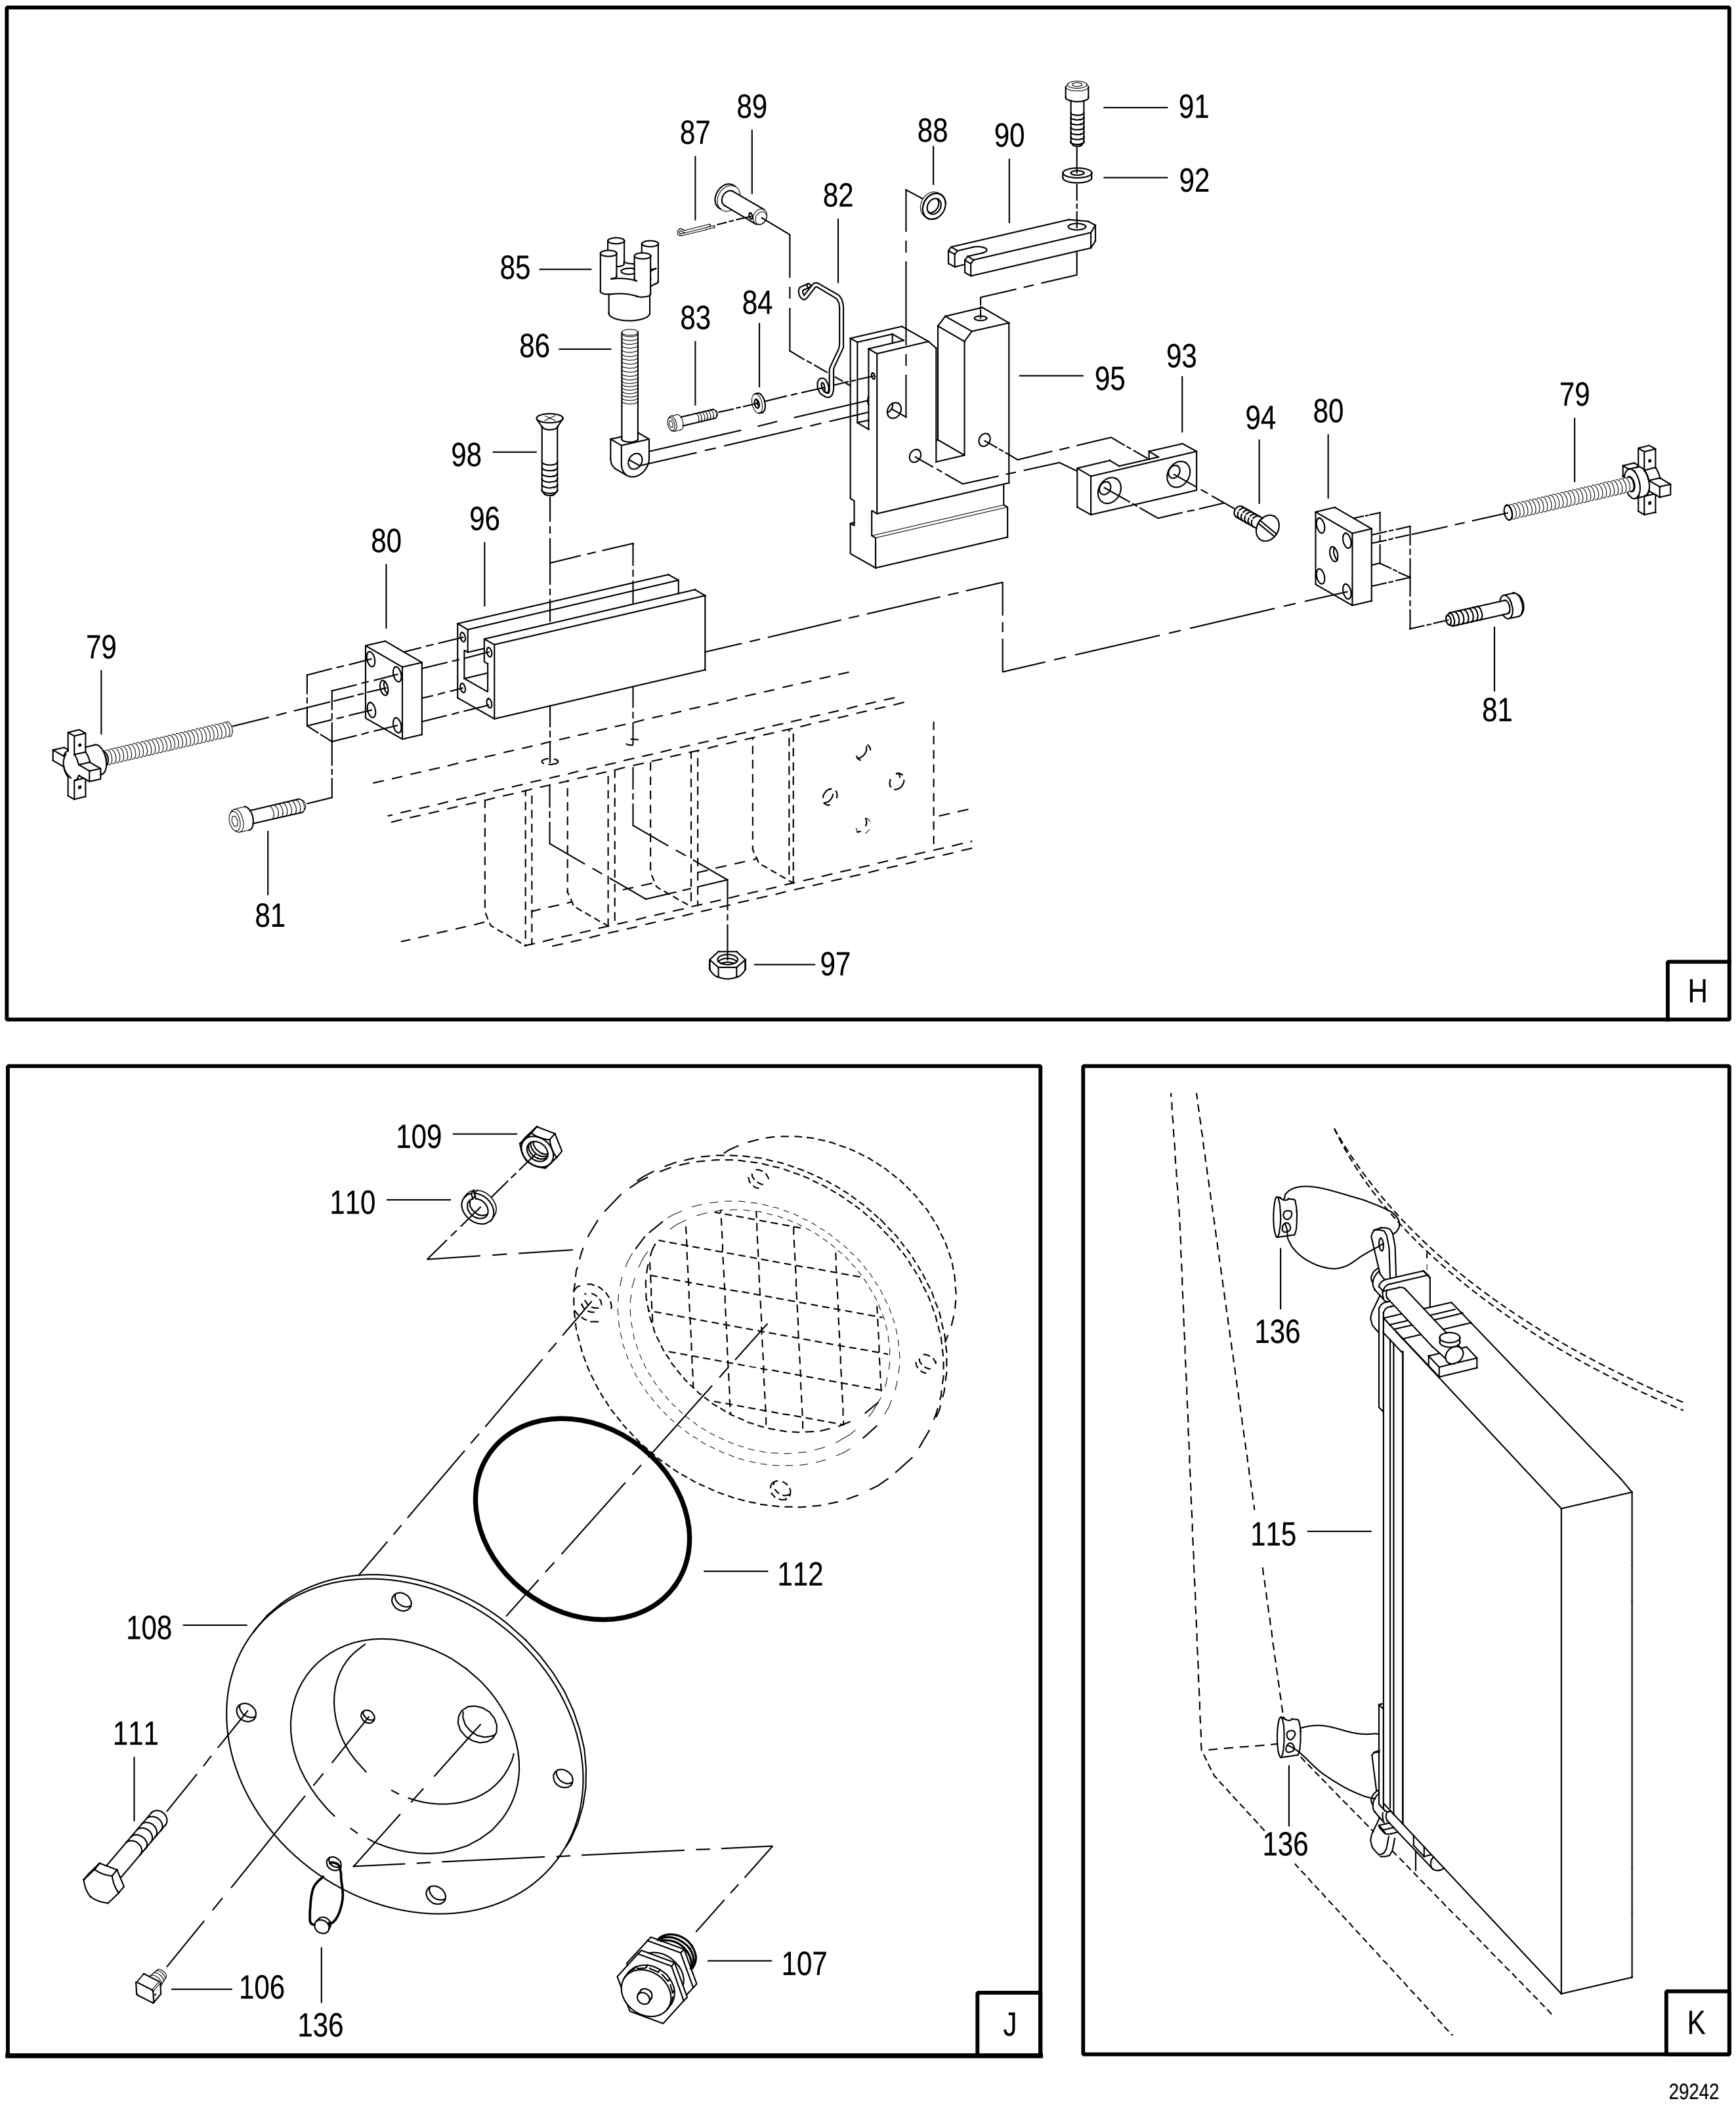


FIGURE 108. CORE ENGINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 4 OF 6)

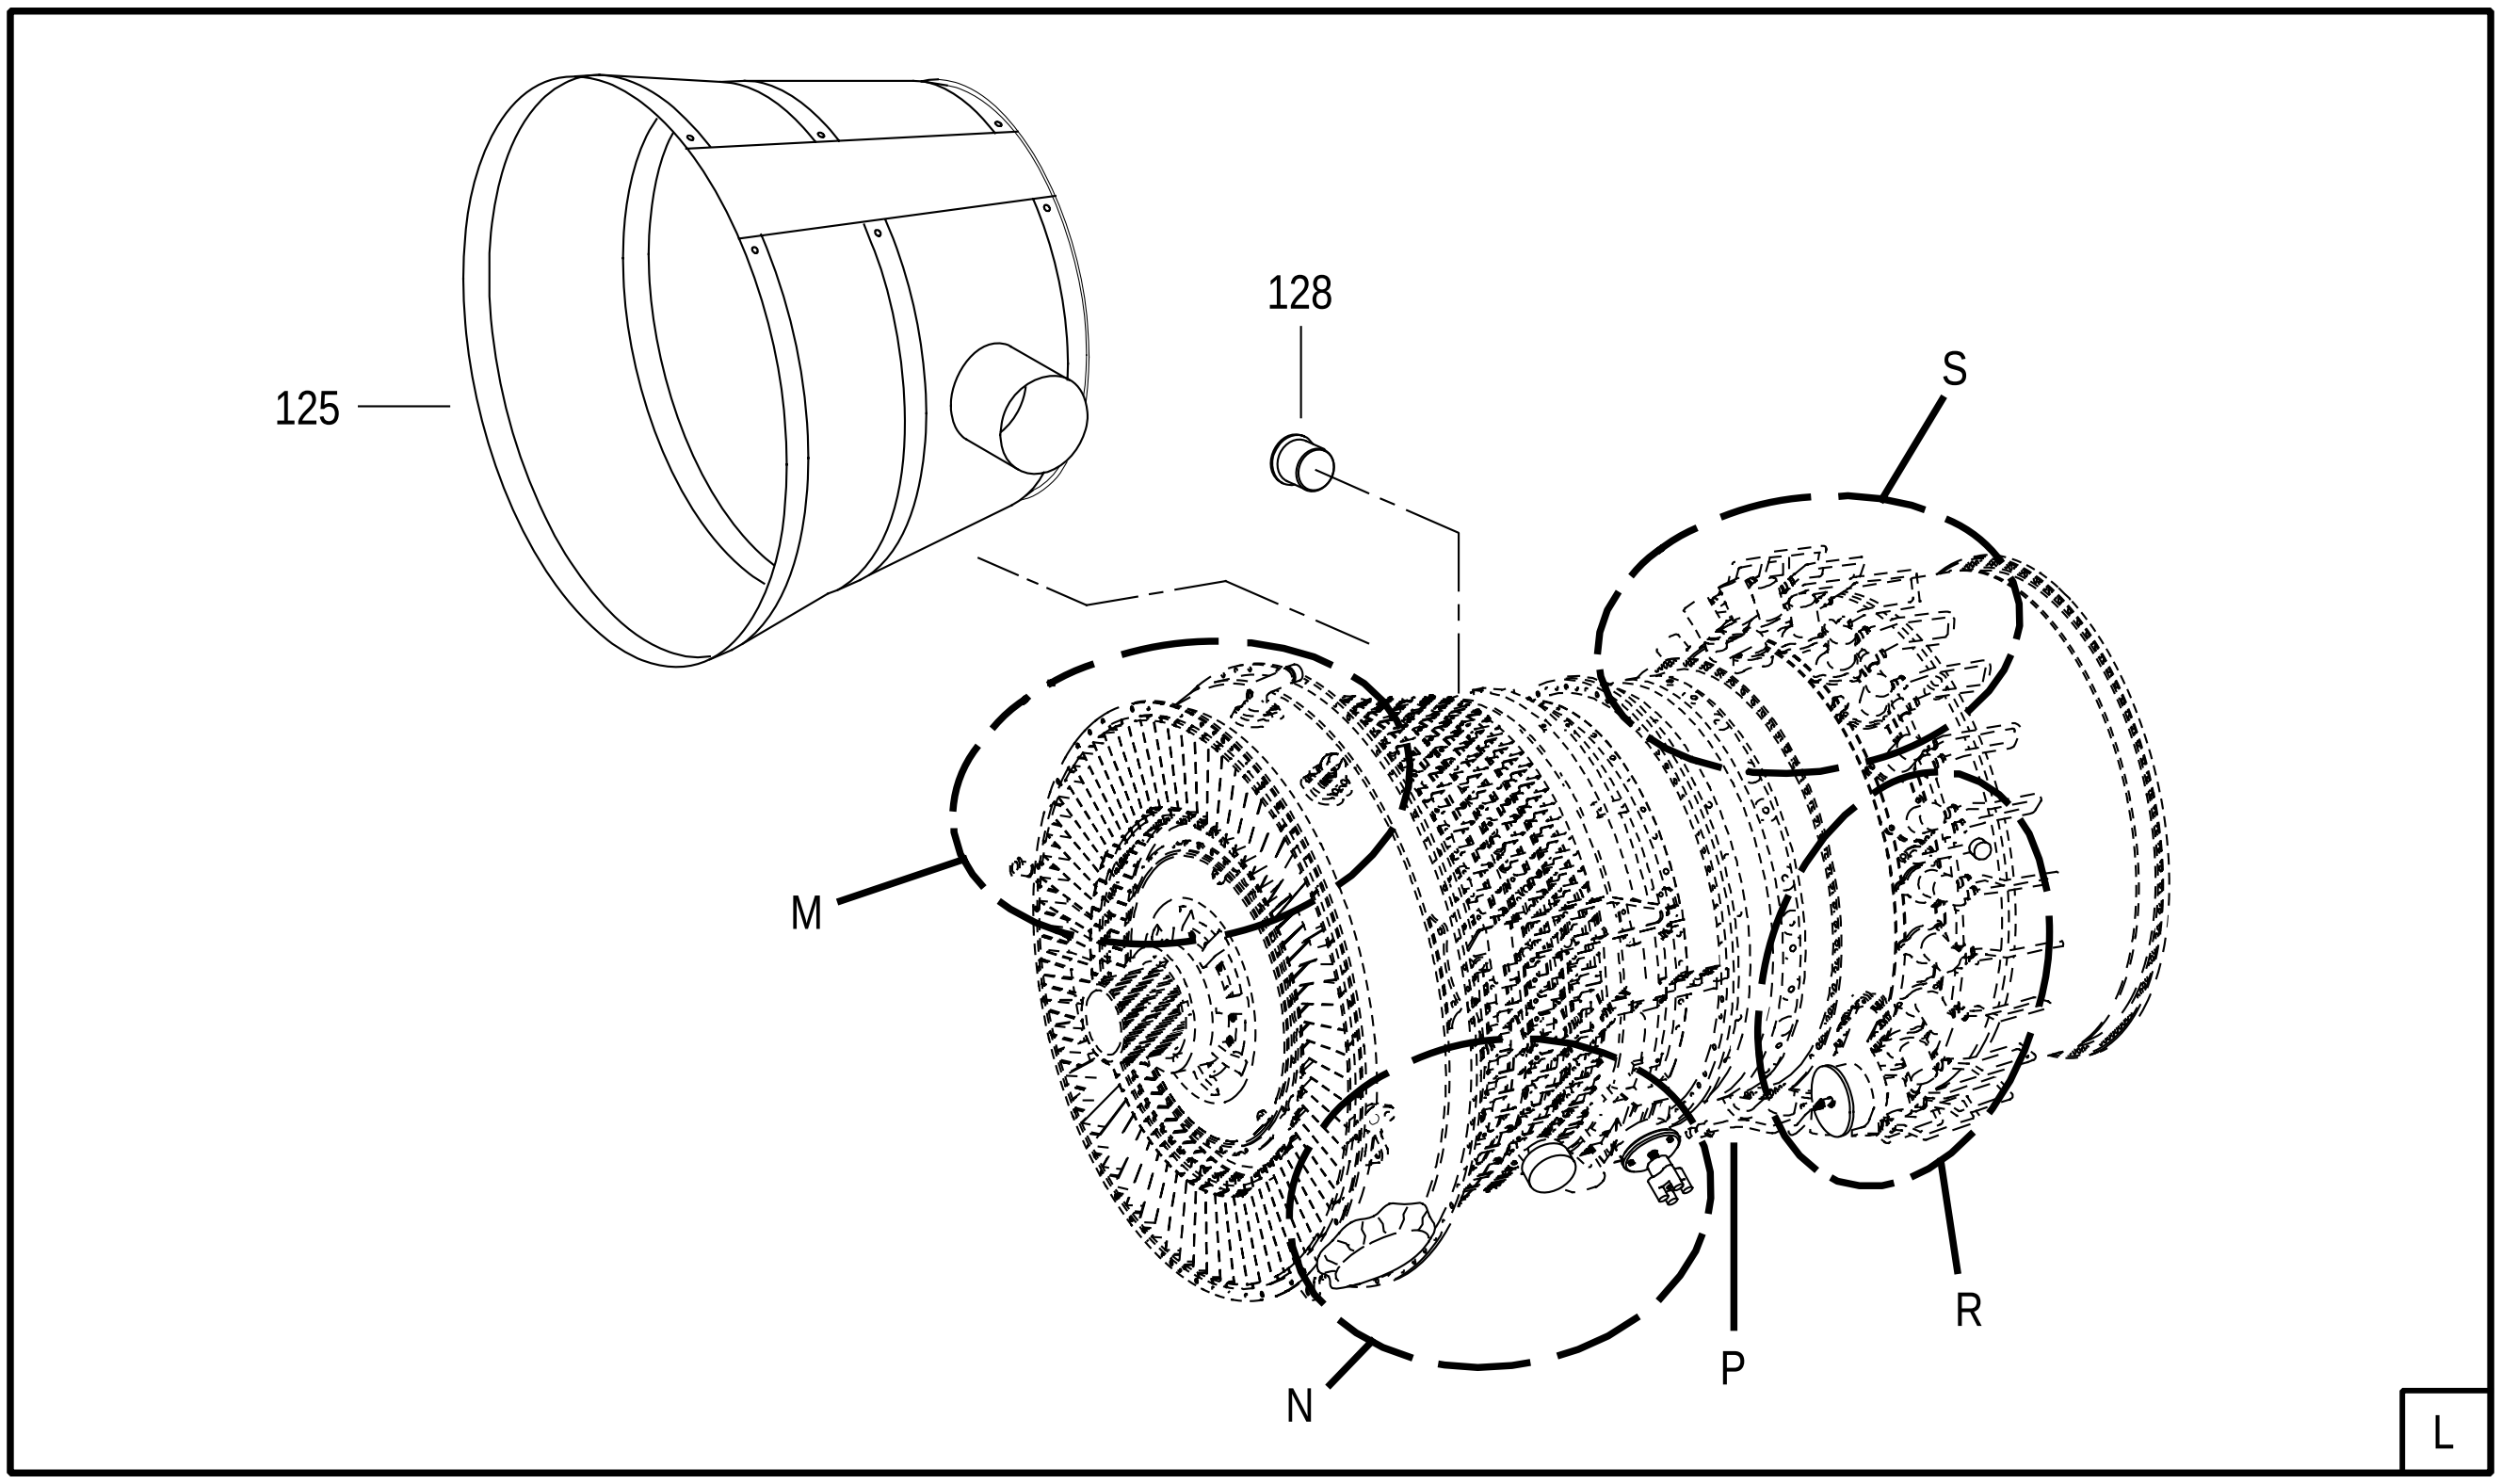

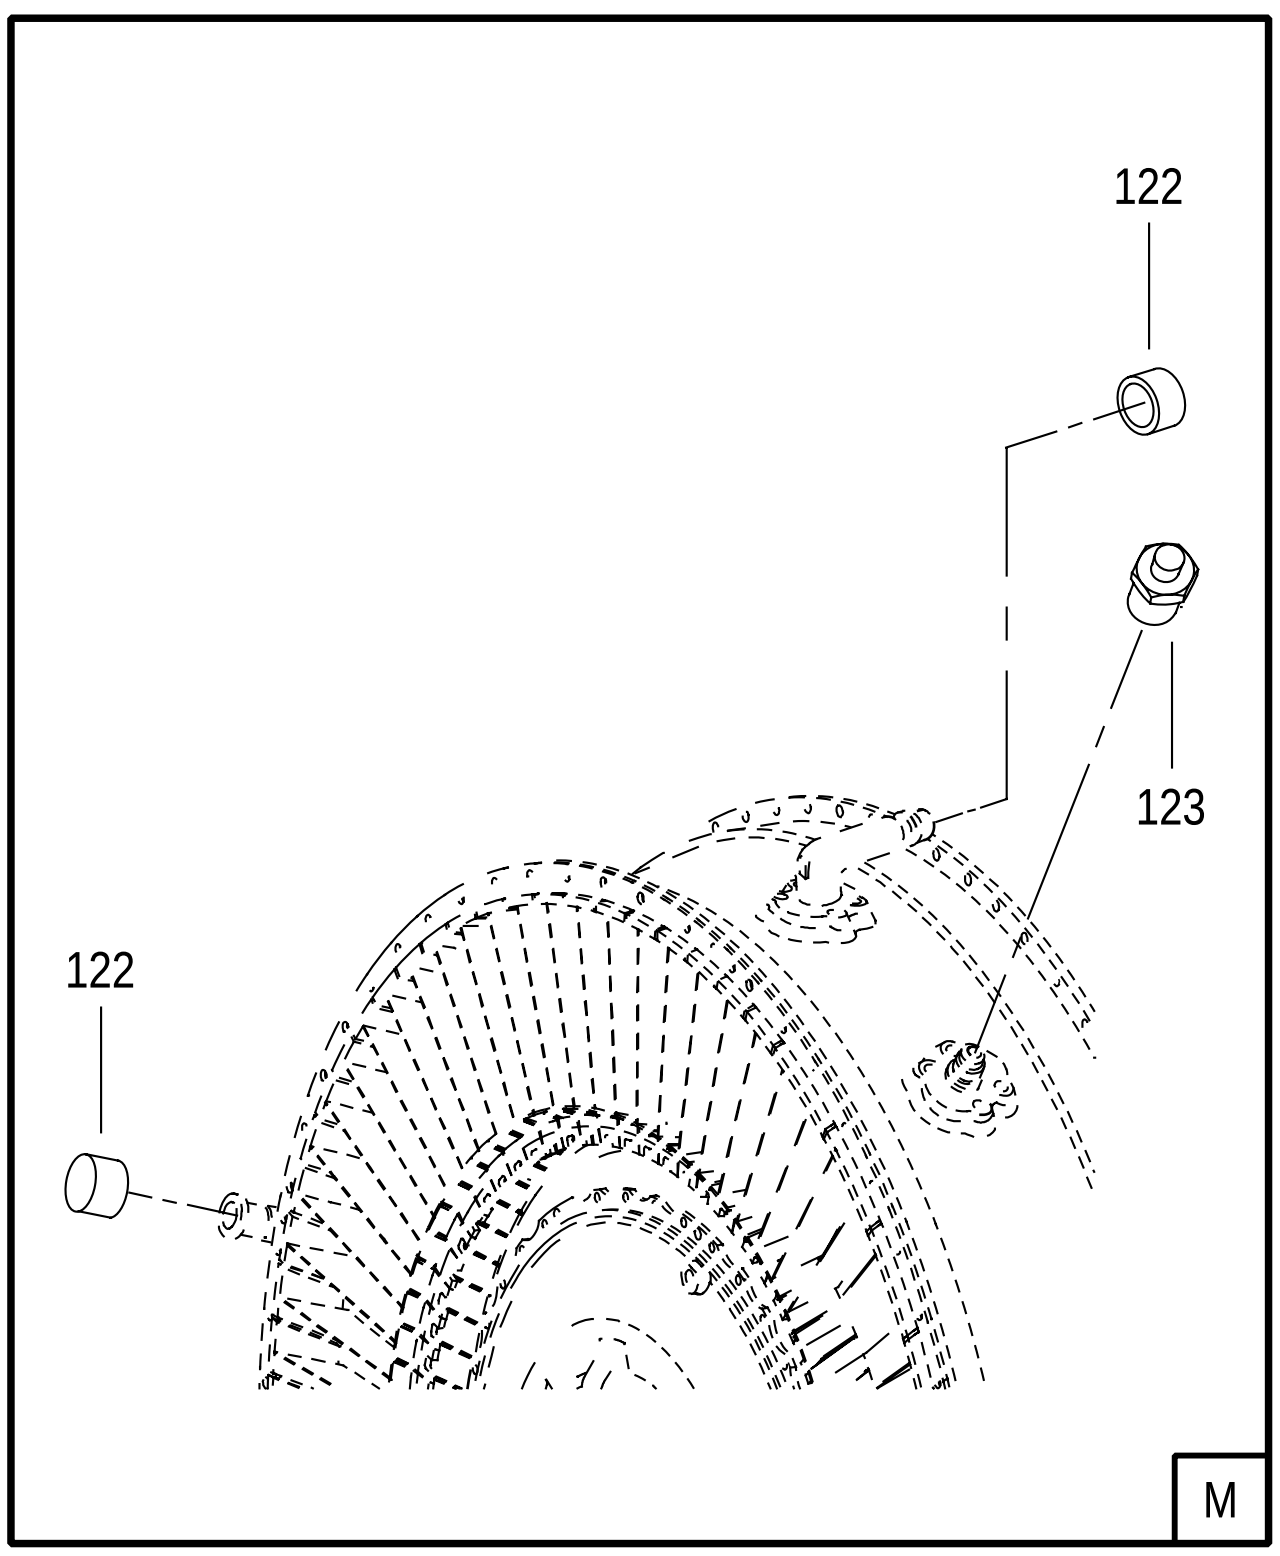

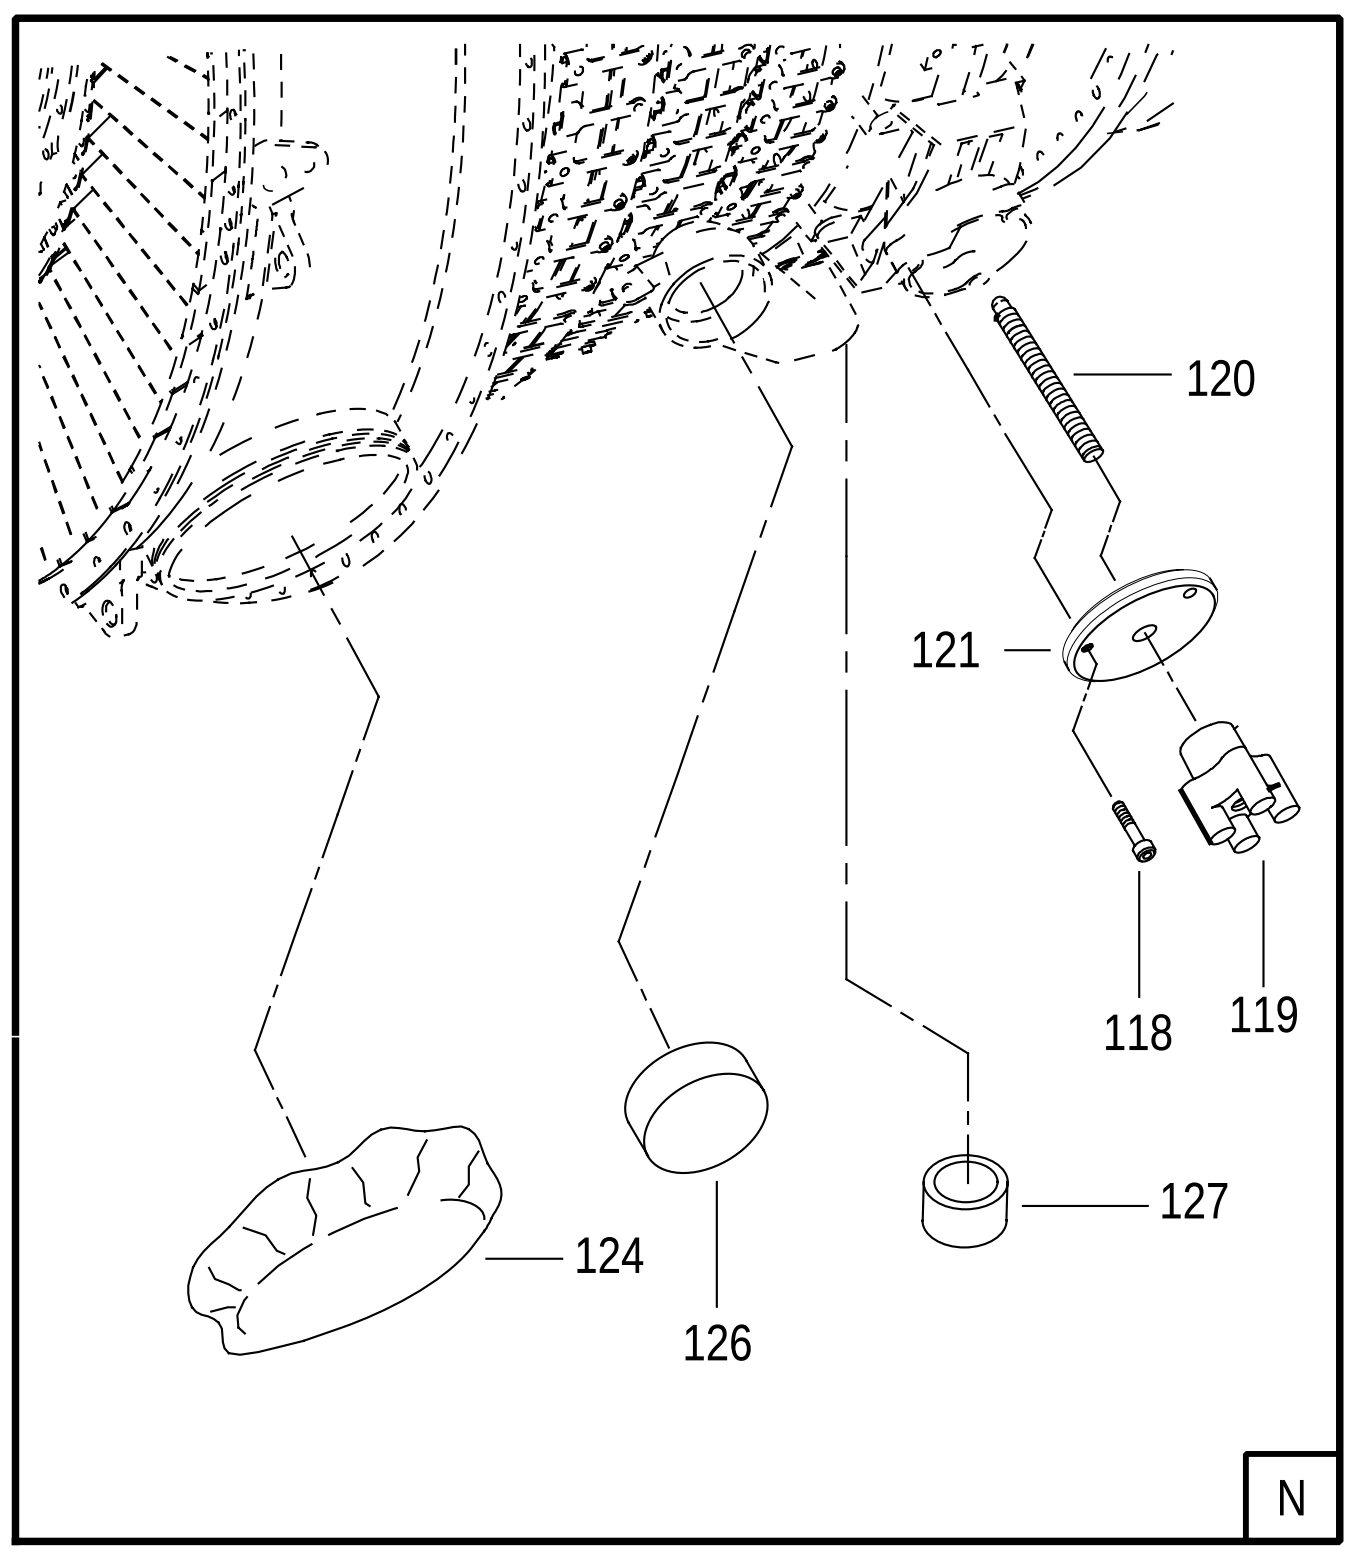

29243

FIGURE 108. CORE ENGINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 5 OF 6)

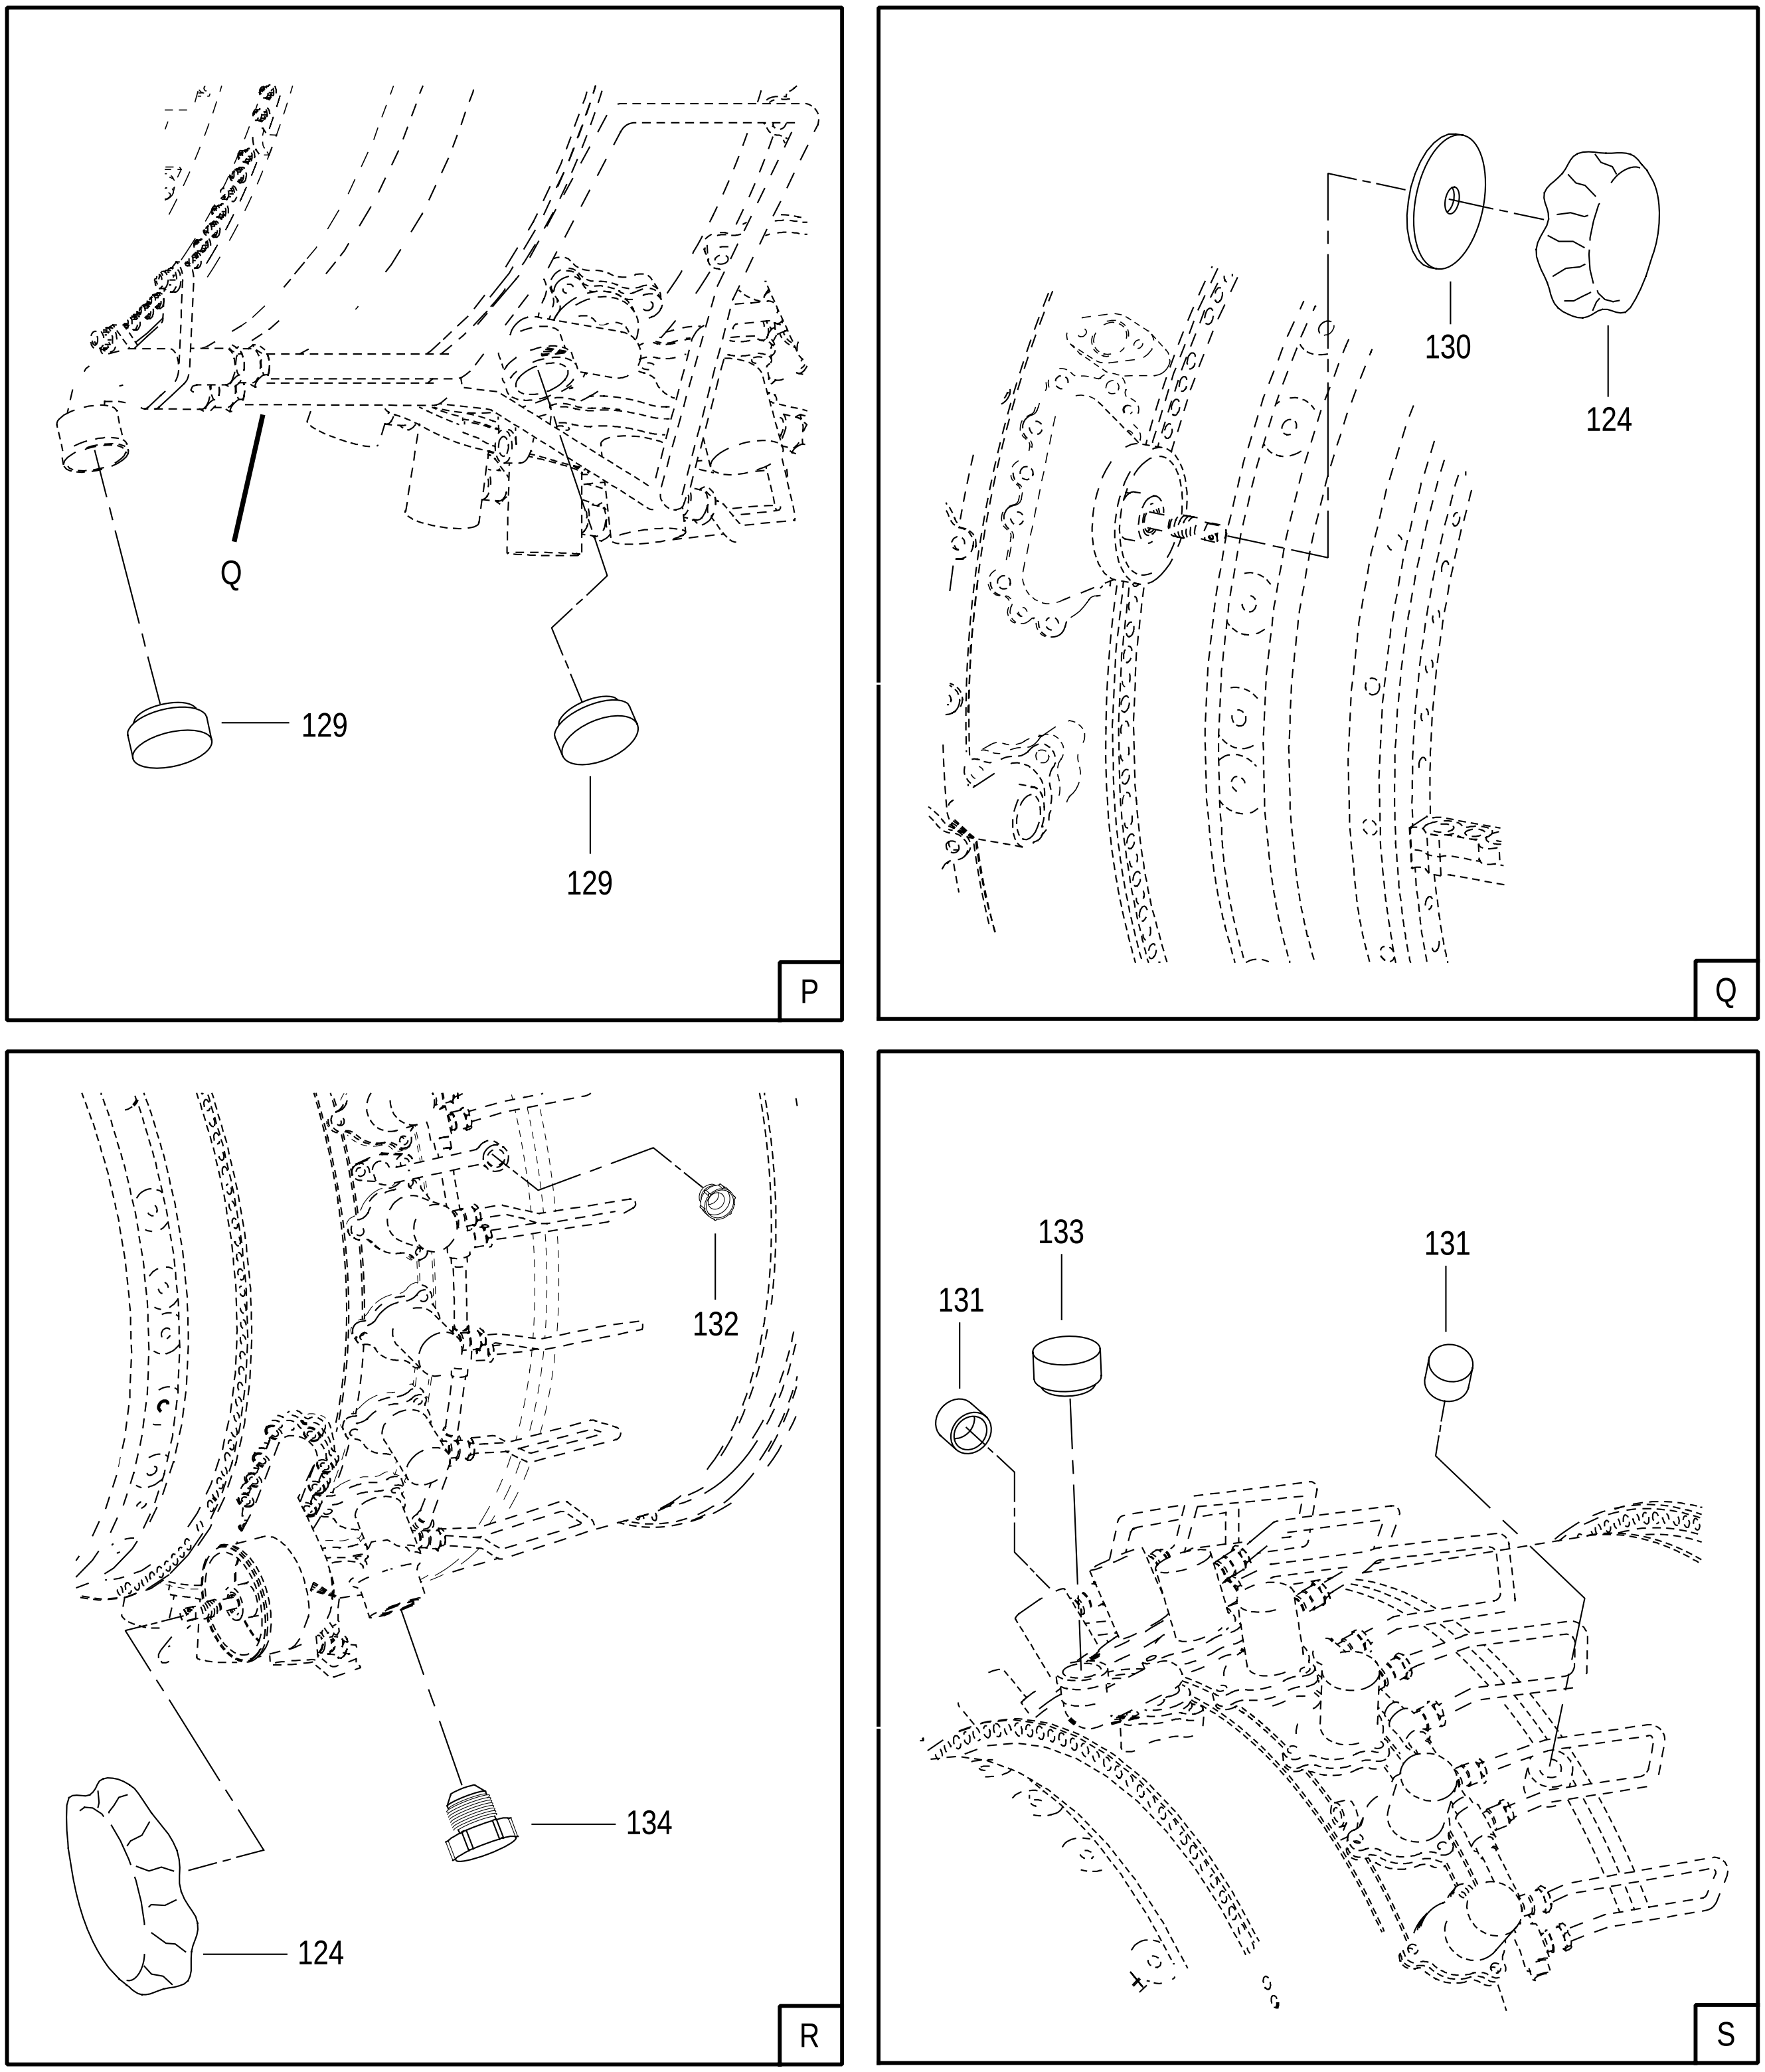


FIGURE 108. CORE ENGINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 6 OF 6)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
108	NO NUMBER		CORE ENGINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS SEE FIG. 1-18 FOR NHA	REF		
	P4070529	52661	. CONTAINER ASSY-CORE ENGINE MODULE	1		PAFDD
- 1	TA446-P47412	08992	.. WINDOW-OBSERVATION P&WA PART NO. P47412	2		PAFZZ
- 2	P52715 *	52661	.. PLATE-IDENTIFICATION, SPARE PARTS SHIPPING CONTAINER	2		PAFZZ
- 3	P4070529-03	52661	.. CONTAINER HALF-METAL, REUSABLE, UPPER, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 4	34S02-1-1AA	71286	... PIN-TURNLOCK FASTENER STUD P&WA PART NO. P4015046	52		PAFZZ
- 5	34S01-3-1AA	71286	... STUD-TURNLOCK FASTENER P&WA PART NO. P48690	52		PAFZZ
- 6	P48931	52661	.. PACKING-PREFORMED, REUSABLE METAL CONTAINER	1		PAFZZ
- 7	P4078883	52661	.. RING ASSY-ENGINE LIFTING, REAR PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 8	P4078917	52661	... CAP-PROTECTIVE	4		PAFZZ
- 9	P4078881	52661	... THUMBSCREW-THREADED	4		PAFZZ
	P4078860	52661	... CLAMP ASSY	6		PAFFF
- 10	MS24665-153	96906	.... PIN	1		PAFZZ
- 11	5710-59-60	86928	.... WASHER-REDUCED OD P&WA PART NO. P4078857	1		PAFZZ
- 12	P4078858	52661	.... PIN-CLEVIS	1		PAFZZ
- 13	P4078865	52661	.... REST-CLAMPING	1		PAFZZ
- 14	P4078854-01	52661	.... RETAINER-KNOB	1		PAFZZ
- 15	MS51576-16	96906	.... SCREW (AP)	1		PAFZZ
- 16	AN960-C416	88044	.... WASHER-FLAT (AP)	1		PAFZZ
- 17	CL-4-BK	99862	.... KNOB-BAR P&WA PART NO. P4078856	1		PAFZZ
- 18	P4078863	52661	.... STUD-THREADED	1		PAFZZ
- 19	C0720-072-1250S	74197	.... SPRING-COMPRESSION P&WA PART NO. P4078855	1		PAFZZ
- 20	AN960-C816	88044	.... WASHER-FLAT	1		PAFZZ
- 21	5612-159-062	86928	.... WASHER-FLAT P&WA PART NO. P4078927	1		PAFZZ
- 22	MS24665-370	96906	.... PIN	1		PAFZZ
- 23	MS9358-14	96906	.... NUT	1		PAFZZ
- 24	P4078862	52661	.... WASHER-SPHERICAL	1		PAFZZ
- 25	P4078861	52661	.... STUD-THREADED	1		PAFZZ
- 26	P4078864	52661	.... STRAP-CLAMPING	1		PAFZZ
- 27	P4078880	52661	... EYEBOLT-THREADED	1		PAFZZ
- 28	MS51922-77	96906	... NUT (AP)	1		PAFZZ
- 29	MS15795-826	96906	... WASHER (AP)	1		PAFZZ
- 30	P4078878	52661	... SPACER-EYEBOLT	1		PAFZZ
- 31	MS35308-411	96906	... SCREW	12		PAFZZ
- 32	MS35338-143	96906	... WASHER	12		PAFZZ
- 33	P4078877	52661	... WASHER-RADIAL	12		PAFZZ
- 34	P4078876-01	52661	... BASE-CLAMP	5		PAFZZ
- 35	P4078876-02	52661	... BASE-CLAMP	1		PAFZZ
- 36	P4078916-02	52661	... PIN-ALIGNMENT	1		PAFZZ
	P4078884	52661	.. RING ASSY-ENGINE LIFTING, FRONT	1		PAFDD
	P4078860	52661	... CLAMP ASSY	6		PAFFF
- 37	MS24665-153	96906	.... PIN	1		PAFZZ
- 38	5710-59-60	86928	.... WASHER-REDUCED OD P&WA PART NO. P4078857	1		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
108 - 39	P4078858	52661	.... PIN-CLEVIS	1		PAFZZ
- 40	P4078865	52661	.... REST-CLAMPING	1		PAFZZ
- 41	P4078854-01	52661	.... RETAINER-KNOB	1		PAFZZ
- 42	MS51576-16	96906	.... SCREW (AP)	1		PAFZZ
- 43	AN960-C416	88044	.... WASHER-FLAT (AP)	1		PAFZZ
- 44	CL-4-BK	99862	.... KNOB-BAR P&WA PART NO. P4078856	1		PAFZZ
- 45	P4078863	52661	.... STUD-THREADED	1		PAFZZ
- 46	C0720-072-1250S	74197	.... SPRING-COMPRESSION P&WA PART NO. P4078855	1		PAFZZ
- 47	AN960-C816	88044	.... WASHER-FLAT	1		PAFZZ
- 48	5612-159-062	86928	.... WASHER-FLAT P&WA PART NO. P4078927	1		PAFZZ
- 49	MS24665-370	96906	.... PIN	1		PAFZZ
- 50	MS9358-14	96906	.... NUT	1		PAFZZ
- 51	P4078862	52661	.... WASHER-SPHERICAL	1		PAFZZ
- 52	P4078861	52661	.... STUD-THREADED	1		PAFZZ
- 53	P4078864	52661	.... STRAP-CLAMPING	1		PAFZZ
- 54	P4078885	52661	... SUPPORT-CLAMP	6		PAFZZ
- 55	MS24693-C120	96906	... SCREW (AP)	2		PAFZZ
- 56	P4078930	52661	... PIN-ALIGNMENT	2		PAFZZ
- 57	P4078852-01	52661	... RING-ENGINE LIFTING, FRONT, ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		XA
- 58	MS16555-53	96906	.... PIN	4		PAFZZ
- 59	P4078915	52661	.. DRAWBAR-CLAMP	2		PAFZZ
- 60	MS24665-302	96906	.. PIN (AP)	1		PAFZZ
- 61	AN960-816	88044	.. WASHER-FLAT (AP)	1		PAFZZ
- 62	MS20392-7C67	96906	.. PIN (AP)	1		PAFZZ
	P4078887	52661	.. CLAMP ASSY, LH	1		PAFFF
	P4078888	52661	.. CLAMP ASSY, RH	1		PAFFF
- 63	MS51967-8	96906	.. NUT (AP)	4		PAOZZ
- 64	MS35338-46	96906	.. WASHER (AP)	4		PAFZZ
- 65	P4078892	52661	... LANYARD ASSY	1		PAFZZ
- 66	MS35206-261	96906	... SCREW (AP)	1		PAFZZ
- 67	MS35338-43	96906	... WASHER (AP)	1		PAFZZ
- 68	CL-25-EB	99862	... EYEBOLT-THREADED P&WA PART NO. P4078891	1		PAFZZ
- 69	P4078886	52661	... CLAMP-LATCH	1		PAFZZ
- 70	MS21083-N6	96906	... NUT (AP)	4		PAFZZ
- 71	MS24693-S342	96906	... SCREW (AP)	4		PAFZZ
- 72	MS24693-S146	96906	... SCREW	4		PAFZZ
- 73	P4078890	52661	... PLATE-ADAPTER USE ONLY ON P4078887	1		PAFZZ
	P4078889	52661	... PLATE-ADAPTER USE ONLY ON P4078888	1		PAFZZ
- 74	P4078903	52661	.. HINGE-BAR	2		PAFZZ
- 75	MS51967-8	96906	.. NUT (AP)	4		PAOZZ
- 76	MS35338-46	96906	.. WASHER (AP)	4		PAFZZ
- 77	MS90725-66	96906	.. SCREW (AP)	4		PAFZZ
- 78	AN960-616	88044	.. WASHER (AP)	4		PAFZZ
- 79	P4078901	52661	.. BOLT ASSY	4		PAFZZ
- 80	P4078899	52661	.. PLATE-RETAINING	4		PAFZZ
- 81	MS16997-80	96906	.. SCREW (AP)	4		PAFZZ
	P4078898	52661	.. CARRIAGE ASSY, LH	1		PAFFF
	P4078928	52661	.. CARRIAGE ASSY, RH	1		PAFFF
- 82	P4078854-02	52661	... RETAINER-KNOB USE ONLY ON P4078898	1		PAFZZ
	P4078931	52661	... RETAINER-KNOB USE ONLY ON P4078928	1		PAFZZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
108 - 83		MS51576-16	96906	... SCREW (AP)	1		PAFZZ
- 84		AN960-C416	88044	... WASHER-FLAT (AP)	1		PAFZZ
- 85		CL-4-BK	99862	... KNOB-BAR P&WA PART NO. P4078856	1		PAFZZ
- 86		CL-2A-SB	99862	... BOLT-SWING P&WA PART NO. P4078895	1		PAFZZ
- 87		MS24665-302	96906	... PIN (AP)	1		PAFZZ
- 88		AN960-C816	88044	... WASHER-FLAT (AP)	1		PAFZZ
- 89		MS20392-7C53	96906	... PIN (AP)	1		PAFZZ
- 90		P4078896	52661	... BAR-RETAINING	1		PAFZZ
- 91		MS51578-37	96906	... SCREW (AP)	1		PAFZZ
- 92		MS15795-818	96906	... WASHER (AP)	1		PAFZZ
- 93		P4078897	52661	... RESTRAINT-LATERAL	1		PAFZZ
- 94		MS24693-C144	96906	... SCREW (AP)	2		PAFZZ
- 95		P4078893	52661	... CARRIAGE-RETAINING, LH USE ONLY ON P4078898	1		PAFZZ
		P4078929	52661	... CARRIAGE-RETAINING, RH USE ONLY ON P4078928	1		PAFZZ
- 96		P4078894	52661	.. SUPPORT-CARRIAGE	2		PAFZZ
- 97		MS51922-33	96906	.. NUT (AP)	2		PAFZZ
- 98		MS24667-78	96906	.. SCREW (AP)	2		PAFZZ
- 99		P4070529-02	52661	.. SUPPORT-CORE ENGINE MODULE, ASSY OF	1		PAFDD
- 100		MS90726-108	96906	.. SCREW (AP)	16		PAFZZ
- 101		MS35338-48	96906	.. WASHER (AP)	16		PAFZZ
- 102		P4070591	52661	.. MOUNT-RESILIENT, CORE REPLACES P48932	4		PAFZZ
- 103		MS90726-108	96906	.. SCREW (AP)	4		PAFZZ
- 104		MS35338-48	96906	.. WASHER (AP)	4		PAFZZ
- 105		TA346-P50844	08992	.. INDICATOR-HUMIDITY, PLUG P&WA PART NO. P50844	1		PAFZZ
- 106		MS20913-1S	96906	.. PLUG	1		PAFZZ
- 107		TA330-25-10-R	08992	.. VALVE-AIR PRESSURE RELIEF, CONTAINER P&WA PART NO. P37145	1		PAFZZ
- 108		P49212	52661	.. COVER-ROTOR AND STATOR CONTAINER	1		PAFZZ
- 109		MS51967-8	96906	.. NUT (AP)	4		PAOZZ
- 110		MS35338-46	96906	.. WASHER (AP)	4		PAFZZ
- 111		MS90725-60	96906	.. SCREW (AP)	4		PAFZZ
- 112		MS29561-437	96906	.. PACKING	1		PAFZZ
- 113		MS20913-6S	96906	.. PLUG	1		PAFZZ
- 114		P4070529-04	52661	.. CONTAINER HALF ASSY-METAL, REUSABLE, LOWER PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 115		P47431	52661	... BOX-ENGINE DATA	1		PAFZZ
- 116		34R01-1-1AA	71286	... RECEPTACLE-TURNLOCK FASTENER, BASE P&WA PART NO. P4015045	52		PAFZZ
- 117	=	9SP-100-R6-11	29666	... RIVET-BLIND, COUNTERSUNK 0.188 DIA X 0.688 IN. GRIP LENGTH (AP) P&WA PART NO. P4030568	2		PAFZZ
	=	NAS1399C6A12	80205	... RIVET-BLIND, COUNTERSUNK 0.190 DIA X 0.750 IN. GRIP LENGTH (AP)	2		PAFZZ
	=	MS9318-220	96906	... RIVET (AP)	2		PAFZZ
		P4070585	52661	.. COVER ASSY-COMPRESSOR BLEED PORT	1		PAFFF
- 118		P4070588	52661	... SCREW-CAP, SOCKET HD	3		PAFZZ
		P4070587	52661	... STUD-COMPRESSOR BLEED PORT, ASSY OF	1		PAFZZ
- 119		CL-4-BK	99862	.... KNOB-BAR P&WA PART NO. P4078856	1		PAFZZ
- 120		P4078863	52661	.... STUD-THREADED	1		PAFZZ
- 121		P4070586	52661	... COVER-COMPRESSOR BLEED PORT	1		XA

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
108 - 121	P4078918	52661	. PACKAGING PARTS-CONSUMABLE, CORE .... ENGINE MODULE	1		PAFZZ
- 122	P6614	52661	.. PLUG-SHIPPING 0.875-14	2		KF
- 123	= CD-4	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL .. P&WA PART NO. P4021568-01	1		KF
	= M-312	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL .. P&WA PART NO. P4021568-01	1		KF
- 124	P11040	52661	.. COVER-AIR BLEED VALVE SHIPPING	3		PAOZZ
- 125	= P53376	52661	.. SKIRT-CLOSURE	1		KF
	= P12760	52661	.. CLOSURE-SHIPPING	1		KF
- 126	P12784	52661	.. CLOSURE-SHIPPING .... 2.602 OD X 2.333 IN. ID X 1.275 IN. DEEP	1		KF
- 127	P12763	52661	.. CLOSURE-SHIPPING .... 0.615 X 0.468	1		KF
- 128	P12770	52661	.. CLOSURE-SHIPPING	1		KF
- 129	PD-120	99017	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL . 1.0625-12UNJF-3A X 1.210 IN. LONG P&WA PART NO. P4021572-04	2		KF
- 130	P12757	52661	.. CLOSURE-SHIPPING .... 0.392 OD X 0.269 IN. ID	1		KF
- 131	P12763	52661	.. CLOSURE-SHIPPING .... 0.615 X 0.468	2		KF
- 132	= PD-60	99017	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL . 0.5625-18UNF-3A X 0.820 IN. LONG P&WA PART NO. P4021572-02	1		KF
	= 809	NONE4	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL . 0.5625-18UNF-3A X 0.820 IN. LONG P&WA PART NO. P4021572-02	1		KF
- 133	P52506	52661	.. PLUG-PROTECTIVE, DUST .... 0.8125-16UNF X 1.000 IN. LONG	1		KF
- 134	PDI-122	99017	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL . 1.0625-16UNF-3A X 0.750 IN. LONG	2		KF
- 135	P8320	52661	.. DESICCANT-16 UNIT, BAGGED	11		KF
- 136	83280	52661	.. SEAL-LEAD, 2 HOLE	3		PADZZ

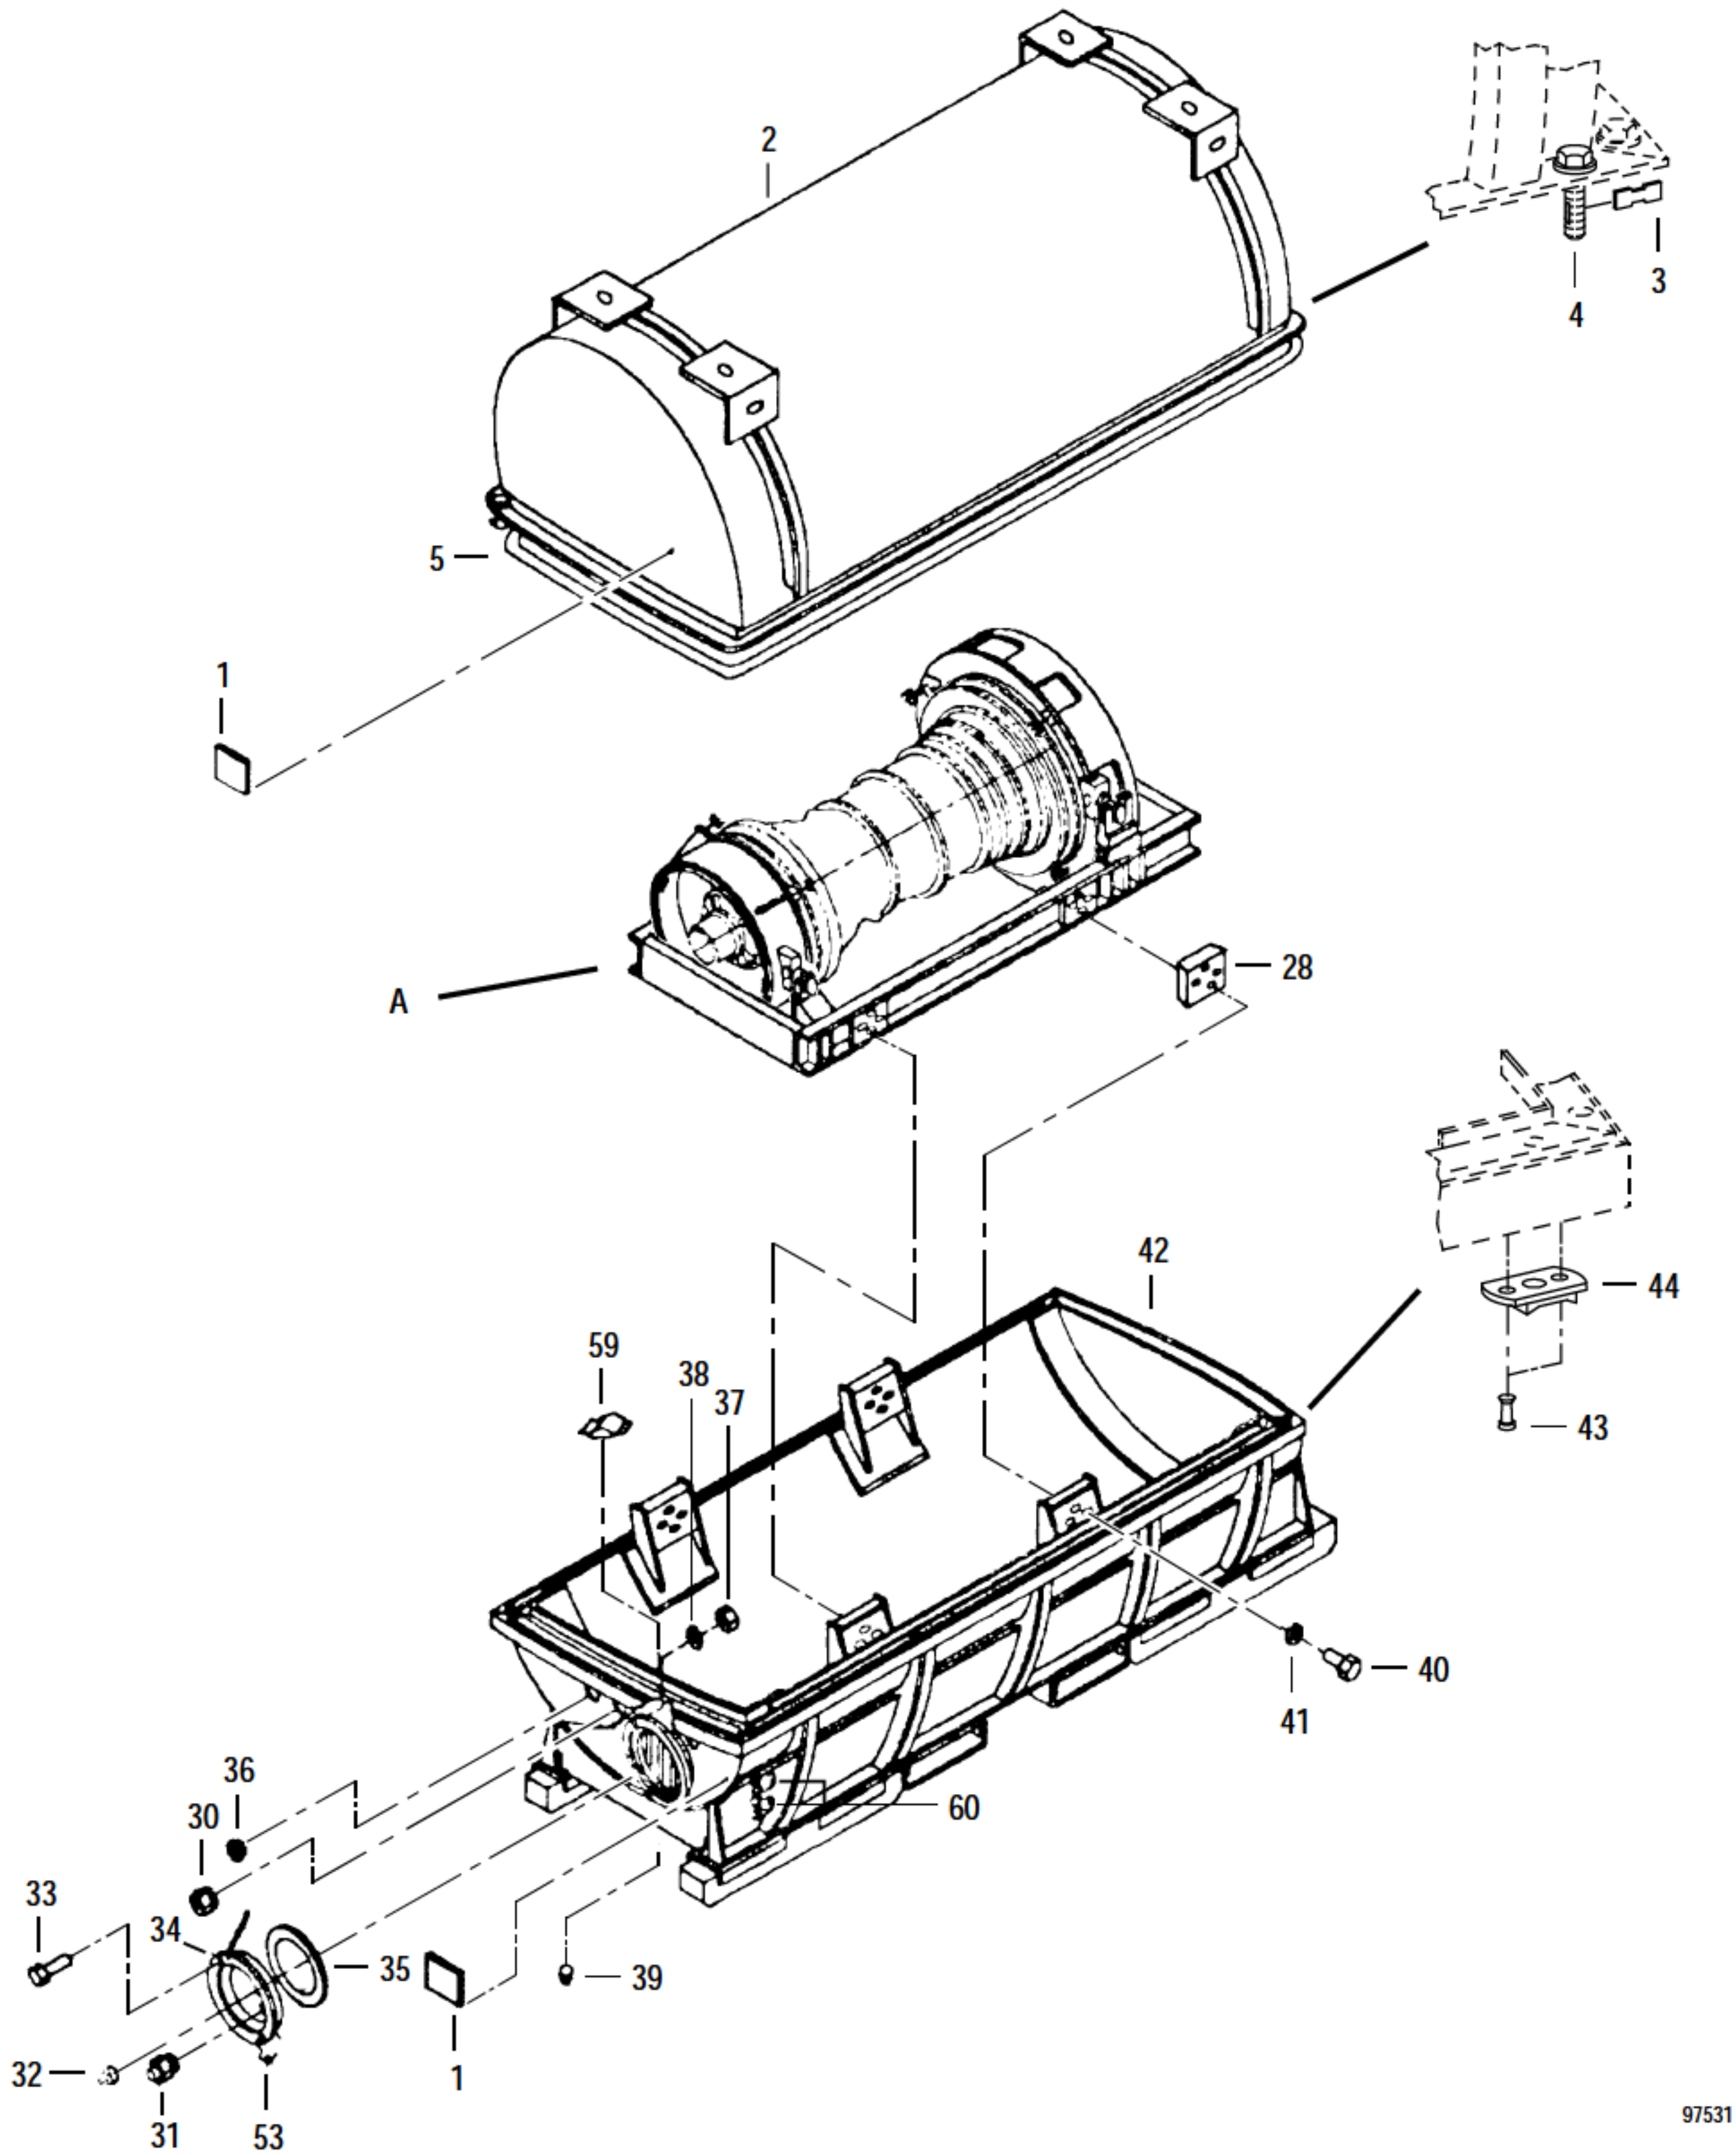


FIGURE 108A. CORE ENGINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 1 OF 2)

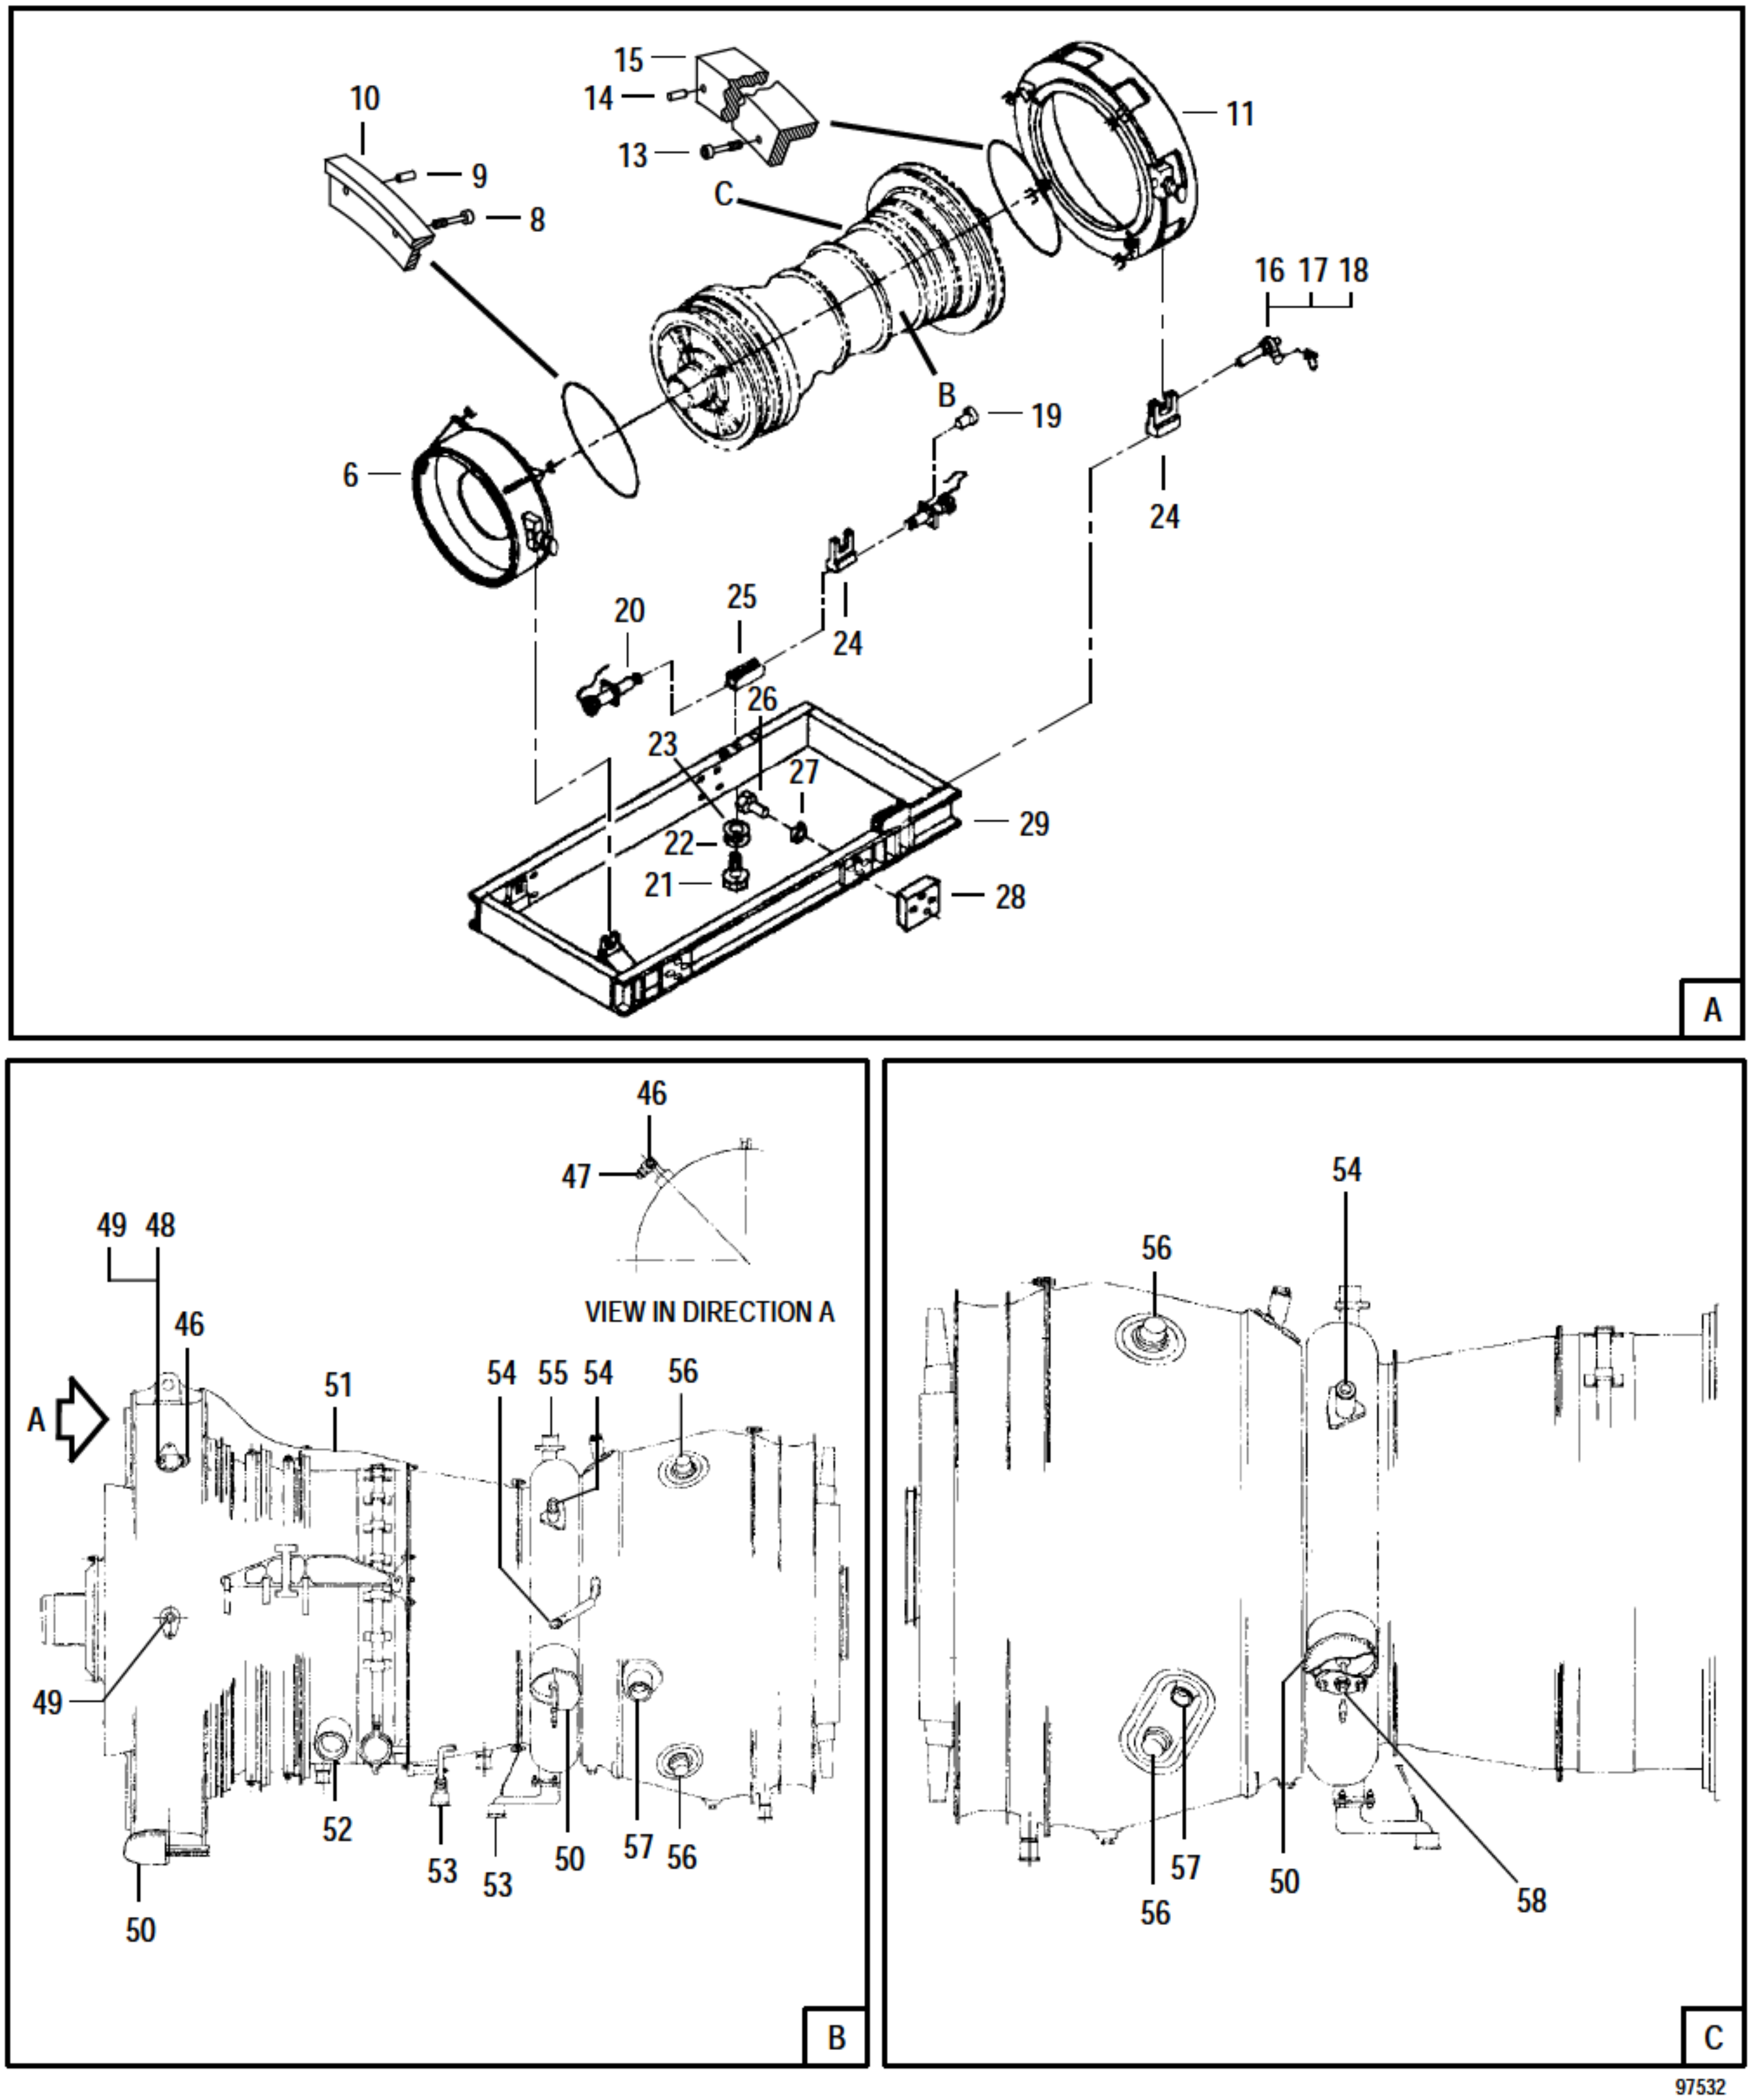


FIGURE 108A. CORE ENGINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
108A	NO NUMBER		CORE ENGINE MODULE CONTAINER ASSY AND . . .	REF		
			CONSUMABLE PACKAGING PARTS			
			SEE FIG. 1-18 FOR NHA			
	P4078843	52661	. CONTAINER ASSY-CORE ENGINE MODULE	1		PAFDD
- 1	P52715	52661	.. PLATE-IDENTIFICATION, SPARE PARTS	1		PAFZZ
			SHIPPING CONTAINER			
- 2	P53368	52661	.. CONTAINER HALF ASSY-METAL, REUSABLE, ...	1		PAFFF
			UPPER			
- 3	= 34S02-1-1AA	71286	... PIN-TURNLOCK FASTENER STUD	52		PAFZZ
			P&WA PART NO. P4015046			
	= 1134700	60119	... PIN-TURNLOCK FASTENER STUD	52		PAFZZ
			P&WA PART NO. P4015046			
- 4	= 34S01-3-1AA	71286	... STUD-TURNLOCK FASTENER	52		PAFZZ
			P&WA PART NO. P48690			
	= 1134000-3	60119	... STUD-TURNLOCK FASTENER	52		PAFZZ
			P&WA PART NO. P48690			
- 5	P48931	52661	.. PACKING-PREFORMED, REUSABLE METAL	1		PAFZZ
			CONTAINER			
- 6	PWA 56732	52661	.. RETAINER-REAR, CORE ENGINE MODULE	1		PEFFF
- 7	< P4078846	52661	.. ADAPTER-REAR	1		PAFZZ
- 8	P4078846-03	52661	.. SCREW-SOCKET HD CAP	4		PAFZZ
			MAKE FROM MS16995-37, MFD BY 96906			
- 9	P4078846-02	52661	.. PIN-DOWEL	1		PAFZZ
			MAKE FROM MS16555-646, MFD BY 96906			
- 10	P4078846-01	52661	.. ADAPTER	1		PAFZZ
- 11	PWA 56731	52661	.. RETAINER-FRONT, CORE ENGINE MODULE	1		PAFZZ
- 12	< P4078940	52661	.. ADAPTER-FORWARD	1		PAFZZ
- 13	P4078940-03	52661	.. SCREW-SOCKET HD CAP	2		PAFZZ
			MAKE FROM MS16996-13, MFD BY 96906			
- 14	P4078940-02	52661	.. PIN-DOWEL	1		PAFZZ
			MAKE FROM MS16555-646, MFD BY 96906			
- 15	P4078940-01	52661	.. ADAPTER	1		PAFZZ
- 16	MS35206-263	96906	.. SCREW	4		PAFZZ
- 17	L-14-T6-V	84256	.. WIRE ROPE-SINGLE LEG	4		PAFZZ
			P&WA PART NO. P45962			
- 18	MS17986-C826	96906	.. PIN	4		PAFZZ
- 19	MS16997-80	96906	.. SCREW	16		PAFZZ
- 20	P48933	52661	.. BOLT ASSY	4		AFF
- 21	MS35307-460	96906	.. SCREW	4		PAFZZ
- 22	MS35338-145	96906	.. WASHER	4		PAFZZ
- 23	MS15795-820	96906	.. WASHER	4		PAFZZ
- 24	P48927	52661	.. CARRIAGE	2		PAFBZ
- 25	P4078937	52661	.. BRACKET-ANGLE	2		PAFZZ
- 26	MS90726-108	96906	.. SCREW	32		PAFZZ
- 27	MS35338-48	96906	.. WASHER	32		PAFZZ
- 28	C630-15F1	9G112	.. MOUNT-RESILIENT	4		PAFZZ
			P&WA PART NO. P4070591			
R - 29	P4078933	52661	.. SUPPORT-CORE ENGINE MODULE	1		XB
- 30	TA446-P47412	08992	.. WINDOW-OBSERVATION	2		PAFZZ
			P&WA PART NO. P47412			
- 31	TA330-25-10-R	08992	.. VALVE-AIR PRESSURE RELIEF, CONTAINER	1		PAFZZ
			P&WA PART NO. P37145			
- 32	MS20913-1S	96906	.. PLUG	1		PAFZZ
- 33	MS90725-60	96906	.. SCREW	4		PAFZZ
- 34	P49212	52661	.. COVER-ROTOR AND STATOR CONTAINER	1		PAFZZ
- 35	MS29561-437	96906	.. PACKING	1		PAFZZ
- 36	TA346-P50844	08992	.. INDICATOR-HUMIDITY, PLUG	1		PAFZZ
			P&WA PART NO. P50844			
- 37	MS51967-8	96906	.. NUT	4		PAOZZ
- 38	MS35338-46	96906	.. WASHER	4		PAFZZ
- 39	MS20913-6S	96906	.. PLUG	1		PAFZZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	108A - 40		MS90726-108	96906	.. SCREW	32		PAFZZ
R	- 41		MS35338-48	96906	.. WASHER	32		PAFZZ
R	- 42		P53369	52661	.. CONTAINER HALF-ASSY OF, METAL, REUSABLE, LOWER	1		PAFFF
R	- 43		MS9318-220	96906	... RIVET	104		PAFZZ
R	- 44	=	34S01-2-18A	71286	... RECEPTACLE-TURNLOCK FASTENER P&WA PART NO. P4015045	52		PAFZZ
R		=	1134701	60119	... RECEPTACLE-TURNLOCK FASTENER P&WA PART NO. P4015045	52		PAFZZ
R	- 45	<	P4021590	52661	. CONSUMABLE PACKAGING PARTS	1		
R	- 46	=	CD-8	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL 0.750-16UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-02	2		KF
R		=	M-328	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL 0.750-16UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-02	2		KF
R	- 47	=	CD-10	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL 0.875-14UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-03	1		KF
R		=	M-330	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL 0.875-14UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-03	1		KF
R	- 48	=	CD-4	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL P&WA PART NO. P4021568-01	1		KF
R		=	M-312	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL P&WA PART NO. P4021568-01	1		KF
R	- 49	=	CD-6	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL 0.5625-18UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-04	2		KF
R		=	M-320	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL 0.5625-18UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-04	2		KF
R	- 50		P11040	52661	.. COVER-AIR BLEED VALVE SHIPPING	3		PAOZZ
R	- 51		P53376	52661	.. SKIRT-CLOSURE	1		KF
R	- 52		P12784	52661	.. CLOSURE-SHIPPING 2.602 OD X 2.333 IN. ID X 1.275 IN. DEEP	1		KF
R	- 53		PD-120	99017	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL 1.0625-12UNJF-3A X 1.210 IN. LONG P&WA PART NO. P4021572-04	2		KF
R	- 54	=	PD-60	99017	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL 0.5625-18UNF-3A X 0.820 IN. LONG P&WA PART NO. P4021572-02	3		KF
R		=	809	7G949	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL 0.5625-18UNF-3A X 0.820 IN. LONG P&WA PART NO. P4021572-02	3		KF
R	- 55		P52506	52661	.. PLUG-PROTECTIVE, DUST 0.8125-16UNF X 1.000 IN. LONG	1		KF
R	- 56		P12775	52661	.. CLOSURE-SHIPPING, PLASTIC	4		KF
R	- 57		P4021572-06	52661	.. PLUG-PROTECTIVE	2		
R	- 58		P12757	52661	.. CLOSURE-SHIPPING 0.392 OD X 0.269 IN. ID	1		KF
R	- 59		P8320	52661	.. DESICCANT-16 UNIT, BAGGED	11		KF
R	- 60		83280	52661	.. SEAL-LEAD, 2 HOLE	3		PADZZ

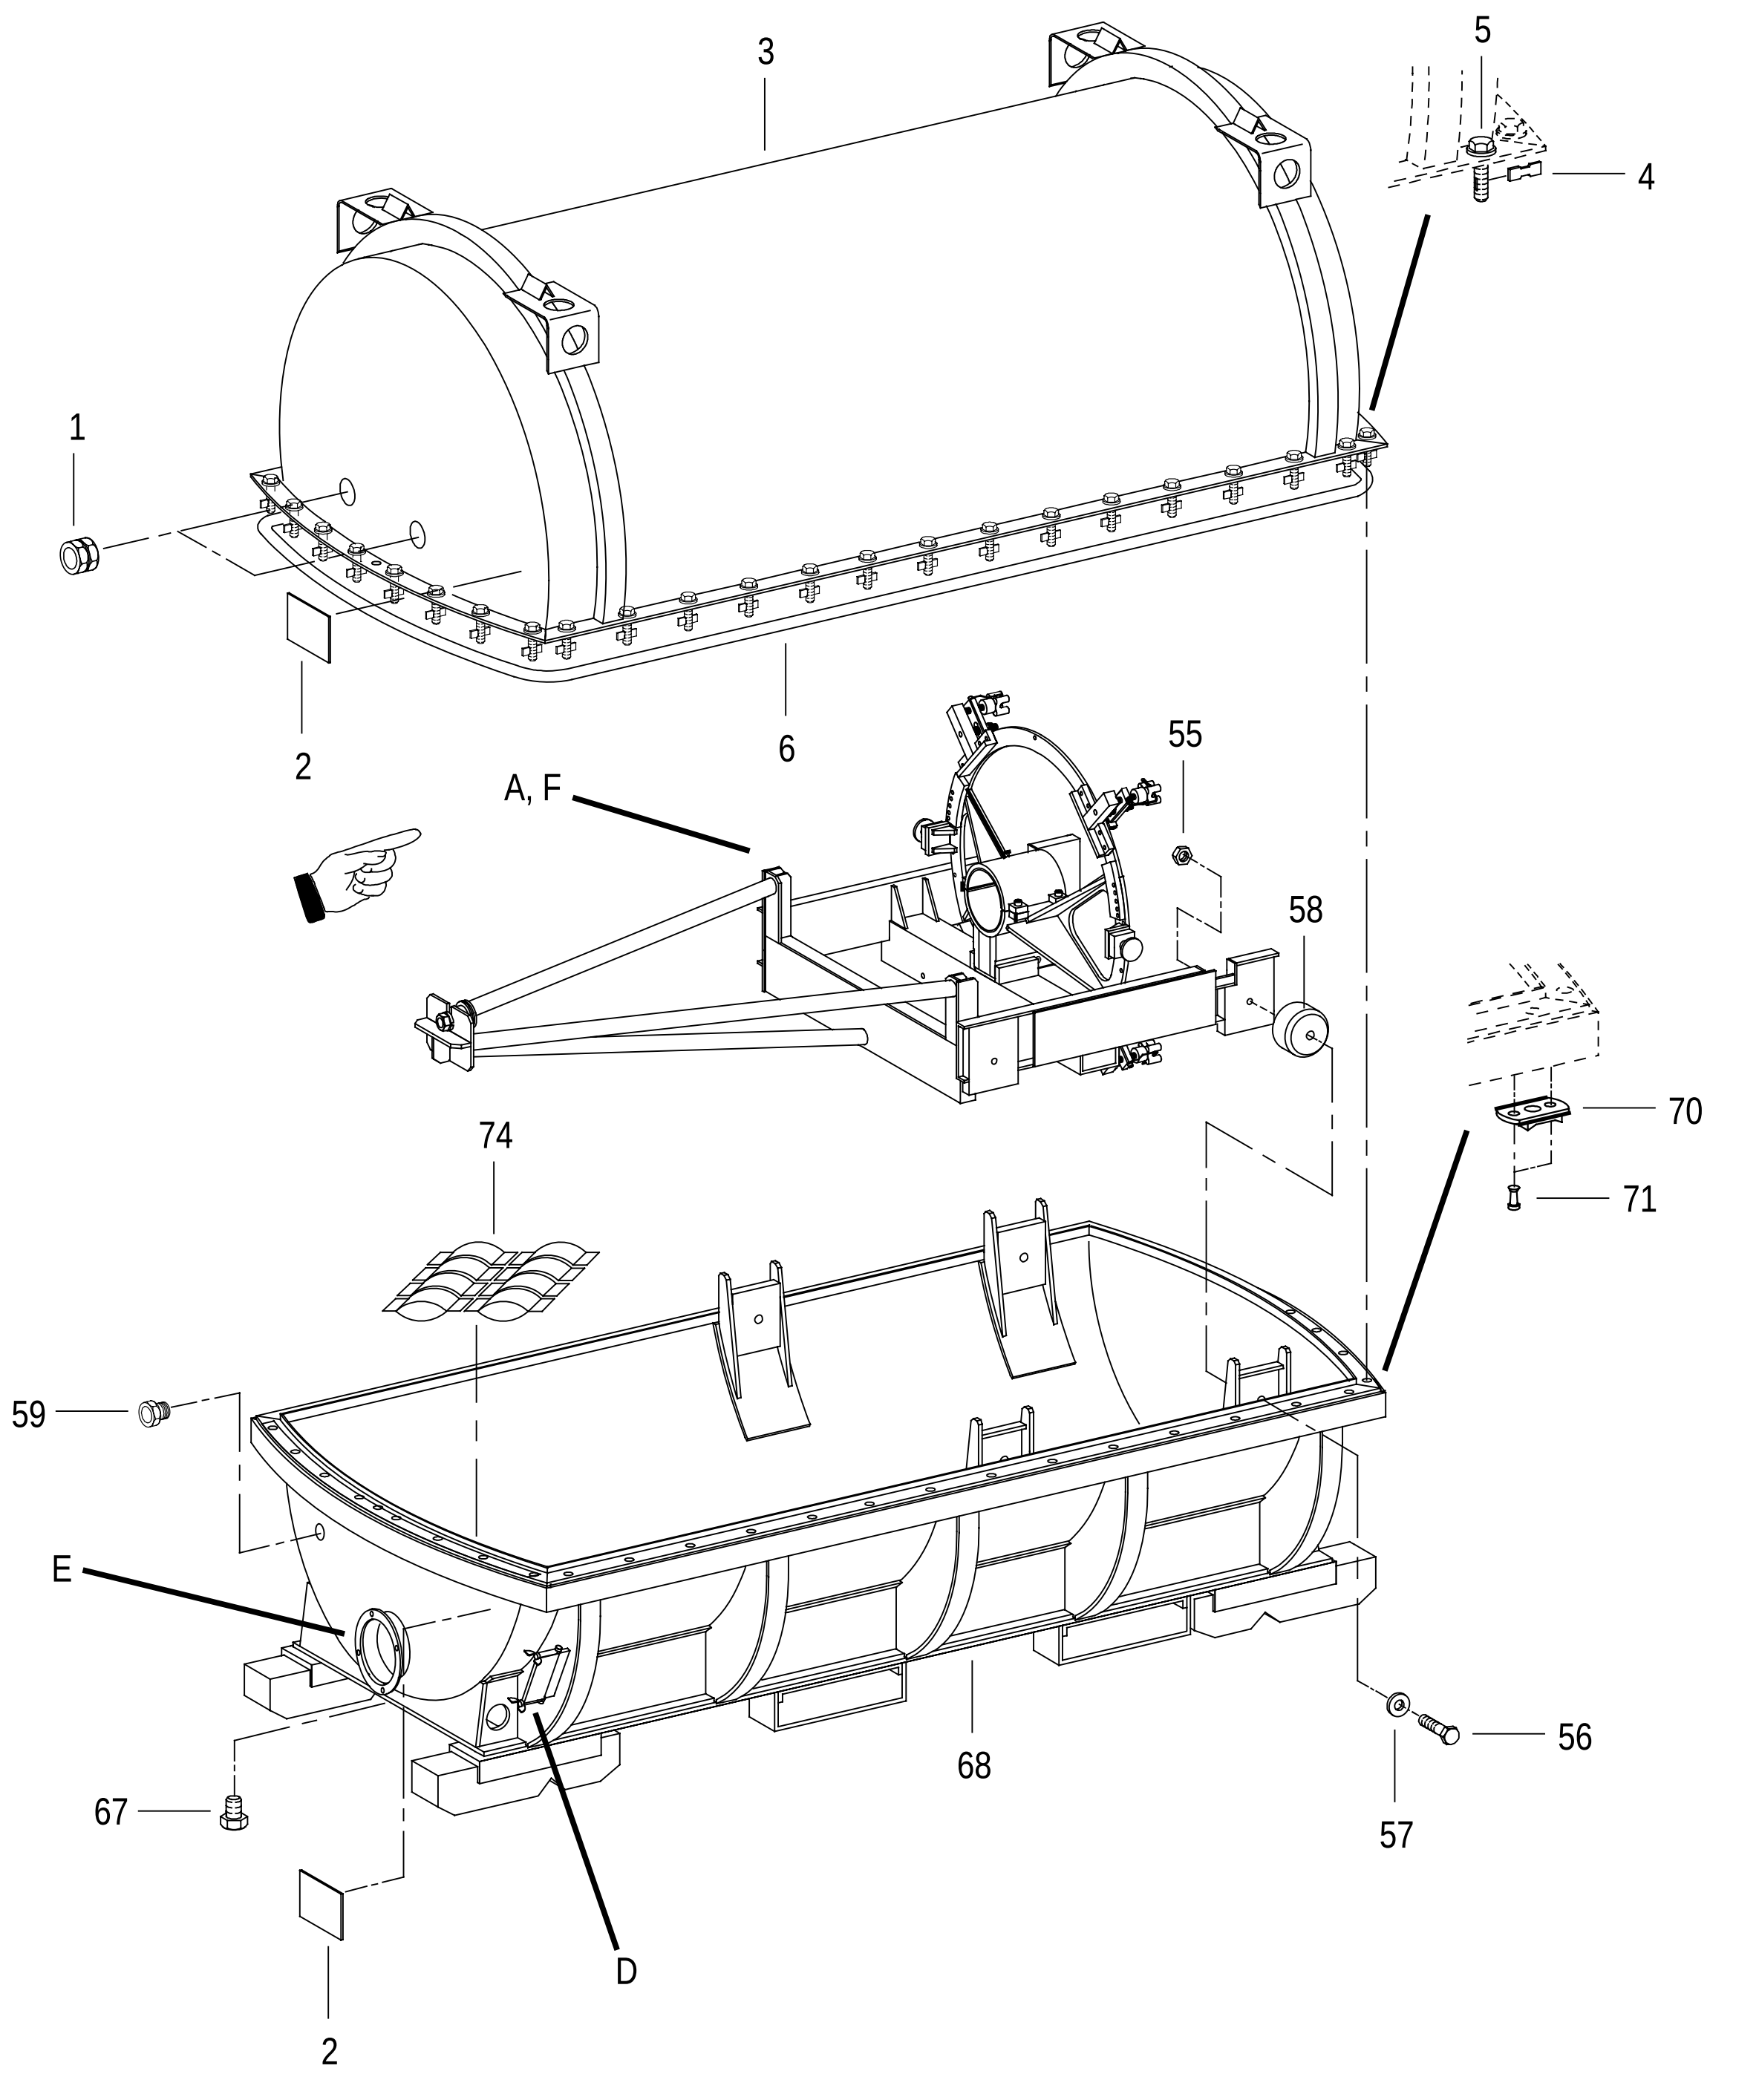


FIGURE 109. FAN DRIVE TURBINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 1 OF 5)

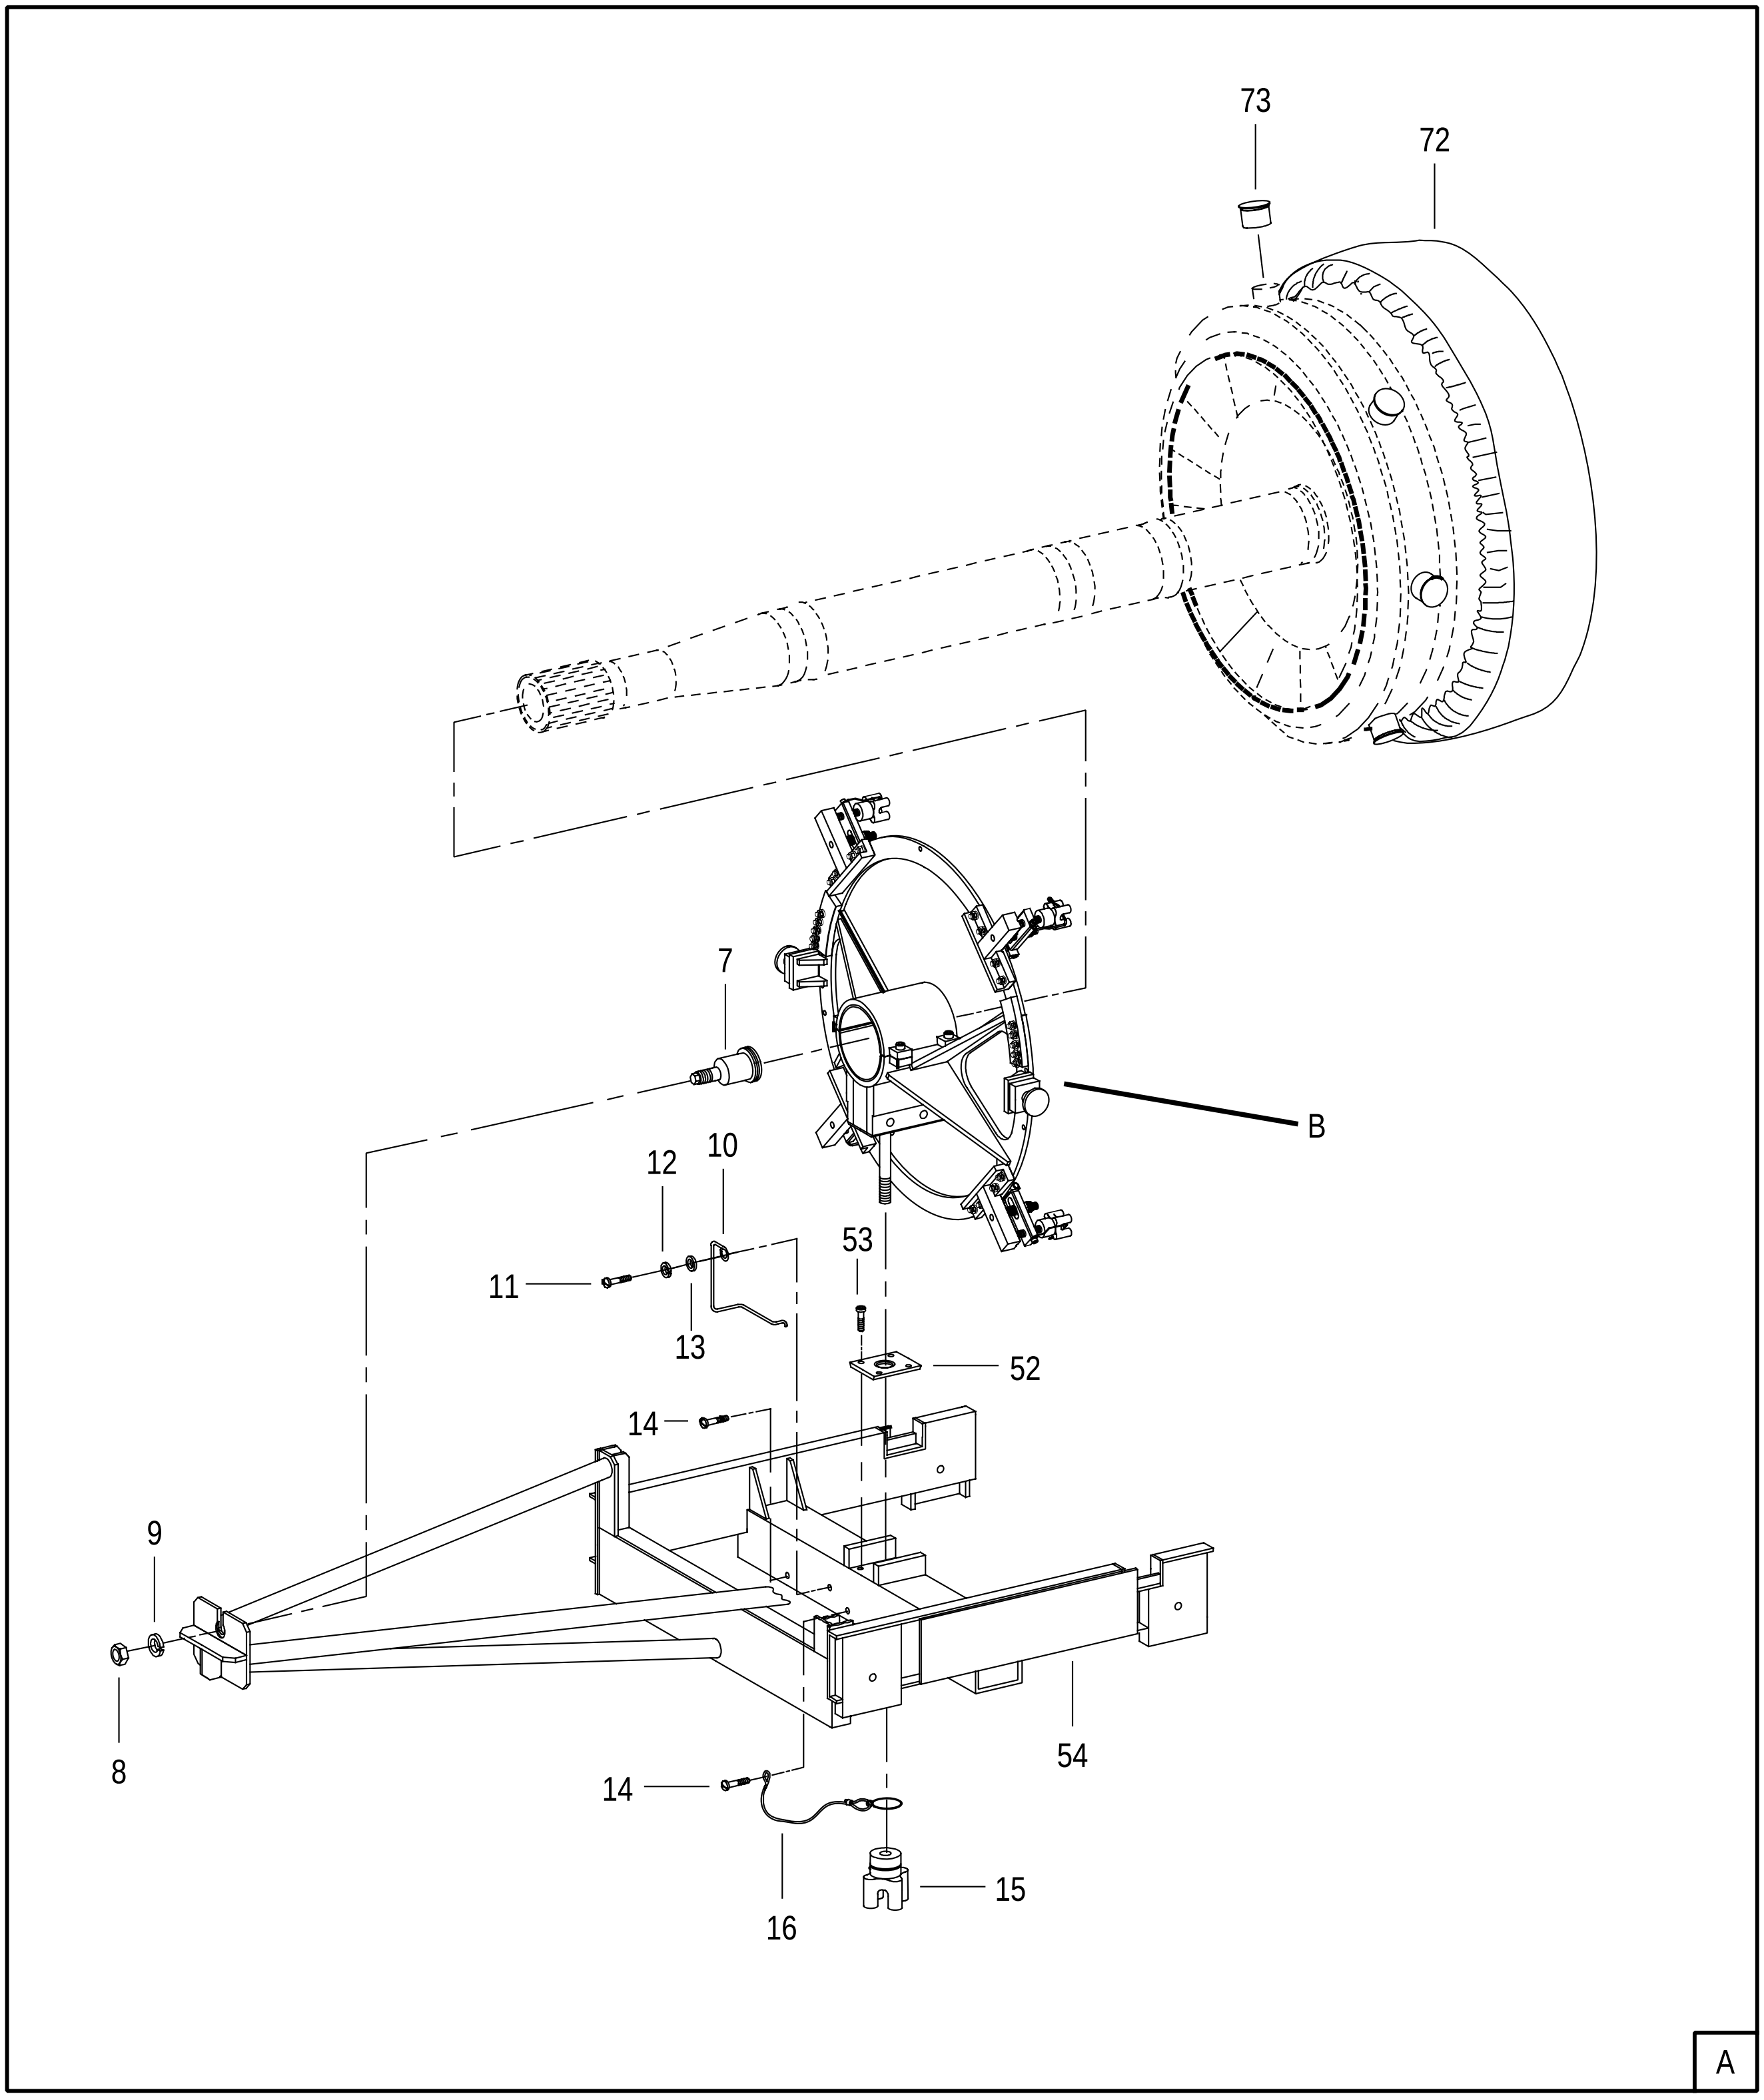


FIGURE 109. FAN DRIVE TURBINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 2 OF 5)




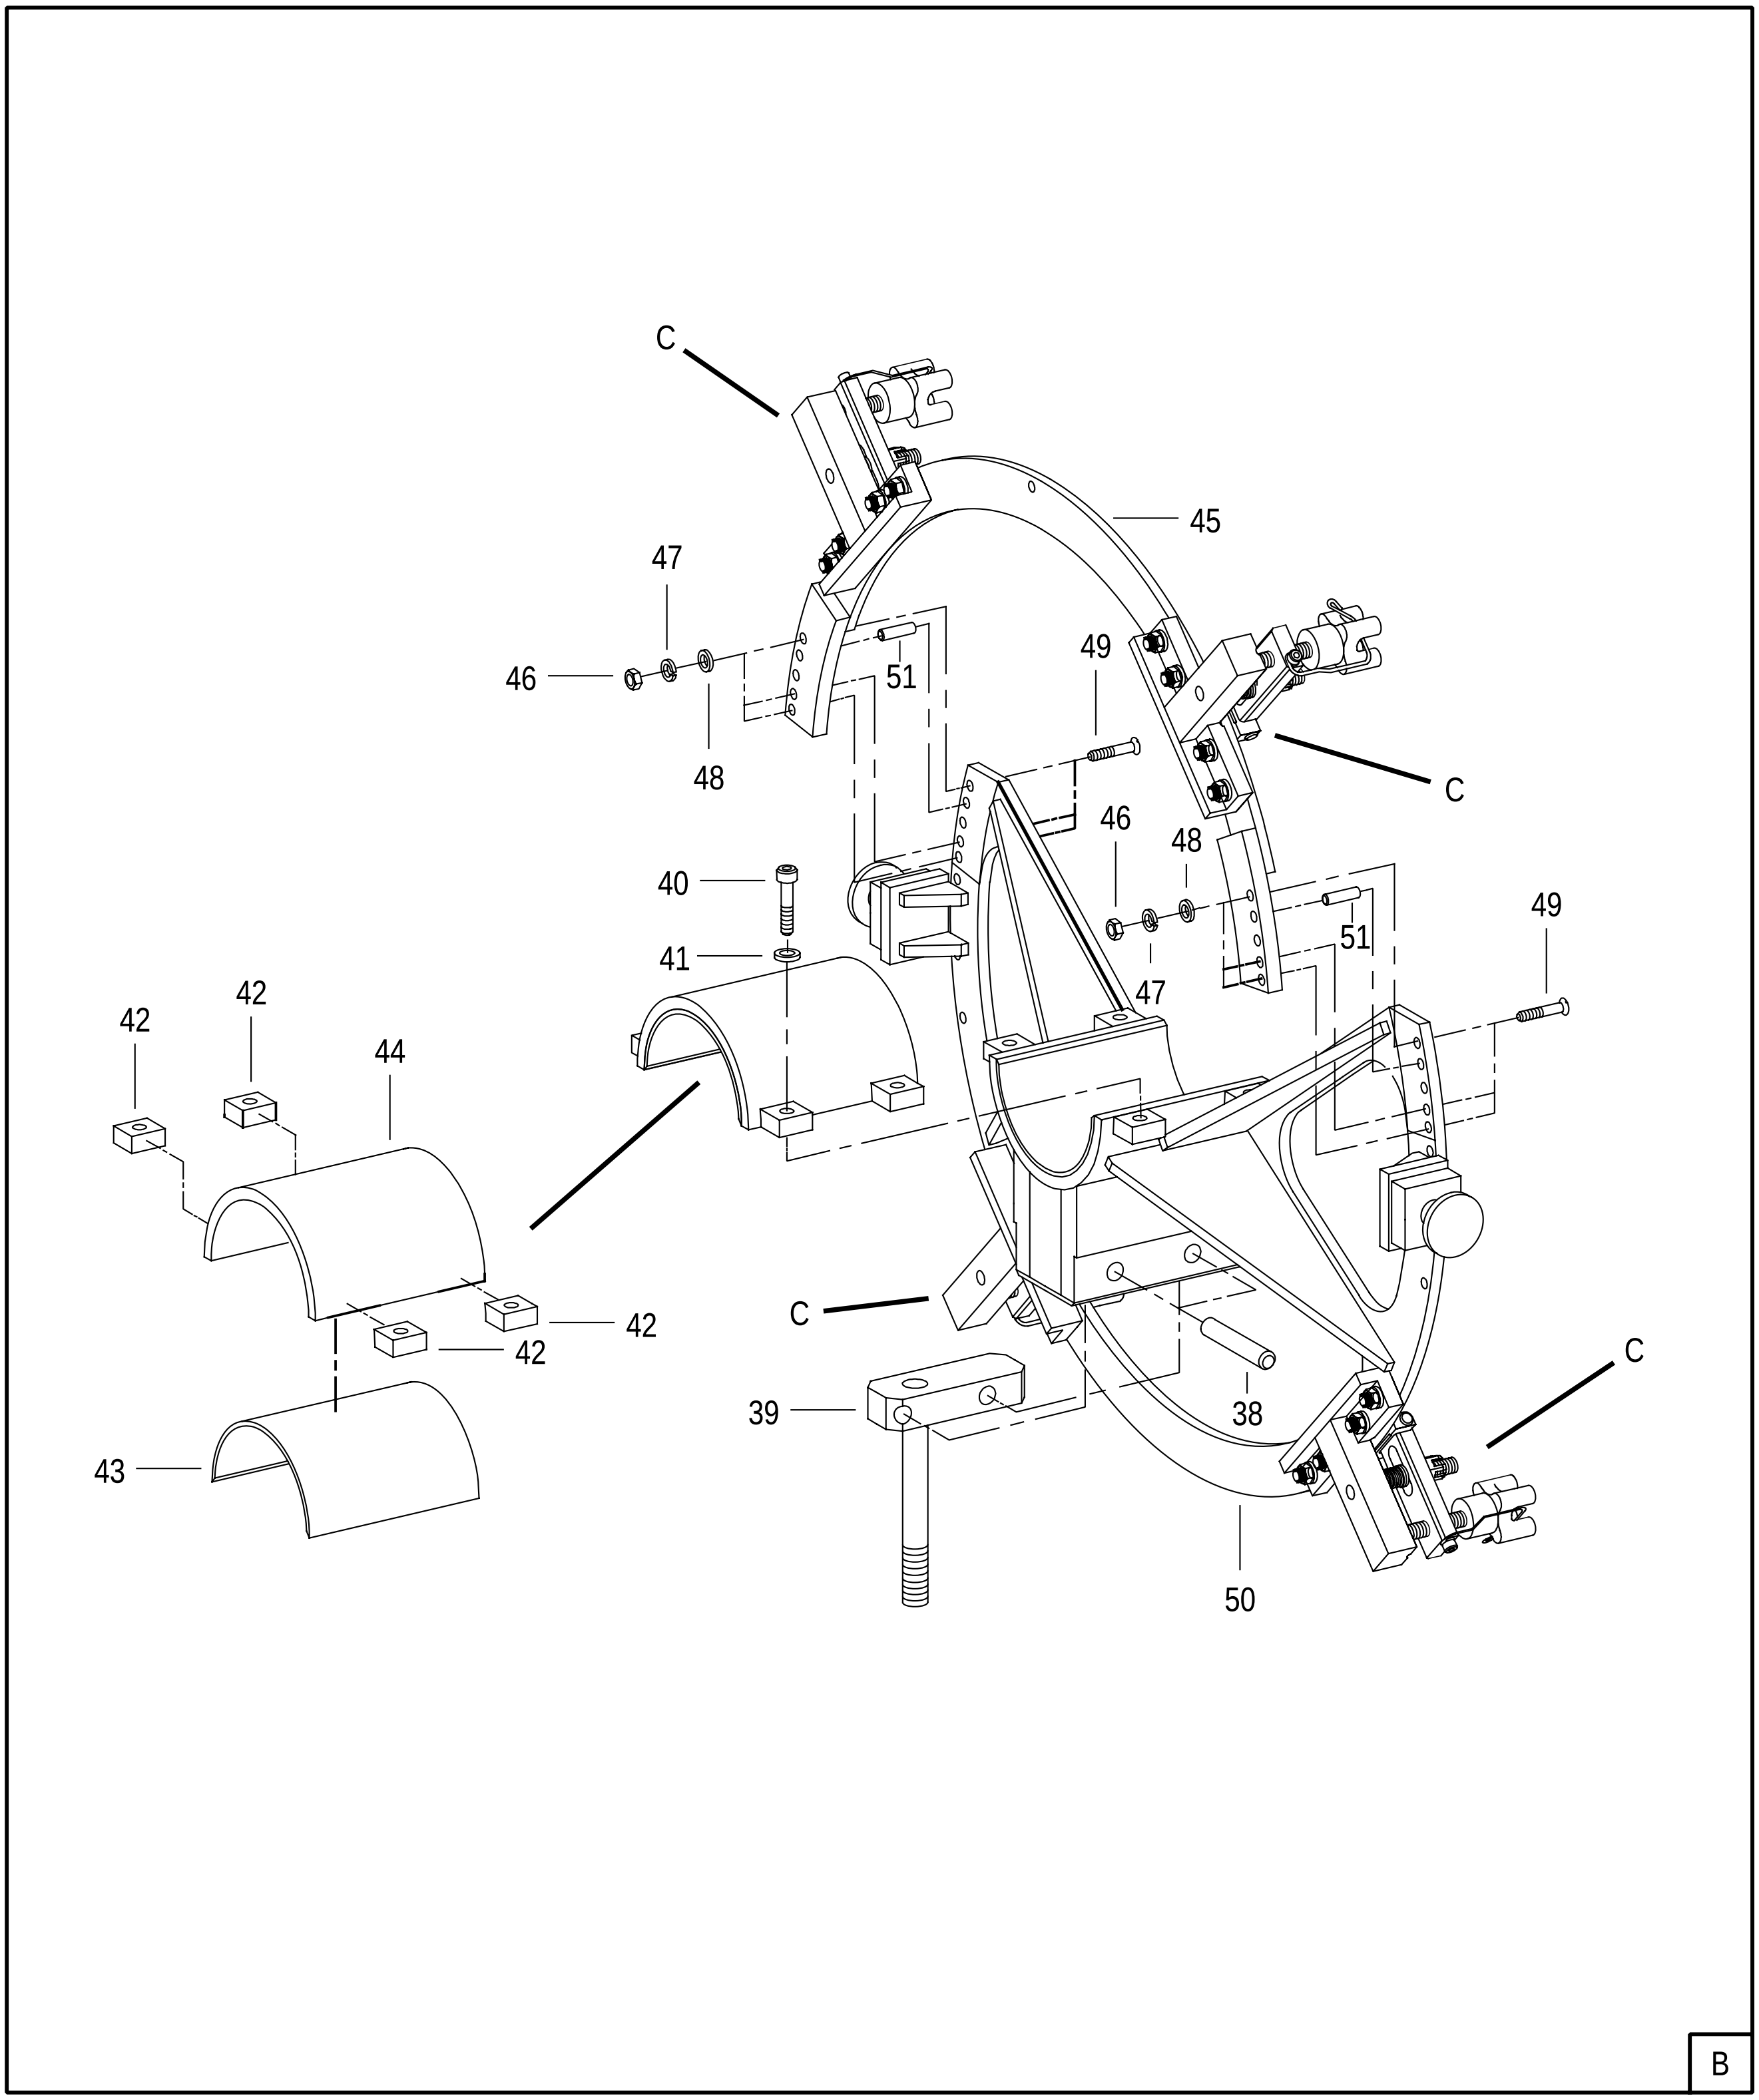


FIGURE 109. FAN DRIVE TURBINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 3 OF 5)

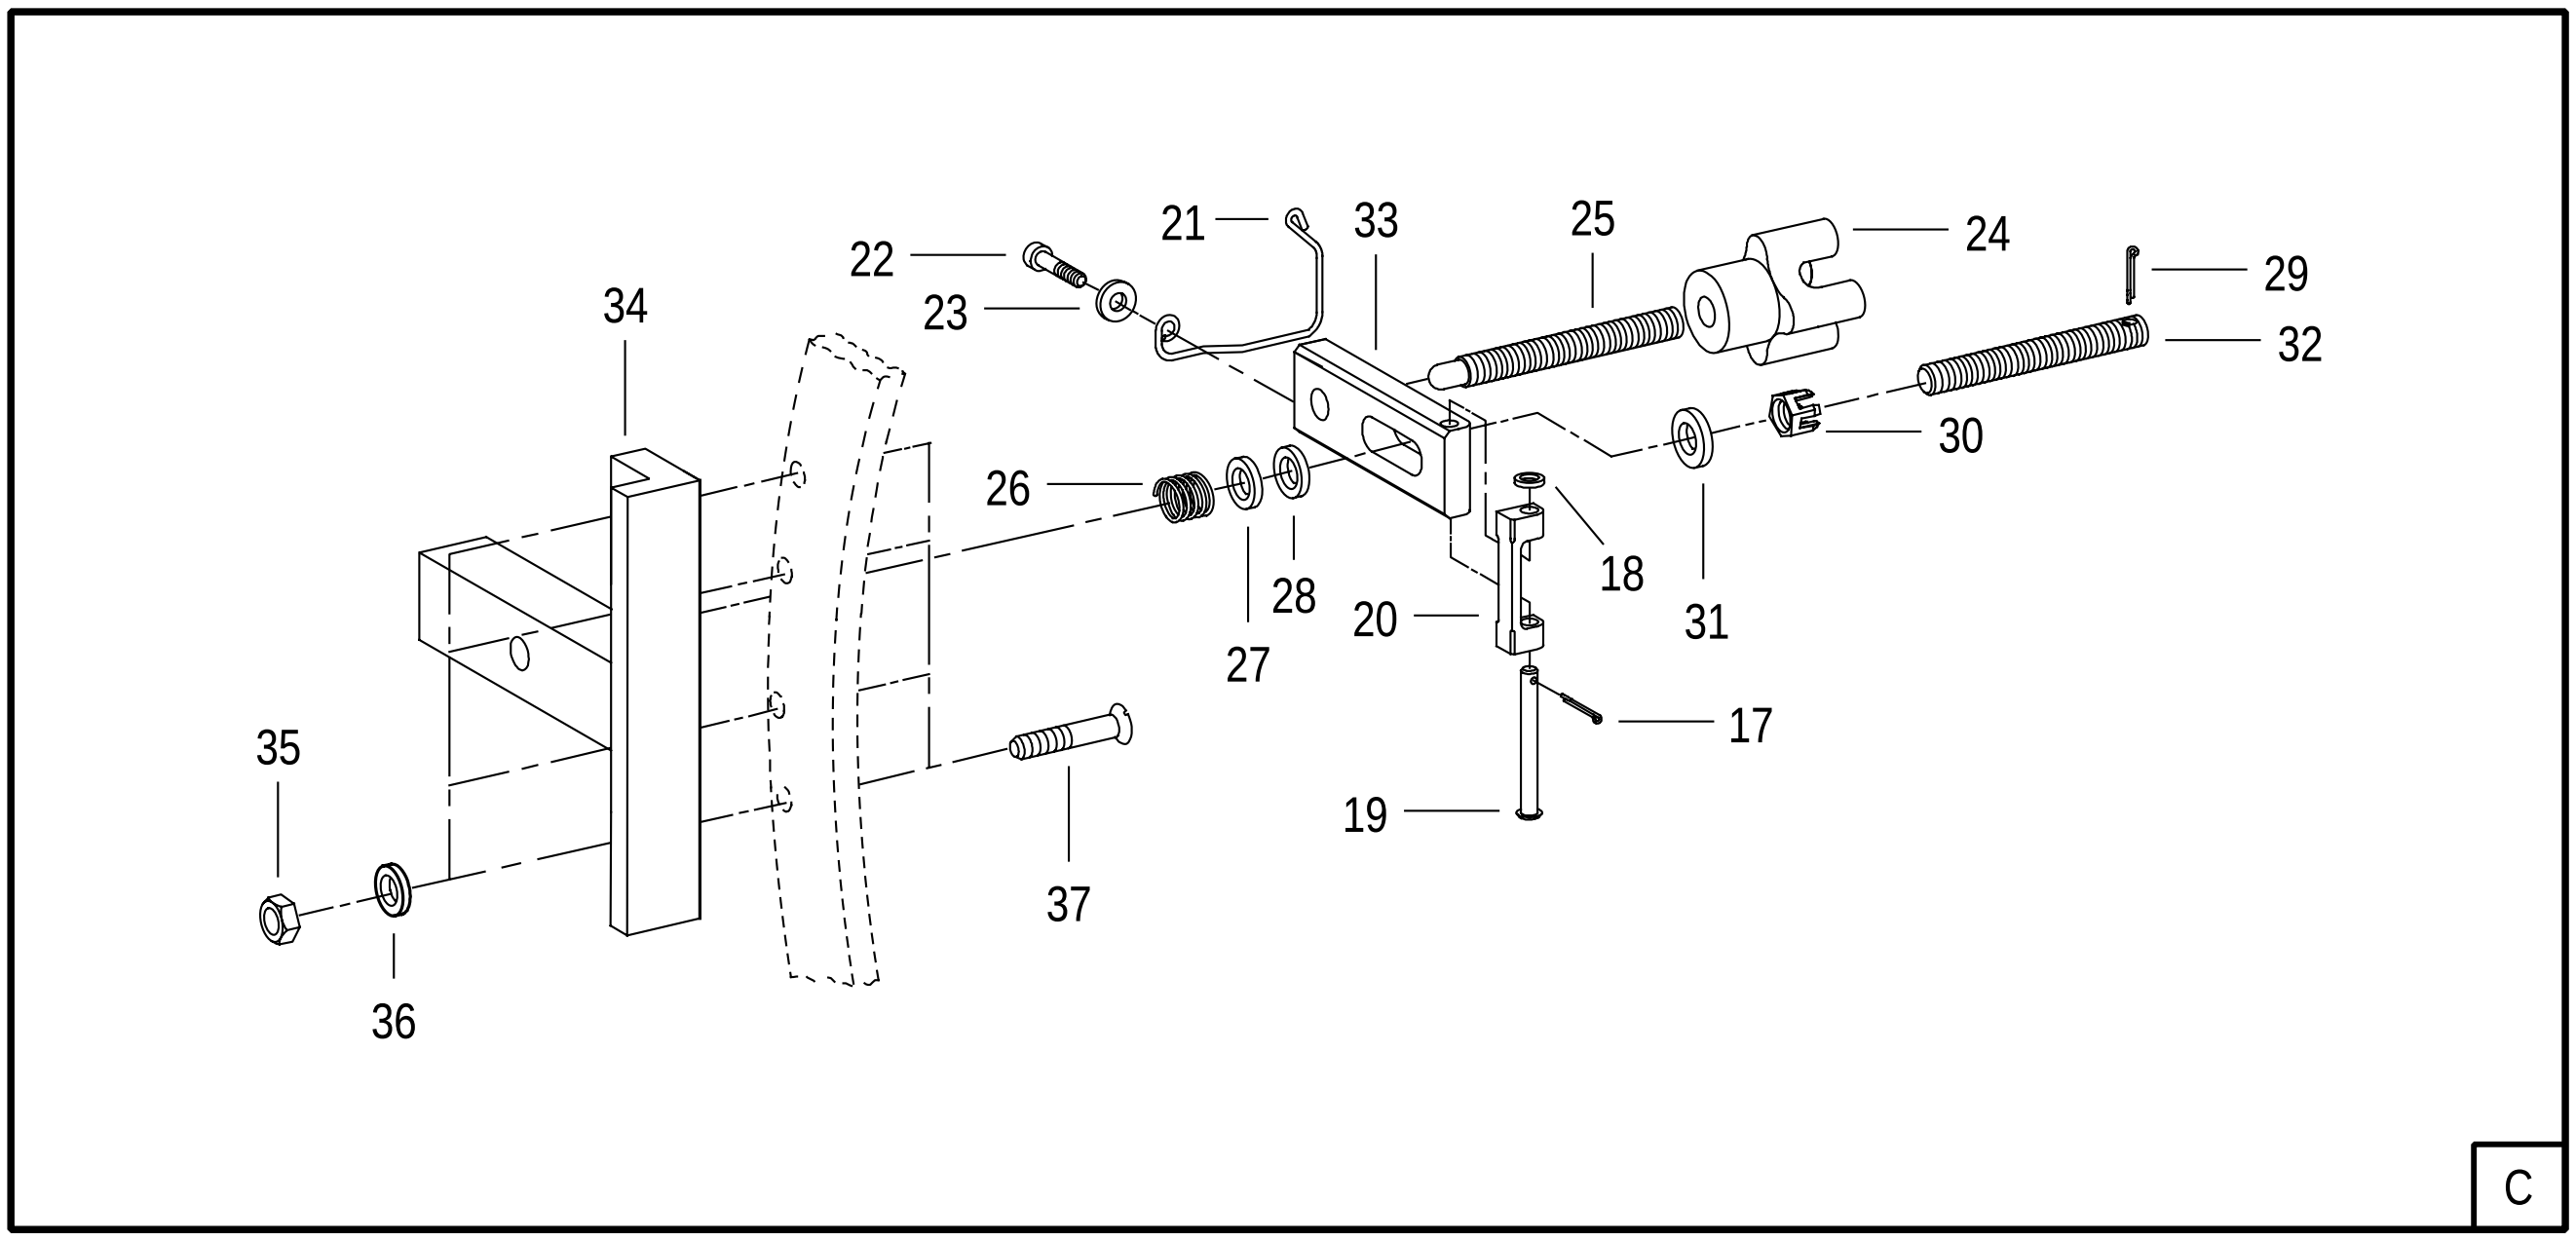

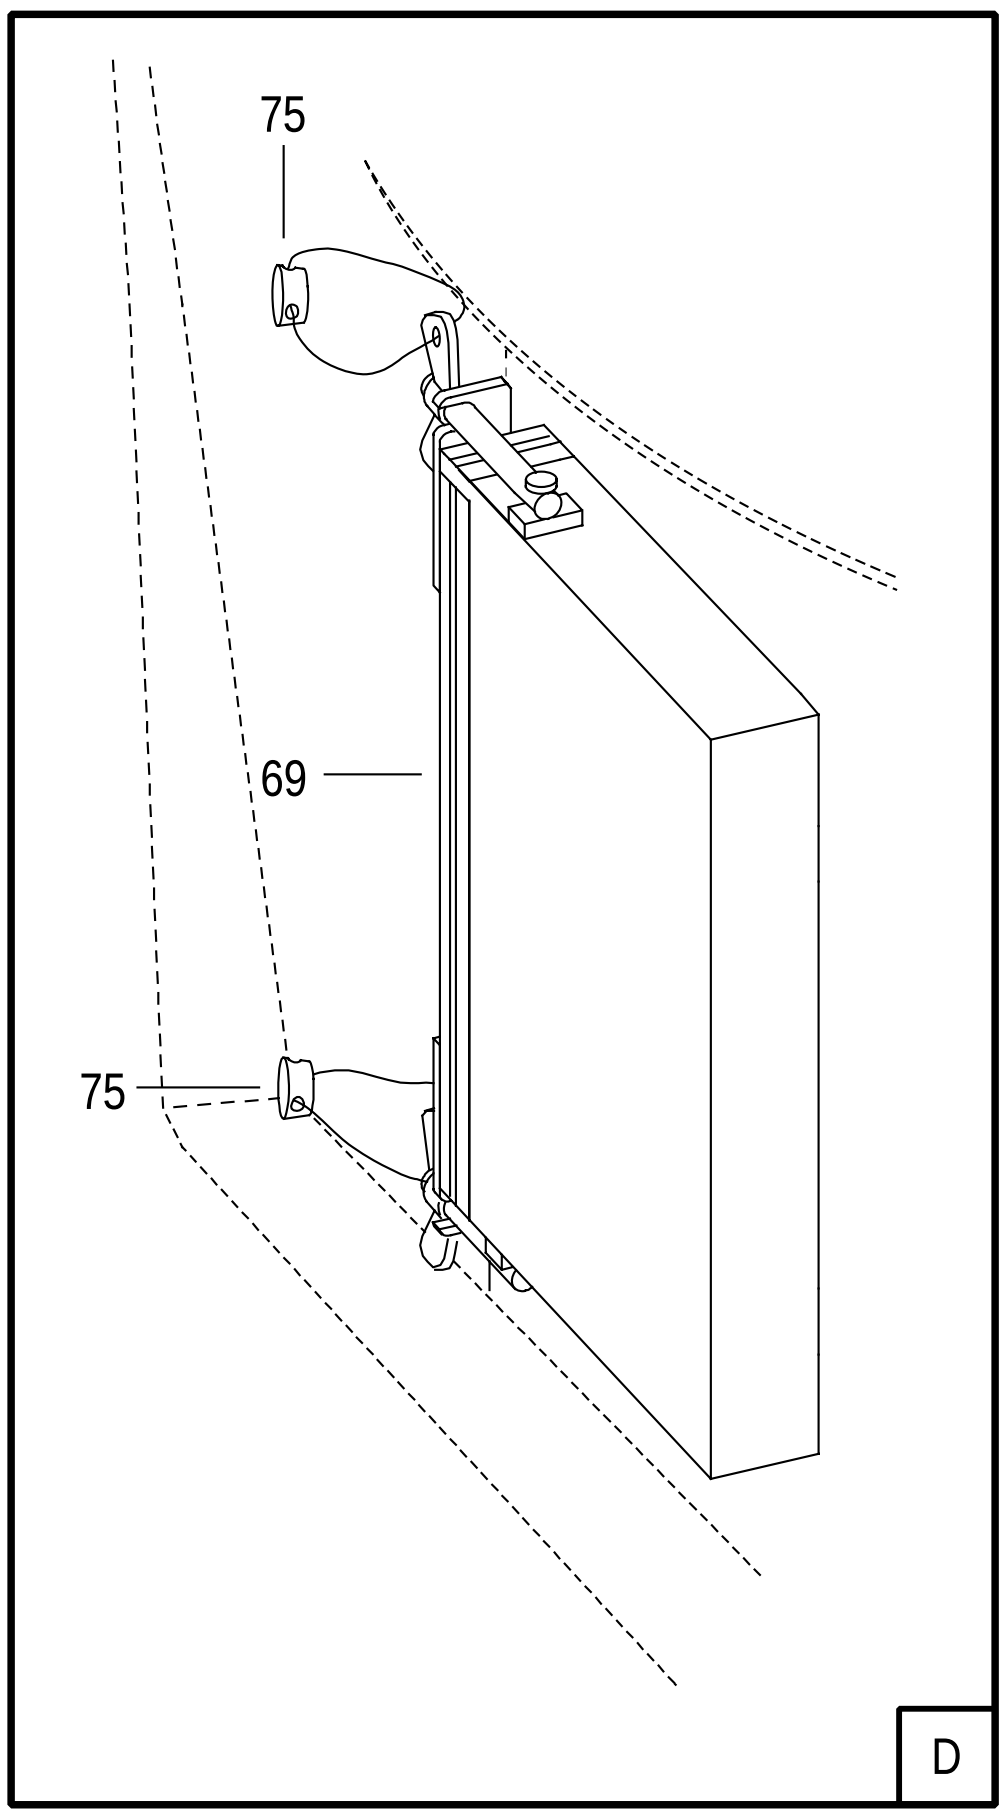

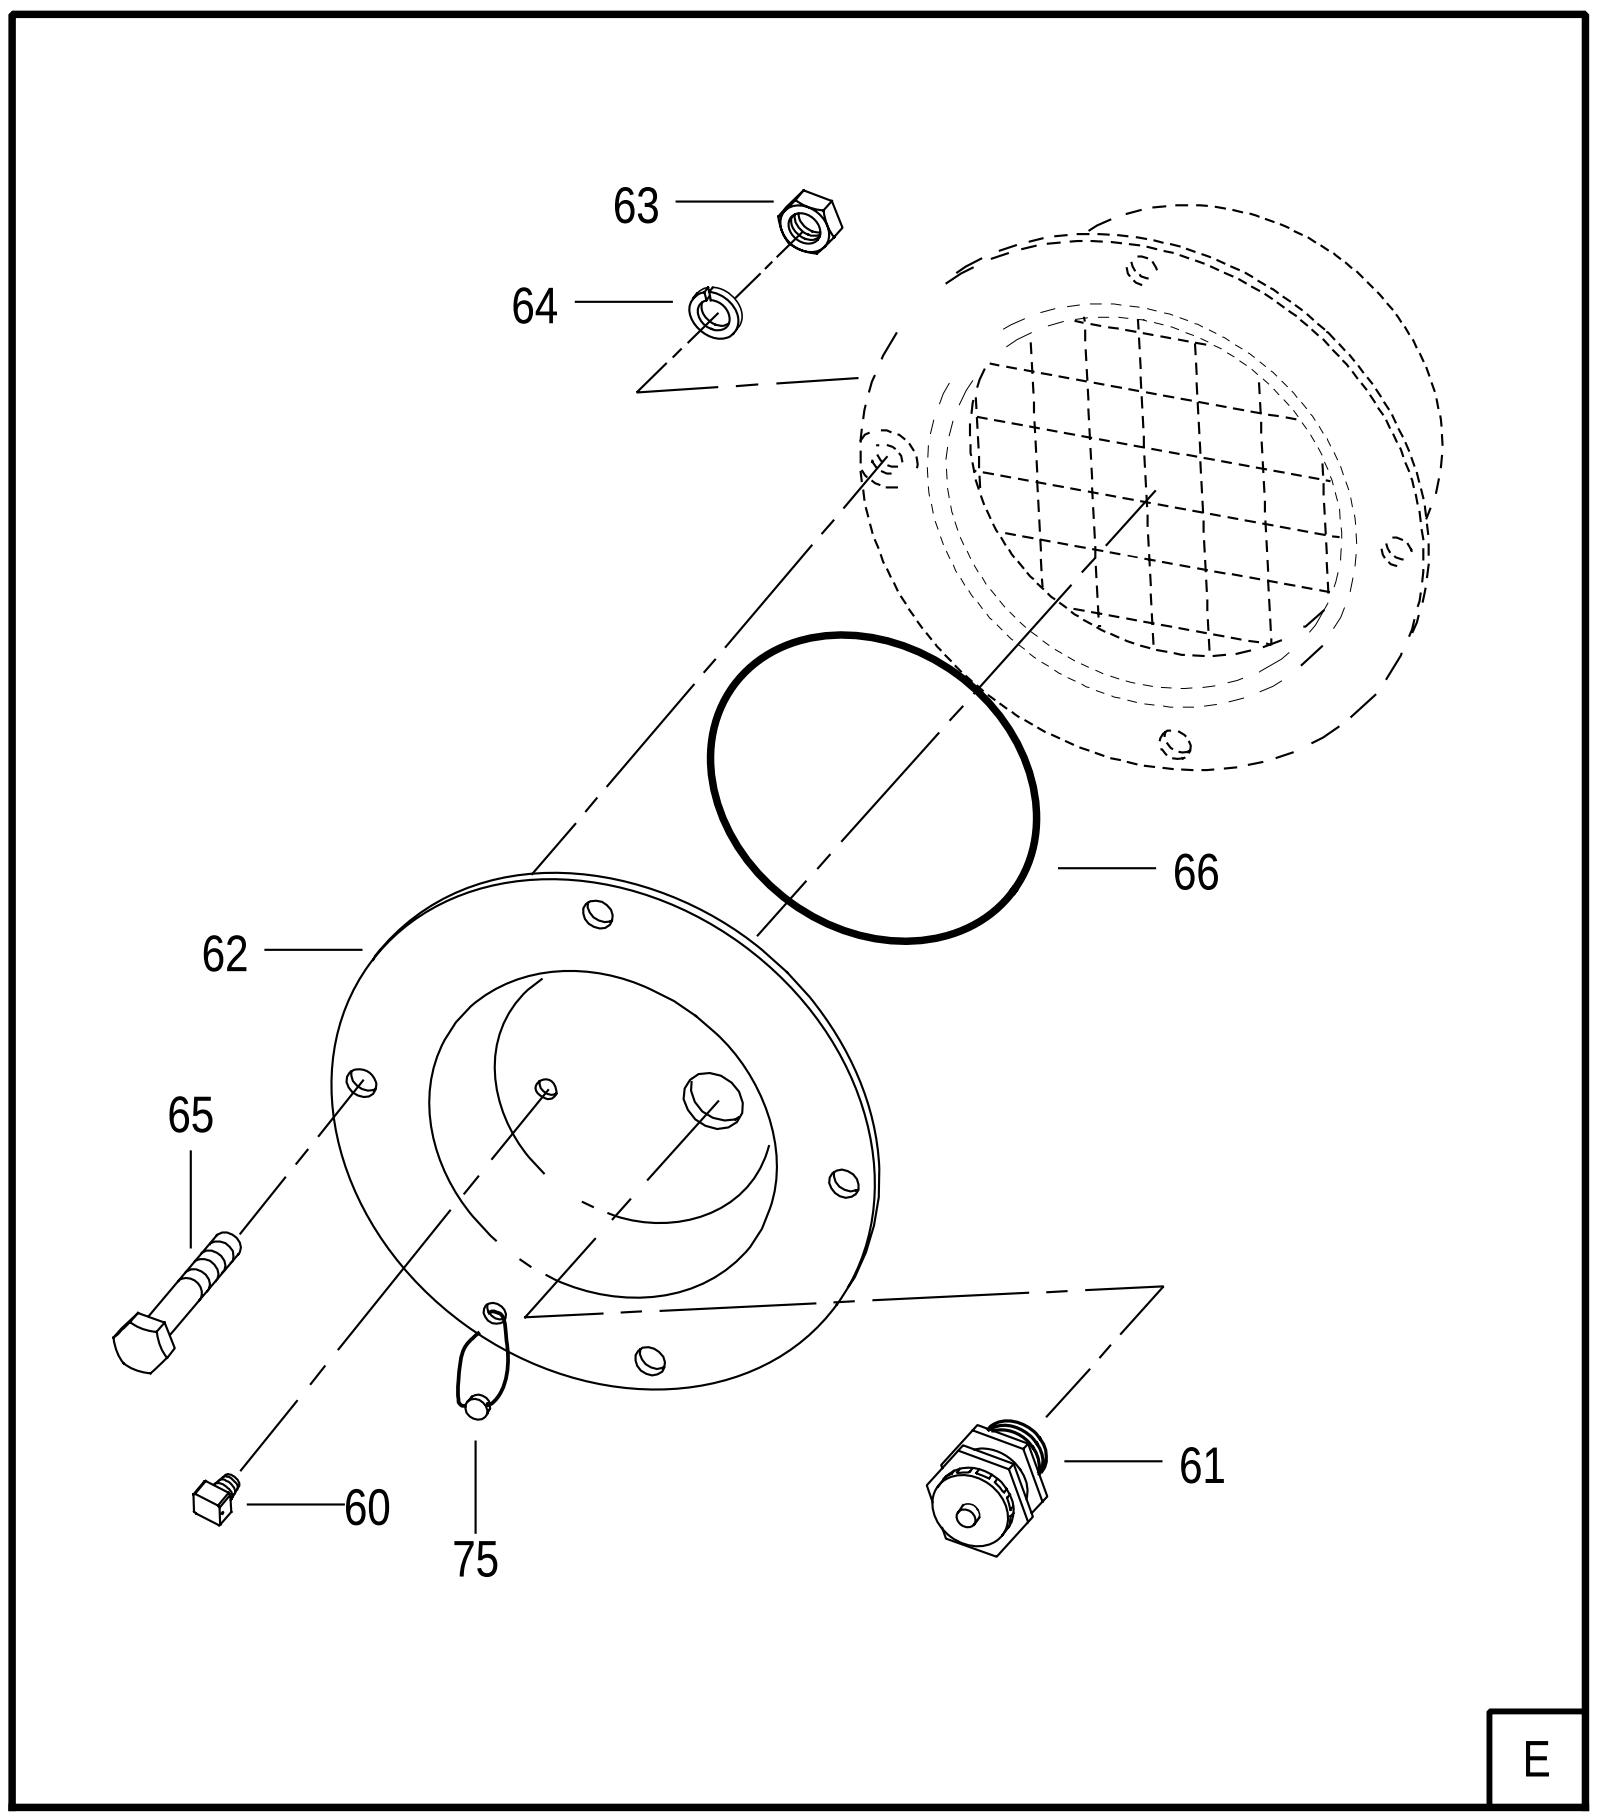

8132

FIGURE 109. FAN DRIVE TURBINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 4 OF 5)

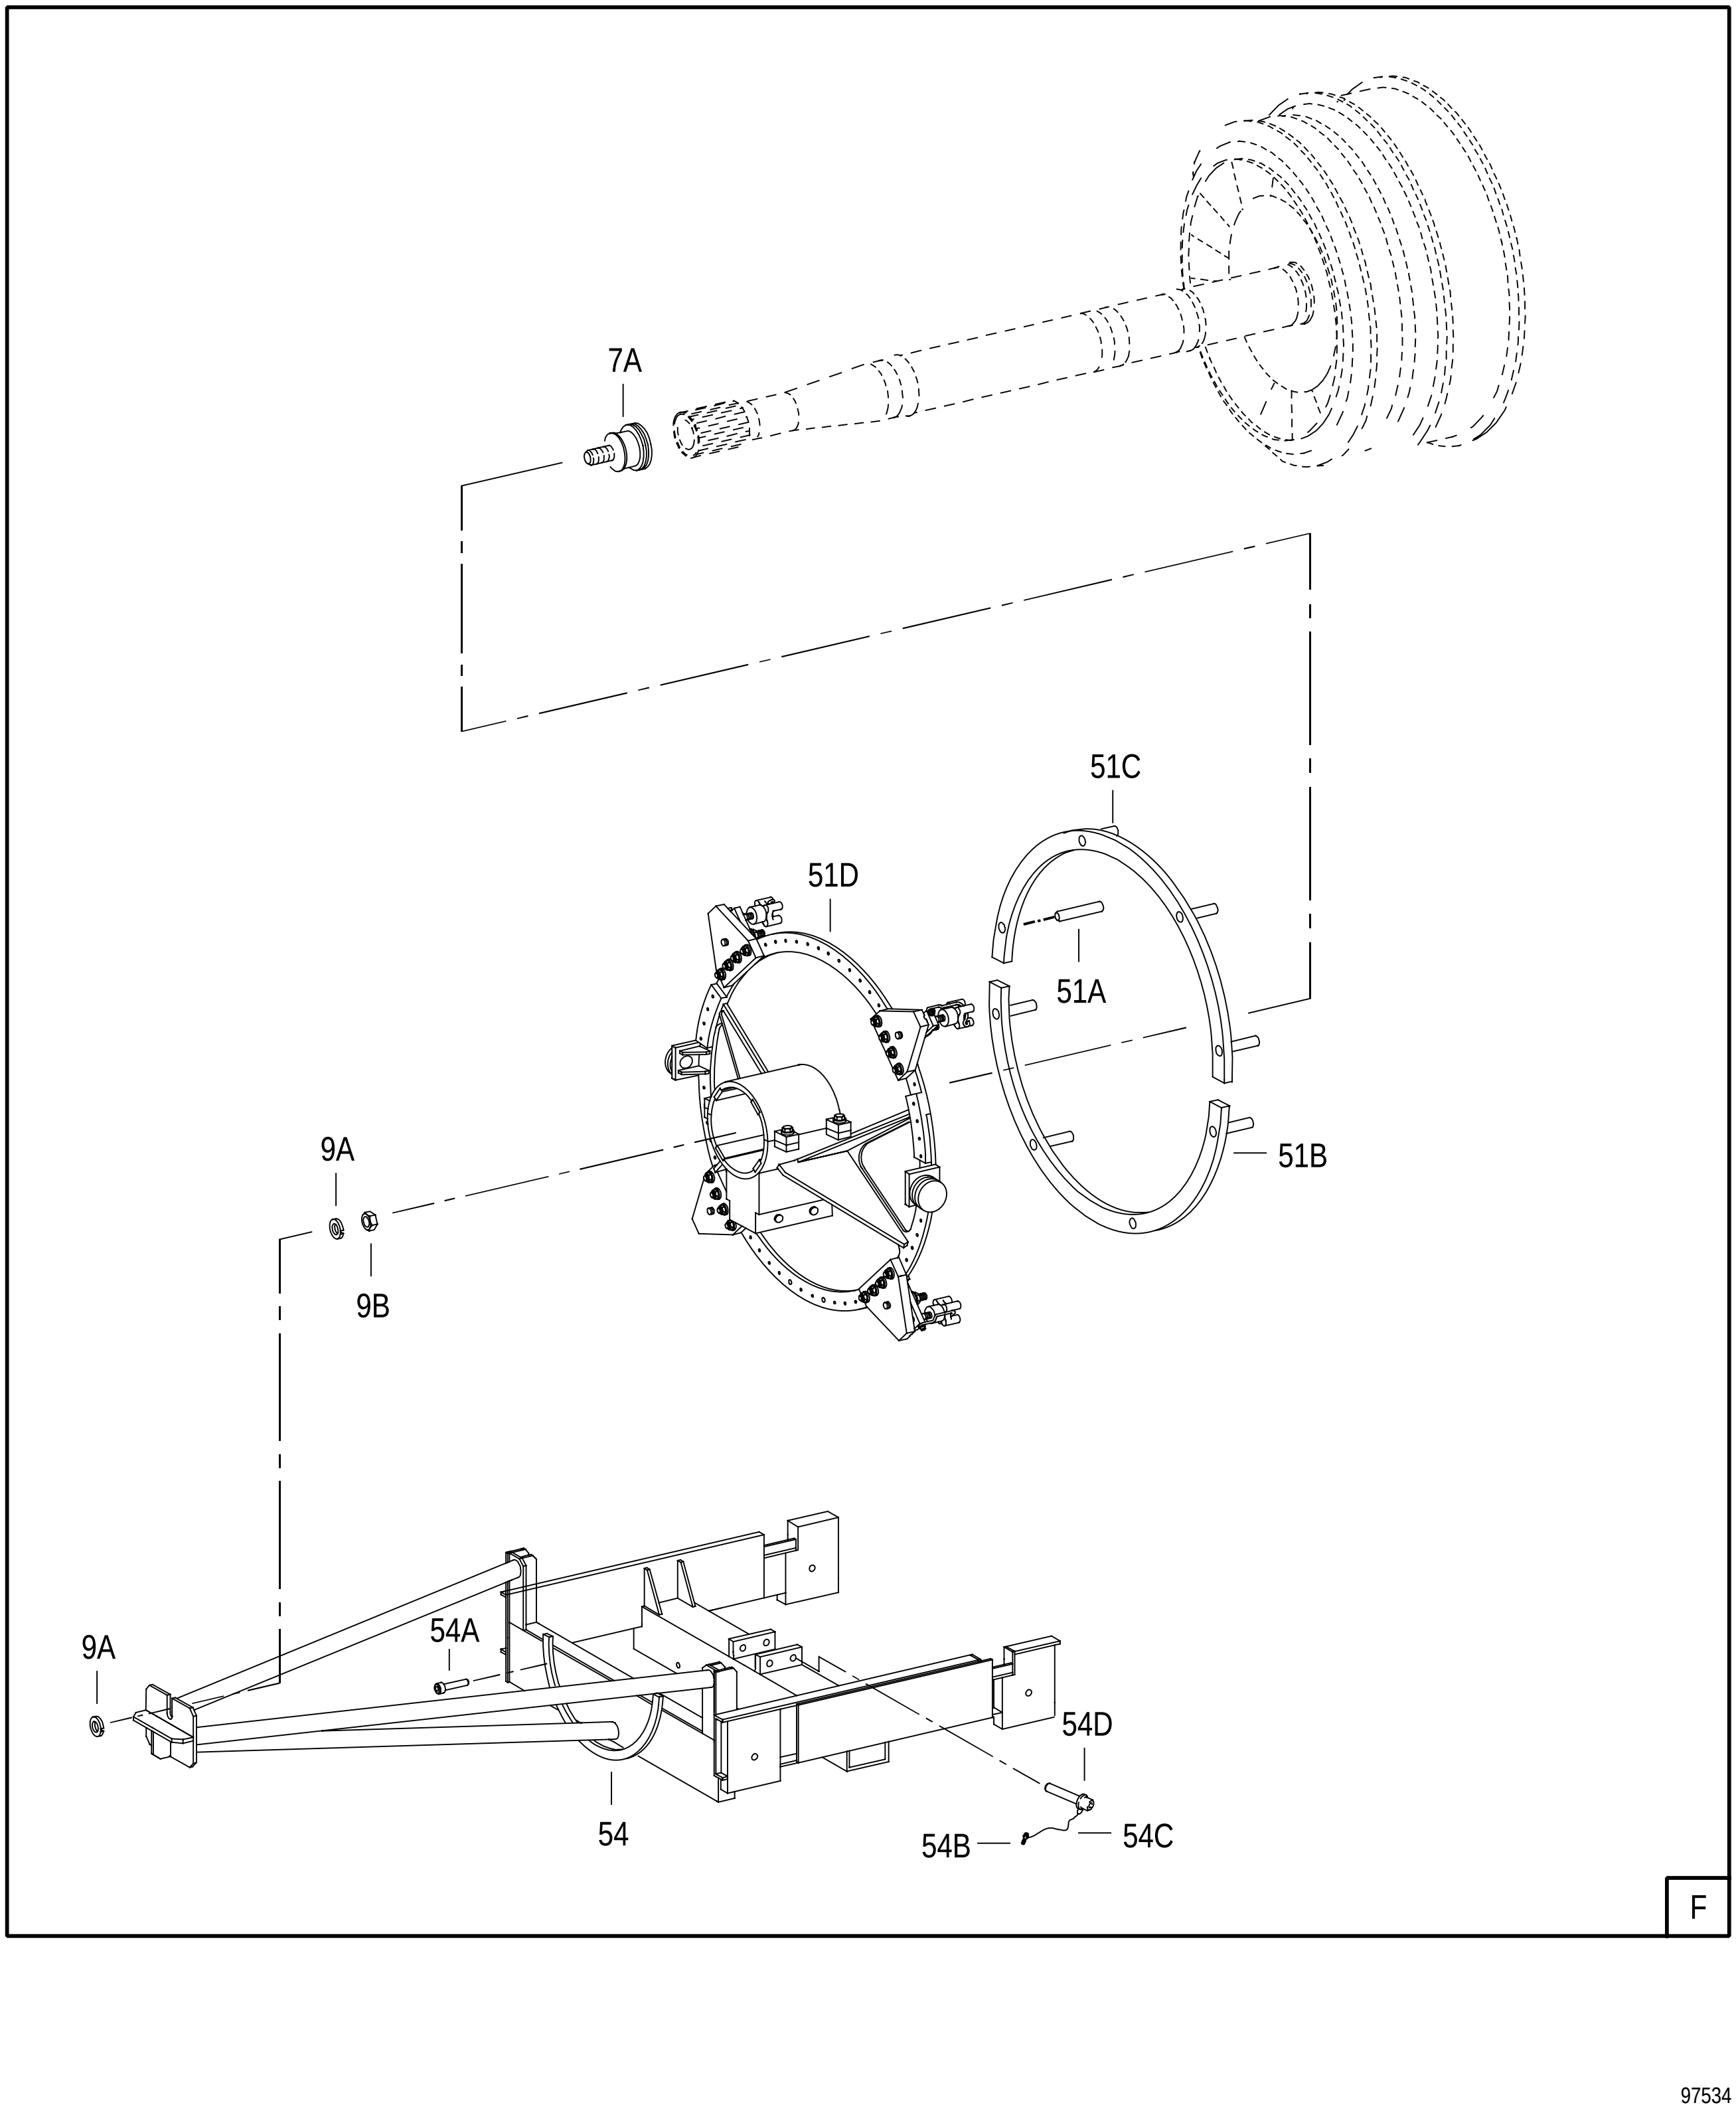


FIGURE 109. FAN DRIVE TURBINE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 5 OF 5)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	109	NO NUMBER		FAN DRIVE TURBINE MODULE CONTAINER ASSY . .	REF		
				AND CONSUMABLE PACKAGING PARTS			
				SEE FIG. 1-19 FOR NHA			
		P4070537	52661	. CONTAINER ASSY-FAN DRIVE TURBINE MODULE .	1		PAFDD
R		P4078845	52661	. CONTAINER ASSY-FAN DRIVE TURBINE MODULE .	1		PAFDD
	- 1	TA446-P47412	08992	.. WINDOW-OBSERVATION	2		PAFZZ
				P&WA PART NO. P47412			
	- 2	P52715 *	52661	.. PLATE-IDENTIFICATION, SPARE PARTS	2		PAFZZ
				SHIPPING CONTAINER			
	- 3	P4070537-02	52661	.. CONTAINER HALF-METAL, REUSABLE, UPPER, . . .	1		PAFDD
				ASSY OF			
R				USE ONLY ON P4070537			
				PARTIAL BREAKDOWN FOLLOWS			
	- 4	34S02-1-1AA	71286	... PIN-TURNLOCK FASTENER STUD	44		PAFZZ
				P&WA PART NO. P4015046			
	- 5	34S01-3-1AA	71286	... STUD-TURNLOCK FASTENER	44		PAFZZ
				P&WA PART NO. P48690			
	- 6	P48910	52661	.. PACKING-PREFORMED, REUSABLE METAL	1		PAFZZ
				CONTAINER			
	- 7	P4078914	52661	.. SUPPORT-SHAFT	1		PAFDD
R				USE ONLY ON P4070537			
R	- 7A	P4078949	52661	.. STUD-FAN DRIVE TURBINE MODULE	1		PAFZZ
R				USE ONLY ON P4078845			
	- 8	MS51971-8	96906	.. NUT (AP).	1		PAFZZ
	- 9	MS35338-146	96906	.. WASHER (AP)	1		PAFZZ
R	- 9A	MS15795-822	96906	.. WASHER.	2		PAFZZ
R				USE ONLY ON P4078845			
R	- 9B	MS51971-8	96906	.. NUT	1		PAFZZ
R				USE ONLY ON P4078845			
	- 10	P4078913	52661	.. RETAINER-KNOB	1		PAFZZ
R				USE ONLY ON P4070537			
	- 11	MS51576-17	96906	.. SCREW (AP)	1		PAFZZ
	- 12	AN960-416L	88044	.. WASHER-FLAT (AP).	1		PAFZZ
	- 13	AN960-416	88044	.. WASHER (AP)	1		PAFZZ
	- 14	MS24630-25	96906	.. SCREW	2		PAFZZ
R				USE ONLY ON P4070537			
	- 15	P4078873	52661	.. KNOB-BAR	1		PAFZZ
R				USE ONLY ON P4070537			
	- 16	P4078922	52661	.. CABLE ASSY	1		PAFZZ
R				USE ONLY ON P4070537			
		P4078875	52661	.. RETAINER ASSY-FAN DRIVE TURBINE.	1		PAFDD
R				USE ONLY ON P4070537			
		P4078860	52661	... CLAMP ASSY	4		PAFFF
	- 17	MS24665-153	96906	.... PIN	1		PAFZZ
	- 18	5710-59-60	86928	.... WASHER-REDUCED OD	1		PAFZZ
				P&WA PART NO. P4078857			
	- 19	P4078858	52661	.... PIN-CLEVIS	1		PAFZZ
	- 20	P4078865	52661	.... REST-CLAMPING	1		PAFZZ
	- 21	P4078854-01	52661	.... RETAINER-KNOB.	1		PAFZZ
	- 22	MS51576-16	96906	.... SCREW (AP)	1		PAFZZ
	- 23	AN960-C416	88044	.... WASHER-FLAT (AP)	1		PAFZZ
	- 24	CL-4-BK	99862	.... KNOB-BAR	1		PAFZZ
				P&WA PART NO. P4078856			
	- 25	P4078863	52661	.... STUD-THREADED	1		PAFZZ
	- 26	C0720-072-1250S	74197	.... SPRING-COMPRESSION	1		PAFZZ
				P&WA PART NO. P4078855			
	- 27	AN960-C816	88044	.... WASHER-FLAT	1		PAFZZ
	- 28	5612-159-062	86928	.... WASHER-FLAT	1		PAFZZ
				P&WA PART NO. P4078927			
	- 29	MS24665-370	96906	.... PIN	1		PAFZZ
	- 30	MS9358-14	96906	.... NUT	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	109 - 31	P4078862	52661	.... WASHER-SPHERICAL	1		PAFZZ
	- 32	P4078861	52661	.... STUD-THREADED	1		PAFZZ
	- 33	P4078864	52661	.... STRAP-CLAMPING	1		PAFZZ
	- 34	P4078868-01	52661	... SUPPORT-CLAMP, ASSY OF	4		PAFZZ
	- 35	MS51922-2	96906	... NUT (AP)	4		PAFZZ
	- 36	AN960-XC416	88044	... WASHER-FLAT (AP)	4		PAFZZ
	- 37	MS24693-C102	96906	... SCREW (AP)	4		PAFZZ
	- 38	P4078871	52661	... PIN-STRAIGHT, HEADLESS	2		PAFZZ
	- 39	P4078870-01	52661	... ROD-ALIGNMENT, ASSY OF	1		PAFZZ
		P4078872-01	52661	... CLAMP-SHAFT, ASSY OF	1		PAFFF
	- 40	MS16997-101	96906	... SCREW (AP)	4		PAFZZ
	- 41	MS35338-46	96906	... WASHER (AP)	4		PAFZZ
	- 42	P4078872-03	52661	.... BLOCK-CLAMP, SHAFT	4		PAFZZ
	- 43	P4078872-04	52661	.... PAD-CLAMP, SHAFT	1		PAFZZ
	- 44	P4078872-02	52661	.... RING-CLAMP, SHAFT	1		PAFFF
	- 45	P4078869-01	52661	... RING-UPPER, ASSY OF	1		PAFBZ
	- 46	MS51967-2	96906	... NUT (AP)	6		PAFZZ
	- 47	MS35338-139	96906	... WASHER (AP)	6		PAFZZ
	- 48	AN960-XC416	88044	... WASHER-FLAT (AP)	6		PAFZZ
	- 49	MS24693-C102	96906	... SCREW (AP)	6		PAFZZ
	- 50	P4078851-01	52661	... RETAINER, ASSY OF	1		PAFDD
				PARTIAL BREAKDOWN FOLLOWS			
	- 51	MS16555-48	96906	.... PIN	2		PAFZZ
R	- 51A	P4078948	52661	.. PIN-LOCATING	8		PAFZZ
R				USE ONLY ON P4078845			
R	- 51B	P4078932	52661	.. ADAPTER-LOWER RING	1		PAFZZ
R				USE ONLY ON P4078845			
R	- 51C	P4078947	52661	.. ADAPTER-UPPER RING	1		PAFZZ
R				USE ONLY ON P4078845			
R	- 51D	PWA 56682	52661	.. RETAINER-FRONT, FAN DRIVE TURBINE	1		PEFFF
R				MODULE			
R				USE ONLY ON P4078845			
	- 52	P4078874	52661	.. PLATE-SPACER	1		PAFZZ
R				USE ONLY P4070537			
	- 53	MS24667-29	96906	.. SCREW (AP)	4		PAFZZ
	- 54	P4070537-03	52661	.. SUPPORT-CONTAINER ASSY, FAN DRIVE	1		PAFDD
				TURBINE MODULE			
R				USE ONLY ON P4070537			
R		P4078938	52661	.. SUPPORT-FAN DRIVE TURBINE MODULE, FRONT	1		PAFZZ
R				USE ONLY ON 4078845			
R	- 54A	MS16997-45	96906	.. SCREW	2		
R				USE ONLY ON P4078845			
R	- 54B	MS24622-42	96906	.. SCREW	1		PAFZZ
R				USE ONLY ON P4078845			
R	- 54C	P45962	52661	.. ROPE-WIRE, SINGLE LEG	2		
R				USE ONLY P4078845			
R	- 54D	MS17984-C843	96906	.. PIN	2		PAFZZ
R				USE ONLY ON P4078845			
	- 55	MS51922-37	96906	.. NUT	4		PAOZZ
	- 56	MS90726-108	96906	.. SCREW	4		PAFZZ
	- 57	MS35338-48	96906	.. WASHER	4		PAFZZ
	- 58	C623-F1	71985	.. MOUNT-RESILIENT	4		PAFZZ
				P&WA PART NO. P4070541			
				REPLACES P48913			
	- 59	TA346-P50844	08992	.. INDICATOR-HUMIDITY, PLUG	1		PAFZZ
				P&WA PART NO. P50844			
	- 60	MS20913-1S	96906	.. PLUG	1		PAFZZ
	- 61	TA330-25-10-R	08992	.. VALVE-AIR PRESSURE RELIEF, CONTAINER	1		PAFZZ
				P&WA PART NO. P37145			
	- 62	P49212	52661	.. COVER-ROTOR AND STATOR CONTAINER	1		PAFZZ
	- 63	MS51967-8	96906	.. NUT (AP)	4		PAOZZ
	- 64	MS35338-46	96906	.. WASHER (AP)	4		PAFZZ
	- 65	MS90725-60	96906	.. SCREW (AP)	4		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
109 - 66	MS29561-437	96906	.. PACKING	1		PAFZZ
- 67	MS20913-6S	96906	.. PLUG	1		PAFZZ
- 68	P4070537-01	52661	.. CONTAINER HALF-METAL, REUSABLE, LOWER, ASSY OF USE ONLY ON P4070537 PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 69	P47431	52661	... BOX-ENGINE DATA	1		PAFZZ
- 70	34R01-1-1AA	71286	... RECEPTACLE-TURNLOCK FASTENER, BASE P&WA PART NO. P4015045	44		PAFZZ
- 71	= 9SP-100-R6-11	29666	... RIVET-BLIND, COUNTERSUNK 0.188 DIA X 0.688 IN. GRIP LENGTH (AP) P&WA PART NO. P4030568	2		PAFZZ
	= NAS1399C6A12	80205	... RIVET-BLIND, COUNTERSUNK 0.190 DIA X 0.750 IN. GRIP LENGTH (AP)	2		PAFZZ
	= MS9318-220	96906	... RIVET (AP)	2		PAFZZ
	P4078920	52661	. PACKAGING PARTS-CONSUMABLE, FAN DRIVE TURBINE MODULE	1		PAFZZ
- 72	P53391	52661	.. COVER-FAN DRIVE TURBINE MODULE	1		KF
- 73	P12757	52661	.. CLOSURE-SHIPPING 0.392 OD X 0.269 IN. ID	8		KF
- 74	P8320	52661	.. DESICCANT-16 UNIT, BAGGED	8		KF
- 75	83280	52661	.. SEAL-LEAD, 2 HOLE	3		PADZZ

R


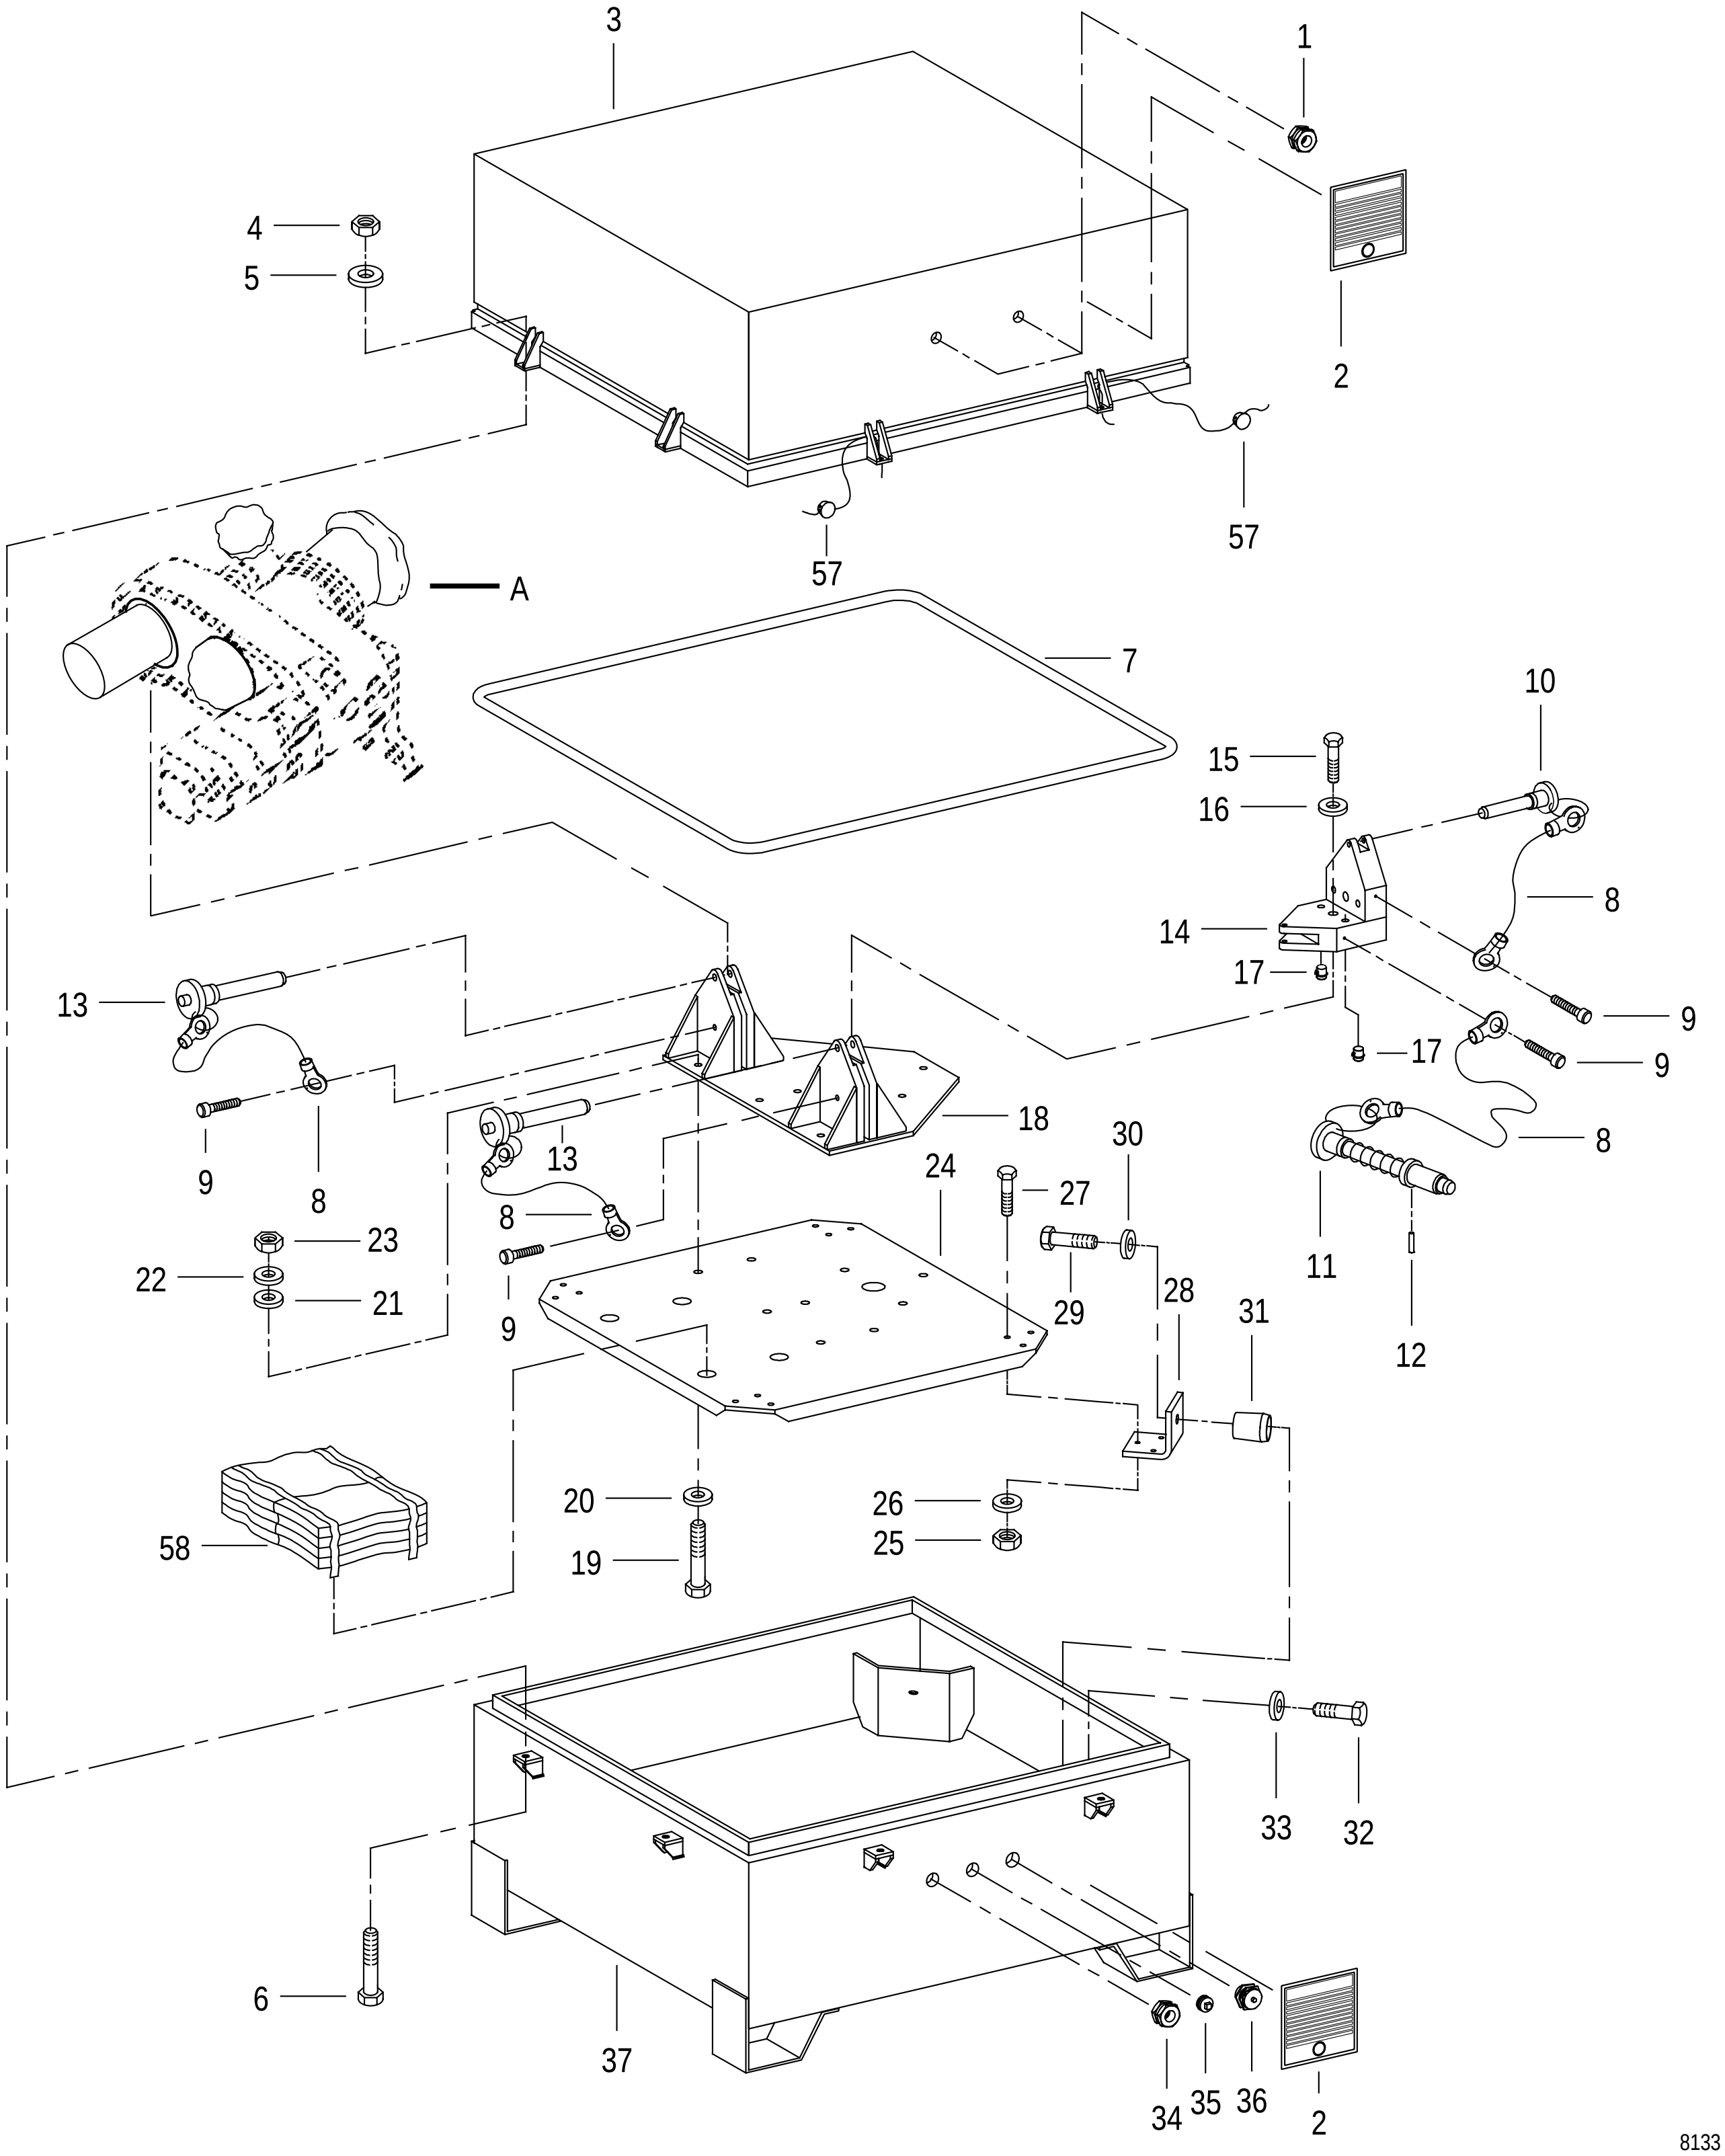


FIGURE 110. GEARBOX MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 1 OF 2)

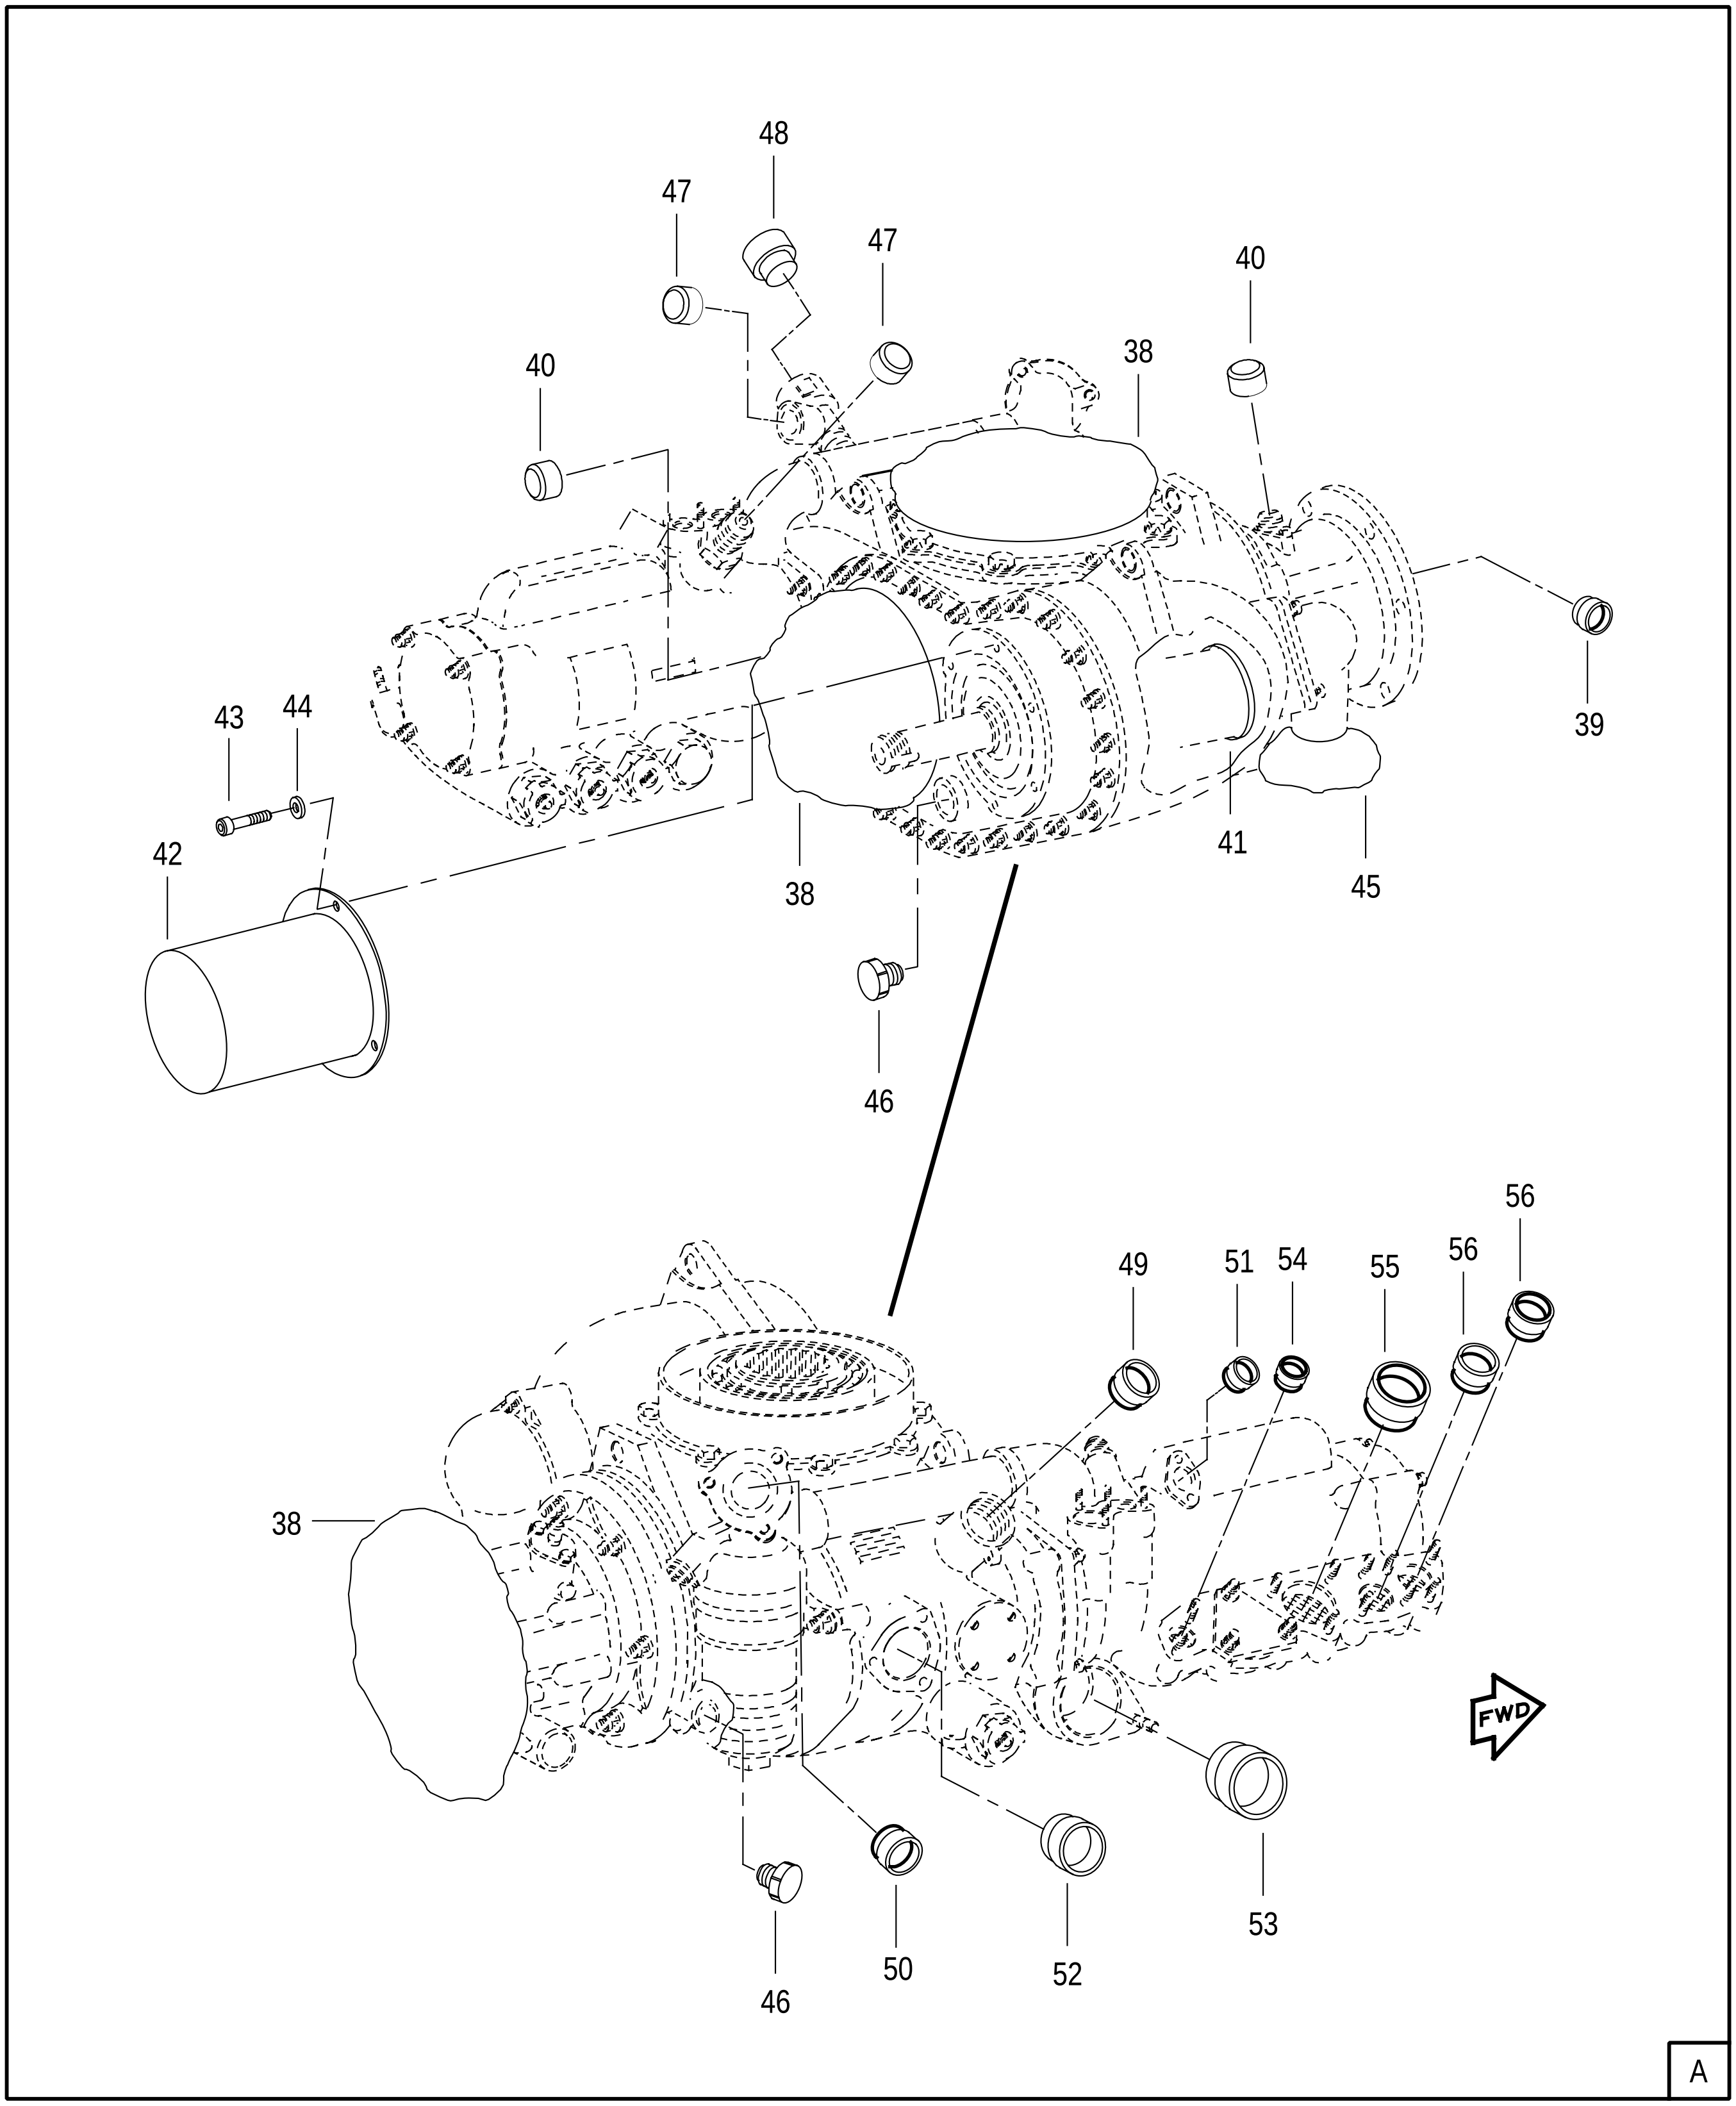

29245

FIGURE 110. GEARBOX MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 2 OF 2)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	110	NO NUMBER		GEARBOX MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS SEE FIG. 1-20 FOR NHA	REF		
		P4070543	52661	. CONTAINER ASSY-GEARBOX MODULE	1		PAFDD
R		P4078971	52661	. CONTAINER ASSY-GEARBOX MODULE	1		PAFDD
R	- 1	TA446-P47412	08992	.. WINDOW-OBSERVATION P&WA PART NO. P47412 REPLACES P4045550 USE ONLY ON P4070543	2		PAFZZ
	- 2	P52715 *	52661	.. PLATE-IDENTIFICATION, SPARE PARTS SHIPPING CONTAINER	2		PAFZZ
R	- 3	P4070543-04	52661	.. CONTAINER-METAL, TOP USE ONLY ON P4070543	1		XA
R R		P4021617-04	52661	.. CONTAINER-METAL, TOP USE ONLY ON P4078971	1		PAFZZ
R	- 4	MS51967-17	96906	.. NUT (AP) USE WITH P4070543	8		PAFZZ
R R		MS51967-8	96906	.. NUT (AP) USE WITH P4078971	8		PAOZZ
	- 5	MS35338-46	96906	.. WASHER (AP)	8		PAFZZ
	- 6	MS90725-60	96906	.. SCREW (AP)	8		PAFZZ
	- 7	P50326	52661	.. PACKING-PREFORMED, CONTAINER	1		PAFZZ
	- 8	L-6-T4-V	84256	.. ROPE-WIRE, SINGLE LEG P&WA PART NO. P48254	4		PAFZZ
	- 9	MS24630-23	96906	.. SCREW (AP)	1		PAFZZ
	- 10	MS17984C415	96906	.. PIN	1		PAFZZ
	- 11	P4021612	52661	.. PIN-ASSY OF, QUICK RELEASE 0.37275 X 1.118 GRIP LENGTH PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
	- 12	MS171432	96906	... PIN	1		PADZZ
	- 13	MS17984C615	96906	.. PIN	2		PAFZZ
	- 14	P4070545	52661	.. BRACKET-DUAL MOUNTING	1		PAFBZ
	- 15	MS35307-417	96906	.. SCREW (AP)	1		PAFZZ
	- 16	MS35338-143	96906	.. WASHER (AP)	1		PAFZZ
	- 17	4046824	52661	.. PIN-SHOULDER, HEADLESS 0.373 AND 0.435 X 0.435	2		PAFZZ
	- 18	P4070543-05	52661	.. BRACKET-ANGLE	1		PAFBZ
	- 19	MS90725-67	96906	.. SCREW (AP)	9		PAFZZ
	- 20	AN970-6	88044	.. WASHER (AP)	9		PAFZZ
	- 21	MS27183-14	96906	.. WASHER (AP)	9		PAFZZ
	- 22	MS35338-46	96906	.. WASHER (AP)	9		PAFZZ
R	- 23	MS51967-17	96906	.. NUT (AP) USE WITH P4070543	9		PAFZZ
R R		MS51967-8	96906	.. NUT (AP) USE WITH P4078971	9		PAOZZ
	- 24	P4070543-03	52661	.. SUPPORT-WOOD	1		PAFBZ
	- 25	MS51967-2	96906	.. NUT (AP)	12		PAFZZ
	- 26	MS35338-44	96906	.. WASHER (AP)	12		PAFZZ
	- 27	MS35752-11	96906	.. BOLT (AP)	12		PAFZZ
R	- 28	P4070543-02	52661	.. BRACKET-ANGLE USE ONLY ON P4070543	4		PAFZZ
R R		P4021617-02	52661	.. BRACKET-ANGLE USE ONLY ON P4078971	4		PAFBZ
	- 29	MS90725-107	96906	.. SCREW (AP)	1		PAFZZ
	- 30	MS35338-48	96906	.. WASHER (AP)	1		PAFZZ
R	- 31	C537-25F2	71985	.. MOUNT-RESILIENT P&WA PART NO. P4070547 REPLACES P48253 USE ONLY ON P4070543	4		PAFZZ
R R R		J-3424-108	76005	.. MOUNT-RESILIENT P&WA PART NO. P48253 USE ONLY ON P4078971	4		PAFZZ
	- 32	MS90725	96906	.. SCREW (AP)	1		PAFZZ
	- 33	MS35338-48	96906	.. WASHER (AP)	1		PAFZZ

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	110 - 34		TA346-P50844	08992	.. INDICATOR-HUMIDITY, PLUG . . . . P&WA PART NO. P50844	1		PAFZZ
R	- 35		MS20913-1J	96906	.. PLUG . . . . USE ONLY ON P4070543	1		PAFZZ
	- 36		TA330-25-10-R	08992	.. VALVE-AIR PRESSURE RELIEF, CONTAINER . . . . . . P&WA PART NO. P37145	1		PAFZZ
R	- 37		P4070543-01	52661	.. CONTAINER-METAL, BASE . . . . USE ONLY ON P4070543	1		XA
R R			P4021617-01	52661	.. CONTAINER-METAL, BASE . . . . USE ONLY ON P4078971	1		XA
			P4021630	52661	. PACKAGING PARTS-CONSUMABLE, GEARBOX . . . . MODULE	1		PAFZZ
	- 38		P11040	52661	.. COVER-AIR BLEED VALVE SHIPPING	3		PAOZZ
	- 39		P6616-A	52661	.. PLUG-CLOSURE 0.500-20-3A	1		KF
	- 40	=	CD-4	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL . . P&WA PART NO. P4021568-01	2		KF
		=	M-312	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL . . P&WA PART NO. P4021568-01	2		KF
	- 41		P12784	52661	.. CLOSURE-SHIPPING . . . . 2.602 OD X 2.333 IN. ID X 1.275 IN. DEEP	1		KF
	- 42		P61218	52661	.. COVER-MAIN GEARBOX	1		KF
	- 43		MS9146-06	96906	.. BOLT (AP)	3		KF
	- 44		MS9320-09	96906	.. WASHER (AP)	3		PAFZZ
	- 45		P14592	52661	.. COVER-PLASTIC . . . . 5.500 IN. DIA	1		KF
	- 46	=	PD-40	99017	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL . 0.4375-20UNJF-3A X 0.850 IN. LONG P&WA PART NO. P4021572-01	2		KF
		=	807	7G949	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL . 0.4375-20UNJF-3A X 0.850 IN. LONG P&WA PART NO. P4021572-01	2		KF
	- 47	=	CD-10	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL . . 0.875-14UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-03	2		KF
		=	M-330	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL . . 0.875-14UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-03	2		KF
	- 48		P42379	52661	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL .	1		KF
	- 49		P12772	52661	.. CLOSURE-SHIPPING	1		
	- 50		P12768	52661	.. CLOSURE-PLASTIC	1		KF
	- 51		P12767	52661	.. CLOSURE-SHIPPING, PLASTIC	1		KF
	- 52		P42381	52661	.. CAP-PLUG, PROTECTIVE, DUST AND MOISTURE . SEAL	1		KF
	- 53		P12777	52661	.. CLOSURE-SHIPPING	1		KF
	- 54		RP-9	23540	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL . P&WA PART NO. P4045524-06	1		KF
	- 55		P31108	52661	.. PLUG-PROTECTIVE	1		KF
	- 56		P10550	52661	.. CAP-SHIPPING CLOSURE	2		KF
	- 57		83280	52661	.. SEAL-LEAD, 2 HOLE	2		PADZZ
	- 58		P8320	52661	.. DESICCANT-16 UNIT, BAGGED	6		KF
	- 59	<	P24048	52661	.. TAPE-PRESSURE SENSITIVE ADHESIVE . . . . 0.500 IN. WIDE	AR		PAOZZ

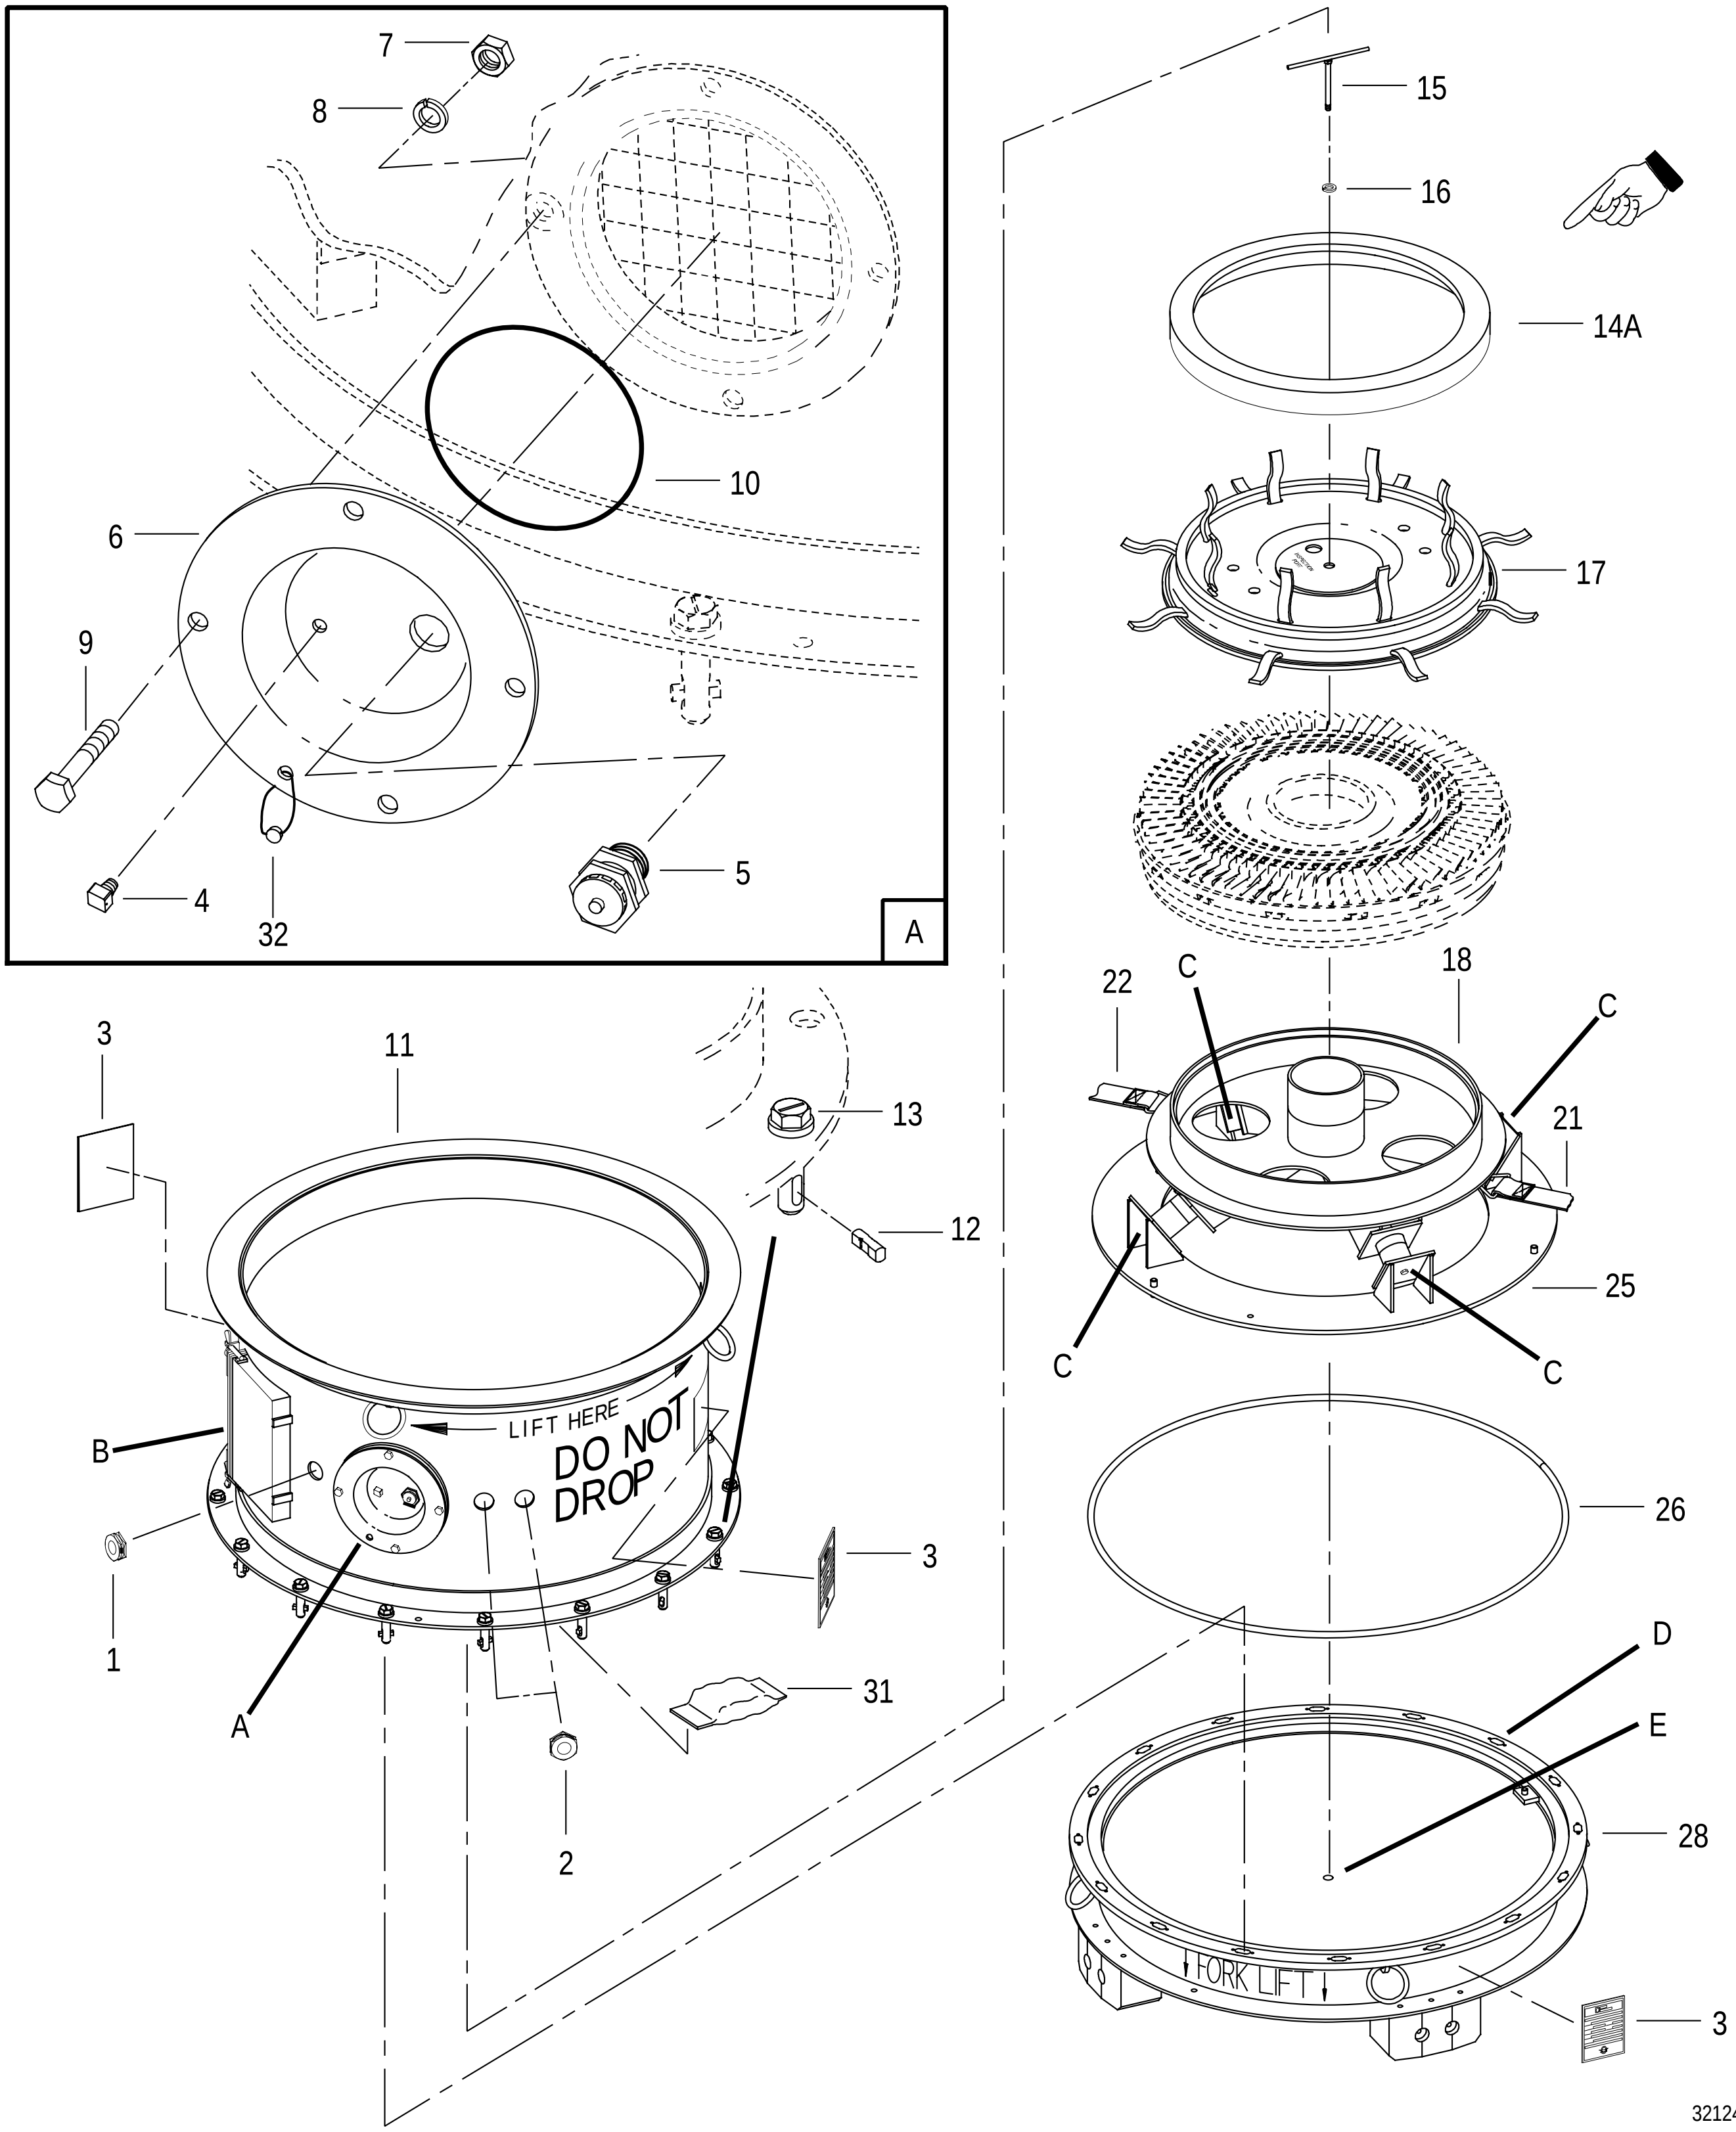


FIGURE 111. REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR CONTAINER ASSY
AND CONSUMABLE PACKAGING PARTS
(SHEET 1 OF 2)

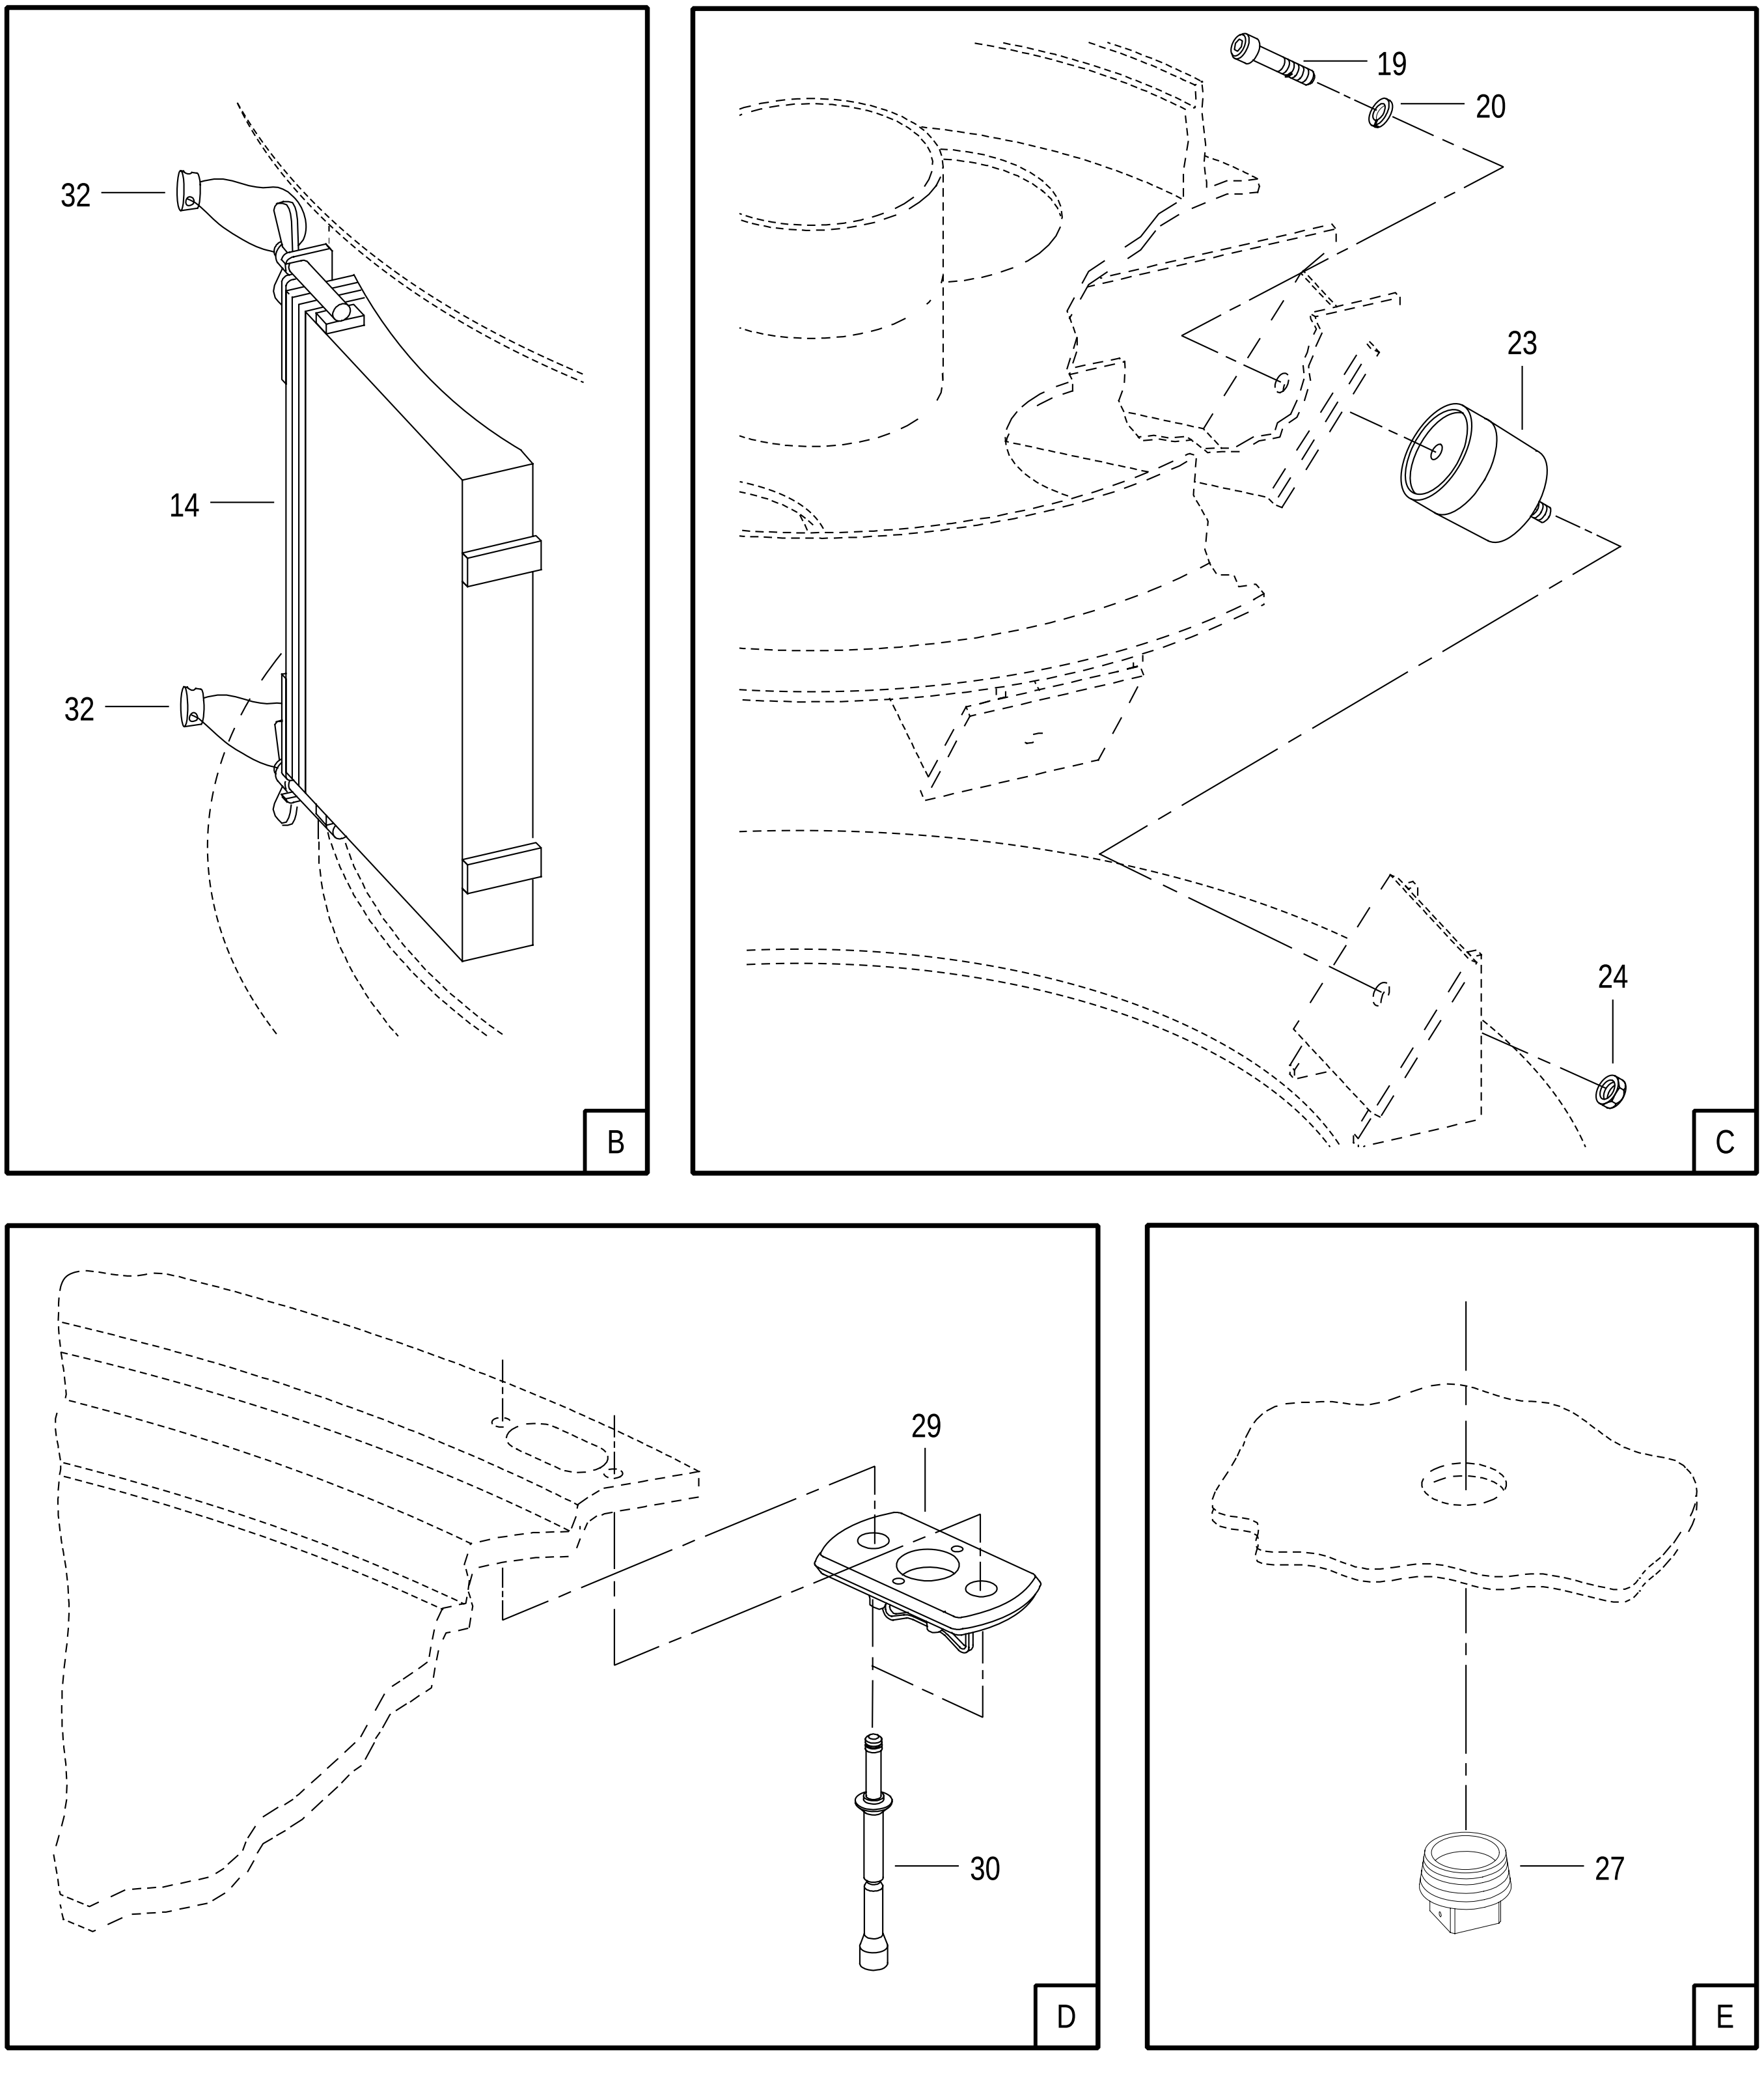


FIGURE 111. REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 2 OF 2)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
111	NO NUMBER		REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS SEE FIG. 1-21 FOR NHA	REF		
	P4070548	52661	. CONTAINER ASSY-REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR	1	NZ/PB/PD/ RQ/RS/ RU	PAFDD
	P4070592	52661	. CONTAINER ASSY-REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR	1	PA/PC/PE/ RR/RT/ RV	PAFDD
- 1	TA346-P50844	08992	.. INDICATOR-HUMIDITY, PLUG P&WA PART NO. P50844	1		PAFZZ
- 2	TA446-P47412	08992	.. WINDOW-OBSERVATION P&WA PART NO. P47412	2		PAFZZ
- 3	P52715 *	52661	.. PLATE-IDENTIFICATION, SPARE PARTS SHIPPING CONTAINER	2		PAFZZ
- 4	MS20913-1S	96906	.. PLUG	1		PAFZZ
- 5	TA330-25-10-R	08992	.. VALVE-AIR PRESSURE RELIEF, CONTAINER P&WA PART NO. P37145	1		PAFZZ
- 6	P49212	52661	.. COVER-ROTOR AND STATOR CONTAINER	1		PAFZZ
- 7	MS51967-8	96906	.. NUT (AP)	4		PAOZZ
- 8	MS35338-46	96906	.. WASHER (AP)	4		PAFZZ
- 9	MS90725-60	96906	.. SCREW (AP)	4		PAFZZ
- 10	MS29561-437	96906	.. PACKING	1		PAFZZ
- 11	P4070548-01	52661	.. COVER-REUSABLE METAL CONTAINER, ASSY OF USE ONLY ON P407058	1		PAFDD
	P4070592-01	52661	.. COVER-REUSABLE METAL CONTAINER, ASSY OF USE ONLY ON P4070592 PARTIAL BREAKDOWN FOLLOWS	1		PAFDD
- 12	34S02-1-1AA	71286	... PIN-TURNLOCK FASTENER STUD P&WA PART NO. P4015046	16		PAFZZ
- 13	34S01-3-1AA	71286	... STUD-TURNLOCK FASTENER P&WA PART NO. P486910	16		PAFZZ
- 14	P47413	52661	... BOX-ENGINE DATA	1		PAFZZ
- 14A	P4078808	52661	.. ADAPTER-SUPPORT USE ONLY ON P4070592	1		PAFZZ
- 15	P4078910	52661	.. BOLT, ASSY OF	1		PAFZZ
- 16	MS35338-46	96906	.. WASHER	1		PAFZZ
- 17	P4078906-01	52661	.. COVER ASSY	1		PAFZZ
- 18	P4070548-04	52661	.. SUPPORT-REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR, UPPER USE ONLY ON P4070548	1		PAFDD
	P4070592-04	52661	.. SUPPORT-REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR, UPPER USE ONLY ON P4070592	1		PAFDD
- 19	MS90726-108	96906	.. SCREW (AP)	4		PAFZZ
- 20	MS35338-48	96906	.. WASHER (AP) PARTIAL BREAKDOWN FOLLOWS	4		PAFZZ
- 21	48172-10	0BND2	... STRAP ASSY P&WA PART NO. P4078859	1		PAFZZ
- 22	48171-10	0BND2	... STRAP ASSY P&WA PART NO. P4078866	1		PAFZZ
- 23	C538-188F3	9G112	.. MOUNT-RESILIENT P&WA PART NO. P4070590 REPLACES P48741	4		PAFZZ
- 24	MS51922-33	96906	.. NUT (AP)	1		PAFZZ
- 25	P4070548-03	52661	.. SUPPORT-REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR, LOWER USE ONLY ON P4070548	1		PAFZZ

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
111 - 25	P4070592-03	52661	.. SUPPORT-REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR, LOWER USE ONLY ON P4070592	1		PAFZZ
- 26	P48745	52661	.. PACKING-PREFORMED	1		PAFZZ
- 27	MS20913-6S	96906	.. PLUG	1		PAFZZ
- 28	P4070548-02	52661	.. BASE-REUSABLE METAL CONTAINER, ASSY OF . . USE ONLY ON P4070548	1		PAFDD
	P4070592-02	52661	.. BASE-REUSABLE METAL CONTAINER, ASSY OF . . USE ONLY ON P4070592	1		PAFDD
- 29	34R01-1-1AA	71286	... RECEPTACLE-TURNLOCK FASTENER, BASE . . . . . P&WA PART NO. P4015045	16		PAFZZ
- 30	= 9SP-100-R6-13	29666	... RIVET-SOLID, COUNTERSUNK . . . . 0.188 DIA X 0.812 GRIP LENGTH (AP) P&WA PART NO. P52086	2		PAFZZ
	= MS9318-220	96906	... RIVET (AP)	2		PAFZZ
	P4078919	52661	. PACKAGING PARTS-CONSUMABLE, ROTOR AND . . STATOR ASSY	1		PAFZZ
- 31	P8320	52661	.. DESICCANT-16 UNIT, BAGGED	1		KF
- 32	83280	52661	.. SEAL-LEAD, 2 HOLE	3		PADZZ

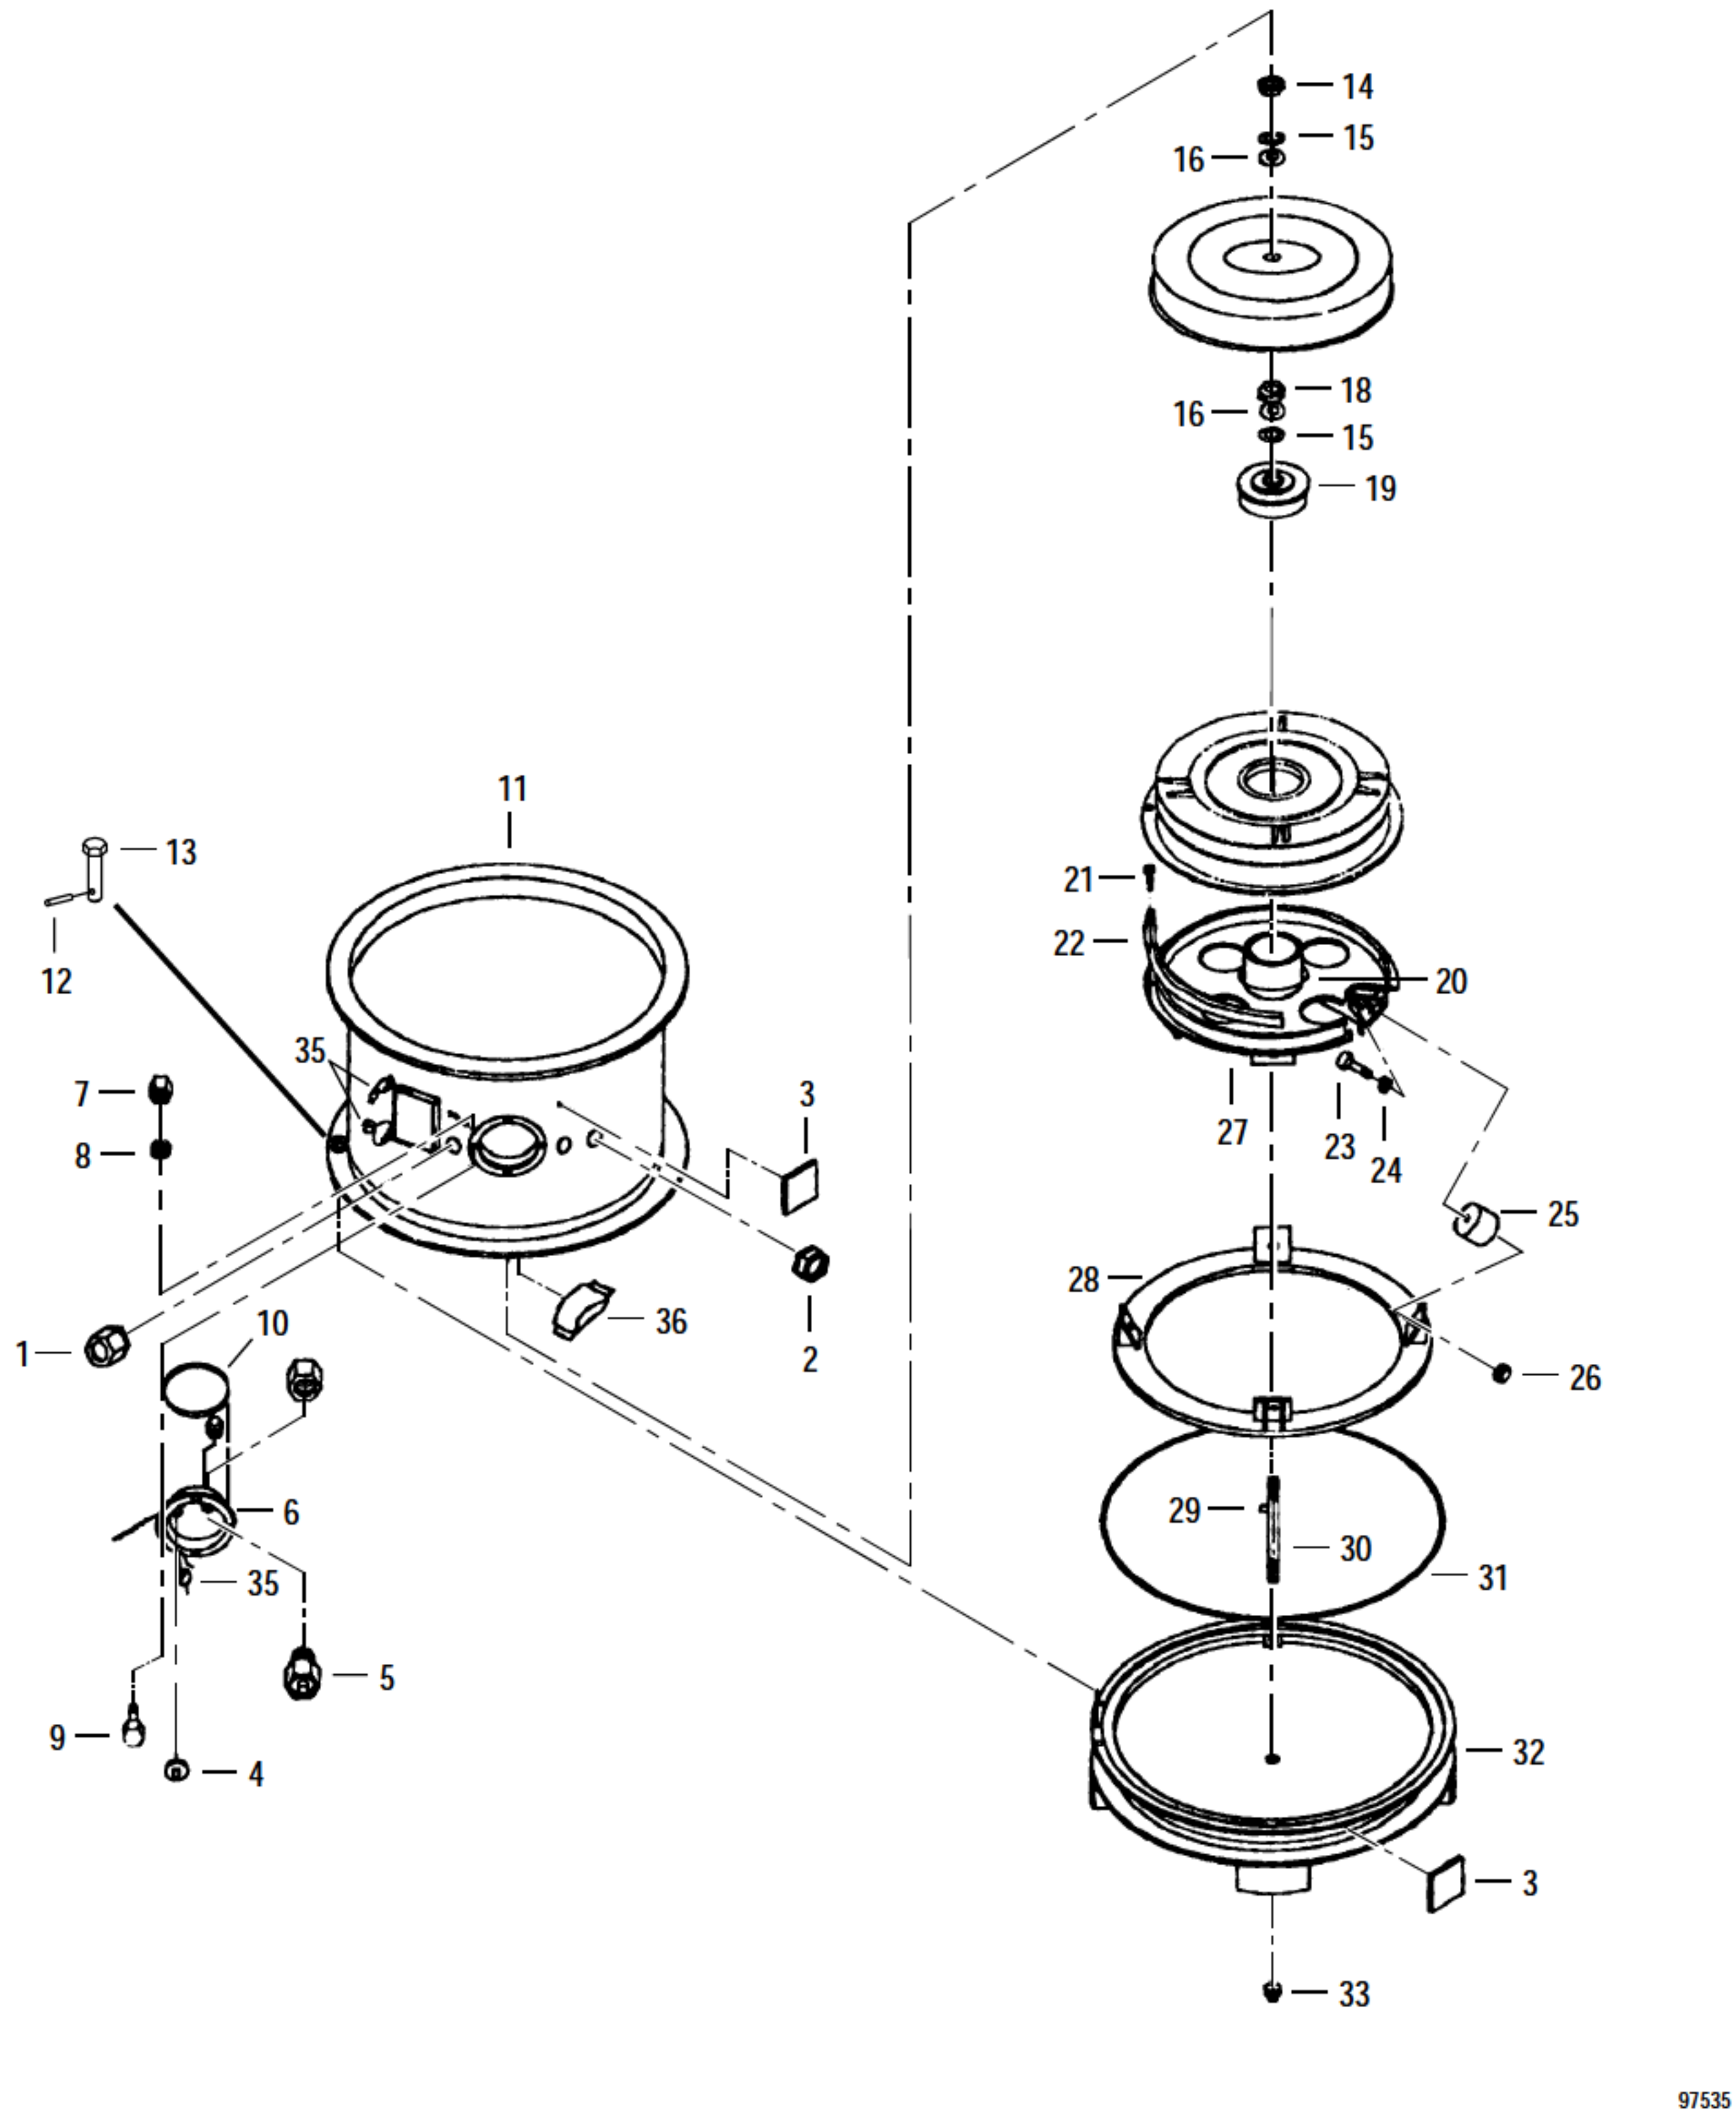


FIGURE 111A. REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	111A		NO NUMBER		REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS SEE FIG. 1-21 FOR NHA	REF		
R			P4078844	52661	. CONTAINER ASSY-REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR	1		PAFDD
	- 1		TA346-P50844	08992	.. INDICATOR-HUMIDITY, PLUG P&WA PART NO. P50844	1		PAFZZ
	- 2		TA446-P47412	08992	.. WINDOW-OBSERVATION P&WA PART NO. P47412	2		PAFZZ
	- 3		P52715	52661	.. PLATE-IDENTIFICATION, SPARE PARTS SHIPPING CONTAINER	2		PAFZZ
	- 4		MS20913-1S	96906	.. PLUG	1		PAFZZ
	- 5		TA330-25-10-R	08992	.. VALVE-AIR PRESSURE RELIEF, CONTAINER P&WA PART NO. P37145	1		PAFZZ
	- 6		P49212	52661	.. COVER-ROTOR AND STATOR CONTAINER	1		PAFZZ
	- 7		MS51967-8	96906	.. NUT	4		PAOZZ
	- 8		MS35338-46	96906	.. WASHER	4		PAFZZ
	- 9		MS90725-60	96906	.. SCREW	4		PAFZZ
	- 10		MS29561-437	96906	.. PACKING	1		PAFZZ
	- 11		P52799	52661	.. COVER-REUSABLE METAL CONTAINER	1		PAFDD
	- 12	=	34S02-1-1AA	71286	... PIN-TURNLOCK FASTENER STUD P&WA PART NO. P4015046	52		PAFZZ
		=	1134700	60119	... PIN-TURNLOCK FASTENER STUD P&WA PART NO. P4015046	52		PAFZZ
	- 13	=	34S01-3-1AA	71286	... STUD-TURNLOCK FASTENER P&WA PART NO. P48690	52		PAFZZ
		=	1134000-3	60119	... STUD-TURNLOCK FASTENER P&WA PART NO. P48690	52		PAFZZ
	- 14		MS51972-8	96906	.. NUT	1		PAFZZ
	- 15		MS35338-146	96906	.. WASHER	2		PAFZZ
	- 16		MS15795-822	96906	.. WASHER	2		PAFZZ
R	- 17		P4078944	52661	.. COVER	1		XB
	- 18		AN315-C12R	88044	.. NUT	1		PAFZZ
	- 19		P4078942	52661	.. PLUG-TURBINE DISK	1		PAFZZ
	- 20		P4078946	52661	.. SPACER	1		PAFZZ
	- 21		P4078941	52661	.. SCREW-CAP, SOCKET HD	12		PAFZZ
	- 22		P4078945	52661	.. ADAPTER-RING	4		PAFZZ
	- 23		MS90726-108	96906	.. SCREW	4		PAFZZ
	- 24		MS35338-48	96906	.. WASHER	4		PAFZZ
	- 25		C538-188F3	71985	.. MOUNT-RESILIENT P&WA PART NO. P4070590	4		PAFZZ
	- 26		MS51922-33	96906	.. NUT	4		PAFZZ
R	- 27		P4078847	52661	.. SUPPORT-REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR, UPPER	1		XB
R	- 28		P4078970	52661	.. SUPPORT-REAR COMPRESSOR DRIVE TURBINE ROTOR AND STATOR, LOWER	1		XB
	- 29		MS16655-641	96906	.. PIN	1		PAFZZ
	- 30		P4078943	52661	.. TIEROD	1		PAFZZ
	- 31		P48745	52661	.. PACKING-PREFORMED	1		PAFZZ
	- 32		P52798	52661	.. BASE-ASSY OF, REUSABLE METAL CONTAINER	1		PAFFF
	- 33		MS20913-6S	96906	.. PLUG	1		PAFZZ
	- 34	<	P4021593	52661	. CONSUMABLE PACKAGING PARTS-REAR COMPRESSOR DRIVE TURBINE	1		
	- 35		83280	52661	.. SEAL-LEAD, 2 HOLE	3		PADZZ
	- 36		P8320	52661	.. DESICCANT-16 UNIT, BAGGED	1		KF

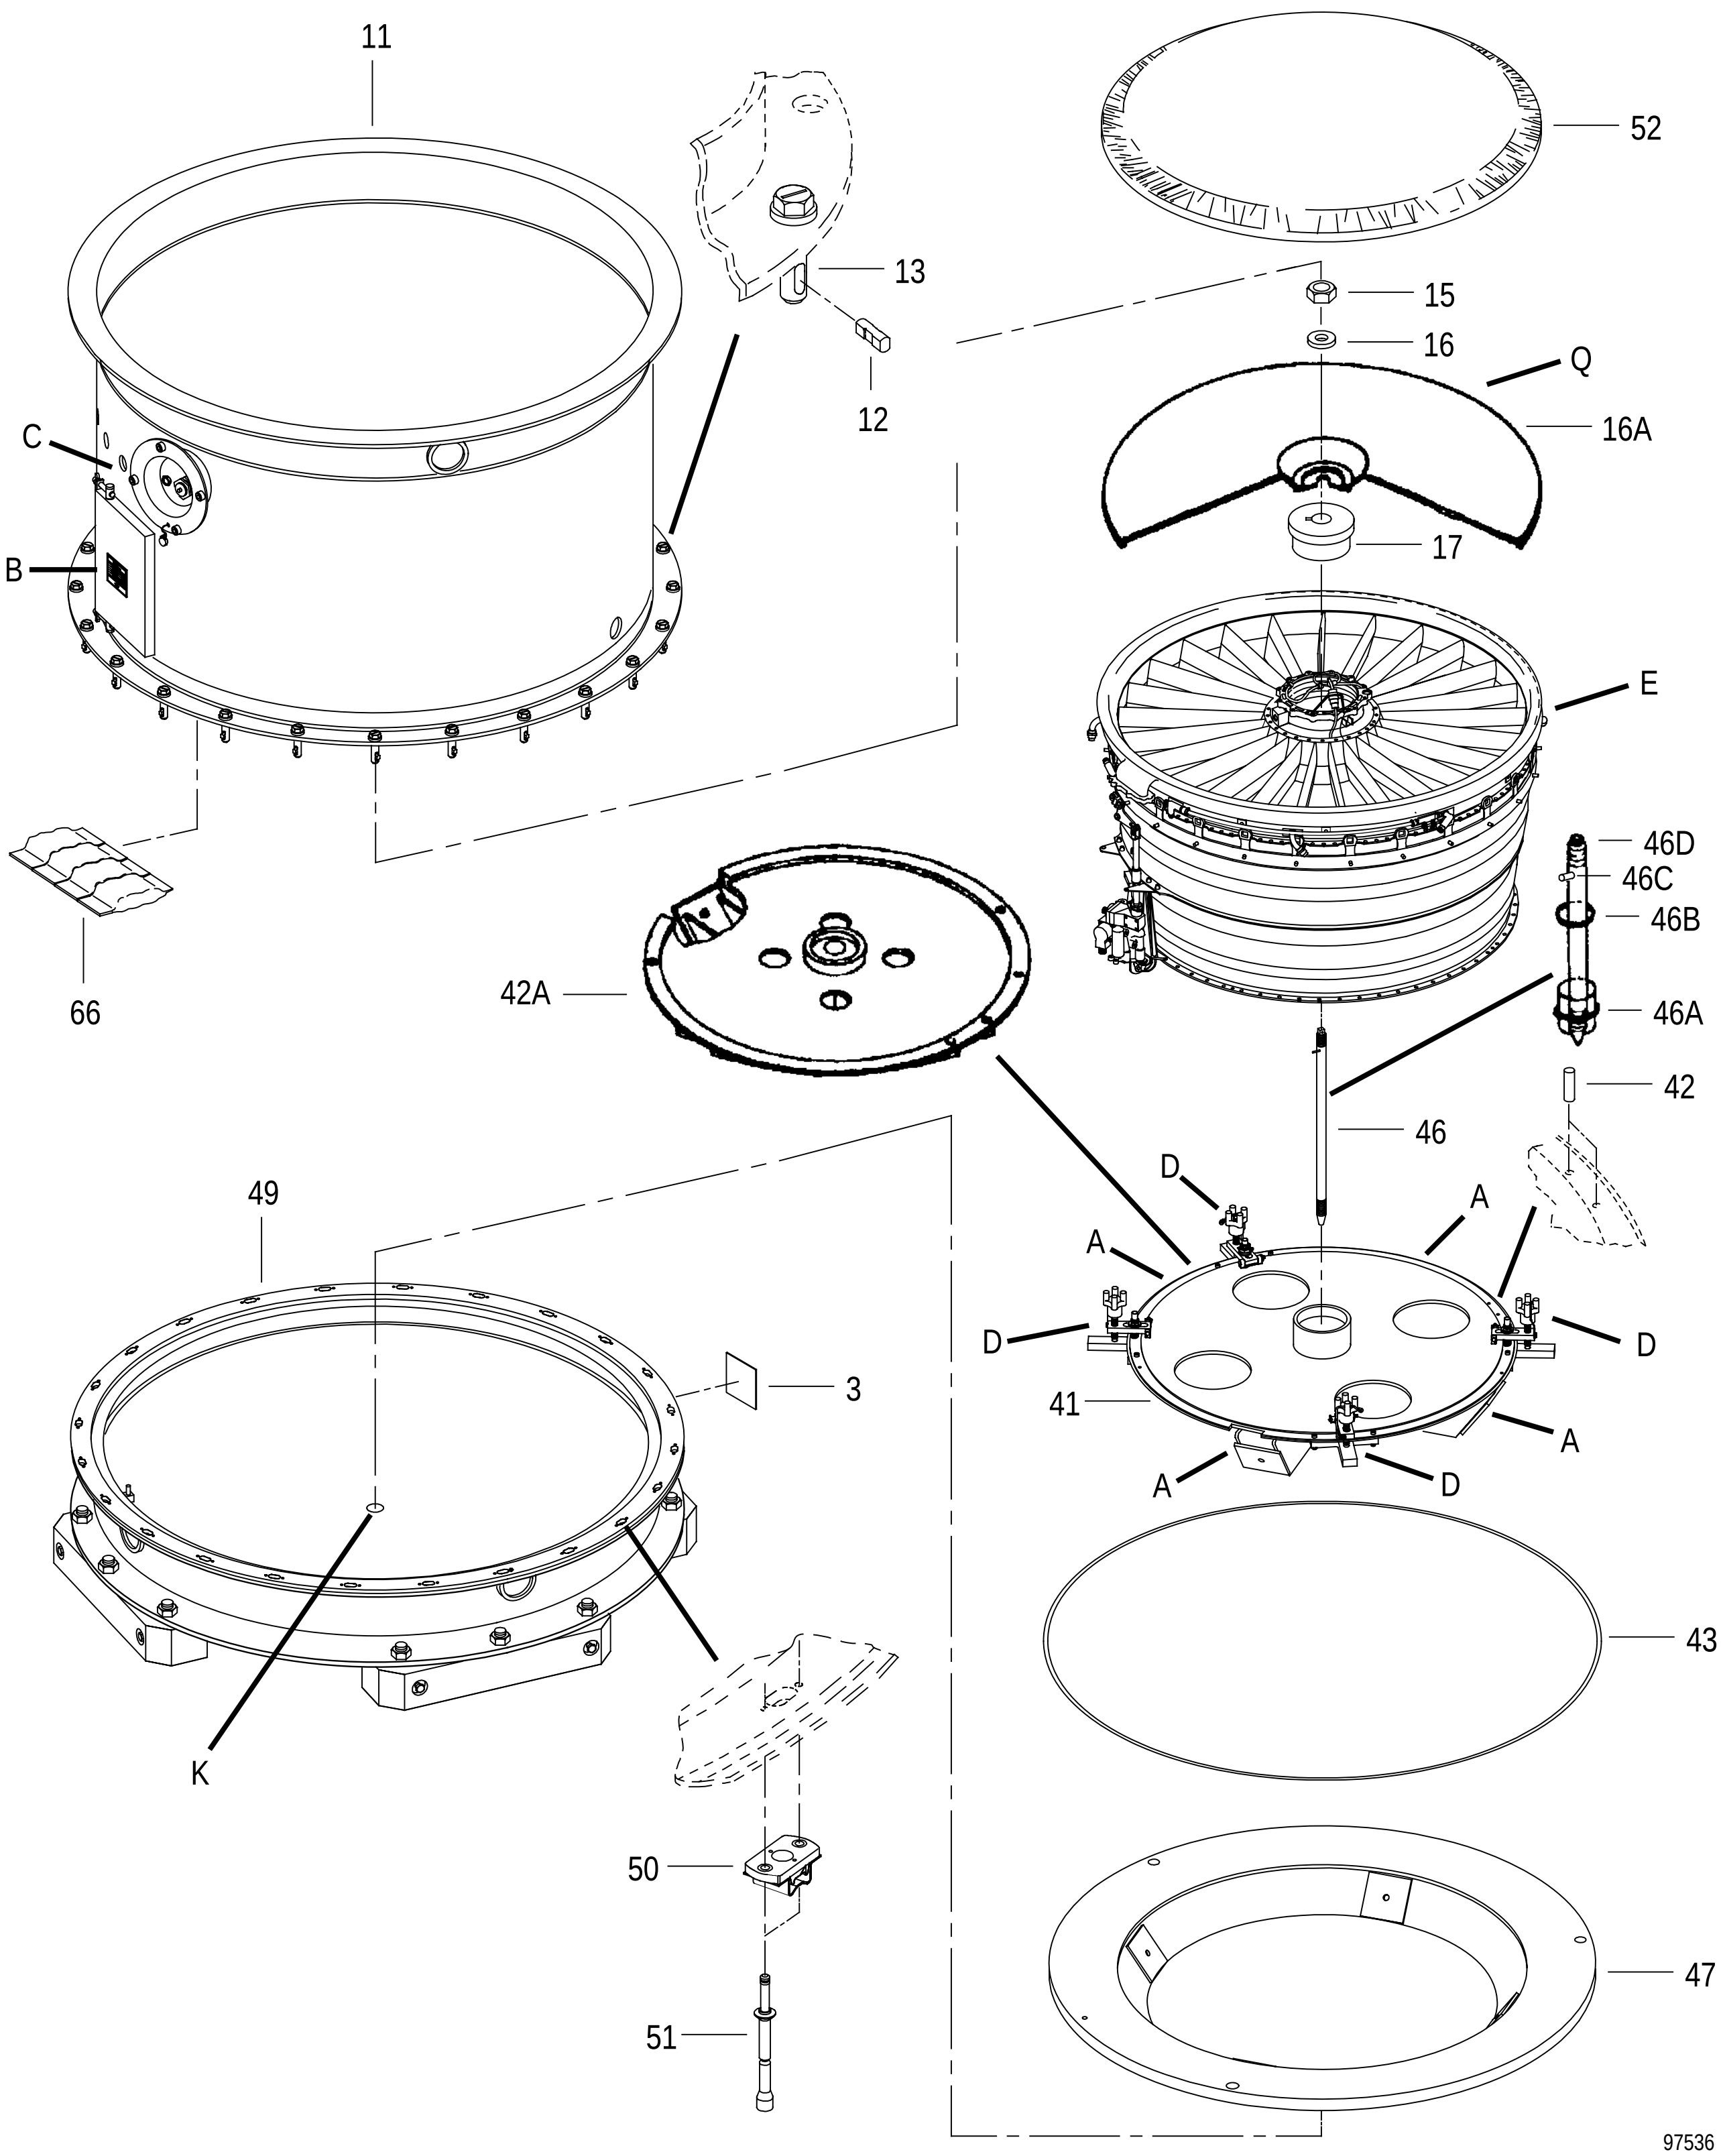


FIGURE 112. INLET/FAN MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 1 OF 6)

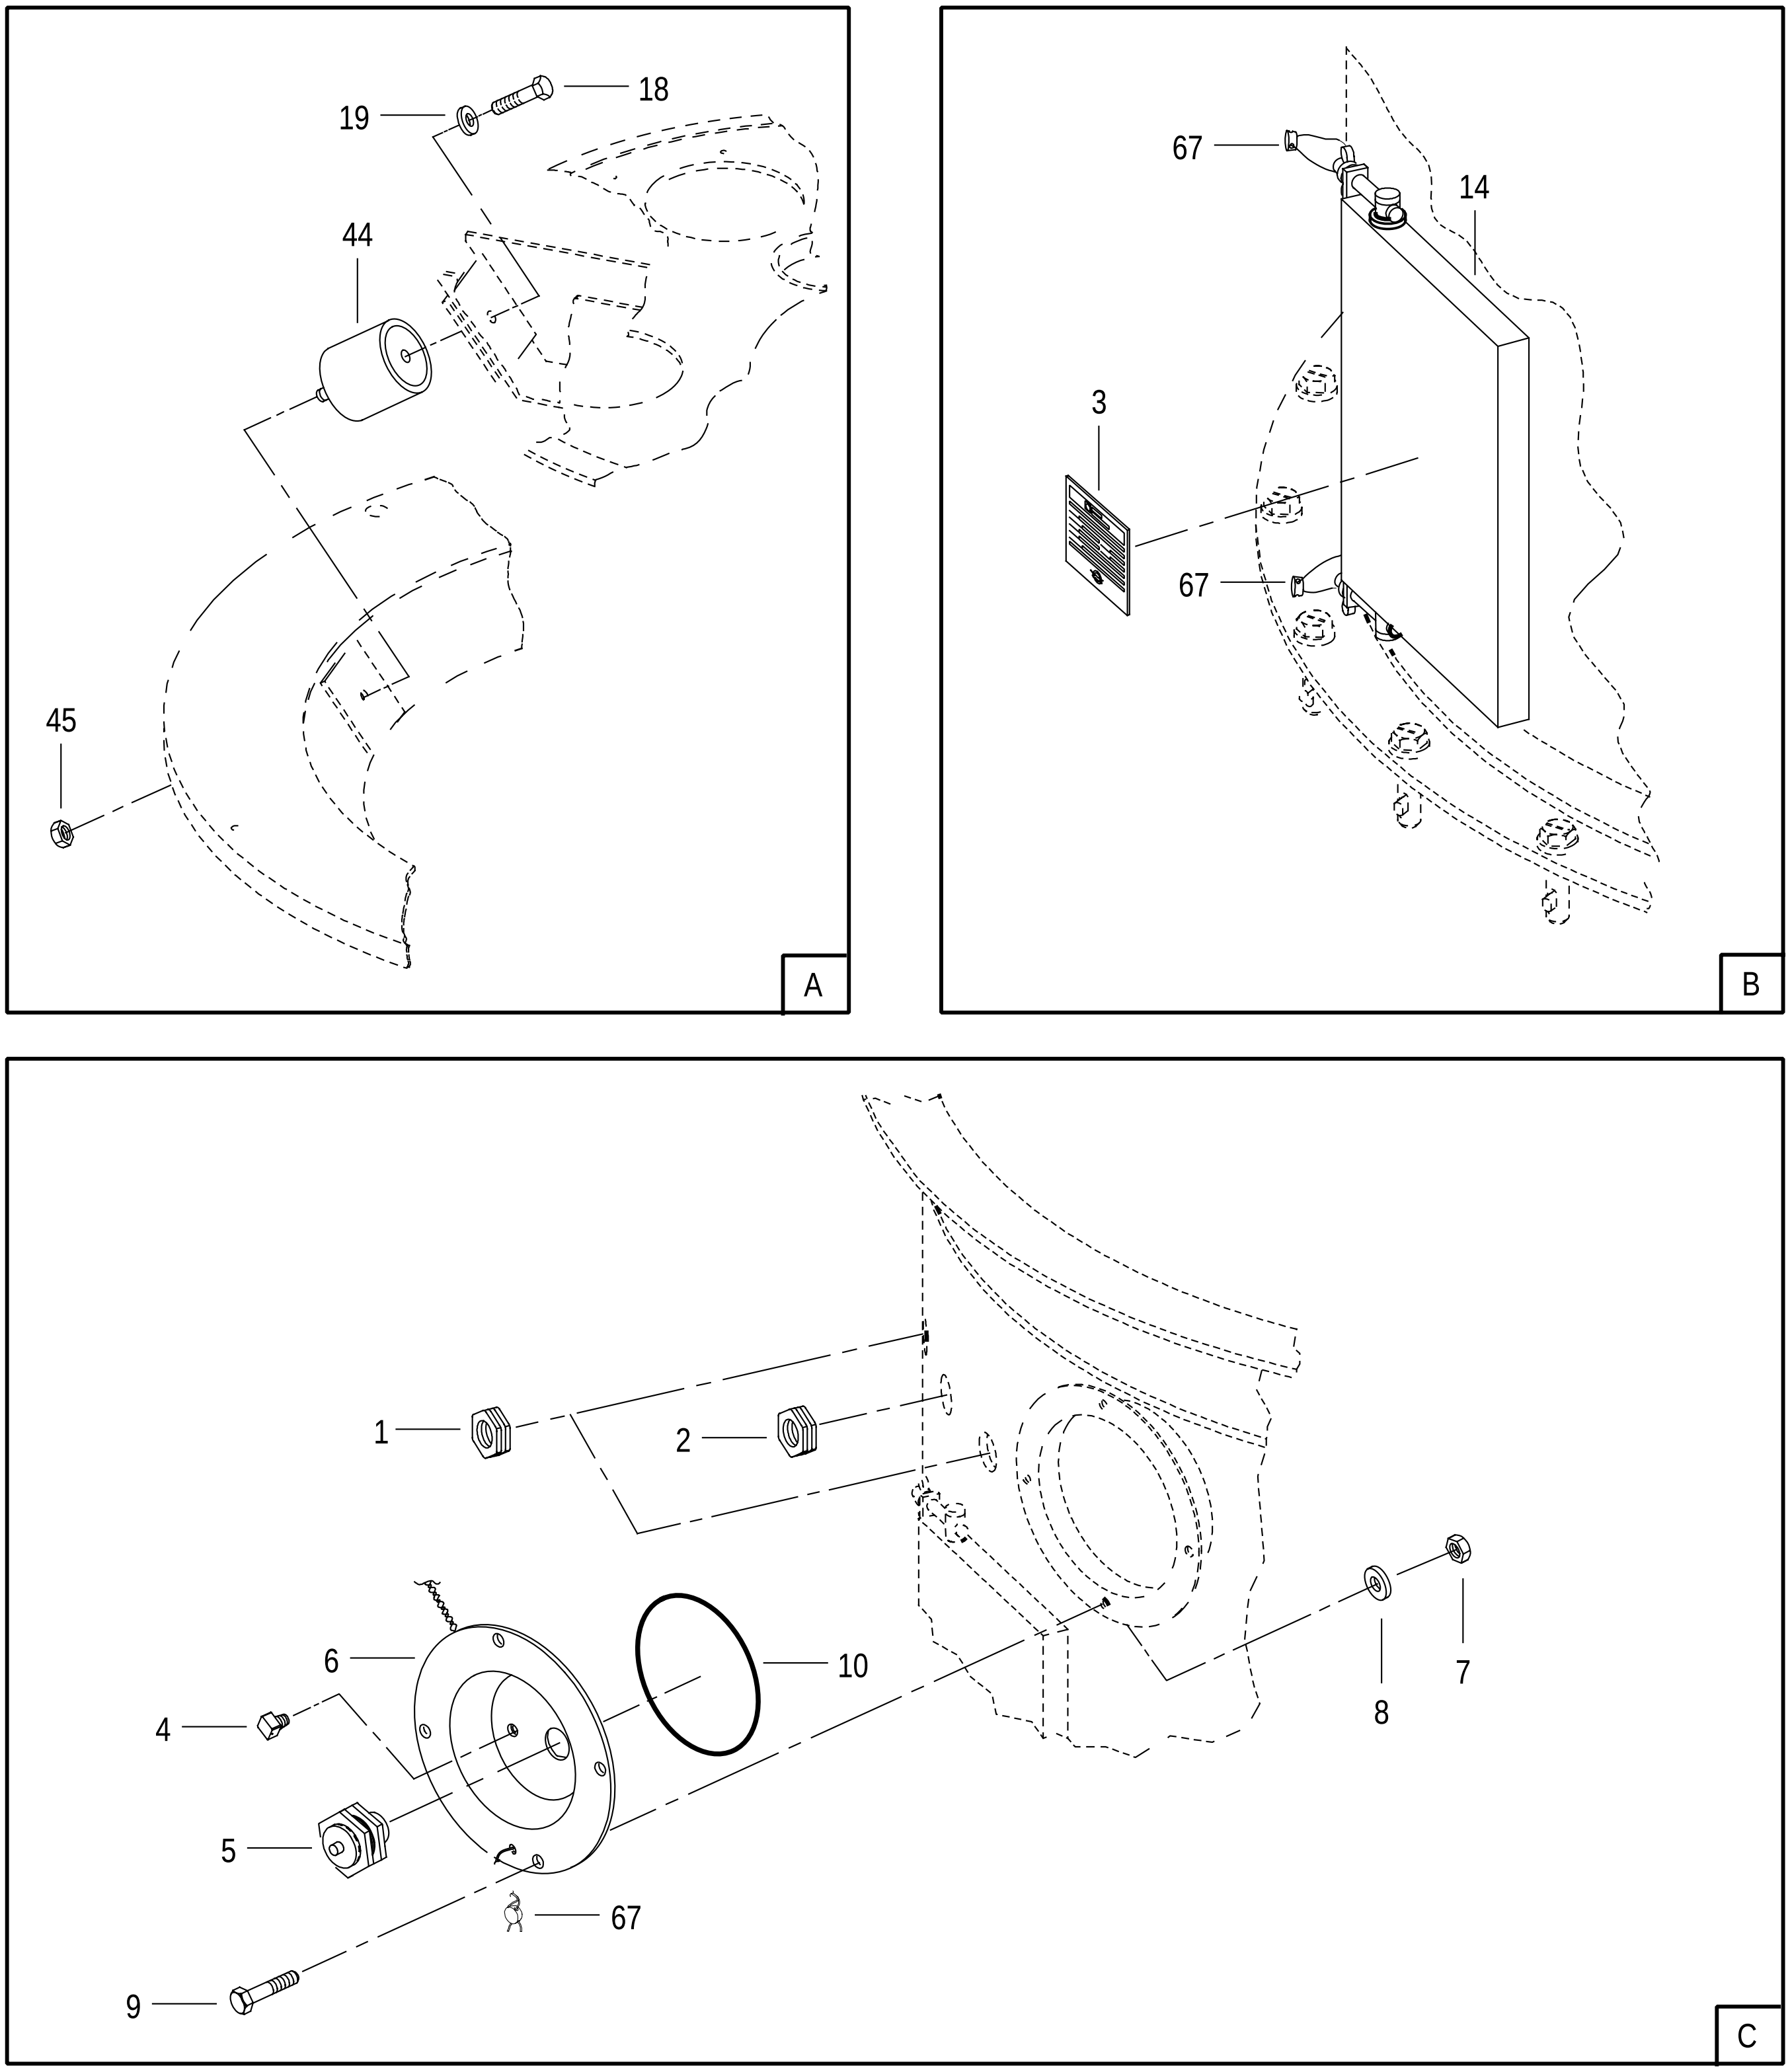
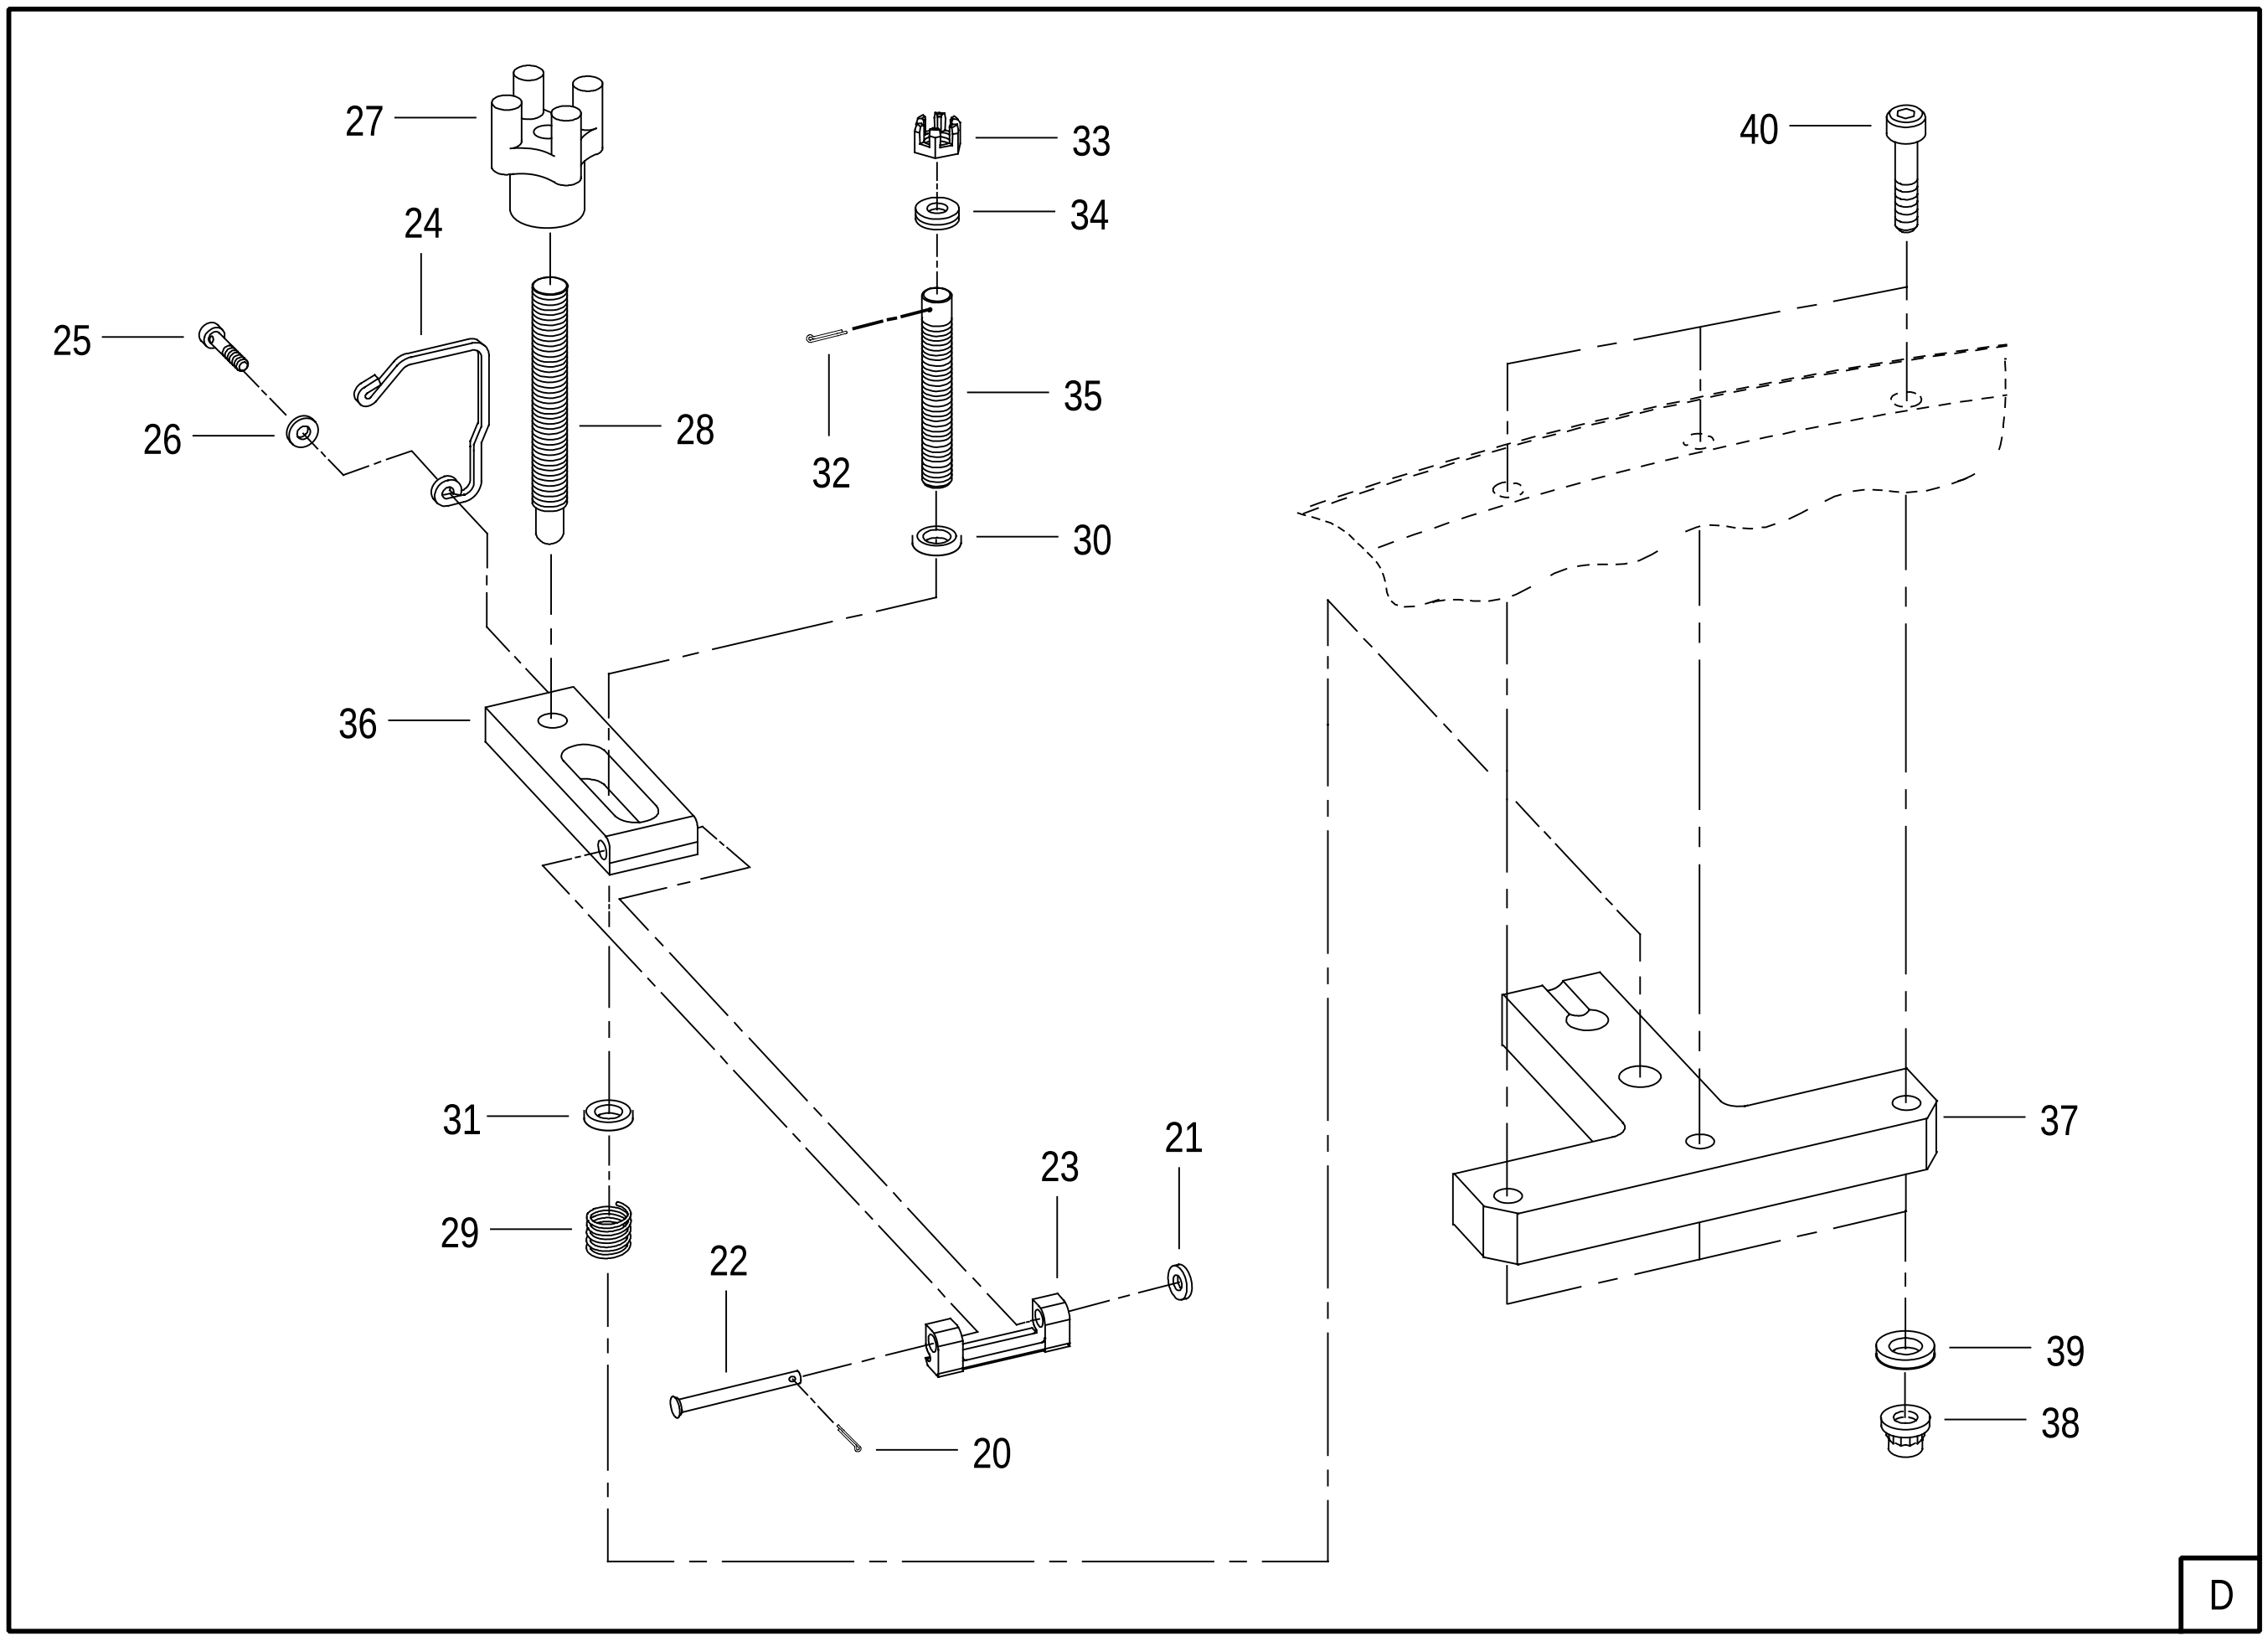


FIGURE 112. INLET/FAN MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 2 OF 6)




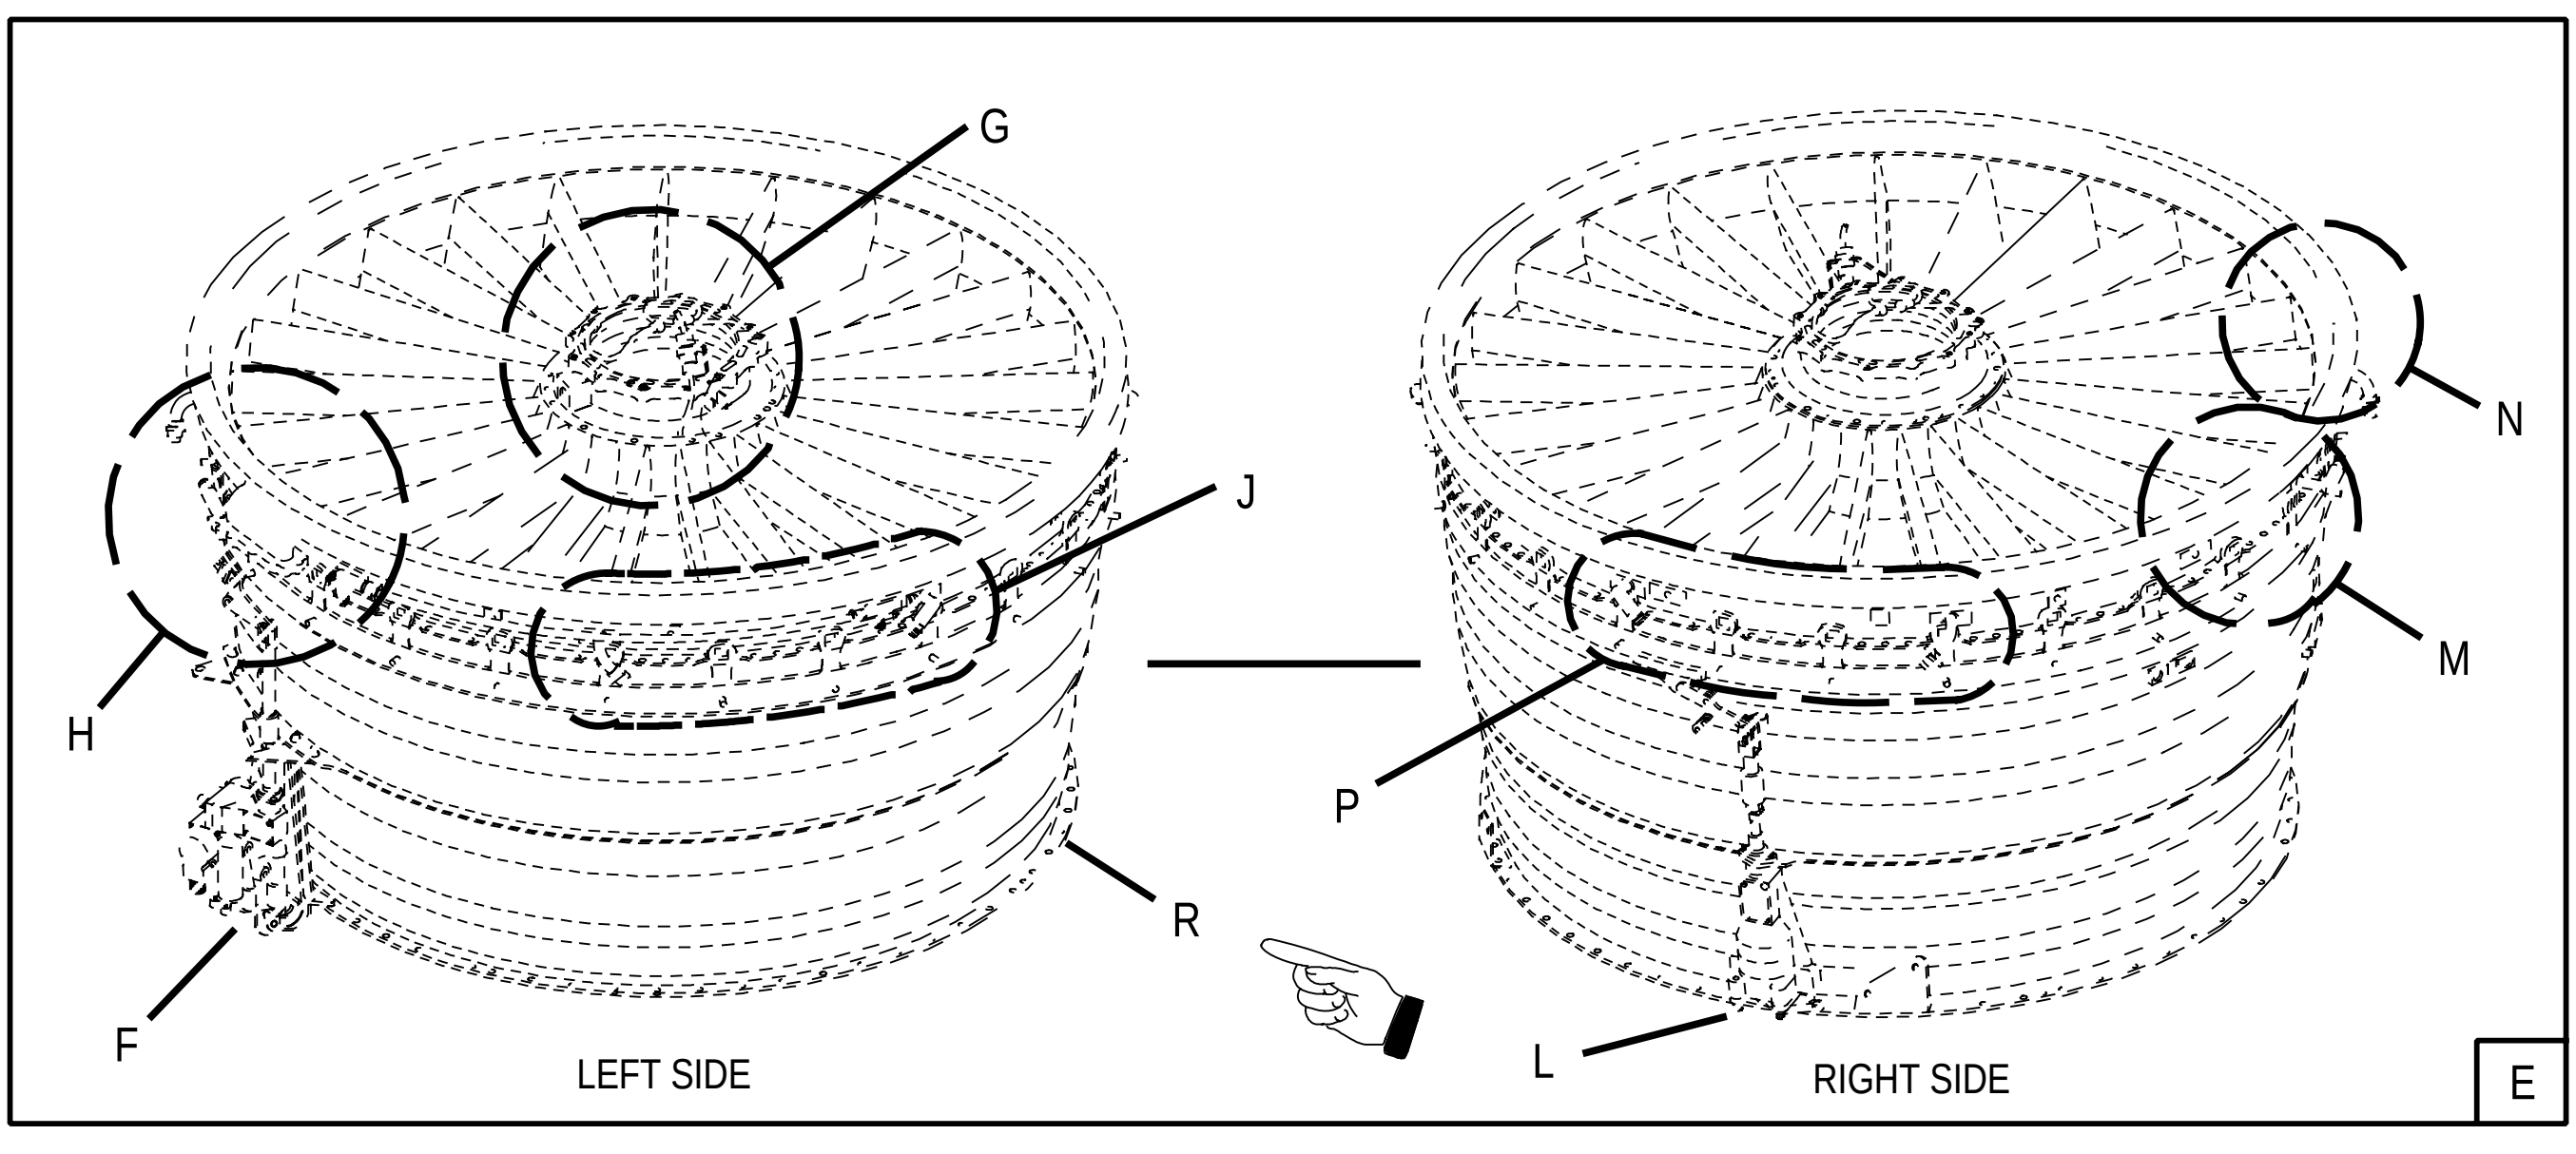


FIGURE 112. INLET/FAN MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 3 OF 6)

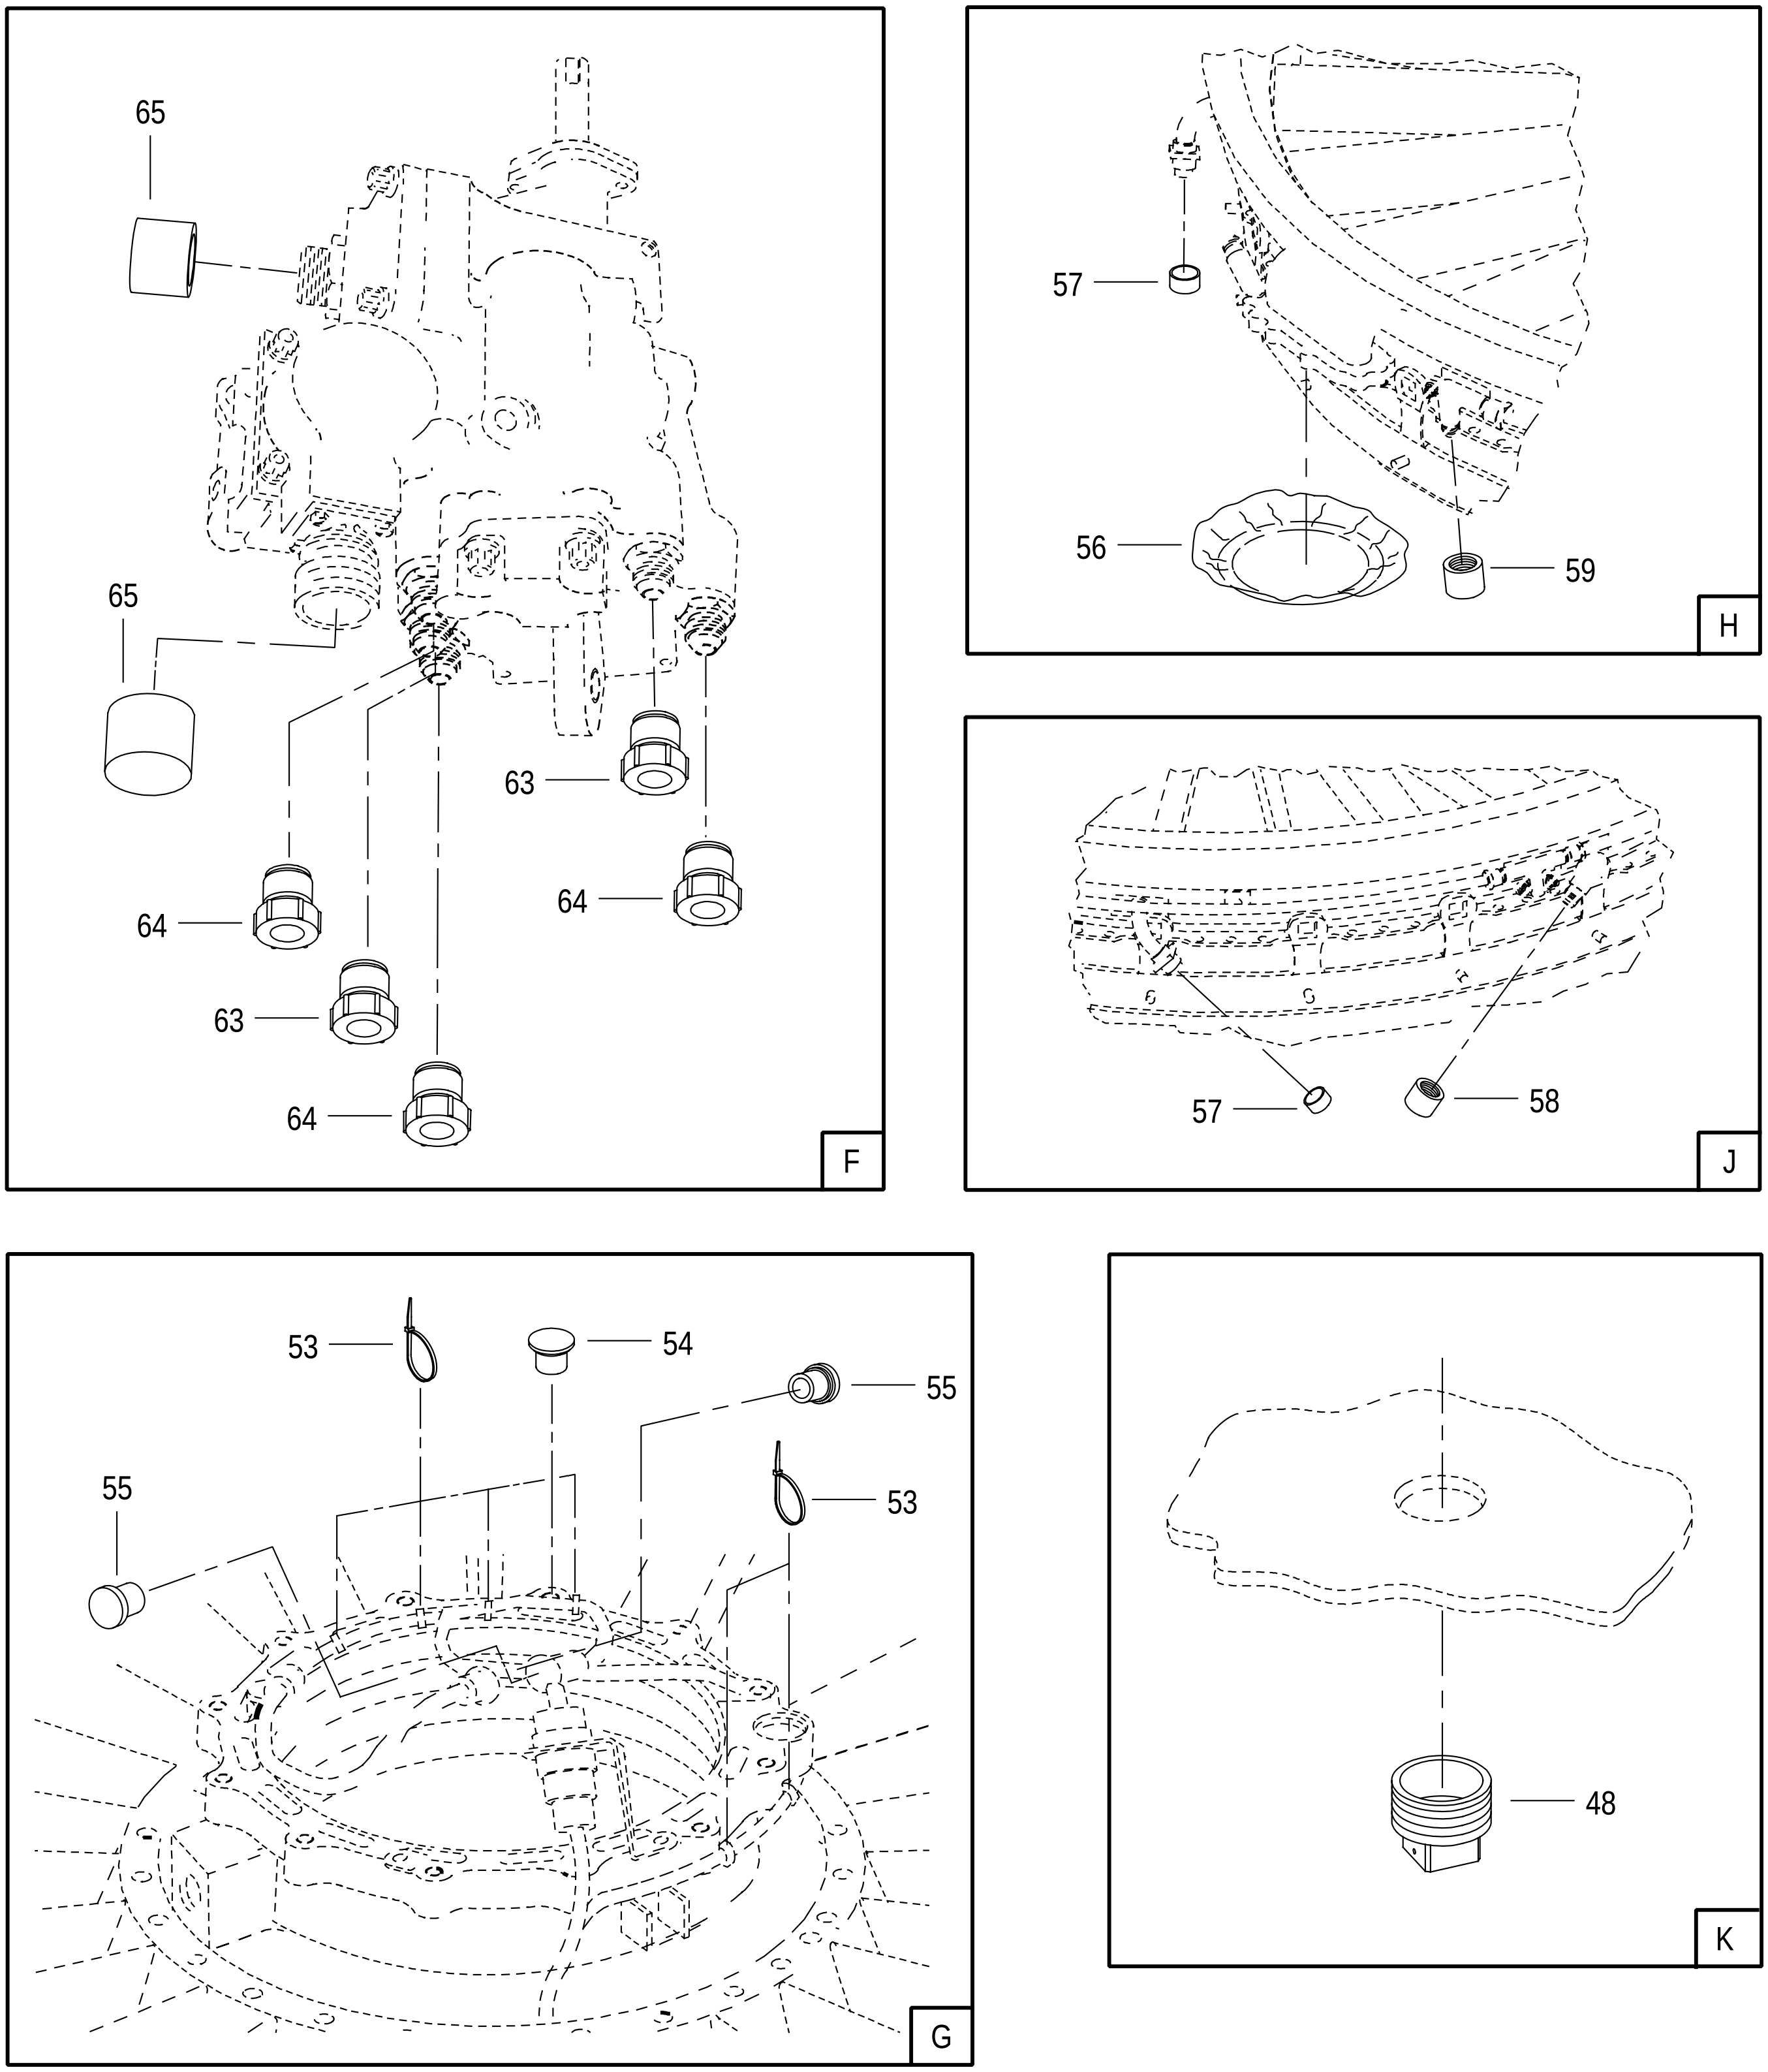

8897

FIGURE 112. INLET/FAN MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 4 OF 6)



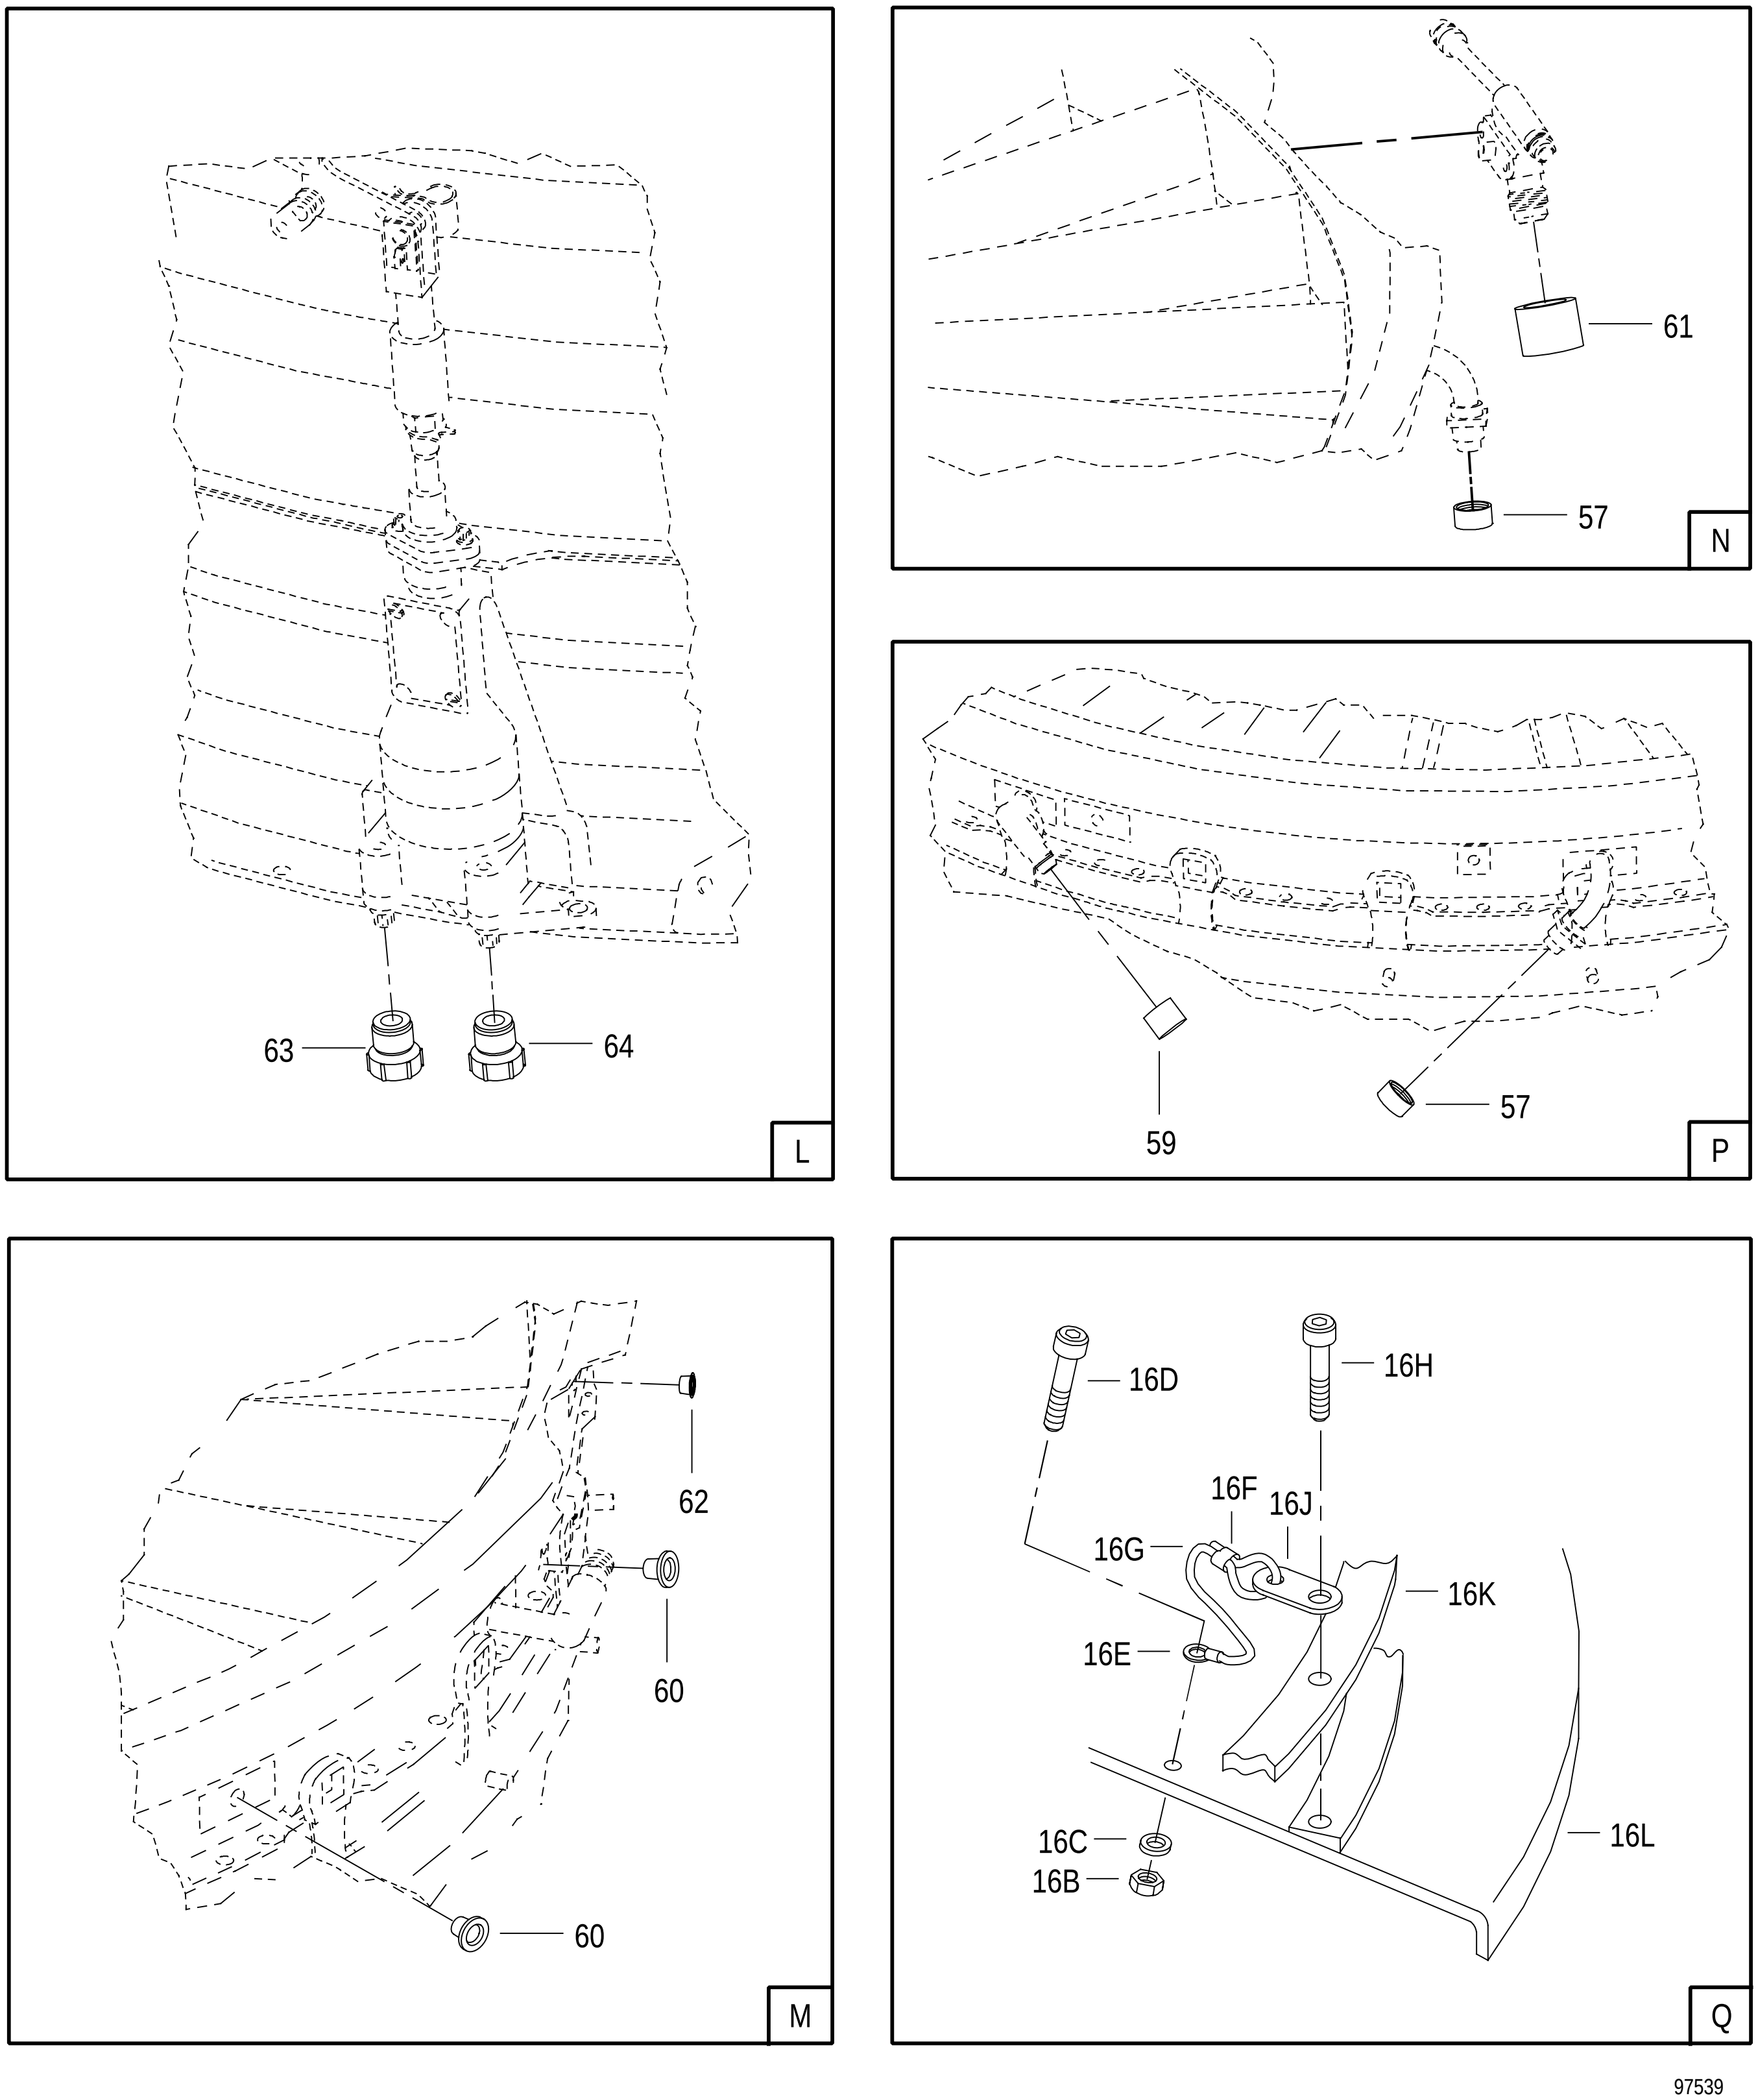


FIGURE 112. INLET/FAN MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 5 OF 6)

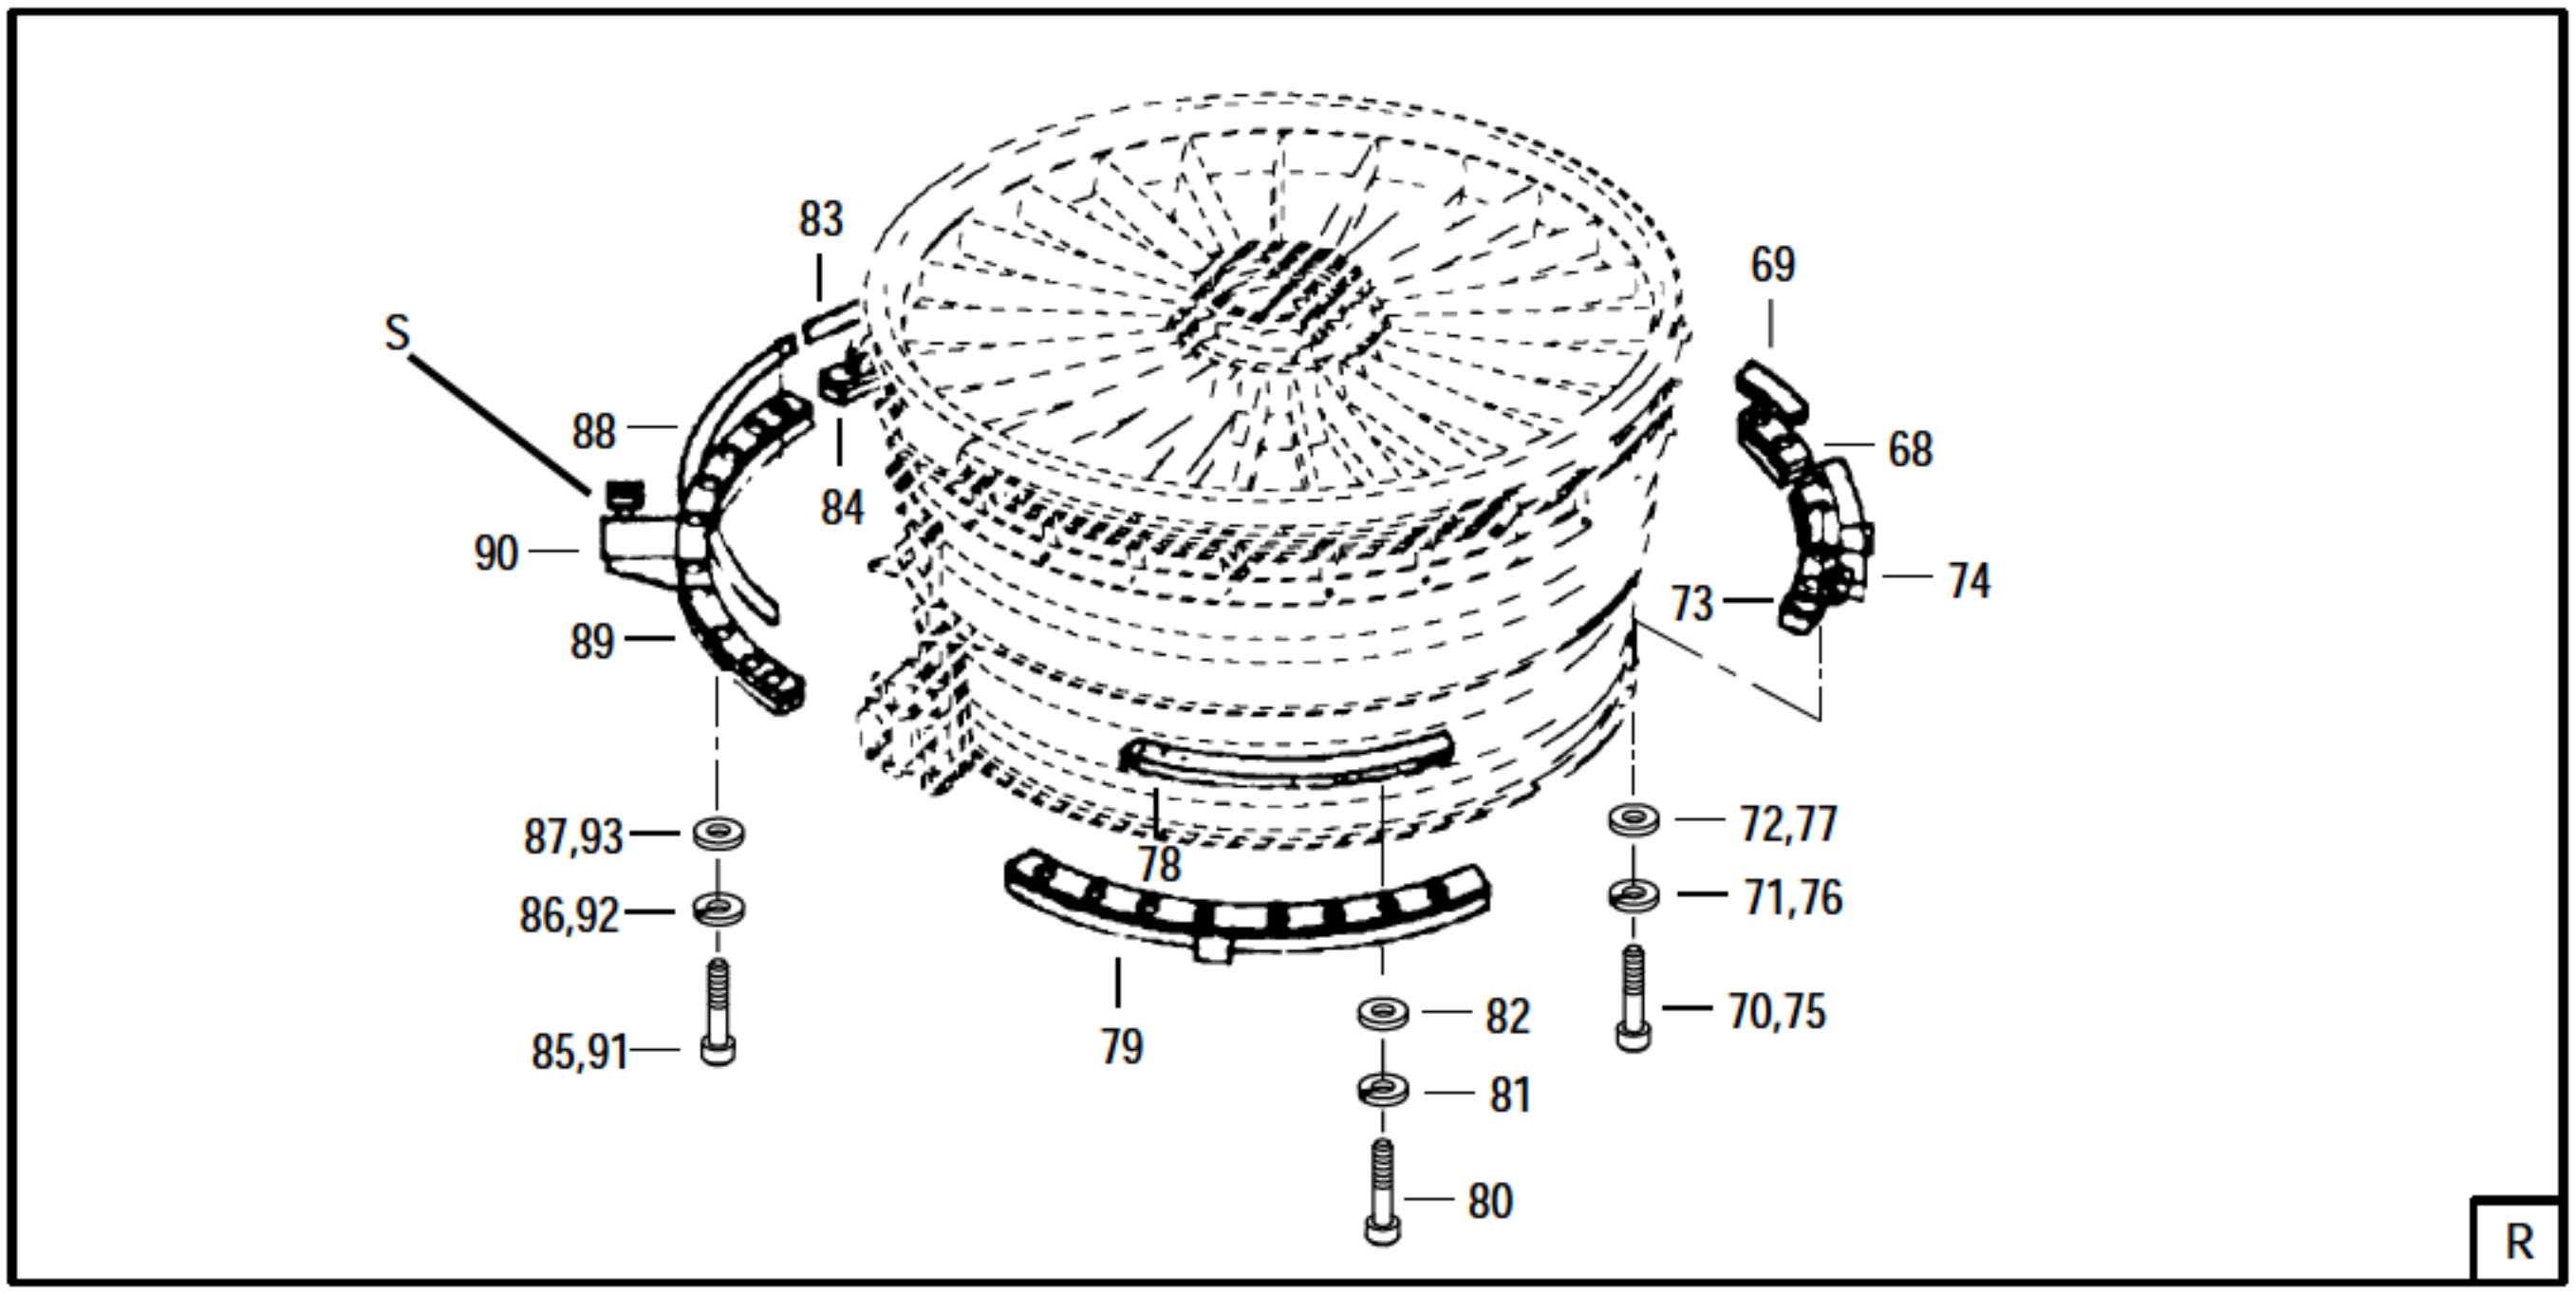

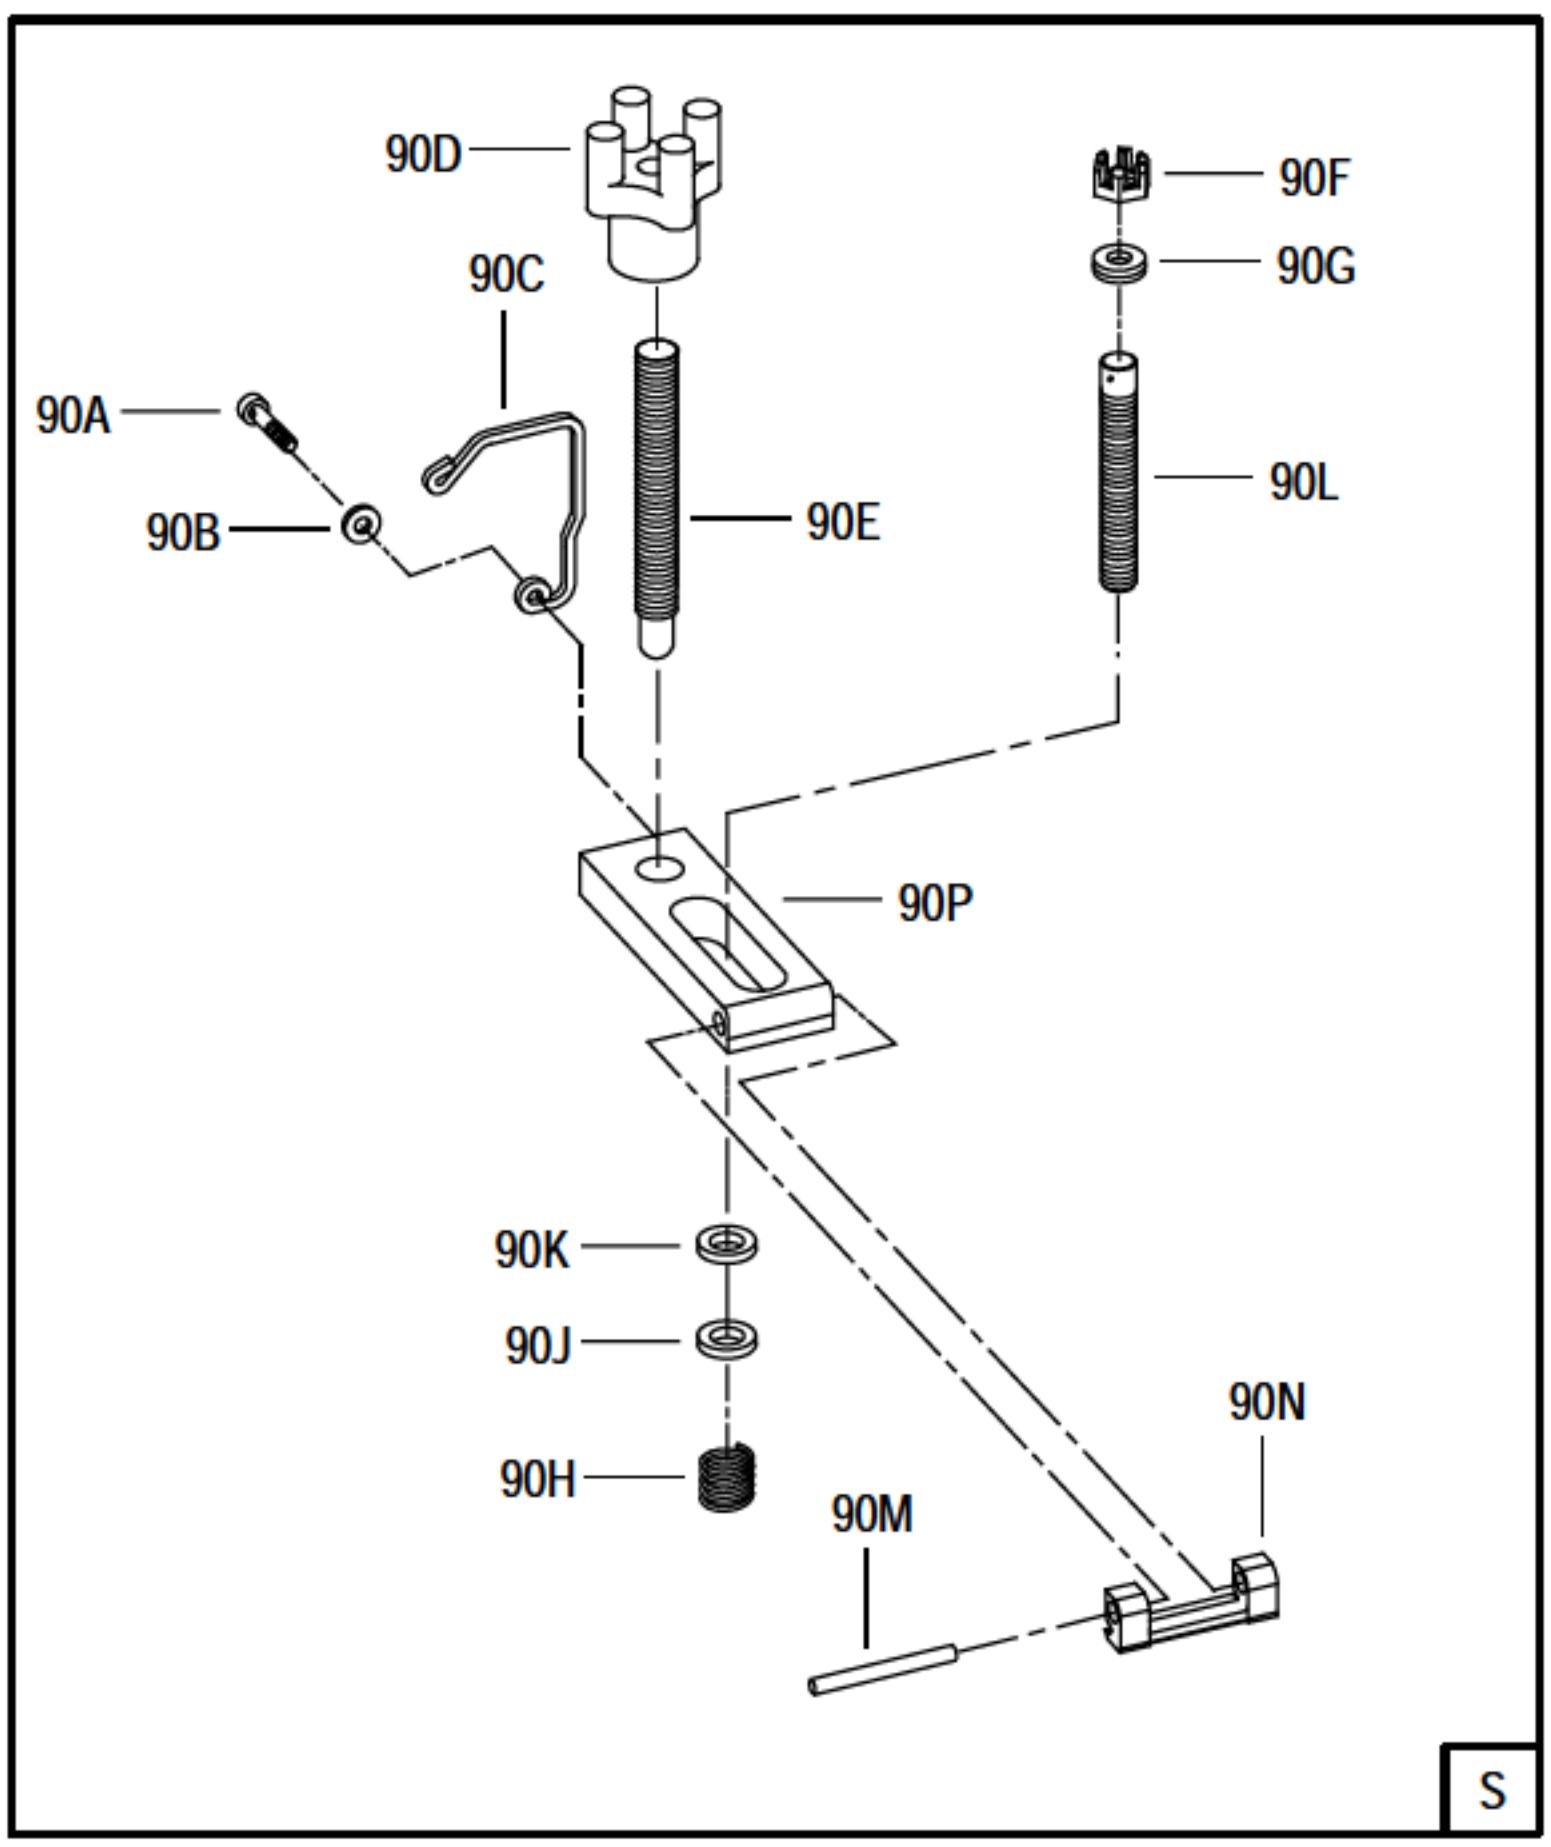

97537

FIGURE 112. INLET/FAN MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 6 OF 6)

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	112	NO NUMBER		INLET/FAN MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS SEE FIG. 1-22 FOR NHA	REF		
		P4070553	52661	. CONTAINER ASSY-INLET/FAN MODULE	1		PAFDD
R		P4078842	52661	. CONTAINER ASSY-INLET/FAN MODULE	1		PAFDD
	- 1	TA446-P47412	08992	.. WINDOW-OBSERVATION P&WA PART NO. P47412	2		PAFZZ
	- 2	TA346-P50844	08992	.. INDICATOR-HUMIDITY, PLUG P&WA PART NO. P50844	1		PAFZZ
	- 3	P52715 *	52661	.. PLATE-IDENTIFICATION, SPARE PARTS SHIPPING CONTAINER	2		PAFZZ
	- 4	MS20913-1S	96906	.. PLUG	1		PAFZZ
	- 5	TA330-25-10-R	08992	.. VALVE-AIR PRESSURE RELIEF, CONTAINER P&WA PART NO. P37145	1		PAFZZ
	- 6	P49212	52661	.. COVER-ROTOR AND STATOR CONTAINER	1		PAFZZ
	- 7	MS51967-8	96906	.. NUT (AP)	4		PAOZZ
	- 8	MS35338-46	96906	.. WASHER (AP)	4		PAFZZ
	- 9	MS90725-60	96906	.. SCREW (AP)	4		PAFZZ
	- 10	MS29561-437	96906	.. PACKING	1		PAFZZ
	- 11	P4070553-01	52661	.. COVER-REUSABLE METAL CONTAINER, ASSY OF	1		PAFDD
R				USE ONLY ON P4070553			
				PARTIAL BREAKDOWN FOLLOWS			
	- 12	34S02-1-1AA	71286	... PIN-TURNLOCK FASTENER STUD P&WA PART NO. P4015046	24		PAFZZ
	- 13	34S01-3-1AA	71286	... STUD-TURNLOCK FASTENER P&WA PART NO. P48690	24		PAFZZ
	- 14	P47431	52661	... BOX-ENGINE DATA	1		PAFZZ
	- 15	P52992	52661	.. NUT-PLAIN, HEX, DRILLED 1.000-8UNC	1		PAFZZ
	- 16	MS27183-27	96906	.. WASHER	1		PAFZZ
R	- 16A	P4078969	52661	.. COVER-PROTECTIVE	1		PAFZZ
R				USE ONLY ON P4078842			
R	- 16B	MS35649-104	96906	... NUT	5		PAFZZ
R	- 16C	MS15795-808	96906	... WASHER	15		PAFZZ
R	- 16D	MS16995-36	96906	... SCREW	15		PAFZZ
R	- 16E	CL-.194-TERM	99862	... TERMINAL	5		
R				P&WA PART NO. P4078969-07			
R	- 16F	MS51844-63	96906	... SLEEVE	5		PAFZZ
R	- 16G	CL-3-C-8.00	99862	... CABLE	5		
R				P&WA PART NO. P4078969-05			
R	- 16H	P4078969-03	52661	... SCREW-CAPTURED	5		PAFZZ
R				MAKE FROM MS16995-37, MFD BY 96906			
R	- 16J	P4078969-04	52661	... TAB-RETAINING	5		PAFZZ
R	- 16K	P4078969-02	52661	... RING-STORAGE	1		PAFZZ
R	- 16L	P4078969-01	52661	... COVER ASSY	1		PAFBZ
	- 17	P48687	52661	.. WASHER-KEYWAY, INLET FAN, MODULE	1		PAFBZ
		P4078867	52661	.. SUPPORT ASSY-INLET/FAN MODULE	1		PAFDD
R				USE ONLY ON P4070553			
	- 18	MS90726-108	96906	.. SCREW (AP)	4		PAFZZ
	- 19	MS35338-48	96906	.. WASHER (AP)	4		PAFZZ
		P4078860	52661	... CLAMP ASSY	4		PAFFF
	- 20	MS24665-153	96906	.... PIN	1		PAFZZ
	- 21	5710-59-60	86928	.... WASHER-REDUCED OD P&WA PART NO. P4078857	1		PAFZZ
	- 22	P4078858	52661	.... PIN-CLEVIS	1		PAFZZ
	- 23	P4078865	52661	.... REST-CLAMPING	1		PAFZZ
	- 24	P4078854-01	52661	.... RETAINER-KNOB	1		PAFZZ
	- 25	MS51576-16	96906	.... SCREW (AP)	1		PAFZZ
	- 26	AN960-C416	88044	.... WASHER-FLAT (AP)	1		PAFZZ
	- 27	CL-4-BK	99862	.... KNOB-BAR P&WA PART NO. P4078856	1		PAFZZ
	- 28	P4078863	52661	.... STUD-THREADED	1		PAFZZ
	- 29	C0720-072-1250S	74197	.... SPRING-COMPRESSION P&WA PART NO. P4078855	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	112 - 30	AN960-C816	88044	.... WASHER-FLAT	1		PAFZZ
	- 31	5612-159-062	86928	.... WASHER-FLAT	1		PAFZZ
				P&WA PART NO. P4078927			
	- 32	MS24665-370	96906	.... PIN	1		PAFZZ
	- 33	MS9358-14	96906	.... NUT	1		PAFZZ
	- 34	P4078862	52661	.... WASHER-SPHERICAL	1		PAFZZ
	- 35	P4078861	52661	.... STUD-THREADED	1		PAFZZ
	- 36	P4078864	52661	.... STRAP-CLAMPING	1		PAFZZ
	- 37	P4078879	52661	... SUPPORT-CLAMP	4		PAFZZ
	- 38	MS17830-5C	96906	... NUT (AP)	3		PAFZZ
	- 39	AN960-C516	88044	... WASHER-FLAT (AP)	3		PAFZZ
	- 40	MS16995-68	96906	... SCREW (AP)	3		PAFZZ
	- 41	P4078853-01	52661	... SUPPORT-INLET/FAN, ASSY OF	1		PAFDD
				PARTIAL BREAKDOWN FOLLOWS			
	- 42	MS16555-46	96906	.... PIN	2		PAFZZ
R	- 42A	P50364	52661	.. SUPPORT-INLET FAN MODULE	1		XBFBZ
R				USE ONLY ON P4078842			
	- 43	P38161	52661	.. PACKING-PREFORMED	1		PAFZZ
				51.094 ID X 0.500 IN. THK			
	- 44	C538-188F2	71985	.. MOUNT-RESILIENT, INLET/FAN	4		PAFZZ
				P&WA PART NO. P4070589			
				REPLACES P48685			
	- 45	MS51922-33	96906	.. NUT (AP)	1		PAFZZ
	- 46	P48686	52661	.. TIEROD	1		PAFBZ
R				USE ONLY ON P4070553			
R	- 46A	P4078850	52661	.. SLEEVE	1		PAFZZ
R				USE ONLY ON P4078842			
R	- 46B	P4078939	52661	.. SPACER-FAN MODULE	1		PAFZZ
R				USE ONLY ON P4078842			
R	- 46C	MS16555-641	96906	.. PIN	1		PAFZZ
R				USE ONLY ON P4078842			
R	- 46D	P4078849	52661	.. TIEROD	1		PAFZZ
R				USE ONLY ON P4078842			
	- 47	P48683	52661	.. SUPPORT	1		PAFBZ
	- 48	MS20913-6S	96906	.. PLUG	1		PAFZZ
	- 49	P4070553-02	52661	.. BASE-REUSABLE METAL CONTAINER, ASSY OF	1		PAFDD
R				USE ONLY ON P4070553			
				PARTIAL BREAKDOWN FOLLOWS			
	- 50	34R01-1-1AA	71286	... RECEPTACLE-TURNLOCK FASTENER, BASE	24		PAFZZ
				P&WA PART NO. P4015045			
	- 51	= 9SP-100-R6-13	29666	... RIVET-SOLID, COUNTERSUNK	2		PAFZZ
				0.188 DIA X 0.812 GRIP LENGTH (AP)			
				P&WA PART NO. P52086			
		= MS9318-220	96906	... RIVET (AP)	2		PAFZZ
		P4078921	52661	. PACKAGING PARTS-CONSUMABLE, INLET/FAN	1		PAFZZ
				MODULE			
	- 52	P4070546	52661	.. COVER-PLASTIC	1		KF
	- 53	MS3367-5-9	96906	.. STRAP	6		KF
	- 54	P10547	52661	.. CAP-PROTECTIVE	1		KF
				0.485			
	- 55	P31100	52661	.. PLUG-PROTECTIVE	2		KF
				0.500			
	- 56	P4070544	52661	.. COVER-PLASTIC	1		KF
	- 57	P10163	52661	.. CAP-PROTECTIVE	3		KF
				1.000-18			
	- 58	= CD-6	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL	1		KF
				0.5625-18UNF-3B X 0.510 IN. DEEP			
				P&WA PART NO. P4021568-04			
		= M-320	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL	1		KF
				0.5625-18UNF-3B X 0.510 IN. DEEP			
				P&WA PART NO. P4021568-04			
	- 59	= CD-4	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL	2		KF
				P&WA PART NO. P4021568-01			
		= M-312	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL	2		KF
				P&WA PART NO. P4021568-01			

	FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
	112 - 60		P12761	52661	.. PLUG-PROTECTIVE 0.435	2		KF
	- 61	=	CD-10	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL 0.875-14UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-03	1		KF
		=	M-330	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL 0.875-14UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-03	1		KF
	- 62		P12771	52661	.. CLOSURE-SHIPPING 1.105 OD X 0.919 IN. ID	1		
	- 63	=	PD-40	99017	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL 0.4375-20UNJF-3A X 0.850 IN. LONG P&WA PART NO. P4021572-01	3		KF
		=	807	7G949	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL 0.4375-20UNJF-3A X 0.850 IN. LONG P&WA PART NO. P4021572-01	3		KF
	- 64	=	PD-60	99017	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL 0.5625-18UNF-3A X 0.820 IN. LONG P&WA PART NO. P4021572-02	4		KF
		=	809	7G949	.. PLUG-PROTECTIVE, DUST AND MOISTURE SEAL 0.5625-18UNF-3A X 0.820 IN. LONG P&WA PART NO. P4021572-02	4		KF
	- 65	=	CD-8	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL 0.750-16UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-02	2		KF
		=	M-328	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL 0.750-16UNF-3B X 0.510 IN. DEEP P&WA PART NO. P4021568-02	2		KF
	- 66		P8320	52661	.. DESICCANT-16 UNIT, BAGGED	4		KF
	- 67		83280	52661	.. SEAL-LEAD, 2 HOLE	3		PADZZ
R R	- 68		P4078911	52661	.. RING-ADAPTER USE ONLY ON P4078842	1		PAFZZ
R R	- 69		P4078936	52661	.. RING-SPACER USE ONLY ON P4078842	1		PAFZZ
R	- 70		MS16995-38	96906	.. SCREW (AP)	5		PAFZZ
R	- 71		MS35338-138	96906	.. LOCKWASHER (AP)	5		PAFZZ
R	- 72		MS15795-842	96906	.. WASHER (AP)	5		PAFZZ
R R	- 73		P4078905	52661	.. RING-ADAPTER USE ONLY ON P4078842	1		PAFZZ
R R	- 74		P4078935	52661	.. RING-SPACER USE ONLY ON P4078842	1		PAFZZ
R	- 75		MS16995-38	96906	.. SCREW (AP)	5		PAFZZ
R	- 76		MS35338-138	96906	.. LOCKWASHER (AP)	5		PAFZZ
R	- 77		MS15795-842	96906	.. WASHER (AP)	5		PAFZZ
R R	- 78		P4078904-03	52661	.. RING-ADAPTER USE ONLY ON P4078842	1		PAFZZ
R R	- 79		P4078934-03	52661	.. RING-SPACER USE ONLY ON P4078842	1		PAFZZ
R	- 80		MS16995-38	96906	.. SCREW (AP)	8		PAFZZ
R	- 81		MS35338-138	96906	.. LOCKWASHER (AP)	8		PAFZZ
R	- 82		MS15795-842	96906	.. WASHER (AP)	8		PAFZZ
R R	- 83		P4078904-01	52661	.. RING-ADAPTER USE ONLY ON P4078842	1		PAFZZ
R R	- 84		P4078934-01	52661	.. RING-SPACER USE ONLY ON P4078842	1		PAFZZ
R	- 85		MS16995-38	96906	.. SCREW (AP)	8		PAFZZ
R	- 86		MS35338-138	96906	.. LOCKWASHER (AP)	8		PAFZZ
R	- 87		MS15795-842	96906	.. WASHER (AP)	8		PAFZZ
R R	- 88		P4078904-02	52661	.. RING-ADAPTER USE ONLY ON P4078842	1		PAFZZ
R R	- 89		P4078934-02	52661	.. RING-SPACER USE ONLY ON P4078842	1		PAFZZ
R R	- 90		P4330474	52661	.. CLAMP ASSY USE ONLY ON P4078842	4		PAFZZ
R	- 90A		MS51576-16	96906	... SCREW	1		PAFZZ
R	- 90B		AN960-C416	88044	... WASHER-FLAT	1		PAFZZ

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	112 - 90C	P4078854-01	52661	... RETAINER-KNOB	1		PAFZZ
R	- 90D	CL-4-BK	99862	... KNOB-BAR	1		PAFZZ
R				P&WA PART NO. P4078856			
R	- 90E	P4078863	52661	... STUD-THREADED	1		PAFZZ
R	- 90F	MS51971-5	96906	... NUT	1		PAFZZ
R	- 90G	CL-3-SW	99862	... WASHER-SPHERICAL	1		PAFZZ
R				P&WA PART NO. P4078862			
R	- 90H	C0720-072-1250S	74197	... SPRING-COMPRESSION	1		PAFZZ
R				P&WA PART NO. P4078855			
R	- 90J	AN960-C816	88044	... WASHER-FLAT	1		PAFZZ
R	- 90K	5612-159-062	86928	... WASHER-FLAT	1		PAFZZ
R				P&WA PART NO. P4078927			
R	- 90L	P4078861	52661	... STUD-THREADED	1		PAFZZ
R	- 90M	MS16555-52	96906	... PIN	1		PAFZZ
R	- 90N	P4078865	52661	... REST-CLAMPING	1		PAFZZ
R	- 90P	P4078864	52661	... STRAP-CLAMPING	1		PAFZZ
R	- 91	MS16995-38	96906	.. SCREW (AP)	8		PAFZZ
R	- 92	MS35338-138	96906	.. LOCKWASHER (AP)	8		PAFZZ
R	- 93	MS15795-842	96906	.. WASHER (AP)	8		PAFZZ

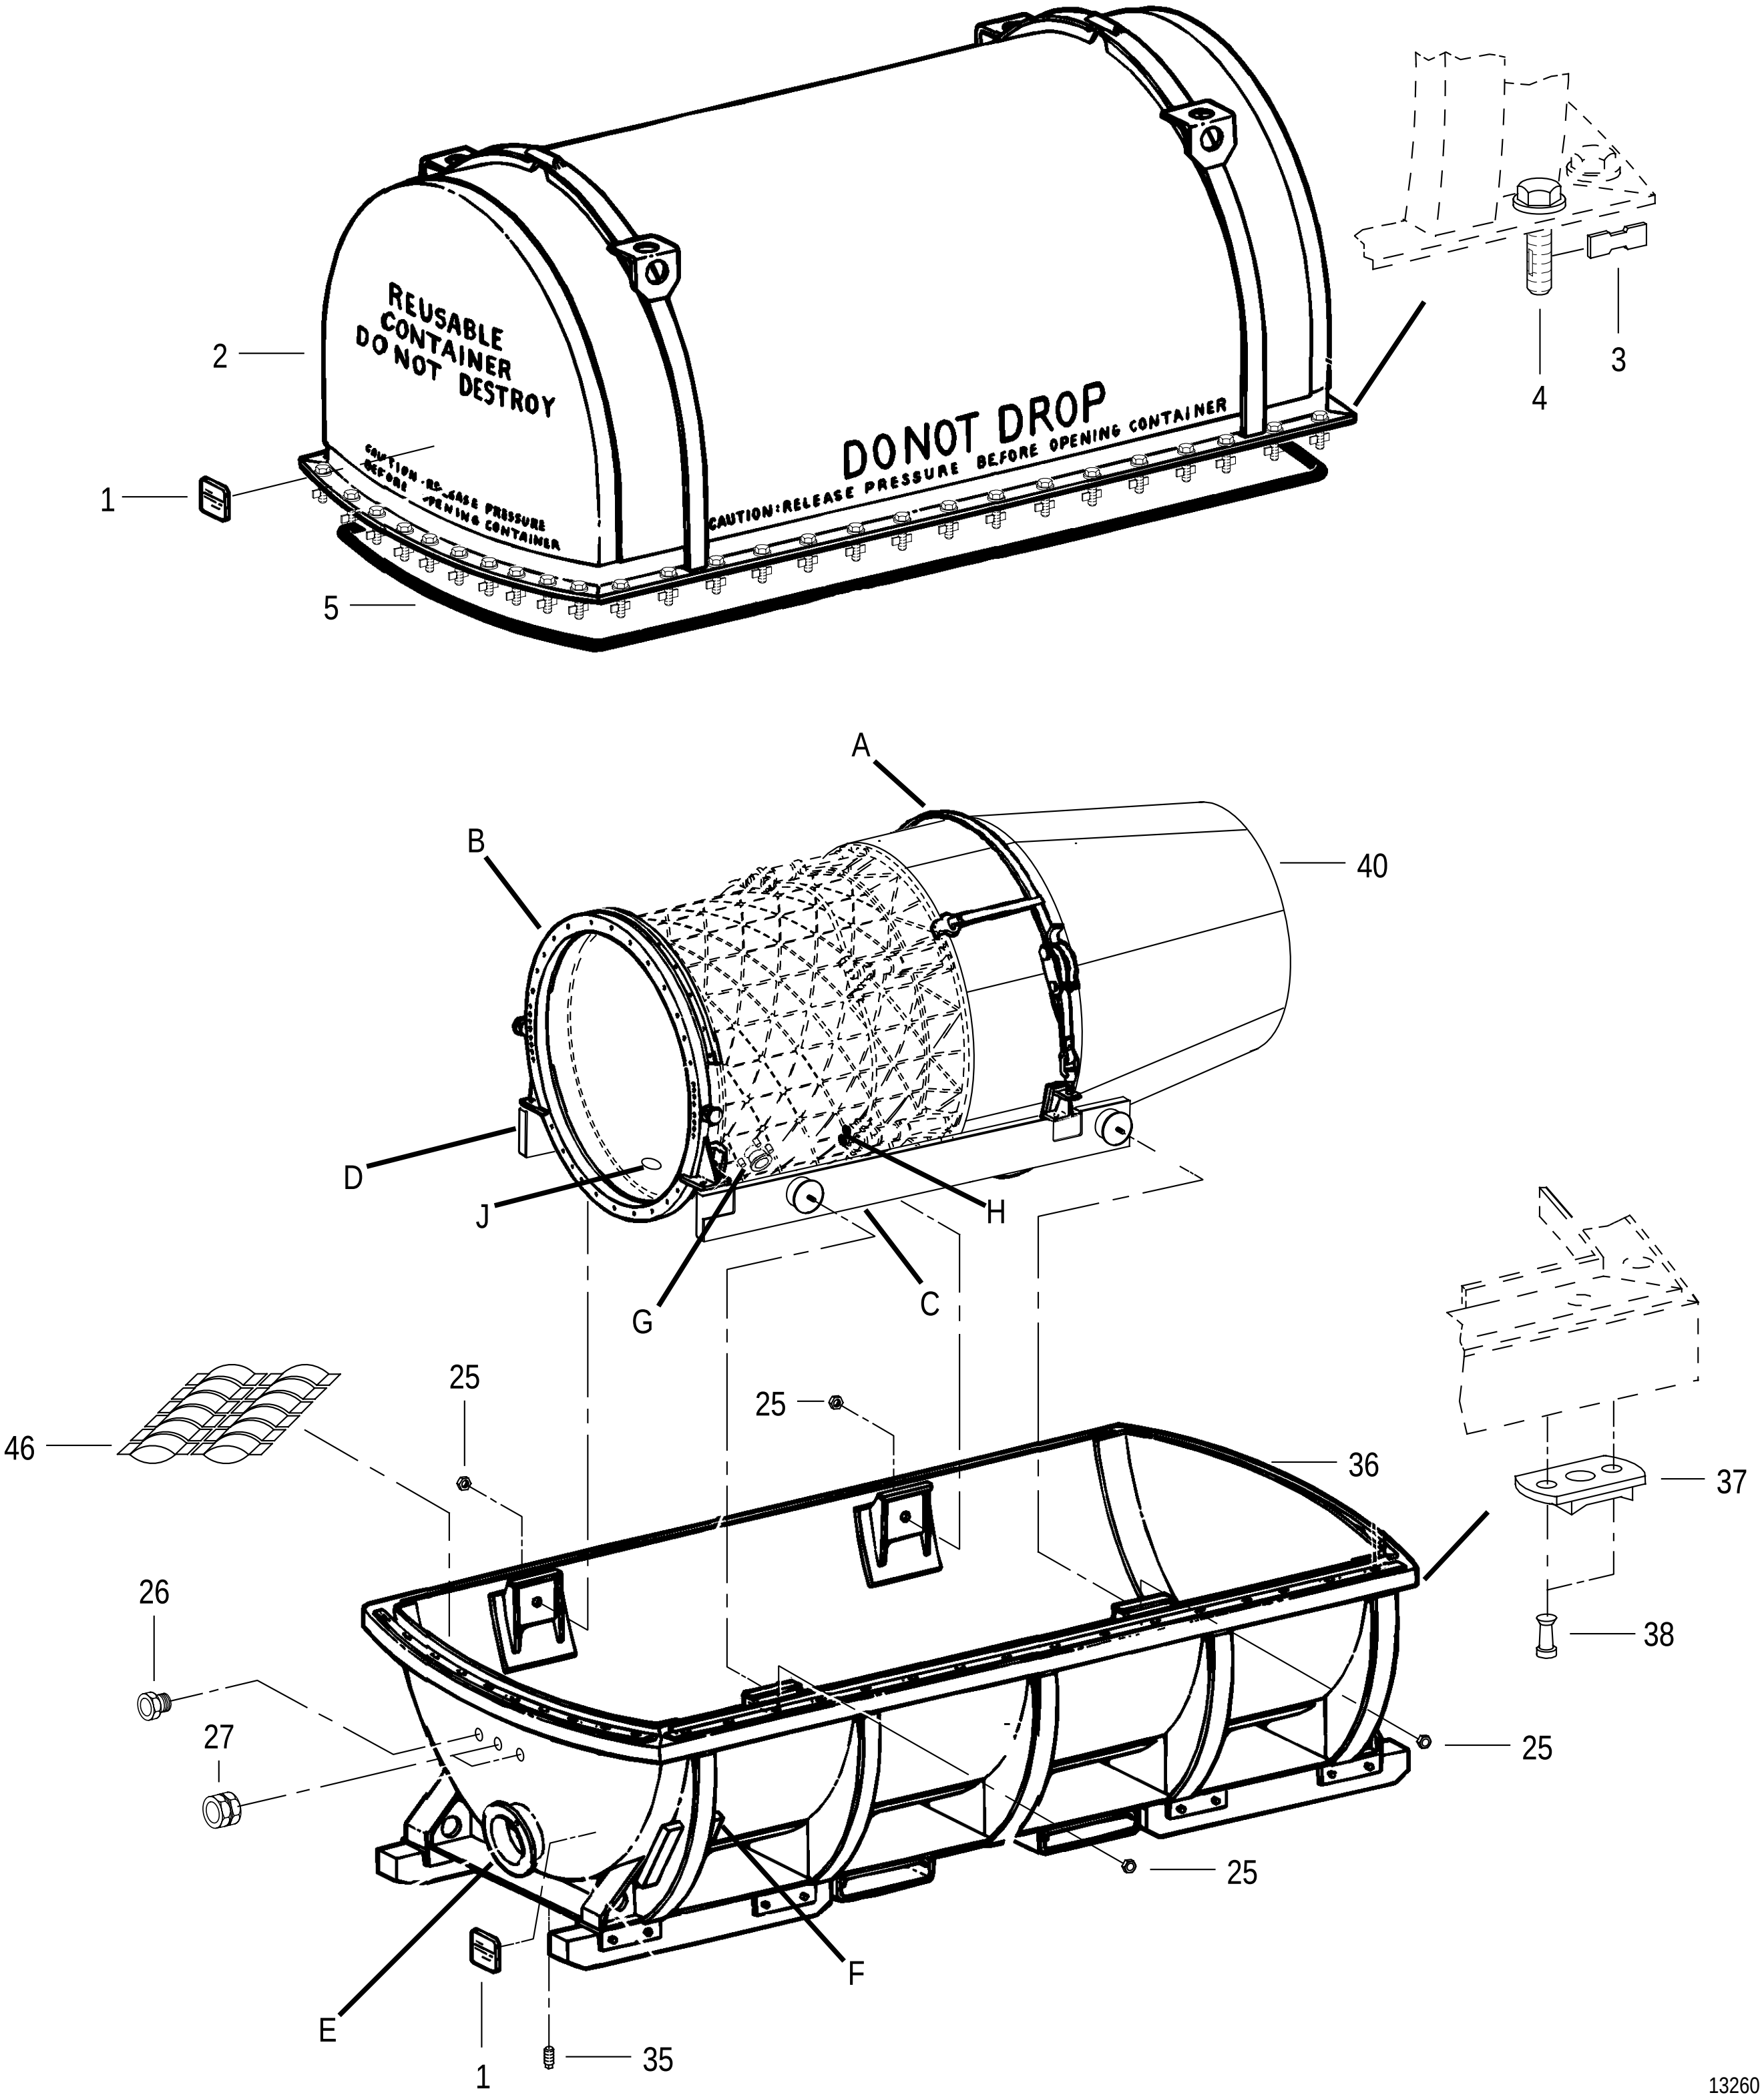


FIGURE 113. AUGMENTOR DUCT AND NOZZLE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 1 OF 3)

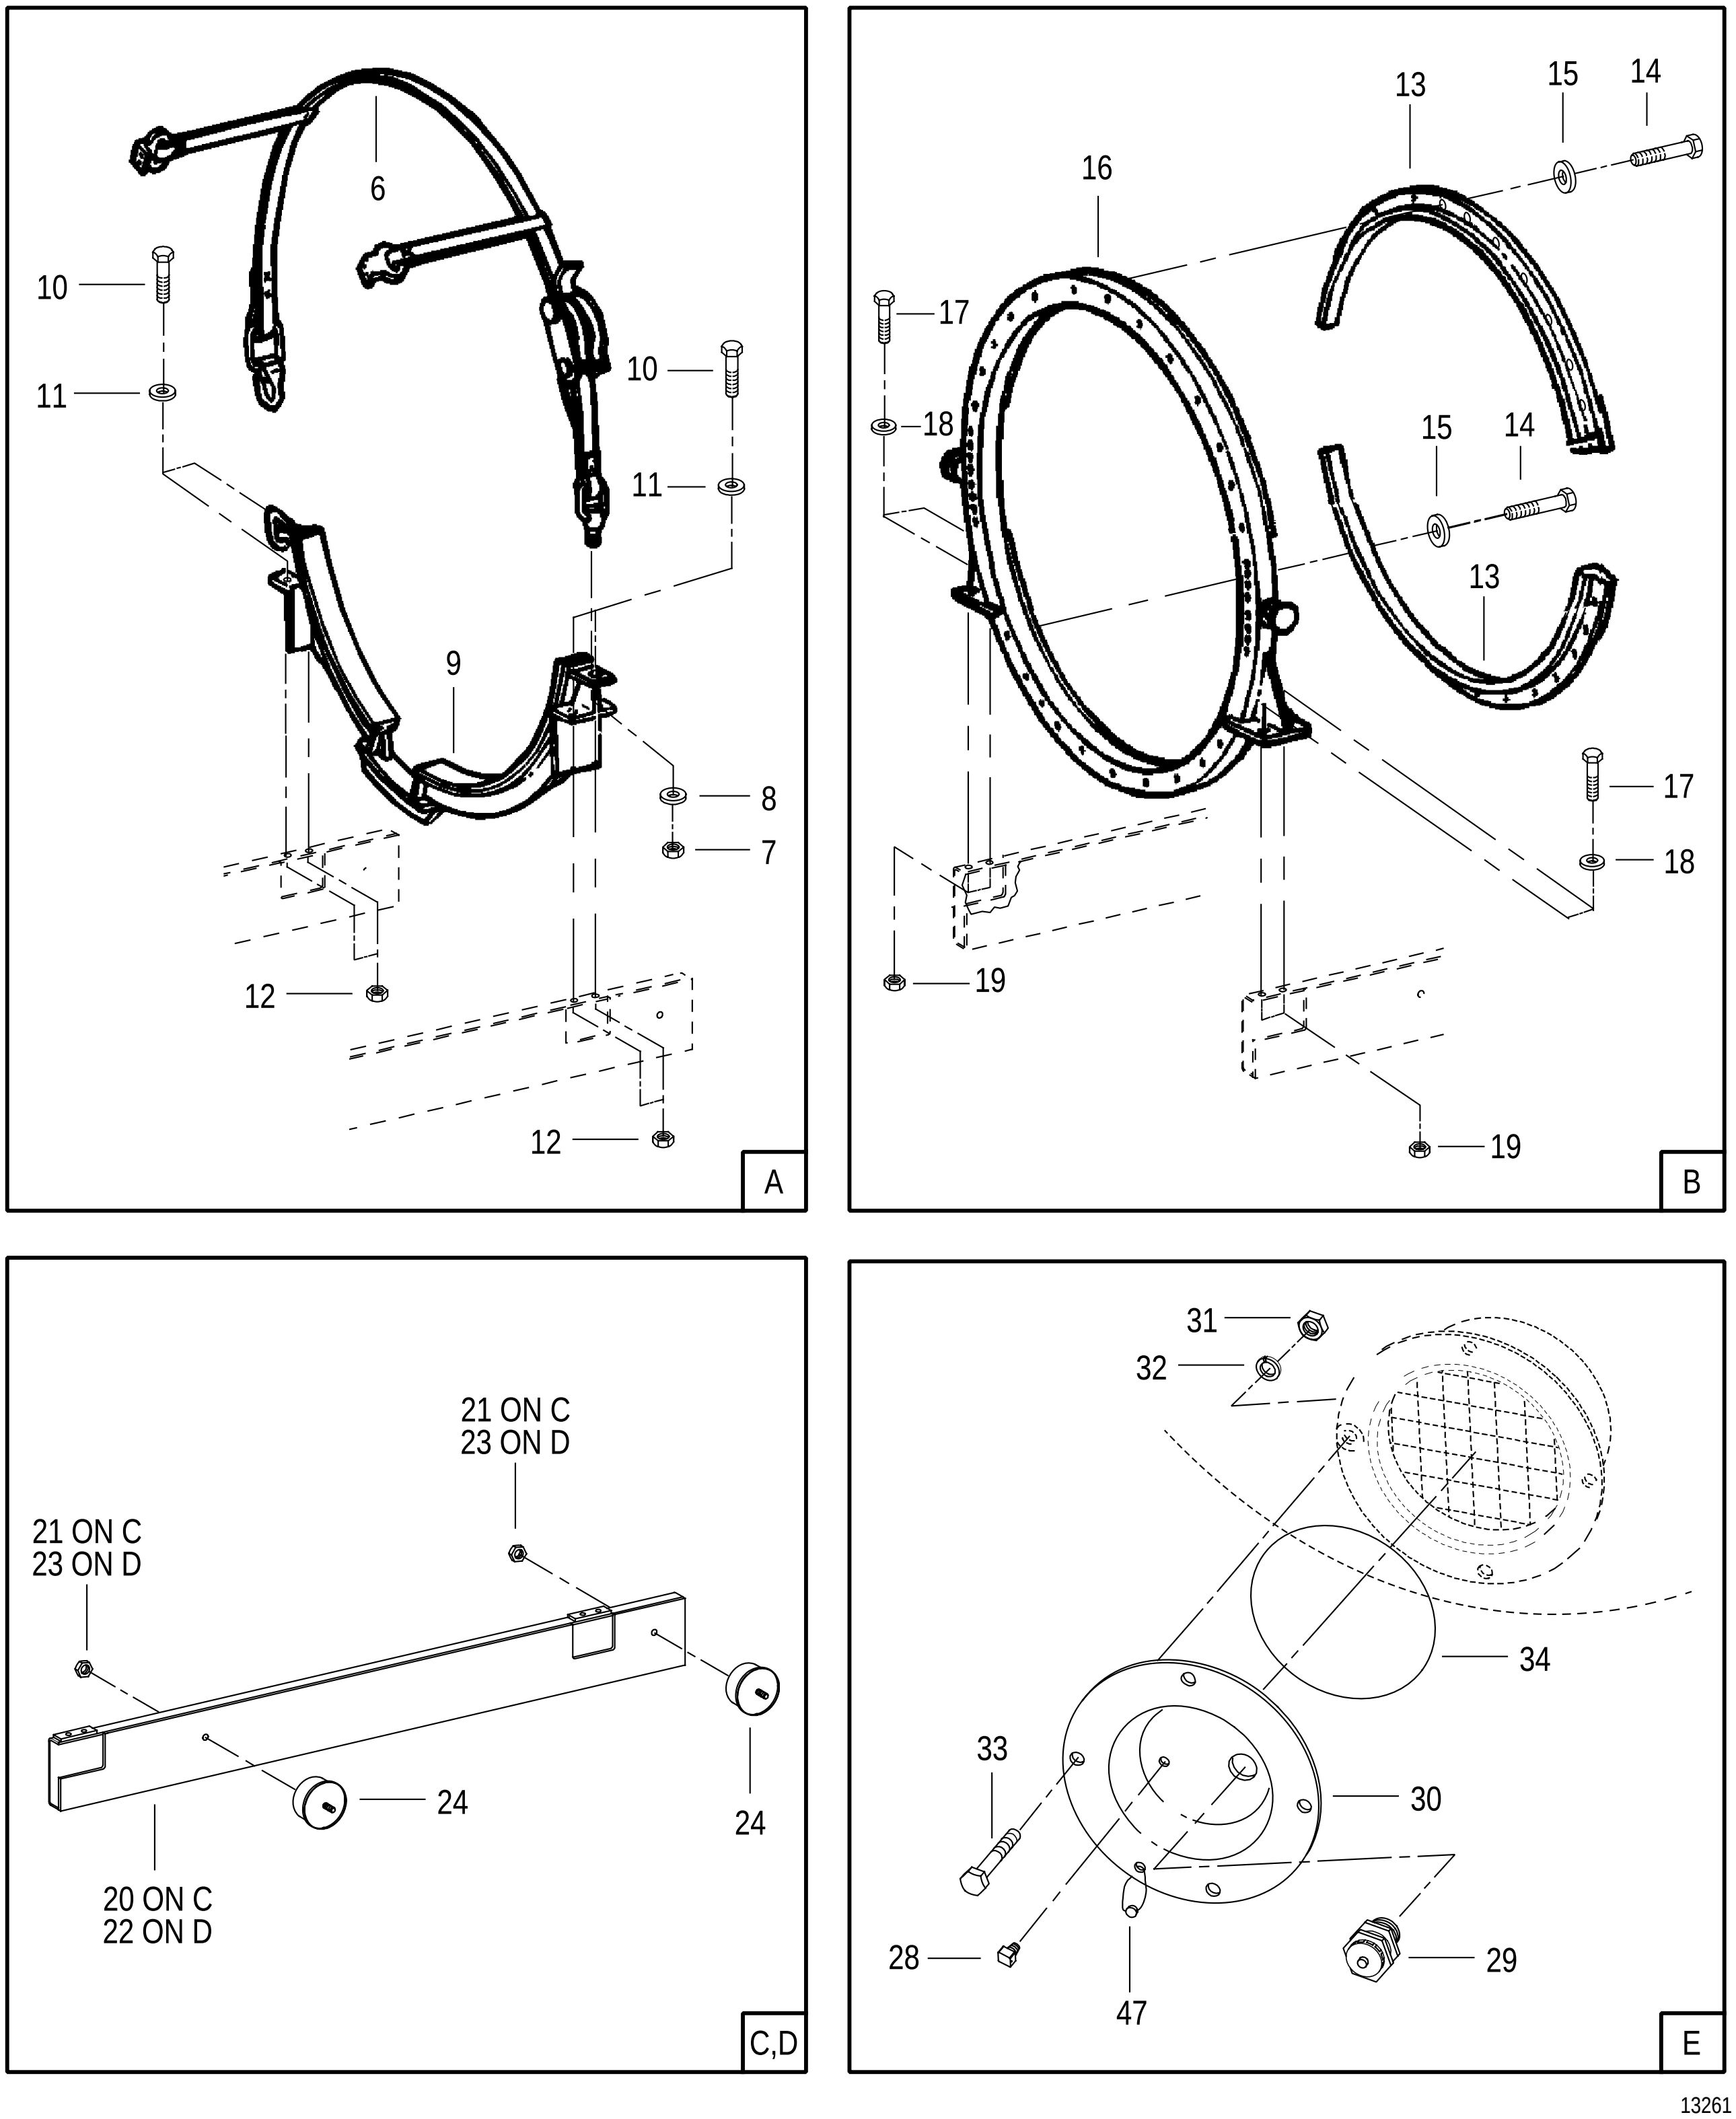


FIGURE 113. AUGMENTOR DUCT AND NOZZLE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 2 OF 3)

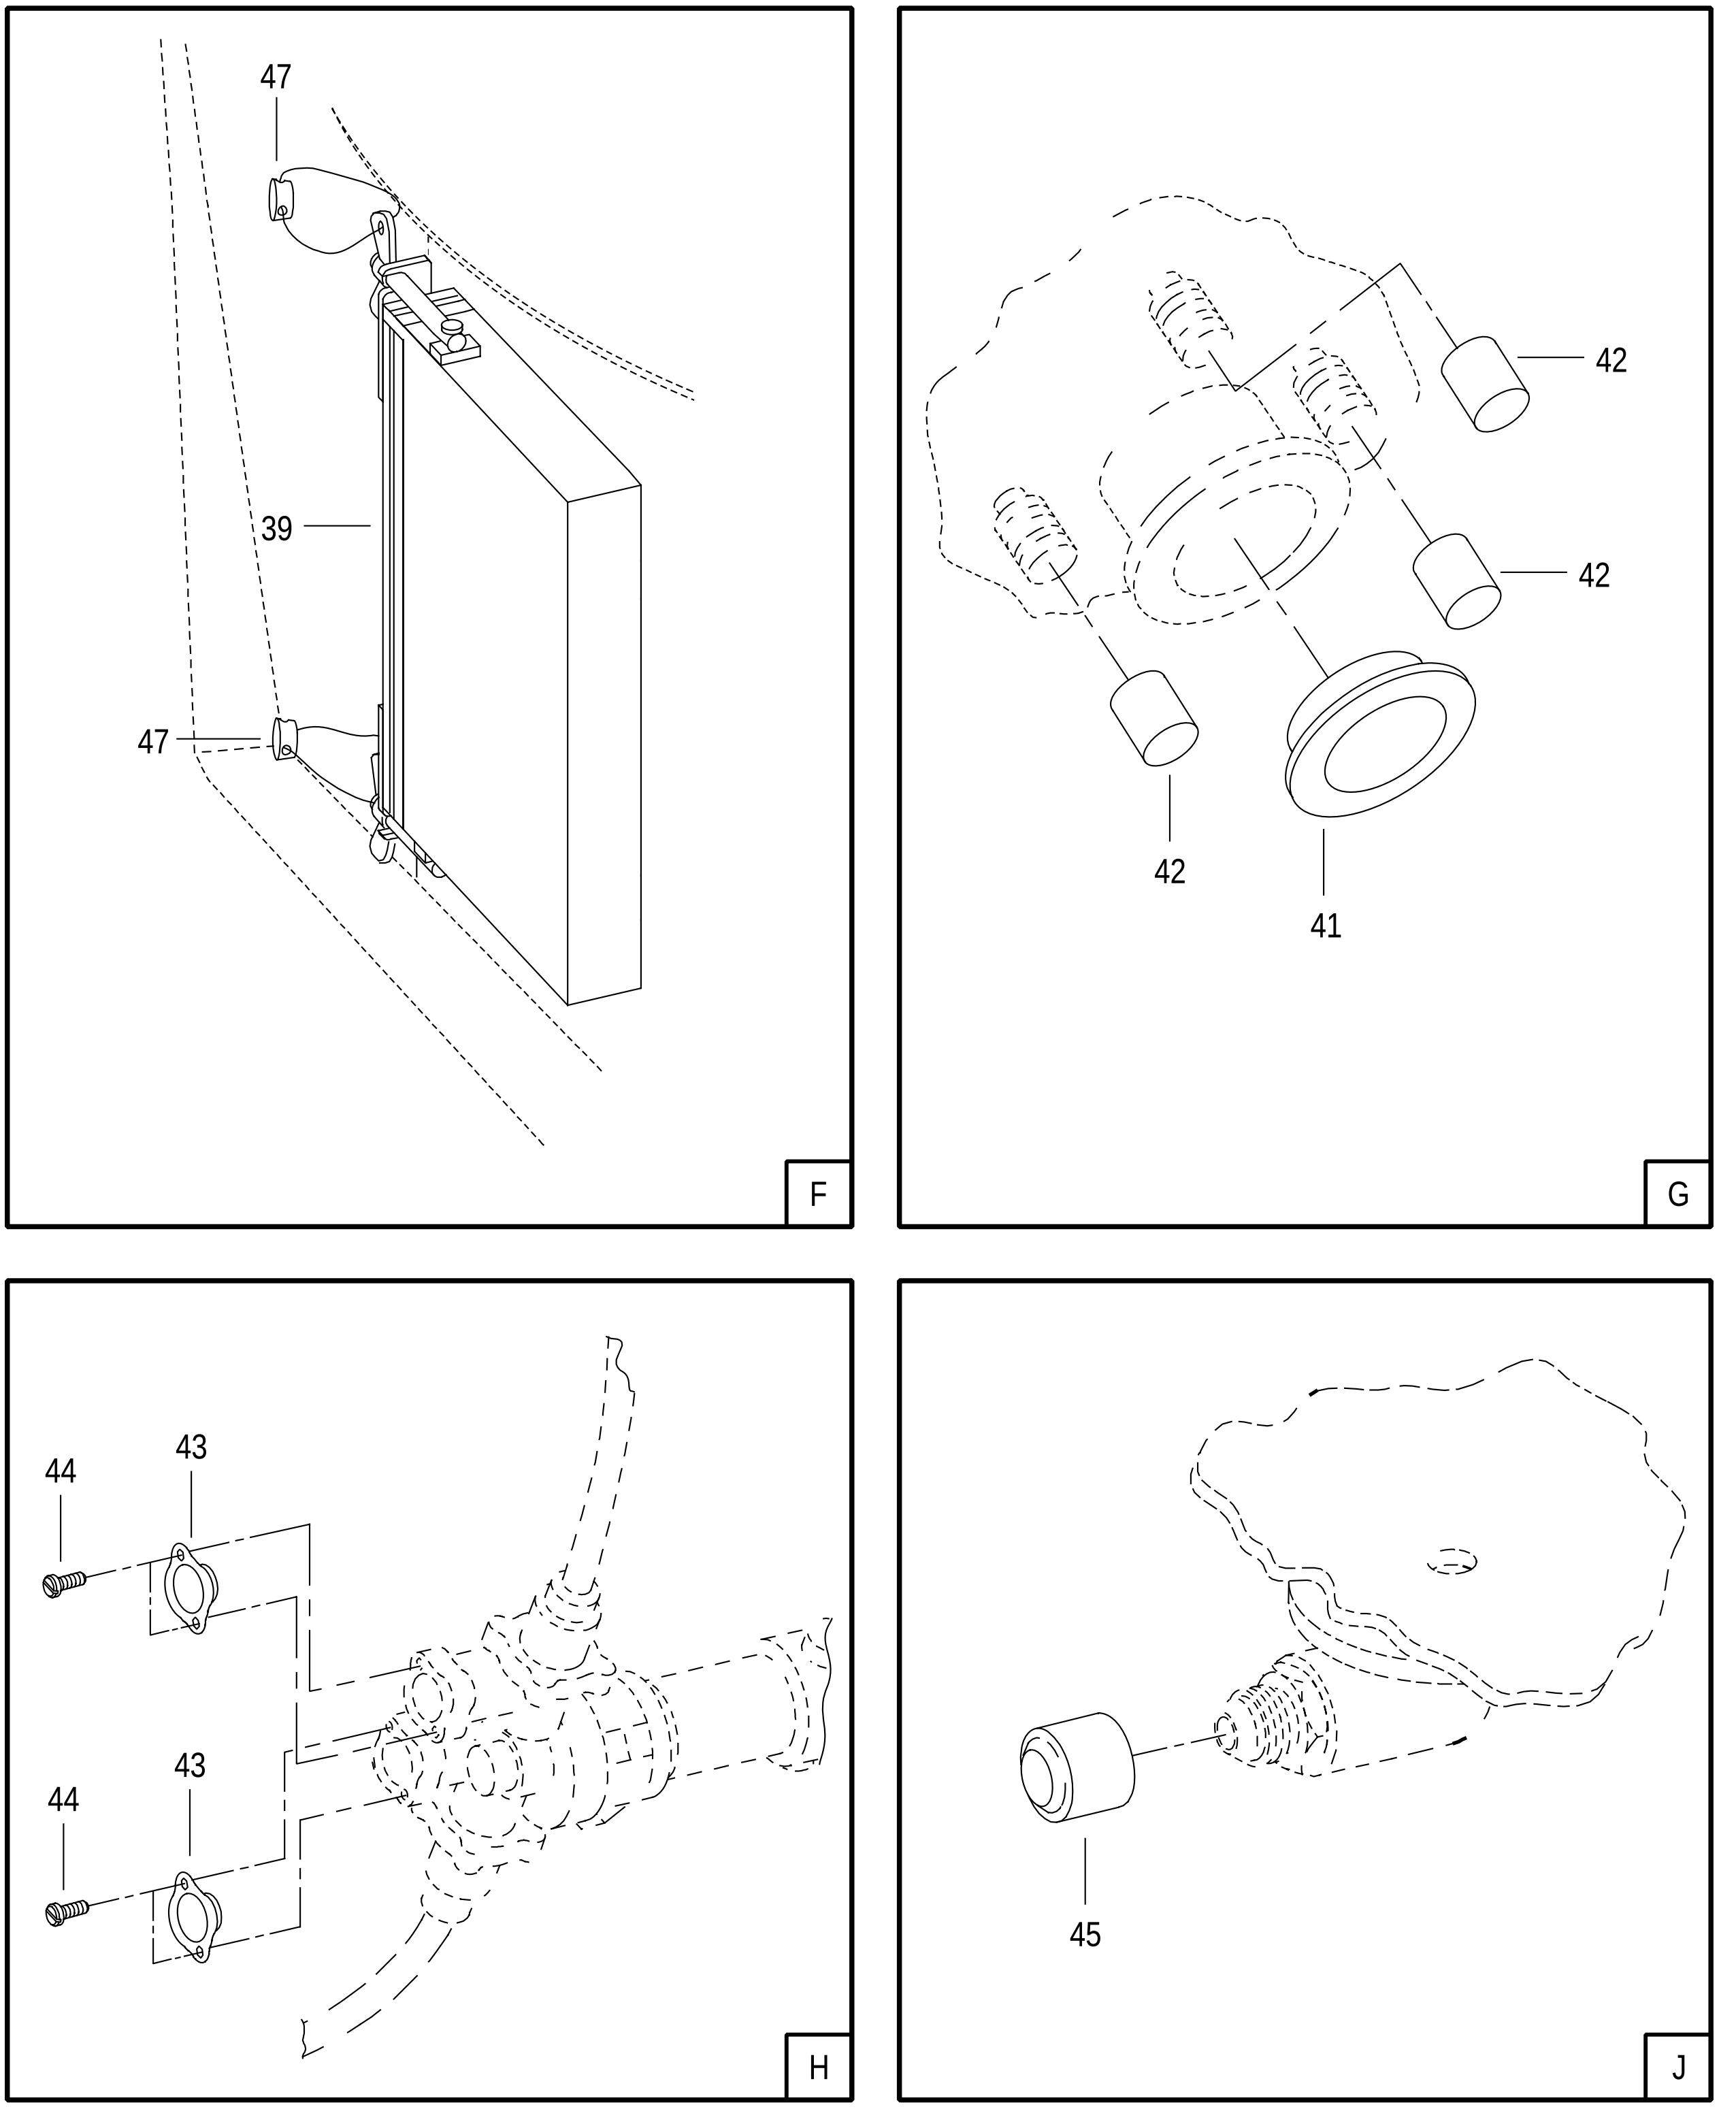


FIGURE 113. AUGMENTOR DUCT AND NOZZLE MODULE CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS
(SHEET 3 OF 3)

FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
113	NO NUMBER		AUGMENTOR DUCT AND NOZZLE MODULE . . . . CONTAINER ASSY AND CONSUMABLE PACKAGING PARTS SEE FIG. 1-23 FOR NHA	REF		
	P49735	52661	. CONTAINER ASSY-AUGMENTOR DUCT AND . . . . . . NOZZLE MODULE	1		PAFFF
- 1	P52715 *	52661	.. PLATE-IDENTIFICATION, SPARE PARTS . . . . SHIPPING CONTAINER	2		PAFZZ
- 2	P53370	52661	.. CONTAINER HALF ASSY-METAL, REUSABLE, ... UPPER PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
- 3	34S02-1-1AA	71286	... PIN-TURNLOCK FASTENER STUD . . . . P&WA PART NO. P4015046	56		PAFZZ
- 4	34S01-3-1AA	71286	... STUD-TURNLOCK FASTENER . . . . P&WA PART NO. P48690	56		PAFZZ
- 5	P49738	52661	.. PACKING-PREFORMED, REUSABLE CONTAINER . .	1		PAFZZ
- 6	FE200170A	8B707	.. STRAP-AUGMENTOR . . . . P&WA PART NO. P52794	1		PAFBZ
- 7	MS35650-3312	96906	.. NUT (AP)	1		PAFZZ
- 8	MS35338-45	96906	.. WASHER (AP)	1		PAFZZ
- 9	P50854	52661	.. SUPPORT-AUGMENTOR DUCT AND NOZZLE, ... REAR	1		PAFBZ
- 10	MS90725-115	96906	.. SCREW (AP)	4		PAFZZ
- 11	MS35338-48	96906	.. WASHER (AP)	4		PAFZZ
- 12	MS51967-14	96906	.. NUT (AP)	4		PAFZZ
- 13	P49001	52661	.. PLATE-POSITIONING, AUGMENTOR DUCT AND . . NOZZLE	2		PAFBZ
- 14	MS90726-35	96906	.. SCREW (AP)	13		PAFZZ
- 15	MS35338-45	96906	.. WASHER (AP)	13		PAFZZ
- 16	P48998	52661	.. SUPPORT-AUGMENTOR DUCT AND NOZZLE, ... FRONT	1		PAFBZ
- 17	MS90726-35	96906	.. SCREW (AP)	4		PAFZZ
- 18	MS35338-45	96906	.. WASHER (AP)	4		PAFZZ
- 19	MS51967-14	96906	.. NUT (AP)	4		PAFZZ
- 20	P48997	52661	.. RAIL-AUGMENTOR, DUCT AND NOZZLE, RIGHT . . .	1		PAFZZ
- 21	MS51922-37	96906	.. NUT (AP)	2		PAOZZ
- 22	P49814	52661	.. RAIL-AUGMENTOR, DUCT AND NOZZLE, LEFT	1		PAFZZ
- 23	MS51922-37	96906	.. NUT (AP)	2		PAOZZ
- 24	J-5682-158	76005	.. MOUNT-RESILIENT . . . . P&WA PART NO. P48995	4		PAFZZ
- 25	MS51922-37	96906	.. NUT (AP)	1		PAOZZ
- 26	TA346-P50844	08992	.. INDICATOR-HUMIDITY, PLUG . . . . P&WA PART NO. P50844	1		PAFZZ
- 27	TA446-P47412	08992	.. WINDOW-OBSERVATION . . . . P&WA PART NO. P47412	2		PAFZZ
- 28	MS20913-1S	96906	.. PLUG	1		PAFZZ
- 29	TA330-25-10-R	08992	.. VALVE-AIR PRESSURE RELIEF, CONTAINER . . . . . . P&WA PART NO. P37145	1		PAFZZ
- 30	P49212	52661	.. COVER-ROTOR AND STATOR CONTAINER	1		PAFZZ
- 31	MS51967-8	96906	.. NUT (AP)	4		PAOZZ
- 32	MS35338-46	96906	.. WASHER (AP)	4		PAFZZ
- 33	MS90725-60	96906	.. SCREW (AP)	4		PAFZZ
- 34	MS29561-437	96906	.. PACKING	1		PAFZZ
- 35	MS20913-6S	96906	.. PLUG	1		PAFZZ
- 36	P53371	52661	.. CONTAINER HALF-METAL, REUSABLE, LOWER, . . ASSY OF PARTIAL BREAKDOWN FOLLOWS	1		PAFFF
- 37	34R01-1-1AA	71286	... RECEPTACLE-TURNLOCK FASTENER, BASE . . . . . P&WA PART NO. P4015045	56		PAFZZ

FIGURE & INDEX NUMBER		PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
113 - 38	=	9SP-100-R6-11	29666	... RIVET-BLIND, COUNTERSUNK .... 0.188 DIA X 0.688 IN. GRIP LENGTH (AP) P&WA PART NO. P4030568	2		PAFZZ
	=	NAS1399C6A12	80205	... RIVET-BLIND, COUNTERSUNK .... 0.190 DIA X 0.750 IN. GRIP LENGTH (AP)	2		PAFZZ
	=	MS9318-220	96906	... RIVET (AP)	2		PAFZZ
- 39		P47431	52661	... BOX-ENGINE DATA	1		PAFZZ
		P4021592	52661	. PACKAGING PARTS-CONSUMABLE, AUGMENTOR . MODULE	1		PAFZZ
- 40		P53362	52661	.. COVER-AUGMENTOR AND NOZZLE	1		KF
- 41		P12780	52661	.. CLOSURE-SHIPPING	1		KF
- 42		P11882	52661	.. CAP-SHIPPING CLOSURES	3		KF
- 43		2651545	99877	.. COVER-PROTECTIVE .... P&WA PART NO. P4021567	2		KF
- 44		MS51957-49	96906	.. SCREW (AP)	2		KF
- 45	=	CD-4	99017	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL .. P&WA PART NO. P4021568-01	1		KF
	=	M-312	34662	.. CAP-PROTECTIVE, DUST AND MOISTURE SEAL .. P&WA PART NO. P4021568-01	1		KF
- 46		P8320	52661	.. DESICCANT-16 UNIT, BAGGED	12		KF
- 47		83280	52661	.. SEAL-LEAD, 2 HOLE	3		PADZZ

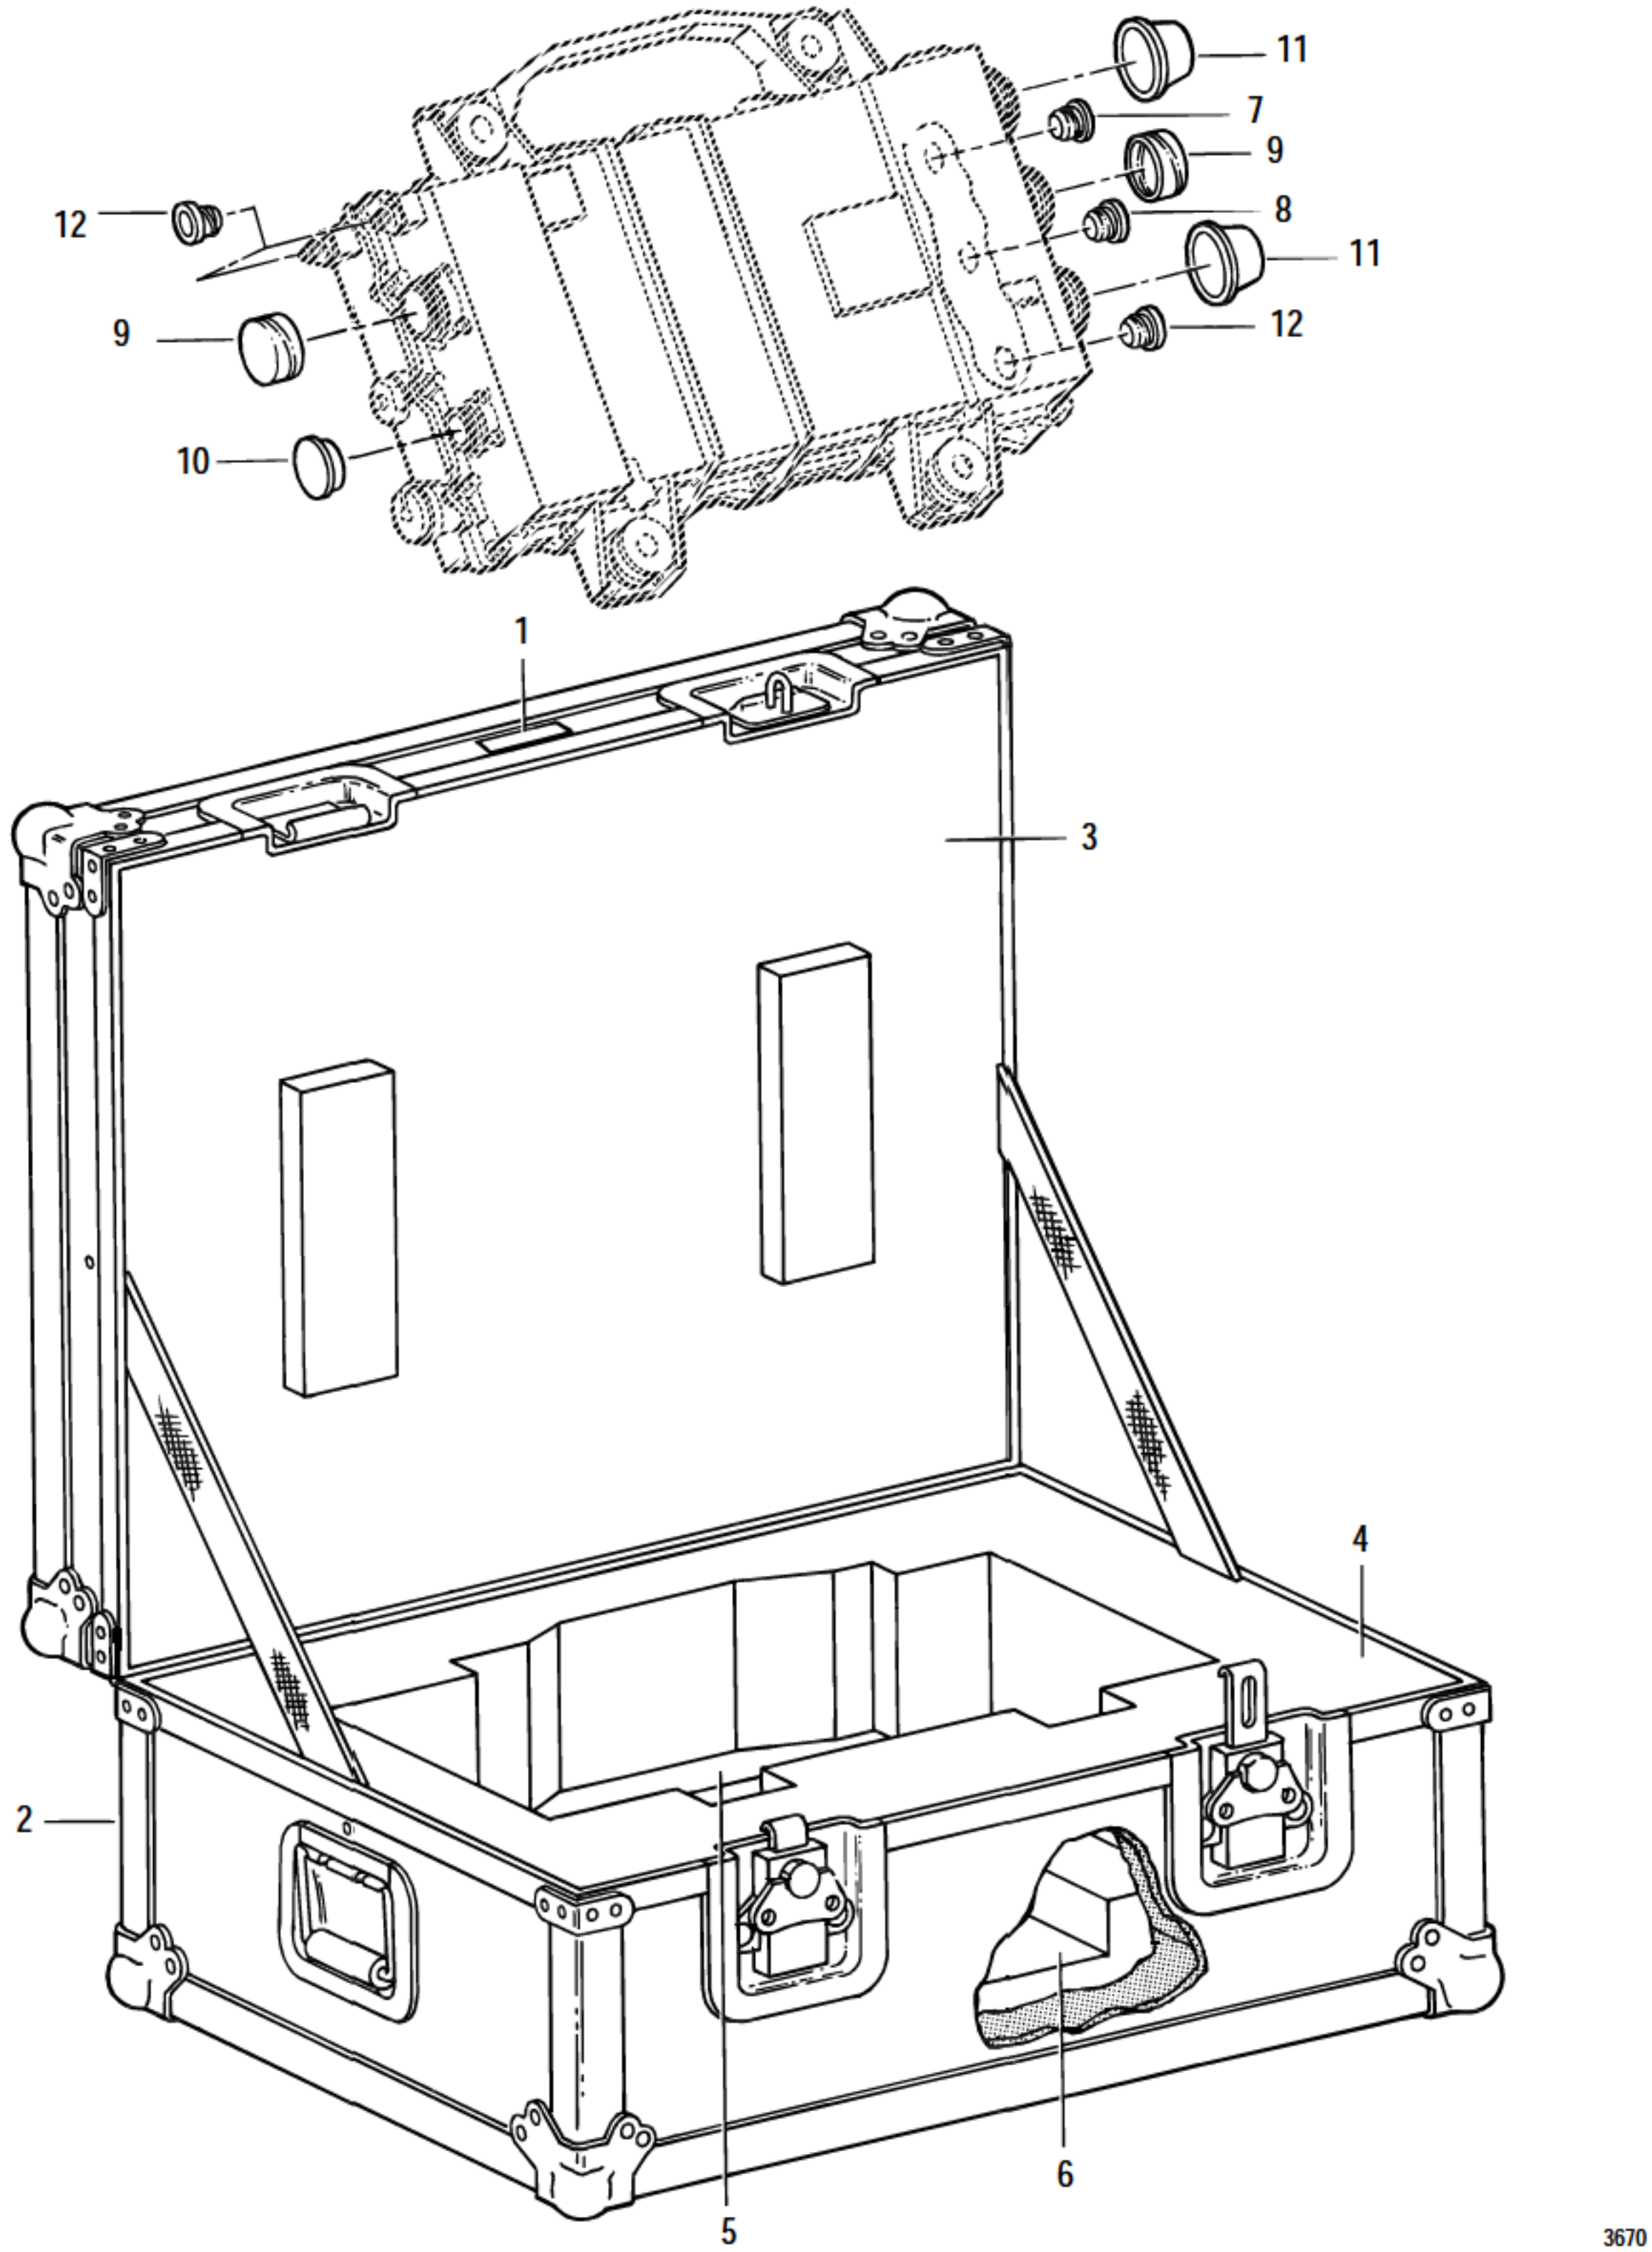


FIGURE 114. DIGITAL ELECTRONIC ENGINE CONTROL CONTAINER

	FIGURE & INDEX NUMBER	PART NUMBER	CAGE	1 2 3 4 5 6 7 DESCRIPTION	UNITS PER ASSY	USABLE ON CODE	SMR
R	114			DIGITAL ELECTRONIC ENGINE CONTROL			
R				CONTAINER			
R		T791873	73030	CASE-ASSY OF, TRANSIT, DEEC	REF		
R				P&W PART NO. P4021623			
R				SEE FIG. 1-24 FOR NHA			
R	- 1	69253-4	52661	. PLATE-IDENTIFICATION	1		
R	- 2	T791867-1	73030	. CASE-TRANSIT, DEEC............................	1		
R		T791838-1	73030	. CUSHION-ASSY OF, TRANSIT CASE, DEEC	1		
R	- 3	T791838-10	73030	.. COVER	1		
R	- 4	T791838-20	73030	.. HOUSING	1		
R	- 5	T791838-30	73030	.. RING	1		
R	- 6	T791838-40	73030	.. PLATE	1		
R		P4021649	52661	PACKAGING PARTS-CONSUMABLE, DEEC	1		
R	- 7	P6617	52661	. PLUG-SHIPPING	1		
R				0.4375-20			
R	- 8	P6616	52661	. PLUG-CLOSURE	1		
R				0.500-20-3B			
R	- 9	P10595	52661	. CAP-SHIPPING	2		
R				1.500-16			
R	- 10	P31106	52661	. PLUG-PROTRUDING, DUST AND MOISTURE SEAL .	1		
R	- 11	P12776	52661	. CAP-PLUG, PROTECTIVE	2		PAOZZ
R	- 12	P6626	52661	. PLUG-SHIPPING	3		
R				0.5625-18			

SECTION III
NUMERICAL INDEX

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP	0003-0017	42 - 23		
OP	0003-0018	42 - 26		
	00855-1500-0001	39 - 7	1	PADZZ
	00855-1502-0001	39 - 8	1	PADZZ
OP	03413-05E010	47 - 34		
OP		47 - 36		
	069000186	71 - 8	1	PAFZZ
	0855GA	39 - 6	1	PAODD
	0944	35 - 3	3	PAOZZ
	0945	57 - 6	1	PAOZZ
	100168-168	34 - 44		PAFZZ
		34 - 46	2	PAFZZ
OP	100553-498	15 - 72		
	104753	5 - 16	14	PAOZZ
	110122-3	34 - 42	1	PAFZZ
OP	110553-031	47 - 12		
OP	110553-308	24 - 2		
OP	110553-476	32 - 25		
OP	110553-500	24 - 1		
OP	110553-504	32 - 25		
OP	110553-506	20 - 34		
OP	110553-508	20 - 35		
OP	110553-512	49 - 1		
OP	110553-516	23 - 9		
OP	110553-522	49 - 17		
OP	110553-524	21 - 18		
OP	110553-528	47 - 12		
OP	110553-540	45 - 5		
OP	110553-542	31 - 27		
OP	110553-544	23 - 8		
OP	110553-620	18 - 16		
OP	110553-662	16 - 7		
	111167-012	32 - 1	2	PAOZZ
	111167-018	67 - 72		PAFZZ
		77 - 54		PAFZZ
		78 - 51		PAFZZ
		78 - 64		PAFZZ
		78 - 72		PAFZZ
		95 - 8		PAFZZ
		95 - 36		PAFZZ
		95 - 60		PAFZZ
		96 - 6		PAFZZ
		96 - 30		PAFZZ
		96 - 51		PAFZZ
		96 - 51	387	
	11155-I	95 - 104		PAFZZ
		96 - 84		PAFZZ
		96 - 84	2	
OP	11156-I	95 - 103		
OP		96 - 83		
	111724	5 - 15	14	PAOZZ
=	1134000-3	108A -4		PAFZZ
=		111A -13	104	PAFZZ
=	1134700	108A -3		PAFZZ
=		111A -12	104	PAFZZ
=	1134701	108A -44	52	PAFZZ
OP	11356-00	63 - 102		
OP	11357-00	63 - 102		
	113699	68 - 6		PAOZZ
		68 - 10		PAOZZ
		68 - 14	3	PAOZZ
	113700	68 - 7		PAOZZ
		68 - 11		PAOZZ
		68 - 15	3	PAOZZ
OP	11409	79 - 14		
OP	11511-00LOW	84 - 12		
	11688	34 - 13	2	PAOZZ
OP	11891-00	68 - 2		
OP	11892-00	67 - 93		
OP	1242001-1	32 - 25		
OP	1242002-1	20 - 34		
OP	1242003-1	20 - 35		
OP	1242004-1	23 - 9		
OP	1242005-1	23 - 8		
OP	1242006-1	49 - 17		
OP	1242007-1	31 - 27		
OP	1242009-1	45 - 5		
OP	1242010-1	18 - 16		
OP	1242014-1	15 - 72		
OP	1242014-2	24 - 1		
OP	1242014-3	49 - 1		
OP	1242014-4	21 - 18		
OP	1242014-5	24 - 2		
OP	1242018-1	47 - 12		
OP	124511	77 - 51		
OP		78 - 53		
OP		95 - 11		
OP		95 - 39		
OP		96 - 8		
OP		96 - 32		
OP	124512	95 - 62		
OP	124514-014	80 - 2		
OP		80 - 12		
OP		80 - 19		
	12617	11 - 25		PAOZZ
		11 - 33		PAOZZ
		11 - 41		PAOZZ
		11 - 49	8	PAOZZ
	13895	11 - 26		PAOZZ
		11 - 34		PAOZZ
		11 - 42		PAOZZ
		11 - 50	8	PAOZZ

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
<	149383-1009		9 - 8	1	PAFZZ
<	149383-1011		9 - 9		PAFZZ
<			10 - 8	2	PAFZZ
<	149383-1013		3 - 47		PAFZZ
<			9 - 10		PAFZZ
<			10 - 9	3	PAFZZ
<	149383-1015		3 - 48		PAFZZ
<			4 - 15		PAFZZ
<			11 - 4	3	PAFZZ
<	149383-1017		5 - 16A		PAFZZ
<			8 - 15		PAFZZ
<			11 - 4A	3	PAFZZ
<	149383-1019		4 - 16		PAFZZ
<			8 - 16	2	PAFZZ
<	149383-1023		7 - 42		PAFZZ
<			9 - 11	2	PAFZZ
<	149383-1025		3 - 49		PAFZZ
<			10 - 10	2	PAFZZ
<	149383-2009		9 - 8	1	PAFZZ
<	149383-2011		6 - 41		PAFZZ
<			7 - 41		PAFZZ
<			9 - 9		PAFZZ
<			10 - 8	4	PAFZZ
<	149383-2013		3 - 47		PAFZZ
<			9 - 10		PAFZZ
<			10 - 9	3	PAFZZ
<	149383-2015		3 - 48		PAFZZ
<			4 - 15		PAFZZ
<			11 - 4	3	PAFZZ
<	149383-2017		5 - 16A		PAFZZ
<			8 - 15		PAFZZ
<			11 - 4A	3	PAFZZ
<	149383-2019		4 - 16		PAFZZ
<			8 - 16	2	PAFZZ
<	149383-2023		7 - 42		PAFZZ
<			9 - 11	2	PAFZZ
<	149383-2025		3 - 49		PAFZZ
<			10 - 10	2	PAFZZ
OP	14J02-40A		57 - 1		
	151611		11 - 37	1	PAOZZ
	151616		11 - 45	1	PAOZZ
	152878		11 - 29	1	PAOZZ
	156010		61 - 16	1	XA
	156776		68 - 5	1	PAOZZ
	156780		68 - 13	1	PAOZZ
	156784		68 - 9	1	PAOZZ
	156858		11 - 53	1	PAOZZ
	171752		58 - 6		PAOZZ
			59 - 18		PAOZZ
			60 - 34		PAOZZ
			60 - 44		PAOZZ
			60 - 57		PAOZZ
			60 - 77		PAOZZ
			60 - 84		PAOZZ
			60 - 90	26	PAOZZ
	1723A64		106A -9	4	
	17335		42 - 20	1	PAOZZ
	17337		42 - 19	1	PAOZZ
	17338		42 - 21	1	PAOZZ
	17351		42 - 18	1	PAOZZ
	175682		48B - 1	1	PAOZZ
OP	18-1935		28 - 7		
	18-1937	#	48 - 17	1	PAOLD
	1814		11 - 24		PAOZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
		11 - 32		PAOZZ
		11 - 40		PAOZZ
		11 - 48	8	PAOZZ
%	198900	49 - 87	AR	PAOZZ
	198901	49 - 87	AR	PAOZZ
	198902	49 - 87	AR	PAOZZ
	198903	49 - 87	AR	PAOZZ
	198904	49 - 87	AR	PAOZZ
	198905	49 - 87	AR	PAOZZ
	198906	49 - 87	AR	PAOZZ
	1B2368	58 - 29		PAOFF
		60 - 3	4	PAOFF
OP	2060110	34 - 8		
OP		89 - 58		
OP		103 - 9A		
S	2068444	3 - 37		
S		4 - 13		
S		11 - 3		
	2072839	63 - 21		PAFZZ
		63 - 26	60	PAFZZ
	2072968	34 - 7	AR	PAFZZ
		89 - 59	AR	PAFZZ
		103 - 9	AR	PAFZZ
	2084693	62 - 29	1	PAFZZ
S	2091029	63 - 21		
	2099409	97 - 7	16	PAFZZ
	2104327	62 - 31	1	PAFZZ
	2108637	103 - 5	2	PAFZZ
	2116034	99 - 26	72	PAFZZ
	2120200	62 - 32	1	XA
	2123848	5 - 26	2	PAOFF
	2146188	101 - 6		PAFZZ
		102 - 6	24	PAFZZ
	2146277	76 - 26	4	PAFZZ
	2146287	82 - 3	3	PAFZZ
	2146417	70 - 36	AR	PADZZ
	2147887	60 - 29	1	PADZZ
	2147888	41 - 6	1	PAOZZ
	2147889	41 - 7	1	PAOZZ
	2147967	60 - 80		PADZZ
		60 - 104		PADZZ
		60 - 108	6	PADZZ
	2150048	90 - 3A		PADZZ
		93 - 13	6	PADZZ
PW	2152845	63 - 32		
	2156866	34 - 10		PAOZZ
		34 - 23	3	PAOZZ
	2159117	3 - 37		PAOZZ
		4 - 13		PAOZZ
		11 - 3	16	PAOZZ
OP	2161910	34 - 8		
OP		89 - 58		
OP		103 - 9A		
OP	2161928	34 - 8		
OP		89 - 58		
OP		103 - 9A		
	2161929	34 - 8	AR	PAFZZ
		89 - 58	AR	PAFZZ
		103 - 9A	AR	PAFZZ
%	217117-1	47 - 43	6	PAOZZ
	217117-2	47 - 43	AR	PAOZZ
	217117-3	47 - 43	AR	PAOZZ
	217117-4	47 - 43	AR	PAOZZ
	217117-5	47 - 43	AR	PAOZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	217137	47 - 39E	1	PAOZZ		113 - 43	14	KF
	217139	47 - 39B	1	PAOZZ	2651925	48 - 46	1	PAOZZ
	217325	47 - 39C	1	PAOZZ	2663787-004	44 - 10N		PAOZZ
	217380	47 - 41	1	PAOZZ		67 - 22G		PAOZZ
	217408-1	47 - 39	1	PAOOO		67 - 41B	9	PAOZZ
	2181046	84 - 21	1	PADZZ	2663787-006	67 - 41	2	PAOZZ
	2184930	95 - 87		PAFZZ	2663848	44 - 10S		PAOZZ
		96 - 65		PAFZZ		67 - 22L	3	PAOZZ
		96 - 65	6		2663863	44 - 10B		PAFZZ
=	22182-0327	43 - 29		PADZZ		67 - 39	3	PAFZZ
=		43 - 31	11	PADZZ	2664763	49 - 47	1	PAOZZ
	226590	34 - 53	2	PAFZZ	2666107	49 - 33	1	PAOZZ
=	22876-2162	43 - 28	10	PADZZ	2666420	49 - 36F	1	PAOZZ
=	22876-2190	43 - 30	1	PADZZ	2666423	49 - 36C	1	PAOZZ
=	22881-1034	43 - 32		PAFZZ	2666425	49 - 36G	1	PAOZZ
=		43 - 39	11	PAFZZ	2666429	49 - 35	1	PAOZZ
=	22881-1042	43 - 33		PAFZZ	2666431	49 - 36H	1	PAOZZ
=		43 - 40	9	PAFZZ	2666850-10	49 - 69		PAOZZ
=	22896-3151	43 - 34	3	PAFZZ		49 - 147	2	PAOZZ
	23191	11 - 30	AR	PAOZZ	2666850-11	48 - 45		PAOZZ
		11 - 38	AR	PAOZZ		48B - 5		PAOZZ
		11 - 46	AR	PAOZZ		48B - 9		PAOZZ
		11 - 54	AR	PAOZZ		49 - 44		PAOZZ
=	23556-2508	43 - 27	2	PADZZ		49 - 116	18	PAOZZ
	23705	11 - 28		PAOZZ	2666850-113	44 - 10M		PAFZZ
		11 - 36		PAOZZ		67 - 22F		PAFZZ
		11 - 44		PAOZZ		67 - 40E	4	PAFZZ
		11 - 52	8	PAOZZ	2666850-114	44 - 10J		PAFZZ
	23711	11 - 27		PAOZZ		67 - 22C		PAFZZ
		11 - 35		PAOZZ		67 - 40B	4	PAFZZ
		11 - 43		PAOZZ	2666850-12	49 - 40		PAOZZ
		11 - 51	8	PAOZZ		49 - 112		PAOZZ
	2638218	49 - 36K		PAOZZ		67 - 38D		PAOZZ
		49 - 99	2	PAOZZ		67 - 41L	16	PAOZZ
	2638219	49 - 36L		PAOZZ	2666850-132	67 - 39D	1	PAFZZ
		49 - 100	2	PAOZZ	2666850-134	44 - 10F		PAFZZ
%	2642752	48 - 42		PAOZZ		44 - 10T		PAFZZ
%		48B - 10	4	PAOZZ		67 - 22M		PAFZZ
	2642753	48 - 42		PAOZZ		67 - 41F	6	PAFZZ
		48B - 10	4	PAOZZ	2666850-136	49 - 70		PAOZZ
	2642754	48 - 42		PAOZZ		49 - 148	2	PAOZZ
		48B - 10	4	PAOZZ	2666850-140	49 - 79		PAOZZ
	2643993	49 - 90	1	PAOZZ		49 - 134	2	PAOZZ
	2646514	64 - 10		PAFZZ	2666850-145	49 - 74		PAOZZ
		64A - 10	7	PAFZZ		49 - 130	2	PAOZZ
	2646526	48 - 7		PAOZZ	2666850-22	44 - 10E		PAFZZ
		48 - 13	2	PAOZZ		67 - 39C	3	PAFZZ
	2646556	48 - 9		PAOFF	2666850-23	49 - 61		PAOZZ
		48 - 15		PAOFF		49 - 126	2	PAOZZ
		62 - 16	7	PAOFF	2666850-27	49 - 56		PAOZZ
	2648982	49 - 86	1	PAOZZ		49 - 121	2	PAOZZ
	2648983	49 - 88	1	PAOZZ	2666889	67 - 38E	2	PAOZZ
	2649313	44 - 10K		PAFZZ	2667590	49 - 57		KF
		67 - 22D		PAFZZ		49 - 123	2	KF
		67 - 40C	4	PAFZZ	2667765	49 - 52		KF
	2649314	44 - 10L		PADZZ		49 - 117	2	KF
		67 - 22E		PADZZ	2667998-15	49 - 53		PAOZZ
		67 - 40D	4	PADZZ		49 - 118	2	PAOZZ
	2649812	64 - 6		PAFZZ	2667998-17	49 - 54		PAOZZ
		64A - 6	5	PAFZZ		49 - 119	2	PAOZZ
	2649820	48 - 8		PAOZZ	2667998-26	49 - 55		PAOZZ
		48 - 14	2	PAOZZ		49 - 120	2	PAOZZ
	2651545	64 - 8		PAOZZ	2667999-8	49 - 59		PAOZZ
		64A - 8		PAOZZ		49 - 125	2	PAOZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
2669873	49 - 71		KF		111 - 29		PAFZZ
	49 - 129	2	KF		112 - 50		PAFZZ
2670032	49 - 95	1	PAOZZ		113 - 37	192	PAFZZ
2670036	49 - 91	1	PAOZZ	= 34S01-2-18A	108A -44	52	PAFZZ
2670053	67 - 38F	2	PAOZZ	34S01-3-1AA	108 - 5		PAFZZ
2670128	49 - 98	1	PAOZZ	=	108A -4		PAFZZ
2670426-15	49 - 46	1	PAOZZ		109 - 5		PAFZZ
2670868	49 - 45	1	PAOZZ		111 - 13		PAFZZ
2670890-10	49 - 81		PAOZZ	=	111A -13		PAFZZ
	49 - 136	3	PAOZZ		112 - 13		PAFZZ
2670890-5	49 - 34		PAOZZ		113 - 4	296	PAFZZ
	67 - 38G	3	PAOZZ	34S02-1-1AA	108 - 4		PAFZZ
2670890-8	49 - 75	1	PAOZZ	=	108A -3		PAFZZ
2670980-20	49 - 80		PAOZZ		109 - 4		PAFZZ
	49 - 135	2	PAOZZ		111 - 12		PAFZZ
2671270	44 - 10U	1	PAFLD	=	111A -12		PAFZZ
2671274	67 - 39G	1	PAFBZ		112 - 12		PAFZZ
2671708	67 - 22N		PAFLD		113 - 3	296	PAFZZ
	67 - 41N	2	PAFLD	351000A	F 49 - 139	1	PAODD
2672058	49 - 76		KF	351001A	F 49 - 121	1	PAODD
	49 - 133	2	KF	351002A	F 49 - 116	1	PAODD
2672298	48B - 4			351003A	F 49 - 136	1	PAODD
<	67 - 41K	2		351005A	F 49 - 108		PAODD
2672301	48B - 6	1	PAOZZ		F 67 - 41F	2	PAODD
2672571	49 - 62		KF	351006A	F 49 - 130	1	PAODD
	49 - 140	2	KF	351007A	F 49 - 126	1	PAODD
2673931	48 - 10		XA	< 351015A	48 - 50		PAOLD
	48 - 16	2	XA		48B -	REF	PAOLD
2675244	64 - 3		PAOZZ			1	
	64A - 3	5	PAOZZ	351027A	F 48B -	1	PAOZZ
2676714	F 48 - 5		PAOOO	351035A	F 67 - 41F	1	PAOZZ
	F 48 - 11	2	PAOOO	351044A	49 - 112	1	PAODD
2678089	48 - 38	1	PADLD	= 352194	18 - 10		PAFZZ
2678723	64 - 2		PAOZZ	=	32 - 34	4	PAFZZ
	64A - 2	5	PAOZZ	354581	15 - 59	1	PAFZZ
2684928	48 - 38	1	PAFLD	3551014-02	52 - 6		PAFZZ
2703-200	57 - 4	1	PAFBZ		52 - 12		PAFZZ
2710-200MB	57 - 5	1	PAOZZ		52 - 15	23	PAFZZ
2718129	48 - 40		KF	OP 3567762-3002	28 - 7		
	48B - 8	2	KF	3591-3CNX.285	68 - 28	25	PADZZ
2718183	49 - 37		KF	OP 3591-3TN-0380	59 - 24		
	49 - 111		KF	OP 3591-3TN0285	71 - 6		
	67 - 38A		KF	360193	14 - 21		PAFZZ
	67 - 41M	4	KF		15 - 25		PAFZZ
2718230	49 - 82		KF		24 - 24E		PAFZZ
	49 - 139	2	KF		31 - 10		PAFZZ
2718247	49 - 41		KF		32 - 42		PAFZZ
	49 - 115	2	KF		37 - 21		PAFZZ
PW 277398	89 - 13				37 - 24		PAFZZ
< 29812-0201	43 - 41	1	PAOZZ		58 - 80D	9	PAFZZ
310634	34 - 1	2	PAOZZ	360583	89 - 61	1	PAFZZ
3186-44	51 - 57	2	PAFZZ	360715	30 - 6		PAFZZ
32322-7010	43 - 35	1	PAFZZ		37 - 42	2	PAFZZ
32323-1002	43 - 37	1	PAFZZ	37536-1351	43 - 25	1	PAFDD
32323-1003	43 - 38	1	PAFZZ	379530	3 - 36		PAOZZ
325117	34 - 51	1	PAFZZ		4 - 12		PAOZZ
32558-5007	43 - 26	2	PADZZ		11 - 2	16	PAOZZ
327455 #	34 - 39	1	PAFDD	OP 4000606	82 - 24		
329205 #	34 - 39	1	PAFDD	OP 4000609	82 - 16		
339S19	48 - 47	1	PAOZZ	OP 4000610	82 - 16		
344137	49 - 92	1	PAOZZ	4000915	67 - 64	2	PAFZZ
34831-1613	43 - 36	1	PAFDD	4001006	72 - 7	8	PADZZ
34R01-1-1AA	108 - 116		PAFZZ	4001221	63 - 87	15	PAFZZ
	109 - 70		PAFZZ	OP 4001273	60 - 48		

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP	4001274	60 - 48		
OP	4001275	60 - 48		
OP	4001276	60 - 32		
OP	4001277	60 - 32		
OP	4001278	60 - 32		
OP	4001280	60 - 112		
OP	4001282	60 - 42		
OP	4001285	60 - 88		
OP	4001286	60 - 88		
OP	4001290	60 - 98		
OP	4001294	60 - 75		
OP	4001296	60 - 75		
OP	4001297	60 - 16C		
OP	4001299	60 - 16C		
	4001518	90 - 3D	1	XA
	4001528	91 - 9	1	PAFLD
	4001529	91 - 4	1	PAFLD
	4001532	90 - 3D	1	XA
	4001619	90 - 4		PAFZZ
		92 - 2		PAFZZ
		93 - 8	24	PAFZZ
	4001624	90 - 2		PAFZZ
		92 - 3		PAFZZ
		93 - 7	12	PAFZZ
%	4001629	90 - 5		PAFZZ
%		92 - 4	2	PAFZZ
	4001629P10	90 - 5		PAFZZ
		92 - 4	2	PAFZZ
	4001629P15	90 - 5		PAFZZ
		92 - 4	2	PAFZZ
	4001629P20	90 - 5		PAFZZ
		92 - 4	2	PAFZZ
	4001629P25	90 - 5		PAFZZ
		92 - 4	2	PAFZZ
%	4001642	93 - 14	2	PAFZZ
	4001642P05	93 - 14	AR	PAFZZ
	4001642P10	93 - 14	AR	PAFZZ
	4001642P15	93 - 14	AR	PAFZZ
	4001681	73 - 2	1	PAFZZ
	4001684	71 - 13B	1	PAFZZ
	4001793	39 - 45		PAFZZ
		39 - 50	2	PAFZZ
	4001794	39 - 47		PADZZ
		39 - 52	2	PADZZ
	4001799	91 - 7	1	PAFDD
	4001857	91 - 6	1	PAFBZ
	4001860	83 - 3	1	PAFZZ
	4001862	83 - 1	1	PAFZZ
	4001863	83 - 8	1	PAFZZ
	4001865	83 - 6	1	PAFZZ
	4001874	82 - 13	1	PAFZZ
	4001878	82 - 11	1	PAFZZ
	4001879	82 - 12	1	PAFZZ
	4001882	82 - 23	1	PAFZZ
	4001883	82 - 21	1	PAFBZ
	4001884	82 - 22	1	PAFZZ
	4001885	82 - 25	1	PAFZZ
	4001886	82 - 26	1	PAFZZ
	4001891	83 - 15	5	PAFZZ
	4001894	94 - 11	1	PAFZZ
	4002452	87 - 10	1	PAFZZ
%	4002454	101 - 5		PAFZZ
%		102 - 5	2	PAFZZ
	4002454P10	101 - 5	AR	PAFZZ
		102 - 5	AR	PAFZZ
	4002454P15	101 - 5	AR	PAFZZ
		102 - 5	AR	PAFZZ
	4002454P20	101 - 5	AR	PAFZZ
		102 - 5	AR	PAFZZ
	4002454P25	101 - 5	AR	PAFZZ
		102 - 5	AR	PAFZZ
	4002513	87 - 6	1	PAFBZ
	4002706	60 - 52	1	PADLD
	4002707	60 - 22	1	PAOZZ
	4002710	60 - 97	1	PADZZ
	4002711	60 - 96	1	PADZZ
	4002712	60 - 85	1	PADZZ
	4002713	60 - 86	1	PADZZ
	4002716	60 - 25	1	PAOZZ
	4002718	60 - 71	1	PADLD
	4002719	60 - 72	1	PADDD
	4002720	60 - 30		PADZZ
		60 - 73	2	PADZZ
	4002724	60 - 47	1	PADLD
	4002725	60 - 46	1	PADZZ
	4002729	60 - 41	1	PADZZ
	4002737	60 - 20	1	PAOBZ
	4002824	81 - 10	1	PAFZZ
	4002867	58 - 93	8	PAFZZ
	4002886	53 - 5		PAOZZ
		53 - 9		PAOZZ
		53 - 13		PAOZZ
		53 - 17		PAOZZ
		53 - 21		PAOZZ
		53 - 30		PAOZZ
		53 - 45B		PAOZZ
		53 - 48B		PAOZZ
		53 - 64B		PAOZZ
		53 - 65B	32	PAOZZ
	4003624	60 - 28	1	PADZZ
OP	4003686	60 - 112		
	4003694	61 - 17	4	PADZZ
	4003695	61 - 5	1	PADZZ
	4004056	62 - 35	1	PAFZZ
	4004057	62 - 37	1	PAFZZ
	4004058	62 - 38	1	PAFZZ
	4004060	62 - 36	2	PAFZZ
OP	4004200	60 - 98		
	4004816	44 - 9		PAOZZ
		67 - 18	4	PAOZZ
	4004913	67 - 30	1	PAOZZ
OP	4005227	62 - 23		
	4006262	72 - 8	1	PAFZZ
	4006266	89 - 16	1	PAFZZ
=	4006311	62 - 19	20	PAOZZ
	4006660	58 - 89	4	PAOZZ
	4006661	58 - 90	4	PAFZZ
	4006717	35 - 16	1	PAOZZ
	4007021	71 - 21	4	PAFZZ
	4007054	87 - 5	1	PAFZZ
	4007085	72 - 3	8	PAFZZ
	4007117	55 - 33	1	PAOZZ
	4007133	46 - 13	1	PAOZZ
	4007568	87 - 9	1	PAFBZ
	4008581	68 - 27	3	PAFZZ
	4009527	101 - 4		PAFZZ
		102 - 4	24	PAFZZ
	4009663	94 - 1	2	PAFZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP 4009751	60 - 23			4015774	67 - 36	1	PAOZZ
OP 4009752	60 - 27			4016238	55 - 27	2	PAOBZ
4009810	95 - 15		PAFZZ	4016239	55 - 25	1	PAOZZ
	95 - 20		PAFZZ	4016241	55 - 29	1	PAOBZ
	96 - 12		PAFZZ	4016296	26 - 3	1	PAOZZ
	96 - 17		PAFZZ	4016562	F 34 - 5		XA
	96 - 17	4			34 - 5		
4010079	73 - 3	1	PAFDD		34 - 21	2	
4010237	91 - 3	1	PAFZZ	4016565	34 - 5		
4010238	91 - 2	1	PAFZZ		34 - 21		
4010239	91 - 1	1	PAFZZ		F 35 - 13		XA
4010240	39 - 48	1	PADZZ		35 - 13	1	
4010241	39 - 46	1	PADZZ	4016599	44 - 14	2	PAOZZ
4010242	F 39 - 43	1	PAFDD	PW 4016649	58 - 86		
4010246	73 - 4	1	PAFZZ	4016861	67 - 73	25	PAFZZ
4010496	42 - 31	1	PAFZZ	4016910	57 - 13		PAOZZ
4010497	42 - 29	1	PAOFF		57 - 20	3	PAOZZ
4010519	42 - 32	1	PAFZZ	4016982	83 - 2	1	PAFZZ
4010520	42 - 30	1	PAFZZ	4017861	58 - 14	1	PAOBZ
4010797	82 - 14	1	PAFZZ	4017949	60 - 111	1	PADLD
4011105	62 - 24	5	PAFZZ	4018063	44 - 35	3	PAOZZ
4011110	62 - 25	5	PAFZZ	4018067	44 - 32	1	PAOZZ
4011121	62 - 21	5	PAFBZ	4018156	40 - 1	2	PAOZZ
4011122	62 - 22	5	PAFBZ	4018334	24 - 29	1	PAOBZ
OP 4011139	62 - 23			4018338	62 - 8	2	PAFBZ
4011410	37 - 51	1	PAOBZ	4018374	24 - 36	2	PAOZZ
4011411	37 - 49	1	PAOZZ	4018381	92 - 5	1	PAFLD
4011412	37 - 56	1	PAOFF	4018382	72 - 4	1	PAFLD
4011887	32 - 2	2	PAOBZ	4018387	32 - 5	1	PAOBZ
4011891	37 - 57	1	PAFZZ	4018466	F 67 - 63		XA
4012006	48 - 3		PAOZZ		67 - 63	1	
	62 - 12	24	PAOZZ	4018467	F 67 - 63		XA
4012272	35 - 19	1	PAOZZ		67 - 63	1	
OP 4012468	92 - 5			4018610	90 - 9	3	PADZZ
4012495	93 - 12	1	XA	4018614	52 - 3	3	PAOZZ
OP 4012501	92 - 5			PW 4018949	70 - 3		
4013069	30 - 38	2	PAOBZ	PW	70 - 18		
% 4014692	70 - 37	AR	XC	4019254	39 - 28	2	PAFZZ
4014692CL1	70 - 37	AR	PADZZ	402004	60 - 45	1	PADZZ
4014692CL2	70 - 37	AR	PADZZ	% 4020052	61 - 13	6	PAFZZ
4014692CL3	70 - 37	AR	PADZZ	4020052P12	61 - 13	AR	PAFZZ
4014692CL4	70 - 37	AR	PADZZ	4020052P3	61 - 13	AR	PAFZZ
% 4014693	70 - 38	AR	XC	4020052P6	61 - 13	AR	PAFZZ
4014693CL1	70 - 38	AR	PADZZ	4020052P9	61 - 13	AR	PAFZZ
4014693CL2	70 - 38	AR	PADZZ	% 4020056	61 - 10	32	PAFZZ
4014693CL3	70 - 38	AR	PADZZ	4020056P12	61 - 10	AR	PAFZZ
4014693CL4	70 - 38	AR	PADZZ	4020056P3	61 - 10	AR	PAFZZ
4014693CL5	70 - 38	AR	PADZZ	4020056P6	61 - 10	AR	PAFZZ
4014749	59 - 4		PAOZZ	4020056P9	61 - 10	AR	PAFZZ
	59 - 21		PAOZZ	% 4020057	61 - 3	4	PAFZZ
	60 - 81		PAOZZ	4020057P12	61 - 3	AR	PAFZZ
	60 - 105		PAOZZ	4020057P3	61 - 3	AR	PAFZZ
	60 - 109	11	PAOZZ	4020057P6	61 - 3	AR	PAFZZ
4014754	72 - 15	4	PADZZ	4020057P9	61 - 3	AR	PAFZZ
4014755	72 - 4A	1	XA	PW 4020265	62 - 14		
4014756	F 72 - 4		XA	4020637	34 - 36		PAOZZ
	72 - 4	1			35 - 10	2	PAOZZ
4014757	F 72 - 4		XA	4020638	34 - 38		PAOZZ
	72 - 4	1			35 - 12	8	PAOZZ
4014758	72 - 6	4	PADZZ	4020640	34 - 33		PAOZZ
4014767	72 - 5	4	PADZZ	S	34 - 33		
4014768	72 - 16	4	PADZZ		35 - 8		PAOZZ
4015507	58 - 4	1	PAOZZ	S	35 - 8	2	
4015508	58 - 1	1	PAOZZ	4020643	34 - 24		PAOZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4020643	35 - 4	2	PAOZZ
4020644	34 - 26		PAOZZ
	35 - 6	2	PAOZZ
4020685	63 - 98	15	PAFZZ
4020727	55 - 42	6	PAFZZ
4020969	28 - 3	1	PAOZZ
4021692	72 - 1	4	PAFZZ
4021784	71 - 15	1	PAFZZ
4021812	34 - 56		PAOZZ
	67 - 66		PAOZZ
	76 - 1		PAOZZ
	93 - 1	82	PAOZZ
4022079	58 - 68	1	PAOZZ
4022091	55 - 34	1	PAOZZ
4022183	24 - 31	1	PAOZZ
4022304	71 - 14	1	PAFZZ
4022340	60 - 94	1	PADZZ
4022400	83 - 7	1	PAFZZ
4022460	68 - 26	1	PAFZZ
4022667	83 - 5		PADZZ
	83 - 14	4	PADZZ
4022668	83 - 13	1	PAFLD
4022669	83 - 4	1	PAFLD
4022709	44 - 6		PAOZZ
	67 - 4		PAOZZ
	67 - 20		PAOZZ
	67 - 35	8	PAOZZ
4023115	1 - 5		PAOZZ
	1 - 7		PAOZZ
	3 - 1		PAOZZ
	3 - 6		PAOZZ
	3 - 12		PAOZZ
	3 - 15		PAOZZ
	3 - 18		PAOZZ
	3 - 20		PAOZZ
	3 - 23		PAOZZ
	3 - 30		PAOZZ
	3 - 33		PAOZZ
	3 - 41		PAOZZ
	3 - 44		PAOZZ
	4 - 2		PAOZZ
	4 - 5		PAOZZ
	4 - 7		PAOZZ
	4 - 10		PAOZZ
	5 - 3		PAOZZ
	5 - 5		PAOZZ
	5 - 8		PAOZZ
	5 - 10		PAOZZ
	5 - 12		PAOZZ
	5 - 19		PAOZZ
	6 - 6		PAOZZ
	6 - 9		PAOZZ
	6 - 16		PAOZZ
	6 - 22		PAOZZ
	6 - 27		PAOZZ
	6 - 34		PAOZZ
	6 - 36		PAOZZ
	7 - 3		PAOZZ
	7 - 6		PAOZZ
	7 - 9		PAOZZ
	7 - 9B		PAOZZ
	7 - 11		PAOZZ
	7 - 16		PAOZZ
	7 - 21		PAOZZ
	7 - 23		PAOZZ
	7 - 26		PAOZZ
	7 - 36	REF	PAOZZ
	8 - 6		PAOZZ
	8 - 9		PAOZZ
	8 - 12		PAOZZ
	9 - 2		PAOZZ
	9 - 5		PAOZZ
	10 - 2		PAOZZ
	10 - 5		PAOZZ
	11 - 10		PAOZZ
	11 - 13		PAOZZ
	11 - 15		PAOZZ
	11 - 20		PAOZZ
	13 - 2		PAOZZ
	13 - 5		PAOZZ
	13 - 31		PAOZZ
	13 - 33		PAOZZ
	14 - 2		PAOZZ
	14 - 6		PAOZZ
	14 - 10		PAOZZ
	14 - 13		PAOZZ
	14 - 18		PAOZZ
	15 - 2		PAOZZ
	15 - 8		PAOZZ
	15 - 13	REF	PAOZZ
	15 - 15		PAOZZ
	15 - 20		PAOZZ
	15 - 30		PAOZZ
	15 - 44		PAOZZ
	15 - 50		PAOZZ
	15 - 53		PAOZZ
	15 - 61		PAOZZ
	15 - 67		PAOZZ
	15 - 69		PAOZZ
	16 - 3		PAOZZ
	17 - 4		PAOZZ
	18 - 11		PAOZZ
	19 - 1		PAOZZ
	20 - 2		PAOZZ
	20 - 4		PAOZZ
	20 - 7		PAOZZ
	20 - 9		PAOZZ
	20 - 12		PAOZZ
	20 - 17		PAOZZ
	20 - 18		PAOZZ
	20 - 20		PAOZZ
	20 - 25		PAOZZ
	20 - 29		PAOZZ
	21 - 1		PAOZZ
	21 - 6		PAOZZ
	21 - 7B	REF	PAOZZ
	21 - 7E		PAOZZ
	21 - 14		PAOZZ
	22 - 2		PAOZZ
	22 - 8		PAOZZ
	22 - 10	REF	PAOZZ
	22 - 10B	REF	PAOZZ
	22 - 12		PAOZZ
	22 - 15		PAOZZ
	22 - 27		PAOZZ
	22 - 33		PAOZZ
	23 - 1		PAOZZ
	24 - 34		PAOZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4023115	26 - 6	REF	PAOZZ		44 - 45		PAOZZ
	27 - 1		PAOZZ		46 - 7		PAOZZ
	27 - 10		PAOZZ		47 - 47		PAOZZ
	27 - 14		PAOZZ		48 - 1		PAOZZ
	27 - 16		PAOZZ		48 - 25		PAOZZ
	27 - 19		PAOZZ		48 - 31		PAOZZ
	27 - 24		PAOZZ		48 - 34		PAOZZ
	28 - 5		PAOZZ		49 - 24		PAOZZ
	28 - 12		PAOZZ		51 - 13		PAOZZ
	28 - 15		PAOZZ		51 - 68		PAOZZ
	28 - 18		PAOZZ		51 - 74		PAOZZ
	28 - 21		PAOZZ		55 - 2		PAOZZ
	28 - 26		PAOZZ		55 - 15		PAOZZ
	28 - 27B		PAOZZ		55 - 41		PAOZZ
	28 - 41		PAOZZ		58 - 80A		PAOZZ
	29 - 2		PAOZZ		58 - 98C		PAOZZ
	29 - 11		PAOZZ	=	62 - 19		PAOZZ
	29 - 13		PAOZZ		62 - 30		PAOZZ
	29 - 15		PAOZZ		62 - 42		PAOZZ
	29 - 23		PAOZZ		63 - 20		PAOZZ
	30 - 10		PAOZZ		63 - 97		PAOZZ
	30 - 12		PAOZZ		67 - 24		PAOZZ
	30 - 17		PAOZZ		67 - 31		PAOZZ
	30 - 24		PAOZZ		67 - 42		PAOZZ
	30 - 42		PAOZZ		67 - 48		PAOZZ
	31 - 2		PAOZZ		71 - 1		PAOZZ
	31 - 5		PAOZZ		71 - 23		PAOZZ
	31 - 7		PAOZZ		73 - 26		PAOZZ
	31 - 13		PAOZZ		73 - 71		PAOZZ
	31 - 19		PAOZZ		73 - 82		PAOZZ
	31 - 22		PAOZZ		74 - 102		PAOZZ
	32 - 10		PAOZZ		74 - 105		PAOZZ
	32 - 13		PAOZZ		74 - 108		PAOZZ
	32 - 40		PAOZZ		77 - 42		PAOZZ
	34 - 2		PAOZZ		78 - 66		PAOZZ
	34 - 14		PAOZZ		79 - 8		PAOZZ
	34 - 28		PAOZZ		79 - 10		PAOZZ
S	34 - 56				79 - 16		PAOZZ
	34 - 62		PAOZZ		82 - 17		PAOZZ
	36 - 1		PAOZZ		100 - 8	1098	PAOZZ
	36 - 6	REF	PAOZZ	4023116	15 - 31	REF	PAOZZ
	36 - 12		PAOZZ		20 - 37		PAOZZ
	36 - 17	REF	PAOZZ		24 - 32		PAOZZ
	36 - 19		PAOZZ		26 - 2		PAOZZ
	36 - 30		PAOZZ		27 - 6		PAOZZ
	36 - 33		PAOZZ		28 - 30		PAOZZ
	36 - 38	REF	PAOZZ		32 - 20		PAOZZ
	37 - 1		PAOZZ		32 - 27		PAOZZ
	37 - 7	REF	PAOZZ		35 - 17		PAOZZ
	37 - 10		PAOZZ		36 - 39	REF	PAOZZ
	37 - 13		PAOZZ		40 - 31		PAOZZ
	37 - 27		PAOZZ		42 - 1		PAOZZ
	37 - 32		PAOZZ		43 - 6		PAOZZ
	37 - 37		PAOZZ		43 - 12		PAOZZ
	37 - 50		PAOZZ		44 - 11		PAOZZ
	37 - 59		PAOZZ		44 - 22		PAOZZ
	37 - 60		PAOZZ		44 - 44		PAOZZ
	40 - 2		PAOZZ		45 - 8		PAOZZ
	40 - 9		PAOZZ		45 - 15		PAOZZ
	40 - 17		PAOZZ		45 - 28		PAOZZ
	41 - 30		PAOZZ		47 - 32		PAOZZ
	42 - 10		PAOZZ		49 - 29		PAOZZ
	43 - 9		PAOZZ		49 - 101		PAOZZ
	44 - 42		PAOZZ		50 - 22		PAOZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4023116	50 - 54		PAOZZ
		51 - 76		PAOZZ
		52 - 2		PAOZZ
		53 - 41		PAOZZ
		53 - 59		PAOZZ
		53 - 61		PAOZZ
		53 - 89		PAOZZ
		53 - 91		PAOZZ
		56 - 1		PAOZZ
		56 - 10		PAOZZ
		56 - 17		PAOZZ
		56 - 24		PAOZZ
		57 - 8		PAOZZ
		57 - 14		PAOZZ
		58 - 2		PAOZZ
		58 - 17		PAOZZ
		58 - 23		PAOZZ
		58 - 32		PAOZZ
		58 - 88		PAOZZ
		60 - 15		PAOZZ
		60 - 35		PAOZZ
		63 - 55		PAOZZ
		63 - 82		PAOZZ
		63 - 93		PAOZZ
		63 - 116		PAOZZ
		67 - 29		PAOZZ
		67 - 105		PAOZZ
		71 - 45		PAOZZ
		74 - 83		PAOZZ
		75 - 68	602	PAOZZ
	4023117	17 - 1		PAOZZ
		63 - 62		PAOZZ
		63 - 79	64	PAOZZ
	4023466	85 - 4	70	PAFZZ
	4023576	60 - 102	1	PADZZ
	4023577	60 - 101	1	PADZZ
	4023660	40 - 35	2	PAOZZ
	4023661	40 - 32	2	PAOZZ
	4023734	90 - 8	3	PADZZ
S	4023966	63 - 6		
	4023967	63 - 5	15	PAFZZ
	4024164	30 - 23	2	PAFBZ
	4024165	58 - 70	1	PAOZZ
	4024519	30 - 1	1	PAOZZ
	4024675	71 - 20	4	PAFBZ
	4024873	63 - 61	15	PAOZZ
	4025256	60 - 95	1	PADLD
	4025382	91 - 8	1	PAFZZ
	4025416	62 - 3	5	PAFZZ
	4025445	82 - 10B	1	PAFBZ
	4025446	82 - 15	1	PAFZZ
	4025712	44 - 34	1	PAOZZ
%	4026020	58 - 30F	4	XC
	4026020P12	58 - 30F	AR	PAFZZ
	4026020P3	58 - 30F	AR	PAFZZ
	4026020P6	58 - 30F	AR	PAFZZ
	4026020P9	58 - 30F	AR	PAFZZ
%	4026021	58 - 30B	4	XA
	4026021P12	58 - 30B	AR	PAFZZ
	4026021P3	58 - 30B	AR	PAFZZ
	4026021P6	58 - 30B	AR	PAFZZ
	4026021P9	58 - 30B	AR	PAFZZ
	4026463	73 - 10	1	PAFZZ
	4026464	73 - 9	1	PAFZZ
	4026467	73 - 1	1	PADZZ
	4026550	46 - 6		PAOZZ
		67 - 106		PAOZZ
		67 - 106A	6	PAOZZ
%	4026685	61 - 14	3	PAFZZ
	4026685P12	61 - 14	AR	PAFZZ
	4026685P3	61 - 14	AR	PAFZZ
	4026685P6	61 - 14	AR	PAFZZ
	4026685P9	61 - 14	AR	PAFZZ
	4026736	67 - 6	2	PAOZZ
	4026825	99 - 44	1	PAFZZ
	4026826	73 - 8		PAFZZ
		99 - 43	2	PAFZZ
	4027238	60 - 31		PADZZ
		60 - 74	2	PADZZ
%	4027527	58 - 30C	12	XA
	4027527P12	58 - 30C	AR	PAFZZ
	4027527P3	58 - 30C	AR	PAFZZ
	4027527P6	58 - 30C	AR	PAFZZ
	4027527P9	58 - 30C	AR	PAFZZ
%	4027528	58 - 30E	4	XC
	4027528P12	58 - 30E	AR	PAFZZ
	4027528P3	58 - 30E	AR	PAFZZ
	4027528P6	58 - 30E	AR	PAFZZ
	4027528P9	58 - 30E	AR	PAFZZ
PW	4027891	63 - 124		
	4028045	40 - 10		PAOZZ
		40 - 13	8	PAOZZ
	4028240	89 - 48	1	PAFZZ
	4028248	73 - 51		PADZZ
		99 - 8	14	PADZZ
	4028827	82 - 20	1	PAFLD
	4028897	58 - 5	2	PAOZZ
	4028969	58 - 30A	1	PADDD
	4028970	30 - 43		PAOZZ
		42 - 11	2	PAOZZ
%	4028971	58 - 30D	1	XC
	4028971P12	58 - 30D	AR	PAFZZ
	4028971P3	58 - 30D	AR	PAFZZ
	4028971P6	58 - 30D	AR	PAFZZ
	4028971P9	58 - 30D	AR	PAFZZ
	4030789	63 - 136		PAFZZ
		66 - 17		PAFZZ
		74 - 81		PAFZZ
		75 - 66	4	PAFZZ
	4030963	82 - 24	1	PAFZZ
	4030964	82 - 16	1	PAFZZ
	4031095	74 - 99	2	PAFBZ
	4031264	58 - 92	2	PAFLD
	4031513	67 - 85	5	PAFZZ
	4031702	58 - 75	1	PAOBZ
	4031790	104 - 19	1	PADZZ
	4031904	89 - 66	1	PAFZZ
	4031916	89 - 57	1	PADZZ
	4032002	60 - 48	1	PADZZ
	4032003	60 - 32	1	PADZZ
	4032004	60 - 42	1	PADZZ
	4032005	60 - 88	1	PADZZ
	4032006	60 - 75	1	PAFZZ
	4032007	60 - 16C	1	PADZZ
	4032083	90 - 3B		XA
		93 - 11	6	XA
	4032220	67 - 5	4	PAOZZ
	4032667	87 - 14	1	PAFDD

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4032669	87 - 15	1	PAFLD
OP 4032933	74 - 98		
4032946	35 - 18	1	PAOZZ
4032947	43 - 10	1	PAOZZ
4032948	43 - 11		PAOZZ
	74 - 87	4	PAOZZ
4032949	43 - 7	1	PAOZZ
4033002	86 - 18	4	PAFZZ
4033174	42 - 16	10	PAOZZ
OP 4033283	92 - 6		
OP 4033284	92 - 6		
4033286	92 - 6	1	PAFLD
PW 4033406	60 - 49		
PW 4033408	60 - 19		
PW 4033409	60 - 24		
4033743	44 - 7		PAOZZ
	67 - 21	3	PAOZZ
4033951	63 - 33	30	PAFZZ
4033977	55 - 46	4	PAFZZ
4034066	71 - 19	4	PAFZZ
4034224	74 - 97	2	PAFZZ
4034519	47 - 1	1	PAOZZ
4034529	45 - 29		PAFZZ
	45 - 32	3	PAFZZ
4034561	55 - 43	6	PAFZZ
4034641	30 - 3	1	PAOZZ
4034930	63 - 39		PAFZZ
	63 - 39C		PAFZZ
	63 - 43	120	PAFZZ
4034933	63 - 31	15	PAFZZ
4035386	55 - 31		PAOZZ
	55 - 38	2	PAOZZ
4035387	55 - 40	2	PAFBZ
4035597	67 - 63	1	PAFLD
4035859	89 - 41	1	PAFBZ
4035860	101 - 8		PADZZ
	102 - 13	6	PADZZ
4035878	93 - 15	1	PAFZZ
4035882	F 101 - 3		XA
	101 - 3		
	F 102 - 3		XA
	102 - 3	2	
4035883	F 101 - 3		XA
	101 - 3		
	F 102 - 3		XA
	102 - 3	2	
4035886	101 - 3		PAFLD
	102 - 3	2	PAFLD
4035894	101 - 2		PAFZZ
	102 - 2	6	PAFZZ
4035897	87 - 7	1	PAFLD
4035921	87 - 8	2	PAFZZ
4036085	18 - 8		PAFFF
	32 - 32	2	PAFFF
4036095	18 - 14		PAOBZ
	32 - 36	2	PAOBZ
4036398	74 - 8	4	PADZZ
4036399	74 - 65	4	PADZZ
4036467	32 - 11	1	PAOBZ
4036469	32 - 29	1	PAOBZ
4036610	62 - 4	5	PAFZZ
4036617	103 - 8L	1	PADZZ
4036723	103 - 10	2	PADZZ
4036748	63 - 17	15	PAFZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4036955	89 - 39		PAFZZ
	89 - 67	4	PAFZZ
% 4036990	93 - 25	6	PADZZ
4036990P05	93 - 25	6	PADZZ
4036990P10	93 - 25	6	PADZZ
4036990P15	93 - 25	6	PADZZ
4036990P20	93 - 25	6	PADZZ
4036990P25	93 - 25	6	PADZZ
4036993	F 93 - 10		XA
	93 - 10	1	
4036994	F 93 - 10		XA
	93 - 10	1	
4036995	93 - 10	1	PAFLD
4037194	74 - 104	1	PADBZ
4037404	65 - 9	90	PAFZZ
4037897	83 - 9	1	PAFBZ
4037945	58 - 22	1	PAOZZ
4038010	89 - 17		PAOZZ
	102 - 8	3	PAOZZ
PW 4038430	40 - 4		
PW	40 - 4		
PW 4038431	40 - 34		
PW	40 - 34		
4038480	63 - 35	15	PAFZZ
4038606	82 - 32	1	PAFLD
4038728	84 - 5	1	PAFZZ
4038769	63 - 105	15	PAFZZ
4038802	60 - 78	1	PADLD
4039153	F 34 - 5		XA
	34 - 5		
	34 - 21	2	
4039156	F 35 - 13		XA
	35 - 13	1	
4039184	47 - 16	1	PAOBZ
4039906	55 - 44	4	PAFBZ
4039917	82 - 2	3	PAFBZ
4039918	82 - 4	3	PAFZZ
4039946	34 - 5		PAOFF
	34 - 21	3	PAOFF
4039949	35 - 13	1	PAOFF
4039976	60 - 98		PADZZ
S	60 - 98	1	
4040112	55 - 45	4	PAFBZ
OP 4040236	60 - 23		
OP 4040237	60 - 27		
OP 4040242	60 - 23		
OP 4040245	60 - 27		
OP 4040649	60 - 62		
4042076	42 - 43	1	PAFZZ
4042095	42 - 40	1	PAFZZ
4042096	42 - 41	1	PAFZZ
4042098	42 - 42	1	PAFZZ
4042344	76 - 16		PAFZZ
	95 - 6		PAFZZ
	96 - 4		PAFZZ
	96 - 4	69	
4042812	102 - 14	36	PAFZZ
4042849	93 - 2	6	PADZZ
4044108	90 - 6	1	PAFZZ
4044147	58 - 13	1	PAOZZ
4044206	90 - 7	6	PADZZ
4044388	73 - 14	16	XA
4044389	73 - 13		PADZZ
	73 - 16		PADZZ

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4044389		73 - 19	19	PADZZ
	4044390		73 - 12		PADZZ
			73 - 15		PADZZ
			73 - 18	19	PADZZ
	4044391	F	73 - 11	AR	PADBZ
	4044392		73 - 17	2	XA
	4044393	F	73 - 14	2	PADBZ
	4044394		73 - 20	1	XA
	4044395	F	73 - 17	1	PADBZ
OP	4044745		60 - 32		
OP	4045021		60 - 98		
OP	4045089		60 - 42		
	4045421		103 - 28	1	PAFZZ
	4045639-01		58 - 7	1	PAOLD
	4045695		62 - 23	10	PAFZZ
	4046357		63 - 39A	15	PAFZZ
	4046362		82 - 33	3	PAFZZ
	4046363		53 - 2		PAOZZ
			53 - 27		PAOZZ
			53 - 34		PAOZZ
			53 - 43		PAOZZ
			53 - 47		PAOZZ
			53 - 52		PAOZZ
			53 - 62		PAOZZ
			53 - 68		PAOZZ
			53 - 71	69	PAOZZ
=	4046367		6 - 25		PAFZZ
=			11 - 21		PAFZZ
=			18 - 9		PAFZZ
=			32 - 33		PAFZZ
=			40 - 18		PAFZZ
=			40 - 21		PAFZZ
=			40 - 24		PAFZZ
=			40 - 27		PAFZZ
=			47 - 28		PAFZZ
=			70 - 61		PAFZZ
=			94 - 16	22	PAFZZ
	4046420		60 - 63	1	PADZZ
	4046559		42 - 38	1	PAFZZ
	4046560		42 - 39	1	PAFZZ
	4046561		42 - 43B	1	PAODD
OP	4046808		60 - 62		
	4046824		110 - 17	2	PAFZZ
PW	4046906		57 - 4		
PW	4046907		57 - 5		
PW	4046908		57 - 6		
	4047095	F	60 - 90	1	PADLD
	4047096		60 - 92	1	XA
	4047343		60 - 23	1	PAOZZ
	4047344		60 - 27	1	PAOZZ
	4047849		67 - 88	25	PAFZZ
	4047890 #		60 - 113	1	PAFLD
OP	4048593		62 - 23		
	4048887		63 - 75	30	PAFZZ
	4048929		60 - 27	1	PAOZZ
	4048999		63 - 64	30	PAFZZ
PW	4049242		42 - 18		
PW	4049243		42 - 21		
PW	4049244		42 - 20		
PW	4049245		42 - 19		
S	4050103		35 - 7		
	4050490		63 - 11	15	PAFZZ
	4050491		63 - 10	30	PAFZZ
	4050494		63 - 9	30	PAFZZ
	4050564		63 - 115	5	PAFZZ
	4052098		62 - 18	10	PAOZZ
	4052460		73 - 77		PADZZ
			73 - 88	2	PADZZ
	4053556		60 - 51	3	PADZZ
	4053557		60 - 50	1	PADLD
	4053767		103 - 8K	1	PADZZ
=	4053840		74 - 98	2	PAFZZ
OP	4053883		74 - 98		
	4053893		48 - 18	1	PAOZZ
	4053915		49 - 25	1	PAOZZ
	4053916		49 - 26	1	PAOZZ
	4053917		49 - 30	2	PAOZZ
	4053945		13 - 30	1	PAODD
	4053946		13 - 28	1	PAOZZ
	4053992		102 - 11	1	PADZZ
	4054021		34 - 25		PAOFF
			35 - 5	2	PAOFF
	4054080		67 - 84	1	PAFZZ
	4054085-01	F	67 - 79	1	PAFLD
	4054085-03		67 - 83	1	XA
	4054087		67 - 82	1	XA
	4054089		67 - 80	3	XA
	4054210		41 - 9	4	PAOBZ
	4054347		51 - 17	1	PAOBZ
	4054537		60 - 62	1	PADZZ
	4054588		93 - 9	6	PADZZ
	4055045		90 - 3C	1	XA
	4055105-01		39 - 34	1	PAFBZ
	4055310		63 - 137	AR	PAFZZ
	4055953		99 - 29	68	PADZZ
OP	4056098		60 - 62		
OP	4056149		82 - 16		
OP	4056259		60 - 42		
OP	4056270		63 - 73		
OP	4056321		60 - 48		
OP	4056934		60 - 88		
	4057120		99 - 24	72	PAFZZ
	4057221		63 - 15	15	PAFZZ
OP	4057330		82 - 24		
OP	4057332		60 - 112		
	4057335		60 - 16A	1	PADZZ
	4057336		60 - 1	1	PAOZZ
	4057337		60 - 69	1	PADZZ
PW	4057374		48 - 17		
	4057397		60 - 79	1	PADZZ
	4057398		58 - 66	2	PAFZZ
PW	4057416		41 - 1		
OP	4057425		82 - 24		
	4057440		42 - 17	1	PAOZZ
	4057517-01		67 - 87	5	PADZZ
	4057681 #		58 - 79	1	PAOLD
	4057689		63 - 108	30	PAOZZ
	4057748		63 - 14	15	PAFZZ
OP	4057774		44 - 47		
	4057788		44 - 46	1	PAOFF
	4057828		63 - 4	30	PAOZZ
	4058006		28 - 35	1	PAOBZ
	4058013		30 - 41		PAOBZ
			42 - 12	2	PAOBZ
OP	4058058		60 - 16C		
	4058231		63 - 107	30	PAOZZ
	4058515		62 - 33	1	XA
OP	4058670		60 - 75		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4058688	F 62 - 30	1	PAFFF
4058696	60 - 106	1	PADLD
4058991	65 - 22	15	PAFZZ
4059017	20 - 31	2	PAOZZ
4059195	28 - 7	1	PAOFF
4059198	83 - 5		PADZZ
	83 - 14	4	PADZZ
OP 4059297	87 - 13		
OP 4059298	87 - 13		
OP 4059299	87 - 13		
4059349	87 - 13	1	PAFLD
4059355	76 - 5	4	PAFZZ
4059356	76 - 2	2	PAFZZ
OP 4059417	44 - 47		
4059491	92 - 11	1	PADZZ
4059492	F 92 - 7		XA
	92 - 7	1	
4059496	92 - 11	1	XA
4059690	67 - 92	1	PAFLD
PW 4059848	48 - 5		
PW 4059849	48 - 11		
4059942	63 - 60	15	PAFZZ
4059947	95 - 88		PAFZZ
	96 - 66		PAFZZ
	96 - 66	2	
4059948	95 - 89		PAFZZ
	96 - 67		PAFZZ
	96 - 67	2	
4059949	95 - 90		PAFZZ
	96 - 68		PAFZZ
	96 - 68	2	
PW 4059985	41 - 5		
4059992	58 - 94	1	PAFZZ
4060113	67 - 32	1	PAOZZ
4060146	50 - 23	1	PAOZZ
4060165	79 - 23		PAFZZ
	79 - 29	3	PAFZZ
4060166	79 - 24		PAFZZ
	79 - 31	3	PAFZZ
4060167	79 - 26	1	PAFZZ
4060168	79 - 25	1	PAFZZ
4060186	99 - 19	29	PAFZZ
4060218	70 - 52	1	PADZZ
4060313	63 - 142	AR	PAFZZ
4060316	63 - 140	AR	PAFZZ
4060449	85 - 5	2	PAFZZ
4060474-01	49 - 14	1	PAOZZ
4060477	71 - 10	1	PAFZZ
4060478	71 - 9	1	PAFZZ
4060492	49 - 21	1	PAOZZ
4060555	76 - 26	4	PAFZZ
4060564	73 - 24	1	XA
4060565	F 73 - 21	1	PADLD
4060566	73 - 21	1	PADLD
4060568-01	F 73 - 10	1	PAFLD
4060574	53 - 3	6	PAOZZ
4060627	28 - 38	1	PAOBZ
4060689	99 - 37	18	PAFZZ
4060764	86 - 17	4	PAFZZ
4060785	99 - 23	2	PADZZ
4060815	F 92 - 7		XA
	92 - 7	1	
4060816	82 - 29		AFF
	92 -	REF	AFF
	92 -	1	
4060870	F 67 - 63		XA
	67 - 63	1	
4060885	65 - 22	15	PAFZZ
4060966	99 - 11	1	PADZZ
4060982	86 - 21	23	PAFZZ
PW 4060998	40 - 8		
OP 4061007	87 - 13		
4061076	59 - 16	1	PADBZ
4061079	59 - 13	1	PADBZ
4061080	59 - 14	1	PADBZ
4061081	59 - 19	1	PADZZ
4061082	59 - 5	1	PAFZZ
4061084	59 - 11	1	PADZZ
4061085	59 - 10	1	PADZZ
4061086	59 - 8	1	PADZZ
4061087	59 - 7	1	PADZZ
OP 4061112	59 - 12		
OP 4061139	59 - 12		
OP 4061140	59 - 15		
OP 4061157	59 - 12		
OP 4061159	59 - 12		
4061171	30 - 39	1	PAOZZ
4061173	44 - 47	1	PAFZZ
4061180	99 - 41	68	PAFZZ
4061214	60 - 112	1	PADZZ
4061267	43 - 1	1	PAOZZ
PW 4061373	55 - 39		
PW 4061378	44 - 10		
PW 4061499	39 - 26		
4061533	93 - 24	1	PADZZ
4061534	93 - 26	3	PADZZ
4061535	93 - 27	3	PADZZ
4061536	93 - 21		PADZZ
	93 - 28	2	PADZZ
4061549	F 67 - 63		XA
	67 - 63	1	
4061621	59 - 1	1	PAFZZ
4061622	60 - 53	1	PADZZ
4061632	99 - 9	1	PAFZZ
4061638	34 - 9	1	PADZZ
4061726	89 - 18	1	PAFZZ
4061748	99 - 4	1	PADBZ
PW 4061774	39 - 13		
PW	73 - 5		
PW	73 - 43		
PW	73 - 62		
PW	86 - 2		
PW	99 - 1		
OP 4061870	82 - 16		
OP 4061871	60 - 98		
4061880	39 - 10	1	PAOZZ
4061881	39 - 5	1	PAOZZ
4061887	39 - 12	1	PAFZZ
4061889	39 - 24D	1	XA
OP 4062009	60 - 62		
4062030	60 - 54	1	PADZZ
PW 4062056	43 - 5		
4062062	50 - 24	3	PAOZZ
4062286	44 - 17		PAOZZ
	77 - 4		PAOZZ
	78 - 12		PAOZZ
	78 - 32	10	PAOZZ
4062289	44 - 16		PAOZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4062289	77 - 2		PAOZZ
	78 - 11		PAOZZ
	78 - 31	14	PAOZZ
4062295	92 - 8	6	PADZZ
4062296	92 - 9	6	PAFZZ
4062297	92 - 10	1	PAFZZ
OP 4062338	44 - 27		
OP	44 - 30		
OP	49 - 27		
OP	77 - 11		
OP	77 - 14		
OP	77 - 20		
OP	78 - 15		
OP	78 - 38		
OP 4062339	44 - 27		
OP	44 - 30		
OP	49 - 27		
OP	77 - 11		
OP	77 - 14		
OP	77 - 20		
OP	78 - 15		
OP	78 - 38		
S 4062340	44 - 18		
4062432	44 - 20	2	PAOZZ
4062463	77 - 8		PAFZZ
	78 - 5		PAFZZ
	78 - 21	12	PAFZZ
4062489	44 - 25		PAOZZ
	63 - 50		PAOZZ
	77 - 7		PAOZZ
	77 - 30		PAOZZ
	78 - 4		PAOZZ
	78 - 20		PAOZZ
	78 - 27		PAOZZ
	78 - 42	48	PAOZZ
4062497	44 - 27		PAFZZ
	44 - 30		PAFZZ
	49 - 27		PAFZZ
	77 - 11		PAFZZ
	77 - 14		PAFZZ
	77 - 20		PAFZZ
	78 - 15		PAFZZ
	78 - 38	12	PAFZZ
4062498	44 - 28		PAFZZ
	69 - 8		PAFZZ
	70 - 42		PAFZZ
	77 - 12		PAFZZ
	77 - 34		PAFZZ
	78 - 7		PAFZZ
	78 - 23		PAFZZ
	78 - 39	46	PAFZZ
4062511	44 - 26	1	PAOZZ
4062514	77 - 9		PAFZZ
	78 - 43	4	PAFZZ
OP 4062531	44 - 28		
OP	69 - 8		
OP	70 - 42		
OP	77 - 12		
OP	77 - 34		
OP	78 - 7		
OP	78 - 23		
OP	78 - 39		
OP 4062533	44 - 28		
OP	69 - 8		
OP	70 - 42		
OP	77 - 12		
OP	77 - 34		
OP	78 - 7		
OP	78 - 23		
OP	78 - 39		
4062651	49 - 106		PAFBZ
	74 - 88	2	PAFBZ
4062665	18 - 13	2	PADZZ
4062666	F 47 - 33	1	PAOZZ
4062667	47 - 35	1	XA
4062668	F 47 - 35	1	PAOBZ
4062669	47 - 37	1	XA
4062671	47 - 33	1	PAOZZ
4062707	59 - 12	1	PADZZ
4062708	59 - 15	1	PAFZZ
4062738	55 - 37	1	PAFBZ
4062739	55 - 30	1	PAFBZ
4062773	100 - 7	48	PADZZ
4063375	17 - 6	1	PAOZZ
S 4063376-01	17 - 9		
4063377	17 - 11	1	PAOBZ
4063522	51 - 78		PAFZZ
	51 - 81	4	PAFZZ
4063571	60 - 93	1	PADZZ
4063729	77 - 43		PAFZZ
	78 - 67	24	PAFZZ
4063750	77 - 33		PAFZZ
	78 - 28	8	PAFZZ
OP 4063875	63 - 89		
4063876	63 - 89	30	PAFZZ
4063884	28 - 8	1	PAOZZ
PW 4063974	70 - 2		
PW	70 - 11		
PW	70 - 17		
PW	70 - 26		
4064002	60 - 67	1	XA
4064153	F 39 - 27	1	PAODD
4064154	39 - 29	1	XA
4064155	39 - 36	1	PAFFF
4064156	39 - 33	1	PAFFF
4064162	39 - 24	1	PAOLD
4064163	39 - 24C	1	XA
4064164	39 - 2	1	PAOZZ
4064167	68 - 34	1	PADZZ
4064226	71 - 29	1	XA
4064229	F 73 - 40F	1	PADLD
4064230	73 - 42	1	XA
4064232	73 - 7	1	PAFDD
4064233	73 - 7B	1	PADZZ
4064234	73 - 7A	1	PADZZ
4064238	73 - 41	6	PADZZ
4064308	99 - 6	2	PAFZZ
4064311	99 - 10	1	PAFZZ
4064312	99 - 17	1	PAFZZ
406436	77 - 25		PAFZZ
	78 - 1	10	PAFZZ
4064470	42 - 23	1	PAOBZ
4064471	42 - 26	1	PAOBZ
4064496	58 - 19	2	PAOZZ
4064497	58 - 21	1	PAOZZ
4064498	58 - 20	1	PAOZZ
4064559	73 - 34	6	PAFZZ
4064854	F 60 - 65	1	PADBZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP 4065092	60 - 16C		
4065137	60 - 58	1	PADZZ
4065138	60 - 61	1	PADZZ
4065139	60 - 59	1	PADZZ
4065366	61 - 2	2	PADZZ
4065369	61 - 1	4	PAFZZ
OP 4065385	59 - 2		
4065386	59 - 2	1	PAFZZ
4065416	F 49 - 26	1	PAOFF
4065417	49 - 28	1	XA
OP 4065512	67 - 93		
OP 4065513	68 - 2		
4065518	69 - 7	25	PAFZZ
OP 4065578	44 - 28		
OP	69 - 8		
OP	70 - 42		
OP	77 - 12		
OP	77 - 34		
OP	78 - 7		
OP	78 - 23		
OP	78 - 39		
OP 4065580	44 - 27		
OP	44 - 30		
OP	49 - 27		
OP	77 - 11		
OP	77 - 14		
OP	77 - 20		
OP	78 - 15		
OP	78 - 38		
OP 4065596	59 - 2		
4065652	101 - 7	1	PAFLD
PW 4065756	47 - 38		
= 4065871	87 - 4		AFF
=	101 -	REF	AFF
		1	
PW 4065894	4 - 9		
4065913	F 69 - 7	25	PAFFF
4065914	69 - 9	25	PAFZZ
4065915	69 - 6	25	PAFZZ
OP 4065916	69 - 2		
S 4065917	67 - 10		
PW 4066025	3 - 35		
OP 4066036	60 - 75		
4066158	70 - 5		PADZZ
	70 - 7	60	PADZZ
4066159	70 - 20		PADZZ
	70 - 22	92	PADZZ
4066171	70 - 4		PADDD
	70 - 6	60	PADDD
4066172	70 - 19		PADDD
	70 - 21	92	PADDD
4066226	58 - 8		PAFZZ
	89 - 14		PAFZZ
	89 - 43		PAFZZ
	95 - 27		PAFZZ
	95 - 50		PAFZZ
	95 - 73		PAFZZ
	96 - 21		PAFZZ
	96 - 41		PAFZZ
	96 - 54		PAFZZ
	103 - 6		PAFZZ
	103 - 11		PAFZZ
	103 - 17		PAFZZ
	103 - 20	67	PAFZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4066231	F 70 - 5	15	PAFDD
4066232	F 70 - 20	23	PAFDD
4066275	42 - 35	1	XA
4066397	59 - 9	1	PADLD
4066398	58 - 83		ADD
	59 -	REF	ADD
		1	
4066423	37 - 58	1	PAOFF
S 4066509	89 - 51		
4066513	89 - 42	1	PAFZZ
4066527	89 - 56	1	PADZZ
4066638	F 59 - 22	1	PADLD
4066639	59 - 25	1	XA
4066640	59 - 27	1	XA
4066687-01	47 - 7	1	PAOBZ
< 4066724-700 #	42 - 15	1	PAODD
4066762	47 - 31	2	PAFZZ
4066763	47 - 30	2	PAFZZ
4066764	24 - 10	1	PAOBZ
4066802	44 - 31	1	XA
4066803	F 44 - 29	1	PAODD
4066807	44 - 19	2	PAOZZ
4066808	77 - 17		PAFZZ
	77 - 22		PAFZZ
	78 - 17	6	PAFZZ
4066809	77 - 19	2	PADZZ
OP 4066810	84 - 15		
OP 4066811	84 - 15		
OP 4066812	84 - 15		
4066813	95 - 56		PAFZZ
	96 - 47		PAFZZ
	96 - 47	76	
4066814	95 - 33		PAFZZ
	96 - 27		PAFZZ
	96 - 27	70	
4066815	95 - 78		PAFZZ
	96 - 59		PAFZZ
	96 - 59	88	
4066816	84 - 14	58	PAFZZ
4066817	77 - 18	2	PADZZ
4066824	77 - 15	2	PAFZZ
4066827	77 - 5		PAFZZ
	78 - 9	4	PAFZZ
4066830	44 - 29	1	XA
4066831	F 44 - 26	1	PAODD
OP 4066832	77 - 17		
OP	77 - 22		
OP	78 - 17		
OP 4066833	77 - 17		
OP	77 - 22		
OP	78 - 17		
4066838	76 - 27	2	PAFZZ
4066841	76 - 11		PAFZZ
	77 - 27		PAFZZ
	78 - 45	12	PAFZZ
4066847	95 - 7		PAFZZ
	95 - 35		PAFZZ
S	96 - 5		
S	96 - 29	134	
4066848	77 - 56		PAFZZ
S	78 - 63		
S	78 - 71	12	
4066849	76 - 23	2	PAFFF
4066857	F 77 - 10		XA

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4066857	77 - 10	1		OP	69 - 1		
OP 4066860	77 - 40			4068009	67 - 9	2	PAFZZ
OP	77 - 46			4068010	67 - 8	2	PAFZZ
OP	77 - 49			4068080	49 - 11	1	PAOZZ
OP	77 - 62			4068118	82 - 27	1	PAFZZ
OP	77 - 67			4068119	82 - 28	1	PAFLD
OP	78 - 58			4068182	93 - 23	1	PAFDD
OP	78 - 61			4068183	93 - 20		PADZZ
OP	78 - 70				93 - 30	2	PADZZ
OP	95 - 16			= 4068215	84 - 1		AFF
OP	95 - 21			=	93 -	REF	AFF
OP	95 - 41					1	
OP	95 - 44			4068404	44 - 8	2	PAOZZ
OP	95 - 64			4068407	102 - 10	1	PADZZ
OP	95 - 67			4068423	60 - 110	1	PADBZ
OP	96 - 13			4068431	13 - 26	1	PAOZZ
OP	96 - 18			4068434	60 - 103	1	PADLD
OP	96 - 33			4068474	60 - 107	1	PADBZ
OP	96 - 36			4068638	60 - 40	1	XA
OP 4066861	77 - 40			4068639	F 60 - 34	1	PADLD
OP	77 - 46			4068700	1 -		ADD
OP	77 - 49				F 58 - 87	REF	ADD
OP	77 - 62				F 62 - 41	REF	ADD
OP	77 - 67				F 67 - 104	REF	ADD
OP	78 - 58				F 71 - 44F	REF	ADD
OP	78 - 61				F 74 - 82	REF	ADD
OP	78 - 70				F 75 - 67	REF	ADD
OP	95 - 16				F 99 - 42	REF	ADD
OP	95 - 21					1	
OP	95 - 41			= 4068714-704	67 - 104		ADD
OP	95 - 44			=	70 -	REF	ADD
OP	95 - 64					1	
OP	95 - 67			= 4068714-705	67 - 104		ADD
OP	96 - 13			=	70 -	REF	ADD
OP	96 - 18					1	
OP	96 - 33			4068716-723	71 - 25		ADF
OP	96 - 36				73 -	REF	ADF
4066871	77 - 48	2	PAFFF			1	
4066885	77 - 47	2	PAFZZ	4068716-733	71 - 25		ADF
4066899	F 77 - 10		XA		73 -	REF	ADF
	77 - 10	1				1	
4067003	70 - 33		PADDD	4068716-734	71 - 25		ADF
	70 - 34	84	PADDD		73 -	REF	ADF
4067086	82 - 8	1	PAFBZ			1	
4067110	39 - 1	1	PAOZZ	4068716-735	71 - 25		ADF
4067144	82 - 39	3	PADZZ		73 -	REF	ADF
4067145	82 - 40	2	PADZZ			1	
4067146	82 - 38	5	PADZZ	4068716-736	71 - 25		ADF
4067176	60 - 68	1	PADLD		73 -	REF	ADF
S 4067178	58 - 64					1	
4067180	58 - 65	1	PAOZZ	4068716-737	71 - 25		ADF
4067181	58 - 63	1	PAOZZ		73 -	REF	ADF
4067182	58 - 62	1	PAOZZ			1	
4067183	F 58 - 65	1	PAODD	4068716-738	71 - 25		ADF
4067185	58 - 67	1	XA		73 -	REF	ADF
4067518	47 - 9	1	PAOZZ			1	
4067808	68 - 20	1	PAFZZ	4068716-739	71 - 25		ADF
PW 4067837	67 - 37				73 -	REF	ADF
PW 4067838	67 - 22					1	
4067896	71 - 11	1	PAFLD	4068716-740	71 - 25		ADF
4067915	101 - 7	1	PAFLD		73 -	REF	ADF
OP 4067921	67 - 12					1	
OP	69 - 1			4068716-748	71 - 25		ADF
OP 4067922	67 - 12						

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4068716-748	73 -	REF	ADF
4068716-748		1	
4068716-751	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-752	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-753	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-754	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-755	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-756	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-757	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-758	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-759	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-795	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-796	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-797	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-798	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-799	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-800	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-801	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-802	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-803	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-804	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-805	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-806	71 - 25		ADF
	73 -	REF	ADF

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	73 -	1	
4068716-807	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-808	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-809	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-810	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-811	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-812	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-813	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-814	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-815	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-816	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-817	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-818	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-819	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-820	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-821	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-822	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-823	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-824	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-825	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-826	71 - 25		ADF
	73 -	REF	ADF
		1	
4068716-827	71 - 25		ADF
	73 -	REF	ADF
		1	

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4068716-828	71 - 25		ADF
	73 -	REF 1	ADF
4068716-829	71 - 25		ADF
	73 -	REF 1	ADF
4068716-830	71 - 25		ADF
	73 -	REF 1	ADF
4068716-831	71 - 25		ADF
	73 -	REF 1	ADF
4068716-832	71 - 25		ADF
	73 -	REF 1	ADF
4068716-850	71 - 25		ADF
	73 -	REF 1	ADF
4068716-851	71 - 25		ADF
	73 -	REF 1	ADF
4068716-852	71 - 25		ADF
	73 -	REF 1	ADF
4068716-853	71 - 25		ADF
	73 -	REF 1	ADF
4068716-854	71 - 25		ADF
	73 -	REF 1	ADF
4068716-855	71 - 25		ADF
	73 -	REF 1	ADF
4068716-856	71 - 25		ADF
	73 -	REF 1	ADF
4068716-857	71 - 25		ADF
	73 -	REF 1	ADF
4068716-858	71 - 25		ADF
	73 -	REF 1	ADF
4068716-859	71 - 25		ADF
	73 -	REF 1	ADF
4068716-860	71 - 25		ADF
	73 -	REF 1	ADF
4068716-861	71 - 25		ADF
	73 -	REF 1	ADF
4068716-862	71 - 25		ADF
	73 -	REF 1	ADF
4068716-863	71 - 25		ADF
	73 -	REF 1	ADF
4068716-864	71 - 25		ADF
	73 -	REF 1	ADF
4068716-865	71 - 25		ADF
	73 -	REF 1	ADF
4068716-866	71 - 25		ADF
	73 -	REF 1	ADF
4068716-867	71 - 25		ADF
	73 -	REF 1	ADF
4068716-868	71 - 25		ADF
	73 -	REF 1	ADF
4068716-869	71 - 25		ADF
	73 -	REF 1	ADF
4068716-870	71 - 25		ADF
	73 -	REF 1	ADF
4068716-871	71 - 25		ADF
	73 -	REF 1	ADF
4068716-872	71 - 25		ADF
	73 -	REF 1	ADF
4068716-873	71 - 25		ADF
	73 -	REF 1	ADF
4068716-874	71 - 25		ADF
	73 -	REF 1	ADF
4068716-875	71 - 25		ADF
	73 -	REF 1	ADF
4068716-876	71 - 25		ADF
	73 -	REF 1	ADF
4068716-877	71 - 25		ADF
	73 -	REF 1	ADF
4068716-878	71 - 25		ADF
	73 -	REF 1	ADF
4068716-879	71 - 25		ADF
	73 -	REF 1	ADF
4068716-880	71 - 25		ADF
	73 -	REF 1	ADF
4068716-881	71 - 25		ADF
	73 -	REF 1	ADF
4068716-882	71 - 25		ADF
	73 -	REF 1	ADF
4068716-883	71 - 25		ADF
	73 -	REF 1	ADF
4068716-884	71 - 25		ADF
	73 -	REF 1	ADF
4068716-885	71 - 25		ADF
	73 -	REF 1	ADF
4068716-886	71 - 25		ADF
	73 -	REF 1	ADF
4068716-888	71 - 25		ADF

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4068716-888		73 -	REF	ADF
	4068716-888			1	
	4068717-700		86 - 1		PAFDD
			99 -	REF	PAFDD
				1	
	4068717-701		86 - 1		PAFDD
			99 -	REF	PAFDD
				1	
	4068717-702		86 - 1		PAFDD
			99 -	2	PAFDD
	4068717-703		86 - 1		PAFDD
			99 -	2	PAFDD
	4068721-803		1 - 12		PAFDD
			67 -	REF	PAFDD
				1	
	4068721-804		1 - 12		PAFDD
			67 -	REF	PAFDD
				1	
=	4068722-801		1 - 16		PAFDD
=			76 -	REF	PAFDD
=		F	99 - 42	REF	PAFDD
				1	
=	4068722-803		1 - 16		PAFDD
=			76 -	REF	PAFDD
=		F	99 - 42	REF	PAFDD
				1	
=	4068722-806		1 - 16		PAFDD
=			76 -	REF	PAFDD
=		F	99 - 42	REF	PAFDD
				1	
=	4068722-807		1 - 16		PAFDD
=			76 -	REF	PAFDD
=		F	99 - 42	REF	PAFDD
				1	
=	4068722-810		1 - 16		PAFDD
=			76 -	REF	PAFDD
=		F	99 - 42	REF	PAFDD
				1	
=	4068722-811		1 - 16		PAFDD
=			76 -	REF	PAFDD
=		F	99 - 42	REF	PAFDD
				1	
	4068722-812		1 - 16		PAFDD
			76 -	2	PAFDD
	4068724-800		1 - 11		PAFDD
			62 -	REF	PAFDD
				1	
	4068725-800		1 - 10		PAFDD
			58 -	REF	PAFDD
				1	
	4068800		1 -		ADD
		F	58 - 87	REF	ADD
		F	62 - 41	REF	ADD
		F	67 - 104	REF	ADD
		F	71 - 44F	REF	ADD
		F	74 - 82	REF	ADD
		F	75 - 67	REF	ADD
		F	99 - 42	REF	ADD
				1	
	4068824-800		1 - 11		PAFDD
			62 -	REF	PAFDD
				1	
	4068967		73 - 45	56	PAFZZ
	4068968		73 - 46	1	PAFBZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4068998	104 - 29	4	PADZZ
	4068999	104 - 37	4	PADZZ
	4069002	104 - 57	6	PADZZ
	4069003	104 - 65	7	PADZZ
	4069047	73 - 33		PAFZZ
		99 - 12	56	PAFZZ
	4069088	104 - 14	24	PADZZ
	4069092	104 - 1	1	PAFZZ
	4069093	104 - 6	1	PAFZZ
	4069094	104 - 10	2	PADZZ
	4069129	48 - 26		PAOZZ
		48 - 35	2	PAOZZ
	4069146	103 - 22	1	PAFZZ
	4069147	103 - 24	1	PAFZZ
	4069148	103 - 23	1	PAFZZ
	4069149	103 - 4	1	PAFZZ
	4069160	89 - 52	1	PAFBZ
	4069167	89 - 55	1	PADZZ
	4069169	103 - 19	1	PAFZZ
	4069174	89 - 54	1	PADZZ
	4069175	89 - 53	1	PADZZ
	4069178	92 - 7	1	PAFLD
	4069179	103 - 2	1	PAFZZ
	4069229	62 - 46	1	PAOBZ
	4069241-01	82 - 5	1	PAFFF
PW	4069243	46 - 5		
	4069279	76 - 4	1	PAFZZ
	4069280	76 - 6	1	PAFDD
S	4069284	34 - 57		
		76 - 3	1	PAFZZ
	4069286	46 - 8	1	PAOZZ
	4069321	85 - 15	20	PAFZZ
	4069333	99 - 31	1	PADDD
	4069335	99 - 45	1	PAFDD
	4069336	99 - 13	4	PAFZZ
	4069338	86 - 7		PAFZZ
S		86 - 7	37	
	4069346	83 - 10	1	PAFDD
	4069349	76 - 21B	1	PADZZ
	4069355	76 - 30	2	PAFZZ
	4069371	85 - 17	4	PAFZZ
=	4069391	86 - 19	23	PAFZZ
	4069402	1 - 14		PAFDD
		74 -	REF	PAFDD
			1	
	4069403-01	74 - 82	1	XA
	4069405	70 - 63	1	PAOZZ
	4069406	70 - 58	1	PAOZZ
	4069408	70 - 64	1	PAOZZ
	4069409	70 - 59	1	PAOZZ
	4069410	70 - 60	1	PAOZZ
	4069414	31 - 25		PAOZZ
		31 - 34	3	PAOZZ
PW	4069429	43 - 13		
PW	4069430	43 - 18		
	4069432	51 - 77	1	PAFFF
	4069433	51 - 80	1	PAFFF
	4069437-01	73 - 28	7	PAFLD
	4069441	75 - 36	2	PAFZZ
	4069452	75 - 10	2	PAFZZ
	4069456	32 - 35	1	PAOZZ
	4069460	18 - 12	1	PAFFF
	4069469	35 - 2	1	PAODD
	4069471	35 - 1	3	PAOZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
PW	4069472	35 - 3		
	4069473	44 - 21	2	XA
OP	4069474	44 - 21		
OP	4069475	44 - 21		
	4069476	F 67 - 43	1	PAOFF
	4069477	67 - 47	1	XA
	4069478	67 - 27		PADZZ
		67 - 46	4	PADZZ
	4069482	67 - 70	1	PAOBZ
	4069483	67 - 71	1	PAOBZ
	4069485	41 - 33	1	PAOBZ
	4069486	67 - 33	1	PAOZZ
	4069487	F 70 - 41	1	PAFBZ
	4069488	70 - 43	1	XA
	4069491	F 67 - 24	1	PAFFF
	4069492	67 - 28	1	PAFFF
	4069496-01	34 - 34	1	PAODD
	4069543	35 - 9	1	PAODD
	4069545	45 - 16	1	PAOZZ
	4069546	45 - 17	1	PAOZZ
	4069547	45 - 14	1	PAOZZ
	4069548	45 - 18	1	PAOZZ
	4069549	45 - 12	1	PAOZZ
	4069553	45 - 31	2	XA
	4069554	F 45 - 31	1	PAOBZ
	4069555	45 - 34	1	XA
	4069557	34 - 37		PAOFF
		35 - 11	2	PAOFF
	4069558	F 45 - 28	2	PAOBZ
	4069559	32 - 9	1	PAOZZ
	4069562	74 - 47	2	PAFZZ
	4069563	74 - 9	7	PAFZZ
	4069570	67 - 23		PAOZZ
		67 - 43	4	PAOZZ
	4069575	42 - 6	1	XA
	4069578	40 - 30	2	PAOZZ
	4069579	42 - 5		XA
		42 - 9	3	XA
	4069580	42 - 4	1	PAFZZ
	4069627	103 - 8N	1	PADLD
	4069628	103 - 8M	2	PADLD
	4069629	103 - 8F	1	PAFZZ
	4069630	103 - 8C	1	PAFZZ
	4069632	103 - 8G	4	PADZZ
	4069633	103 - 13	1	PAFZZ
	4069634-01	103 - 14	1	PAFZZ
	4069636	103 - 8E	1	PAFZZ
	4069638	103 - 8D	1	PAFZZ
OP	4069671	59 - 15		
	4069773	76 - 31	1	PAFZZ
	4069774	89 - 36	1	PAFZZ
	4069778	103 - 30	4	PAFZZ
	4069858	76 - 7	1	XA
	4069859	76 - 8	1	XA
	4069865	103 - 29	1	PAFZZ
	4069875	50 - 18	1	PAODD
	4069877	50 - 25	1	PAOZZ
	4069879	50 - 20	4	PAFZZ
OP	4069880	50 - 21		
=	4069895	86 - 3		PAFZZ
		99 - 2	16	PAFZZ
	4069897-01	89 - 19	1	PAFFF
	4069901	99 - 42	1	PADLD
S	4069902	99 - 16		

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4069915	63 - 70A	1	PADZZ
OP	4069918	63 - 73		
OP	4069922	50 - 21		
=	4069949	99 - 3	1	PADLD
	4069975	73 - 55		PAFZZ
		73 - 58	2	PAFZZ
	4069977-01	73 - 54	7	PAFDD
	4069978-01	73 - 57	1	PAFDD
	4069982-01	73 - 28	7	PAFLD
	4069985	94 - 3		PAFZZ
		94 - 4		PAFZZ
		94 - 6	3	PAFZZ
	4069990	99 - 5	1	PAFDD
	4069995	104 - 4	7	PADZZ
	4069996	104 - 9	7	PADZZ
=	4070004-01	86 - 4	1	PAFDD
	4070004-02	86 - 5	1	XA
	4070028	60 - 100	1	PADLD
	4070030	80 - 1	2	PAFDD
	4070033	80 - 14	1	PAFZZ
	4070037	80 - 8	1	PAFZZ
	4070039	80 - 9	1	PAFZZ
	4070040	80 - 5	2	PAFZZ
	4070067	63 - 111	15	PAFDD
	4070082	89 - 37	1	PAFDD
	4070087	103 - 16	1	PAFZZ
	4070093	80 - 10		PAFZZ
		80 - 17	3	PAFZZ
	4070107	F 63 - 73	15	PAODD
OP	4070115-01	63 - 67		
	4070121	61 - 19	1	XA
	4070147	99 - 22	1	PADLD
	4070149	80 - 18	1	PAOZZ
	4070169	88 - 46	2	PAFZZ
	4070183	88 - 41	1	PAFDD
	4070186	88 - 40		PAFZZ
		88 - 44	2	PAFZZ
	4070187	88 - 45	1	PAFDD
PW	4070290	50 - 26		
	4070292	99 - 14		PADLD
S		99 - 14		
		99 - 15	144	PADLD
	4070347	88 - 2		PAFZZ
		88 - 6	24	PAFZZ
OP	4070354	103 - 33		
	4070357	63 - 1	30	PAOZZ
	4070358	63 - 2	30	PAOZZ
%	4070419	73 - 52		XC
%		99 - 7	14	XC
	4070419CL1	73 - 52		PADZZ
		99 - 7	14	PADZZ
	4070419CL2	73 - 52		PADZZ
		99 - 7	14	PADZZ
	4070419CL3	73 - 52		PADZZ
		99 - 7	14	PADZZ
	4070419CL4	73 - 52		PADZZ
		99 - 7	14	PADZZ
	4070452	104 - 69	1	PADZZ
PW	4070461	45 - 27		
	4070467	89 - 62	1	PAFZZ
	4070469	89 - 65	1	PAFZZ
	4070476	63 - 80	30	PAFZZ
	4070477	63 - 83	30	PAOZZ
	4070702	86 - 6	1	PAFBZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4070741	F 63 - 103	15	PAFDD	4071143	63 - 70B	1	PADZZ
4070742	63 - 106	15	XA	4071145	63 - 51	15	PAOZZ
4070743	63 - 69	15	PAFZZ	4071146	63 - 57	30	PAOZZ
4070771	94 - 7	4	PAFZZ	= 4071150	63 - 123	1	PAFDD
4070793	103 - 15	1	PAFZZ	4071160	63 - 129	5	PAFBZ
= 4070801	99 - 39		PADDD	4071162	63 - 135	5	PAFZZ
=	99 - 40	136	PADDD	4071164	63 - 132	10	PAFZZ
4070836-01	104 - 21	1	XA	4071166	62 - 1	5	PAFZZ
4070846	104 - 18	1	PADDD	4071170	63 - 118	10	PAFZZ
4070851	70 - 14	52	PADBZ	4071171	63 - 119	5	PAFZZ
4070852-01	70 - 29	57	PADBZ	4071172	63 - 130	5	PAFBZ
4070852-02	70 - 30	1	PADBZ	4071176-01	66 - 8	15	PAFZZ
4070874	100 - 2	1	PADZZ	4071179-01	53 - 24		PAODD
PW 4070897	49 - 32				54 -	REF	PAODD
4070899	48 - 30	1	PAFZZ			1	
4070922	85 - 13	4	PAFZZ	4071180-01	54 - 2	5	PAFFF
4070947	84 - 9	1	PAFDD	4071181-01	54 - 3	2	PAFFF
4070962	76 - 32	1	PAFZZ	4071182-01	54 - 4	4	PAFFF
4070963	76 - 33	2	PAFZZ	4071186-01	53 - 23	1	PAFZZ
4070970	44 - 33	1	PAOZZ	4071192	F 53 - 15	1	PAFFF
4070977	63 - 92	15	PAFZZ	4071194-01	53 - 19	1	PAFZZ
4070980-01	86 - 9	1	PAFDD	4071196	F 53 - 3	3	PAFFF
4070980-04	86 - 10	1	PADZZ	4071197-01	53 - 7	3	PAFZZ
4070989	75 - 80	1	PAFZZ	4071212	72 - 18	1	XA
4070990	60 - 114		PADDD	4071214	F 53 - 7	2	PAFFF
	61 -	REF	PADDD	4071215-01	53 - 11	2	PAFZZ
		1		4071216	F 53 - 11	2	PAFFF
4071013	58 - 101	1	PAFFF	4071217-01	53 - 15	2	PAFZZ
4071017	73 - 70	1	PADLD	4071218	53 - 10		PAFZZ
% 4071047	89 - 31	4	XA		53 - 14	4	PAFZZ
4071047CLA	89 - 31	AR	PAFZZ	4071221	53 - 18		PAFZZ
4071047CLB	89 - 31	AR	PAFZZ		53 - 22	2	PAFZZ
4071047CLC	89 - 31	AR	PAFZZ	= 4071223-01	70 - 39	1	PADDD
4071047CLD	89 - 31	AR	PAFZZ	4071228-01	55 - 4		PAFFF
4071047CLE	89 - 31	AR	PAFZZ	S	55 - 4	1	
4071047CLF	89 - 31	AR	PAFZZ	4071232	F 53 - 19	1	PAFFF
4071047CLG	89 - 31	AR	PAFZZ	4071233	63 - 91	15	PAFZZ
4071047CLH	89 - 31	AR	PAFZZ	4071234	70 - 45	2	PADZZ
4071047CLJ	89 - 31	AR	PAFZZ	4071235	F 70 - 43	2	PADZZ
4071047CLK	89 - 31	AR	PAFZZ	OP 4071286	95 - 34		
4071047CLL	89 - 31	AR	PAFZZ	OP	96 - 28		
4071047CLM	89 - 31	AR	PAFZZ	OP 4071287	95 - 34		
4071047CLN	89 - 31	AR	PAFZZ	OP	96 - 28		
4071047CLP	89 - 31	AR	PAFZZ	OP 4071288	95 - 34		
4071047CLQ	89 - 31	AR	PAFZZ	OP	96 - 28		
4071047CLR	89 - 31	AR	PAFZZ	OP 4071318	68 - 2		
4071047CLS	89 - 31	AR	PAFZZ	OP 4071319	67 - 93		
4071047CLT	89 - 31	AR	PAFZZ	4071327	63 - 117	5	PAFZZ
4071080	70 - 1	1	PAFDD	4071328	F 63 - 119	5	PAFFF
4071081	70 - 10	1	PAFDD	4071329	63 - 121	5	XA
4071082	70 - 16	1	PAFDD	OP 4071330	34 - 58		
S 4071083	70 - 25			OP	63 - 120		
4071085	91 - 10	1	PAFDD	4071334	65 - 20	1	PAFZZ
4071122	63 - 100	15	PAFBZ	PW 4071345	58 - 34		
4071123	63 - 101	15	PAFBZ	PW 4071353	45 - 13		
4071130	F 63 - 20	15	PAODD	4071383	95 - 34		PAFZZ
4071131	63 - 23	15	PAFFF		96 - 28		PAFZZ
4071134	63 - 25	15	PAFFF		96 - 28	70	
4071138	63 - 22		PAFZZ	4071396	73 - 50	1	PADDD
	63 - 27	90	PAFZZ	4071400	34 - 58		PAFZZ
4071139	63 - 24		PAFZZ		63 - 120	6	PAFZZ
	63 - 29	60	PAFZZ	OP 4071401	34 - 58		
4071141	63 - 48	15	PAODD	OP	63 - 120		
4071142	63 - 70	15	PAODD	4071404	103 - 25	2	PAFZZ

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP	4071405		69 - 2		
PW	4071424		52 - 1		
	4071429		73 - 79	1	XA
	4071430	F	73 - 70	1	PADDD
	4071453		81 - 2	1	PAFDD
	4071459	F	73 - 68	1	ADF
	4071463-01		71 - 42	1	PAFDD
	4071473		73 - 29	1	PAFLD
	4071474		77 - 3		PAFZZ
			78 - 13	4	PAFZZ
	4071502		42 - 44	1	PAOZZ
	4071503		42 - 46	1	PAOZZ
	4071505		74 - 32	2	PAFZZ
	4071507		32 - 7	1	PAFZZ
	4071508		89 - 62	1	PAFZZ
PW	4071523		49 - 32		
PW	4071524		44 - 10		
	4071526		74 - 18	1	PAFZZ
	4071528		74 - 22	1	PAFZZ
	4071530		74 - 56	1	PAFZZ
	4071532		74 - 26	1	PAFZZ
	4071534		74 - 14	1	PAFZZ
	4071538		57 - 7	1	PAFDD
	4071540		57 - 9	1	PADZZ
	4071542		57 - 16	1	XA
	4071543		57 - 19	1	PAOZZ
	4071550		14 - 3		XA
			15 - 18		XA
			19 - 4		XA
			36 - 3	4	XA
	4071551		29 - 5		XA
			30 - 27	6	XA
	4071552		29 - 6		XA
			30 - 28	6	XA
	4071559		14 - 4		XA
			15 - 17		XA
			19 - 3		XA
			21 - 3		XA
			36 - 4	8	XA
	4071561		27 - 5		XA
			32 - 17	2	XA
	4071572		15 - 5		XA
			36 - 9	REF	XA
				2	
	4071581		20 - 22	5	XA
	4071582		20 - 23	5	XA
	4071583		13 - 1		PAOBZ
			14 - 1		PAOBZ
			15 - 16		PAOBZ
			19 - 2		PAOBZ
			36 - 2	7	PAOBZ
	4071584		29 - 4		PAOBZ
			30 - 26	3	PAOBZ
	4071592		20 - 36	1	PAOZZ
	4071605		37 - 54	1	PAOFF
	4071615		67 - 47	1	XA
	4071625-01		67 - 56	1	PAOFF
	4071626-01		67 - 55	1	PAOFF
	4071627-01		26 - 1	1	PAOFF
	4071635		67 - 53	1	PAOBZ
	4071642		27 - 4		XA
			32 - 16	2	XA
	4071643		27 - 3		PAOBZ
			32 - 15	2	PAOBZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4071644	27 - 27		XA
		37 - 34	2	XA
	4071645	27 - 26		XA
		37 - 35	2	XA
	4071646	27 - 25		PAOBZ
		37 - 33	2	PAOBZ
	4071676	31 - 21	1	PAOZZ
S	4071679-01	22 - 17		
S	4071680-01	22 - 18		
S	4071681-01	22 - 19		
S	4071682-01	22 - 21		
S	4071683-01	22 - 22		
S	4071684-01	22 - 20		
S	4071685-01	22 - 23		
S	4071686-01	22 - 25		
	4071692-01	36 - 23	1	PAOFF
	4071693-01	36 - 24	1	PAOFF
S	4071714-01	22 - 31		
OP	4071716	63 - 66		
	4071717	63 - 96	30	PAFZZ
	4071718	63 - 95	15	PAOZZ
OP	4071719	63 - 66		
	4071720	63 - 65	15	PAOZZ
	4071724	53 - 76A		PAOZZ
		53 - 81A	4	PAOZZ
	4071726	63 - 103	15	PAFZZ
	4071729	75 - 13	1	PAOZZ
	4071730	75 - 9	2	PAOZZ
	4071745	104 - 5	5	PADZZ
	4071746	104 - 30	4	PADZZ
	4071747	104 - 38	4	PADZZ
	4071748	104 - 58	6	PADZZ
	4071749	104 - 66	7	PADZZ
	4071755	63 - 81	15	PAFBZ
OP	4071759	63 - 81		
OP	4071760	63 - 86		
OP	4071761	63 - 57		
	4071765	39 - 23	1	PAOZZ
	4071766	76 - 10		PAFZZ
		76 - 33	10	PAFZZ
	4071768	73 - 37	24	PAFZZ
	4071772	58 - 96	1	PAOZZ
	4071776	48 - 36	2	PAOZZ
	4071777	48 - 27	2	PAOZZ
	4071778	48 - 29	1	PAOFF
	4071779	74 - 3	1	PAOZZ
	4071798	73 - 35		PAFZZ
		99 - 34	56	PAFZZ
	4071799	99 - 33	32	PAFZZ
	4071804	63 - 73	30	PAFZZ
	4071815	42 - 43A	AR	PAFZZ
PW	4071837	8 - 14		
PW	4071839	9 - 7		
PW	4071840	10 - 7		
PW	4071841	4 - 14		
PW	4071842	11 - 1		
	4071849	72 - 11	3	PAFZZ
	4071850	67 - 94	17	PAFDD
	4071897	71 - 3	1	PAFZZ
	4071898-01	89 - 46	1	PAFBZ
=	4072100	15 - 72	1	PAOZZ
=	4072101	24 - 1	1	PAOZZ
=	4072103	32 - 25	1	PAOZZ
=	4072104	20 - 34	1	PAOZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
= 4072105	20 - 35	1	PAOZZ
= 4072107	49 - 1	1	PAOZZ
= 4072109	23 - 9	1	PAOZZ
= 4072112	49 - 17	1	PAOZZ
= 4072113	21 - 18	1	PAOZZ
= 4072115	47 - 12	1	PAOZZ
= 4072120	45 - 5	1	PAOZZ
4072138-01	29 - 27	1	PAFFF
4072139-01	29 - 20	1	PAFFF
4072141-01	29 - 1	1	PAOFF
4072142	74 - 37	1	PAFZZ
4072143	40 - 6	2	PAOZZ
4072144	74 - 52	1	PAFZZ
4072150-01	34 - 4	1	PAODD
4072164	74 - 101	1	PAOBZ
4072165	62 - 45	1	PAFZZ
4072170	70 - 59	1	PAOZZ
4072178-01	42 - 4	1	PAFZZ
4072193	67 - 58	1	PADZZ
4072195	67 - 59	1	PADBZ
4072197	67 - 60	1	PADBZ
OP 4072231-01	69 - 10		
4072235	67 - 74		PAFDD
	69 -	REF	PAFDD
		1	
4072296	67 - 67	68	PAOZZ
4072297	68 - 2	25	PAFZZ
= 4072298	67 - 93	25	PAFZZ
PW 4072329	11 - 23		
PW 4072338	68 - 36		
PW 4072341	68 - 35		
4072348	89 - 2		AFF
	102 -	REF	AFF
		1	
= 4072349	87 - 4		AFF
=	101 -	REF	AFF
		1	
= 4072388	F 70 - 43	1	PAFDD
4072389	70 - 65	1	XA
4072398	71 - 27		PAFZZ
	71 - 43		PAFZZ
	71 - 44F	48	PAFZZ
4072404	73 - 39	1	XA
4072405	53 - 38		PAFZZ
	53 - 56		PAFZZ
	53 - 86	15	PAFZZ
4072484	F 73 - 37	1	PADLD
4072485	73 - 38	1	PADZZ
4072533-01	71 - 31	1	PAFDD
4072534-01	55 - 1	1	PAOFF
4072535-01	71 - 33	1	PAFDD
4072535-07	71 - 38	8	PADZZ
4072535-08	71 - 39	8	PADZZ
4072536	82 - 1		AFF
	91 -	REF	AFF
		1	
4072583	57 - 1	1	PAOFF
S 4072599	89 - 57		
4072623	67 - 12		PAFZZ
	69 - 1	6	PAFZZ
= 4072682	99 - 18		PAFDD
S	99 - 18	29	
4072703-01	32 - 22	1	PAOFF
4072704-01	27 - 7	1	PAOFF

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4072705-01	27 - 18	1	PAOFF
4072706-01	27 - 28	1	PAOFF
4072707-01	18 - 1	1	PAOFF
4072708	70 - 63	1	PAOZZ
4072710	51 - 73	1	PAFZZ
4072712	13 - 6		XA
	15 - 63	2	XA
4072726	37 - 12	1	PAOZZ
4072742	53 - 40	1	PAOZZ
4072743	53 - 90	1	PAOZZ
4072744	53 - 58	1	PAOZZ
4072745	53 - 60	1	PAOZZ
4072746	53 - 88	1	PAOZZ
4072779-01	15 - 71	1	PAOFF
4072781-01	15 - 58	1	PAOFF
4072786	40 - 20		PAOZZ
	40 - 23		PAOZZ
	40 - 26	3	PAOZZ
4072787	40 - 23	1	PAOZZ
4072788	75 - 5	2	PAFZZ
4072789	75 - 1	1	PAFZZ
4072790	75 - 27	1	PAFZZ
4072791	75 - 17	1	PAFZZ
4072792	75 - 31	1	PAFZZ
4072793	75 - 14	1	PAFZZ
4072794	75 - 22	1	PAFZZ
4072801	63 - 41	15	XA
4072813	28 - 32	1	PAOZZ
4072814	51 - 3	1	PAOZZ
4072815	51 - 2	1	PAOFF
4072837	90 - 3		XA
	90 - 3	1	
4072838	90 - 3E	1	XA
4072839	90 - 3		XA
	90 - 3	1	
4072840	90 - 10	1	XA
4072841	F 90 - 6	1	PAFLD
4072842	81 - 8		PAFLD
	90 -	REF	PAFLD
		1	
4072848	69 - 2	23	PAFZZ
4072871	53 - 29	7	PAFZZ
4072885	53 - 6	3	PAFZZ
4072896	53 - 32	7	PAFZZ
4072898	53 - 4		PAFZZ
	53 - 8		PAFZZ
	53 - 12		PAFZZ
	53 - 16		PAFZZ
	53 - 20	9	PAFZZ
4072899	53 - 45A		PAFZZ
	53 - 48A		PAFZZ
	53 - 64A		PAFZZ
	53 - 65A	16	PAFZZ
4072926	99 - 35	18	PAFZZ
4072948	63 - 68	15	PAFZZ
= 4072991-01	103 - 8	1	PADDD
4072991-02	103 - 9B	1	PADLD
4072992	103 - 8B	1	PAFZZ
4072993	103 - 8A	1	PAFZZ
4073009	44 - 13	2	PAOFF
4073012-01	F 74 - 4	1	PAFZZ
4073012-02	74 - 7	1	XA
4073026	74 - 6	13	PAFZZ
= 4073030	47 - 12	1	PAOZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4073094	13 - 1		PAOBZ
	14 - 1		PAOBZ
	15 - 16		PAOBZ
	19 - 2		PAOBZ
	36 - 2	7	PAOBZ
4073095	29 - 4		PAOBZ
	30 - 26	3	PAOBZ
4073096	67 - 53	1	PAOBZ
4073097	20 - 1		PAOBZ
	20 - 3		PAOBZ
	20 - 8		PAOBZ
	20 - 21	8	PAOBZ
4073098	27 - 3		PAOBZ
	32 - 15	2	PAOBZ
4073099	29 - 7		PAOBZ
	30 - 18	2	PAOBZ
4073123-01	104 - 72	1	PADDD
4073146	73 - 40	1	PADLD
4073157	F 77 - 33		PAFBZ
	F 78 - 2		PAFBZ
S	78 - 2		
	F 78 - 18		PAFBZ
S	78 - 18	12	
4073161	77 - 35		XA
	78 - 8		XA
	78 - 24	12	XA
4073403	73 - 53		PADDD
S	73 - 53	1	
4073475	62 - 41		PAFDD
	66 - 1	REF	PAFDD
		1	
4073476-01	66 - 10	1	PADDD
4073477	66 - 5	5	XA
4073478-01	66 - 18	1	XA
4073488	73 - 60	1	PAFZZ
4073489	73 - 61	5	PAFZZ
4073491	73 - 32	1	PAFZZ
4073564	F 63 - 108	15	PAFZZ
4073565	63 - 110	15	XA
4073566	63 - 109	30	PAFZZ
4073591	71 - 26	1	PAFDD
4073605	42 - 28	1	PAOFF
4073606	42 - 22	1	PAOFF
4073607	42 - 25	1	PAOFF
4073614	56 - 5		XA
	56 - 28	2	XA
4073616	73 - 75		PAFZZ
	73 - 86	2	PAFZZ
4073618	56 - 7		PAFZZ
	56 - 30	2	PAFZZ
4073628	27 - 9	1	PAOZZ
OP 4073646	60 - 75		
4073665	14 - 12		PAOZZ
	31 - 4	2	PAOZZ
4073689	81 - 4	1	PAFZZ
= 4073697	65 - 18	8	PAFZZ
4073869	29 - 8		XA
	30 - 19	2	XA
4073870	29 - 9		XA
	30 - 20	2	XA
4073873	29 - 7		PAOBZ
	30 - 18	2	PAOBZ
4073899	57 - 2	1	PAOZZ
4073900	46 - 12	1	PAOZZ
4073902	46 - 14	1	PAOZZ
PW 4073980	39 - 6		
4074004	104 - 16	24	PADZZ
4074010	90 - 3	1	PAFDD
4074012	104 - 70	1	PADZZ
4074013	104 - 71	1	PADZZ
4074019	57 - 12	1	PAOZZ
4074020	76 - 14	1	PAFZZ
4074021	71 - 46	85	PAFZZ
4074030	77 - 31		PAFZZ
	78 - 6	4	PAFZZ
= 4074041	F 99 - 39	34	PAFDD
4074050-01	28 - 10	1	PAOFF
4074051-01	26 - 8	1	PAOFF
4074052-01	32 - 3	1	PAODD
4074053	94 - 13	1	PAOZZ
S 4074057-01	22 - 35		
4074058	22 - 14	1	PAOZZ
4074059-01	14 - 14	1	PAOFF
4074060	16 - 11	1	PAOZZ
4074061	28 - 24		XA
	29 - 18		XA
	30 - 15	3	XA
4074065	15 - 10		XA
	36 - 14	4	XA
4074066	15 - 11		XA
	36 - 15	4	XA
4074067	15 - 9		PAFZZ
	15 - 43		PAFZZ
	36 - 13	REF	PAFZZ
	36 - 16	REF	PAFZZ
		4	
4074131	6 - 30		XA
	23 - 4	2	XA
4074132	6 - 31		XA
	23 - 5	2	XA
4074133	6 - 32		XA
	23 - 6	2	XA
4074134	6 - 29		PAOBZ
	11 - 14		PAOBZ
	23 - 3	3	PAOBZ
4074137	50 - 13	1	PAOZZ
4074138	74 - 107	1	PAOZZ
4074150	67 - 95	8	PAFDD
4074151	88 - 38	1	AFF
4074152	88 - 42	1	AFF
4074153	88 - 39		PAFZZ
	88 - 43	2	PAFZZ
4074197	62 - 9		AFF
	63 -	REF	AFF
		1	
4074198	67 - 13	6	PAFZZ
4074199	67 - 14	2	PAFFF
4074203	71 - 13	1	PAFZZ
4074224	47 - 34		PAFZZ
	47 - 36	4	PAFZZ
4074229-01	63 - 122	1	PAFLD
4074241	18 - 5	1	PAOBZ
4074247-01	79 - 4	10	PAFFF
4074248-01	79 - 1	10	PAFFF
4074249-01	15 - 55	1	PAOFF
4074326-01	21 - 17	1	PAOFF
4074327-01	21 - 10	1	PAOFF
4074328-01	21 - 9	1	PAOFF

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4074397	63 - 78	15	XA
	4074402	15 - 49		PAOBZ
		27 - 12	2	PAOBZ
	4074412-01	79 - 5	1	PAFFF
	4074414-01	79 - 2	1	PAFFF
	4074426	95 - 58		PAFZZ
		96 - 49		PAFZZ
		96 - 49	38	
	4074427	95 - 80		PAFZZ
		96 - 61		PAFZZ
		96 - 61	44	
	4074428	95 - 57		PAFZZ
		96 - 48		PAFZZ
		96 - 48	76	
OP	4074429	95 - 57		
OP		96 - 48		
OP	4074430	95 - 57		
OP		96 - 48		
OP	4074431	95 - 57		
OP		96 - 48		
	4074432	95 - 79		PAFZZ
		96 - 60		PAFZZ
S		96 - 60	88	
OP	4074433	95 - 79		
OP		96 - 60		
OP	4074434	95 - 79		
OP		96 - 60		
OP	4074435	95 - 79		
OP		96 - 60		
OP	4074436	95 - 79		
OP		96 - 60		
OP	4074437	95 - 79		
OP		96 - 60		
	4074448	84 - 15	58	PAFZZ
	4074457	88 - 13	36	PAFZZ
	4074470	51 - 70	1	PAOZZ
	4074471	47 - 27	1	PAOBZ
S	4074473	58 - 99		
	4074491	77 - 28	2	PAFZZ
	4074492	F 77 - 26	2	PAFDD
	4074493	76 - 21A	1	XA
	4074494	76 - 21	1	PAFDD
	4074496	88 - 11	12	PAFZZ
S	4074501	15 - 52		
S		27 - 13		
	4074520-01	89 - 34	1	PAFDD
	4074599	51 - 7	1	PAOZZ
	4074624	63 - 90	15	PAFBZ
	4074636	51 - 9	1	PAOZZ
	4074684-01	17 - 9	1	PAODD
PW	4074688	41 - 14		
	4074700-01	104 - 17	1	PADDD
	4074709	63 - 86	30	PAOBZ
	4074715	65 - 26	1	PAFZZ
	4074716	100 - 39	1	XA
	4074717	100 - 27	1	XA
	4074738	70 - 9	1	PAFFF
	4074739	70 - 24	1	PAFFF
	4074756	40 - 33	2	PADZZ
	4074766	100 - 35	1	PADDD
	4074769	100 - 36	1	XA
	4074773	100 - 26	2	PADZZ
	4074774	100 - 25	2	PADZZ
	4074775	100 - 24	2	PADZZ
S	4074776	100 - 34		
S	4074777	100 - 31		
		100 - 32		PAFZZ
		100 - 33	8	PAFZZ
S	4074778	100 - 30		
S	4074780	100 - 28		
S	4074781	100 - 20		
S	4074782	100 - 21		
S	4074783	100 - 22		
S	4074784	100 - 17		
S	4074785	100 - 18		
S	4074786	100 - 19		
S	4074787	100 - 16		
S	4074789	100 - 14		
	4074821	F 70 - 12	1	PAFDD
	4074822	F 70 - 27	1	PAFDD
	4074825	67 - 89	1	XA
	4074839-01	104 - 31	2	PAFZZ
	4074839-02	104 - 39	2	PAFZZ
	4074839-03	104 - 45	2	PAFZZ
	4074839-04	104 - 51	2	PAFZZ
	4074839-05	104 - 59	2	PAFZZ
	4074839-06	104 - 67	2	PAFZZ
PW	4074848	73 - 44		
PW		73 - 63		
S	4074849	104 - 68		
	4074872-01	89 - 12	1	PAFZZ
=	4074882	102 - 7	1	PAFLD
	4075033	93 - 18	3	PADZZ
	4075034	93 - 19	3	PADZZ
	4075036-01	84 - 1		AFF
		93 -	REF	AFF
			1	
	4075044	71 - 22		AFF
		72 -	REF	AFF
			1	
=	4075046	F 72 - 11	1	PAFLD
	4075049	80 - 11	1	PAOZZ
	4075102	73 - 25	1	XA
S	4075104-02	104 - 2		
S	4075105-02	104 - 7		
	4075120	39 - 39	1	PAFZZ
	4075124	39 - 40	1	XA
	4075125	39 - 42	1	XA
%	4075126	39 - 41	AR	XA
	4075127	39 - 41	AR	XA
	4075128	39 - 41	AR	XA
	4075129	39 - 41	AR	XA
	4075136	83 - 16	1	PAFDD
	4075139	F 67 - 85	1	PAFLD
	4075171-01	93 - 17	6	PADZZ
	4075194	49 - 102	1	PAOZZ
	4075195	93 - 4	6	PADZZ
	4075201-01	30 - 5	1	PAOFF
S	4075214-01	22 - 24		
PW	4075220	79 - 34		
	4075229	F 67 - 74	1	AFF
	4075230	50 - 56	1	PAOZZ
	4075231	50 - 55	1	PAOZZ
	4075232	49 - 105	1	PAOZZ
	4075235	70 - 8	1	PAFDD
	4075236	70 - 23	1	PAFDD
	4075237	70 - 35	1	PAFDD
	4075247	70 - 13		PADZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4075247	70 - 28	531	PADZZ
	4075248	50 - 57	1	PAOZZ
	4075254	73 - 47	28	PAFDD
	4075314	83 - 11	1	PAFLD
	4075318	71 - 12	1	PAFZZ
	4075324	77 - 26		PAFZZ
		78 - 2	10	PAFZZ
%	4075335	99 - 32	4	PAFZZ
	4075335P10	99 - 32	4	PAFZZ
	4075335P2	99 - 32	4	PAFZZ
	4075335P4	99 - 32	4	PAFZZ
	4075335P6	99 - 32	4	PAFZZ
	4075335P8	99 - 32	4	PAFZZ
	4075338	70 - 31	1	PADLD
	4075339	70 - 15	1	PADLD
=	4075349	91 - 5	1	PAFLD
	4075382	35 - 15	1	PAOFF
S	4075386	35 - 20		
	4075396	21 - 7	1	PAOBZ
	4075400	67 - 61	1	PAFFF
	4075401	67 - 62	1	PAFFF
=	4075402	39 - 37	1	PAFDD
=	4075403	73 - 48		PADDD
		73 - 49	172	PADDD
	4075404	73 - 30		PADDD
		73 - 31	132	PADDD
	4075405-01	21 - 11	1	PAOFF
	4075406-01	21 - 12	1	PAOFF
	4075410	6 - 28		PAOZZ
		11 - 16		PAOZZ
		13 - 3		PAOZZ
		15 - 1		PAOZZ
		15 - 45		PAOZZ
		15 - 51		PAOZZ
		20 - 5		PAOZZ
		20 - 10		PAOZZ
		23 - 2		PAOZZ
		27 - 2		PAOZZ
		27 - 11		PAOZZ
		29 - 3		PAOZZ
		30 - 25		PAOZZ
		32 - 14		PAOZZ
		36 - 5	REF	PAOZZ
		36 - 18	REF	PAOZZ
			16	
	4075413-01	95 - 123		PAFDD
		96 - 109		PAFDD
S		96 - 109		
		97 - 1	REF	PAFDD
			1	
	4075420	84 - 18	1	PAFDD
	4075421	84 - 19	8	PADZZ
	4075426	1 - 15		PAFDD
		75 -	REF	PAFDD
			1	
	4075427-01	75 - 67	1	XA
PW	4075429	95 - 104		
PW		96 - 84		
	4075433	95 - 103		PAFZZ
		96 - 83		PAFZZ
		96 - 83	2	
	4075434	95 - 92		PAFZZ
		95 - 114		PAFZZ
		96 - 70		PAFZZ

	PART NUMBER			FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
				96 - 98		PAFZZ
				96 - 98	64	
	4075435			95 - 93		PAFZZ
				96 - 71		PAFZZ
				96 - 71	4	
	4075436			95 - 94		PAFZZ
				96 - 72		PAFZZ
				96 - 72	4	
	4075437			95 - 95		PAFZZ
				96 - 73		PAFZZ
				96 - 73	2	
	4075438			95 - 91		PAFBZ
				96 - 69		PAFBZ
				96 - 69	8	
	4075439			95 - 115		PAFZZ
				96 - 99		PAFZZ
				96 - 99	20	
	4075440			95 - 113		PAFBZ
				96 - 97		PAFBZ
				96 - 97	20	
	4075445			88 - 25		PADZZ
				88 - 27		PADZZ
				88 - 29		PADZZ
				88 - 31	36	PADZZ
	4075449			88 - 12	36	PAFZZ
	4075455			88 - 1	12	PAFZZ
=	4075458			23 - 8	1	PAOZZ
=	4075459			31 - 27	1	PAOZZ
	4075460			77 - 40		PAFZZ
				77 - 46		PAFZZ
				77 - 49		PAFZZ
				77 - 62		PAFZZ
				77 - 67		PAFZZ
				78 - 58		PAFZZ
				78 - 61		PAFZZ
				78 - 70		PAFZZ
				95 - 16		PAFZZ
				95 - 21		PAFZZ
				95 - 41		PAFZZ
				95 - 44		PAFZZ
				95 - 64		PAFZZ
				95 - 67		PAFZZ
				96 - 13		PAFZZ
				96 - 18		PAFZZ
				96 - 33		PAFZZ
				96 - 36		PAFZZ
				96 - 36	362	
	4075466			98 - 5	68	PADZZ
	4075472			63 - 85	30	PAFZZ
	4075473			77 - 10	2	PAFDD
S	4075481			29 - 24		
	4075493		F	73 - 48	43	PAFDD
	4075494		F	73 - 30A	33	PAFDD
	4075499			67 - 65	1	PAFDD
	4075514	*		76 - 34	1	PADZZ
	4075516	*		67 - 98	1	PAFZZ
	4075518	*		71 - 40	1	PADZZ
	4075519	*		58 - 85	1	PADZZ
	4075522	*		62 - 10	1	PADZZ
	4075534		F	73 - 42	1	PAFDD
	4075539			93 - 3	1	PADZZ
	4075540			93 - 5	1	PAFZZ
	4075541-01	#		53 - 36	1	PAFDD
	4075542-01	#		53 - 54		PAOFF

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
S	4075542-01		53 - 54	1	
	4075550		58 - 97	1	PAOZZ
	4075562		67 - 3	2	PAOZZ
	4075565		67 - 15	1	PAOZZ
	4075566		67 - 16	1	PAOZZ
S	4075567		67 - 18		
	4075569		67 - 17	2	PAOZZ
	4075571		56 - 14		XA
			56 - 21	3	XA
	4075572		95 - 3		PAFZZ
			96 - 1		PAFZZ
			96 - 1	9	
	4075573		76 - 20	1	PAFZZ
	4075574		95 - 1	2	PAFZZ
	4075578		53 - 33		PAOZZ
			53 - 51		PAOZZ
			53 - 70	20	PAOZZ
	4075579		53 - 66	3	PAFBZ
	4075582	F	53 - 64D	3	PAFFF
	4075583-01		53 - 65D	3	PAFZZ
	4075584		53 - 65C	3	PAFZZ
	4075585	F	53 - 63	3	PAFFF
	4075586-01		53 - 64D	3	PAFZZ
	4075587		53 - 64C	3	PAFZZ
	4075588	F	53 - 45D	4	PAFFF
	4075589-01		53 - 50	4	PAFZZ
	4075590		53 - 49	4	PAFZZ
	4075591	F	53 - 44	6	PAFFF
	4075592-01		53 - 45D	6	PAFZZ
	4075593		53 - 45C	6	PAFZZ
	4075596	F	53 - 28A	7	PAFZZ
	4075597		53 - 31	7	PAFZZ
	4075598		53 - 28		PAOZZ
			53 - 44		PAOZZ
			53 - 48		PAOZZ
			53 - 63		PAOZZ
			53 - 69	23	PAOZZ
	4075608-01		104 - 25		PADDD
S			104 - 25	33	
	4075608-02		104 - 26		PADDD
S			104 - 26	33	
	4075608-03		104 - 27		PADDD
S			104 - 27	2	
	4075608-04		104 - 28		PADDD
S			104 - 28	2	
	4075609-01		104 - 33		PADDD
S			104 - 33	35	
	4075609-02		104 - 34		PADDD
S			104 - 34	35	
	4075609-03		104 - 35		PADDD
S			104 - 35	2	
	4075609-04		104 - 36		PADDD
S			104 - 36	2	
	4075610-01		104 - 41		PADDD
S			104 - 41	39	
	4075610-02		104 - 42		PADDD
S			104 - 42	39	
	4075610-03		104 - 43		PADDD
S			104 - 43	2	
	4075610-04		104 - 44		PADDD
S			104 - 44	2	
	4075611-01		104 - 47		PADDD
S			104 - 47	41	
	4075611-02		104 - 48		PADDD
S			104 - 48	41	
	4075611-03		104 - 49		PADDD
S			104 - 49	2	
	4075611-04		104 - 50		PADDD
S			104 - 50	2	
	4075612-01		104 - 53		PADDD
S			104 - 53	37	
	4075612-02		104 - 54		PADDD
S			104 - 54	37	
	4075612-03		104 - 55		PADDD
S			104 - 55	2	
	4075612-04		104 - 56		PADDD
S			104 - 56	2	
	4075613-01		104 - 61		PADDD
S			104 - 61	40	
	4075613-02		104 - 62		PADDD
S			104 - 62	40	
	4075613-03		104 - 63		PADDD
S			104 - 63	2	
	4075613-04		104 - 64		PADDD
S			104 - 64	2	
=	4075619		18 - 16	1	PAOZZ
	4075633		94 - 14	1	PAFZZ
	4075645		40 - 16	6	PAOBZ
	4075647		40 - 14	2	PAOZZ
	4075657		77 - 32		PAFZZ
			78 - 22	4	PAFZZ
	4075658		95 - 62	8	PAFZZ
	4075662-01		95 - 42	1	XA
	4075662-02		95 - 45	1	XA
	4075663-01		95 - 65	1	XA
	4075663-02		95 - 68	1	XA
	4075665		77 - 55		PAFZZ
S			78 - 50	58	
	4075668	F	95 - 39	1	PAFDD
	4075669	F	95 - 42	1	PAFDD
	4075670	F	95 - 62	1	PAFDD
	4075671	F	95 - 65	1	PAFDD
	4075672		77 - 51		PAFZZ
			78 - 53		PAFZZ
			95 - 11		PAFZZ
			95 - 39		PAFZZ
			96 - 8		PAFZZ
			96 - 32		PAFZZ
			96 - 32	32	
	4075677		77 - 60		PAFZZ
			77 - 65		PAFZZ
			78 - 56B		PAFZZ
			95 - 14		PAFZZ
			95 - 19		PAFZZ
			95 - 40		PAFZZ
			95 - 43		PAFZZ
			96 - 11		PAFZZ
			96 - 16		PAFZZ
			96 - 34		PAFZZ
			96 - 37		PAFZZ
			96 - 37	32	
	4075678		95 - 63		PAFZZ
			95 - 66	8	PAFZZ
	4075680		77 - 52		PAFZZ
			78 - 54	16	PAFZZ
	4075681		95 - 9		PAFZZ
			96 - 7		PAFZZ
			96 - 7	8	

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR		PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4075682	95 - 37	8	PAFZZ		4075823	79 - 20	1	PAFZZ
	4075684	77 - 45	2	PAFFF	OP	4075854	95 - 32		
OP	4075685	77 - 52			OP		96 - 26		
OP		78 - 54			OP	4075855	95 - 55		
OP	4075686	77 - 52				4075867	89 - 1	1	PAFDD
OP		78 - 54				4075870-01	87 - 1	1	PAFLD
OP	4075687	77 - 52			PW	4075871	68 - 8		
OP		78 - 54			PW	4075872	68 - 4		
OP	4075688	95 - 9			PW	4075873	68 - 12		
OP		96 - 7				4075879	11 - 19	1	PAFZZ
OP	4075689	95 - 9				4075885	58 - 95	1	PAFZZ
OP		96 - 7				4075890	88 - 10	24	PAFZZ
OP	4075690	95 - 9				4075923	73 - 73		PAFZZ
OP		96 - 7					73 - 84	14	PAFZZ
OP	4075691	95 - 37				4075924	73 - 74		PADZZ
OP	4075692	95 - 37					73 - 85	2	PADZZ
OP	4075693	95 - 37				4075930	48 - 28	1	PAFZZ
	4075694	77 - 41	2	PAFBZ		4075931	32 - 28	1	PAOZZ
	4075695	77 - 39		PAFFF		4075933	6 - 24	1	PAFZZ
		78 - 47	4	PAFFF		4075934	49 - 104	1	PAOZZ
	4075696	77 - 58		PAFDD		4075935	53 - 42	1	PAOZZ
		78 - 56	2	PAFDD		4075940	40 - 3	1	PAOZZ
	4075697	77 - 63		PAFDD		4075943	44 - 12	2	PAFZZ
		78 - 56	2	PAFDD		4075945	3 - 3		XA
	4075698	95 - 12		PAFDD			14 - 7		XA
		96 - 9		PAFDD			36 - 22	7	XA
		96 - 9	1			4075946	3 - 4		XA
	4075699	95 - 17		PAFDD			14 - 8		XA
		96 - 14		PAFDD			36 - 21	7	XA
		96 - 14	1			4075947	3 - 2		PAOBZ
PW	4075711	11 - 31					14 - 5		PAOBZ
PW	4075712	11 - 39					36 - 20	7	PAOBZ
	4075716	89 - 69		PAFDD		4075949	57 - 10		PAOZZ
S		89 - 69					57 - 17	REF	PAOZZ
		103 - 1	REF	PAFDD				1	
			1			4075966-01	50 - 17	2	PAOZZ
	4075717	103 - 32	1	XA	=	4075972	16 - 7	1	PAOZZ
	4075726-01 #	53 - 73		PAOFF		4075973	63 - 84	30	PAFZZ
S		53 - 73	1			4075974	95 - 32		PAFDD
	4075729	63 - 134	130	PAFZZ			96 - 26		PAFDD
	4075740	73 - 64	62	PAFZZ			96 - 26	70	
	4075741-01	73 - 65	1	PAFLD		4075975	95 - 55	76	PAFDD
S	4075749	100 - 12				4075976	95 - 77	88	PAFDD
	4075753	88 - 4		XB		4075983	81 - 12		PAFLD
		88 - 8	2	XB			81 - 13	2	PAFLD
	4075754	100 - 9	96	PAFZZ	OP	4075984	95 - 32		
	4075757	77 - 57	8	PAFZZ	OP		96 - 26		
	4075759	95 - 59	80	PAFZZ	OP	4075985	95 - 55		
	4075761	77 - 44	2	PAFZZ		4075986	72 - 9	3	PAFZZ
	4075766	70 - 40	1	PAOZZ		4076046	66 - 2	5	PAFZZ
	4075767	70 - 49	1	XA		4076047	66 - 13	1	PAFZZ
	4075768	F 70 - 46	1	PADBZ	OP	4076048	103 - 33		
	4075770	50 - 21	1	PAOZZ		4076049	103 - 33	1	PADDD
	4075771	63 - 66	15	PAOZZ	OP	4076056	95 - 77		
	4075782	70 - 58	1	PAOZZ	PW	4076098	58 - 29		
	4075784	70 - 64	1	PAOZZ	PW		60 - 3		
	4075785	70 - 60	1	PAOZZ		4076101	89 - 7	1	PAFZZ
	4075799	51 - 72	1	PAOBZ		4076102	39 - 11	1	PAOZZ
	4075805	63 - 47	15	PAFZZ	S	4076106	104 - 21		
OP	4075819	77 - 52				4076116	99 - 20	29	PAFZZ
OP		78 - 54				4076124-01	84 - 16	3	PAFDD
OP	4075820	95 - 9				4076124-02	84 - 17	3	PAFDD
OP		96 - 7				4076125	95 - 81		PAFDD
OP	4075821	95 - 37					95 - 82		PAFDD

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
=	4076125	96 - 62		PAFDD
=	4076125	96 - 62	6	
	4076125-02	95 - 82	2	XA
	4076126	95 - 83		PAFDD
		95 - 84		PAFDD
		96 - 63		PAFDD
		96 - 63	6	
	4076126-02	95 - 84	2	XA
	4076127	95 - 85		PAFDD
		95 - 86		PAFDD
		96 - 64		PAFDD
		96 - 64	6	
	4076127-02	95 - 86	2	XA
OP	4076156	95 - 77		
	4076201	86 - 20	23	PAFZZ
	4076206	99 - 36	18	PADBZ
	4076227-01	F 100 -	1	PADDD
	4076227-02	100 - 6	1	PADZZ
	4076227-03	100 - 5	24	PADZZ
	4076242	56 - 15		PAFZZ
		56 - 22	3	PAFZZ
	4076251	47 - 15	1	PAFZZ
	4076272	89 - 24	8	PAFZZ
	4076285	41 - 16	1	PAOZZ
	4076290	41 - 29	1	PAFZZ
	4076292	71 - 18	2	PAFZZ
	4076294	55 - 8	1	PAFZZ
	4076308	104 - 15	24	PADZZ
	4076309	41 - 8	1	PAOZZ
	4076316-01	79 - 6	1	PAFFF
	4076317-01	79 - 3	1	PAFFF
PW	4076322	48 - 37		
PW	4076323	62 - 27		
PW		64A - 1		
PW	4076324	62 - 26		
PW		64 - 1		
=	4076383	63 - 102	30	PAFZZ
	4076385	95 - 102		PAFZZ
		96 - 82		PAFZZ
		96 - 82	6	
	4076386	95 - 112		PAFZZ
		96 - 96		PAFZZ
		96 - 96	8	
	4076387	95 - 121		PAFZZ
		96 - 107		PAFZZ
		96 - 107	8	
	4076388	95 - 122		PAFZZ
		96 - 108		PAFZZ
		96 - 108	8	
	4076389	93 - 16	1	PAFDD
	4076390	104 - 13	1	PAFLD
	4076392	71 - 7	1	XA
	4076393	F 71 - 5	1	PAFLD
OP	4076395	95 - 55		
OP	4076396	95 - 77		
OP	4076398	95 - 61		
	4076411	40 - 29	1	PAOBZ
	4076418	44 - 40	1	PAOBZ
	4076423	63 - 88	15	PAFZZ
OP	4076425	95 - 61		
OP	4076428	95 - 61		
	4076458	63 - 16	15	PAFZZ
	4076459	63 - 7	15	PAODD
S	4076467	100 - 29		
S	4076469	100 - 15		
	4076473	73 - 67	1	PAFDD
	4076474	F 43 - 12	1	PAODD
	4076475-01	95 - 53		PAFDD
		96 - 44		PAFDD
		96 - 44	4	
	4076475-02	95 - 49		PAFDD
		96 - 40		PAFDD
		96 - 40	2	
	4076478	103 - 31	37	PAFZZ
	4076482	41 - 32	1	PAOBZ
	4076483	73 - 68	23	PAFDD
	4076488	88 - 5	1	PAFZZ
	4076490	F 88 - 1	1	PADDD
	4076566	88 - 33	12	PAFDD
	4076567	88 - 34	12	PAFDD
	4076700	3 - 45	AR	PAOZZ
	4076706	34 - 20	1	PAOZZ
	4076722	100 - 3	16	PADZZ
	4076723	98 - 6	1	XA
	4076725	73 - 69	20	PADBZ
	4076730	46 - 10	1	PAOZZ
	4076731	46 - 11	1	PAOZZ
	4076754	21 - 2	2	PAOBZ
	4076758	13 - 4		PAOBZ
		15 - 62	2	PAOBZ
	4076759	28 - 19		PAOBZ
		29 - 14		PAOBZ
		30 - 11	3	PAOBZ
	4076760	7 - 8		PAOBZ
		22 - 9	REF	PAOBZ
			1	
	4076761	3 - 43		PAOBZ
		11 - 12	REF	PAOBZ
		22 - 7	REF	PAOBZ
			1	
	4076762	21 - 5	2	XA
	4076765	15 - 6		XA
		36 - 10	REF	XA
			2	
	4076766	13 - 8		XA
		15 - 65	2	XA
	4076770	100 - 10	4	PADZZ
	4076771	62 - 20	20	PAFZZ
	4076772	102 - 9	1	PADZZ
	4076778 #	79 - 33		PAFLD
S		79 - 33	12	
	4076780	24 - 14	1	PAOBZ
	4076781	70 - 4		PADDD
		70 - 6	60	PADDD
	4076782	70 - 19		PADDD
		70 - 21	92	PADDD
	4076790-01	84 - 10	1	PAFLD
	4076791	F 70 - 5	15	PAFDD
	4076792	F 70 - 20	23	PAFDD
S	4076793	89 - 50		
	4076797	46 - 15	3	PAOZZ
	4076798	76 - 13	2	PAFZZ
	4076799	F 76 - 9	1	PAFDD
	4076817	63 - 56	30	PAOZZ
	4076826-01	95 - 76		PAFDD
		96 - 57		PAFDD
		96 - 57	4	
	4076826-02	95 - 72		PAFDD

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4076826-02	96 - 53		PAFDD
	4076826-02	96 - 53	2	
	4076827	95 - 28		PAFZZ
		96 - 22		PAFZZ
		96 - 22	18	
	4076828	95 - 51		PAFZZ
		96 - 42		PAFZZ
		96 - 42	18	
	4076829	95 - 74		PAFZZ
		96 - 55		PAFZZ
		96 - 55	18	
	4076830	95 - 61	8	PAFZZ
	4076853-01	32 - 41	1	PAODD
	4076854-01	30 - 22	1	PAODD
	4076855-01	30 - 21	1	PAOFF
	4076856-01	28 - 17	1	PAOFF
	4076857-01	28 - 28	1	PAOFF
	4076858-01	31 - 23	1	PAOFF
	4076924	84 - 12	58	PAFZZ
	4076952	95 - 29		PAFZZ
		95 - 52		PAFZZ
		95 - 75		PAFZZ
		96 - 23		PAFZZ
		96 - 43		PAFZZ
		96 - 56		PAFZZ
		96 - 56	6	
=	4076954	63 - 42	15	PAFFF
	4076956	63 - 46	15	PAFZZ
	4076957	89 - 32	1	PAFBZ
	4076965-01	80 - 21	1	PAFZZ
	4076972	F 99 - 14	36	PAFDD
	4077008	98 - 4	1	PADZZ
PW	4077009	3 - 46		
PW	4077010	5 - 14		
	4077011-01	95 - 48		PAFZZ
		96 - 39		PAFZZ
		96 - 39	4	
	4077012-01	95 - 71		PAFZZ
		96 - 52		PAFZZ
		96 - 52	4	
PW	4077024	11 - 47		
	4077027	80 - 2		PAFZZ
		80 - 12		PAFZZ
		80 - 19	13	PAFZZ
S	4077047	95 - 97		
S		96 - 75		
S	4077048	95 - 106		
S		96 - 86		
S	4077049	95 - 117		
S		96 - 101		
	4077051	79 - 27	1	PAFZZ
	4077052	79 - 28	1	PAFZZ
	4077054	97 - 2	8	PAFZZ
	4077055	97 - 4	8	PAFZZ
	4077056	97 - 6	8	PAFZZ
	4077060	F 57 - 13	1	PAOBZ
	4077074	88 - 35		PADDD
		98 -	REF	PADDD
			1	
PW	4077075D06	41 - 14		
=	4077077-01	95 - 98		PAFDD
=		96 - 78		PAFDD
=		96 - 78	2	
=	4077077-02	95 - 99		PAFDD
=		96 - 79		PAFDD
=		96 - 79	3	
=	4077077-03	95 - 100		PAFDD
=		96 - 80		PAFDD
=		96 - 80	2	
=	4077077-04	95 - 101		PAFDD
=		96 - 81		PAFDD
=		96 - 81	1	
=	4077078-01	95 - 107		PAFDD
=		96 - 91		PAFDD
=		96 - 91	2	
=	4077078-02	95 - 108		PAFDD
=		96 - 92		PAFDD
=		96 - 92	2	
=	4077078-03	95 - 109		PAFDD
=		96 - 93		PAFDD
=		96 - 93	2	
=	4077078-04	95 - 110		PAFDD
=		96 - 94		PAFDD
=		96 - 94	2	
=	4077078-05	95 - 111		PAFDD
=		96 - 95		PAFDD
=		96 - 95	2	
=	4077079-01	95 - 118		PAFDD
=		96 - 104		PAFDD
=		96 - 104	2	
=	4077079-02	95 - 119		PAFDD
=		96 - 105		PAFDD
=		96 - 105	2	
=	4077079-03	95 - 120		PAFDD
=		96 - 106		PAFDD
=		96 - 106	6	
=	4077081-01	85 - 18		ADD
=		95 -	REF	ADD
			1	
=	4077081-03	85 - 18		ADD
=		95 -	REF	ADD
			1	
	4077081-17	85 - 19		ADD
		96 -	2	ADD
	4077081-18	85 - 19		ADD
		96 -	2	ADD
	4077081-19	85 - 19		ADD
		96 -	2	ADD
	4077081-20	85 - 19		ADD
		96 -	2	ADD
	4077081-23	85 - 19		ADD
		96 -	2	ADD
	4077081-24	85 - 19		ADD
		96 -	2	ADD
	4077081-26	85 - 19		ADD
		96 -	2	ADD
PW	4077082	71 - 8		
OP	4077084	84 - 15		
OP	4077085	95 - 34		
OP		96 - 28		
OP	4077086	95 - 57		
OP		96 - 48		
	4077092	71 - 29	1	XA
	4077094	100 - 11	20	PADZZ
	4077095	100 - 37	20	PADZZ
	4077096	100 - 38	4	PADZZ
	4077107	104 - 12	74	PAFZZ
	4077108	104 - 23	80	PAFZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4077114	13 - 32	1	PAFZZ
4077151	63 - 3	30	PAOBZ
4077170	28 - 20	1	PAOBZ
S 4077211	71 - 17		
4077215	28 - 25		XA
	29 - 19		XA
	30 - 16	3	XA
4077216	28 - 22		PAOBZ
	29 - 16		PAOBZ
	30 - 13	3	PAOBZ
4077219	28 - 27		PAOBZ
	29 - 12	4	PAOBZ
4077222	F 94 - 15	1	PAFZZ
4077223	94 - 18	1	XA
4077227	F 39 - 27	1	PAODD
4077228	39 - 29	1	XA
4077232	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4077233	67 - 18	2	PAOZZ
4077235	80 - 3		PAFZZ
	80 - 13	3	PAFZZ
4077236-01	56 - 3	1	PAFBZ
4077238	56 - 16	1	XA
S 4077240	56 - 8		
4077242	56 - 31	1	XA
4077243	56 - 23	2	XA
= 4077245-01	F 56 - 9	1	PAOFF
4077246	74 - 42	2	XA
4077247	74 - 60	1	XA
4077250	84 - 13	58	PAFDD
4077256-01	54 - 5	1	PAFFF
4077263	96 - 78C	1	PAFZZ
4077264	96 - 91C	1	PAFZZ
4077265	96 - 104B	1	PAFZZ
4077266	88 - 25C		PAFZZ
	88 - 27C		PAFZZ
	88 - 29C		PAFZZ
	88 - 31C	4	PAFZZ
4077267	88 - 25F		PAFZZ
	88 - 27F		PAFZZ
	88 - 29F		PAFZZ
	88 - 31F	4	PAFZZ
4077269	72 - 12	1	PADLD
4077275	42 - 35	1	XA
S 4077276	67 - 2		
	100 - 13		PAFZZ
S	100 - 13		
S	100 - 13	575	
4077287-01	95 - 96		PAFDD
	96 - 74		PAFDD
	96 - 74	6	
4077288-01	95 - 105		PAFDD
	96 - 85		PAFDD
	96 - 85	6	
4077289-01	95 - 116		PAFDD
	96 - 100		PAFDD
	96 - 100	6	
4077294	44 - 41	1	PAOZZ
4077295	62 - 9		AFF
	63 -	REF	AFF
		1	
4077296	67 - 51	2	PAOBZ
4077297	67 - 50	2	PAOBZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4077303	98 - 1	1	PADZZ
= 4077307	24 - 2	1	PAOZZ
4077314-01	56 - 12	1	PAFBZ
4077315-01	56 - 19	2	PAFZZ
4077316-01	56 - 26	1	PAFZZ
4077319	89 - 29	1	PAFDD
4077320	89 - 25	8	PAFZZ
4077341	27 - 20		PAOBZ
	37 - 28	4	PAOBZ
4077342	27 - 22		XA
	37 - 30	4	XA
4077343	27 - 23		XA
	37 - 31	4	XA
OP 4077345	63 - 89		
4077351	44 - 23	1	PAFZZ
4077354	94 - 15	1	PAFZZ
4077357	39 - 38	1	PAFZZ
4077358	48 - 33	1	PAOZZ
4077360	74 - 1	1	PAOZZ
4077369-01	13 - 19	1	PAOFF
4077370-01	13 - 20	1	PAOFF
4077373	73 - 68	23	PAFDD
= 4077376-01	F 56 - 16	2	PAOFF
= 4077377-01	F 56 - 23	1	PAOFF
= 4077391	79 - 14	2	PAFZZ
4077392	F 96 - 32	1	PAFDD
4077393	F 96 - 35	1	PAFDD
= 4077398	86 - 14	1	PAFDD
4077403	99 - 28	34	PAFFF
4077410	58 - 99	1	PAFBZ
PW 4077414	58 - 45		
4077422	89 - 28	1	PADZZ
4077423	73 - 67	1	PAFDD
4077433-01	95 - 25		PAFZZ
	96 - 19		PAFZZ
	96 - 19	4	
4077434-01	95 - 30		PAFDD
	96 - 24		PAFDD
	96 - 24	4	
4077434-02	95 - 26		PAFDD
	96 - 20		PAFDD
	96 - 20	2	
4077443	73 - 66	7	PAFDD
PW 4077452	73 - 6		
PW	86 - 3		
PW	99 - 2		
4077473	F 73 - 61	1	PAFDD
4077508-01	104 - 25		XA
S	104 - 25	33	
4077508-02	104 - 26		XA
S	104 - 26	33	
4077508-03	104 - 27		XA
S	104 - 27	2	
4077508-04	104 - 28		XA
S	104 - 28	2	
4077509-01	104 - 33		XA
S	104 - 33	35	
4077509-02	104 - 34		XA
S	104 - 34	35	
4077509-03	104 - 35		XA
S	104 - 35	2	
4077509-04	104 - 36		XA
S	104 - 36	2	
4077510-01	104 - 41		XA

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
S	4077510-01		104 - 41	39	
	4077510-02		104 - 42		XA
S			104 - 42	39	
	4077510-03		104 - 43		XA
S			104 - 43	2	
	4077510-04		104 - 44		XA
S			104 - 44	2	
	4077511-01		104 - 47		XA
S			104 - 47	41	
	4077511-02		104 - 48		XA
S			104 - 48	41	
	4077511-03		104 - 49		XA
S			104 - 49	2	
	4077511-04		104 - 50		XA
S			104 - 50	2	
	4077512-01		104 - 53		XA
S			104 - 53	37	
	4077512-02		104 - 54		XA
S			104 - 54	37	
	4077512-03		104 - 55		XA
S			104 - 55	2	
	4077512-04		104 - 56		XA
S			104 - 56	2	
	4077513-01		104 - 61		XA
S			104 - 61	40	
	4077513-02		104 - 62		XA
S			104 - 62	40	
	4077513-03		104 - 63		XA
S			104 - 63	2	
	4077513-04		104 - 64		XA
S			104 - 64	2	
PW	4077524D07		41 - 14		
	4077533	F	73 - 61	1	PAFDD
	4077582		11 - 11		PAOZZ
			22 - 34		PAOZZ
			28 - 13		PAOZZ
			37 - 3		PAOZZ
			37 - 38	11	PAOZZ
PW	4077612		5 - 18		
	4077614		89 - 51	2	PAFZZ
	4077615		89 - 50	1	PAFZZ
	4077646-01		85 - 6	1	PAFFF
	4077646-02		85 - 9	1	PAFFF
	4077647		85 - 11	7	PAFZZ
	4077670		86 - 22		PAFDD
			100 -	REF	PAFDD
				1	
	4077671		100 - 35	1	PADDD
	4077675		73 - 69	20	PADBZ
	4077676		73 - 70	1	PADDD
=	4077680		3 - 43		PAOBZ
=			11 - 12	REF	PAOBZ
=			22 - 7	REF	PAOBZ
				1	
	4077681		73 - 70	1	PADDD
	4077682		73 - 69		PADBZ
			73 - 80	40	PADBZ
	4077683	F	73 - 68	1	ADF
	4077687		81 - 11	1	PADZZ
	4077688	F	81 - 10	1	PAFLD
	4077723		89 - 27	1	PAFDD
	4077733	F	70 - 33	21	PAFDD
	4077734		95 - 31		PAFZZ
			95 - 54		PAFZZ
			96 - 25		PAFZZ
			96 - 45		PAFZZ
			96 - 45	292	
	4077801-01		63 - 76	15	PAFZZ
S	4077819		100 - 23		
	4077820		86 - 22		PAFDD
			100 -	REF	PAFDD
				1	
S	4077821		89 - 51		
S	4077824		89 - 50		
=	4077837		63 - 34	15	PAFDD
	4077838		63 - 37	30	PAFZZ
	4077839		63 - 40	15	XA
	4077875		88 - 9	1	PADDD
	4077876	F	88 - 5	1	PADDD
	4077877-01		96 - 78		PAFDD
S			96 - 78		
			96 - 79		PAFDD
S			96 - 79		
			96 - 80		PAFDD
S			96 - 80	7	
	4077877-02		96 - 81		PAFDD
S			96 - 81	1	
	4077878-01		96 - 91		PAFDD
S			96 - 91		
			96 - 92		PAFDD
S			96 - 92	4	
	4077878-02		96 - 94		PAFDD
S			96 - 94		
			96 - 95		PAFDD
S			96 - 95	4	
	4077878-03		96 - 93		PAFDD
S			96 - 93	2	
	4077879-01		96 - 104		PAFDD
S			96 - 104		
			96 - 105		PAFDD
S			96 - 105		
			96 - 106		PAFDD
S			96 - 106	10	
	4077880-01		88 - 24		PAFDD
S			88 - 24	4	
	4077880-02		88 - 28		PAFDD
S			88 - 28	4	
	4077880-03		88 - 30		PAFDD
S			88 - 30	3	
	4077880-04		88 - 26		PAFDD
S			88 - 26	1	
	4077902		99 - 16	1	PADLD
	4077908-01		31 - 32	1	PAOFF
	4077910		88 - 25J		PAFZZ
			88 - 27J		PAFZZ
			88 - 29J		PAFZZ
			88 - 31J	4	PAFZZ
	4077912		76 - 9	2	PAFZZ
	4077913		89 - 26	1	PAFDD
	4077920-01		88 - 24	4	PAFDD
	4077920-02		88 - 28	4	PAFDD
	4077920-03		88 - 30	3	PAFDD
	4077920-04		88 - 26	1	PAFDD
=	4077943		63 - 30	15	PAFFF
	4077947		29 - 24	1	PAOZZ
	4077954		99 - 36	18	PADBZ
	4077964		79 - 20	1	PAFZZ
	4077965-01		22 - 17	1	PAOFF

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP 4077968-01	69 - 10				36 - 13	3	
4077973	7 - 8		PAOBZ	4078515	6 - 29		PAOBZ
	22 - 9	REF	PAOBZ		11 - 14		PAOBZ
		1			23 - 3	3	PAOBZ
4078173	69 - 10	1	PAFDD	4078516	15 - 49		PAOBZ
4078194	71 - 26	1	PAFDD		27 - 12	2	PAOBZ
OP 4078195-01	79 - 19			4078517	21 - 7	1	PAOBZ
OP 4078196-01	79 - 18			4078518	3 - 2		PAOBZ
4078223	49 - 103	1	PAOZZ		14 - 5		PAOBZ
4078225	79 - 30	1	PAFFF		36 - 20	7	PAOBZ
4078226	79 - 32	1	PAFFF	4078519	21 - 2	2	PAOBZ
4078237	94 - 15	1	PAFZZ	4078520	15 - 3		PAOBZ
= 4078245	84 - 8		PAFDD		36 - 7	REF	PAOBZ
=	94 -	REF	PAFDD			2	
		1		4078521	13 - 4		PAOBZ
4078246	94 - 19	1	XA		15 - 62	2	PAOBZ
4078247	94 - 19	1	XA	4078522	28 - 19		PAOBZ
= 4078248	84 - 8		PAFDD		29 - 14		PAOBZ
=	94 -	REF	PAFDD		30 - 11	3	PAOBZ
		1		4078523	67 - 51	2	PAOBZ
S 4078257	88 - 35			4078524	67 - 50	2	PAOBZ
S	98 -			4078525	28 - 27		PAOBZ
4078268	99 - 38	1	PADZZ		29 - 12	4	PAOBZ
4078299	102 - 14	36	PAFZZ	4078526	28 - 20	1	PAOBZ
4078304	F 63 - 25	15	PAODD	4078527	28 - 22		PAOBZ
4078305	63 - 28	15	PAFFF		29 - 16		PAOBZ
4078317-01	58 - 95	1	PAFZZ		30 - 13	3	PAOBZ
4078323	70 - 52	1	PADZZ	4078528	27 - 20		PAOBZ
= 4078345	F 78 - 43	2	PAFDD		37 - 28	4	PAOBZ
4078346	78 - 46	2	PAFZZ	4078547	75 - 79	1	PAOZZ
S 4078348-01	96 - 91			4078548	15 - 7		PAOZZ
S	96 - 92				36 - 11	REF	PAOZZ
S 4078348-02	96 - 94					1	
S	96 - 95			4078549	15 - 54	1	PAOZZ
S 4078348-03	96 - 93			4079002	99 - 28A	1	PADDD
4078355	78 - 25	2	PAFBZ	4079003	99 - 28	34	PAFFF
4078357	86 - 14	1	PAFDD	4079017	78 - 33	2	PAFZZ
PW 4078363	11 - 1			4079019	78 - 35	2	PAFZZ
4078389	65 - 6	15	PAFZZ	4079028	78 - 37	2	PAFDD
= 4078396	65 - 14	5	PAFZZ	OP 4079029	78 - 36		
4078407	76 - 29		XA	4079041	78 - 29	2	PAFZZ
	76 - 29	2		S 4079054-01	104 - 24		
4078408	76 - 29A	4	PAFZZ	S 4079054-02	104 - 32		
4078409	78 - 68	2	PAFZZ	S 4079054-03	104 - 40		
4078411	78 - 69	2	PAFFF	S 4079054-04	104 - 46		
4078415	76 - 23	2	PAFFF	S 4079054-05	104 - 52		
4078426-01	96 - 35	1	XA	S 4079054-06	104 - 60		
4078426-02	96 - 38	1	XA	4079066-01	27 - 29	1	PAOFF
4078432	65 - 4	1	PADZZ	4079068-01	29 - 10	1	PAFFF
4078450	71 - 17	2	PAFZZ	4079069-01	28 - 17	1	PAOFF
4078474	76 - 29		XA	4079070-01	28 - 28	1	PAOFF
	76 - 29	2		S 4079071-01	44 - 43		
= 4078475	32 - 25	1	PAOZZ	= 4079087-01	95 - 98		PAFDD
4078484-01	84 - 16	3	PAFDD	=	96 - 78		PAFDD
4078484-02	84 - 17	3	PAFDD	=	96 - 78	2	
4078485	95 - 81		PAFDD	= 4079087-02	95 - 99		PAFDD
	95 - 82		PAFDD	=	96 - 79		PAFDD
=	96 - 62		PAFDD	=	96 - 79	3	
=	96 - 62	6		= 4079087-03	95 - 100		PAFDD
4078507	88 - 35		PADDD	=	96 - 80		PAFDD
	98 -	REF	PADDD	=	96 - 80	2	
		1		= 4079087-04	95 - 101		PAFDD
4078514	15 - 9		PAOBZ	=	96 - 81		PAFDD
	36 - 13	REF	PAOBZ	=	96 - 81	1	

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
=	4079088-01	95 - 107		PAFDD
=		96 - 91		PAFDD
=		96 - 91	2	
=	4079088-02	95 - 108		PAFDD
=		96 - 92		PAFDD
=		96 - 92	2	
=	4079088-03	95 - 109		PAFDD
=		96 - 93		PAFDD
=		96 - 93	2	
=	4079088-04	95 - 110		PAFDD
=		96 - 94		PAFDD
=		96 - 94	2	
=	4079088-05	95 - 111		PAFDD
=		96 - 95		PAFDD
=		96 - 95	2	
=	4079089-01	95 - 118		PAFDD
=		96 - 104		PAFDD
=		96 - 104	2	
=	4079089-02	95 - 119		PAFDD
=		96 - 105		PAFDD
=		96 - 105	2	
=	4079089-03	95 - 120		PAFDD
=		96 - 106		PAFDD
=		96 - 106	6	
	4079117	96 - 60	88	PAFZZ
	4079134	89 - 69		PAFDD
S		89 - 69		
		103 - 1	REF 1	PAFDD
	4079137	88 - 32	12	PAFZZ
	4079144	39 - 4	1	PAODD
	4079160-01	22 - 18	1	PAOFF
	4079161-01	22 - 19	1	PAOFF
	4079162-01	22 - 21	1	PAOFF
	4079163-01	22 - 22	1	PAOFF
	4079164-01	22 - 20	1	PAOFF
	4079165-01	22 - 23	1	PAOFF
	4079166-01	22 - 25	1	PAOFF
	4079167-01	22 - 24	1	PAOFF
	4079168-01	22 - 31	1	PAOFF
	4079169-01	22 - 35	1	PAOFF
	4079170	95 - 97		PAFZZ
		96 - 75		PAFZZ
		96 - 75	2	
	4079171	95 - 106		PAFZZ
		96 - 86		PAFZZ
		96 - 86	2	
	4079173	95 - 117		PAFZZ
		96 - 101		PAFZZ
		96 - 101	2	
=	4079186	63 - 59		XA
		63 - 59	30	
=	4079192	99 - 18		PAFDD
S		99 - 18		
S		99 - 18	29	
	4079207-01	96 - 74B		PAFDD
		96 - 76	16	PAFDD
	4079208-01	96 - 85B		PAFDD
		96 - 87	4	PAFDD
	4079209-01	96 - 102	10	PAFDD
	4079210	F 73 - 68	1	ADF
	4079211	F 73 - 70		PADDD
		F 73 - 81	2	PADDD
	4079212	73 - 79		PADDD
		73 - 90	2	PADDD
	4079213	73 - 70	1	PADLD
	4079214-01	96 - 85D		PAFDD
		96 - 88	16	PAFDD
	4079215	96 - 86B		PAFZZ
		96 - 90	16	PAFZZ
	4079257	79 - 12	2	XA
	4079267	96 - 75A		PAFZZ
		96 - 77	16	PAFZZ
	4079268	96 - 86A		PAFZZ
		96 - 89	4	PAFZZ
	4079269	96 - 103	10	PAFZZ
	4079278	84 - 19	8	PADZZ
	4079279	84 - 18	1	PAFDD
	4079286	95 - 77	88	PAFDD
	4079287-01	88 - 36		ADD
		104 -	REF 1	ADD
=	4079297	F 70 - 43	1	PAFDD
	4079298	70 - 65	1	XA
	4079308-01	104 - 25		PAFDD
S		104 - 25	33	
	4079308-02	104 - 26		PAFDD
S		104 - 26	33	
	4079308-03	104 - 27		PAFDD
S		104 - 27	2	
	4079308-04	104 - 28		PAFDD
S		104 - 28	2	
	4079309-01	104 - 33		PAFDD
S		104 - 33	35	
	4079309-02	104 - 34		PAFDD
S		104 - 34	35	
	4079309-03	104 - 35		PAFDD
S		104 - 35	2	
	4079309-04	104 - 36		PAFDD
S		104 - 36	2	
	4079310-01	104 - 41		PAFDD
S		104 - 41	39	
	4079310-02	104 - 42		PAFDD
S		104 - 42	39	
	4079310-03	104 - 43		PAFDD
S		104 - 43	2	
	4079310-04	104 - 44		PAFDD
S		104 - 44	2	
	4079320	88 - 16	4	PAFZZ
	4079321	88 - 17	8	PAFZZ
	4079322	88 - 20	4	PAFZZ
	4079323	88 - 21	8	PAFZZ
	4079324	88 - 23	12	PAFZZ
	4079327	72 - 12	1	PADLD
	4079330	72 - 18	1	XA
=	4079331	F 72 - 11	1	PAFLD
	4079332	F 99 - 34	1	PAFLD
	4079349-01	88 - 36		ADD
		104 -	REF 1	ADD
OP	4079356	95 - 77		
	4079366	88 - 16	4	PAFZZ
	4079367	88 - 17	8	PAFZZ
	4079368	88 - 20	4	PAFZZ
	4079369	88 - 21	8	PAFZZ
S	4079370-01	88 - 14		
	4079371-01	88 - 18		PAFDD
S		88 - 18	4	

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4079372-01	88 - 22		PAFDD
S	88 - 22	12	
4079373	88 - 23	12	PAFZZ
4079375	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
S 4079380-01	88 - 15		
4079381-01	88 - 19		PAFDD
S	88 - 19	8	
4079404	104 - 2		PADDD
S	104 - 2		
	104 - 3	104	PADDD
4079405	104 - 7		PADDD
S	104 - 7		
	104 - 8	124	PADDD
4079406	104 - 11		PAFDD
S	104 - 11	74	
4079411-01	104 - 47		PAFDD
S	104 - 47	41	
4079411-02	104 - 48		PAFDD
S	104 - 48	41	
4079411-03	104 - 49		PAFDD
S	104 - 49	2	
4079411-04	104 - 50		PAFDD
S	104 - 50	2	
4079412-01	104 - 53		PAFDD
S	104 - 53	37	
4079412-02	104 - 54		PAFDD
S	104 - 54	37	
4079412-03	104 - 55		PAFDD
S	104 - 55	2	
4079412-04	104 - 56		PAFDD
S	104 - 56	2	
4079413-01	104 - 61		PAFDD
S	104 - 61	40	
4079413-02	104 - 62		PAFDD
S	104 - 62	40	
4079413-03	104 - 63		PAFDD
S	104 - 63	2	
4079413-04	104 - 64		PAFDD
S	104 - 64	2	
4079419	84 - 8		PAFDD
	94 -	REF	PAFDD
		1	
4079426	89 - 1	1	PAFDD
= 4079430	F 70 - 43	1	PAFDD
4079431	70 - 65	1	XA
4079434	63 - 6	15	PAFZZ
4079445	96 - 31	8	PAFZZ
OP 4079446	96 - 31		
OP 4079456	95 - 77		
4079474	F 104 - 2		PAFDD
S	104 - 2	26	
OP 4079502	78 - 40		
OP 4079506	78 - 40		
OP 4079525	96 - 31		
OP 4079526	96 - 31		
OP 4079527	96 - 31		
4079528	78 - 40	2	PAFDD
OP 4079534	84 - 15		
OP 4079535	95 - 34		
OP	96 - 28		
OP 4079536	95 - 57		
OP	96 - 48		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP 4079556	95 - 77		
4079595-07	85 - 18		ADD
	95 -	REF	ADD
		1	
4079595-08	85 - 18		ADD
	95 -	REF	ADD
		1	
4079595-09	85 - 18		ADD
	95 -	REF	ADD
		1	
4079595-10	85 - 18		ADD
	95 -	REF	ADD
		1	
4079598-06	85 - 19		ADD
	96 -	REF	ADD
		1	
= 4079598-07	85 - 19		ADD
=	96 -	REF	ADD
		1	
= 4079598-09	85 - 19		ADD
S	85 - 19		
=	96 -	REF	ADD
		1	
4079598-11	85 - 19		ADD
	96 -	2	ADD
= 4079600	65 - 12	5	PAFZZ
4079610	96 - 50	44	PAFZZ
= 4079616	F 78 - 43	2	PAFDD
4079617	99 - 29	68	PADZZ
4079618	99 - 24	72	PAFZZ
= 4079621	99 - 28	34	PAFFF
4079623	99 - 22	1	PADLD
4079640-01	79 - 7		PAFZZ
	79 - 15	16	PAFZZ
4079689	65 - 10	15	PAFZZ
4079696	96 - 58	88	PAFDD
4079707	104 - 22		PAFDD
S	104 - 22	80	
S 4079736	100 - 23		
4079745	76 - 29	2	PAFDD
4079768	1 - 14		PAFDD
	74 -	REF	PAFDD
		1	
4079769-01	74 - 82	1	XA
4079771	1 - 15		PAFDD
	75 -	REF	PAFDD
		1	
4079772-01	75 - 67	1	XA
4079778	11 - 11		PAOZZ
	20 - 26		PAOZZ
	22 - 34		PAOZZ
	28 - 13		PAOZZ
	37 - 3		PAOZZ
	37 - 38	12	PAOZZ
4079798	103 - 30	4	PAFZZ
4079812-01	73 - 28	7	PAFLD
4079830	53 - 80	2	XA
4079831	89 - 69		PAFDD
S	89 - 69		
	103 - 1	REF	PAFDD
		1	
4079842	53 - 78		PAFZZ
	53 - 83	4	PAFZZ
4079849	65 - 2	1	PAFZZ

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4079857		99 - 38	1	PADZZ
	4079858-01		104 - 17	1	PADDD
	4079894		53 - 79		PAFZZ
			53 - 84	8	PAFZZ
	4079895		53 - 85	2	PAFZZ
	4079896		53 - 75	2	XA
	4079898		42 - 44	1	PAOZZ
	4079899		42 - 46	1	PAOZZ
	4079906		77 - 16		PAFZZ
			77 - 21		PAFZZ
			78 - 16	6	PAFZZ
=	4079912-01		56 -	1	PAOFF
	4079920		77 - 23		PADZZ
			78 - 18	4	PADZZ
	4079921	F	77 - 19		PAFDD
		F	78 - 13	4	PAFDD
	4079922		42 - 44	1	PAOZZ
	4079923		42 - 46	1	PAOZZ
	4079926		88 - 2		PAFZZ
			88 - 6	24	PAFZZ
	4079927	F	88 - 5	1	PADDD
	4079928		88 - 1	12	PAFZZ
	4079932		99 - 18		PAFDD
S			99 - 18	29	
=	4079937	F	99 - 34	1	PAFLD
=	4079938-01		56 -	1	PAOFF
=	4079939-01	F	56 - 9	1	PAOFF
=	4079940-01	F	56 - 16	2	PAOFF
=	4079941-01	F	56 - 23	1	PAOFF
	4079942		99 - 18		PAFDD
S			99 - 18	29	
	4079943		56 - 3	1	PAFBZ
	4079944		56 - 12	1	PAFBZ
	4079945		56 - 19	2	PAFZZ
	4079946		56 - 26	1	PAFZZ
	4079947		56 - 5		XA
S			56 - 6		
			56 - 28		XA
S			56 - 29	2	
	4079948		56 - 14		XA
			56 - 21	3	XA
S	4079949		56 - 16		
	4079950		56 - 23	2	XA
=	4079951		100 - 13	575	PAFZZ
=	4079961-01		99 - 27	1	PAFBZ
	4079964		63 - 58	30	PAFZZ
=	4079968	F	99 - 34	1	PAFLD
	4079969		99 - 38	1	PADZZ
S	4079979		56 - 31		
S	4079981		100 - 32		
S	4079982		100 - 33		
	4080000	F	73 - 68	1	ADF
	4080005		86 - 11	16	PAFZZ
	4080006		77 - 41		PAFBZ
			78 - 62	4	PAFBZ
	4080007	F	77 - 39		PAFBZ
		F	78 - 58	4	PAFBZ
	4080008		86 - 22		PAFDD
			100 -	REF	PAFDD
				1	
	4080012-01		86 - 12	1	PAFDD
OP	4080018		78 - 36		
OP	4080019		78 - 36		
	4080030-01		88 - 24	4	PAFDD

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4080030-02		88 - 28	4	PAFDD
	4080030-03		88 - 30	3	PAFDD
	4080030-04		88 - 26	1	PAFDD
	4080043	F	73 - 68	1	ADF
	4080062-01		60 - 62	1	PADZZ
	4080063	F	70 - 43	1	PAFDD
	4080064	F	70 - 43	1	PAFDD
=	4080080		86 - 14	1	PAFDD
=	4080082		102 - 7	1	PAFLD
	4080083		70 - 65	1	XA
	4080084-01		85 - 19		ADD
			96 -	REF	ADD
				1	
	4080084-02		85 - 19		ADD
			96 -	REF	ADD
				1	
=	4080084-03		85 - 19		ADD
=			96 -	REF	ADD
				1	
=	4080084-04		85 - 19		ADD
=			96 -	REF	ADD
				1	
	4080084-05		85 - 19		ADD
			96 -	REF	ADD
				1	
	4080084-06		85 - 19		ADD
			96 -	REF	ADD
				1	
	4080084-08		85 - 19		ADD
			96 -	REF	ADD
				1	
	4080086-01		55 - 4	1	PAFFF
	4080101-01		88 - 36		ADD
			104 -	REF	ADD
				1	
=	4080102-01		104 - 72	1	PADDD
	4080111		78 - 36	4	PADZZ
	4080123		56 - 4	1	XA
	4080124		56 - 13	1	XA
	4080125		56 - 20	2	XA
	4080126		56 - 27	1	XA
	4080134		73 - 41	6	PADZZ
	4080135		73 - 42	1	XA
	4080136	F	73 - 40F	1	PADLD
PW	4080141		41 - 14		
OP	4080156		96 - 58		
	4080167		34 - 32		PAOZZ
			35 - 7	2	PAOZZ
=	4080171	F	99 - 39	34	PAFZZ
=	4080176-01		56 -	1	PAOFF
=	4080177-01	F	56 - 9	1	PAOFF
	4080179-01		96 - 104		PAFDD
			96 - 105		PAFDD
			96 - 106	10	PAFDD
=	4080180-01	F	56 - 16	2	PAOZZ
=	4080181-01	F	56 - 23	1	PAOFF
	4080185	F	104 - 7		PAFDD
S			104 - 7	31	
=	4080201		99 - 39		PADZZ
=			99 - 40	136	PADZZ
	4080202		49 - 30		PAOZZ
			50 - 24	5	PAOZZ
OP	4080256		96 - 58		
	4080291-01		88 - 19	8	PAFDD

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4080299	88 - 25		PADZZ
		88 - 27		PADZZ
		88 - 29		PADZZ
		88 - 31	36	PADZZ
	4080301	99 - 42	1	PADLD
	4080302-01	85 - 19		ADD
		96 -	REF	ADD
			1	
	4080302-02	85 - 19		ADD
		96 -	REF	ADD
			1	
	4080302-04	85 - 19		ADD
		96 -	REF	ADD
			1	
	4080315-01	71 - 42	1	PAFDD
	4080320	70 - 32	1	PAFFF
	4080325	96 - 46	76	PAFDD
OP	4080335	96 - 46		
	4080342	99 - 14		PADLD
S		99 - 14		
		99 - 15	144	PADLD
S	4080343	100 - 34		
S	4080344	100 - 31		
S	4080346	100 - 30		
S	4080347	100 - 29		
S	4080348	100 - 28		
S	4080349	100 - 20		
S	4080350	100 - 21		
S	4080351	100 - 22		
	4080352	99 - 18	29	PAFDD
S	4080353	100 - 17		
S	4080354	100 - 18		
OP	4080355	96 - 46		
S	4080357	100 - 19		
S	4080358	100 - 16		
S	4080359	100 - 15		
S	4080360	100 - 14		
S	4080361	100 - 12		
S	4080362	100 - 32		
S	4080363	100 - 33		
	4080365-01	F 34 - 53	1	PAOBZ
	4080366	34 - 59	1	XA
OP	4080374	39 - 37		
OP	4080375	39 - 37		
OP	4080376	39 - 37		
=	4080377	39 - 37	1	PAFDD
	4080378	59 - 2	1	PAFZZ
OP	4080379	59 - 2		
	4080380-01	88 - 14	4	PAFDD
	4080381-01	88 - 18	4	PAFDD
	4080382-01	88 - 22	12	PAFDD
	4080390-01	88 - 15	8	PAFDD
	4080392	F 99 - 14	36	PAFDD
=	4080394-01	99 - 27	1	PAFBZ
	4080395	74 - 95	1	PAOZZ
	4080396-01	104 - 17	1	PADDD
	4080405-01	88 - 36		ADD
		104 -	REF	ADD
			1	
	4080407-01	88 - 36		ADD
		104 -	REF	ADD
			1	
	4080408-01	104 - 17	1	PADDD
=	4080412-01	62 - 40		PAODD

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
		65 - 1	REF	PAODD
			1	
=	4080429	99 - 3	1	PADLD
=	4080430-01	86 - 4	1	PAFDD
	4080430-02	86 - 5	1	XA
S	4080457	34 - 60		
	4080472	89 - 30	2	PAFZZ
PW	4080477	6 - 40		
PW	4080478	7 - 40		
	4080479	34 - 22	1	PAOZZ
	4080480	94 - 19	1	XA
	4080483	84 - 8		PAFDD
		94 -	REF	PAFDD
			1	
=	4080487-01	96 - 78	2	PAFDD
=	4080487-02	96 - 79	3	PAFDD
=	4080487-03	96 - 80	2	PAFDD
=	4080487-04	96 - 81	1	PAFDD
	4080497-01	96 - 78	2	PAFDD
	4080497-02	96 - 79	3	PAFDD
	4080497-03	96 - 80	2	PAFDD
	4080497-04	96 - 81	1	PAFDD
	4080503	73 - 53		PADDD
S		73 - 53	1	
	4080512	63 - 130	5	PAFBZ
=	4080513	63 - 123	1	PAFDD
	4080514	63 - 132	10	PAFZZ
	4080526	73 - 81	1	PADLD
	4080527	F 73 - 79B	1	PAFLD
	4080545-01	96 - 109		PAFDD
		97 - 1	REF	PAFDD
			1	
	4080575	86 - 22		PAFDD
		100 -	REF	PAFDD
			1	
	4080576-01	34 - 19	1	PAODD
PW	4080580	30 - 35		
	4080583-01	58 - 98	1	PAOZZ
	4080585	F 63 - 57	30	PAOZZ
	4080603	73 - 53	1	PADDD
PW	4080618	30 - 36		
=	4080632	99 - 28	34	PAFFF
	4080635	F 99 - 34	1	PAFLD
	4080636	99 - 36	18	PADBZ
	4080637	99 - 38	1	PADZZ
	4080664	67 - 116	1	PAOZZ
	4080665	34 - 61	1	PAOBZ
	4080670-01 #	53 - 73	1	PAOFF
	4080672-01 #	53 - 54	1	PAOFF
PW	4080687	40 - 8		
	4080694	F 73 - 30A	33	PAFDD
	4080704	73 - 30		PADDD
		73 - 31	132	PADDD
	4080705	99 - 35		PAFZZ
		99 - 35	54	PAFZZ
OP	4080711-01	63 - 67		
	4080717	96 - 27	70	PAFZZ
	4080718	96 - 47	76	PAFZZ
	4080719	89 - 7A	1	PADZZ
	4080720-01	88 - 36		ADD
		104 -	REF	ADD
			1	
=	4080730-01	88 - 24	4	PAFDD
=	4080730-02	88 - 28	4	PAFDD

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
=	4080730-03	88 - 30	3	PAFDD
=	4080730-04	88 - 26	1	PAFDD
	4080732	63 - 67	15	PAODD
=	4080737-01	96 - 78D	7	PAFDD
=	4080737-02	96 - 79C	1	PAFDD
=	4080738-01	96 - 91D	4	PAFDD
=	4080738-02	96 - 92C	4	PAFDD
=	4080738-03	96 - 93C	2	PAFDD
=	4080739-01	96 - 104C	10	PAFDD
	4080751	74 - 110	4	PADZZ
	4080752	74 - 111	4	PADZZ
	4080782	42 - 2	1	PAOFF
	4080783	42 - 7	1	PAOFF
	4080787-01	104 - 24	2	PAFZZ
	4080787-02	104 - 32	2	PAFZZ
	4080787-03	104 - 40	2	PAFZZ
	4080787-04	104 - 46	2	PAFZZ
	4080787-05	104 - 52	2	PAFZZ
	4080787-06	104 - 60	2	PAFZZ
	4080807	104 - 68	1	PADDD
	4080809	84 - 4	30	PAFZZ
	4080811	104 - 13	1	PAFLD
	4080812-01	88 - 36		ADD
		104 -	REF	ADD
			1	
	4080823-801	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-802	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-803	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-804	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-805	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-806	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-807	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-808	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-809	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-810	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
		71 -	1	
	4080823-811	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-812	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-813	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-814	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-815	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-816	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-817	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-835	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-836	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-837	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-838	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-839	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-840	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-841	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-842	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4080823-843	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4080823-843	71 -	REF	PAFDD		71 -	REF	PAFDD
4080823-843		1				1	
4080823-844	1 - 13		PAFDD	4080823-877	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-845	1 - 13		PAFDD	4080823-878	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-846	1 - 13		PAFDD	4080823-879	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-847	1 - 13		PAFDD	4080823-880	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-848	1 - 13		PAFDD	4080823-881	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-849	1 - 13		PAFDD	4080823-882	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-850	1 - 13		PAFDD	4080823-883	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-851	1 - 13		PAFDD	4080823-884	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-852	1 - 13		PAFDD	4080823-885	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-853	1 - 13		PAFDD	4080823-886	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-854	1 - 13		PAFDD	4080823-887	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-872	1 - 13		PAFDD	4080823-888	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-873	1 - 13		PAFDD	4080823-889	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-874	1 - 13		PAFDD	4080823-890	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-875	1 - 13		PAFDD	4080823-891	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-876	1 - 13		PAFDD	4080823-892	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4080823-892	71 -	REF	PAFDD		71 -	REF	PAFDD
4080823-892		1				1	
4080823-893	1 - 13		PAFDD	4080823-909	1 - 13		PAFDD
	F 55 - 46	REF	PAFDD		F 55 - 46	REF	PAFDD
	71 -	REF	PAFDD		71 -	REF	PAFDD
		1				1	
4080823-894	1 - 13		PAFDD	4080829	84 - 8		PAFDD
	F 55 - 46	REF	PAFDD		94 -	REF	PAFDD
	71 -	REF	PAFDD			1	
		1		4080830	94 - 19	1	XA
4080823-895	1 - 13		PAFDD	= 4080834	65 - 12	5	PAFZZ
	F 55 - 46	REF	PAFDD	= 4080835	65 - 14		PAFZZ
	71 -	REF	PAFDD		65 - 16	25	PAFZZ
		1		= 4080836	65 - 18	8	PAFZZ
4080823-896	1 - 13		PAFDD	= 4080837-01	63 - 34	15	PAFDD
	F 55 - 46	REF	PAFDD	4080837-02	63 - 41	15	XA
	71 -	REF	PAFDD	4080837-03	63 - 40	15	XA
		1		= 4080839-01	63 - 42	15	PAFFF
4080823-897	1 - 13		PAFDD	4080874	93 - 23	1	PAFDD
	F 55 - 46	REF	PAFDD	= 4080875-01	84 - 1		AFF
	71 -	REF	PAFDD	=	93 -	REF	AFF
		1				1	
4080823-898	1 - 13		PAFDD	4080877	84 - 8		PAFDD
	F 55 - 46	REF	PAFDD		94 -	REF	PAFDD
	71 -	REF	PAFDD			1	
		1		4080878	94 - 19	1	XA
4080823-899	1 - 13		PAFDD	4080879	84 - 8		PAFDD
	F 55 - 46	REF	PAFDD		94 -	REF	PAFDD
	71 -	REF	PAFDD			1	
		1		4080880	94 - 19	1	XA
4080823-900	1 - 13		PAFDD	4080882	84 - 8		PAFDD
	F 55 - 46	REF	PAFDD		94 -	REF	PAFDD
	71 -	REF	PAFDD			1	
		1		4080883-01	88 - 36		ADD
4080823-901	1 - 13		PAFDD		104 -	REF	ADD
	F 55 - 46	REF	PAFDD			1	
	71 -	REF	PAFDD	4080884-01	88 - 36		ADD
		1			104 -	REF	ADD
4080823-902	1 - 13		PAFDD			1	
	F 55 - 46	REF	PAFDD	4080888	44 - 18	2	PAFZZ
	71 -	REF	PAFDD	4080898	68 - 2	25	PAFZZ
		1		= 4080903	67 - 93	25	PAFZZ
4080823-903	1 - 13		PAFDD	4080925-01	20 - 15	1	PAOFF
	F 55 - 46	REF	PAFDD	4080926-01	20 - 14	1	PAOFF
	71 -	REF	PAFDD	4080927-01	20 - 6		PAFZZ
		1			74 - 96	REF	PAFZZ
4080823-904	1 - 13		PAFDD			1	
	F 55 - 46	REF	PAFDD	4080928	20 - 16	1	PAFZZ
	71 -	REF	PAFDD	4080936	34 - 35	2	PAOZZ
		1		4080949	53 - 41B		PAOZZ
4080823-905	1 - 13		PAFDD	S	53 - 41B	1	
	F 55 - 46	REF	PAFDD	4080950	53 - 94		PAOZZ
	71 -	REF	PAFDD	S	53 - 94	1	
		1		4080951	53 - 61B		PAOZZ
4080823-906	1 - 13		PAFDD	S	53 - 61B		
	F 55 - 46	REF	PAFDD		53 - 95		PAOZZ
	71 -	REF	PAFDD	S	53 - 95	2	
		1		4080954	53 - 92		PAOZZ
4080823-907	1 - 13		PAFDD	S	53 - 92	1	
	F 55 - 46	REF	PAFDD	4080955	53 - 61A		PAOZZ
	71 -	REF	PAFDD	S	53 - 61A		
		1			53 - 93		PAOZZ
4080823-908	1 - 13		PAFDD	S	53 - 93	2	
	F 55 - 46	REF	PAFDD	4080956	53 - 41A		PAOZZ

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
S	4080956		53 - 41A	1	
	4080978		89 - 7B	2	PADZZ
	4080994		15 - 29		PAOZZ
			36 - 37	REF	PAOZZ
			75 - 75	REF	PAOZZ
				1	
PW	4080995-P01		36 - 36		
=	4081024		91 - 5	1	PAFLD
	4081039-01		31 - 9	1	PAOFF
	4081052		67 - 117	1	PAOZZ
	4081053-01		96 - 28	70	PAFZZ
	4081054-01		96 - 48	76	PAFZZ
	4081055		78 - 50	58	PAFZZ
	4081056		96 - 5		PAFZZ
			96 - 29	134	PAFZZ
	4081057		78 - 63		PAFZZ
			78 - 71	12	PAFZZ
	4081083-01		15 - 36	1	PAOFF
	4081084-01		15 - 46	1	PAOFF
	4081085-01		36 - 27	1	PAOFF
	4081086-01		36 - 35	1	PAOFF
	4081087-01		36 - 26	1	PAOFF
PW	4081090-01		22 - 36		
PW	4081091-01		19 - 11		
PW	4081092-01		19 - 10		
	4081093-01		31 - 15	1	PAOFF
	4081096-01		22 - 30	1	PAOFF
PW	4081097-01		14 - 20		
PW	4081099-01		67 - 52		
	4081108-01	F	58 - 80C	1	PAOBZ
	4081108-02		58 - 80J	1	XA
PW	4081109-01		30 - 34		
	4081111-01		24 - 24D	1	PAOFF
PW	4081112-01		24 - 24A		
PW	4081114-01		67 - 54		
	4081117		100 - 12	24	PAFZZ
	4081119		99 - 20	29	PAFZZ
	4081128	F	71 - 5	1	PAFLD
	4081129		71 - 7	1	XA
	4081140-01		66 - 8	15	PAFZZ
	4081141		74 - 93	1	PAFZZ
	4081165		55 - 21	1	PAOBZ
	4081173		15 - 52		PAFZZ
			27 - 13	REF	PAFZZ
				1	
	4081206		34 - 57	1	PAFZZ
PW	4081210-01		15 - 22		
=	4081214-01		62 - 40		PAODD
			65 - 1	REF	PAODD
				1	
	4081218		34 - 60	1	PAOBZ
	4081223		68 - 37	1	PADZZ
	4081238		58 - 80F	1	XA
	4081239		58 - 82B	1	PAOZZ
PW	4081242		7 - 40		
	4081244		56 - 6		XA
			56 - 29	2	XA
	4081245		56 - 31	1	XA
	4081247		56 - 8	1	PAFZZ
	4081248		56 - 16	1	XA
PW	4081276		79 - 33		
	4081281		71 - 47	1	PAOZZ
	4081283		55 - 14	1	PAOZZ
	4081284		53 - 89A	1	
=	4081289-01		63 - 30	15	PAFFF
PW	4081290-01		36 - 28		
	4081294-01		55 - 17	1	PAOFF
	4081295		74 - 96B	1	PAOZZ
	4081296		20 - 38	1	PAOZZ
	4081298		16 - 6	1	PAOZZ
	4081300	F	88 - 1	1	PADDD
PW	4081308-01		20 - 27		
PW	4081309-01		20 - 28		
	4081315-01		21 - 9	1	PAOFF
	4081323	F	73 - 48	43	PAFDD
	4081328-01		22 - 16	1	PAOFF
=	4081346-01		74 - 98	2	PAFZZ
	4081373		21 - 7G	1	PAFZZ
	4081397-01		28 - 17	1	PAOFF
	4081398-01		28 - 28	1	PAOFF
S	4081399		67 - 11		
	4081400		35 - 20	1	PAFZZ
	4081404		67 - 10		PAFDD
S			67 - 10	2	
	4081406		67 - 2		PAFZZ
=			100 - 13	577	PAFZZ
=	4081425		63 - 102	30	PAFZZ
	4081427	F	39 - 48	1	PAFFF
	4081428		39 - 54	1	PADZZ
	4081433		75 - 71	1	PAOZZ
	4081455-01		21 - 17	1	PAOFF
	4081456-01		21 - 12	1	PAOFF
	4081458		39 - 53	1	XA
	4081459		39 - 51	1	XA
=	4081460-01		103 - 8	1	PADDD
	4081460-02		103 - 9B	1	PADLD
	4081465-01		22 - 31	1	PAOFF
	4081468		7 - 9A		PAOBZ
			22 - 10A	REF	PAOBZ
				1	
=	4081469-01		104 - 72	1	PADDD
	4081473		60 - 98	1	PADZZ
	4081481-01		37 - 20	1	PAOFF
	4081482-01		37 - 41B	1	PAOFF
	4081492		6 - 26	1	PAFZZ
	4081506		104 - 11		PAFDD
S			104 - 11	74	
	4081507		104 - 22	80	PAFDD
	4081518		37 - 26A	1	PAOBZ
	4081522-01		104 -	REF	ADD
	4081524		104 - 2		PAFDD
S			104 - 2	26	
	4081525		104 - 7		PAFDD
S			104 - 7	62	
	4081545-01		15 - 71	1	PAOFF
	4081547		37 - 48A	1	PAOBZ
	4081548-01		49 - 102A	1	PAFZZ
	4081566		70 - 8	1	PAFDD
	4081569-01		37 - 46	1	PAOFF
OP	4081572-01		79 - 19		
OP	4081573-01		79 - 18		
	4081574		79 - 19	1	PAFZZ
	4081575		79 - 18	1	PAFZZ
	4081576		75 - 77	1	PAOZZ
	4081590-01		44 - 43	1	PAOZZ
=	4081603		73 - 48		PADDD
			73 - 49	172	PADDD
	4081604		104 - 2		PADDD

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
S	4081604	104 - 2		
		104 - 3	78	PADDD
	4081605	104 - 7		PADDD
S		104 - 7		
		104 - 8	93	PADDD
	4081609-01	104 - 33	35	PAFDD
	4081609-02	104 - 34	35	PAFDD
	4081609-03	104 - 35	2	PAFDD
	4081609-04	104 - 36	2	PAFDD
	4081611-01	104 - 47	41	PAFDD
	4081611-02	104 - 48	41	PAFDD
	4081611-03	104 - 49	2	PAFDD
	4081611-04	104 - 50	2	PAFDD
	4081613-01	104 - 61	40	PAFDD
	4081613-02	104 - 62	40	PAFDD
	4081613-03	104 - 63	2	PAFDD
	4081613-04	104 - 64	2	PAFDD
=	4081633-01	70 - 39	1	PADDD
	4081642	1 - 15		PAFDD
		75 -	REF	PAFDD
			1	
	4081643-01	75 - 67	1	XA
	4081665	73 - 29	1	PAFLD
	4081672-01	84 - 16	3	PAFDD
	4081672-02	84 - 17	3	PAFDD
	4081734	F 73 - 30A	33	PAFDD
	4081736	55 - 30		PAFBZ
S		55 - 30	1	
	4081755	73 - 40F	1	PADLD
	4081773	63 - 117A	5	PAFZZ
	4082204	73 - 30		PADDD
		73 - 31	132	PADDD
	4082208-01	104 - 25	33	PAFDD
	4082208-02	104 - 26	33	PAFDD
	4082208-03	104 - 27	2	PAFDD
	4082208-04	104 - 28	2	PAFDD
	4082210-01	104 - 41	39	PAFDD
	4082210-02	104 - 42	39	PAFDD
	4082210-03	104 - 43	2	PAFDD
	4082210-04	104 - 44	2	PAFDD
	4082212-01	104 - 53	37	PAFDD
	4082212-02	104 - 54	37	PAFDD
	4082212-03	104 - 55	2	PAFDD
	4082212-04	104 - 56	2	PAFDD
	4082235	71 - 44B	1	PADBZ
	4082236-01	71 - 44C	1	PADZZ
	4082237	71 - 44D	1	PADZZ
	4082239	71 - 44A	1	PAFDD
	4082241-01	37 - 41A	1	PAOFF
=	4082257-01	67 - 97		PAFLD
=		68 - 1	REF	PAFLD
			1	
=	4082258-01	67 - 97		PAFLD
=		68 - 1	REF	PAFLD
			1	
=	4082259-01	67 - 97		PAFLD
=		68 - 1	REF	PAFLD
			1	
=	4082260-01	67 - 97		PAFLD
=		68 - 1	REF	PAFLD
			1	
=	4082261-01	67 - 97		PAFLD
=		68 - 1	REF	PAFLD
			1	
	4082266-01	68 - 19	1	XA
	4082267-01	68 - 21A	1	XA
	4082269-01	68 - 18	1	XA
	4082270-01	68 - 16	1	XA
	4082271-01	68 - 17	1	XA
	4082274	F 73 - 31	30	PAFDD
	4082284-01	5 - 19	1	PAOFF
	4082284-02	5 - 25	1	PAFZZ
	4082292	68 - 21	4	XA
	4082297	73 - 40D	1	PADLD
	4082318	73 - 40E	1	PADZZ
PW	4082475	34 - 39		
	4082478	73 - 40D	1	PADZZ
	4082484	73 - 40B	1	PADLD
	4082486	F 99 - 34	1	PAFLD
	4082487	99 - 38	1	PADZZ
	4082488	71 - 13A	1	PAFZZ
	4082503	99 - 36	18	PADBZ
	4082504	73 - 30A		PADDD
		73 - 31A	120	PADDD
S	4082513	53 - 41B		
S	4082514	53 - 94		
S	4082515	53 - 61B		
S		53 - 95		
S	4082516	53 - 92		
S	4082517	53 - 61A		
S		53 - 93		
S	4082518	53 - 41A		
	4082534	F 73 - 30A	33	PAFDD
	4082584	F 67 - 63		XA
		67 - 63	1	
	4082595	20 - 31	2	PAOZZ
PW	4082600D05	51 - 18		
	4082604	73 - 40A		PADLD
		73 - 40C	2	PADLD
	4082609-800	1 - 10		PAFDD
S		1 - 10		
		58 -	REF	PAFDD
			1	
OP	4082610	62 - 23		
	4082617	72 - 11	3	PAFZZ
	4082618	71 - 22		AFF
		72 -	REF	AFF
			1	
=	4082619-01	13 - 18A	1	PAOFF
=	4082620-01	13 - 13A	1	PAOFF
PW	4082642-01	30 - 36A		
	4082643-01	58 - 98A	1	PAOZZ
	4082644-01	30 - 26A	3	PAOBZ
	4082645	30 - 29	3	XA
	4082646	30 - 30	3	XA
	4082651-01	30 - 21A	1	PAOFF
	4082653-800	1 - 12		PAFDD
		67 -	REF	PAFDD
			1	
=	4082654-800	1 - 16		PAFDD
=		76 -	REF	PAFDD
=		F 99 - 42	REF	PAFDD
			1	
=	4082654-801	1 - 16		PAFDD
=		76 -	REF	PAFDD
=		F 99 - 42	REF	PAFDD
			1	
=	4082654-802	1 - 16		PAFDD

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
=	4082654-802	76 -	REF	PAFDD
=		F 99 - 42	REF	PAFDD
			1	
	4082654-803	1 - 16		PAFDD
		76 -	REF	PAFDD
		99 - 42	2	PAFDD
	4082655-800	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
	4082655-801	1 - 13		PAFDD
		F 55 - 46	REF	PAFDD
		71 -	REF	PAFDD
			1	
=	4082657-801	1 - 16		PAFDD
=		76 -	REF	PAFDD
=		F 99 - 42	REF	PAFDD
			1	
=	4082657-803	1 - 16		PAFDD
=		76 -	REF	PAFDD
=		F 99 - 42	REF	PAFDD
			1	
=	4082657-806	1 - 16		PAFDD
=		76 -	REF	PAFDD
=		F 99 - 42	REF	PAFDD
			1	
=	4082657-807	1 - 16		PAFDD
=		76 -	REF	PAFDD
=		F 99 - 42	REF	PAFDD
			1	
	4082657-808	1 - 16		PAFDD
		76 -	REF	PAFDD
		99 - 42	2	PAFDD
	4082663-01	65 - 24	1	PAFBZ
	4082667-01	63 - 34	15	PAFDD
	4082667-02	63 - 41	1	XA
	4082667-03	63 - 40	1	XA
PW	4082678-01	8 - 13B		
	4082679	55 - 37	1	PAFBZ
	4082704	73 - 30		PADDD
		73 - 31	132	PADDD
	4082748-01	86 - 19G		PAFZZ
		100 - 39A	2	PAFZZ
PW	4082753-01	39 - 13A		
PW		39 - 13A		
PW		73 - 5A		
PW		73 - 5A		
PW		73 - 43A		
PW		73 - 43A		
PW		73 - 62A		
PW		73 - 62A		
PW		86 - 2A		
PW		86 - 2A		
PW		99 - 1A		
PW		99 - 1A		
	4082785	100 - 36	1	XA
	4082786	100 - 27	1	XA
	4082788-01	86 - 12		PAFDD
S		86 - 12	1	
	4082791-01	99 - 27	1	PAFBZ
=	4082793-01 #	53 - 36	1	PAFDD
	4082813	51 - 83	1	PAFZZ
	4082817-01	30 - 21B	1	PAOFF
	4082818-01	30 - 21C	1	PAOFF
	4082826	93 - 3	1	PADZZ
	4082848	96 - 64	6	PAFDD
	4082849	96 - 63	6	PAFDD
	4082851	96 - 62	6	PAFDD
	4082861	99 - 36	18	PADBZ
	4082862	F 99 - 34	1	PAFLD
	4082863	99 - 38	1	PADZZ
	4082871-01	84 - 16	3	PAFDD
	4082871-02	84 - 17	3	PAFDD
	4082885	99 - 21	1	PAFZZ
	4082888	89 - 1A	1	PADZZ
	4082889	89 - 1B	2	PADZZ
	4082894	53 - 32A	7	PAFZZ
	4082895	53 - 32B	7	PAFZZ
	4082896	53 - 33A	7	PAOZZ
	4082897	53 - 28A	14	PAOZZ
	4082905	89 - 34A	1	PADZZ
	4082932-01	73 - 54	7	PAFDD
	4082934-01	73 - 57	1	PAFDD
	4082935	73 - 55		PAFZZ
		73 - 58	2	PAFZZ
	4082938-01	104 - 72	1	PAFZZ
	4082964	62 - 41		PAFDD
		66 - 1	2	PAFDD
=	4082971	F 99 - 39	34	PAFDD
	4082975	F 73 - 79B	1	PAFLD
	4082982	73 - 69		PADBZ
		73 - 80	40	PADBZ
=	4082991	86 - 19	23	PAFZZ
	4082999	63 - 39A	1	PAFZZ
	4083015-700	86 - 1		PAFDD
		99 -	2	PAFDD
	4083015-701	86 - 1		PAFDD
		99 -	2	PAFDD
	4083023	73 - 67	1	PAFDD
	4083033	73 - 66	7	PAFDD
	4083038	67 - 16	1	PAOZZ
	4083039	67 - 15	1	PAOZZ
	4083052	100 - 34	12	PAFZZ
	4083053	100 - 31	4	PAFZZ
	4083054	100 - 30	12	PAFZZ
	4083055	100 - 29	12	PAFZZ
	4083056	100 - 28	12	PAFZZ
	4083057	100 - 20	10	PAFZZ
	4083058	100 - 21	1	PAFZZ
	4083059	100 - 22	1	PAFZZ
	4083060	100 - 17	10	PAFZZ
	4083061	100 - 18	1	PAFZZ
	4083062	100 - 19	1	PAFZZ
	4083063	100 - 16	12	PAFZZ
	4083064	100 - 15	12	PAFZZ
	4083065	100 - 14	12	PAFZZ
	4083066	100 - 32	4	PAFZZ
	4083067	100 - 33	4	PAFZZ
	4083077	63 - 115	5	PAFZZ
	4083091	86 - 19	23	PAFZZ
	4083095	86 - 22		PAFDD
		100 -	REF	PAFDD
			1	
	4083096	100 - 23	1	PADDD
S	4083112-01	71 - 31		
	4083113	71 - 26	1	PAFDD
	4083114	71 - 29	1	XA
OP	4083117	62 - 23		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4083127	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083128	100 - 23	1	PADDD
4083129	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083132	63 - 151	AR	PAFZZ
4083135	63 - 152	AR	PAFZZ
4083144	87 - 17	1	PAFDD
4083150	70 - 25	1	PAFDD
4083151	87 - 18	1	PAFZZ
4083156	65 - 22	15	PAFZZ
= 4083169-01	62 - 40A		PAODD
=	65 - 1	REF	PAODD
		1	
= 4083180-01	62 - 40A		PAODD
=	65 - 1	REF	PAODD
		1	
4083184	89 - 37A	1	PADZZ
4083194	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083195	100 - 23	1	PADDD
4083197-01	86 - 19F		PAFZZ
	100 - 27A	2	PAFZZ
4083198-01	28 - 46	1	PAOBZ
4083199-01	27 - 7	1	PAOFF
4083210	89 - 71	1	PADLD
4083212	103 - 32A	1	PADDD
4083213	73 - 68	23	PAFDD
4083214	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083215	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083216	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
PW 4083219	48 - 37		
= 4083223-01 #	53 - 36	1	PAOZZ
4083237-01	86 - 4	1	PAFDD
4083237-02	86 - 5	1	XA
4083238	99 - 3	1	PADLD
4083239-01	73 - 7	1	PAFDD
4083239-02	73 - 7B	1	PADZZ
4083239-03	73 - 7A	1	PADZZ
4083240	73 - 50	1	PADDD
4083241	73 - 5A		PAFZZ
	86 - 2A		PAFZZ
	99 - 1A	30	PAFZZ
4083252-01	28 - 10	1	PAOFF
4083255	F 73 - 68	1	ADF
4083256	F 73 - 68	1	ADF
4083257	73 - 68	1	ADF
4083403	73 - 61	1	PAFDD
4083510	53 - 40	1	PAOZZ
4083519	F 73 - 81	1	PADDD
4083520	73 - 90	1	XA
4083556	86 - 14	1	PAFDD
4083558	89 - 70		PAFDD
	103 - 1A	2	PAFDD
4083559-01	86 - 4	1	PAFDD

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4083559-02	86 - 5	1	XA
4083560	86 - 22		PAFDD
	100 -	2	PAFDD
4083561	100 - 23	1	PADDD
4083562	99 - 3	1	PADLD
4083563	86 - 14	1	PAFDD
4083564	89 - 70		PAFDD
	103 - 1A	2	PAFDD
4083565	86 - 22		PAFDD
	100 -	2	PAFDD
4083566	100 - 23	1	PADDD
PW 4083569	79 - 33		
4083582	99 - 18	29	PAFDD
4083597	86 - 19A	23	PAFZZ
4083658	34 - 18	5	PAOZZ
= 4083660	3 - 43		PAOBZ
=	11 - 12	REF	PAOBZ
=	22 - 7	REF	PAOBZ
		1	
4083666-01	73 - 28A	14	PAFLD
4083667	86 - 19E		PAFZZ
	100 - 27B	46	PAFZZ
4083668-01	63 - 42	15	PAFFF
4083681-01	F 99 - 34	1	PAFLD
4083681-02	99 - 38	1	PADZZ
4083683-01	99 - 38A	36	PADBZ
4083690	86 - 19D	23	PAFZZ
4083725	88 - 25G		PAFZZ
	88 - 27G		PAFZZ
	88 - 29G		PAFZZ
	88 - 31G	4	PAFZZ
4083726	88 - 25D		PAFZZ
	88 - 27D		PAFZZ
	88 - 29D		PAFZZ
	88 - 31D	4	PAFZZ
4083727	88 - 25A		PAFZZ
	88 - 27A		PAFZZ
	88 - 29A		PAFZZ
	88 - 31A	4	PAFZZ
4083728	96 - 104A		PAFZZ
	96 - 104D		PAFZZ
	96 - 105A		PAFZZ
	96 - 106A	4	PAFZZ
4083729	96 - 91A		PAFZZ
	96 - 91E		PAFZZ
	96 - 92A		PAFZZ
	96 - 92D		PAFZZ
	96 - 93A		PAFZZ
	96 - 93D		PAFZZ
	96 - 94A		PAFZZ
	96 - 95A	8	PAFZZ
4083730	96 - 78A		PAFZZ
	96 - 78E		PAFZZ
	96 - 79A		PAFZZ
	96 - 79D		PAFZZ
	96 - 80A		PAFZZ
	96 - 81A	6	PAFZZ
4083738	55 - 1A	1	PAFZZ
4083739	55 - 1B	1	PAFZZ
4083830	89 - 70		PAFDD
S	89 - 70		
	103 - 1A		PAFDD
S	103 - 1A	2	
4083859-01	37 - 14	1	PAOFF

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
4083877-01	96 - 78		PAFDD
	96 - 79		PAFDD
	96 - 80	7	PAFDD
4083877-02	96 - 81	1	PAFDD
4083880-01	88 - 24	4	PAFDD
4083880-02	88 - 28	4	PAFDD
4083880-03	88 - 30	3	PAFDD
4083880-04	88 - 26	1	PAFDD
PW 4083900D06	51 - 18		
4083913	89 - 69		PAFDD
	103 - 1	2	PAFDD
4083925	103 - 34	1	PAFZZ
4083942	86 - 19B	23	PAFZZ
4083944	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083945	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083946	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083947	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083948	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083949	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4083970	86 - 14	1	PAFDD
4083973	100 - 35	1	PADDD
4083978-01	96 - 91		PAFDD
	96 - 92	4	PAFDD
4083978-02	96 - 94		PAFDD
	96 - 95	4	PAFDD
4083978-03	96 - 93	2	PAFDD
4083979-01	96 - 104		PAFDD
	96 - 105		PAFDD
	96 - 106	10	PAFDD
4083997 #	58 - 16	1	PAODD
4084007	86 - 20	23	PAFZZ
4084008	86 - 21	23	PAFZZ
4084017	58 - 25	1	PAOZZ
4084020	58 - 87		ADF
	60 -	2	ADF
4084021	58 - 87		ADF
	60 -	2	ADF
4084022	58 - 87		ADF
	60 -	2	ADF
4084030	65 - 27	15	PAFZZ
4084033-01	37 - 23	1	PAOFF
4084039	65 - 23	1	PAFBZ
4084046	99 - 19	29	PAFZZ
PW 4084053	34 - 39		
4084071-01	65 - 25	1	PADDD
4084072	86 - 10A	1	PADZZ
4084073	86 - 5A	1	PADZZ
4084074-01	21 - 10	1	PAOFF
4084082	100 - 34	12	PAFZZ
4084083	100 - 31	4	PAFZZ
4084084	100 - 32	4	PAFZZ
4084085	100 - 33	4	PAFZZ
4084086	100 - 20	10	PAFZZ
4084087	100 - 21	1	PAFZZ
4084088	100 - 22	1	PAFZZ
4084089	86 - 22		PAFDD
	100 -	REF	PAFDD
		1	
4084095	34 - 33		PAOZZ
	35 - 8	2	PAOZZ
4084102	73 - 6A		PAFZZ
	86 - 3A		PAFZZ
	99 - 2A	30	PAFZZ
4084103	73 - 53	1	PADDD
4084105	104 - 7	31	PADDD
4084106	104 - 11	74	PAFDD
4084124	104 - 2	26	
4084125	104 - 7	62	PAFDD
4084134	F 73 - 42	1	PAFDD
4084157	96 - 50	44	PAFZZ
4084169	67 - 11	2	PADZZ
4084170	67 - 10	2	PAFDD
4084171	99 - 39		PAFDD
S	99 - 39	34	
PW 4084174	80 - 4		
4084228	73 - 53	1	PADDD
4084231	73 - 53	1	PADDD
4084234	89 - 69		PAFDD
	103 - 1	2	PAFDD
4084235	89 - 69		PAFDD
	103 - 1	2	PAFDD
4084237	89 - 70		PAFDD
	103 - 1A	2	PAFDD
4084254-01	85 - 19		ADD
	96 -	REF	ADD
		1	
= 4084257-01	96 - 78D	7	PAFDD
= 4084257-02	96 - 79C	1	PAFDD
= 4084258-01	96 - 91D	4	PAFDD
= 4084258-02	96 - 92C	4	PAFDD
= 4084258-03	96 - 93C	2	PAFDD
4084259-01	96 - 104C	10	PAFDD
4084272	55 - 21	1	PAOBZ
4084273-01	55 - 17	1	PAOFF
4084415-01	67 - 118	1	
PW 4084428D07	51 - 18		
4084430	84 - 8		PAFDD
	94 -	REF	PAFDD
		1	
4084431	84 - 8		PAFDD
	94 -	REF	PAFDD
		1	
4084432	84 - 8		PAFDD
	94 -	REF	PAFDD
		1	
4084433	84 - 8		PAFDD
	94 -	REF	PAFDD
		1	
4084434	84 - 8		PAFDD
	94 -	REF	PAFDD
		1	
4084435	84 - 8		PAFDD
	94 -	REF	PAFDD
		1	
4084436	84 - 8		PAFDD

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4084436	94 -	REF	PAFDD
	4084436		1	
	4084443	84 - 8		PAFDD
		94 -	REF	PAFDD
			1	
	4084447	65 - 5A	AR	PAFZZ
	4084477-01	96 - 78D	7	PAFDD
	4084477-02	96 - 79C	1	PAFDD
	4084478-01	96 - 91D	4	PAFDD
	4084478-02	96 - 92C	4	PAFDD
	4084478-03	96 - 93C	2	PAFDD
=	4084480-01	88 - 24	4	PAFDD
=	4084480-02	88 - 28	4	PAFDD
=	4084480-03	88 - 30	3	PAFDD
=	4084480-04	88 - 26	1	PAFDD
	4084485-01	71 - 31	1	PAFDD
	4084517-700	86 - 1		PAFDD
		99 -	2	PAFDD
	4084522-800	1 - 16		PAFDD
		76 -	REF	PAFDD
		99 - 42	2	PAFDD
	4084522-801	1 - 16		PAFDD
		76 -	REF	PAFDD
		99 - 42	2	PAFDD
	4084522-802	1 - 16		PAFDD
		76 -	REF	PAFDD
		99 - 42	2	PAFDD
	4084530-01	88 - 24	4	PAFDD
	4084530-02	88 - 28	4	PAFDD
	4084530-03	88 - 30	3	PAFDD
	4084530-04	88 - 26	1	PAFDD
=	4084579-01	96 - 104C	10	PAFDD
	4084603	73 - 61	1	PAFDD
	4084715-01	62 - 40		PAODD
		65 - 1	2	PAODD
PW	4084728D08	41 - 14		
	4084758-800	1 - 11		PAFDD
		62 -	REF	PAFDD
			1	
	4084771	99 - 39	34	PAFZZ
	4084784-01	79 - 6	1	PAFZZ
	4084785-01	79 - 5	1	PAFZZ
	4084786-01	79 - 4	10	PAFZZ
	4084787-01	79 - 1	10	PAFZZ
	4084788-01	79 - 3	1	PAFZZ
	4084789-01	79 - 2	1	PAFZZ
	4084792	79 - 24		PAFZZ
		79 - 31	3	PAFZZ
	4084794	79 - 30	1	PAFFF
	4084795	79 - 23		PAFZZ
		79 - 29	3	PAFZZ
<	4084796-01	79 - 26A	1	PAFZZ
	4084796-02	79 - 26B	1	PAFZZ
	4084797	79 - 32	1	PAFFF
	4084798	79 - 9A	5	PAFZZ
	4084799	79 - 17A	5	PAFZZ
	4084815	79 - 25D		PAFZZ
		79 - 26D	2	PAFZZ
	4084821	79 - 28A	1	PAFZZ
	4084822	79 - 27A	1	PAFZZ
	4084824	85 - 5	2	PAFZZ
<	4084825-01	79 - 25A	1	PAFZZ
	4084825-02	79 - 25B	1	PAFZZ
	4084828	79 - 27D	1	PAFZZ
	4084829	79 - 28E	1	PAFZZ
	4084830	79 - 27C	1	PAFZZ
	4084831	79 - 28C	1	PAFZZ
	4084837	79 - 32A	1	PAFZZ
	4084840-01	79 - 32B	2	PAFZZ
PW	4084846	79 - 27B		
PW		79 - 28B		
PW	4084847	79 - 28D		
	4084858-800	1 - 11		PAFDD
		62 -	REF	PAFDD
			1	
	4084871	58 - 64	1	PAOZZ
	4084884	63 - 148	AR	PAFZZ
	4084885	63 - 149	AR	PAFZZ
=	4084901	99 - 39		PADDD
=		99 - 40	136	PADDD
	4084917	68 - 38	1	PADZZ
	4084995-01	96 - 74C		PADZZ
		96 - 76A	4	PADZZ
	4084995-02	96 - 74A	2	PADZZ
	4084996-01	96 - 85C		PADZZ
		96 - 87A	4	PADZZ
	4084996-02	96 - 85A	2	PADZZ
	4084996-03	96 - 85E		PADZZ
		96 - 88A	4	PADZZ
	4084997	96 - 102A	2	PADZZ
	4085001	99 - 42	1	PADLD
	4085004	104 - 2		PADDD
		104 - 3	78	PADDD
PW	4085021	62 - 27		
PW		64A - 1		
PW	4085022	62 - 26		
PW		64 - 1		
PW	4085036	47 - 12		
PW	4085037	31 - 27		
PW	4085038	20 - 35		
PW	4085039	20 - 27		
PW	4085040	15 - 72		
PW	4085041	16 - 7		
PW	4085042	20 - 34		
PW	4085043	20 - 28		
PW	4085044	49 - 17		
PW	4085045	23 - 8		
PW	4085046	21 - 18		
PW	4085047	19 - 10		
PW	4085048	14 - 20		
PW	4085049	45 - 5		
PW	4085050	49 - 1		
PW	4085051	23 - 9		
PW	4085053	15 - 22		
PW	4085054	22 - 36		
PW	4085055	32 - 25		
PW	4085056	30 - 36A		
PW	4085057	36 - 36		
PW	4085070	19 - 11		
PW	4085071	18 - 16		
PW	4085072	28 - 45		
PW	4085073	36 - 28		
PW	4085074	13 - 13A		
PW	4085075	13 - 18A		
PW	4085076	24 - 2		
PW	4085077	24 - 1		
PW	4085078	24 - 24A		
	4085095	55 - 30	1	PAFBZ

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4085123-01		86 - 12	1	PAFDD
	4085170		58 - 87		ADF
			60 -	2	ADF
	4085301		99 - 40	68	PADZZ
=	4086054		28 - 45	1	PAOZZ
	4086294-01		70 - 39	1	PADDD
	4086295-01		70 - 39	1	PADDD
	4086301		99 - 40	2	PADDD
	4086309-01		95 - 102A		PAFZZ
			96 - 82A	12	PAFZZ
	4086309-02		95 - 112A		PAFZZ
			96 - 96A	16	PAFZZ
	4086309-03		95 - 121A		PAFZZ
			96 - 107A	16	PAFZZ
	4086310		95 - 122A		PAFZZ
			96 - 108A	16	PAFZZ
	4086314-01		80 - 21	1	PAFZZ
	4086325-800		1 - 10		PAFDD
			58 -	REF	PAFDD
				1	
	4086342	F	99 - 14		PADLD
			99 - 15	144	PADLD
PW	4086349		79 - 27B		
PW			79 - 28B		
	4086361		99 - 39	34	PAFDD
	4086392	F	99 - 14	36	PAFDD
=	4086401		99 - 39	34	PAFDD
	4086411		78 - 8		XA
			78 - 24	4	XA
	4086412		78 - 2		PAFBZ
			78 - 18	4	PAFBZ
	4086413-01		88 - 15A	2	PADZZ
	4086413-02		88 - 14A	2	PADZZ
	4086415-01		88 - 19A	2	PADZZ
	4086415-02		88 - 18A	2	PADZZ
	4086415-03		88 - 19A	2	PADZZ
	4086415-04		88 - 18A	2	PADZZ
	4086419-01		88 - 22A	2	PADZZ
	4086419-02		88 - 22A	2	PADZZ
	4086421		53 - 41B	1	PAOZZ
	4086423		53 - 94	1	PAOZZ
	4086424		53 - 61B		PAOZZ
			53 - 95	2	PAOZZ
	4086425		53 - 92	1	PAOZZ
	4086426		53 - 61A		PAOZZ
			53 - 93	2	PAOZZ
	4086427		53 - 41A	1	PAOZZ
OP	4086488		63 - 59		
=	4086489		63 - 59	30	XA
	4086531		1 - 14		PAFDD
			74 -	REF	PAFDD
				1	
	4086671		1 - 14		PAFDD
			74 -	REF	PAFDD
				1	
	4086701		99 - 40	2	PADDD
	4087101		99 - 40	68	PADDD
	4087201		99 - 42	1	PADLD
	420068	#	11 - 1	1	PAODD
	420133	#	6 - 40	1	PAODD
	420134		7 - 40		PAODD
S			7 - 40	1	
	420434	#	7 - 40	1	PAODD
	425422		94 - 10	2	PAFZZ

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	427992		28 - 4	1	PAOZZ
	4301682		86 - 7	37	PAFZZ
	4302197		89 - 3		PAFZZ
			89 - 10	68	PAFZZ
PW	438863		69 - 3		
	440491		62 - 14	5	PAOFF
	441293	#	44 - 10	2	PAOLD
	441435	#	67 - 37	1	PAODD
	441436	#	67 - 22	1	PAODD
	441441	#	45 - 27	1	PAOLD
	441451		48 - 5	1	PAODD
	441452		48 - 11	1	PAODD
	441481		46 - 5	1	PAOLD
	441579	#	49 - 32	1	PAODD
	441612	#	48 - 37	1	PAODD
S	441614		62 - 27		
		#	64A - 1	REF	PAOLD
S	441615		62 - 26		
		#	64 - 1	REF	PAODD
	441720	#	44 - 10	2	PAOLD
	441721	#	49 - 32	1	PAODD
	441944	#	48 - 37	1	PAODD
	442020	#	62 - 27		PAODD
		#	64A - 1	REF	PAODD
				4	
	442021	#	62 - 26		PAODD
		#	64 - 1	REF	PAODD
				1	
S	444613		94 - 3		
S			94 - 4		
	44838	#	41 - 1	1	PAOLD
	45104		3 - 35	1	PAOZZ
	45105		4 - 9	1	PAOZZ
=	453331		18 - 10		XA
=			32 - 34	4	XA
	45674		68 - 36	2	PAOZZ
	45676		68 - 35	1	PAOZZ
	45689	#	11 - 23	1	PAOFF
	45731-1341		43 - 12		
		#	43 - 18	1	PAODD
	46122		41 - 5	1	PAOBZ
	46194	#	10 - 7	1	PAODD
	46195	#	9 - 7	1	PAODD
	46196	#	8 - 14	1	PAODD
	46197	#	4 - 14	1	PAODD
	46198	#	11 - 1	1	PAODD
	46215	#	11 - 39	1	PAOFF
	46216	#	11 - 31	1	PAOFF
	46274		68 - 4	1	PAOFF
	46275		68 - 12	1	PAOFF
	46276		68 - 8	1	PAOFF
	46300	#	5 - 14	1	PAODD
	46301	#	3 - 46	1	PAODD
	46387	#	11 - 47	1	PAOFF
	46470	#	40 - 8	2	PAOLD
	473452		39 - 26	1	PAOBZ
	47418	#	40 - 8		PAOLD
S			40 - 8	2	
	476067		94 - 5	1	PAFZZ
	48171-10		111 - 22	1	PAFZZ
	48172-10		111 - 21	1	PAFZZ
	483220		89 - 60	1	PAFZZ

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	490235		89 - 9	1	PAFZZ
	494624		82 - 10A	1	PAFZZ
	494677		98 - 5	68	PADZZ
=	495996		18 - 10		XA
=			32 - 34	4	XA
	4F-4071429		73 - 79A	1	PADDD
	4X696		106A -104	2	
	503519		73 - 27	3	PAFZZ
	503612		73 - 22	8	PADZZ
	515P947-01	#	79 - 33		PAFLD
S			79 - 33	12	
OP	51692-4		63 - 4		
OP	51744-6		63 - 107		
	519P292-01	#	79 - 33	12	PAFLD
=	528664		70 - 47	4	PADZZ
	5302	#	5 - 18	7	PAOZZ
OP	53714-440-H19		3 - 36		
OP			4 - 12		
OP			11 - 2		
	539418		47 - 26		PAOZZ
			58 - 82	8	PAOZZ
	53T850		5 - 24	1	PAFZZ
PW	544550		68 - 28		
	557-S-4		44 - 10P		PAOZZ
			67 - 22H		PAOZZ
			67 - 41C	9	PAOZZ
	557-S-6		67 - 41A	2	PAOZZ
	5612-159-062		108 - 21		PAFZZ
			108 - 48		PAFZZ
			109 - 28		PAFZZ
			112 - 31		PAFZZ
			112 - 90K	21	PAFZZ
	567494		57 - 15	1	PAOZZ
	5710-59-60		108 - 11		PAFZZ
			108 - 38		PAFZZ
			109 - 18		PAFZZ
			112 - 21	20	PAFZZ
	585406		73 - 76		PAFZZ
			73 - 87	2	PAFZZ
OP	58729M-428		44 - 6		
OP			67 - 4		
OP			67 - 20		
OP			67 - 35		
OP	590318		91 - 5		
OP	5903188		91 - 5		
OP	590803		83 - 11		
OP	592794		71 - 11		
	593720		76 - 35	4	PAFZZ
	5F-4071429		73 - 79B	1	PADDD
OP	5RNH116-29		71 - 11		
OP	6011400		84 - 12		
	6071001-01		52 - 16	1	PAOZZ
	6071001-02		52 - 20	1	PAOZZ
OP	611489		60 - 27		
OP	61149-428		98 - 5		
	627998		45 - 3	1	PAOZZ
	628000		58 - 11	1	PAOZZ
	637287		99 - 25	72	PAFZZ
	642107		60 - 66	1	PADZZ
	6436K21		106A -98	2	
	645795		49 - 107	2	PAFZZ
	647178		84 - 11	1	PAFZZ
	655443		77 - 61		PAFZZ
			77 - 66		PAFZZ
			78 - 57	8	PAFZZ
OP	66725-36		79 - 35		
OP	67864		34 - 20		
	6870012E6	#	79 - 34	12	PAFLD
OP	69079		59 - 2		
OP	69082		95 - 103		
OP			96 - 83		
	69253-4		114 - 1	1	
	69336-254		50 - 28	6	PAOZZ
	69336-255		51 - 22	19	PAOZZ
	69336-256		50 - 43		PAOZZ
			50 - 47		PAOZZ
			50 - 51	9	PAOZZ
	69336-262		50 - 31		PAOZZ
			50 - 35		PAOZZ
			50 - 39	12	PAOZZ
	70035	#	43 - 5	1	PAOLD
	704342		34 - 17		PAOZZ
			34 - 30		PAOZZ
			53 - 41		PAOZZ
			53 - 61		PAOZZ
			53 - 89		PAOZZ
			53 - 91		PAOZZ
			58 - 77		PAOZZ
			67 - 106A	31	PAOZZ
	708500	#	47 - 38	1	PAODD
	714099		59 - 26		PAFZZ
			61 - 12	6	PAFZZ
OP	72785-1032		34 - 56		
OP			67 - 66		
OP			76 - 1		
OP			93 - 1		
OP	73182-428		85 - 4		
OP	73332-1032		67 - 88		
OP	73589-1032		53 - 2		
OP			53 - 27		
OP			53 - 34		
OP			53 - 43		
OP			53 - 47		
OP			53 - 52		
OP			53 - 62		
OP			53 - 68		
OP			53 - 71		
OP	73916-1032		1 - 5		
OP			1 - 7		
OP			3 - 1		
OP			3 - 6		
OP			3 - 12		
OP			3 - 15		
OP			3 - 18		
OP			3 - 20		
OP			3 - 23		
OP			3 - 30		
OP			3 - 33		
OP			3 - 41		
OP			3 - 44		
OP			4 - 2		
OP			4 - 5		
OP			4 - 7		
OP			4 - 10		
OP			5 - 3		
OP			5 - 5		
OP			5 - 8		
OP			5 - 10		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP 73916-1032	5 - 12		
OP	5 - 19		
OP	6 - 6		
OP	6 - 9		
OP	6 - 16		
OP	6 - 22		
OP	6 - 27		
OP	6 - 34		
OP	6 - 36		
OP	7 - 3		
OP	7 - 6		
OP	7 - 9		
OP	7 - 9B		
OP	7 - 11		
OP	7 - 16		
OP	7 - 21		
OP	7 - 23		
OP	7 - 26		
OP	7 - 36		
OP	8 - 6		
OP	8 - 9		
OP	8 - 12		
OP	9 - 2		
OP	9 - 5		
OP	10 - 2		
OP	10 - 5		
OP	11 - 10		
OP	11 - 13		
OP	11 - 15		
OP	11 - 20		
OP	13 - 2		
OP	13 - 5		
OP	13 - 31		
OP	13 - 33		
OP	14 - 2		
OP	14 - 6		
OP	14 - 10		
OP	14 - 13		
OP	14 - 18		
OP	15 - 2		
OP	15 - 8		
OP	15 - 13		
OP	15 - 15		
OP	15 - 20		
OP	15 - 30		
OP	15 - 44		
OP	15 - 50		
OP	15 - 53		
OP	15 - 61		
OP	15 - 67		
OP	15 - 69		
OP	16 - 3		
OP	17 - 4		
OP	18 - 11		
OP	19 - 1		
OP	20 - 2		
OP	20 - 4		
OP	20 - 7		
OP	20 - 9		
OP	20 - 12		
OP	20 - 17		
OP	20 - 18		
OP	20 - 20		
OP	20 - 25		
OP	20 - 29		
OP	21 - 1		
OP	21 - 6		
OP	21 - 7B		
OP	21 - 7E		
OP	21 - 14		
OP	22 - 2		
OP	22 - 8		
OP	22 - 10		
OP	22 - 10B		
OP	22 - 12		
OP	22 - 15		
OP	22 - 27		
OP	22 - 33		
OP	23 - 1		
OP	24 - 34		
OP	26 - 6		
OP	27 - 1		
OP	27 - 10		
OP	27 - 14		
OP	27 - 16		
OP	27 - 19		
OP	27 - 24		
OP	28 - 5		
OP	28 - 12		
OP	28 - 15		
OP	28 - 18		
OP	28 - 21		
OP	28 - 26		
OP	28 - 27B		
OP	28 - 41		
OP	29 - 2		
OP	29 - 11		
OP	29 - 13		
OP	29 - 15		
OP	29 - 23		
OP	30 - 10		
OP	30 - 12		
OP	30 - 17		
OP	30 - 24		
OP	30 - 42		
OP	31 - 2		
OP	31 - 5		
OP	31 - 7		
OP	31 - 13		
OP	31 - 19		
OP	31 - 22		
OP	32 - 10		
OP	32 - 13		
OP	32 - 40		
OP	34 - 2		
OP	34 - 14		
OP	34 - 28		
OP	34 - 62		
OP	36 - 1		
OP	36 - 6		
OP	36 - 12		
OP	36 - 17		
OP	36 - 19		
OP	36 - 30		
OP	36 - 33		
OP	36 - 38		
OP	37 - 1		
OP	37 - 7		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP 73916-1032	37 - 10		
OP	37 - 13		
OP	37 - 27		
OP	37 - 32		
OP	37 - 37		
OP	37 - 50		
OP	37 - 59		
OP	37 - 60		
OP	40 - 2		
OP	40 - 9		
OP	40 - 17		
OP	41 - 30		
OP	42 - 10		
OP	43 - 9		
OP	44 - 42		
OP	44 - 45		
OP	46 - 7		
OP	47 - 47		
OP	48 - 1		
OP	48 - 25		
OP	48 - 31		
OP	48 - 34		
OP	49 - 24		
OP	51 - 13		
OP	51 - 68		
OP	51 - 74		
OP	55 - 2		
OP	55 - 15		
OP	55 - 41		
OP	58 - 80A		
OP	58 - 98C		
OP	62 - 19		
OP	62 - 30		
OP	62 - 42		
OP	63 - 20		
OP	63 - 97		
OP	67 - 24		
OP	67 - 31		
OP	67 - 42		
OP	67 - 48		
OP	71 - 1		
OP	71 - 23		
OP	73 - 26		
OP	73 - 71		
OP	73 - 82		
OP	74 - 102		
OP	74 - 105		
OP	74 - 108		
OP	77 - 42		
OP	78 - 66		
OP	79 - 8		
OP	79 - 10		
OP	79 - 16		
OP	82 - 17		
OP	100 - 8		
OP 73916-428	15 - 31		
OP	20 - 37		
OP	24 - 32		
OP	26 - 2		
OP	27 - 6		
OP	28 - 30		
OP	32 - 20		
OP	32 - 27		
OP	35 - 17		
OP	36 - 39		
OP	40 - 31		
OP	42 - 1		
OP	43 - 6		
OP	43 - 12		
OP	44 - 11		
OP	44 - 22		
OP	44 - 44		
OP	45 - 8		
OP	45 - 15		
OP	45 - 28		
OP	47 - 32		
OP	49 - 29		
OP	49 - 101		
OP	50 - 22		
OP	50 - 54		
OP	51 - 76		
OP	52 - 2		
OP	53 - 41		
OP	53 - 59		
OP	53 - 61		
OP	53 - 89		
OP	53 - 91		
OP	56 - 1		
OP	56 - 10		
OP	56 - 17		
OP	56 - 24		
OP	57 - 8		
OP	57 - 14		
OP	58 - 2		
OP	58 - 17		
OP	58 - 23		
OP	58 - 32		
OP	58 - 88		
OP	60 - 15		
OP	60 - 35		
OP	63 - 55		
OP	63 - 82		
OP	63 - 93		
OP	63 - 116		
OP	67 - 29		
OP	67 - 105		
OP	71 - 45		
OP	74 - 83		
OP	75 - 68		
OP 73916-524	17 - 1		
OP	63 - 62		
OP	63 - 79		
73916-624	47 - 25		PAOZZ
	58 - 81	12	PAOZZ
OP 74252-428	46 - 6		
OP	67 - 106		
OP	67 - 106A		
OP 74483-428	76 - 16		
OP	95 - 6		
OP	96 - 4		
OP 74483-524	53 - 1		
OP	53 - 25		
OP	53 - 45		
OP	53 - 46		
OP	53 - 64		
OP	53 - 65		
OP	53 - 67		
OP 74735-1032	58 - 8		

	PART NUMBER		FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP	74735-1032		89 - 14		
OP			89 - 43		
OP			95 - 27		
OP			95 - 50		
OP			95 - 73		
OP			96 - 21		
OP			96 - 41		
OP			96 - 54		
OP			103 - 6		
OP			103 - 11		
OP			103 - 17		
OP			103 - 20		
OP	7541935		42 - 28		
OP	75796		102 - 14		
=	76467-832		39 - 13A		PAFZZ
=			73 - 5A		PAFZZ
=			73 - 43A		PAFZZ
=			73 - 62A		PAFZZ
=			86 - 2A		PAFZZ
=			99 - 1A	150	PAFZZ
	773635-10		51 - 31		PAOZZ
			51 - 41	2	PAOZZ
	773635-11		51 - 42	1	PAOZZ
	773635-8		51 - 50		PAOZZ
			51 - 56	3	PAOZZ
	773635-9		51 - 30	2	PAOZZ
	782451		71 - 6	6	PAFZZ
	783263-2		51 - 24	1	PAOZZ
	785212-4		41 - 24	1	PAFLD
	785214-2		41 - 23	1	PAFLD
	786246-2		41 - 25	1	PAFZZ
	786249-1		41 - 20	1	PAFZZ
	788372-2		50 - 38	1	PAOLD
	788373-2		50 - 34	1	PAOLD
	788374-2		50 - 30	1	PAOLD
	789940H04D06	#	41 - 14	1	PAOLD
	789940H05D07	#	41 - 14	1	PAOLD
	789940H06D08	#	41 - 14	1	PAODD
	790100	#	50 - 26	1	PAODD
	791884-2-004		41 - 22	1	PAFLD
	792840	#	45 - 13	1	PAOLD
	796344-1		51 - 25	1	PAFLD
S	796346-2		51 - 32		
	796346-3		51 - 32	1	PAFLD
S	796348-1		51 - 43		
	796348-2		51 - 43	1	PAFLD
	796520-4-013		51 - 51	1	PAFLD
	796520-4-014		51 - 51	1	PAFLD
	796520-4-015		51 - 51	1	PAFLD
	796521H06D05	#	51 - 18	1	PAOLD
	796521H07D06	#	51 - 18	1	PAOLD
	796521H08D07	#	51 - 18	1	PAODD
	796585-2		51 - 62	1	PAFZZ
	796598-2		51 - 58	1	PAFZZ
	798151-2		51 - 59	1	PAFZZ
	798840-1		50 - 27	1	PAOZZ
	8001014		F 52 - 42	1	PAFZZ
	8001015		F 52 - 35	1	PAFZZ
	8001016		F 52 - 37	1	PAFZZ
	8001017		F 52 - 39	1	PAFZZ
	8001018		F 52 - 31	1	PAOZZ
	801032-1		50 - 46	1	PAOLD
	801032-2		50 - 42	1	PAOLD
	801032-3		50 - 50	1	PAOLD
	806144	*	61 - 15	1	XA
	806145		61 - 18	1	XA
=	807		110 - 46		KF
=			112 - 63	5	KF
OP	80800-428		63 - 4		
=	808094		41 - 14	1	PAOLD
=	809		108 - 132		KF
=			108A -54		KF
=			112 - 64	8	KF
OP	80923-624		63 - 107		
=	809498		41 - 14	1	PAOLD
OP	81382-1032		53 - 76A		
OP			53 - 81A		
OP	82158-1032		44 - 25		
OP			63 - 50		
OP			77 - 7		
OP			77 - 30		
OP			78 - 4		
OP			78 - 20		
OP			78 - 27		
OP			78 - 42		
OP	82158-428		44 - 16		
OP			77 - 2		
OP			78 - 11		
OP			78 - 31		
	83280		108 - 136		PADZZ
			108A -60		PADZZ
			109 - 75		PADZZ
			110 - 57		PADZZ
			111 - 32		PADZZ
			111A -35		PADZZ
			112 - 67		PADZZ
			113 - 47	53	PADZZ
OP	83459-1032		89 - 3		
OP			89 - 10		
OP	83459-524		86 - 7		
	83533-624		85 - 14	20	PAFZZ
	83533-720		85 - 12	4	PAFZZ
	83533-820		85 - 16	4	PAFZZ
OP	83748-1032		103 - 30		
OP	83890-524		86 - 7		
OP	84568-9616		67 - 61		
OP	84569-6216		67 - 62		
OP	84570-5616		39 - 37		
OP	84780-1032		63 - 134		
OP	84829-428		98 - 5		
OP	84892-428		85 - 4		
OP			95 - 6		
OP			96 - 4		
OP	87-5000		42 - 22		
OP	87-5001		42 - 25		
=	9044505-1		40 - 4	2	PAOBZ
=	9044510-1		40 - 34	2	PAOBZ
	909281-K35		48 - 6		PAOZZ
			48 - 12		PAOZZ
			62 - 15	7	PAOZZ
	910090127		52 - 25A	1	PAFZZ
	910092117-01		52 - 19		XA
			52 - 41	2	XA
	910093002		F 52 - 25A	1	PAFFF
	910093102		52 - 7		XA
			52 - 35		XA
			52 - 37		XA
			52 - 39		XA

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	910093102	52 - 42		XA
		52 - 44	6	XA
	910093111	52 - 4		PAFZZ
		52 - 32	2	PAFZZ
	910093112	52 - 31	1	XA
	910093113	52 - 25	1	PAFZZ
	910094	52 - 1	1	PAOFF
	910094004	52 - 10		PAFZZ
		52 - 36	2	PAFZZ
	910094005	52 - 13		PAFZZ
		52 - 38	2	PAFZZ
	910094007	52 - 23		XA
		52 - 43	2	XA
	910094008	52 - 17		XA
		52 - 40	2	XA
	910094009	52 - 21	1	PAFZZ
	910094106-01	52 - 8		PAFZZ
		52 - 33	2	PAFZZ
	910094106-02	52 - 9		PAFZZ
		52 - 34	2	PAFZZ
	910728	49 - 60		PAOZZ
		49 - 124	2	PAOZZ
	911289	49 - 84		PAOZZ
		49 - 138	6	PAOZZ
	911290	49 - 64		PAOZZ
		49 - 66		PAOZZ
		49 - 68		PAOZZ
		49 - 73		PAOZZ
		49 - 78		PAOZZ
		49 - 128		PAOZZ
		49 - 132		PAOZZ
		49 - 142		PAOZZ
		49 - 144		PAOZZ
		49 - 146	18	PAOZZ
OP	9122UK900	91 - 5		
OP	9122UK901	91 - 5		
OP	9131UK900	83 - 11		
=	92445-32	47 - 42	2	PAOZZ
=	92446-42	47 - 40	1	PAOZZ
OP	92617-428	53 - 27A		
OP		79 - 9B		
OP	92617-524	89 - 73		
OP	92752-428	86 - 19C		
OP		89 - 5		
OP	92801-1032	103 - 30		
	93149-21	47 - 39A	2	PAOZZ
OP	9359	42 - 25		
	93707	43 - 20		PAOZZ
		43 - 22	9	PAOZZ
	93712	43 - 24	3	PAOZZ
	93714	43 - 21		PAOZZ
		43 - 23	2	PAOZZ
	93715	43 - 19	2	PAOZZ
OP	9383	42 - 22		
	953527-121	48 - 41		PAOZZ
		48 - 43		PAOZZ
		48B - 7	8	PAOZZ
	953527-122	49 - 58		PAOZZ
		49 - 83		PAOZZ
		49 - 122		PAOZZ
		49 - 137	14	PAOZZ
	953527-484	49 - 72		PAOZZ
		49 - 127	6	PAOZZ
	953527-486	49 - 63		PAOZZ
		49 - 77		PAOZZ
		49 - 131		PAOZZ
		49 - 141	8	PAOZZ
	953527-500	48B - 2		PAOZZ
		49 - 38		PAOZZ
		49 - 42		PAOZZ
		49 - 65		PAOZZ
		49 - 109		PAOZZ
		49 - 113		PAOZZ
		49 - 143		PAOZZ
		67 - 38B		PAOZZ
		67 - 41H	30	PAOZZ
	953527-505	49 - 67		PAOZZ
		49 - 145	2	PAOZZ
	953527-84	49 - 36		PAOZZ
		49 - 36J	3	PAOZZ
	953528-120	49 - 48		PAOZZ
		49 - 94	3	PAOZZ
	953528-123	49 - 36A	1	PAOZZ
	953528-141	49 - 50	4	PAOZZ
	953528-191	44 - 10C		PAFZZ
		44 - 10Q		PAFZZ
		67 - 22J		PAFZZ
		67 - 39A		PAFZZ
		67 - 41D	28	PAFZZ
	953528-481	48 - 39	12	PAFZZ
	953528-482	64 - 5		PAFZZ
		64A - 5	20	PAFZZ
	953528-494	48 - 48	1	PAOZZ
	953528-86	44 - 10G		PAFZZ
		67 - 40	6	PAFZZ
	953528-96	67 - 22A	2	PAFZZ
	953534-118	49 - 96	1	PAOZZ
	953534-124	49 - 97	1	PAOZZ
	953534-482	67 - 39E	2	PAFZZ
	953536-118	49 - 36B	2	PAOZZ
	953536-120	49 - 36D	1	PAOZZ
	95630A248	106A -67	2	
	97840A66	106A -3	AR	
		106A -62	AR	
=	9SP-100-R6-11	108 - 117		PAFZZ
=		109 - 71		PAFZZ
=		113 - 38	304	PAFZZ
=	9SP-100-R6-13	111 - 30		PAFZZ
=		112 - 51	80	PAFZZ
OP	A7070-1	16 - 7		
	A7075-1	30 - 35	1	PAOZZ
	A7076-1	30 - 36	1	PAOZZ
=	A7195-1	36 - 36	1	PAOFF
=	A7221-1	22 - 36	1	PAOFF
=	A7226-1	19 - 11	1	PAOFF
=	A7227-1	19 - 10	1	PAOFF
=	A7230-1	14 - 20	1	PAOFF
	A7252-1	67 - 52	1	PAOFF
=	A7265-1	15 - 22	1	PAOFF
	A7277-1	30 - 34	1	PAOZZ
	A7278-1	67 - 54	1	PAOFF
=	A7280-01	36 - 28	1	PAOZZ
=	A7281-1	24 - 24A	1	PAOZZ
=	A7293-1	20 - 27	1	PAOZZ
=	A7294-1	20 - 28	1	PAOZZ
=	A7739-1	30 - 36A	1	PAOZZ
=	A9155-1	20 - 34	1	PAOZZ
=	A9156-1	31 - 27	1	PAOZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
= A9157-1	47 - 12	1	PAOZZ
= A9158-1	20 - 35	1	PAOZZ
= A9159-1	15 - 72	1	PAOZZ
= A9160-1	23 - 9	1	PAOZZ
= A9161-1	49 - 1	1	PAOZZ
= A9162-1	49 - 17	1	PAOZZ
= A9163-1	21 - 18	1	PAOZZ
= A9164-1	45 - 5	1	PAOZZ
= A9165-1	23 - 8	1	PAOZZ
= A9166-1	32 - 25	1	PAOZZ
= A9167-1	36 - 36	1	PAOFF
= A9168-1	22 - 36	1	PAOFF
= A9169-1	19 - 10	1	PAOFF
= A9170-1	14 - 20	1	PAOFF
= A9173-1	15 - 22	1	PAOFF
= A9174-1	20 - 27	1	PAOZZ
= A9175-1	20 - 28	1	PAOZZ
= A9176-1	30 - 36A	1	PAOZZ
= A9177-1	16 - 7	1	PAOZZ
= A9180-1	19 - 11	1	PAOFF
= A9181-1	18 - 16	1	PAOZZ
= A9182-1	28 - 45	1	PAOZZ
= A9183-1	36 - 28	1	PAOZZ
= A9184-1	13 - 13A	1	PAOFF
= A9185-1	13 - 18A	1	PAOFF
= A9186-1	24 - 2	1	PAOZZ
= A9187-1	24 - 1	1	PAOZZ
= A9188-1	24 - 24A	1	PAOZZ
AA-2100-11D99	58 - 35	2	PAOZZ
AA-9348-1653D2	58 - 40	1	PAOZZ
AA-9348-1657D1	58 - 44	1	XA
AA-9348-1657Y1D1A	58 - 61	1	XA
AA-9500-D344	58 - 51	1	PAOZZ
AA-990100-015	58 - 48	1	PAOZZ
= AA124S-2 #	40 - 4	2	PAOBZ
= AA125S-5 #	40 - 34	2	PAOBZ
OP AAMMF9122-53MSR-A-1613D	91 - 5		
OP AAMMF9122-54	91 - 5		
OP AAMMF9131-8	83 - 11		
OP AAV9116RIW7-MSRA3826	71 - 11		
AC-9348E-165	58 - 42	1	PAOZZ
AC-9348F-1630	58 - 58	1	PAOZZ
AC-9348RV-1656	58 - 59	1	PAOZZ
AD-9348-1657 #	58 - 34	1	PAODD
AD-9348-1657Y1 #	58 - 45	1	PAODD
AD-9348-1657Y1D1A	58 - 52	1	PAOZZ
AD-9348BP-1657Y1	F 58 - 50	1	PAOOO
OP AE707545-1	15 - 72		
OP AE707546-1	24 - 1		
OP AE707548-1	32 - 25		
OP AE707548-2	32 - 25		
OP AE707549-1	20 - 34		
OP AE707550-1	20 - 35		
OP AE707552-1	49 - 1		
OP AE707554-1	23 - 9		
OP AE707557-1	49 - 17		
OP AE707558-1	21 - 18		
OP AE707560-1	47 - 12		
OP AE707560-2	47 - 12		
OP AE707565-1	45 - 5		
OP AE708004-1	31 - 27		
OP AE708014-1	23 - 8		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP AE708161-1	16 - 7		
OP AE708210-1	18 - 16		
OP AE708359-1	24 - 2		
= AGS1186-A	43 - 27	2	PADZZ
= AGS3732	43 - 33		PAFZZ
=	43 - 40	9	PAFZZ
= AGS3781	43 - 32		PAFZZ
=	43 - 39	11	PAFZZ
AM3885	105 - 6	4	PAOBZ
AN123302	55 - 5	16	PAFZZ
AN123306	67 - 86	5	PADZZ
AN123312	67 - 81	6	XA
AN123313	67 - 86	5	PADZZ
AN123315	63 - 77		PAFZZ
	63 - 157	AR	PAFZZ
	63 - 157	45	
AN123318	63 - 45		PAFZZ
	85 - 8	119	PAFZZ
AN123319	63 - 39B		PAFZZ
	63 - 44		PAFZZ
	63 - 74		PAFZZ
	63 - 126		PAFZZ
	63 - 156	AR	PAFZZ
	65 - 3		PAFZZ
	73 - 78		PAFZZ
	73 - 89		PAFZZ
	86 - 13A	165	PAFZZ
AN123320	63 - 38		PAFZZ
	93 - 22		PAFZZ
	93 - 29		PAFZZ
	103 - 26	96	PAFZZ
AN123321	39 - 44		PAFZZ
	39 - 49		PAFZZ
	63 - 8	32	PAFZZ
AN123334	85 - 7		PAFZZ
	85 - 10	36	PAFZZ
AN123335	65 - 5		PADZZ
	65 - 7		PADZZ
	65 - 13		PADZZ
	65 - 15		PADZZ
	65 - 17		PADZZ
	65 - 19		PADZZ
	100 - 4	613	PADZZ
AN123336	55 - 1D		PAFZZ
	63 - 19		PAFZZ
	63 - 72		PAFZZ
	63 - 104		PAFZZ
	63 - 127		PAFZZ
	65 - 11		PAFZZ
	65 - 21		PAFZZ
	71 - 36		PAFZZ
	72 - 14		PAFZZ
	86 - 15	690	PAFZZ
AN123339	63 - 131	10	PAFZZ
AN123340	86 - 15	8	PAFZZ
AN123341	104 - 20	8	PADZZ
AN123352	65 - 8	90	PAFZZ
AN123387	86 - 16	3	PAFZZ
AN123398	55 - 1C		PAFZZ
	68 - 33	30	PAFZZ
AN123399	63 - 141	AR	PAFZZ
	71 - 37	24	PADZZ
AN123469	5 - 21		PAOZZ
	11 - 22		PAOZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	AN123469	40 - 22		PAOZZ
		40 - 25		PAOZZ
		40 - 28		PAOZZ
		67 - 119		PAOZZ
		70 - 62		PAOZZ
		94 - 17	18	PAOZZ
	AN123470	5 - 23	2	PAOZZ
	AN123618	63 - 36		PAFZZ
		71 - 35		PAFZZ
		72 - 13	128	PAFZZ
	AN123619	63 - 18		PAFZZ
		73 - 56		PAFZZ
		73 - 59		PAFZZ
S		73 - 59		
		88 - 3		PAFZZ
		88 - 7	86	PAFZZ
	AN123620	45 - 30		PAFZZ
		45 - 33		PAFZZ
		53 - 39		PAFZZ
		53 - 57		PAFZZ
		53 - 87		PAFZZ
		63 - 125		PAFZZ
		63 - 133		PAFZZ
		71 - 44		PAFZZ
		73 - 23	86	PAFZZ
	AN123621	82 - 34	6	PADZZ
	AN123629	71 - 28		PAFZZ
		71 - 44E	48	PAFZZ
	AN123636	63 - 71	15	PAOZZ
	AN123637	63 - 128		PAOZZ
		97 - 3	AR	PADZZ
		97 - 3	140	
	AN123638	97 - 3	AR	PADZZ
%	AN123641	97 - 5	16	PADZZ
	AN123669	100 - 4A	47	PADZZ
%	AN123683	97 - 3	16	PADZZ
	AN123685	97 - 3	AR	PADZZ
	AN123698	97 - 5	AR	PADZZ
	AN123699	97 - 5	AR	PADZZ
	AN123700	97 - 5	AR	PADZZ
	AN124972	40 - 19	12	PAOZZ
	AN315-5R	50A - 1	4	PAFZZ
	AN315-C12R	111A -18	1	PAFZZ
	AN316-C12L	106 - 23	1	PAOZZ
	AN316-C12R	106 - 25	1	PAFZZ
	AN4-C60A	106A -72	16	
	AN515-8-16	64 - 9		PAOZZ
		64A - 9	24	PAOZZ
	AN960-4	51 - 36	4	PAFZZ
	AN960-416	109 - 13	1	PAFZZ
	AN960-416L	109 - 12	1	PAFZZ
	AN960-6	51 - 29		PAFZZ
		51 - 38		PAFZZ
		51 - 47		PAFZZ
		51 - 53	21	PAFZZ
	AN960-616	108 - 78	8	PAFZZ
	AN960-816	108 - 61	2	PAFZZ
	AN960-C416	108 - 16		PAFZZ
		108 - 43		PAFZZ
		108 - 84		PAFZZ
		109 - 23		PAFZZ
		112 - 26		PAFZZ
		112 - 90B	23	PAFZZ
	AN960-C516	112 - 39	12	PAFZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	AN960-C816	108 - 20		PAFZZ
		108 - 47		PAFZZ
		108 - 88		PAFZZ
		109 - 27		PAFZZ
		112 - 30		PAFZZ
		112 - 90J	23	PAFZZ
	AN960-XC416	109 - 36		PAFZZ
		109 - 48	22	PAFZZ
	AN960C10L	67 - 39F	2	PAOZZ
	AN960C416	106A -71	16	PAFZZ
	AN960C416L	44 - 10D		PAFZZ
		67 - 22K		PAFZZ
		67 - 39B		PAFZZ
		67 - 41E	18	PAFZZ
	AN960C516L	50A - 2	8	PAFZZ
	AN960C6	44 - 10H		PAFZZ
		44 - 10R		PAFZZ
		67 - 22B		PAFZZ
		67 - 40A	12	PAFZZ
	AN960C616	106A -18	32	PAFZZ
	AN960C8	49 - 36E		PAOZZ
		49 - 49		PAOZZ
		49 - 51	7	PAOZZ
	AN970-6	110 - 20	9	PAFZZ
OP	AP100N-04	89 - 22		
OP	AP100N-06	37 - 53		
OP		55 - 20		
OP	AP100N-07	55 - 32		
OP	AP100N-09	32 - 8		
OP	AP100N-12	89 - 49		
OP	AP100N-14	89 - 68		
OP	AP100N-16	47 - 8		
=	AS20925	43 - 28	10	PADZZ
=	AS20948	43 - 30	1	PADZZ
S	AS3080-04	76 - 12		
	AS3094-03	51 - 66	19	PAFZZ
	AS3208-02	28 - 40	1	PAOZZ
	AS3208-10	26 - 4	1	PAOZZ
	AS3209-008	60 - 60	2	PADZZ
=	AS3209-009	39 - 9	2	PAFZZ
	AS3209-010	82 - 10	1	PAFZZ
	AS3209-011	80 - 16	1	PAFZZ
	AS3209-012	80 - 6	4	PAFZZ
	AS3209-016	32 - 44	1	PAOZZ
	AS3209-042	39 - 43	1	PAFZZ
	AS3209-110	39 - 35	2	PAFZZ
	AS3209-116	27 - 8	1	PAOZZ
	AS3209-150	39 - 27	1	PAOZZ
=	AS3209-165	39 - 30	1	PAFZZ
	AS3209-177	83 - 17	2	PAFZZ
	AS3209-218	32 - 23	1	PAOZZ
	AS3230-005	99 - 30	68	PADZZ
OP	ATB5V9HTL	47 - 34		
OP		47 - 36		
OP	AULA196-4	53 - 38		
OP		53 - 56		
OP		53 - 86		
OP	AULG13123-3	74 - 6		
OP	B00111-4	98 - 5		
OP	BH00470-4	86 - 19C		
OP		89 - 5		
	1210	114 -		
	BRA-185	60 - 49	1	PADZZ
OP	C-2320-275	34 - 25		

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP	C-2320-275	35 - 5		
	C0720-072-1250S	108 - 19		PAFZZ
		108 - 46		PAFZZ
		109 - 26		PAFZZ
		112 - 29		PAFZZ
		112 - 90H	21	PAFZZ
	C10GT2-32S	34 - 16	4	PAOZZ
	C1687-135-2500S	106A -97	2	
	C537-25F2	110 - 31	4	PAFZZ
	C538-188F2	112 - 44	4	PAFZZ
	C538-188F3	111 - 23		PAFZZ
		111A -25	8	PAFZZ
	C623-F1	109 - 58	4	PAFZZ
	C630-15F1	108A -28	4	PAFZZ
	CB1500-30-CI	106A -20	8	
=	CD-10	108A -47		KF
=		110 - 47		KF
=		112 - 61	4	KF
=	CD-4	108 - 123		KF
=		108A -48		KF
=		110 - 40		KF
=		112 - 59		KF
=		113 - 45	7	KF
=	CD-6	108A -49		KF
=		112 - 58	3	KF
=	CD-8	108A -46		KF
=		112 - 65	4	KF
	CL-.194-TERM	112 - 16E	5	
	CL-23-KA-10.0	106A -88	2	
	CL-25-EB	108 - 68	2	PAFZZ
	CL-2A-SB	108 - 86	2	PAFZZ
	CL-3-C-8.00	112 - 16G	5	
	CL-3-SW	112 - 90G	1	PAFZZ
	CL-4-BK	108 - 17		PAFZZ
		108 - 44		PAFZZ
		108 - 85		PAFZZ
		108 - 119		PAFZZ
		109 - 24		PAFZZ
		112 - 27		PAFZZ
		112 - 90D	24	PAFZZ
OP	CN52991-3	74 - 6		
	CR2653-6-4	100 - 1	96	PADZZ
=	CR3523-4-01	63 - 138	AR	PAFZZ
=	CR3523-4-02	63 - 138	AR	PAFZZ
=	CR3523-4-03	63 - 138	AR	PAFZZ
	CR3523-4-1	67 - 99	4	PAFZZ
=	CR4622-04-04	70 - 56	5	PAFZZ
=	CR4623-04-03	70 - 47	4	PADZZ
=	CR4623EA-6-3.5	100 - 1A	48	PADZZ
=	CR4653EA-6-3.5	100 - 1A	48	PADZZ
=	CR4653EA-6-4	100 - 1A	48	PADZZ
OP	D-2320-275	34 - 25		
OP		35 - 5		
OP	E10516-3	34 - 56		
OP		67 - 66		
OP		76 - 1		
OP		93 - 1		
OP	E10516-4	46 - 6		
OP		67 - 106		
OP		67 - 106A		
OP	E10787-4	44 - 6		
OP		67 - 4		
OP		67 - 20		
OP		67 - 35		
OP	E11520-3	58 - 8		
OP		89 - 14		
OP		89 - 43		
OP		95 - 27		
OP		95 - 50		
OP		95 - 73		
OP		96 - 21		
OP		96 - 41		
OP		96 - 54		
OP		103 - 6		
OP		103 - 11		
OP		103 - 17		
OP		103 - 20		
OP	E12912-4	63 - 4		
	EC-10	105 - 12	2	PAOZZ
	EC-12	105 - 13	1	PAOZZ
	EC-19	105 - 14		PAOZZ
		105 - 19	2	PAOZZ
	EC-20	105 - 9	1	PAOZZ
	EC-22	105 - 10	1	PAOZZ
	EC-23	105 - 11	1	PAOZZ
	EC-24	105 - 8	1	PAOZZ
	ED743989D02A14	51 - 45	16	PAFZZ
	EXP11017	105 - 17	1	PAOZZ
OP	F10883-3	6 - 25		
OP		11 - 21		
OP		18 - 9		
OP		32 - 33		
OP		40 - 18		
OP		40 - 21		
OP		40 - 24		
OP		40 - 27		
OP		47 - 28		
OP		70 - 61		
OP		94 - 16		
OP	F10986-4	45 - 29		
OP		45 - 32		
OP	F12691-5	51 - 78		
OP		51 - 81		
OP	F13433-3	71 - 34		
OP	F13480-3	5 - 20		
OP		5 - 22		
OP	F51308-5	51 - 78		
OP		51 - 81		
OP	F52804-4	88 - 2		
OP		88 - 6		
OP	F52938-3	71 - 27		
OP		71 - 43		
OP		71 - 44F		
OP	F52938-4	88 - 2		
OP		88 - 6		
OP	F53513-3BC	71 - 34		
OP	F53816-3	5 - 20		
OP		5 - 22		
OP	F53881-4	86 - 13		
	FE200170A	113 - 6	1	PAFBZ
OP	FN1014M-428	34 - 17		
OP		34 - 30		
OP		53 - 41		
OP		53 - 61		
OP		53 - 89		
OP		53 - 91		
OP		58 - 77		
OP		67 - 106A		

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	GS10414-3	50A - 6	3	PAFZZ
	GS10414-4	50A - 7	3	PAFZZ
	GS10414-8	50A - 8	1	KF
	GS10431-30	50A - 9	1	PAFZZ
	GS10578-3	50A - 10	4	KF
	GS10578-4	50A - 11	3	PAFZZ
	GS10578-7	50A - 12	1	KF
	GS22282-1	50A - 4	1	KF
	GS22283-1	50A - 5	1	KF
<	GS23962-1	50 - 58		PAFZZ
		50A -	2	PAFZZ
OP	H29011-4	85 - 4		
OP	H29164-3	58 - 8		
OP		89 - 14		
OP		89 - 43		
OP		95 - 27		
OP		95 - 50		
OP		95 - 73		
OP		96 - 21		
OP		96 - 41		
OP		96 - 54		
OP		103 - 6		
OP		103 - 11		
OP		103 - 17		
OP		103 - 20		
OP	H42-4	34 - 17		
OP		34 - 30		
OP		53 - 41		
OP		53 - 61		
OP		53 - 89		
OP		53 - 91		
OP		58 - 77		
OP		67 - 106A		
OP	H49478-4	46 - 6		
OP		67 - 106		
OP		67 - 106A		
OP	H49500-4	76 - 16		
OP		95 - 6		
OP		96 - 4		
OP	H49500-5	53 - 1		
OP		53 - 25		
OP		53 - 45		
OP		53 - 46		
OP		53 - 64		
OP		53 - 65		
OP		53 - 67		
OP	H49508-3	34 - 56		
OP		67 - 66		
OP		76 - 1		
OP		93 - 1		
	H49513-3	1 - 5		
		1 - 7		
		3 - 1		
		3 - 6		
		3 - 12		
		3 - 15		
		3 - 18		
		3 - 20		
		3 - 23		
		3 - 30		
		3 - 33		
		3 - 41		
		3 - 44		
		4 - 2		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	4 - 5		
	4 - 7		
	4 - 10		
	5 - 3		
	5 - 5		
	5 - 8		
	5 - 10		
	5 - 12		
	5 - 19		
	6 - 6		
	6 - 9		
	6 - 16		
	6 - 22		
	6 - 27		
	6 - 34		
	6 - 36		
	7 - 3		
	7 - 6		
	7 - 9		
	7 - 9B		
	7 - 11		
	7 - 16		
	7 - 21		
	7 - 23		
	7 - 26		
	7 - 36		
	8 - 6		
	8 - 9		
	8 - 12		
	9 - 2		
	9 - 5		
	10 - 2		
	10 - 5		
	11 - 10		
	11 - 13		
	11 - 15		
	11 - 20		
	13 - 2		
	13 - 5		
	13 - 31		
	13 - 33		
	14 - 2		
	14 - 6		
	14 - 10		
	14 - 13		
	14 - 18		
	15 - 2		
	15 - 8		
	15 - 13		
	15 - 15		
	15 - 20		
	15 - 30		
	15 - 44		
	15 - 50		
	15 - 53		
	15 - 61		
	15 - 67		
	15 - 69		
	16 - 3		
	17 - 4		
	18 - 11		
	19 - 1		
	20 - 2		
	20 - 4		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
H49513-3	20 - 7		
	20 - 9		
	20 - 12		
	20 - 17		
	20 - 18		
	20 - 20		
	20 - 25		
	20 - 29		
	21 - 1		
	21 - 6		
	21 - 7B		
	21 - 7E		
	21 - 14		
	22 - 2		
	22 - 8		
	22 - 10		
	22 - 10B		
	22 - 12		
	22 - 15		
	22 - 27		
	22 - 33		
	23 - 1		
	24 - 34		
	26 - 6		
	27 - 1		
	27 - 10		
	27 - 14		
	27 - 16		
	27 - 19		
	27 - 24		
	28 - 5		
	28 - 12		
	28 - 15		
	28 - 18		
	28 - 21		
	28 - 26		
	28 - 27B		
	28 - 41		
	29 - 2		
	29 - 11		
	29 - 13		
	29 - 15		
	29 - 23		
	30 - 10		
	30 - 12		
	30 - 17		
	30 - 24		
	30 - 42		
	31 - 2		
	31 - 5		
	31 - 7		
	31 - 13		
	31 - 19		
	31 - 22		
	32 - 10		
	32 - 13		
	32 - 40		
	34 - 2		
	34 - 14		
	34 - 28		
	34 - 62		
	36 - 1		
	36 - 6		
	36 - 12		
	36 - 17		
	36 - 19		
	36 - 30		
	36 - 33		
	36 - 38		
	37 - 1		
	37 - 7		
	37 - 10		
	37 - 13		
	37 - 27		
	37 - 32		
	37 - 37		
	37 - 50		
	37 - 59		
	37 - 60		
	40 - 2		
	40 - 9		
	40 - 17		
	41 - 30		
	42 - 10		
	43 - 9		
	44 - 42		
	44 - 45		
	46 - 7		
	47 - 47		
	48 - 1		
	48 - 25		
	48 - 31		
	48 - 34		
	49 - 24		
	51 - 13		
	51 - 68		
	51 - 74		
	55 - 2		
	55 - 6		XA
	55 - 15		
	55 - 41		
	58 - 80A		
	58 - 98C		
	62 - 19		
	62 - 30		
	62 - 42		
	63 - 20		
	63 - 97		
	67 - 24		
	67 - 31		
	67 - 42		
	67 - 48		
	71 - 1		
	71 - 23		
	73 - 26		
	73 - 71		
	73 - 82		
	74 - 102		
	74 - 105		
	74 - 108		
	77 - 42		
	78 - 66		
	79 - 8		
	79 - 10		
	79 - 16		
	82 - 17		
	100 - 8	1	
OP H49513-4	15 - 31		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP H49513-4	20 - 37		
OP	24 - 32		
OP	26 - 2		
OP	27 - 6		
OP	28 - 30		
OP	32 - 20		
OP	32 - 27		
OP	35 - 17		
OP	36 - 39		
OP	40 - 31		
OP	42 - 1		
OP	43 - 6		
OP	43 - 12		
OP	44 - 11		
OP	44 - 22		
OP	44 - 44		
OP	45 - 8		
OP	45 - 15		
OP	45 - 28		
OP	47 - 32		
OP	49 - 29		
OP	49 - 101		
OP	50 - 22		
OP	50 - 54		
OP	51 - 76		
OP	52 - 2		
OP	53 - 41		
OP	53 - 59		
OP	53 - 61		
OP	53 - 89		
OP	53 - 91		
OP	56 - 1		
OP	56 - 10		
OP	56 - 17		
OP	56 - 24		
OP	57 - 8		
OP	57 - 14		
OP	58 - 2		
OP	58 - 17		
OP	58 - 23		
OP	58 - 32		
OP	58 - 88		
OP	60 - 15		
OP	60 - 35		
OP	63 - 55		
OP	63 - 82		
OP	63 - 93		
OP	63 - 116		
OP	67 - 29		
OP	67 - 105		
OP	71 - 45		
OP	74 - 83		
OP	75 - 68		
OP H49513-5	17 - 1		
OP	63 - 62		
OP	63 - 79		
OP H51907-3	53 - 76A		
OP	53 - 81A		
OP H52569-3	89 - 3		
OP	89 - 10		
OP H52569-5	86 - 7		
OP H52847-5	86 - 7		
OP H53308-4	85 - 4		
OP	95 - 6		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP	96 - 4		
OP H53777-4	53 - 27A		
OP	79 - 9B		
OP H53777-5	89 - 73		
OP H53831-4	86 - 19C		
OP	89 - 5		
= H54475-08	39 - 13A		PAFZZ
=	73 - 5A		PAFZZ
=	73 - 43A		PAFZZ
=	73 - 62A		PAFZZ
=	86 - 2A		PAFZZ
=	99 - 1A	150	PAFZZ
HL10V-6-8	69 - 5	25	PAFZZ
= HL12V-5-4	70 - 12	10	PAFZZ
HL12V-5-5	70 - 12	10	PAFZZ
HL12V-5-6	75 - 12		PAFZZ
	75 - 16	24	PAFZZ
= HL12V-5-8	70 - 27	10	PAFZZ
HL13V-8-5	66 - 4	15	PAFZZ
HL198V-5	70 - 11	10	PAFZZ
HL198V-6	69 - 4	25	PAFZZ
HL244-5-3	39 - 14		PAFZZ
	73 - 6		PAFZZ
S	73 - 6	16	
HL244-6-3	53 - 77		PAFZZ
S	53 - 77A		
S	53 - 77A		
	53 - 82		PAFZZ
S	53 - 82A		
S	53 - 82A	4	
HL244-6-8	98 - 2	2	PAFZZ
HL379V-8	66 - 3	15	PAFZZ
HL522-5-4	73 - 44		PAFZZ
	73 - 63	118	PAFZZ
HL599KF-5	39 - 13		PAFZZ
S	39 - 13A		
S	39 - 13A		
	73 - 5		PAFZZ
S	73 - 5A		
S	73 - 5A		
	73 - 43		PAFZZ
S	73 - 43A		
S	73 - 43A		
	73 - 62		PAFZZ
S	73 - 62A		
S	73 - 62A		
	86 - 2		PAFZZ
S	86 - 2A		
S	86 - 2A		
	99 - 1		PAFZZ
S	99 - 1A		
S	99 - 1A	150	
= HL612TB-5-3	70 - 3		PAFZZ
=	70 - 18	24	PAFZZ
= HL612TB-5-4	70 - 12	10	PAFZZ
= HL612TB-5-8	70 - 27	10	PAFZZ
HL688DU-6	53 - 76		PAFZZ
S	53 - 76A		
	53 - 81		PAFZZ
S	53 - 81A		
	98 - 3	6	PAFZZ
HL722-5-3	73 - 6		PAFZZ
=	86 - 3		PAFZZ
	99 - 2	30	PAFZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR		PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
=	HL822-5-3	70 - 3		PAFZZ	OP		3 - 41		
=		70 - 18	24	PAFZZ	OP		3 - 44		
	HL97DU-5	75 - 11		PAFZZ	OP		4 - 2		
		75 - 15	24	PAFZZ	OP		4 - 5		
	HL97DU-6	77 - 50		PAFZZ	OP		4 - 7		
		78 - 52		PAFZZ	OP		4 - 10		
		78 - 65		PAFZZ	OP		5 - 3		
		78 - 73	56	PAFZZ	OP		5 - 5		
	HST92LJ-5	70 - 2		PAFZZ	OP		5 - 8		
		70 - 11		PAFZZ	OP		5 - 10		
		70 - 17		PAFZZ	OP		5 - 12		
		70 - 26	44	PAFZZ	OP		5 - 19		
	J-3424-108	110 - 31	4	PAFZZ	OP		6 - 6		
	J-5682-158	113 - 24	4	PAFZZ	OP		6 - 9		
OP	K10001-03	68 - 32			OP		6 - 16		
OP		70 - 50			OP		6 - 22		
OP		97 - 8			OP		6 - 27		
OP	K10001-04	70 - 46			OP		6 - 34		
OP		94 - 2			OP		6 - 36		
OP		97 - 9			OP		7 - 3		
OP	K10001-08	70 - 48			OP		7 - 6		
OP	K4-97	63 - 57			OP		7 - 9		
OP	K49587-3	82 - 33			OP		7 - 9B		
OP	K50023-3	102 - 14			OP		7 - 11		
OP	K50698-3	67 - 88			OP		7 - 16		
OP	K52852-3	103 - 30			OP		7 - 21		
OP	K53256-3	63 - 134			OP		7 - 23		
OP	K53264-4	98 - 5			OP		7 - 26		
OP	K53845-3	103 - 30			OP		7 - 36		
OP	KJB816110	63 - 102			OP		8 - 6		
OP	KJB822707	68 - 2			OP		8 - 9		
OP	KJB822806	67 - 93			OP		8 - 12		
OP	KJBB18106	84 - 12			OP		9 - 2		
OP	KR4-141	63 - 86			OP		9 - 5		
OP	KR5-39	63 - 81			OP		10 - 2		
OP	KX-29110-4	98 - 5			OP		10 - 5		
	L-14-T6-V	108A -17	4	PAFZZ	OP		11 - 10		
	L-6-T4-V	110 - 8	4	PAFZZ	OP		11 - 13		
OP	L10606-5-3	102 - 14			OP		11 - 15		
OP	L10860-4-3	67 - 88			OP		11 - 20		
OP	L13244-7-4	98 - 5			OP		13 - 2		
OP	L13247-6-3	63 - 134			OP		13 - 5		
OP	L13656-6-3	103 - 30			OP		13 - 31		
OP	LH10863-4	85 - 4			OP		13 - 33		
OP	LH10969-3	53 - 2			OP		14 - 2		
OP		53 - 27			OP		14 - 6		
OP		53 - 34			OP		14 - 10		
OP		53 - 43			OP		14 - 13		
OP		53 - 47			OP		14 - 18		
OP		53 - 52			OP		15 - 2		
OP		53 - 62			OP		15 - 8		
OP		53 - 68			OP		15 - 13		
OP		53 - 71			OP		15 - 15		
OP	LH11189-3	1 - 5			OP		15 - 20		
OP		1 - 7			OP		15 - 30		
OP		3 - 1			OP		15 - 44		
OP		3 - 6			OP		15 - 50		
OP		3 - 12			OP		15 - 53		
OP		3 - 15			OP		15 - 61		
OP		3 - 18			OP		15 - 67		
OP		3 - 20			OP		15 - 69		
OP		3 - 23			OP		16 - 3		
OP		3 - 30			OP		17 - 4		
OP		3 - 33			OP		18 - 11		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP LH11189-3	19 - 1		
OP	20 - 2		
OP	20 - 4		
OP	20 - 7		
OP	20 - 9		
OP	20 - 12		
OP	20 - 17		
OP	20 - 18		
OP	20 - 20		
OP	20 - 25		
OP	20 - 29		
OP	21 - 1		
OP	21 - 6		
OP	21 - 7B		
OP	21 - 7E		
OP	21 - 14		
OP	22 - 2		
OP	22 - 8		
OP	22 - 10		
OP	22 - 10B		
OP	22 - 12		
OP	22 - 15		
OP	22 - 27		
OP	22 - 33		
OP	23 - 1		
OP	24 - 34		
OP	26 - 6		
OP	27 - 1		
OP	27 - 10		
OP	27 - 14		
OP	27 - 16		
OP	27 - 19		
OP	27 - 24		
OP	28 - 5		
OP	28 - 12		
OP	28 - 15		
OP	28 - 18		
OP	28 - 21		
OP	28 - 26		
OP	28 - 27B		
OP	28 - 41		
OP	29 - 2		
OP	29 - 11		
OP	29 - 13		
OP	29 - 15		
OP	29 - 23		
OP	30 - 10		
OP	30 - 12		
OP	30 - 17		
OP	30 - 24		
OP	30 - 42		
OP	31 - 2		
OP	31 - 5		
OP	31 - 7		
OP	31 - 13		
OP	31 - 19		
OP	31 - 22		
OP	32 - 10		
OP	32 - 13		
OP	32 - 40		
OP	34 - 2		
OP	34 - 14		
OP	34 - 28		
OP	34 - 62		
OP	36 - 1		
OP	36 - 6		
OP	36 - 12		
OP	36 - 17		
OP	36 - 19		
OP	36 - 30		
OP	36 - 33		
OP	36 - 38		
OP	37 - 1		
OP	37 - 7		
OP	37 - 10		
OP	37 - 13		
OP	37 - 27		
OP	37 - 32		
OP	37 - 37		
OP	37 - 50		
OP	37 - 59		
OP	37 - 60		
OP	40 - 2		
OP	40 - 9		
OP	40 - 17		
OP	41 - 30		
OP	42 - 10		
OP	43 - 9		
OP	44 - 42		
OP	44 - 45		
OP	46 - 7		
OP	47 - 47		
OP	48 - 1		
OP	48 - 25		
OP	48 - 31		
OP	48 - 34		
OP	49 - 24		
OP	51 - 13		
OP	51 - 68		
OP	51 - 74		
OP	55 - 2		
OP	55 - 15		
OP	55 - 41		
OP	58 - 80A		
OP	58 - 98C		
OP	62 - 19		
OP	62 - 30		
OP	62 - 42		
OP	63 - 20		
OP	63 - 97		
OP	67 - 24		
OP	67 - 31		
OP	67 - 42		
OP	67 - 48		
OP	71 - 1		
OP	71 - 23		
OP	73 - 26		
OP	73 - 71		
OP	73 - 82		
OP	74 - 102		
OP	74 - 105		
OP	74 - 108		
OP	77 - 42		
OP	78 - 66		
OP	79 - 8		
OP	79 - 10		
OP	79 - 16		
OP	82 - 17		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP LH11189-3	100 - 8			OP	53 - 46		
OP LH11189-4	15 - 31			OP	53 - 64		
OP	20 - 37			OP	53 - 65		
OP	24 - 32			OP	53 - 67		
OP	26 - 2			OP LH13291-4	85 - 4		
OP	27 - 6			OP	95 - 6		
OP	28 - 30			OP	96 - 4		
OP	32 - 20			OP LH13291A-4	86 - 19C		
OP	32 - 27			OP	89 - 5		
OP	35 - 17			OP LH13587-4	53 - 27A		
OP	36 - 39			OP	79 - 9B		
OP	40 - 31			OP LH13587-5	89 - 73		
OP	42 - 1			OP LHL9126-7-4	98 - 5		
OP	43 - 6			OP LK4-22	63 - 57		
OP	43 - 12			OP LK4-26	63 - 86		
OP	44 - 11			OP LK5-10	63 - 81		
OP	44 - 22			= M-312	108 - 123		KF
OP	44 - 44			=	108A -48		KF
OP	45 - 8			=	110 - 40		KF
OP	45 - 15			=	112 - 59		KF
OP	45 - 28			=	113 - 45	7	KF
OP	47 - 32			= M-320	108A -49		KF
OP	49 - 29			=	112 - 58	3	KF
OP	49 - 101			= M-328	108A -46		KF
OP	50 - 22			=	112 - 65	4	KF
OP	50 - 54			= M-330	108A -47		KF
OP	51 - 76			=	110 - 47		KF
OP	52 - 2			=	112 - 61	4	KF
OP	53 - 41			M00645070	80 - 4	2	PAOZZ
OP	53 - 59			M25988/1-011	41 - 21	2	PAFZZ
OP	53 - 61			M25988/1-019	51 - 21	1	PAFZZ
OP	53 - 89			M25988/1-117	47 - 39D	2	PAOZZ
OP	53 - 91			M25988/1-118	51 - 60	2	PAFZZ
OP	56 - 1			M25988/1-122	51 - 63	1	PAFZZ
OP	56 - 10			= M25988/1-132	47 - 42	2	PAOZZ
OP	56 - 17			= M25988/1-242	47 - 40	1	PAOZZ
OP	56 - 24			M25988/2-011	50 - 33		PAOZZ
OP	57 - 8				50 - 37		PAOZZ
OP	57 - 14				50 - 41	11	PAOZZ
OP	58 - 2			= M83248/1-009	39 - 9	2	PAFZZ
OP	58 - 17			M83248/1-012	58 - 29A		PAFZZ
OP	58 - 23				60 - 4	8	PAFZZ
OP	58 - 32			M83248/1-014	58 - 39		PAOZZ
OP	58 - 88				58 - 50	2	PAOZZ
OP	60 - 15			M83248/1-015	58 - 38		PAOZZ
OP	60 - 35				58 - 49	2	PAOZZ
OP	63 - 55			M83248/1-016	58 - 54	1	PAOZZ
OP	63 - 82			M83248/1-023	58 - 43	1	PAOZZ
OP	63 - 93			M83248/1-024	58 - 56	3	PAOZZ
OP	63 - 116			M83248/1-127	58 - 60	1	PAOZZ
OP	67 - 29			M83248/1-144	58 - 41		PAOZZ
OP	67 - 105				58 - 57	2	PAOZZ
OP	71 - 45			= M83248/1-165	39 - 30	1	PAFZZ
OP	74 - 83			M83248/1-20	50 - 45		PAOZZ
OP	75 - 68				50 - 49		PAOZZ
OP LH11189-5	17 - 1				50 - 53	3	PAOZZ
OP	63 - 62			MCU-1875-G	106A -77	2	
OP	63 - 79			OP MF54343-3	6 - 25		
OP LH11588-4	76 - 16			OP	11 - 21		
OP	95 - 6			OP	18 - 9		
OP	96 - 4			OP	32 - 33		
OP LH11588-5	53 - 1			OP	40 - 18		
OP	53 - 25			OP	40 - 21		
OP	53 - 45			OP	40 - 24		

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR		PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP	MF54343-3	40 - 27					112 - 77		PAFZZ
OP		47 - 28					112 - 82		PAFZZ
OP		67 - 120					112 - 87		PAFZZ
OP		70 - 61					112 - 93	34	PAFZZ
OP		94 - 16				MS15795-855	106A -49		PAFZZ
OP	MK52915-4	53 - 38					106A -80	96	PAFZZ
OP		53 - 56				MS16555-46	112 - 42	2	PAFZZ
OP		53 - 86				MS16555-48	109 - 51	2	PAFZZ
	MLSP-M04-01	63 - 32	15	PAFZZ		MS16555-51	106A -94	2	PAFZZ
	MLSP-M4-2	69 - 3	46	PAFZZ		MS16555-52	112 - 90M	1	PAFZZ
OP	MM-82-2658	42 - 28				MS16555-53	108 - 58	4	PAFZZ
	MS122120	42 - 36	10	PAFZZ		MS16555-641	112 - 46C	1	PAFZZ
	MS122160	58 - 30J	4	PAFZZ		MS16555-650	106A -65	2	PAFZZ
	MS122200	58 - 30H	4	PAFZZ		MS16562-193	64 - 7		PAFZZ
	MS122201	58 - 30G	17	PAFZZ			64 - 11		PAFZZ
=	MS122902	39 - 20		PAOZZ			64A - 7		PAFZZ
=		67 - 90		PAOZZ			64A - 11	12	PAFZZ
		89 - 8	5	PAOZZ		MS16655-641	111A -29	1	PAFZZ
	MS122903	39 - 17		PAOZZ		MS16995-36	112 - 16D	15	PAFZZ
		39 - 19		PAOZZ		MS16995-38	112 - 70		PAFZZ
=		39 - 20		PAOZZ			112 - 75		PAFZZ
		39 - 22		PAOZZ			112 - 80		PAFZZ
=		67 - 90	9	PAOZZ			112 - 85		PAFZZ
=	MS122904	39 - 20		PAOZZ			112 - 91	34	PAFZZ
=		67 - 90	4	PAOZZ		MS16995-66	106A -100	8	PAFZZ
	MS122927	34 - 27	1	PAOZZ		MS16995-68	112 - 40	12	PAFZZ
	MS124655	68 - 30		PAFZZ		MS16997-10	51 - 35	4	PAFZZ
		82 - 37	15	PADZZ		MS16997-101	109 - 40	4	PAFZZ
	MS124656	68 - 29		PAFZZ		MS16997-11	51 - 26		PAFZZ
		70 - 44		PAFZZ			51 - 33		PAFZZ
		77 - 59		PAFZZ			51 - 39		PAFZZ
		77 - 64		PAFZZ			51 - 48		PAFZZ
		78 - 56A		PAFZZ			51 - 54	44	PAFZZ
		95 - 13		PAFZZ		MS16997-19	51 - 37		PAFZZ
		95 - 18		PAFZZ			51 - 46		PAFZZ
		96 - 10		PAFZZ			51 - 52	6	PAFZZ
		96 - 15		PAFZZ		MS16997-45	109 - 54A	2	
		96 - 15	30			MS16997-80	108 - 81		PAFZZ
	MS124658	61 - 11	1	PADZZ			108A -19	32	PAFZZ
	MS124663	42 - 37	1	PAFZZ		MS171432	87 - 16		PADZZ
	MS124695	61 - 9		PADZZ			110 - 12	2	PADZZ
		68 - 28	31	PADZZ		MS171462	87 - 16	1	PADZZ
	MS124696	60 - 38		PADZZ		MS17830-5C	112 - 38	12	PAFZZ
		76 - 12		PADZZ		MS17984-C843	109 - 54D	2	PAFZZ
		82 - 35	25	PADZZ		MS17984C415	110 - 10	1	PAFZZ
	MS124735	60 - 37		PADZZ		MS17984C615	110 - 13	2	PAFZZ
		82 - 36	9	PADZZ		MS17986-C826	108A -18	4	PAFZZ
	MS124736	60 - 39		PAFZZ		MS17986C1015	106A -8	2	
		60 - 91		PAFZZ		MS17986C407	106A -4	1	
		61 - 8	23	PAFZZ		MS17986C420	106A -89	2	
	MS14237C08-063	106A -16	1			MS17986C605	106A -61	2	
	MS14237C08-075	106A -29	2			MS17986C620	106A -7	1	
	MS15795-808	112 - 16C	15	PAFZZ		MS17986C821	106A -1	2	
	MS15795-810	106A -34	8	PAFZZ		MS17986C833	106 - 21	1	PAOZZ
	MS15795-812	106A -101	8	PAFZZ		MS17986C834	106A -23	1	
	MS15795-814	106A -41		PAFZZ		MS17987C407	106 - 3		PAOZZ
		106A -91	18	PAFZZ			106 - 8		PAOZZ
	MS15795-817	106A -12	16	PAFZZ			106 - 26	8	PAOZZ
	MS15795-818	108 - 92	2	PAFZZ	=	MS20365-820C	106 - 11		PAOZZ
	MS15795-820	108A -23	4	PAFZZ	=		106 - 14		PAOZZ
	MS15795-822	109 - 9A		PAFZZ	=		106 - 31		PAOZZ
		111A -16	4	PAFZZ	=		106 - 35	14	PAOZZ
	MS15795-826	108 - 29	1	PAFZZ		MS20392-7C53	108 - 89	2	PAFZZ
	MS15795-842	112 - 72		PAFZZ		MS20392-7C67	108 - 62	2	PAFZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
MS20913-1J	110 - 35	1	PAFZZ	MS24693-S342	108 - 71	8	PAFZZ
MS20913-1S	108 - 106		PAFZZ	MS27183-14	110 - 21	9	PAFZZ
	108A -32		PAFZZ	MS27183-18	106 - 30		PAOZZ
	109 - 60		PAFZZ		107 - 3		PAOZZ
	111 - 4		PAFZZ		107 - 7	21	PAOZZ
	111A -4		PAFZZ	MS27183-27	112 - 16	1	PAFZZ
	112 - 4		PAFZZ	MS27183-3	51 - 27		PAFZZ
	113 - 28	7	PAFZZ		51 - 40		PAFZZ
MS20913-6S	108 - 113		PAFZZ		51 - 49		PAFZZ
	108A -39		PAFZZ		51 - 55	32	PAFZZ
	109 - 67		PAFZZ	MS28774-015	58 - 37	1	PAOZZ
	111 - 27		PAFZZ	MS28774-016	58 - 53	1	PAOZZ
	111A -33		PAFZZ	MS28782-26	16 - 9	1	PAOZZ
	112 - 48		PAFZZ	MS29561-437	108 - 112		PAFZZ
	113 - 35	7	PAFZZ		108A -35		PAFZZ
MS21043-5	49 - 93	1	PAOZZ		109 - 66		PAFZZ
MS21045-8	107 - 2		PAOZZ		111 - 10		PAFZZ
	107 - 6	5	PAOZZ		111A -10		PAFZZ
MS21083-N6	108 - 70	8	PAFZZ		112 - 10		PAFZZ
MS21209-C0210	52 - 29	2	PAFZZ		113 - 34	7	PAFZZ
MS21209-C0415	52 - 28	4	PAFZZ	MS3186-50	51 - 61	1	PAFZZ
MS21209-C0615	52 - 26	15	PAFZZ	MS3367-5-9	112 - 53	6	KF
MS21209-C0620	52 - 27	8	PAFZZ	MS35206-261	108 - 66	2	PAFZZ
MS21209C0415	41 - 28		PAFZZ	MS35206-263	108A -16	4	PAFZZ
	51 - 65	26	PAFZZ	MS35275-228	52 - 24	4	PAFZZ
MS21209C0610	41 - 27	11	PAFZZ	MS35307-310	106A -35	4	PAFZZ
MS21209C0615	51 - 64	45	PAFZZ	MS35307-415	106A -48		PAFZZ
MS21209C0815	41 - 26	15	PAFZZ		106A -78	64	PAFZZ
MS21209F1-10	52 - 30		PAFZZ	MS35307-417	106A -13		PAFZZ
	68 - 30		PAFZZ		110 - 15	9	PAFZZ
	68 - 31		PAFZZ	MS35307-460	108A -21	4	PAFZZ
	68 - 32	44	PAFZZ	MS35308-365	106A -17	28	PAFZZ
MS21209F4-10	68 - 29	4	PAFZZ	MS35308-366	106A -22	4	
MS21209F4-15	67 - 26		PAFZZ	MS35308-411	108 - 31	12	PAFZZ
	67 - 45	2	PAFZZ	MS35338-138	112 - 71		PAFZZ
MS24622-42	109 - 54B	1	PAFZZ		112 - 76		PAFZZ
MS24630-23	110 - 9	4	PAFZZ		112 - 81		PAFZZ
MS24630-25	109 - 14	2	PAFZZ		112 - 86		PAFZZ
MS24630-46	106A -2				112 - 92	34	PAFZZ
	106A -63	12		MS35338-139	106A -36		PAFZZ
MS24665-151	49 - 85	1	PAOZZ		106A -70		PAFZZ
MS24665-153	49 - 89		PAFZZ		109 - 47	26	PAFZZ
	108 - 10		PAFZZ	MS35338-141	106A -19		PAFZZ
	108 - 37		PAFZZ		106A -40	48	PAFZZ
	109 - 17		PAFZZ	MS35338-143	106A -11		PAFZZ
	112 - 20	21	PAFZZ		106A -47		PAFZZ
MS24665-302	108 - 60		PAFZZ		106A -79		PAFZZ
	108 - 87	4	PAFZZ		108 - 32		PAFZZ
MS24665-370	108 - 22		PAFZZ		110 - 16	85	PAFZZ
	108 - 49		PAFZZ	MS35338-145	108A -22	4	PAFZZ
	109 - 29		PAFZZ	MS35338-146	109 - 9		PAFZZ
	112 - 32	20	PAFZZ		111A -15	3	PAFZZ
MS24667-29	109 - 53	4	PAFZZ	MS35338-43	108 - 67	2	PAFZZ
MS24667-78	108 - 98	4	PAFZZ	MS35338-44	110 - 26	12	PAFZZ
MS24671-52	106A -57	8		MS35338-45	113 - 8		PAFZZ
MS24671-55	106A -21				113 - 15		PAFZZ
	106A -42	40			113 - 18	31	PAFZZ
MS24671-57	106A -43	8		MS35338-46	108 - 64		PAFZZ
MS24671-79	106A -59	24			108 - 76		PAFZZ
MS24693-C102	109 - 37		PAFZZ		108 - 110		PAFZZ
	109 - 49	22	PAFZZ		108A -38		PAFZZ
MS24693-C120	108 - 55	12	PAFZZ		109 - 41		PAFZZ
MS24693-C144	108 - 94	4	PAFZZ		109 - 64		PAFZZ
MS24693-S146	108 - 72	8	PAFZZ		110 - 5		PAFZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
MS35338-46	110 - 22		PAFZZ
	111 - 8		PAFZZ
	111 - 16		PAFZZ
	111A -8		PAFZZ
	112 - 8		PAFZZ
	113 - 32	66	PAFZZ
MS35338-48	107 - 10		PAFZZ
	107 - 13		PAFZZ
	108 - 101		PAFZZ
	108 - 104		PAFZZ
	108A -27		PAFZZ
	108A -41		PAFZZ
	109 - 57		PAFZZ
	110 - 30		PAFZZ
	110 - 33		PAFZZ
	111 - 20		PAFZZ
	111A -24		PAFZZ
	112 - 19		PAFZZ
	113 - 11	148	PAFZZ
MS35338-49	105 - 5	8	PAOZZ
MS35649-104	112 - 16B	5	PAFZZ
MS35650-3312	113 - 7	1	PAFZZ
MS35752-11	110 - 27	12	PAFZZ
MS51021-3	52 - 22	2	PAFZZ
MS51576-16	108 - 15		PAFZZ
	108 - 42		PAFZZ
	108 - 83		PAFZZ
	109 - 22		PAFZZ
	112 - 25		PAFZZ
	112 - 90A	23	PAFZZ
MS51576-17	109 - 11	1	PAFZZ
MS51578-37	108 - 91	2	PAFZZ
MS51830-110	106A -81	32	
MS51844-63	112 - 16F	5	PAFZZ
MS51922-2	109 - 35	16	PAFZZ
MS51922-33	108 - 97		PAFZZ
	111 - 24		PAFZZ
	111A -26		PAFZZ
	112 - 45	16	PAFZZ
= MS51922-37	106 - 11		PAOZZ
=	106 - 14		PAOZZ
=	106 - 31		PAOZZ
=	106 - 35		PAOZZ
	109 - 55		PAOZZ
	113 - 21		PAOZZ
	113 - 23		PAOZZ
	113 - 25	26	PAOZZ
MS51922-77	108 - 28	1	PAFZZ
MS51957-14	52 - 18	4	PAFZZ
MS51957-28	52 - 5	15	PADZZ
MS51957-33	52 - 11		PAFZZ
	52 - 14	8	PAFZZ
MS51957-49	113 - 44	4	KF
MS51967-14	113 - 12		PADZZ
	113 - 19	8	PADZZ
MS51967-17	110 - 4		PAFZZ
	110 - 23	17	PAFZZ
MS51967-2	109 - 46		PAFZZ
	110 - 25	18	PAFZZ
MS51967-8	108 - 63		PAFZZ
	108 - 75		PAFZZ
	108 - 109		PAFZZ
	108A -37		PAFZZ
	109 - 63		PAFZZ
	110 - 4		PAFZZ
	110 - 23		PAFZZ
	111 - 7		PAFZZ
	111A -7		PAFZZ
	112 - 7		PAFZZ
	113 - 31	61	PAFZZ
MS51971-1	106A -33	4	PAFZZ
MS51971-3	106A -39		PAFZZ
	106A -90	18	PAFZZ
MS51971-5	106A -10		PAFZZ
	106A -46		PAFZZ
	112 - 90F	41	PAFZZ
MS51971-8	109 - 8		PAFZZ
	109 - 9B	2	PAFZZ
MS51972-1	106A -69	16	PAFZZ
MS51972-8	111A -14	1	PAFZZ
MS51975-3	106A -92	2	PAFZZ
MS90725	110 - 32	4	PAFZZ
MS90725-107	110 - 29	4	PAFZZ
MS90725-115	113 - 10	4	PAFZZ
MS90725-60	108 - 111		PAFZZ
	108A -33		PAFZZ
	109 - 65		PAFZZ
	110 - 6		PAFZZ
	111 - 9		PAFZZ
	111A -9		PAFZZ
	112 - 9		PAFZZ
	113 - 33	36	PAFZZ
MS90725-66	108 - 77	8	PAFZZ
MS90725-67	110 - 19	9	PAFZZ
MS90726-108	108 - 100		PAFZZ
	108 - 103		PAFZZ
	108A -26		PAFZZ
	108A -40		PAFZZ
	109 - 56		PAFZZ
	111 - 19		PAFZZ
	111A -23		PAFZZ
	112 - 18	112	PAFZZ
MS90726-113	106 - 15		PAOZZ
	106 - 36		PAOZZ
	107 - 4		PAOZZ
	107 - 8		PAOZZ
	107 - 9	29	PAOZZ
MS90726-114	106 - 12	2	PAOZZ
MS90726-120	106 - 29	4	PAOZZ
MS90726-128	107 - 12	8	PAOZZ
MS90726-135	105 - 4	8	PAOZZ
MS90726-3	106 - 32	4	PAOZZ
MS90726-35	113 - 14		PAFZZ
	113 - 17	30	PAFZZ
MS9100-04	30 - 37		PAOZZ
	37 - 26B		PAOZZ
	37 - 48B	3	PAOZZ
MS9100-06	45 - 2	1	PAOZZ
MS9111-11	45 - 10	2	PAOZZ
MS9111-13	45 - 11	1	PAOZZ
MS9146-06	110 - 43	3	KF
MS9198-03	39 - 24B	1	XA
MS9198-04	14 - 16		PAFZZ
	14 - 24		PAFZZ
	15 - 24		PAFZZ
	15 - 48		PAFZZ
	24 - 24H		PAFZZ
	31 - 17		PAFZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
MS9198-04	37 - 16		PAFZZ
	37 - 45		PAFZZ
	82 - 7		PAFZZ
	89 - 21	14	PAFZZ
MS9201-06	20 - 33	2	PAFZZ
MS9245-03	72 - 2	4	PAFZZ
MS9245-22	67 - 79	5	PAFZZ
MS9245-23	90 - 1		PAOZZ
	92 - 1		PAOZZ
	93 - 6		PAOZZ
	101 - 1		PAOZZ
	102 - 1	18	PAOZZ
MS9245-24	44 - 5		PAOZZ
	44 - 15		PAOZZ
	44 - 24		PAOZZ
	63 - 49		PAOZZ
	67 - 1		PAOZZ
	67 - 19		PAOZZ
	67 - 34		PAOZZ
	77 - 6		PAOZZ
	77 - 29		PAOZZ
	78 - 3		PAOZZ
	78 - 19		PAOZZ
	78 - 26		PAOZZ
	78 - 41	56	PAOZZ
MS9245-25	63 - 112	5	PAFZZ
MS9245-27	77 - 1		PAFZZ
	78 - 10		PAFZZ
	78 - 30	12	PAFZZ
MS9245-28	48 - 4		PAOZZ
	62 - 13	7	PAOZZ
MS9276-10	77 - 38		PAFZZ
	78 - 49		PAFZZ
	78 - 60	32	PAFZZ
MS9314-04	19 - 9		PAOZZ
	21 - 8		PAOZZ
	21 - 16		PAOZZ
	22 - 29		PAOZZ
	23 - 7		PAOZZ
	28 - 29		PAOZZ
	31 - 26		PAOZZ
	36 - 25		PAOZZ
	37 - 17		PAOZZ
	47 - 22	14	PAOZZ
MS9314-05	37 - 47	2	PAOZZ
MS9318-009	74 - 69	3	PAFZZ
MS9318-016	74 - 58	2	PAFZZ
MS9318-017	74 - 54	4	PAFZZ
MS9318-052	63 - 155	AR	PAFZZ
	66 - 16		PAFZZ
	70 - 55		PAFZZ
	84 - 20	26	PAFZZ
MS9318-053	74 - 71	12	PAFZZ
MS9318-054	74 - 67		PAFZZ
	74 - 73	22	PAFZZ
MS9318-056	75 - 41		PAFZZ
	75 - 43		PAFZZ
	75 - 45		PAFZZ
	75 - 47		PAFZZ
	75 - 49	31	PAFZZ
MS9318-059	74 - 62	2	PAFZZ
MS9318-060	66 - 14		PAFZZ
	74 - 16		PAFZZ
	74 - 28		PAFZZ
	74 - 53		PAFZZ
	74 - 57		PAFZZ
	75 - 7	21	PAFZZ
MS9318-062	74 - 12		PAFZZ
	74 - 20		PAFZZ
	74 - 24		PAFZZ
	74 - 35		PAFZZ
	74 - 43	30	PAFZZ
MS9318-064	74 - 21		PAFZZ
	74 - 25		PAFZZ
	74 - 40		PAFZZ
	74 - 50		PAFZZ
	74 - 61	15	PAFZZ
MS9318-065	74 - 17		PAFZZ
	74 - 29		PAFZZ
	74 - 112	27	PAFZZ
MS9318-066	75 - 3		PAFZZ
	75 - 29	6	PAFZZ
MS9318-068	75 - 20		PAFZZ
	75 - 25	8	PAFZZ
MS9318-072	74 - 44		PAFZZ
	75 - 33	7	PAFZZ
MS9318-076	75 - 38	8	PAFZZ
MS9318-098	42 - 3		PADZZ
	42 - 8		PADZZ
	66 - 6	22	PADZZ
MS9318-100	70 - 56		PAFZZ
	94 - 12	9	PAFZZ
MS9318-102	66 - 12	3	PAOZZ
MS9318-104	51 - 79		PAOZZ
	51 - 82	8	PAOZZ
MS9318-105	74 - 4		PAOZZ
	74 - 34	6	PAOZZ
MS9318-106	74 - 33		PAFZZ
	75 - 6	12	PAFZZ
MS9318-107	74 - 2	2	PAOZZ
MS9318-108	74 - 15		PAFZZ
	74 - 19		PAFZZ
	74 - 23		PAFZZ
	74 - 27		PAFZZ
	74 - 38		PAFZZ
	74 - 49		PAFZZ
	75 - 2		PAFZZ
	75 - 18		PAFZZ
	75 - 23		PAFZZ
	75 - 28	32	PAFZZ
MS9318-110	74 - 11		PAFZZ
	74 - 39		PAFZZ
	74 - 48		PAFZZ
	75 - 24	15	PAFZZ
MS9318-112	74 - 10	7	PAFZZ
MS9318-114	75 - 19	2	XA
MS9318-118	75 - 37	8	PAFZZ
= MS9318-220	108 - 117		PAFZZ
	108A -43		PAFZZ
=	109 - 71		PAFZZ
=	111 - 30		PAFZZ
=	112 - 51		PAFZZ
=	113 - 38	488	PAFZZ
MS9319-004	63 - 147	AR	PAFZZ
MS9319-006	63 - 150	AR	PAFZZ
MS9319-050	63 - 153	AR	PAFZZ
MS9319-052	63 - 158	AR	PAFZZ
	66 - 9		PAFZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	MS9319-052	74 - 113	58	PAFZZ
	MS9319-098	63 - 146	AR	PAFZZ
		66 - 7	35	PAFZZ
	MS9319-099	63 - 154	AR	PAFZZ
	MS9319-100	63 - 139	AR	PAFZZ
	MS9319-101	63 - 145	AR	PAFZZ
	MS9319-102	63 - 143	AR	PAFZZ
	MS9319-104	63 - 144	AR	PAFZZ
	MS9319-154	75 - 32	6	PAFZZ
	MS9320-09	110 - 44	3	PAFZZ
	MS9320-10	45 - 9		PAOZZ
		45 - 26	7	PAOZZ
	MS9321-05	70 - 57	5	PAOZZ
	MS9321-09	41 - 3	6	PAOZZ
	MS9321-10	58 - 3		PAOZZ
		58 - 18		PAOZZ
		58 - 33		PAOZZ
		58 - 78		PAOZZ
		60 - 36	40	PAOZZ
	MS9321-11	53 - 26	7	PAOZZ
	MS9358-14	108 - 23		PAFZZ
		108 - 50		PAFZZ
		109 - 30		PAFZZ
		112 - 33	20	PAFZZ
	MS9360-10	34 - 6		PAOZZ
		35 - 14	3	PAOZZ
	MS9363-11	63 - 113	5	PAFZZ
	MS9385-02	73 - 36	24	PAFZZ
	MS9386-010	73 - 36	24	PAFZZ
	MS9386-013	80 - 20	1	PAOZZ
	MS9386-115	37 - 52	1	PAOZZ
	MS9386-119	32 - 6	1	PAOZZ
	MS9386-121	40 - 5	2	PAOZZ
	MS9386-122	5 - 17	7	PAOZZ
	MS9386-123	18 - 6		PAOZZ
		32 - 30	2	PAOZZ
	MS9386-126	37 - 55	1	PAOZZ
	MS9386-130	32 - 12	1	PAOZZ
	MS9386-133	40 - 7	2	PAOZZ
	MS9386-135	18 - 15		PAOZZ
		32 - 37	2	PAOZZ
	MS9386-155	57 - 11		PAOZZ
		57 - 18	2	PAOZZ
	MS9386-226	46 - 9	1	PAOZZ
	MS9386-230	57 - 3	2	PAOZZ
	MS9388-015	55 - 35		PAOZZ
		81 - 7	2	PAOZZ
	MS9388-020	55 - 36	1	PAOZZ
	MS9388-154	41 - 4	1	PAOZZ
	MS9389-80	103 - 27	4	PAFZZ
	MS9390-200	102 - 12	1	PAFZZ
	MS9390-290	72 - 17	1	PADZZ
	MS9390-300	61 - 4		PADZZ
		68 - 25	3	PADZZ
	MS9390-420	61 - 7	2	PADZZ
	MS9403-130	70 - 53	4	PAFZZ
	MS9403-132	70 - 47	4	PADZZ
	MS9403-274	56 - 2		PAFZZ
S		56 - 2		
		56 - 11		PAFZZ
S		56 - 11		
		56 - 18		PAFZZ
S		56 - 18		
		56 - 25		PAFZZ
S		56 - 25	5	
	MS9403-278	56 - 2		PAFZZ
		56 - 11		PAFZZ
		56 - 18		PAFZZ
		56 - 25	5	PAFZZ
	MS9483-03	39 - 24A	1	XA
	MS9483-04	14 - 15		PAFZZ
		14 - 23		PAFZZ
		15 - 23		PAFZZ
		37 - 15		PAFZZ
		37 - 44		PAFZZ
		82 - 6		PAFZZ
		89 - 20	9	PAFZZ
	MS9486-02	61 - 6	1	PADZZ
	MS9490-08	79 - 25C		PAFZZ
		79 - 26C	2	PAFZZ
	MS9491-27	50A - 3	4	KF
	MS9518-14	59 - 3	3	PAFZZ
	MS9519-06	60 - 33	3	PADZZ
	MS9519-08	60 - 43		PADZZ
		60 - 76		PADZZ
		60 - 89	9	PADZZ
	MS9519-10	60 - 55	1	PADZZ
	MS9519-13	60 - 56		PAFZZ
		60 - 83	8	PAFZZ
	MS9519-14	59 - 17	3	PADZZ
	MS9529-08	59 - 20	2	PADZZ
	MS9530-13	60 - 83A	2	PAFZZ
	MS9549-09	51 - 14	2	PAOZZ
	MS9549-10	60 - 84B	2	PADZZ
	MS9549-11	17 - 2		PAOZZ
		50 - 16		PAOZZ
		51 - 20		PAOZZ
		63 - 114	21	PAOZZ
	MS9549-13	44 - 36	3	PAOZZ
S	MS9556-06	67 - 69		
		89 - 15	1	PAOZZ
	MS9556-07	79 - 9		PAOZZ
		79 - 11		PAOZZ
		79 - 17	18	PAOZZ
	MS9556-08	73 - 11	16	PAOZZ
	MS9556-10	67 - 68	72	PAOZZ
	MS9556-13	71 - 16	12	PAOZZ
	MS9557-08	79 - 9C	24	PAOZZ
	MS9557-12	45 - 25	3	PAOZZ
	MS9565-05	67 - 69	2	PAOZZ
	MS9565-06	4 - 8	2	PAOZZ
	MS9565-08	87 - 2	42	PAFZZ
	MS9583-06	89 - 47	1	PAFZZ
	MS9676-04	39 - 31		PAFZZ
		81 - 5	4	PAFZZ
	MS9676-06	39 - 31	2	PAFZZ
	MS9696-05	55 - 3		PAFZZ
		71 - 30		PAFZZ
		89 - 44		PAFZZ
		103 - 18		PAFZZ
		103 - 21	45	PAFZZ
	MS9696-06	73 - 72		PAFZZ
		73 - 83		PAFZZ
S		103 - 7	32	
	MS9696-07	103 - 7		PAFZZ
		103 - 12	5	PAFZZ
	MS9696-08	53 - 35		PAFZZ
		53 - 53		PAFZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	MS9696-08	53 - 72	40	PAFZZ
=	MS9696-09	53 - 77A		PAFZZ
=		53 - 82A		PAFZZ
		55 - 7		PAFZZ
		55 - 47		PAFZZ
		71 - 2		PAFZZ
		71 - 24		PAFZZ
		71 - 32	125	PAFZZ
	MS9696-10	89 - 4	66	PAFZZ
	MS9696-12	89 - 11	2	PAFZZ
	MS9697-10	89 - 6	36	PAFZZ
	MS9697-14	85 - 1		PAOZZ
		85 - 2		PAOZZ
S		85 - 3	134	
	MS9697-16	34 - 31		PAOZZ
		85 - 3	9	PAOZZ
	MS9697-22	95 - 5		PAFZZ
		96 - 3		PAFZZ
		96 - 3	68	
	MS9714-06	89 - 45	2	PAFZZ
=	MS9723-03	53 - 77A		PAFZZ
=		53 - 82A	4	PAFZZ
	MS9724-08	85 - 2		PAFZZ
		85 - 3	70	PAFZZ
	MS9732-08	82 - 18	4	PAFZZ
	MS9741-07	81 - 1		PAFZZ
		84 - 2		PAFZZ
		84 - 3	130	PAFZZ
	MS9742-12	74 - 100	4	PAFZZ
	MS9768-09	50 - 29		PAOZZ
		50 - 44		PAOZZ
		50 - 48		PAOZZ
		50 - 52	15	PAOZZ
	MS9768-12	58 - 91	4	PAFZZ
	MS9880-09	39 - 32		PAFZZ
		81 - 6	4	PAFZZ
	MS9885-08	82 - 30	3	PAFZZ
S	MS9894-11	82 - 31		
S	MS9894-12	82 - 9		
	MS9895-08	83 - 12	20	PAFZZ
	MS9895-10	81 - 3	16	PAFZZ
	MS9902-02	28 - 39	1	PAOZZ
	MS9902-04	24 - 6		PAOZZ
		24 - 24J		PAOZZ
		24 - 27		PAOZZ
		58 - 73	4	PAOZZ
	MS9902-06	13 - 25		PAOZZ
		24 - 25	2	PAOZZ
	MS9902-08	32 - 38		PAOZZ
		43 - 3	2	PAOZZ
	MS9954-06	58 - 102	1	PAOZZ
	MS9954-10	58 - 27	1	PAOZZ
	MS9966-04	13 - 24		PAOZZ
		14 - 26		PAOZZ
		15 - 28		PAOZZ
		20 - 32		PAOZZ
		24 - 4		PAOZZ
		24 - 7		PAOZZ
		24 - 24M		PAOZZ
		41 - 13		PAOZZ
		44 - 2		PAOZZ
		44 - 4		PAOZZ
		45 - 20		PAOZZ
		46 - 4		PAOZZ
		47 - 6		PAOZZ
		48 - 24		PAOZZ
		49 - 3		PAOZZ
		50 - 2		PAOZZ
		51 - 10	29	PAOZZ
	MS9966-05	13 - 22		PAOZZ
		30 - 9		PAOZZ
		41 - 11		PAOZZ
		44 - 2		PAOZZ
		45 - 22		PAOZZ
		50 - 4		PAOZZ
		50 - 10		PAOZZ
		50 - 12	16	PAOZZ
	MS9966-06	13 - 27		PAOZZ
		14 - 28		PAOZZ
		15 - 57		PAOZZ
		15 - 74		PAOZZ
		24 - 9		PAOZZ
		43 - 2		PAOZZ
		45 - 24		PAOZZ
		46 - 2		PAOZZ
		47 - 24		PAOZZ
		48 - 22		PAOZZ
		49 - 5		PAOZZ
		50 - 6		PAOZZ
		51 - 4		PAOZZ
		51 - 6		PAOZZ
		51 - 8		PAOZZ
		51 - 12		PAOZZ
		58 - 103	32	PAOZZ
	MS9966-07	13 - 29	1	PAOZZ
	MS9966-08	43 - 4		PAOZZ
		47 - 21		PAOZZ
		50 - 8	4	PAOZZ
	MS9966-10	18 - 4		PAOZZ
		31 - 30		PAOZZ
		43 - 8		PAOZZ
		49 - 19		PAOZZ
		50 - 14	8	PAOZZ
	MS9966-12	18 - 7	1	PAOZZ
	MS9967-018	31 - 31		PAOZZ
		49 - 16		PAOZZ
S		50 - 14	2	
	MS9967-112	45 - 4		PAOZZ
		45 - 7	2	PAOZZ
	MS9967-133	17 - 8	3	PAOZZ
	MS9967-214	47 - 11		PAOZZ
		47 - 14		PAOZZ
		49 - 13		PAOZZ
		49 - 23	4	PAOZZ
	MS9967-221	16 - 10	1	PAOZZ
	MS9967-222	16 - 8	1	PAOZZ
	MS9967-225	17 - 7	1	PAOZZ
	MS9967-235	47 - 4		PAOZZ
		47 - 19	2	PAOZZ
	NAS1081C4D8	106A -76	2	
	NAS1101E08H16	34 - 41	1	PAFZZ
	NAS1101E3H12	34 - 45	2	PAFZZ
	NAS1101E3H16	34 - 43	1	PAFZZ
	NAS1101E4H16	34 - 48	1	PAFZZ
	NAS1121E-8	58 - 46	2	PAOZZ
	NAS1291C08	34 - 40	1	PAFZZ
S	NAS1398C4A2	62 - 11		
		71 - 41	4	PAFZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	NAS1398C4A3	62 - 11	4	PAFZZ
=	NAS1399C4A4	70 - 56	5	PAFZZ
=	NAS1399C4A5	70 - 56	5	PAFZZ
=	NAS1399C6A12	108 - 117		PAFZZ
=		109 - 71		PAFZZ
=		113 - 38	304	PAFZZ
	NAS5901-20	51 - 28	15	PAFZZ
	NAS5901-2B	51 - 44	16	PAFZZ
	NAS5902-8	41 - 18	12	PAFZZ
	NAS620-4	51 - 34	12	PAFZZ
	NAS620-8	41 - 19	12	PAFZZ
	NAS620C10	51 - 23	19	PAFZZ
	NAS620C10L	34 - 47		PAOZZ
		50 - 32		PAOZZ
		50 - 36		PAOZZ
		50 - 40	13	PAOZZ
	NAS620C416L	34 - 49	1	PAFZZ
	NAS813-12	44 - 10A		PAOZZ
		67 - 38		PAOZZ
		67 - 38H		PAOZZ
		67 - 41G	5	PAOZZ
	NAS813-8	64 - 4		PAOZZ
		64A - 4	10	PAOZZ
=	NAS9307M-4-01	63 - 138	AR	PAFZZ
=	NAS9307M-4-02	63 - 138	AR	PAFZZ
=	NAS9307M-4-03	63 - 138	AR	PAFZZ
	NO NUMBER4475	111A -	REF	
	NO NUMBER4476	108A -	REF	
	NS103594-048			
OP		45 - 32		
OP	NS103714-02	82 - 33		
	NS103718-02	63 - 124	5	PAFZZ
OP	NS103809-002	6 - 25		
OP		11 - 21		
OP		18 - 9		
OP		32 - 33		
OP		40 - 18		
OP		40 - 21		
OP		40 - 24		
OP		40 - 27		
OP		47 - 28		
OP		70 - 61		
OP		94 - 16		
OP	NS202372-5	51 - 78		
OP		51 - 81		
OP	NS202796-4	53 - 38		
OP		53 - 56		
OP		53 - 86		
OP	NS202846-4	88 - 2		
OP		88 - 6		
OP	NS202900-3	71 - 27		
OP		71 - 43		
OP		71 - 44F		
OP	NS202900-4	88 - 2		
OP		88 - 6		
OP	NS202913-3	74 - 6		
OP	NS203068-3	5 - 20		
OP		5 - 22		
OP	NS203137-4	86 - 13		
OP	NS203217-3	6 - 25		
OP		11 - 21		
OP		18 - 9		
OP		32 - 33		
OP		40 - 18		
OP		40 - 21		
OP		40 - 24		
OP		40 - 27		
OP		47 - 28		
OP		67 - 120		
OP		70 - 61		
OP		94 - 16		
	P-15108	48 - 44		PAOZZ
		48B - 3		PAOZZ
		49 - 39		PAOZZ
		49 - 43		PAOZZ
		49 - 110		PAOZZ
		49 - 114		PAOZZ
		67 - 38C		PAOZZ
		67 - 41J	32	PAOZZ
OP	P0088001	34 - 20		
	P10163	112 - 57	3	KF
	P10547	112 - 54	1	KF
PW	P10548	105 - 12		
PW	P10549	105 - 13		
	P10550	110 - 56	2	KF
S	P10551	105 - 19		
PW	P10553	105 - 14		
PW		105 - 19		
PW	P10554	105 - 9		
PW	P10555	105 - 10		
PW	P10556	105 - 11		
PW	P10557	105 - 8		
	P10595	114 - 9	2	
PW	P11040	105 - 15		
		108 - 124		PAOZZ
		108A -50		PAOZZ
		110 - 38	9	PAOZZ
	P11882	113 - 42	3	KF
	P12757	108 - 130		KF
		108A -58		KF
		109 - 73	10	KF
=	P12760	108 - 125	1	KF
	P12761	112 - 60	2	KF
	P12763	108 - 127		KF
		108 - 131	3	KF
	P12767	110 - 51	1	KF
	P12768	110 - 50	1	KF
	P12770	108 - 128	1	KF
	P12771	112 - 62	1	
	P12772	110 - 49	1	
	P12775	108A -56	4	KF
	P12776	105 - 18		PAOZZ
		114 - 11	3	PAOZZ
	P12777	110 - 53	1	KF
	P12780	113 - 41	1	KF
	P12784	108 - 126		KF
		108A -52		KF
		110 - 41	3	KF
OP	P13U5N-0025-2	79 - 35		
	P14592	105 - 16		KF
		110 - 45	4	KF
<	P20399	105 - 22	AR	PAOZZ
<	P24048	110 - 59	AR	PAOZZ
	P31100	112 - 55	2	KF
	P31106	114 - 10	1	
	P31108	110 - 55	1	KF
	P32758	106 - 2		PAOZZ
		106 - 7		PAOZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
P32758	106 - 20	9	PAOZZ
= P32759	106 - 1		PAOZZ
=	106 - 6		PAOZZ
=	106 - 19	18	PAOZZ
PW P37145	108 - 107		
PW	108A -31		
PW	109 - 61		
PW	110 - 36		
PW	111 - 5		
PW	111A -5		
PW	112 - 5		
PW	113 - 29		
P38161	112 - 43	1	PAFZZ
P4006409	105 - 3		AOO
S	105 - 3		
	106 -	REF	AOO
		1	
P4006410	105 - 1	1	PAOBZ
P4006411	105 - 2	3	PAOBZ
P4006421	106 - 24	1	PAOZZ
P4006422	106 - 22		PAOZZ
	106A -28	2	PAOZZ
P4006423	106 - 28	1	PAOZZ
P4006433	106 - 38	1	PAOBZ
P4006440	106 - 37	1	PAOBZ
P4006443	106 - 18	1	PAOBZ
P4006451	106 - 17	1	PAOBZ
P4006452	106 - 39	1	PAOBZ
P4006459	106 - 13	1	PAOBZ
P4006464	106 - 33	2	PAOZZ
P4006499	106 - 10	2	PAOBZ
PW P4015045	108 - 116		
PW	108A -44		
PW	108A -44		
PW	109 - 70		
PW	111 - 29		
PW	112 - 50		
PW	113 - 37		
PW P4015046	108 - 4		
PW	108A -3		
PW	108A -3		
PW	109 - 4		
PW	111 - 12		
PW	111A -12		
PW	111A -12		
PW	112 - 12		
PW	113 - 3		
< P4019449	105 - 23	AR	PAOZZ
= P4021551	106 - 1		PAOZZ
=	106 - 6		PAOZZ
=	106 - 19	18	PAOZZ
P4021553	106 - 4		PAOZZ
	106 - 9		PAOZZ
	106 - 27		PAOZZ
	106A -5	9	PAOZZ
PW P4021555	105 - 6		
P4021558	106 - 16	1	PAOBZ
P4021559	106 - 5	1	PAOZZ
PW P4021567	113 - 43		
PW P4021568-01	108 - 123		
PW	108 - 123		
PW	108A -48		
PW	108A -48		
PW	110 - 40		
PW	110 - 40		
PW	112 - 59		
PW	112 - 59		
PW	113 - 45		
PW	113 - 45		
PW P4021568-02	108A -46		
PW	108A -46		
PW	112 - 65		
PW	112 - 65		
PW P4021568-03	108A -47		
PW	108A -47		
PW	110 - 47		
PW	110 - 47		
PW	112 - 61		
PW	112 - 61		
PW P4021568-04	108A -49		
PW	108A -49		
PW	112 - 58		
PW	112 - 58		
PW P4021572-01	110 - 46		
PW	110 - 46		
PW	112 - 63		
PW	112 - 63		
PW P4021572-02	108 - 132		
PW	108 - 132		
PW	108A -54		
PW	108A -54		
PW	112 - 64		
PW	112 - 64		
PW P4021572-04	108 - 129		
PW	108A -53		
P4021572-06	108A -57	2	
< P4021590	108A -45	1	
P4021592	F 113 - 39	1	PAFZZ
< P4021593	111A -34	1	
P4021612	110 - 11	1	PAFFF
P4021617-01	110 - 37	1	XA
P4021617-02	110 - 28	4	PAFBZ
P4021617-04	110 - 3	1	PAFZZ
PW P4021623	1 - 24		
PW	114 -		
PW P4021628	105 - 17		
P4021629	105 -	1	AOO
P4021630	F 110 - 37	1	PAFZZ
P4021646	F 105 - 7	1	PAFZZ
P4021649	F 114 - 6	1	
P4030507	106 - 34	2	PAOZZ
P4030509	106 - 40	1	PAOBZ
PW P4030568	108 - 117		
PW	109 - 71		
PW	113 - 38		
P4030578	107 - 17	1	PAOBZ
P4030579	107 - 16	1	PAOBZ
P4030580	105 - 7		AOO
	107 -	REF	AOO
		1	
P4030583	105 - 20	1	PAOZZ
P4030584	107 - 5	1	PAOBZ
P4030585	107 - 5	1	PAOBZ
P4030587	107 - 1	1	PAOBZ
P4030590	107 - 15	4	PAOZZ
P4030591	107 - 14	4	PAOZZ
P4030592	107 - 11	8	PAOBZ
PW P4045515	106 - 23		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
P4045515	106A -27	1	PAFZZ
PW P4045516	106 - 25		
	106A -25	1	PAFZZ
PW P4045524-06	110 - 54		
S P4045550	110 - 1		
PW P4048973-6	106A -104		
P4070529	108 -	1	PAFDD
P4070529-02	108 - 99	1	PAFDD
P4070529-03	108 - 3	1	PAFDD
P4070529-04	108 - 114	1	PAFDD
P4070537	109 -	1	PAFDD
P4070537-01	109 - 68	1	PAFDD
P4070537-02	109 - 3	1	PAFDD
P4070537-03	109 - 54	1	PAFDD
PW P4070541	109 - 58		
P4070543	110 -	1	PAFDD
P4070543-01	110 - 37	1	XA
P4070543-02	110 - 28	4	PAFZZ
P4070543-03	110 - 24	1	PAFBZ
P4070543-04	110 - 3	1	XA
P4070543-05	110 - 18	1	PAFBZ
P4070544	112 - 56	1	KF
P4070545	110 - 14	1	PAFZZ
P4070546	112 - 52	1	KF
PW P4070547	110 - 31		
P4070548	111 -	1	PAFDD
P4070548-01	111 - 11	1	PAFDD
P4070548-02	111 - 28	1	PAFDD
P4070548-03	111 - 25	1	PAFZZ
P4070548-04	111 - 18	1	PAFDD
P4070553	112 -	1	PAFDD
P4070553-01	112 - 11	1	PAFDD
P4070553-02	112 - 49	1	PAFDD
< P4070582	105 - 25	AR	PAOZZ
< P4070583	105 - 24	AR	PAOZZ
P4070584-01	105 - 12	2	PAOZZ
P4070584-02	105 - 9	1	PAOZZ
P4070584-03	105 - 11	1	PAOZZ
P4070584-04	105 - 8	1	PAOZZ
P4070585	F 108 - 117	1	PAFFF
P4070586	108 - 121	1	XA
P4070587	F 108 - 118	1	PAFZZ
P4070588	108 - 118	3	PAFZZ
PW P4070589	112 - 44		
PW P4070590	111 - 23		
PW	111A -25		
P4070591	108 - 102		PAFZZ
PW	108A -28	4	
P4070592	111 -	1	PAFDD
P4070592-01	111 - 11	1	PAFDD
P4070592-02	111 - 28	1	PAFDD
P4070592-03	111 - 25	1	PAFZZ
P4070592-04	111 - 18	1	PAFDD
P4078386-04 *	105 - 21	1	PAOZZ
P4078387-04 *	105 - 21	1	PAOZZ
P4078808	111 - 14A	1	PAFZZ
P4078809	105 - 26	AR	PAODD
PW P4078837-17	106A -20		
PW P4078837-23	106A -9		
PW P4078837-24	106A -3		
PW P4078837-8	106A -15		
P4078837	105 - 3		AOO
	106A -	2	AOO
P4078842	112 -	1	PAFDD
P4078843	108A -	1	PAFDD
P4078844	111A -	1	PAFDD
P4078845	109 -	1	PAFDD
< P4078846	108A -7	1	PAFZZ
P4078846-01	108A -10	1	PAFZZ
P4078846-02	108A -9	1	PAFZZ
P4078846-03	108A -8	4	PAFZZ
P4078847	111A -27	1	XB
P4078849	112 - 46D	1	PAFZZ
P4078850	112 - 46A	1	PAFZZ
P4078851-01	109 - 50	1	PAFDD
P4078852-01	108 - 57	1	XA
P4078853-01	112 - 41	1	PAFDD
P4078854-01	108 - 14		PAFZZ
	108 - 41		PAFZZ
	109 - 21		PAFZZ
	112 - 24		PAFZZ
	112 - 90C	21	PAFZZ
P4078854-02	108 - 82	1	PAFZZ
PW P4078855	108 - 19		
PW	108 - 46		
PW	109 - 26		
PW	112 - 29		
PW	112 - 90H		
PW P4078856	108 - 17		
PW	108 - 44		
PW	108 - 85		
PW	108 - 119		
PW	109 - 24		
PW	112 - 27		
PW	112 - 90D		
PW P4078857	108 - 11		
PW	108 - 38		
PW	109 - 18		
PW	112 - 21		
P4078858	108 - 12		PAFZZ
	108 - 39		PAFZZ
	109 - 19		PAFZZ
	112 - 22	20	PAFZZ
PW P4078859	111 - 21		
P4078860	F 108 - 9		PAFFF
	F 108 - 36		PAFFF
	F 109 - 16		PAFFF
	F 112 - 19	20	PAFFF
P4078861	108 - 25		PAFZZ
	108 - 52		PAFZZ
	109 - 32		PAFZZ
	112 - 35		PAFZZ
	112 - 90L	21	PAFZZ
P4078862	108 - 24		PAFZZ
	108 - 51		PAFZZ
	109 - 31		PAFZZ
	112 - 34		PAFZZ
PW	112 - 90G	20	
P4078863	108 - 18		PAFZZ
	108 - 45		PAFZZ
	108 - 120		PAFZZ
	109 - 25		PAFZZ
	112 - 28		PAFZZ
	112 - 90E	22	PAFZZ
P4078864	108 - 26		PAFZZ
	108 - 53		PAFZZ
	109 - 33		PAFZZ
	112 - 36		PAFZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	P4078864	112 - 90P	21	PAFZZ
	P4078865	108 - 13		PAFZZ
		108 - 40		PAFZZ
		109 - 20		PAFZZ
		112 - 23		PAFZZ
		112 - 90N	21	PAFZZ
PW	P4078866	111 - 22		
	P4078867	F 112 - 17	1	PAFDD
	P4078868-01	109 - 34	4	PAFZZ
	P4078869-01	109 - 45	1	PAFBZ
	P4078870-01	109 - 39	1	PAFZZ
	P4078871	109 - 38	2	PAFZZ
	P4078872-01	F 109 - 39	1	PAFFF
	P4078872-02	109 - 44	1	PAFFF
	P4078872-03	109 - 42	4	PAFZZ
	P4078872-04	109 - 43	1	PAFZZ
	P4078873	109 - 15	1	PAFZZ
	P4078874	109 - 52	1	PAFZZ
	P4078875	F 109 - 16	1	PAFDD
	P4078876-01	108 - 34	5	PAFZZ
	P4078876-02	108 - 35	1	PAFZZ
	P4078877	108 - 33	12	PAFZZ
	P4078878	108 - 30	1	PAFZZ
	P4078879	112 - 37	4	PAFZZ
	P4078880	108 - 27	1	PAFZZ
	P4078881	108 - 9	4	PAFZZ
	P4078883	108 - 7	1	PAFDD
	P4078884	F 108 - 36	1	PAFDD
	P4078885	108 - 54	6	PAFZZ
	P4078886	108 - 69	2	PAFZZ
	P4078887	F 108 - 62	1	PAFFF
	P4078888	F 108 - 62	1	PAFFF
	P4078889	108 - 73	1	PAFZZ
	P4078890	108 - 73	1	PAFZZ
PW	P4078891	108 - 68		
	P4078892	108 - 65	2	PAFZZ
	P4078893	108 - 95	1	PAFZZ
	P4078894	108 - 96	2	PAFZZ
PW	P4078895	108 - 86		
	P4078896	108 - 90	2	PAFZZ
	P4078897	108 - 93	2	PAFZZ
	P4078898	F 108 - 81	1	PAFFF
	P4078899	108 - 80	4	PAFZZ
	P4078901	108 - 79	4	PAFZZ
	P4078903	108 - 74	2	PAFZZ
	P4078904-01	112 - 83	1	PAFZZ
	P4078904-02	112 - 88	1	PAFZZ
	P4078904-03	112 - 78	1	PAFZZ
	P4078905	112 - 73	1	PAFZZ
	P4078906-01	111 - 17	1	PAFZZ
	P4078910	111 - 15	1	PAFZZ
	P4078911	112 - 68	1	PAFZZ
	P4078913	109 - 10	1	PAFZZ
	P4078914	109 - 7	1	PAFDD
	P4078915	108 - 59	2	PAFZZ
	P4078916-02	108 - 36	1	PAFZZ
	P4078917	108 - 8	4	PAFZZ
	P4078918	F 108 - 121	1	PAFZZ
	P4078919	F 111 - 30	1	PAFZZ
	P4078920	F 109 - 71	1	PAFZZ
	P4078921	F 112 - 51	1	PAFZZ
	P4078922	109 - 16	1	PAFZZ
PW	P4078927	108 - 21		
PW		108 - 48		
PW		109 - 28		
PW		112 - 31		
PW		112 - 90K		
	P4078928	F 108 - 81	1	PAFFF
	P4078929	108 - 95	1	PAFZZ
	P4078930	108 - 56	2	PAFZZ
	P4078931	108 - 82	1	PAFZZ
	P4078932	109 - 51B	1	PAFZZ
	P4078933	108A -29	1	XB
	P4078934-01	112 - 84	1	PAFZZ
	P4078934-02	112 - 89	1	PAFZZ
	P4078934-03	112 - 79	1	PAFZZ
	P4078935	112 - 74	1	PAFZZ
	P4078936	112 - 69	1	PAFZZ
	P4078937	108A -25	2	PAFZZ
	P4078938	109 - 54	1	PAFZZ
	P4078939	112 - 46B	1	PAFZZ
<	P4078940	108A -12	1	PAFZZ
	P4078940-01	108A -15	1	PAFZZ
	P4078940-02	108A -14	1	PAFZZ
	P4078940-03	108A -13	2	PAFZZ
	P4078941	111A -21	12	PAFZZ
	P4078942	111A -19	1	PAFZZ
	P4078943	111A -30	1	PAFZZ
	P4078944	111A -17	1	XB
	P4078945	111A -22	4	PAFZZ
	P4078946	111A -20	1	PAFZZ
	P4078947	109 - 51C	1	PAFZZ
	P4078948	109 - 51A	8	PAFZZ
	P4078949	109 - 7A	1	PAFZZ
	P4078950	106A -32	1	
	P4078951	106A -55	2	
PW	P4078952-17	106A -62		
PW	P4078952-20	106A -77		
PW	P4078952-25	106A -67		
	P4078952	106A -56	1	
	P4078953	106A -14	4	
	P4078954	106A -50	8	
	P4078955	106A -66	2	
	P4078956	106A -6	1	
	P4078957	106A -24	1	
<	P4078958	106A -105	1	
	P4078959	106A -74	2	
	P4078960	106A -75	2	
	P4078961	106A -73	2	
	P4078962	106A -68	2	
	P4078963	106A -64	2	
	P4078964	106A -30	2	
	P4078965	106A -31	1	
	P4078966	106A -26	1	
	P4078968	106A -45	2	
PW	P4078969-05	112 - 16G		
PW	P4078969-07	112 - 16E		
	P4078969	112 - 16A	1	PAFZZ
	P4078969-01	112 - 16L	1	PAFBZ
	P4078969-02	112 - 16K	1	PAFZZ
	P4078969-03	112 - 16H	5	PAFZZ
	P4078969-04	112 - 16J	5	PAFZZ
	P4078970	111A -28	1	XB
	P4078971	110 -	1	PAFDD
PW	P4078973-10	106A -88		
PW	P4078973-7	106A -98		
PW	P4078973-8	106A -97		
	P4078973	106A -87	2	

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	P4078974	106A -93	2	
	P4078975	106A -95	2	
	P4078976	106A -96	2	
	P4078977	106A -99	2	
	P4078978	106A -102	2	
	P4078979	106A -103	2	
	P4078980	106A -37	1	
	P4078981	106A -38	1	
	P4078982	106A -44	2	
	P4078983	106A -51	2	
	P4078984	106A -54	1	
	P4078985	106A -53	1	
	P4078986	106A -58	1	
	P4078987	106A -52	2	
	P4078988	106A -60	4	
	P4078989	106A -85	1	
	P4078990	106A -86	1	
	P4078991	106A -82	4	
	P4078992	106A -84	1	
	P4078993	106A -83	1	
	P4078995	105 - 27	1	AOO
	P42379	110 - 48	1	KF
	P42381	110 - 52	1	KF
	P4330474	112 - 90	4	PAFZZ
PW	P45962	108A -17		
		109 - 54C	2	
PW	P47412	108 - 1		
PW		108A -30		
PW		109 - 1		
PW		110 - 1		
PW		111 - 2		
PW		111A -2		
PW		112 - 1		
PW		113 - 27		
	P47413	111 - 14	1	PAFZZ
	P47431	108 - 115		PAFZZ
		109 - 69		PAFZZ
		112 - 14		PAFZZ
		113 - 39	4	PAFZZ
S	P48253	110 - 31		
PW		110 - 31		
PW	P48254	110 - 8		
	P48683	112 - 47	1	PAFBZ
S	P48685	112 - 44		
	P48686	112 - 46	1	PAFBZ
	P48687	112 - 17	1	PAFBZ
PW	P48690	108 - 5		
PW		108A -4		
PW		108A -4		
PW		109 - 5		
PW		111A -13		
PW		111A -13		
PW		112 - 13		
PW		113 - 4		
PW	P486910	111 - 13		
S	P48741	111 - 23		
	P48745	111 - 26		PAFZZ
		111A -31	2	PAFZZ
	P48910	109 - 6	1	PAFZZ
S	P48913	109 - 58		
	P48927	108A -24	2	PAFBZ
	P48931	108 - 6		PAFZZ
		108A -5	2	PAFZZ
S	P48932	108 - 102		
	P48933	108A -20	4	AFF
PW	P48995	113 - 24		
	P48997	113 - 20	1	PAFZZ
	P48998	113 - 16	1	PAFBZ
	P49001	113 - 13	2	PAFBZ
	P49212	108 - 108		PAFZZ
		108A -34		PAFZZ
		109 - 62		PAFZZ
		111 - 6		PAFZZ
		111A -6		PAFZZ
		112 - 6		PAFZZ
		113 - 30	7	PAFZZ
	P49735	113 -	1	PAFFF
	P49738	113 - 5	1	PAFZZ
	P49814	113 - 22	1	PAFZZ
	P50326	110 - 7	1	PAFZZ
	P50364	112 - 42A	1	XB
PW	P50844	108 - 105		
PW		108A -36		
PW		109 - 59		
PW		110 - 34		
PW		111 - 1		
PW		111A -1		
PW		112 - 2		
PW		113 - 26		
	P50854	113 - 9	1	PAFBZ
PW	P52086	111 - 30		
PW		112 - 51		
	P52506	108 - 133		KF
		108A -55	2	KF
	P52715	106A -106		PAFZZ
	*	108 - 2		PAFZZ
		108A -1		PAFZZ
	*	109 - 2		PAFZZ
	*	110 - 2		PAFZZ
	*	111 - 3		PAFZZ
		111A -3		PAFZZ
	*	112 - 3		PAFZZ
	*	113 - 1	17	PAFZZ
PW	P52794	113 - 6		
	P52798	111A -32	1	PAFFF
	P52799	111A -11	1	PAFDD
	P52992	112 - 15	1	PAFZZ
	P53362	113 - 40	1	KF
	P53368	108A -2	1	PAFFF
	P53369	108A -42	1	PAFFF
	P53370	113 - 2	1	PAFFF
	P53371	113 - 36	1	PAFFF
=	P53376	108 - 125		KF
		108A -51	2	KF
	P53391	109 - 72	1	KF
	P61218	110 - 42	1	KF
<	P6153	105 - 24	AR	PAOZZ
	P6614	108 - 122	2	KF
	P6616	114 - 8	1	
	P6616-A	110 - 39	1	KF
	P6617	114 - 7	1	
	P6626	114 - 12	3	
<	P6671	105 - 25	AR	PAOZZ
	P8320	108 - 135		KF
		108A -59		KF
		109 - 74		KF
		110 - 58		KF
		111 - 31		KF

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR		PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	P8320	111A -36		KF	=		43 - 31	11	PADZZ
		112 - 66		KF		ST1000-011	42 - 33	1	PAFZZ
		113 - 46	54	KF		ST1000-013	30 - 4		PAOZZ
	PD-120	108 - 129		KF			59 - 22	2	PAOZZ
		108A -53	4	KF		ST1000-014	81 - 9	1	PAFZZ
=	PD-40	110 - 46		KF		ST1000-016	32 - 4	1	PAFZZ
=		112 - 63	5	KF		ST1000-019	32 - 26	1	PAOZZ
=	PD-60	108 - 132		KF		ST1000-024	60 - 16B	1	PADZZ
=		108A -54		KF		ST1000-048	58 - 84	1	PAFZZ
=		112 - 64	8	KF		ST1000-111	60 - 82	1	PADZZ
	PDI-122	108 - 134	2	KF		ST1000-112	55 - 28	1	PAOZZ
	PK535-4-5	58 - 86	4	PADZZ		ST1000-128	30 - 45		PAOZZ
OP	PLT4H-76	3 - 45					42 - 13	2	PAOZZ
	PRD-437-CJ	60 - 24	1	PAOZZ		ST1000-131	30 - 44		PAOZZ
	PRE-420-CJ	60 - 19	1	PAOZZ			42 - 14	2	PAOZZ
	PWA 56682	109 - 51D	1	PEFFF		ST1000-152	59 - 6	1	PAFZZ
	PWA 56731	108A -11	1	PAFZZ		ST1000-153	58 - 31	1	PAOZZ
	PWA 56732	108A -6	1	PEFFF		ST1000-154	60 - 21		PAOZZ
OP	R-						60 - 26	3	PAOZZ
	1093QQ4SD605R4A3P7					ST1000-163	60 - 99	1	PAFZZ
	13LY5	58 - 64				ST1000-164	60 - 87	1	PADZZ
OP	R116KC900	71 - 11				ST1000-214	58 - 15	2	PAOZZ
	RC799UL090	58 - 36		PAOZZ		ST1000-215	28 - 34		PAOZZ
		58 - 47	2	PAOZZ			47 - 44	2	PAOZZ
	RD859UL0H7	58 - 55	1	PAOZZ		ST1000-218	28 - 33		PAOZZ
OP	RM-LH3858-048	34 - 17					58 - 24	2	PAOZZ
OP		34 - 30				ST1000-219	28 - 36	1	PAOZZ
OP		53 - 41				ST1000-241	47 - 45	1	PAOZZ
OP		53 - 61				ST1000-256	58 - 100	2	PAFZZ
OP		53 - 89				ST1001-04	24 - 24K		PAOZZ
OP		53 - 91					24 - 28		PAOZZ
OP		58 - 77					28 - 2		PAOZZ
OP		67 - 106A					58 - 71		PAOZZ
OP	RMLHTA51-2860-02	82 - 33					58 - 74	7	PAOZZ
	RP-9	110 - 54	1	KF		ST1001-06	24 - 26		PAOZZ
	S-643	106A -15	4				30 - 2	2	PAOZZ
OP	SA6632	58 - 64				ST1001-08	58 - 69	1	PAOZZ
S	SC2682-018	67 - 72				ST1001-10	58 - 26		PAOZZ
S		77 - 54					58 - 28		PAOZZ
S		78 - 51					58 - 30		PAOZZ
S		78 - 64					60 - 5	6	PAOZZ
S		78 - 72				ST1001-12	32 - 31	1	PAOZZ
S		95 - 8				ST1050-008	60 - 70	2	PADZZ
S		95 - 36				ST1050-009	60 - 64	1	PADZZ
S		95 - 60				ST1050-011	60 - 2		PAOZZ
S		96 - 6					60 - 65	2	PAOZZ
S		96 - 30				ST1050-016	58 - 9	1	PAOZZ
S		96 - 51				ST1050-110	67 - 96	4	PAFZZ
OP	SEC027N-04	89 - 22				ST1050-145	58 - 80	1	PAOZZ
OP	SEC027N-06	37 - 53				ST1050-214	28 - 37		PAOZZ
OP		55 - 20					30 - 40	4	PAOZZ
OP	SEC027N-07	55 - 32				ST1051-04	60 - 18	1	PAOZZ
OP	SEC027N-09	32 - 8				ST1051-08	32 - 39		PAOZZ
OP	SEC027N-12	89 - 49					42 - 27	2	PAOZZ
OP	SEC027N-14	89 - 68				ST1051-10	42 - 34		PAOZZ
OP	SEC027N-16	47 - 8					58 - 10	4	PAOZZ
=	SFC-250SUM-9	43 - 34	3	PAFZZ		ST1051-12	42 - 24	1	PAOZZ
	SK-10	105 - 15	1	PAOZZ	OP	ST1070-23	71 - 6		
OP	SL7271	67 - 61			OP	ST1070-43	59 - 24		
OP	SL7272	67 - 62				ST1076-23	59 - 23	2	XA
OP	SL7273	39 - 37				ST1076-25	50 - 19	8	PAFZZ
OP	SMLH10863-3	53 - 76A			S	ST1076-43	59 - 24		
OP		53 - 81A			PW	ST1173-01	63 - 138		
=	SP14-C	43 - 29		PADZZ	PW		67 - 99		

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
PW	ST1173-02	63 - 138		
PW	ST1173-03	63 - 138		
	ST1209-03	74 - 5	2	PAFZZ
S	ST1212-03	70 - 56		
	ST1219-102	63 - 13	15	PAFZZ
	ST1219-108	54 - 1	96	PAFZZ
	ST1219-156	63 - 12	60	PAFZZ
	ST1322-43	59 - 24	3	PADZZ
	ST1341-09	89 - 72	75	PAFZZ
	ST1352-10	79 - 22	72	PAFZZ
	ST1411-15	62 - 5	30	PAFZZ
	ST1420-08	31 - 28		PAOZZ
=		49 - 12		PAOZZ
=		49 - 22	10	PAOZZ
	ST1420-10	24 - 11		PAOZZ
		31 - 33		PAOZZ
		47 - 2		PAOZZ
		47 - 10		PAOZZ
		47 - 13		PAOZZ
		47 - 17		PAOZZ
		47 - 29		PAOZZ
=		49 - 12		PAOZZ
=		49 - 22	34	PAOZZ
	ST1420-14	24 - 13	2	PAOZZ
	ST1421-12	16 - 5	3	PAOZZ
	ST1421-22	50 - 15	8	PAOZZ
	ST1455-08	79 - 13	2	XA
	ST1508-09	76 - 17	1	PAFZZ
	ST1508-12	77 - 36		PAFZZ
		77 - 37		PAFZZ
		78 - 48	24	PAFZZ
	ST1540-04	3 - 31A		PAOZZ
		5 - 11		PAOZZ
		7 - 13		PAOZZ
		14 - 9		PAOZZ
		14 - 17		PAOZZ
		15 - 12		PAOZZ
		15 - 19		PAOZZ
		21 - 7A		PAOZZ
		21 - 7D		PAOZZ
		21 - 13		PAOZZ
		22 - 1		PAOZZ
		22 - 26		PAOZZ
		24 - 24B		PAOZZ
		28 - 11		PAOZZ
		28 - 27A		PAOZZ
		28 - 44		PAOZZ
		31 - 1		PAOZZ
		31 - 6		PAOZZ
		31 - 12		PAOZZ
		36 - 29		PAOZZ
		36 - 32		PAOZZ
		37 - 2		PAOZZ
		37 - 9		PAOZZ
		37 - 18		PAOZZ
		37 - 36		PAOZZ
		37 - 39		PAOZZ
		37 - 62		PAOZZ
		49 - 9		PAOZZ
		51 - 67		PAOZZ
		67 - 49	42	PAOZZ
	ST1540-05	3 - 39		PAOZZ
		21 - 13		PAOZZ
		22 - 11		PAOZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
		22 - 32		PAOZZ
		44 - 38	6	PAOZZ
	ST1540-06	3 - 11		PAOZZ
+		3 - 14		PAOZZ
		3 - 19		PAOZZ
		3 - 22		PAOZZ
+		3 - 25		PAOZZ
		3 - 50		PAOZZ
+		6 - 5		PAOZZ
		6 - 11		PAOZZ
+		6 - 13		PAOZZ
+		6 - 15		PAOZZ
S		6 - 35		
S		6 - 38		
S		7 - 35		
S		7 - 38		
		15 - 66		PAOZZ
		15 - 68		PAOZZ
		20 - 11		PAOZZ
		20 - 24		PAOZZ
		26 - 5		PAOZZ
		29 - 21		PAOZZ
		29 - 25		PAOZZ
		58 - 80C	21	PAOZZ
+	ST1540-07	3 - 27	1	PAOZZ
+	ST1540-08	3 - 29		PAOZZ
+		11 - 5		PAOZZ
+		11 - 7		PAOZZ
+		11 - 9		PAOZZ
		11 - 17		PAOZZ
		27 - 15	8	PAOZZ
	ST1540-09	5 - 13A	1	PAOZZ
+	ST1540-10	3 - 32		PAOZZ
		6 - 35		PAOZZ
		6 - 38		PAOZZ
+		7 - 35	REF	PAOZZ
+		7 - 38	REF	PAOZZ
		28 - 43		PAOZZ
		29 - 28	6	PAOZZ
	ST1540-12	32 - 18	1	PAOZZ
	ST1540-14	31 - 18	1	PAOZZ
	ST1540-16	47 - 46	1	PAOZZ
	ST1540-20	16 - 1	1	PAOZZ
	ST1569-04	5 - 20		PAOZZ
		5 - 22	2	PAOZZ
PW	ST1588-403	70 - 47		
	ST2000-04	14 - 25		PAOZZ
		15 - 27		PAOZZ
		24 - 5		PAOZZ
		24 - 24L		PAOZZ
		28 - 1		PAOZZ
		41 - 12		PAOZZ
		44 - 1		PAOZZ
		44 - 3		PAOZZ
		45 - 19		PAOZZ
		46 - 3		PAOZZ
		47 - 5		PAOZZ
		48 - 23		PAOZZ
		49 - 2		PAOZZ
		50 - 1		PAOZZ
		50 - 1A		PAOZZ
		58 - 72		PAOZZ
		62 - 28	27	PAOZZ
	ST2000-05	44 - 1		PAOZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
ST2000-05	45 - 21		PAOZZ
	50 - 3		PAOZZ
	50 - 3A		PAOZZ
	51 - 11	11	PAOZZ
ST2000-06	15 - 56		PAOZZ
	24 - 8		PAOZZ
	45 - 6		PAOZZ
	45 - 23		PAOZZ
	48 - 21		PAOZZ
	49 - 4		PAOZZ
	50 - 5		PAOZZ
	51 - 5	14	PAOZZ
ST2000-08	47 - 20		PAOZZ
	50 - 7	3	PAOZZ
ST2006-06	58 - 80H	1	PAOZZ
ST2015-012	3 - 28	1	PAOZZ
ST2015-014	36 - 34	1	PAOZZ
ST2015-016	3 - 7		PAOZZ
	3 - 13		PAOZZ
S	3 - 16		
	3 - 21		PAOZZ
	3 - 26		PAOZZ
	3 - 28		PAOZZ
	3 - 31		PAOZZ
	3 - 34		PAOZZ
	3 - 38		PAOZZ
	3 - 42		PAOZZ
	4 - 3		PAOZZ
	4 - 11		PAOZZ
	5 - 6		PAOZZ
	5 - 13		PAOZZ
	5 - 13B		PAOZZ
	6 - 1		PAOZZ
	6 - 7		PAOZZ
	6 - 10		PAOZZ
	6 - 12		PAOZZ
	6 - 14		PAOZZ
	6 - 20		PAOZZ
	6 - 23		PAOZZ
	6 - 37		PAOZZ
	6 - 39		PAOZZ
	7 - 1		PAOZZ
	7 - 7		PAOZZ
	7 - 12		PAOZZ
	7 - 14		PAOZZ
	7 - 17		PAOZZ
	7 - 24		PAOZZ
	7 - 37	REF	PAOZZ
	7 - 39	REF	PAOZZ
	8 - 1		PAOZZ
	8 - 7		PAOZZ
	8 - 13		PAOZZ
	9 - 6		PAOZZ
	10 - 6		PAOZZ
S	11 - 6		
	11 - 8		PAOZZ
	11 - 18		PAOZZ
	14 - 19		PAOZZ
S	15 - 14		
	15 - 21		PAOZZ
	15 - 70		PAOZZ
S	16 - 2		
	20 - 13		PAOZZ
	21 - 7F		PAOZZ
	21 - 15		PAOZZ
	22 - 3		PAOZZ
	22 - 28		PAOZZ
	24 - 24C		PAOZZ
S	26 - 7		
	27 - 17		PAOZZ
	28 - 27C		PAOZZ
	29 - 22		PAOZZ
	29 - 26		PAOZZ
	30 - 37A		PAOZZ
	31 - 8		PAOZZ
	31 - 14		PAOZZ
	31 - 20		PAOZZ
S	32 - 19		
S	34 - 15		
	34 - 29		PAOZZ
	36 - 31		PAOZZ
	37 - 11		PAOZZ
	37 - 19		PAOZZ
	37 - 40		PAOZZ
	37 - 61		PAOZZ
S	39 - 3		
	41 - 31		PAOZZ
	44 - 39		PAOZZ
	49 - 10		PAOZZ
	51 - 69		PAOZZ
	51 - 75		PAOZZ
	58 - 80B		PAOZZ
	58 - 98D		PAOZZ
	58 - 98E	REF	PAOZZ
	70 - 41		PAOZZ
	74 - 103	113	PAOZZ
ST2015-018	3 - 24		PAFZZ
	6 - 17		PAFZZ
	21 - 7C	REF	PAFZZ
	28 - 16		PAFZZ
	39 - 3		PAFZZ
	62 - 6	122	PAFZZ
ST2015-020	3 - 16		PAOZZ
	3 - 51		PAOZZ
	7 - 4		PAOZZ
	8 - 10		PAOZZ
	9 - 3		PAOZZ
	10 - 3		PAOZZ
	11 - 6		PAOZZ
	14 - 11		PAOZZ
	15 - 14	REF	PAOZZ
	16 - 2		PAOZZ
	17 - 5		PAOZZ
	22 - 13		PAOZZ
	26 - 7	REF	PAOZZ
	28 - 6		PAOZZ
	28 - 42		PAOZZ
	31 - 3		PAOZZ
	31 - 24		PAOZZ
	32 - 19		PAOZZ
	34 - 3		PAOZZ
	34 - 15		PAOZZ
	47 - 48		PAOZZ
	48 - 2		PAOZZ
	51 - 16		PAOZZ
	62 - 43		PAOZZ
	74 - 106		PAOZZ
	74 - 109	255	PAOZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR		PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	ST2015-024	18 - 3		PAOZZ		ST2028-20	32 - 21	1	PAOZZ
		24 - 35		PAOZZ		ST2035-04	32 - 43	1	PAFZZ
		32 - 24		PAOZZ		ST2035-06	30 - 7	1	PAFZZ
		40 - 15		PAOZZ		ST2035-08	15 - 60	1	PAFZZ
		51 - 15		PAOZZ		ST2045-06	58 - 80G	1	XA
		62 - 44	20	PAOZZ		ST2053-022	63 - 99	60	PAFZZ
	ST2015-028	40 - 12		PAOZZ	=	ST2053-028	62 - 7	6	PAFZZ
		48 - 32	6	PAOZZ	=	ST2053-030	62 - 7	6	PAFZZ
	ST2015-040	40 - 11	4	PAOZZ		ST2080-05	51 - 1	1	PAOZZ
	ST2016-010	62 - 17	10	PAOZZ		ST2091-041	41 - 10		PAOZZ
	ST2016-016	24 - 30		PAOZZ			50 - 9	3	PAOZZ
		39 - 15		PAOZZ		ST2091-042	14 - 27		PAOZZ
		39 - 25		PAOZZ			46 - 1		PAOZZ
		44 - 37		PAOZZ			47 - 23		PAOZZ
		67 - 57		PAOZZ			48 - 20	8	PAOZZ
		68 - 3		PAOZZ		ST2091-062	49 - 15	1	PAOZZ
S		70 - 41			=	ST2100-12	89 - 61	1	PAFZZ
		82 - 19	47	PAOZZ		ST2101-051	50 - 1A	1	PAOZZ
	ST2016-020	67 - 76	22	PAOZZ		ST2101-061	13 - 21		PAOZZ
	ST2016-024	49 - 31	4	PAOZZ			30 - 8		PAOZZ
	ST2016-030	39 - 16		PAOZZ			50 - 3A		PAOZZ
		67 - 77	4	PAOZZ			50 - 11	4	PAOZZ
	ST2016-040	67 - 91	13	PAFZZ		ST2101-062	13 - 23		PAOZZ
	ST2017-020	17 - 10		PAOZZ			24 - 3	2	PAOZZ
		49 - 18	9	PAOZZ		ST2108-02	62 - 34	2	PAFZZ
	ST2017-028	5 - 1	4	PAOZZ		ST2108-04	1 - 6		PAOZZ
	ST2018-016	8 - 13A		PAOZZ			1 - 8		PAOZZ
		41 - 15	2	PAOZZ			6 - 33		PAOZZ
	ST2018-020	16 - 12		PAOZZ			20 - 19		PAOZZ
		28 - 31		PAOZZ			20 - 30	21	PAOZZ
		53 - 37		PAOZZ		ST2108-10	39 - 18		PAOZZ
		53 - 55		PAOZZ			67 - 78	4	PAOZZ
		53 - 55A		PAOZZ	PW	ST2113-12	47 - 25		
		53 - 74	18	PAOZZ	PW		58 - 81		
	ST2018-022	74 - 84		PAOZZ	OP	ST2119-09	1 - 5		
		74 - 91		PAOZZ	OP		1 - 7		
		75 - 69		PAOZZ	OP		3 - 1		
		75 - 70		PAOZZ	OP		3 - 6		
		75 - 72		PAOZZ	OP		3 - 12		
		75 - 76	133	PAOZZ	OP		3 - 15		
	ST2018-024	15 - 32	REF	PAOZZ	OP		3 - 18		
		36 - 40	REF	PAOZZ	OP		3 - 20		
		41 - 17		PAOZZ	OP		3 - 23		
		53 - 37		PAOZZ	OP		3 - 30		
		53 - 55A		PAOZZ	OP		3 - 33		
		53 - 74		PAOZZ	OP		3 - 41		
		67 - 107		PAOZZ	OP		3 - 44		
		74 - 85		PAOZZ	OP		4 - 2		
		74 - 92		PAOZZ	OP		4 - 5		
		74 - 94		PAOZZ	OP		4 - 7		
		74 - 96A		PAOZZ	OP		4 - 10		
		75 - 70		PAOZZ	OP		5 - 3		
		75 - 74		PAOZZ	OP		5 - 5		
		75 - 76		PAOZZ	OP		5 - 8		
		75 - 78	65	PAOZZ	OP		5 - 10		
	ST2018-028	24 - 33		PAOZZ	OP		5 - 12		
		63 - 94		PAOZZ	OP		5 - 19		
		67 - 108		PAOZZ	OP		6 - 6		
		67 - 113		PAOZZ	OP		6 - 9		
		67 - 114	76	PAOZZ	OP		6 - 16		
	ST2018-032	49 - 108		PAOZZ	OP		6 - 22		
		67 - 109		PAOZZ	OP		6 - 27		
		67 - 115		PAOZZ	OP		6 - 34		
		74 - 86	16	PAOZZ	OP		6 - 36		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP ST2119-09	7 - 3			OP	22 - 10B		
OP	7 - 6			OP	22 - 12		
OP	7 - 9			OP	22 - 15		
OP	7 - 9B			OP	22 - 27		
OP	7 - 11			OP	22 - 33		
OP	7 - 16			OP	23 - 1		
OP	7 - 21			OP	24 - 34		
OP	7 - 23			OP	26 - 6		
OP	7 - 26			OP	27 - 1		
OP	7 - 36			OP	27 - 10		
OP	8 - 6			OP	27 - 14		
OP	8 - 9			OP	27 - 16		
OP	8 - 12			OP	27 - 19		
OP	9 - 2			OP	27 - 24		
OP	9 - 5			OP	28 - 5		
OP	10 - 2			OP	28 - 12		
OP	10 - 5			OP	28 - 15		
OP	11 - 10			OP	28 - 18		
OP	11 - 13			OP	28 - 21		
OP	11 - 15			OP	28 - 26		
OP	11 - 20			OP	28 - 27B		
OP	13 - 2			OP	28 - 41		
OP	13 - 5			OP	29 - 2		
OP	13 - 31			OP	29 - 11		
OP	13 - 33			OP	29 - 13		
OP	14 - 2			OP	29 - 15		
OP	14 - 6			OP	29 - 23		
OP	14 - 10			OP	30 - 10		
OP	14 - 13			OP	30 - 12		
OP	14 - 18			OP	30 - 17		
OP	15 - 2			OP	30 - 24		
OP	15 - 8			OP	30 - 42		
OP	15 - 13			OP	31 - 2		
OP	15 - 15			OP	31 - 5		
OP	15 - 20			OP	31 - 7		
OP	15 - 30			OP	31 - 13		
OP	15 - 44			OP	31 - 19		
OP	15 - 50			OP	31 - 22		
OP	15 - 53			OP	32 - 10		
OP	15 - 61			OP	32 - 13		
OP	15 - 67			OP	32 - 40		
OP	15 - 69			OP	34 - 2		
OP	16 - 3			OP	34 - 14		
OP	17 - 4			OP	34 - 28		
OP	18 - 11			OP	34 - 62		
OP	19 - 1			OP	36 - 1		
OP	20 - 2			OP	36 - 6		
OP	20 - 4			OP	36 - 12		
OP	20 - 7			OP	36 - 17		
OP	20 - 9			OP	36 - 19		
OP	20 - 12			OP	36 - 30		
OP	20 - 17			OP	36 - 33		
OP	20 - 18			OP	36 - 38		
OP	20 - 20			OP	37 - 1		
OP	20 - 25			OP	37 - 7		
OP	20 - 29			OP	37 - 10		
OP	21 - 1			OP	37 - 13		
OP	21 - 6			OP	37 - 27		
OP	21 - 7B			OP	37 - 32		
OP	21 - 7E			OP	37 - 37		
OP	21 - 14			OP	37 - 50		
OP	22 - 2			OP	37 - 59		
OP	22 - 8			OP	37 - 60		
OP	22 - 10			OP	40 - 2		

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP	ST2119-09	40 - 9		
OP		40 - 17		
OP		41 - 30		
OP		42 - 10		
OP		43 - 9		
OP		44 - 42		
OP		44 - 45		
OP		46 - 7		
OP		47 - 47		
OP		48 - 1		
OP		48 - 25		
OP		48 - 31		
OP		48 - 34		
OP		49 - 24		
OP		51 - 13		
OP		51 - 68		
OP		51 - 74		
OP		55 - 2		
PW		55 - 6		
OP		55 - 15		
OP		55 - 41		
OP		58 - 80A		
OP		58 - 98C		
OP		62 - 19		
OP		62 - 30		
OP		62 - 42		
OP		63 - 20		
OP		63 - 97		
OP		67 - 24		
OP		67 - 31		
OP		67 - 42		
OP		67 - 48		
OP		71 - 1		
OP		71 - 23		
OP		73 - 26		
OP		73 - 71		
OP		73 - 82		
OP		74 - 102		
OP		74 - 105		
OP		74 - 108		
OP		77 - 42		
OP		78 - 66		
OP		79 - 8		
OP		79 - 10		
OP		79 - 16		
OP		82 - 17		
OP		100 - 8		
	ST2121-04	14 - 22		PAFZZ
		15 - 26		PAFZZ
		24 - 24F		PAFZZ
		31 - 11		PAFZZ
		37 - 22		PAFZZ
		37 - 25		PAFZZ
		58 - 80E	8	PAFZZ
	ST2121-06	37 - 43	1	XA
=	ST2121-12	89 - 61	1	PAFZZ
	ST2129-06	45 - 1	1	PAOZZ
	ST2130-10	58 - 12	1	PAOZZ
	ST2135-038	67 - 7	2	PAOZZ
	ST2137-01	70 - 54	6	PAFZZ
	ST2137-02	74 - 68		PAFBZ
		75 - 40		PAFBZ
S		75 - 46	5	
	ST2137-03	75 - 46	2	PAFBZ
	ST2137-04	66 - 15		PAFBZ
		74 - 55		PAFBZ
		74 - 70		PAFBZ
S		75 - 40	20	
	ST2137-05	74 - 13		PAFBZ
		74 - 51	20	PAFBZ
	ST2137-07	74 - 41	3	PAFBZ
	ST2138-01	74 - 30		PAFBZ
		74 - 36		PAFBZ
		74 - 45		PAFBZ
		74 - 59		PAFBZ
		74 - 64		PAFBZ
S		75 - 4		
		75 - 8		PAFBZ
		75 - 42		PAFBZ
S		75 - 48	35	
	ST2138-02	74 - 31		PAFBZ
		75 - 4		PAFBZ
		75 - 21		PAFBZ
		75 - 26		PAFBZ
		75 - 30	22	PAFBZ
	ST2138-03	66 - 11		PAFBZ
		74 - 46		PAFBZ
S		74 - 64		
S		75 - 21		
S		75 - 30		
		75 - 34		PAFBZ
S		75 - 35		
		75 - 39	15	PAFBZ
	ST2138-04	74 - 63		PAFBZ
		75 - 35	2	PAFBZ
S	ST2138-05	74 - 45		
S		74 - 46		
S		74 - 63		
	ST2138-06	74 - 66		PAFBZ
		74 - 72		PAFBZ
		75 - 44		PAFBZ
		75 - 48	41	PAFBZ
S	ST2139-05	70 - 2		
PW		70 - 11		
S		70 - 17		
S		70 - 26		
PW	ST2139-06	69 - 4		
PW	ST2140-08	66 - 3		
PW	ST2141-04	70 - 12		
PW	ST2141-05	70 - 12		
PW	ST2141-06	75 - 12		
PW		75 - 16		
PW	ST2141-08	70 - 27		
PW	ST2143-08	69 - 5		
	ST2150-020	18 - 2		PAOZZ
		28 - 9		PAOZZ
		31 - 29	8	PAOZZ
	ST2150-022	34 - 11	7	PAOZZ
	ST2151-010	80 - 22	3	PAFZZ
	ST2151-012	48 - 19		PAOZZ
		55 - 26		PAOZZ
		89 - 38		PAOZZ
		89 - 40	10	PAOZZ
	ST2151-020	41 - 2		PAFZZ
S		87 - 2		
		89 - 35		PAFZZ
		103 - 3	12	PAFZZ
	ST2154-096	51 - 19	4	PAOZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	ST2155-012	42 - 45	2	PAFZZ
	ST2155-016	42 - 47		PAFZZ
		77 - 13		PAFZZ
		78 - 14	10	PAFZZ
	ST2159-10	24 - 12		PAOZZ
		47 - 3		PAOZZ
		47 - 18	13	PAOZZ
S	ST2163-10	77 - 25		
S		78 - 1		
	ST2164-020	73 - 44A		PAFZZ
		73 - 63A	118	PAFZZ
S	ST2169-01	3 - 36		
S		4 - 12		
S		11 - 2		
	ST2169-02	53 - 1		PAFZZ
		53 - 25		PAFZZ
		53 - 45		PAFZZ
		53 - 46		PAFZZ
		53 - 64		PAFZZ
		53 - 65		PAFZZ
		53 - 67	35	PAFZZ
	ST2178-06	67 - 25		PAFZZ
		67 - 44		PAFZZ
		87 - 3	8	PAFZZ
	ST2178-08	75 - 81	3	PAFZZ
	ST2178-10	86 - 8	4	PAFZZ
	ST2180-12	103 - 8J	4	PADZZ
	ST2182-12	103 - 8H	8	PADZZ
PW	ST2185-05	75 - 11		
PW		75 - 15		
PW	ST2185-06	77 - 50		
PW		78 - 52		
PW		78 - 65		
PW		78 - 73		
	ST2213-02	70 - 53		PAFZZ
S		71 - 41	4	
	ST2235-028	17 - 3	4	PAOZZ
	ST2235-032	63 - 63	30	PAOZZ
	ST2251-082	15 - 73	1	PAOZZ
	ST2252-02	73 - 59	4	PAFZZ
PW	ST2273-03	39 - 14		
PW		73 - 6		
PW	ST2276-012	32 - 1		
PW	ST2276-018	67 - 72		
PW		77 - 54		
PW		78 - 51		
PW		78 - 64		
PW		78 - 72		
PW		95 - 8		
PW		95 - 36		
PW		95 - 60		
PW		96 - 6		
PW		96 - 30		
PW		96 - 51		
PW	ST2277-018	67 - 72		
PW		77 - 54		
PW		78 - 51		
PW		78 - 64		
PW		78 - 72		
PW		95 - 8		
PW		95 - 36		
PW		95 - 60		
PW		96 - 6		
PW		96 - 30		

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
PW		96 - 51		
	ST2283-006	71 - 5	1	PAFZZ
	ST2283-011	55 - 19	1	PAOZZ
	ST2283-016	72 - 10	3	PAFZZ
	ST2283-122	55 - 23	1	PAOZZ
	ST2283-205	55 - 24	1	PAOZZ
	ST2284-04	89 - 22	1	PAOZZ
	ST2284-06	37 - 53		PAOZZ
		55 - 20	2	PAOZZ
	ST2284-07	55 - 32		PAOZZ
S		89 - 63	1	
	ST2284-09	32 - 8	1	PAOZZ
	ST2284-12	89 - 49	1	PAOZZ
	ST2284-14	89 - 68	1	PAOZZ
	ST2284-16	47 - 8	2	PAFZZ
	ST2286-07	89 - 63	1	PAOZZ
PW	ST2299-32	34 - 16		
	ST2311-36	79 - 35	24	PAFZZ
PW	ST2343-12	85 - 14		
PW	ST2343-13	85 - 12		
PW	ST2343-14	85 - 16		
S	ST2345-22	95 - 5		
S		96 - 3		
	ST2348-06	34 - 12		PAFZZ
		88 - 37		PAFZZ
		89 - 33	25	PAFZZ
S	ST2399-04	7 - 22		
S	ST2399-06	3 - 5		
S		3 - 17		
S		4 - 1		
S		7 - 10		
S		7 - 25		
	ST2439-04	3 - 31A		PAOZZ
		5 - 11		PAOZZ
		7 - 13		PAOZZ
		14 - 9		PAOZZ
		15 - 12		PAOZZ
		21 - 13		PAOZZ
		22 - 1		PAOZZ
		24 - 24B		PAOZZ
		28 - 11		PAOZZ
		28 - 14		PAOZZ
		31 - 1		PAOZZ
		36 - 29		PAOZZ
		37 - 2		PAOZZ
		37 - 8		PAOZZ
		37 - 9		PAOZZ
		37 - 18		PAOZZ
		37 - 36		PAOZZ
		37 - 39		PAOZZ
		49 - 9		PAOZZ
		51 - 67		PAOZZ
		67 - 49	30	PAOZZ
	ST2439-05	3 - 39		PAOZZ
		22 - 11		PAOZZ
		22 - 32		PAOZZ
		44 - 38	4	PAOZZ
+	ST2439-06	3 - 14		PAOZZ
		3 - 19		PAOZZ
		3 - 22		PAOZZ
+		3 - 25		PAOZZ
		6 - 11		PAOZZ
+		6 - 13		PAOZZ
		15 - 66		PAOZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	ST2439-06	26 - 5		PAOZZ
		29 - 21	11	PAOZZ
+	ST2439-07	3 - 27	1	PAOZZ
+	ST2439-08	3 - 29		PAOZZ
+		11 - 5		PAOZZ
+		11 - 7		PAOZZ
+		11 - 9		PAOZZ
		11 - 17		PAOZZ
		27 - 15	8	PAOZZ
+	ST2439-10	3 - 32	1	PAOZZ
	ST2439-12	32 - 18	1	PAOZZ
	ST2439-14	31 - 18	1	PAOZZ
	ST2439-20	16 - 1	1	PAOZZ
S	ST2441-09	5 - 7		
S		5 - 9		
S		6 - 8		
S	ST2441-11	4 - 6		
S		5 - 4		
S	ST2441-18	7 - 5		
S		8 - 11		
S		9 - 4		
S		10 - 4		
S	ST2441-20	3 - 40		
S		7 - 2		
S		8 - 8		
S		9 - 1		
S		10 - 1		
S	ST2442-0404	8 - 5		
S	ST2442-0410	4 - 4		
S		5 - 2		
S	ST2442-0506	6 - 21		
S		7 - 15		
	ST2468-014	62 - 2	5	PAOZZ
PW	ST2484-03	53 - 77		
PW		53 - 82		
PW	ST2484-08	98 - 2		
PW	ST2485-09	53 - 76		
PW		53 - 81		
PW		98 - 3		
PW	ST2494-05	66 - 4		
	ST2520-09	16 - 4	3	PAFZZ
	ST2563-10	86 - 8	4	PAFZZ
=	ST2586-08	79 - 14	2	PAFZZ
	ST2590-10	86 - 19C		PAFZZ
		89 - 5	59	PAFZZ
	ST2596-04	86 - 13	16	PAFZZ
	ST2601-05	76 - 15	1	PAFZZ
	ST2601-08	80 - 7		PAFZZ
		80 - 15	6	PAFZZ
	ST2601-12	84 - 7	58	PAFZZ
	ST2601-14	79 - 21		PAFZZ
		85 - 1	70	PAFZZ
	ST2601-22	95 - 5		PAFZZ
		96 - 3		PAFZZ
		96 - 3	68	
	ST2604-08	77 - 24		PAFZZ
		78 - 44	40	PAFZZ
	ST2605-05	84 - 6	36	PAFZZ
	ST2605-06	76 - 19		PAFZZ
		78 - 34	12	PAFZZ
	ST2605-07	76 - 24		PAFZZ
		76 - 25		PAFZZ
		89 - 64	19	PAFZZ
	ST2605-09	76 - 25		PAFZZ
		76 - 28	12	PAFZZ
	ST2606-04	95 - 2		PAFZZ
		95 - 4		PAFZZ
		96 - 2		PAFZZ
		96 - 2	22	
	ST2606-05	76 - 18		PAFZZ
S		95 - 2		
S		95 - 4		
S		96 - 2	1	
PW	ST2609-01	70 - 50		
PW		97 - 8		
PW	ST2609-02	70 - 46		
PW		94 - 2		
PW		97 - 9		
PW	ST2609-06	70 - 48		
PW	ST2618-404	70 - 56		
	ST2635-016	55 - 16		PAFZZ
		55 - 18		PAFZZ
		55 - 22		PAFZZ
		71 - 4	9	PAFZZ
	ST2654-12	78 - 59		PAFZZ
		89 - 23	16	PAFZZ
PW	ST2665-08	68 - 23		
PW		74 - 74		
S		74 - 75		
S		74 - 76		
S		75 - 50		
PW		75 - 50A		
PW		75 - 51		
S		75 - 65		
PW		94 - 8A		
PW		94 - 9		
PW	ST2665-10	13 - 7		
PW		15 - 4		
PW		15 - 64		
PW		21 - 4		
PW		28 - 23		
PW		29 - 17		
PW		30 - 14		
PW		36 - 8		
PW		68 - 24		
PW		74 - 75		
PW		74 - 76		
PW		74 - 78		
PW		75 - 50		
PW		75 - 52		
PW		75 - 52A		
PW		75 - 53		
PW		75 - 54		
PW		75 - 65		
PW	ST2665-12	27 - 21		
PW		28 - 23		
PW		29 - 17		
PW		30 - 14		
PW		37 - 29		
PW		74 - 77		
S		75 - 52		
S		75 - 53		
S		75 - 54		
PW		75 - 55		
PW		75 - 56		
PW	ST2665-16	75 - 63		
PW		94 - 8		
PW	ST2665-18	68 - 22		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
PW ST2665-18	70 - 51		
PW	74 - 79		
PW	75 - 57		
PW	75 - 57A		
PW	75 - 59		
PW	75 - 64		
PW ST2665-20	74 - 80		
PW	75 - 58		
PW	75 - 58A		
S	75 - 64		
PW ST2665-24	75 - 60		
PW	75 - 62		
PW ST2665-26	75 - 61		
S	75 - 62		
ST2737-09	71 - 34	16	PAFZZ
ST2745-10	85 - 4		PAFZZ
	95 - 6		PAFZZ
	96 - 4		PAFZZ
	96 - 4	138	
PW ST2766-604	100 - 1		
ST2785-10	53 - 27A		PAOZZ
	79 - 9B	40	PAOZZ
ST2785-11	89 - 73	75	PAFZZ
ST2786-01	68 - 32		PAFZZ
	70 - 50		PAFZZ
	97 - 8	47	PAFZZ
ST2786-02	70 - 46		PAFZZ
	94 - 2		PAFZZ
	97 - 9	64	PAFZZ
ST2786-06	70 - 48	1	PAFZZ
PW ST2816-04	7 - 20		
PW	7 - 22		
PW	58 - 98B		
PW ST2816-06	3 - 5		
PW	3 - 17		
PW	4 - 1		
PW	6 - 8		
PW	7 - 10		
PW	7 - 25		
PW ST2817-09	5 - 7		
PW	5 - 9		
PW	6 - 8		
PW ST2817-11	4 - 6		
PW	5 - 4		
PW ST2817-18	7 - 5		
PW	8 - 11		
PW	9 - 4		
PW	10 - 4		
PW ST2817-20	3 - 40		
PW	7 - 2		
PW	8 - 8		
PW	9 - 1		
PW	10 - 1		
PW ST2818-0404	8 - 5		
PW ST2818-0410	4 - 4		
PW	5 - 2		
PW ST2818-0506	6 - 21		
PW	7 - 15		
PW ST2822-03	70 - 3		
PW	70 - 18		
PW ST2822-04	70 - 12		
PW ST2822-08	70 - 27		
S ST2851-32	34 - 13		
ST2981-04	15 - 47		XA

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
	24 - 24G		XA
	31 - 16	5	XA
PW ST2994-32	34 - 13		
ST5001-12	82 - 9		PAFZZ
	82 - 31	33	PAFZZ
= ST5030-09	6 - 25		PAFZZ
=	11 - 21		PAFZZ
=	18 - 9		PAFZZ
=	32 - 33		PAFZZ
=	40 - 18		PAFZZ
=	40 - 21		PAFZZ
=	40 - 24		PAFZZ
=	40 - 27		PAFZZ
=	47 - 28		PAFZZ
	67 - 120		PAFZZ
=	70 - 61		PAFZZ
=	94 - 16	23	PAFZZ
T791838-1	F 114 - 2	1	
T791838-10	114 - 3	1	
T791838-20	114 - 4	1	
T791838-30	114 - 5	1	
T791838-40	114 - 6	1	
T791867-1	114 - 2	1	
T791873	1 - 24		
	114 -	REF	
		1	
OP TA025093-08	79 - 14		
S TA025209	79 - 27B		
S	79 - 28B		
TA025217	79 - 27B		PAFZZ
	79 - 28B	2	PAFZZ
TA0950022	79 - 28D	2	PAFZZ
TA10300016-09	5 - 7		PAOZZ
	5 - 9		PAOZZ
	6 - 8		PAOZZ
S	6 - 8	6	
TA10300016-11	4 - 6		PAOZZ
	5 - 4	2	PAOZZ
TA10300016-18	7 - 5		PAOZZ
	8 - 11		PAOZZ
	9 - 4		PAOZZ
	10 - 4	4	PAOZZ
TA10300016-20	3 - 40		PAOZZ
	7 - 2		PAOZZ
	8 - 8		PAOZZ
	9 - 1		PAOZZ
	10 - 1	5	PAOZZ
TA107000010-04	7 - 20		PAOZZ
	7 - 22		PAOZZ
	58 - 98B	4	PAOZZ
TA107000010-06	3 - 5		PAOZZ
	3 - 17		PAOZZ
	4 - 1		PAOZZ
	6 - 8		PAOZZ
	7 - 10		PAOZZ
	7 - 25	9	PAOZZ
TA14300004-0404	8 - 5	1	PAOZZ
TA14300004-0410	4 - 4		PAOZZ
	5 - 2	2	PAOZZ
TA14300004-0506	6 - 21		PAOZZ
	7 - 15	4	PAOZZ
TA30700070	8 - 13B	1	PAOBZ
TA330-25-10-R	108 - 107		PAFZZ
	108A -31		PAFZZ

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
TA330-25-10-R	109 - 61		PAFZZ
	110 - 36		PAFZZ
	111 - 5		PAFZZ
	111A -5		PAFZZ
	112 - 5		PAFZZ
	113 - 29	8	PAFZZ
TA346-P50844	108 - 105		PAFZZ
	108A -36		PAFZZ
	109 - 59		PAFZZ
	110 - 34		PAFZZ
	111 - 1		PAFZZ
	111A -1		PAFZZ
	112 - 2		PAFZZ
	113 - 26	8	PAFZZ
TA446-P47412	108 - 1		PAFZZ
	108A -30		PAFZZ
	109 - 1		PAFZZ
	110 - 1		PAFZZ
	111 - 2		PAFZZ
	111A -2		PAFZZ
	112 - 1		PAFZZ
	113 - 27	16	PAFZZ
TR26036N-1032SBVX	68 - 32		
	70 - 50		
	97 - 8		
	70 - 50		PAFZZ
	97 - 8	22	PAFZZ
TR26036N-1216SBVX	70 - 48		
	70 - 48	1	PAFZZ
TR26036N-428SBVX	70 - 46		
	94 - 2		
	97 - 9		
	70 - 46		PAFZZ
	94 - 2		PAFZZ
	97 - 9	64	PAFZZ
TR28009-10	13 - 7		PAFZZ
	15 - 4		PAFZZ
	15 - 64		PAFZZ
	21 - 4		PAFZZ
	28 - 23		PAFZZ
	29 - 17		PAFZZ
	30 - 14		PAFZZ
	36 - 8	REF	PAFZZ
	68 - 24		PAFZZ
	74 - 75		PAFZZ
	74 - 76		PAFZZ
	75 - 50		PAFZZ
	75 - 52		PAFZZ
	75 - 52A		PAFZZ
	75 - 53		PAFZZ
	75 - 54		PAFZZ
	75 - 65	32	PAFZZ
TR28009-12	27 - 21		PAFZZ
	28 - 23		PAFZZ
	29 - 17		PAFZZ
	30 - 14		PAFZZ
	37 - 29		PAFZZ
	74 - 77		PAFZZ
	74 - 78		PAFZZ
	75 - 55		PAFZZ
	75 - 56	15	PAFZZ
TR28009-16	75 - 63		PAFZZ
	94 - 8	5	PAFZZ
TR28009-18	68 - 22		PAFZZ

	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
		70 - 51		PAFZZ
		74 - 79		PAFZZ
		75 - 57		PAFZZ
		75 - 57A		PAFZZ
		75 - 59		PAFZZ
		75 - 64	28	PAFZZ
	TR28009-20	74 - 80		PAFZZ
		75 - 58		PAFZZ
		75 - 58A	8	PAFZZ
	TR28009-24	75 - 60		PAFZZ
		75 - 62	4	PAFZZ
	TR28009-26	75 - 61	2	PAFZZ
	TR28009-8	68 - 23		PAFZZ
		74 - 74		PAFZZ
		75 - 50A		PAFZZ
		75 - 51		PAFZZ
		94 - 8A		PAFZZ
		94 - 9	45	PAFZZ
OP	TYZ27M	3 - 45		
	U535845	43 - 15	1	PAFZZ
	U535846	43 - 16	1	PAFZZ
	U536058	43 - 17	1	PAFZZ
	U539833	43 - 14	1	PAODD
	UA539800-2	43 - 12		
	#	43 - 13	1	PAODD
OP	VC82-2682	42 - 23		
OP	VC82-2683	42 - 26		
OP	VN1320DF02	44 - 25		
OP		63 - 50		
OP		77 - 7		
OP		77 - 30		
OP		78 - 4		
OP		78 - 20		
OP		78 - 27		
OP		78 - 42		
OP	VN1320DF048	44 - 16		
OP		77 - 2		
OP		78 - 11		
OP		78 - 31		
OP	VN4710WD02	53 - 2		
OP		53 - 27		
OP		53 - 34		
OP		53 - 43		
OP		53 - 47		
OP		53 - 52		
OP		53 - 62		
OP		53 - 68		
OP		53 - 71		
OP	VN4718DF02	1 - 5		
OP		1 - 7		
OP		3 - 1		
OP		3 - 6		
OP		3 - 12		
OP		3 - 15		
OP		3 - 18		
OP		3 - 20		
OP		3 - 23		
OP		3 - 30		
OP		3 - 33		
OP		3 - 41		
OP		3 - 44		
OP		4 - 2		
OP		4 - 5		
OP		4 - 7		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR	PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP VN4718DF02	4 - 10			OP	20 - 12		
OP	5 - 3			OP	20 - 17		
OP	5 - 5			OP	20 - 18		
OP	5 - 8			OP	20 - 20		
OP	5 - 10			OP	20 - 25		
OP	5 - 12			OP	20 - 29		
OP	5 - 19			OP	21 - 1		
OP	6 - 6			OP	21 - 6		
OP	6 - 9			OP	21 - 7B		
OP	6 - 16			OP	21 - 7E		
OP	6 - 22			OP	21 - 14		
OP	6 - 27			OP	22 - 2		
OP	6 - 34			OP	22 - 8		
OP	6 - 36			OP	22 - 10		
OP	7 - 3			OP	22 - 10B		
OP	7 - 6			OP	22 - 12		
OP	7 - 9			OP	22 - 15		
OP	7 - 9B			OP	22 - 27		
OP	7 - 11			OP	22 - 33		
OP	7 - 16			OP	23 - 1		
OP	7 - 21			OP	24 - 34		
OP	7 - 23			OP	26 - 6		
OP	7 - 26			OP	27 - 1		
OP	7 - 36			OP	27 - 10		
OP	8 - 6			OP	27 - 14		
OP	8 - 9			OP	27 - 16		
OP	8 - 12			OP	27 - 19		
OP	9 - 2			OP	27 - 24		
OP	9 - 5			OP	28 - 5		
OP	10 - 2			OP	28 - 12		
OP	10 - 5			OP	28 - 15		
OP	11 - 10			OP	28 - 18		
OP	11 - 13			OP	28 - 21		
OP	11 - 15			OP	28 - 26		
OP	11 - 20			OP	28 - 27B		
OP	13 - 2			OP	28 - 41		
OP	13 - 5			OP	29 - 2		
OP	13 - 31			OP	29 - 11		
OP	13 - 33			OP	29 - 13		
OP	14 - 2			OP	29 - 15		
OP	14 - 6			OP	29 - 23		
OP	14 - 10			OP	30 - 10		
OP	14 - 13			OP	30 - 12		
OP	14 - 18			OP	30 - 17		
OP	15 - 2			OP	30 - 24		
OP	15 - 8			OP	30 - 42		
OP	15 - 13			OP	31 - 2		
OP	15 - 15			OP	31 - 5		
OP	15 - 20			OP	31 - 7		
OP	15 - 30			OP	31 - 13		
OP	15 - 44			OP	31 - 19		
OP	15 - 50			OP	31 - 22		
OP	15 - 53			OP	32 - 10		
OP	15 - 61			OP	32 - 13		
OP	15 - 67			OP	32 - 40		
OP	15 - 69			OP	34 - 2		
OP	16 - 3			OP	34 - 14		
OP	17 - 4			OP	34 - 28		
OP	18 - 11			OP	34 - 62		
OP	19 - 1			OP	36 - 1		
OP	20 - 2			OP	36 - 6		
OP	20 - 4			OP	36 - 12		
OP	20 - 7			OP	36 - 17		
OP	20 - 9			OP	36 - 19		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP VN4718DF02	36 - 30		
OP	36 - 33		
OP	36 - 38		
OP	37 - 1		
OP	37 - 7		
OP	37 - 10		
OP	37 - 13		
OP	37 - 27		
OP	37 - 32		
OP	37 - 37		
OP	37 - 50		
OP	37 - 59		
OP	37 - 60		
OP	40 - 2		
OP	40 - 9		
OP	40 - 17		
OP	41 - 30		
OP	42 - 10		
OP	43 - 9		
OP	44 - 42		
OP	44 - 45		
OP	46 - 7		
OP	47 - 47		
OP	48 - 1		
OP	48 - 25		
OP	48 - 31		
OP	48 - 34		
OP	49 - 24		
OP	51 - 13		
OP	51 - 68		
OP	51 - 74		
OP	55 - 2		
OP	55 - 15		
OP	55 - 41		
OP	58 - 80A		
OP	58 - 98C		
OP	62 - 19		
OP	62 - 30		
OP	62 - 42		
OP	63 - 20		
OP	63 - 97		
OP	67 - 24		
OP	67 - 31		
OP	67 - 42		
OP	67 - 48		
OP	71 - 1		
OP	71 - 23		
OP	73 - 26		
OP	73 - 71		
OP	73 - 82		
OP	74 - 102		
OP	74 - 105		
OP	74 - 108		
OP	77 - 42		
OP	78 - 66		
OP	79 - 8		
OP	79 - 10		
OP	79 - 16		
OP	82 - 17		
OP	100 - 8		
OP VN4718DF048	15 - 31		
OP	20 - 37		
OP	24 - 32		
OP	26 - 2		
OP	27 - 6		
OP	28 - 30		
OP	32 - 20		
OP	32 - 27		
OP	35 - 17		
OP	36 - 39		
OP	40 - 31		
OP	42 - 1		
OP	43 - 6		
OP	43 - 12		
OP	44 - 11		
OP	44 - 22		
OP	44 - 44		
OP	45 - 8		
OP	45 - 15		
OP	45 - 28		
OP	47 - 32		
OP	49 - 29		
OP	49 - 101		
OP	50 - 22		
OP	50 - 54		
OP	51 - 76		
OP	52 - 2		
OP	53 - 41		
OP	53 - 59		
OP	53 - 61		
OP	53 - 89		
OP	53 - 91		
OP	56 - 1		
OP	56 - 10		
OP	56 - 17		
OP	56 - 24		
OP	57 - 8		
OP	57 - 14		
OP	58 - 2		
OP	58 - 17		
OP	58 - 23		
OP	58 - 32		
OP	58 - 88		
OP	60 - 15		
OP	60 - 35		
OP	63 - 55		
OP	63 - 82		
OP	63 - 93		
OP	63 - 116		
OP	67 - 29		
OP	67 - 105		
OP	71 - 45		
OP	74 - 83		
OP	75 - 68		
OP VN4718DF054	17 - 1		
OP	63 - 62		
OP	63 - 79		
OP VN4734WAXD2	89 - 3		
OP	89 - 10		
OP VN4734WAXD54	86 - 7		
OP VN4738WP054	86 - 7		
OP VN4758WP048	85 - 4		
OP	95 - 6		
OP	96 - 4		
OP VN4761BB048	53 - 27A		
OP	79 - 9B		
OP VN4761BB054	89 - 73		
OP VN4762WAX048	86 - 19C		

PART NUMBER	FIGURE & INDEX NUMBER	QTY PER END ITEM	SMR
OP VN4762WAX048	89 - 5		
OP VN4803WA048	98 - 5		
OP VN4805DF02	67 - 88		
OP VN4815DF048	53 - 38		
OP	53 - 56		
OP	53 - 86		
OP VN4817BA02-3	102 - 14		
OP VN4828BB02	63 - 134		
OP VN4829WNP048	98 - 5		
OP VN4837WAX02	103 - 30		
OP VRB13156-9616LH	67 - 61		
OP VRB13159-6216	67 - 62		
OP VRB13161-5616	39 - 37		
OP VS3486-014	80 - 2		
OP	80 - 12		
OP	80 - 19		
OP VS3488	77 - 51		
OP	78 - 53		
OP	95 - 11		
OP	95 - 39		
OP	96 - 8		
OP	96 - 32		
OP VS3489	95 - 62		
OP VSF1015N12B	89 - 49		
OP VSF1015N14B	89 - 68		
OP VSF1015N16B	47 - 8		
OP VSF1015N4B	89 - 22		
OP VSF1015N6B	37 - 53		
OP	55 - 20		
OP VSF1015N7B	55 - 32		
OP VSF1015N9B	32 - 8		
VSF1393-N-9B	55 - 39	1	XA
OP W991-40DE	57 - 1		
OP W9LL9120/6-3	103 - 30		
OP WLLH11618-5	86 - 7		
OP WSLAF11420-3	71 - 27		
OP	71 - 43		
OP	71 - 44F		
OP WSLAF11420-4	88 - 2		
OP	88 - 6		
OP WSLH10863-3-1	89 - 3		
OP	89 - 10		
OP WSLH10863-5-1	86 - 7		
X218-4	89 - 13	1	PAFZZ
OP Z3943-40	3 - 36		
OP	4 - 12		
OP	11 - 2		

SECTION IV
ALPHABETICAL INDEX

CONTENTS	FIGURE AND INDEX NUMBER

SECTION V
TIME REPLACEMENT SCHEDULE

Power Plant (System 23000) [All items not annotated with a restriction are authorized a 10% overfly (20% in combat contingencies, except those items identified with an asterisk (*) next to the paragraph letter) except items controlled by TAC which shall not be extended beyond their limits.] The source of all vendor part numbers listed in this section is the part number block located on the component data plate. The source of the part number for component items identified with an ampersand (&) to the right of the CII is the combination of the data from the part number block plus a dash and the data from the parts list issue block (the suffix). The basic vendor part number is listed without a suffix unless a suffix is needed to segregate a particular life limit. This section is arranged in alphabetical order.

		ITEM	CII	WUC	PART NUMBER	LIMIT
1.	A.*	ACTUATOR-BALL SCREW, PRIMARY, CONVERGENT NOZZLE	PF10071&	23FAN	441615 (F-15) 442021 (F-15) 441615 (F-16) 442021 (F-16)	3,000 MOH 3,000 MOH 2,000 MOH 2,000 MOH
	B.*	ACTUATOR-BALL SCREW, SECONDARY, CONVERGENT NOZZLE	PF10072&	23FAP	441614 (F-15) 442020 (F-15) 441614 (F-16) 442020 (F-16)	3,000 MOH 3,000 MOH 2,000 MOH 2,000 MOH
2.	A.	BEARING OPTION-NO. 1	PF1003B	23AAE	4035597	4,500 MOH
	B.	BEARING OPTION-NO. 2	PF1004N	23BBD	4075349 4081024	4,500 MOH 4,500 MOH
	C.	BEARING OPTION-NO. 3	PF1004P	23BEC	4075314	4,500 MOH
	D.	BEARING OPTION-NO. 4	PF1004Q	23BLK	4059349	4,500 MOH
	E.	BEARING OPTION-NO. 5	PF10064	23CCD	4067896	4,500 MOH
3.	A.	CONTROL-ENGINE, DIGITAL ELECTRONIC	LF10013	23HFO	796521H06D05 796521H07D06 796521H08D07	9,999 MOH 9,999 MOH 9,999 MOH
	B.*	CONTROL-EXHAUST NOZZLE, CONVERGENT	LF100AD&	23PAB	441612 441944	2,000 MOH 2,000 MOH
	C.	CONTROL AND CYLINDER-VARIABLE VANE COMPRESSOR INLET	PF1003D&	23AAW	441435	4,000 MOH
	D.	CONTROLLER-FUEL PUMP, AUGMENTOR	LF100AE&	23HGO	441441	4,000 MOH
	E.	COOLER-OIL, FUEL	LF10017	23JAC	45731-1341 UA539800-2	3,000 MOH 3,000 MOH
	F.	CYLINDER-ACTUATING, LINEAR COMPRESSOR BLEED	LF10018&	23QA7	441481	5,000 MOH
	G.	CYLINDER-ACTUATING, LINEAR, VARIABLE VANE, COMPRESSOR INLET	PF1003E&	23AAQ	441436	4,000 MOH
	H.	CYLINDER-ACTUATING, LINEAR, VARIABLE VANE, REAR COMPRESSOR	LF100AF&	23QA5	441293 441720	4,000 MOH 4,000 MOH
4.	A.	DETECTOR-LIGHT OFF, AUGMENTOR	LF1001W&	23HJO	910094	9,999 MOH
	B.	DIAGNOSTIC UNIT-ENGINE	LF1001Z	23KCO	789940H04D06 789940H05D07 789940H06D08	9,999 MOH 9,999 MOH 9,999 MOH
	C.	DUCT-FAN, FRONT, ASSY OF	LF1001A	23QCB	4075426 4079771	8,600 MOH 8,600 MOH
	D.	DUCT-FAN, REAR, ASSY OF	LF1001B	23QCA	4069402 4079768	8,600 MOH 8,600 MOH

		ITEM	CII	WUC	PART NUMBER	LIMIT
5.	A.	EXCITER-IGNITION, DUAL	LF1001C	23KAD	46470	3,300 MOH
					47418	3,300 MOH
6.	A.	FUEL CONTROL-AUGMENTOR	LF1001U&	23HEO	790100	4,000 MOH
	B.	FUEL CONTROL-MAIN	LF1001V&	23HCO	441579	4,000 MOH
					441721	4,000 MOH
7.	A.*	PUMP-FUEL, AUGMENTOR	LF100AG&	23HHO	792840	4,000 MOH
	B.	PUMP-GEAR, MAIN FUEL	LF100AC&	23HA2	708500	5,000 MOH
8.	A.	ROTOR-GENERATOR	LF100AA	23KBB	46122	4,000 MOH
9.	A.	STATOR-GENERATOR	LF100AB	23KBA	44838	4,000 MOH
10.	A.	VALVE-ANTI-ICING, ENGINE INLET	LF1001X&	23QA8	327455	3,000 MOH
					329205	3,000 MOH

11. Replace the following components at the limits indicated.

		ITEM	CII	WUC	PART NUMBER	LIMIT
		BLADE-TURBINE ROTOR, 3RD STAGE		23CBC	4075403	4,300 TAC
		CASE AND DUCT SET-TURBINE REAR		23CAK	4071459	4,300 TAC
					4079210	4,300 TAC
					4077683	4,300 TAC
					4080000	4,300 TAC
					4080043	4,300 TAC
		CASE SET-COMPRESSOR, 4-9 STAGE	PF1004W	23BGE	4075413-01	9,000 TAC
					4080545-01	9,000 TAC
		CASE-COMPRESSOR INTERMEDIATE	PF100AB	23BFS	4078245	4,300 TAC
					4078248	4,300 TAC
					4079419	4,300 TAC
					4080483	4,300 TAC
					4080829	8,600 TAC
					4080877	4,300 TAC
					4080879	4,300 TAC
					4080882	4,300 TAC
					4084288	8,600 TAC
					4084430	8,600 TAC
					4084431	8,600 TAC
					4084432	8,600 TAC
					4084433	8,600 TAC
					4084434	8,600 TAC
					4084435	8,600 TAC
					4084436	8,600 TAC
					4084443	8,600 TAC
		CASE-COMPRESSOR, 10-12 STAGE, ASSY OF	PF1004X	23BGN	4077074	10,000 TAC
					4078507	10,000 TAC
		CASE-DIFFUSER, ASSY OF	PF1004R	23BPD	4075716	9,000 TAC
					4079134	9,000 TAC
					4079831	9,000 TAC
					4083558	9,000 TAC
					4083564	9,000 TAC
					4083830	9,000 TAC
					4083913	9,000 TAC
					4084234	9,000 TAC
					4084235	9,000 TAC
					4084237	9,000 TAC

11. (Continued).

		ITEM	CII	WUC	PART NUMBER	LIMIT
		CASE-TURBINE REAR, ASSY OF		23CAN	4079211	4,300 TAC
		CHAMBER-COMBUSTION, ASSY OF	PF1004T	23BPH	4077232	8,600 TAC
					4077670	8,600 TAC
					4077820	8,600 TAC
					4079375	8,600 TAC
					4080008	8,600 TAC
					4080575	8,600 TAC
					4083095	8,600 TAC
					4083127	8,600 TAC
					4083129	8,600 TAC
					4083194	8,600 TAC
					4083216	8,600 TAC
					4083560	8,600 TAC
					4083565	8,600 TAC
					4083944	8,600 TAC
					4083947	8,600 TAC
					4084089	8,600 TAC
		DISK AND HUB-COMPRESSOR, 6 STAGE, ASSY OF	PF1004D	23BJH	4070846	13,000 TAC
		DISK-DRUM ROTOR, FRONT COMPRESSOR, ASSY OF	PF1003C	23AC5	4071223-01	4,300 TAC
					4081633-01	4,300 TAC
					4086294-01	4,300 TAC
					4086295-01	4,300 TAC
		DISK-DRUM ROTOR, REAR COMPRESSOR, FRONT, ASSY OF	PF1004U	23BGH	4074700-01	4,300 TAC
					4078231-01	4,300 TAC
					4079858-01	4,300 TAC
					4080396-01	4,300 TAC
					4080408-01	4,300 TAC
		DISK-DRUM ROTOR, REAR COMPRESSOR, REAR, ASSY OF	PF1004V	23BGJ	4073123-01	13,000 TAC
					4080102-01	13,000 TAC
					4081469-01	13,000 TAC
					4082938-01	13,000 TAC
		DISK-TURBINE, 1ST STAGE	PF10051	23BNB	4069901	8,700 TAC
					4080301	8,700 TAC
					4085001	8,700 TAC
					4087201	8,700 TAC
		DISK-TURBINE, 2ND STAGE	PF1005A	23BNQ	4069902	9,100 TAC
					4077902	9,100 TAC

11. (Continued).

		ITEM	CII	WUC	PART NUMBER	LIMIT
		DISK-TURBINE, 3RD STAGE	PF10061	23CBB	4073403 4080503 4080603 4084103 4084228 4084231	16,000 TAC 16,000 TAC 16,000 TAC 16,000 TAC 16,000 TAC 16,000 TAC
		DISK-TURBINE, 4TH STAGE	PF10062	23CBP	4072404 4082604	11,300 TAC 20,000 TAC
		HUB ASSY-TURBINE, REAR COMPRESSOR DRIVE	PF10056	23BND	4069333	14,000 TAC
		HUB-TURBINE REAR	PF10067	23CBV	4064230 4080135	16,000 TAC 16,000 TAC
		PLATE-RETAINING, BLADE, TURBINE, 2 STAGE, ASSY OF	PF10053	23BNF	4070147 4079623	11,000 TAC 11,000 TAC
		PLATE-RETAINING, BLADE, TURBINE, FRONT, 1 STAGE	PF10054	23BNG	4069990	9,600 TAC
		PLATE-RETAINING, BLADE, TURBINE, REAR, 2 STAGE	PF10057	23BNM	4061632	20,000 TAC
		RING-AIR SEALING, TURBINE 3RD STAGE, ASSY OF		23CBE	4075741-01	4,300 TAC
		RING-AIR SEALING, TURBINE 4TH STAGE, ASSY OF		23CAE	4068968	4,300 TAC
		RING-COMPRESSOR BLADE LOCK, 3RD STAGE	PF10039	23ADS	4080320	10,000 TAC
		RING SEGMENT-AIR SEALING, TURBINE 3RD STAGE, ASSY OF		23CBE	4069978-01 4069977-01	4,300 TAC 4,300 TAC
		SEAL ASSY-AIR, NO. 4 BEARING	PF100AA	23BMB	4074849 4080807	20,000 TAC 20,000 TAC
		SEAL-AIR, COMPRESSOR, FRONT, 1ST STAGE	PF10036	23ADE	4071081	20,000 TAC
		SEAL-AIR, COMPRESSOR, FRONT, 2ND STAGE	PF1003A	23ADT	4071083 4083150	4,300 TAC 20,000 TAC
		SEAL-AIR, COMPRESSOR, REAR, 1ST STAGE	PF10038	23ADJ	4071082	20,000 TAC
		SEAL-AIR, FRONT COMPRESSOR, INLET	PF10037	23ADD	4071080	20,000 TAC
		SEAL-AIR, TURBINE, 1ST STAGE	PF10058	23BNH	4069949 4080429 4083562 4083238	20,000 TAC 20,000 TAC 20,000 TAC 20,000 TAC
		SEAL-AIR, TURBINE, 3RD STAGE	PF10065	23CBD	4071396 4083240	20,000 TAC 20,000 TAC
		SEAL-AIR, TURBINE, 4TH STAGE	PF10063	23CBL	4073146 4081755 4082297	20,000 TAC 20,000 TAC 20,000 TAC
		SHAFT ASSY-FRONT COMPRESSOR DRIVE, TURBINE	PF10066	23CBK	4060568-01	20,000 TAC
		SUPPORT-NO. 4 BEARING SEAL, FRONT, ASSY OF	PF1004Y	23BMC	4074882 4080082	8,600 TAC 8,600 TAC
		SUPPORT-NO. 4 BEARING SEAL, REAR, ASSY OF	PF1004Z	23BMD	4065652 4067915	11,000 TAC 11,000 TAC

12. Replace the following modules at the limits indicated.

		ITEM	CII	WUC	PART NUMBER	LIMIT
		AUGMENTOR DUCT AND NOZZLE MODULE	DF10070	23F00	4068724	2,150 TAC
					4068824	2,150 TAC
					4084758	3,000 TAC
					4084858	3,000 TAC
		CORE ENGINE MODULE	DF10040	23B00	4068722	4,300 TAC
					4082654	4,300 TAC
					4082657	4,300 TAC
					4084522	4,300 TAC
		FAN DRIVE TURBINE MODULE	DF10060	23C00	4080823	4,300 TAC
					4082655	4,300 TAC
		GEARBOX MODULE	DF10080	23G00	4068725	2,400 MOH
					4082609	3,000 MOH
					4086325	3,000 MOH
		INLET/FAN MODULE	DF10030	23A00	4068721	4,300 TAC
					4082653	4,300 TAC
					4068721	4,300 TAC
					4082653	4,300 TAC
		ROTOR AND STATOR ASSY-TURBINE, REAR COMPRESSOR DRIVE	DF10050	23BN0	4068717	4,300 TAC
					4083015	4,300 TAC
					4084517	4,300 TAC